

Test Report No:
2470803R-RFUSV03S-D

TEST REPORT

FCC Rules&Regulations

Product Name	WiFi USB Adapter
Brand Name	msi
Model No.	GUBE65
FCC ID	I4L-GUBE65
Applicant's Name / Address	Micro-Star Int'l Co.,Ltd. No.69, Lide St., Zhonghe Dist., New Taipei City 235, Taiwan
Manufacturer's Name / Address	Micro-Star Int'l Co.,Ltd. No.69, Lide St., Zhonghe Dist., New Taipei City 235, Taiwan
Test Method Requested, Standard	FCC CFR Title 47 Part 15 Subpart E Section 15.407 ANSI C63.10-2013
Verdict Summary	IN COMPLIANCE
Documented By	 Amelia Wu
Approved By	 Allen Lin
Date of Receipt	Jul. 26, 2024
Date of Issue	Jan. 16, 2025
Report Version	V1.0

INDEX

	page
Competences and Guarantees.....	4
General Conditions	4
Revision History	5
Summary of Test Result.....	6
Comments and Remarks	6
1. General Information	7
1.1. EUT Description.....	7
1.2. EUT Information.....	7
1.3. Applicable Standards	8
1.4. Testing Location Information.....	8
1.5. Measurement Uncertainty.....	9
1.6. List of Test Equipment.....	10
2. Test Configuration of EUT	11
2.1. Test Condition	11
2.2. Test Frequency Mode	11
2.3. Duty Cycle.....	12
2.4. The Worst Case Measurement Configuration	16
2.5. Tested System Details	17
2.6. Configuration of tested System.....	17
3. AC Power Line Conducted Emission	18
3.1. Test Setup	18
3.2. Test Limit.....	18
3.3. Test Procedure.....	18
3.4. Test Result of AC Power Line Conducted Emission	18
4. Emission Bandwidth.....	19
4.1. Test Setup	19
4.2. Test Limit.....	19
4.3. Test Procedure.....	19
4.4. Test Result of Emission Bandwidth.....	19
5. Maximum Conducted Output Power	20
5.1. Test Setup	20
5.2. Test Limit.....	21
5.3. Test Procedure.....	21
5.4. Test Result of Maximum Conducted Output Power.....	21
6. Maximum Power Spectral Density	22
6.1. Test Setup	22

6.2.	Test Limit.....	22
6.3.	Test Procedure.....	22
6.4.	Test Result of Maximum Power Spectral Density.....	22
7.	Transmitter Radiated Spurious Emission.....	23
7.1.	Test Setup.....	23
7.2.	Test Limit.....	24
7.3.	Test Procedure.....	25
7.4.	Test Result of Transmitter Radiated Spurious Emission	25
Appendix A. Test Result of AC Power Line Conducted Emission		
Appendix B. Test Result of Emission Bandwidth		
Appendix C. Test Result of Maximum Conducted Output Power		
Appendix D. Test Result of Maximum Power Spectral Density		
Appendix E. Test Result of Transmitter Radiated Spurious Emission		
Appendix F. Test Setup Photograph		

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	Jan. 16, 2025

Summary of Test Result

Report Clause	Test Items	Result (PASS/FAIL)	Remark
3	AC Power Line Conducted Emission	PASS	-
4	Emission Bandwidth	PASS	-
5	Maximum Conducted Output Power	PASS	-
6	Maximum Power Spectral Density	PASS	-
7	Transmitter Radiated Spurious Emission	PASS	-

Comments and Explanations

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Comments and Remarks

The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

1. General Information

1.1. EUT Description

Frequency Range	5720 ~ 5850 MHz	
Operating Frequency / Channel Number	IEEE 802.11a	5720 ~ 5825 MHz / 6 Channels
	IEEE 802.11n/ac/ax/be (20 MHz)	
	IEEE 802.11n/ac/ax/be (40 MHz)	5710 ~ 5795 MHz / 3 Channels
	IEEE 802.11ac/ax/be (80 MHz)	5690 ~ 5775 MHz / 2 Channel
Type of Modulation	IEEE 802.11a/n	OFDM-BPSK, QPSK, 16QAM, 64QAM
	IEEE 802.11ac	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM
	IEEE 802.11ax	OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
	IEEE 802.11be	OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM

Accessories Information				
No.	Equipment Name	Brand Name	Model No.	Remark
1	Cradle	msi	GUBE65 Cradle	With cable: Shielded, 0.9m

Antenna Information					
Ant.	Brand Name	Model No.	Type	Antenna Gain (dBi)	Directional Gain (dBi)
1	WHA YU	C059-510503-A	PCB	2.62	5.65
2	WHA YU	C059-510504-A	PCB	2.66	

Directional Gain = $10 \log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{Ant}]$

For IEEE 802.11a/n/ac/ax/be Mode: (2TX, 2RX)

Both Ant. 1 and Ant. 2 can be used as transmitting/receiving antennas, and they can transmit/receive signal simultaneously.

1.2. EUT Information

EUT Power Type	From Host system			
Beamforming Function	☐	With beamforming	☒	Without beamforming
Resource Unit of 802.11ax/be	☒	Full RU	☐	Partial RU
Product Type	☐	Outdoor AP	☐	Indoor AP
	☐	Fixed P2P AP	☒	Client

1.3. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ KDB 662911 D01 v02r01
- ♦ KDB 412172 D01 v01r01
- ♦ KDB 414788 D01 v01r01

1.4. Testing Location Information

Testing Location Information		
Test Laboratory : DEKRA Testing and Certification Co., Ltd.		
1 (TAF: 3024)	ADD: No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958 Test site Designation No. TW3024 with FCC. Conformity Assessment Body Identifier (CABID) TW3024 with ISED.	
2 (TAF: 3024)	ADD: No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958 Test site Designation No. TW3024 with FCC. Conformity Assessment Body Identifier (CABID) TW3024 with ISED.	
Test site number for address 1 includes HC-SR02. Test site number for address 2 includes HC-CB02, HC-CB03, HC-CB04, HC-SR10 and HC-SR12.		

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
AC Conduction Emission	HC-SR02	Gary Liao	19~21 / 60~61.5	2024/11/21~2024/11/22
RF Conducted Emission	HC-SR12	Kevin Teng	22.8~24.2 / 49.2~52.1	2024/10/01~2024/11/22
Radiated Emission	HC-CB04	Ling Chen Cyril Chen Brook Cheng	22.7~24.9 / 47.2~50.9	2024/10/08~2024/10/29

1.5. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Test Item	Uncertainty
AC Power Line Conducted Emission	± 2.34 dB
Emission Bandwidth	± 636.54 Hz
Maximum Conducted Output Power	± 1.16 dB
Maximum Power Spectral Density	± 2.47 dB
Transmitter Radiated Spurious Emission	± 3.52 dB below 1 GHz ± 3.56 dB above 1 GHz

1.6. List of Test Equipment

HC-SR02

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Artificial Mains Network	R&S	ENV4200	848411/010	9kHz-30MHz, 4line/100A	2023/12/15	2024/12/14
EMI Test Receiver	R&S	ESR3	102608	9 kHz - 3.6 GHz	2024/09/11	2025/09/10
Two-Line V-Network	R&S	ENV216	100096	9kHz-30MHz	2024/06/03	2025/06/02
Coaxial Cable(9 m)	Harbour	RG-400	HC-SR02	9 kHz–2500 MHz	2024/08/15	2025/08/14
EMI Testing System	Audix	e3 210616 dekra v9	HC-SR02	N/A	N/A	N/A

HC-SR12

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
High Speed Peak Power Meter Dual Input	Anritsu	ML2496A	1947001	0.3-40 GHz	2024/01/09	2025/01/08
Pulse Power Sensor	Anritsu	MA2411B	1911082	0.3-40 GHz	2024/01/09	2025/01/08
Pulse Power Sensor	Anritsu	MA2411B	1911083	0.3-40 GHz	2024/01/09	2025/01/08
Signal & Spectrum Analyzer	R&S	FSV40	101869	10Hz-40GHz	2024/06/20	2025/06/19

HC-CB04

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Signal and Spectrum Analyzer	R&S	FSVA40	101435	10 Hz-40 GHz	2024/05/17	2025/05/16
Trilog Broadband Antenna	Schwarzbeck	VULB 9168	1209	30 MHz-2 GHz	2024/06/11	2025/06/10
Double Ridged Horn Antenna	RF SPIN	DRH18-E	211212A18EN	1G-18GHz	2023/11/17	2024/11/16
Horn Antenna	Schwarzbeck	BBHA 9170	203	18G-40GHz	2024/02/02	2025/02/01
Pre-Amplifier	EMCI	EMC01820I	980364	30M-8 GHz,20 dB	2024/06/04	2025/06/03
Pre-Amplifier	EMEC	EM01G18GA	060835	1-18 GHz,50 dB	2024/07/16	2025/07/15
Pre-Amplifier	SGH	SGH184	20230411-2	18G-40 GHz,54 dB	2024/04/23	2025/04/22
EMI Test Receiver	R&S	ESR7	102260	10 Hz-7 GHz	2023/11/27	2024/11/26
Magnetic Loop Antenna	Teseq	HLA 6121	49611	0.01-30 MHz	2024/02/23	2025/02/22
Coaxial Cable	Huber+Suhner	SF104	HC-CB04	30 MHz-18 GHz, 11m	2024/08/07	2025/08/06
Coaxial Cable	Huber+Suhner,R osnol	SF102_UP0264	HC-CB04-1	18-40 GHz, 3m	2024/08/13	2025/08/12
Radiated Software	Audix	e3 V9	HC-CB04_1	N/A	N/A	N/A

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2. Test Configuration of EUT

2.1. Test Condition

EUT Operational Condition	
Testing Voltage	AC 120V/60Hz

2.2. Test Frequency Mode

Test Software	AX Series MP Toolkit
---------------	----------------------

<2TX, NSS 1>

Modulation	Frequency (MHz)	Power Setting
802.11a	5720	14.0
	5745	12.5
	5785	12.5
	5825	13.0
802.11be (20 MHz)	5720	14.0
	5745	12.5
	5785	12.5
	5825	13.0
802.11be (40 MHz)	5710	13.0
	5755	12.0
	5795	12.0
802.11be (80 MHz)	5690	13.0
	5775	12.0

<2TX, NSS 2>


Modulation	Frequency (MHz)	Power Setting
802.11be (20 MHz)	5720	14.0
	5745	12.5
	5785	12.5
	5825	13.0
802.11be (40 MHz)	5710	13.0
	5755	12.5
	5795	12.0
802.11be (80 MHz)	5690	13.0
	5775	12.5

2.3. Duty Cycle

<2TX, NSS 1>

Modulation	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	0.087	0.292	29.79	5.259	11.494
802.11be (20 MHz)	0.334	0.540	61.85	2.086	2.994
802.11be (40 MHz)	0.334	0.540	61.85	2.086	2.994
802.11be (80 MHz)	0.332	0.540	61.48	2.113	3.012
802.11be (160 MHz)	0.332	0.540	61.48	2.11	3.012


Note: The duty factor will compensate for the total power and power spectral density.

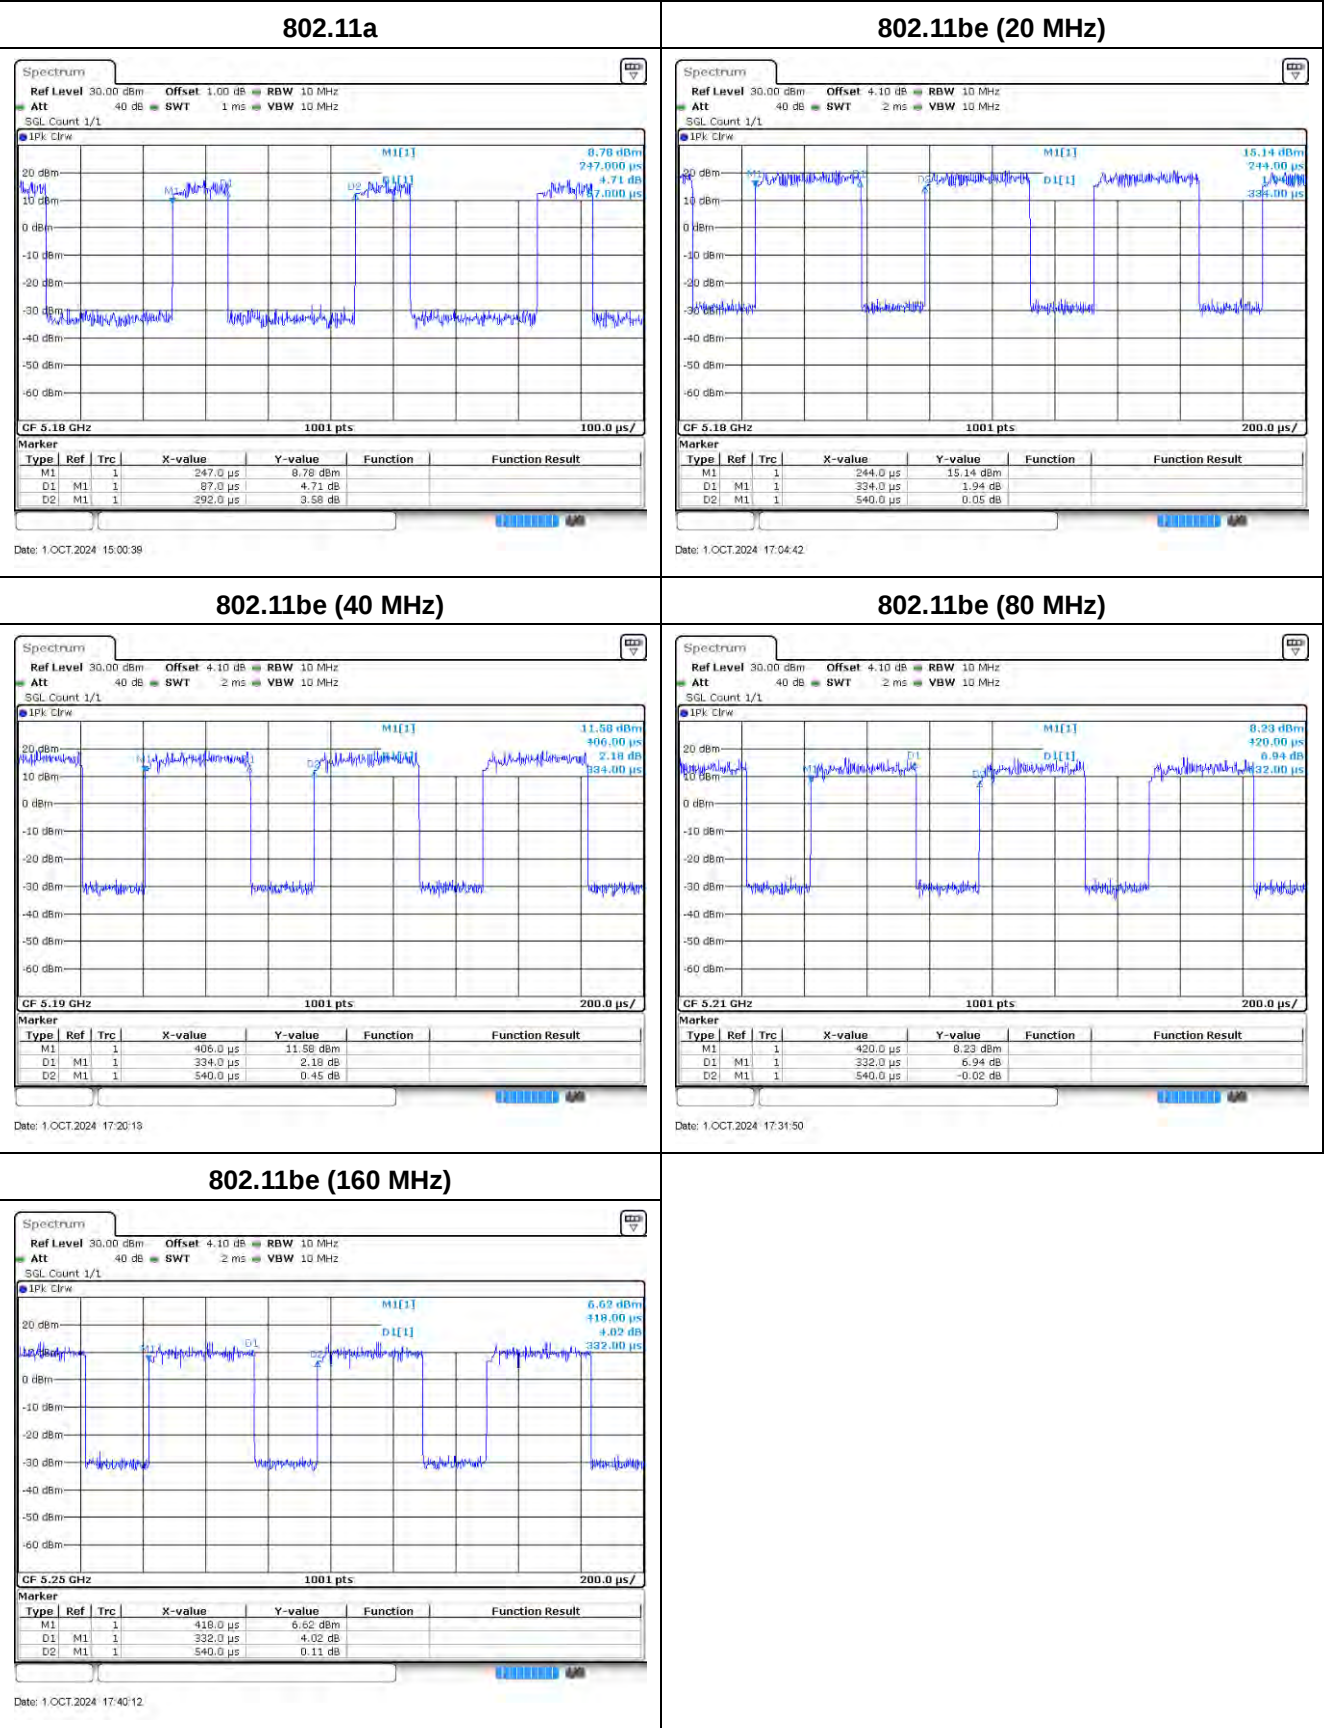

<2TX, NSS 2>

Modulation	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11be (20 MHz)	0.348	0.556	62.59	2.035	2.874
802.11be (40 MHz)	0.348	0.556	62.59	2.035	2.874
802.11be (80 MHz)	0.348	0.556	62.59	2.035	2.874
802.11be (160 MHz)	0.348	0.556	62.59	2.03	2.874

Note: The duty factor will compensate for the total power and power spectral density.

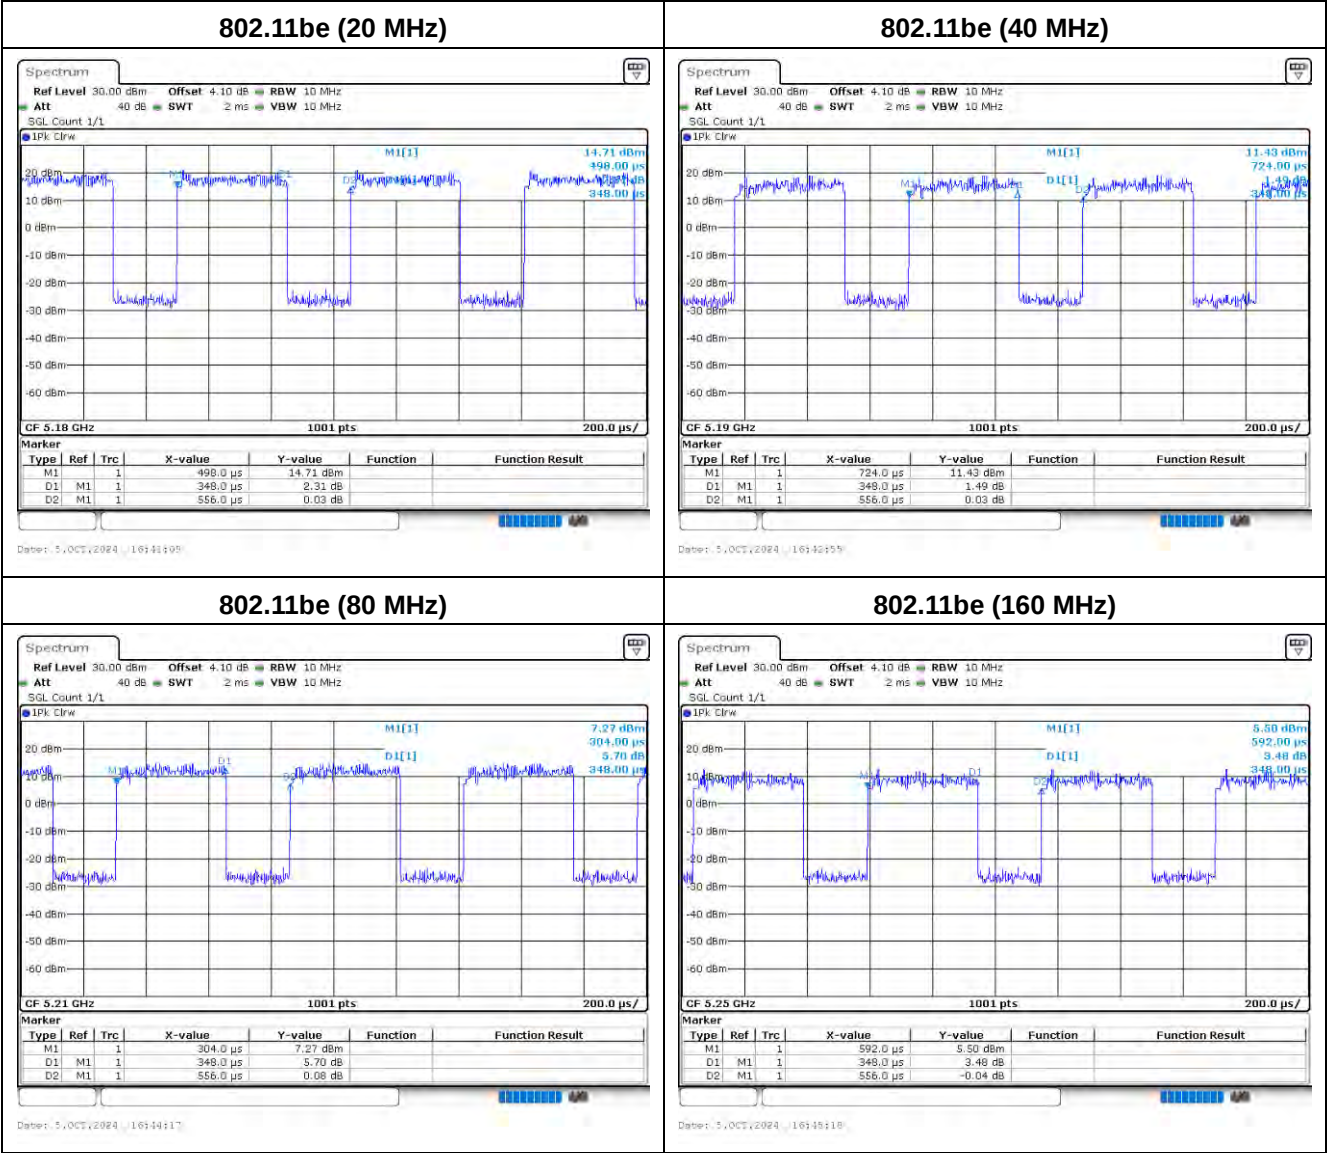

2.4. The Worst Case Measurement Configuration

Tests Item	AC Power Line Conducted Emission
Test Condition	AC power line conducted measurement for line and neutral
Operating Mode	Transmit

Tests Item	Emission Bandwidth Maximum Conducted Output Power Maximum Power Spectral Density
Test Condition	Conducted measurement at transmit chains

Tests Item	Transmitter Radiated Spurious Emission
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Transmit
Operating Mode > 1GHz	Transmit

The EUT was performed at X axis, Y axis and Z axis position for radiated spurious emission test.
The worst case was found at Z axis, so the measurement will follow this same test configuration.


Note:

1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. For radiated emission below 1 GHz and AC power line conducted emission have performed all modes of operation were investigated and the worst-case emissions are reported.
3. The modulation and bandwidth are similar for 802.11n mode for HT20/HT40, 802.11ac mode for VHT20/VHT40/VHT80, 802.11ax mode for HEW20/HEW40/HEW80 and 802.11be mode for EHT20/EHT40/EHT80, therefore investigated worst case to representative mode in test report.

2.5. Tested System Details


No.	Equipment	Brand Name	Model No.	Serial No.
1	Notebook	ASUS	BX310U	J5N0CV04S32319B

2.6. Configuration of tested System

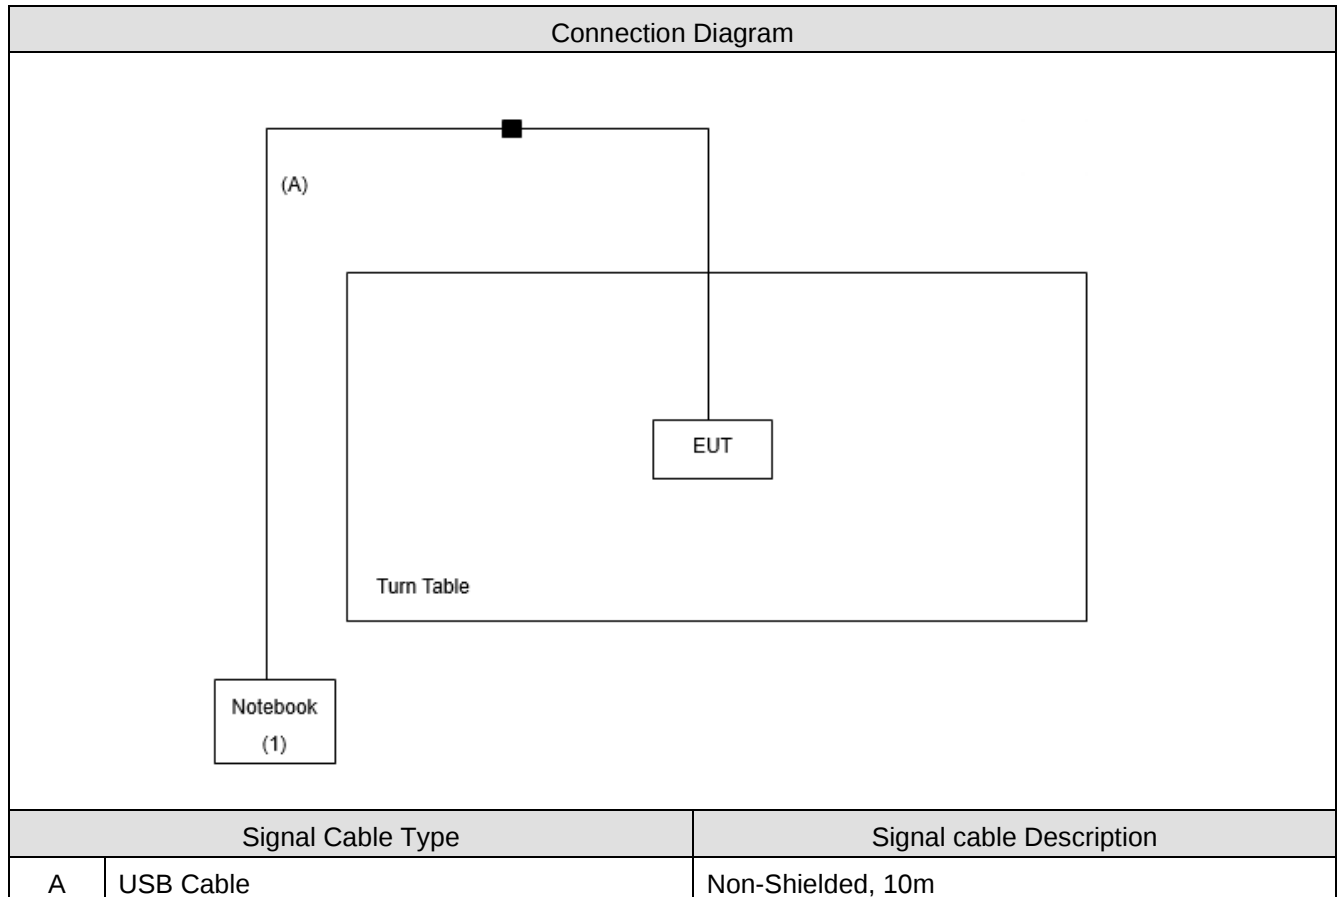

3. AC Power Line Conducted Emission

3.1. Test Setup

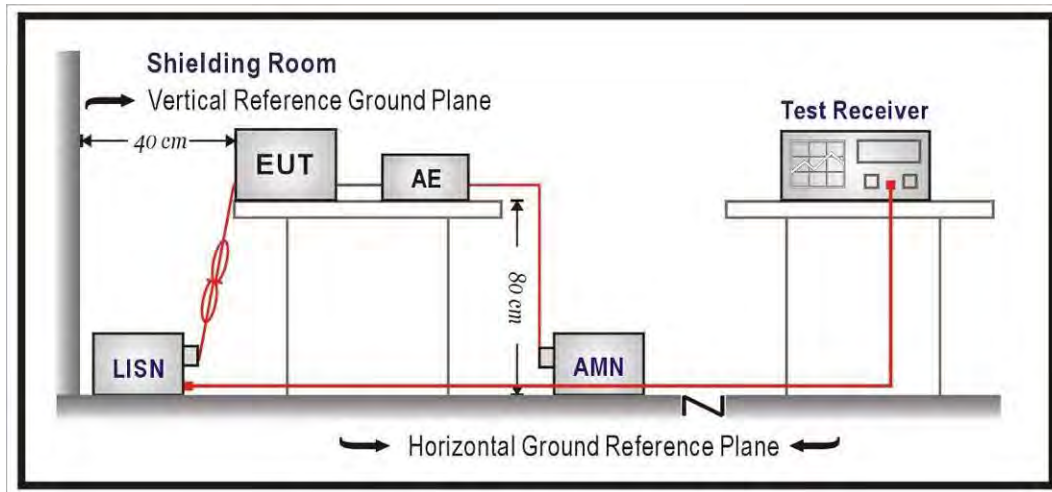

3.2. Test Limit

Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remark: In the above table, the tighter limit applies at the band edges.

3.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs.)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz.

3.4. Test Result of AC Power Line Conducted Emission

Refer as Appendix A

4. Emission Bandwidth

4.1. Test Setup

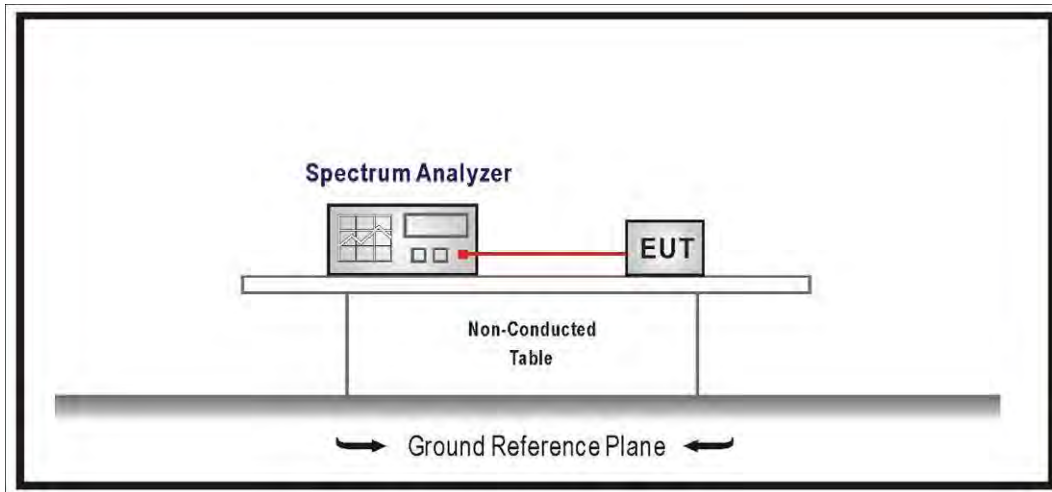

4.2. Test Limit

99% & 26dB Bandwidth : No Required

6dB Bandwidth $\geq$ 500kHz (within the 5.725-5.85GHz and 5.85-5.896GHz)

4.3. Test Procedure

99% & 26dB Bandwidth :

The EUT was tested according to U-NII test procedure of KDB 789033.

Set RBW 1% of the emission bandwidth, VBW equal to 3 times the RBW.

DTS Bandwidth :

Set RBW = 100kHz, VBW $\geq$ 3xRBW, Sweep time=Auto, Set Peak detector.


4.4. Test Result of Emission Bandwidth

Refer as Appendix B


5. Maximum Conducted Output Power

5.1. Test Setup

For straddle channels:

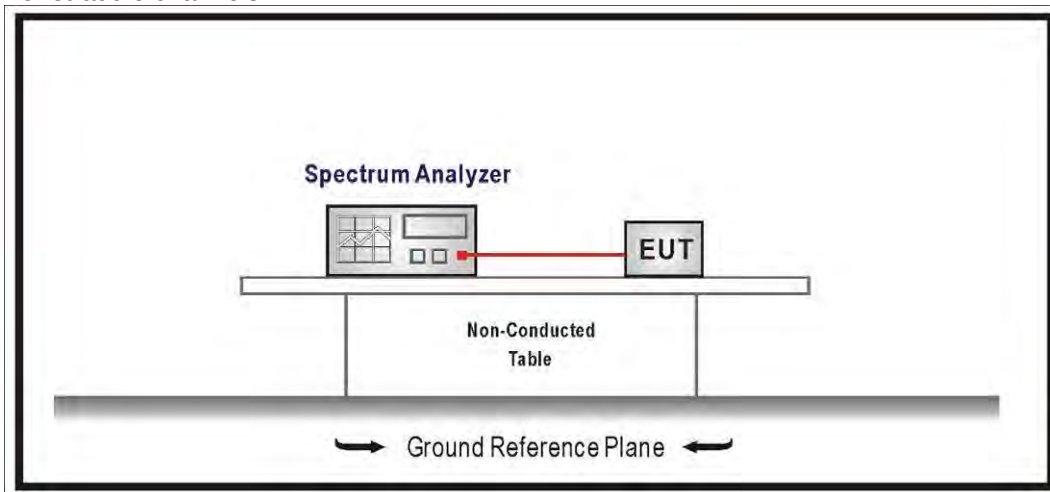

For other channels:

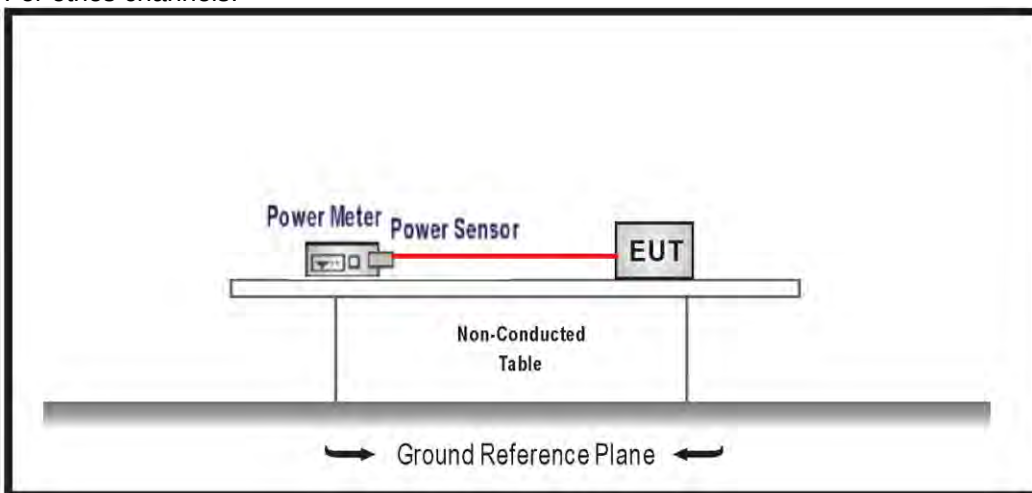

5.2. Test Limit

1. For the 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test Procedure


The EUT was setup to ANSI C63.10: 2013; tested according to U-NII test procedure of KDB 789033.

5.4. Test Result of Maximum Conducted Output Power

Refer as Appendix C

6. Maximum Power Spectral Density

6.1. Test Setup

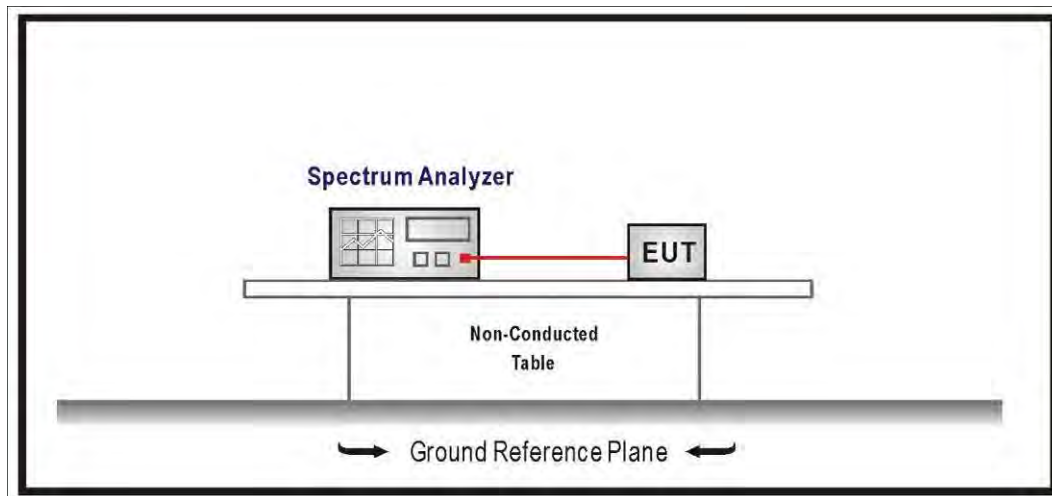

6.2. Test Limit

1. For the 5650 ~ 5725 MHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
2. For the band 5.725 ~ 5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.

6.3. Test Procedure

The EUT was setup to ANSI C63.10: 2013; tested to U-NII test procedure of KDB 789033.


6.4. Test Result of Maximum Power Spectral Density

Refer as Appendix D


7. Transmitter Radiated Spurious Emission

7.1. Test Setup


9 kHz ~ 30 MHz

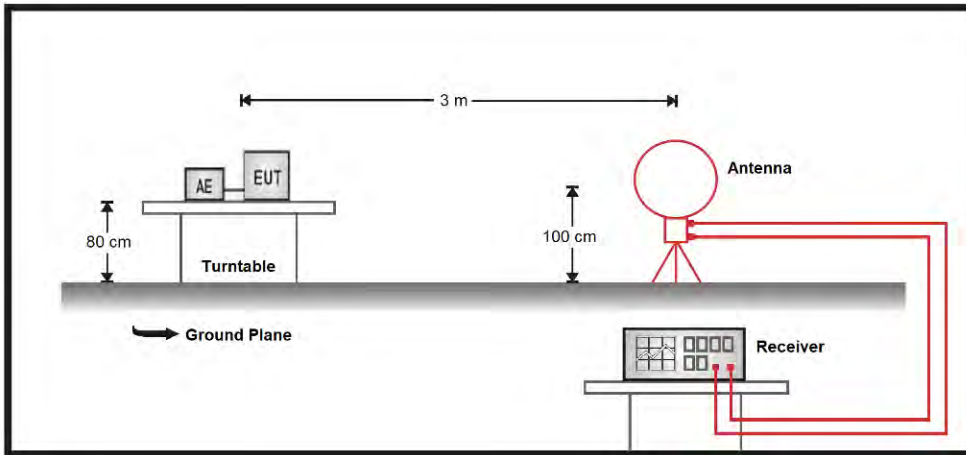

30 MHz ~ 1 GHz

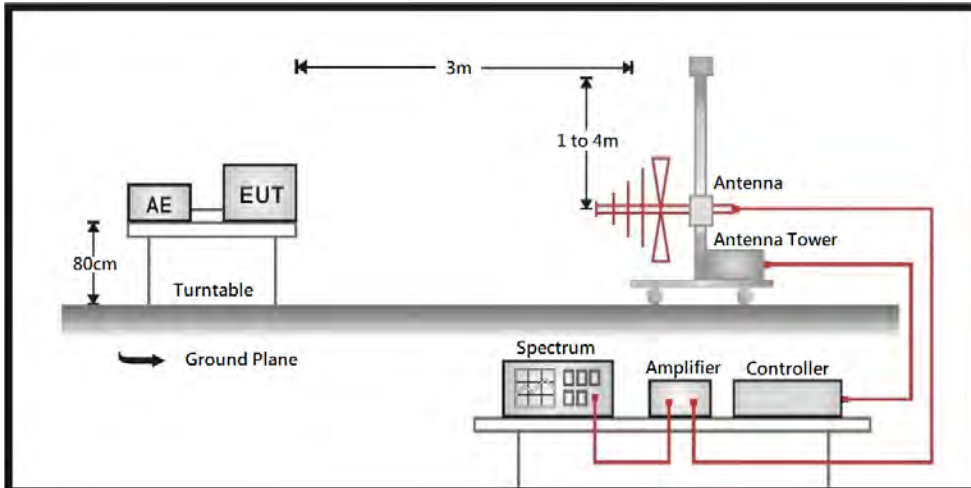

Above 1 GHz

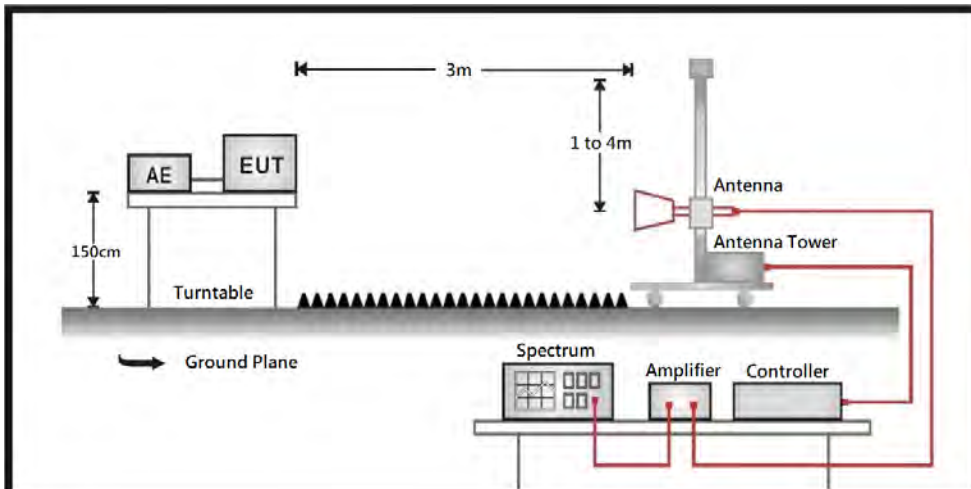

7.2. Test Limit

Frequency (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBuV/m) = 20 log Field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Unwanted Emission out of the restricted bands Test Limit

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength (dBuV/m@3m)
5470 – 5725	-27	68.2
5725 – 5850	-27 ^{*1}	68.2 ^{*1}
	10 ^{*2}	105.2 ^{*2}
	15.6 ^{*3}	110.8 ^{*3}
	27 ^{*4}	122.2 ^{*4}

^{*1} beyond 75 MHz or more above of the band edge.

^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts).}$$

7.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The additional latch filter below 1 GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz, above 1 GHz are 1 MHz.


The frequency range from 9 kHz to 10th harmonics and included The frequency range from the lowest oscillator frequency generated within the device up to the 10th harmonic was checked is checked.

7.4. Test Result of Transmitter Radiated Spurious Emission

Refer as Appendix E

Appendix A. Test Result of AC Power Line Conducted Emission

Test Mode	Transmit	Phase	Line
Test Condition	802.11be (80 MHz) / Ant. 1 + Ant. 2		

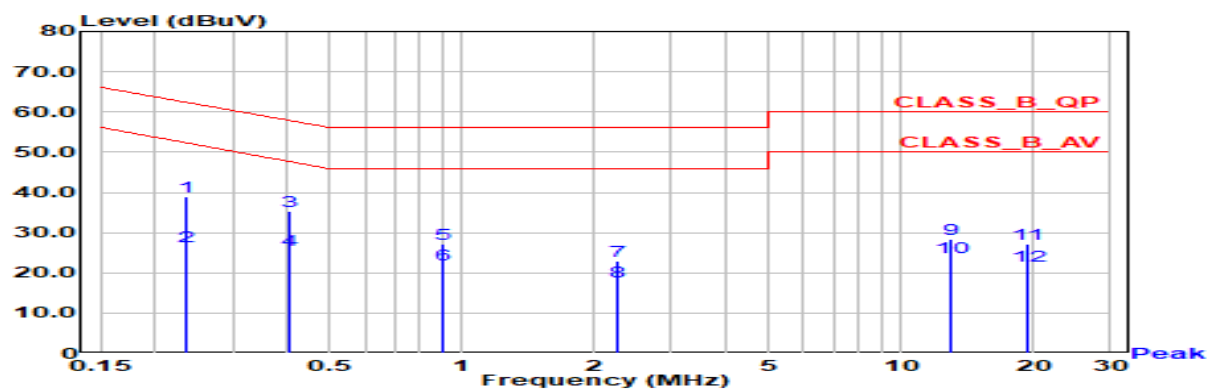


No	Frequency (MHz)	Emission Level (dBUV)	Limit (dBUV)	Margin (dB)	Reading Level (dBUV)	Correct Factor (dB)	Detector Type
1	0.235	39.01	62.27	-23.26	29.34	9.67	QP
2	0.235	26.63	52.27	-25.64	16.96	9.67	AV
3	0.403	35.34	57.80	-22.45	25.67	9.67	QP
*4	0.403	25.78	47.80	-22.02	16.11	9.67	AV
5	0.907	27.03	56.00	-28.97	17.34	9.69	QP
6	0.907	22.00	46.00	-24.00	12.30	9.69	AV
7	2.261	23.01	56.00	-32.99	13.14	9.88	QP
8	2.261	17.91	46.00	-28.09	8.04	9.88	AV
9	12.919	28.45	60.00	-31.55	18.29	10.15	QP
10	12.919	23.75	50.00	-26.25	13.60	10.15	AV
11	19.441	27.21	60.00	-32.79	16.97	10.24	QP
12	19.441	21.78	50.00	-28.22	11.54	10.24	AV

Remark:

1. "*" means this data is the worst emission level.
2. Emission Level = Reading Level + Correct Factor (Correct Factor = LISN Insertion Loss + Cable Loss).
3. Margin = Emission Level - Limit.

Test Mode	Transmit	Phase	Neutral
Test Condition	802.11be (80 MHz) / Ant. 1 + Ant. 2		

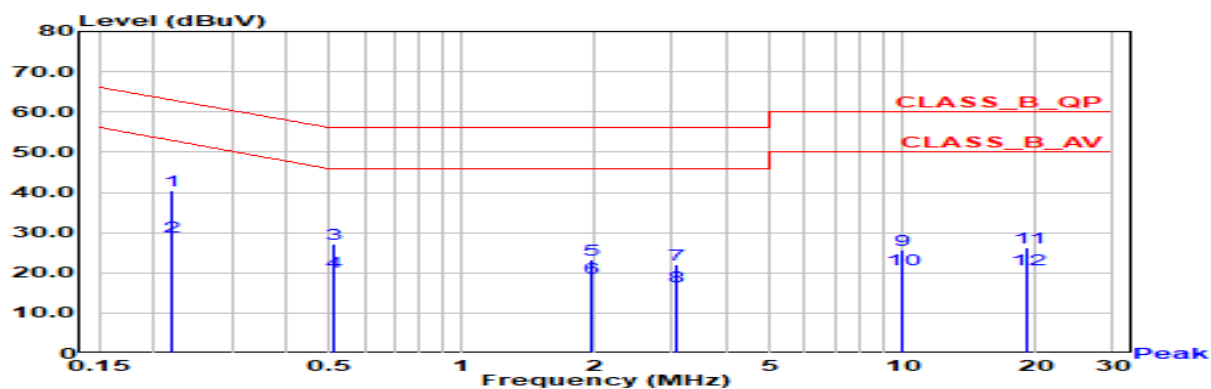

No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
*1	0.220	40.41	62.83	-22.41	30.74	9.67	QP
2	0.220	29.07	52.83	-23.76	19.40	9.67	AV
3	0.508	27.16	56.00	-28.84	17.48	9.67	QP
4	0.508	20.22	46.00	-25.78	10.54	9.67	AV
5	1.959	23.28	56.00	-32.72	13.42	9.86	QP
6	1.959	18.66	46.00	-27.34	8.80	9.86	AV
7	3.066	22.18	56.00	-33.82	12.28	9.90	QP
8	3.066	16.67	46.00	-29.33	6.77	9.90	AV
9	9.933	25.54	60.00	-34.46	15.45	10.09	QP
10	9.933	20.81	50.00	-29.19	10.72	10.09	AV
11	19.200	26.41	60.00	-33.59	16.16	10.24	QP
12	19.200	20.98	50.00	-29.02	10.73	10.24	AV

Remark:

1. "*" means this data is the worst emission level.
2. Emission Level = Reading Level + Correct Factor (Correct Factor = LISN Insertion Loss + Cable Loss).
3. Margin = Emission Level - Limit.

Appendix B. Test Result of Emission Bandwidth

Modulation	Frequency (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Limit (MHz)	
		Ant. 1	Ant. 2	Ant. 1	Ant. 2	99% & 26dB Bandwidth	
802.11a	5720 (U-NII-2C)	13.07	13.11	13.92	13.88	-	
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		DTS Bandwidth (MHz)		Limit (MHz)	
		Ant. 1	Ant. 2	Ant. 1	Ant. 2	99% Bandwidth	DTS Bandwidth
802.11a	5720 (U-NII-3)	3.11	3.11	2.56	2.56	-	0.50
	5745	16.26	16.22	15.12	15.12	-	0.50
	5785	16.30	16.22	15.12	15.12	-	0.50
	5825	16.22	16.26	15.12	15.12	-	0.50


Modulation	Frequency (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Limit (MHz)	
		Ant. 1	Ant. 2	Ant. 1	Ant. 2	99% & 26dB Bandwidth	
802.11be (20 MHz)	5720 (U-NII-2C)	14.39	14.39	15.00	15.00	-	
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		DTS Bandwidth (MHz)		Limit (MHz)	
		Ant. 1	Ant. 2	Ant. 1	Ant. 2	99% Bandwidth	DTS Bandwidth
802.11be (20 MHz)	5720 (U-NII-3)	4.35	4.35	2.60	2.60	-	0.50
	5745	18.74	18.78	15.16	16.36	-	0.50
	5785	18.78	18.74	16.72	16.68	-	0.50
	5825	18.74	18.70	16.36	16.36	-	0.50

Modulation	Frequency (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Limit (MHz)	
		Ant. 1	Ant. 2	Ant. 1	Ant. 2	99% & 26dB Bandwidth	
802.11be (40 MHz)	5710 (U-NII-2C)	33.70	33.70	34.84	34.76	-	
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		DTS Bandwidth (MHz)		Limit (MHz)	
		Ant. 1	Ant. 2	Ant. 1	Ant. 2	99% Bandwidth	DTS Bandwidth
802.11be (40 MHz)	5710 (U-NII-3)	3.86	3.86	2.52	2.52	-	0.50
	5755	37.48	37.56	35.20	35.12	-	0.50
	5795	37.48	37.48	35.44	36.24	-	0.50


Modulation	Frequency (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Limit (MHz)	
		Ant. 1	Ant. 2	Ant. 1	Ant. 2	99% & 26dB Bandwidth	
802.11be (80 MHz)	5690 (U-NII-2C)	73.36	73.52	75.00	75.00	-	
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		DTS Bandwidth (MHz)		Limit (MHz)	
		Ant. 1	Ant. 2	Ant. 1	Ant. 2	99% Bandwidth	DTS Bandwidth
802.11be (80 MHz)	5690 (U-NII-3)	3.20	3.20	2.60	2.60	-	0.50
	5775	77.04	76.88	75.20	76.32	-	0.50

For 99% Bandwidth:


802.11a / Ant.1+Ant.2 / 6M / 5720MHz / Ch144

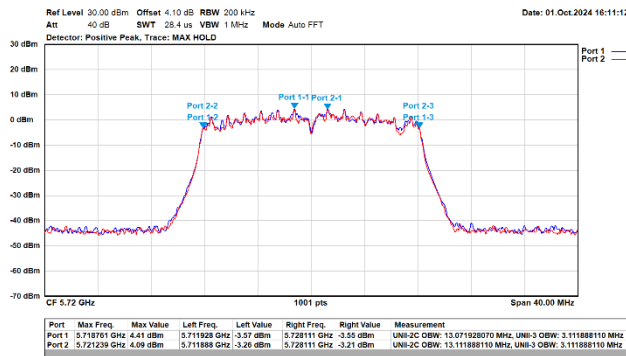


802.11a / Ant.1+Ant.2 / 6M / 5745MHz / Ch149

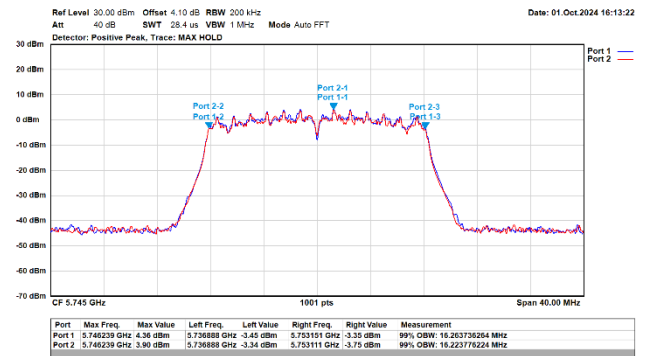


802.11a / Ant.1+Ant.2 / 6M / 5785MHz / Ch157

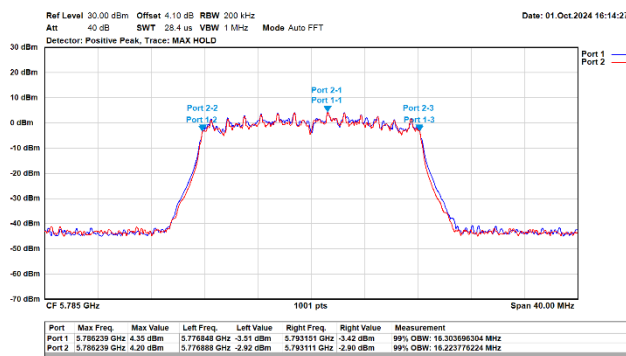


802.11a / Ant.1+Ant.2 / 6M / 5825MHz / Ch165

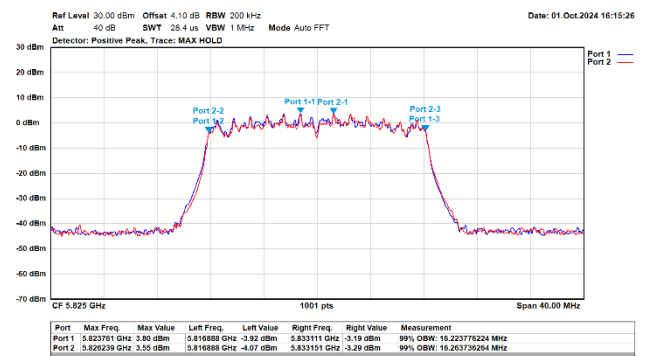


802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5720MHz / Ch144

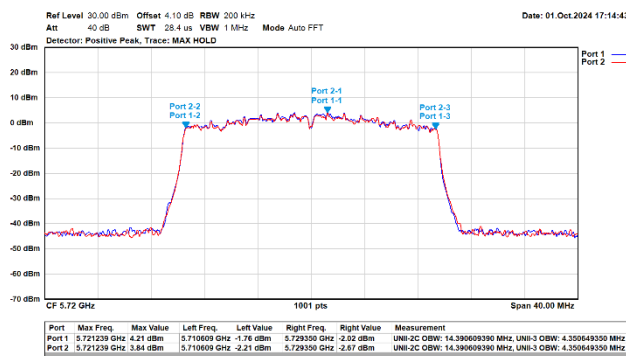


802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5745MHz / Ch149

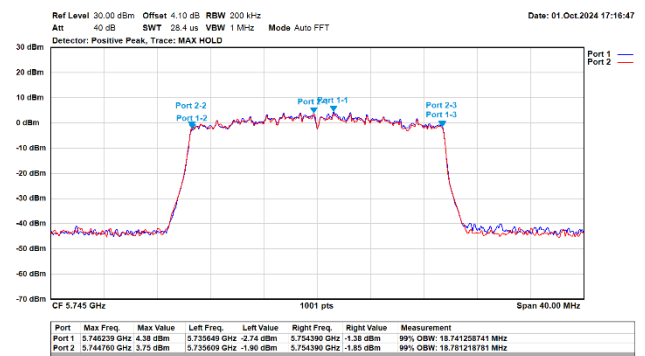

802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5785MHz / Ch157

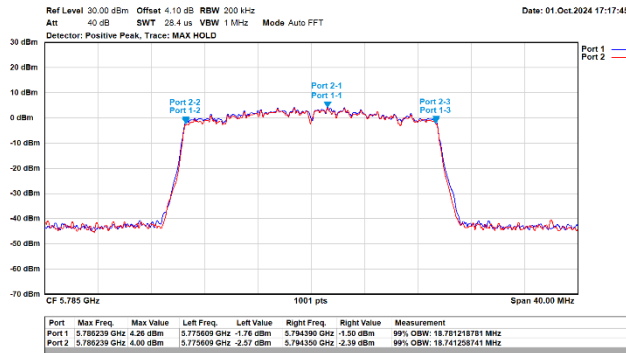


802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5825MHz / Ch165

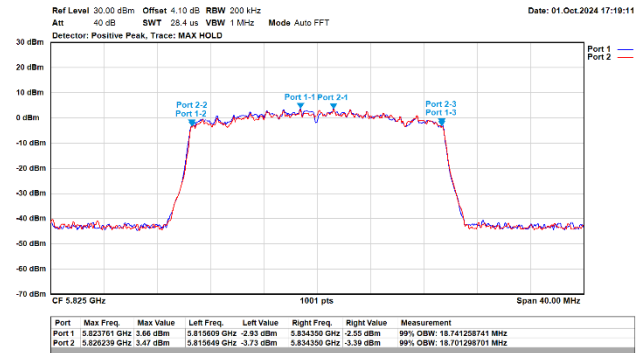


802.11be / 40MHz / Ant.1+Ant.2 / MCS0 / 5670MHz / Ch134




802.11be / 40MHz / Ant.1+Ant.2 / MCS0 / 5710 MHz / Ch142

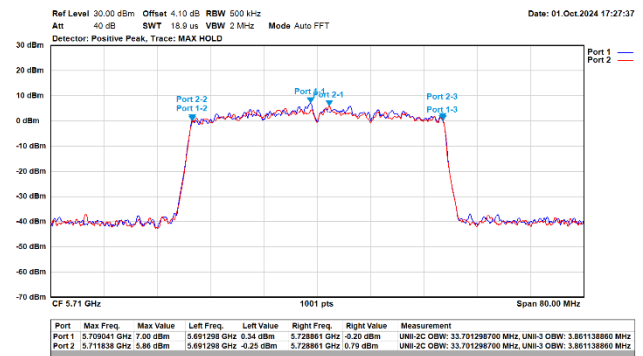


802.11be / 40MHz / Ant.1+Ant.2 / MCS0 / 5755MHz / Ch151

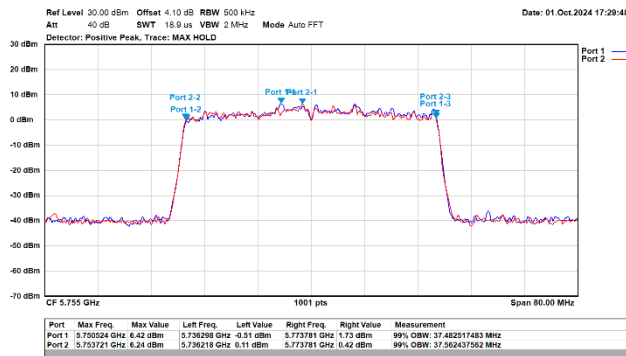


802.11be / 40MHz / Ant.1+Ant.2 / MCS0 / 5795MHz / Ch159

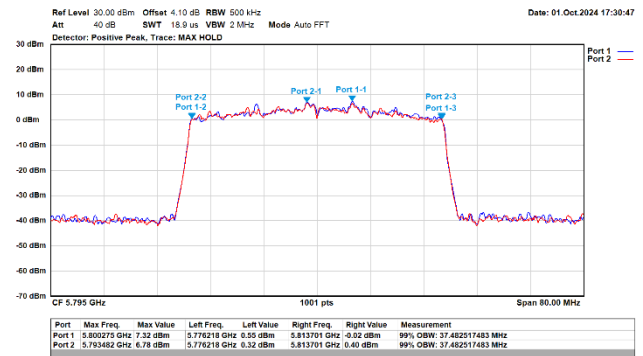

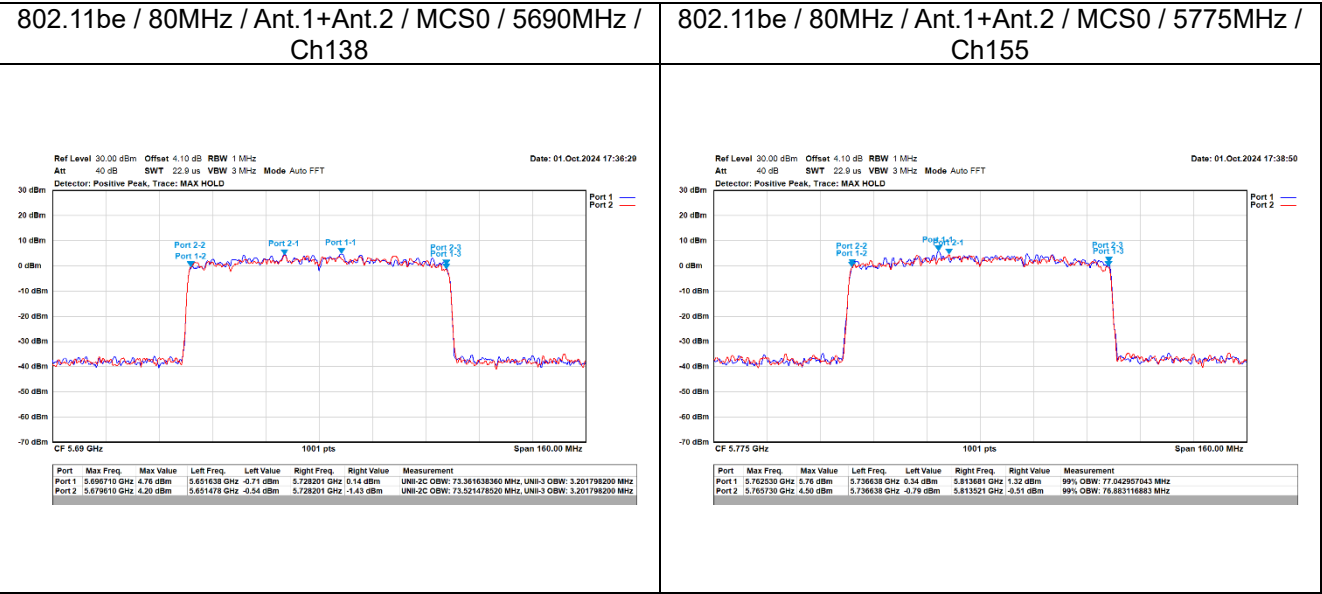


For 26dB Bandwidth:


802.11a / Ant.1+Ant.2 / 6M / 5720MHz / Ch144

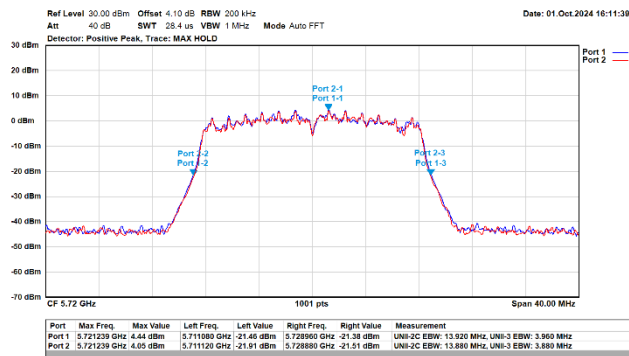

802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5720MHz / Ch144

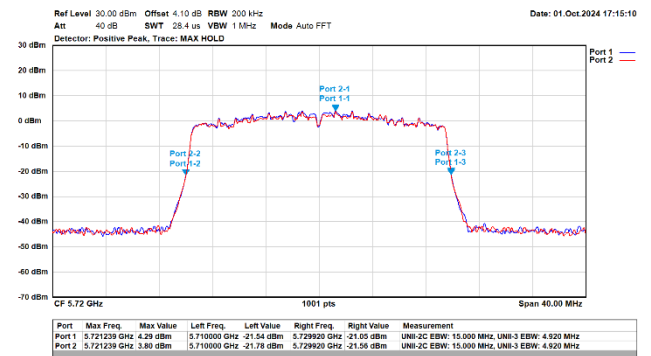

802.11be / 40MHz / Ant.1+Ant.2 / MCS0 / 5710MHz / Ch142

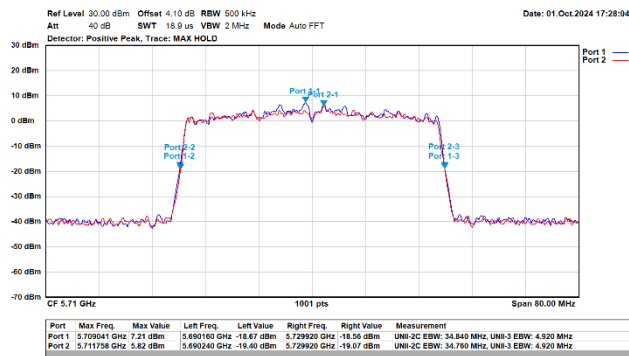


802.11be / 80MHz / Ant.1+Ant.2 / MCS0 / 5690MHz / Ch138




For DTS Bandwidth:


802.11a / Ant.1+Ant.2 / 6M / 5720MHz / Ch144

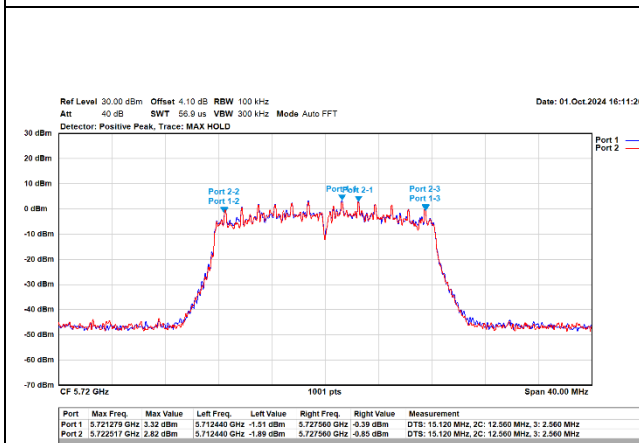


802.11a / Ant.1+Ant.2 / 6M / 5745MHz / Ch149

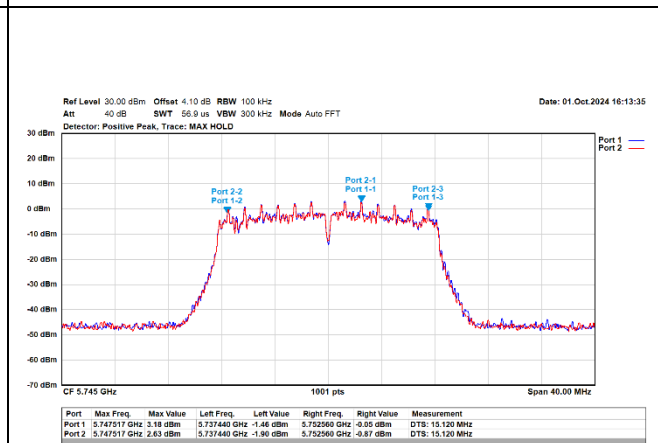


802.11a / Ant.1+Ant.2 / 6M / 5785MHz / Ch157

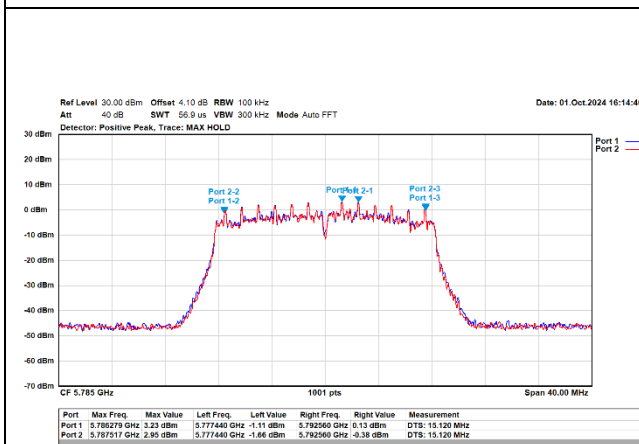


802.11a / Ant.1+Ant.2 / 6M / 5825MHz / Ch165






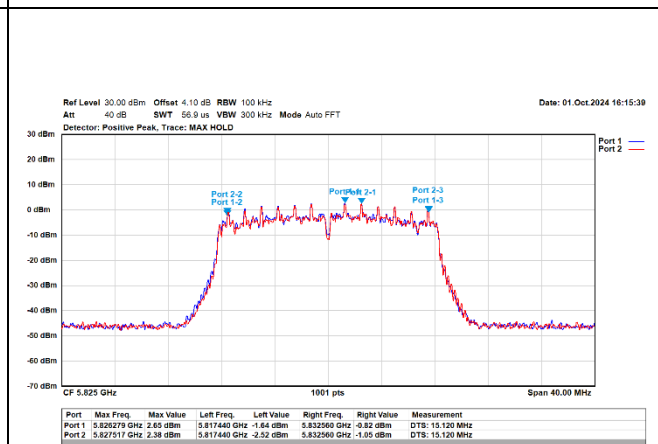


802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5720MHz / Ch144

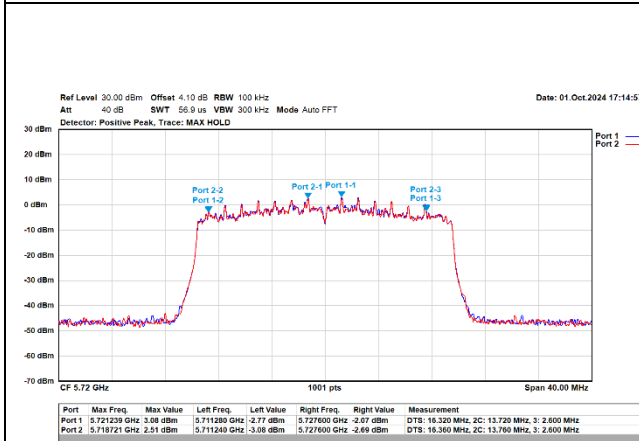


802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5745MHz / Ch149

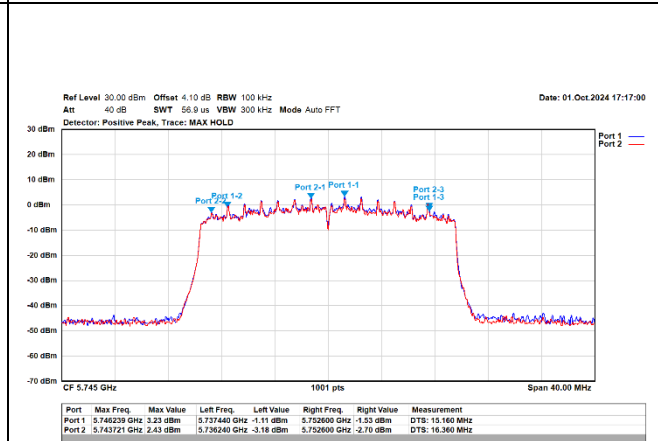

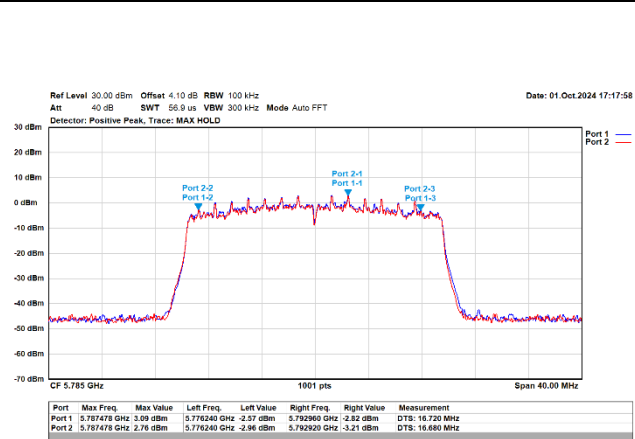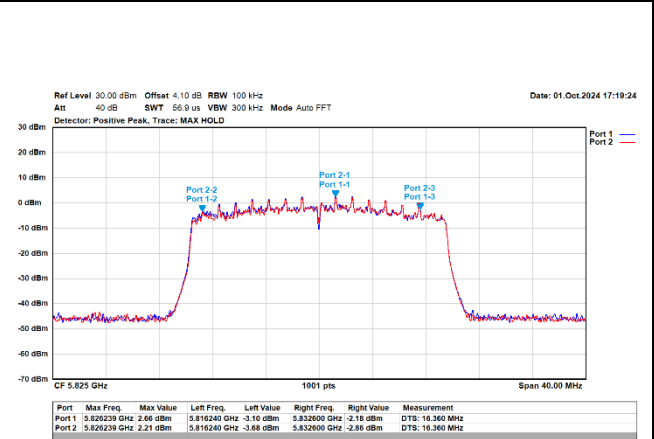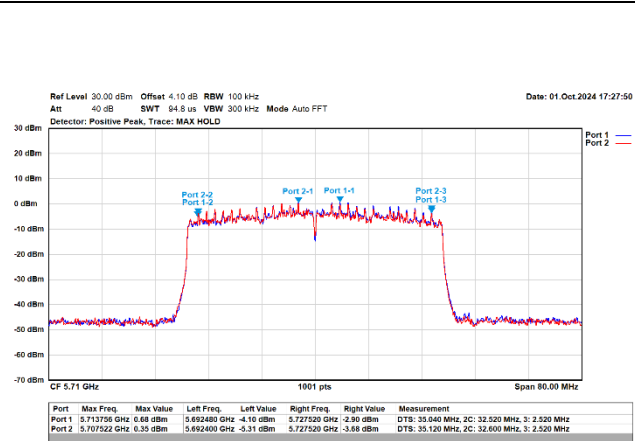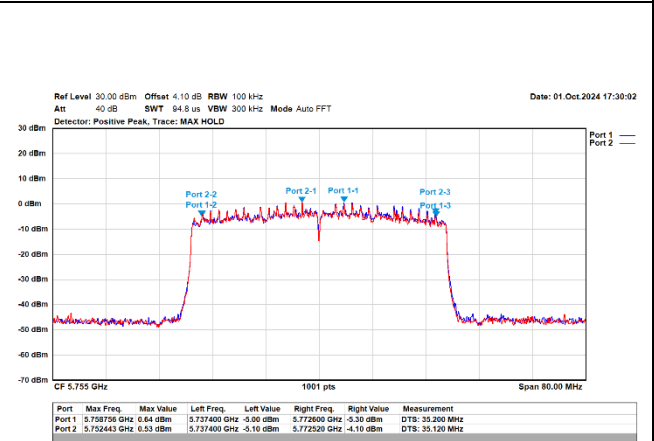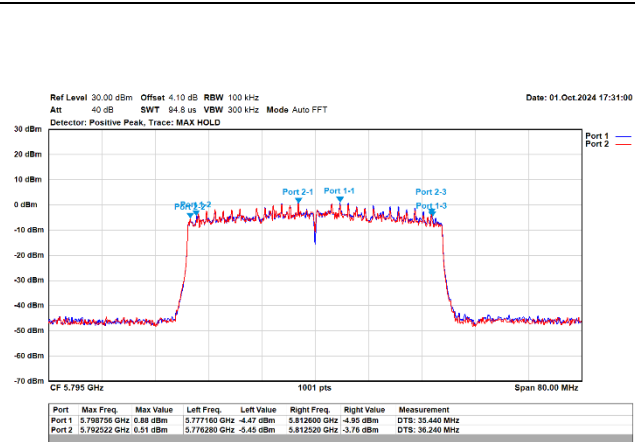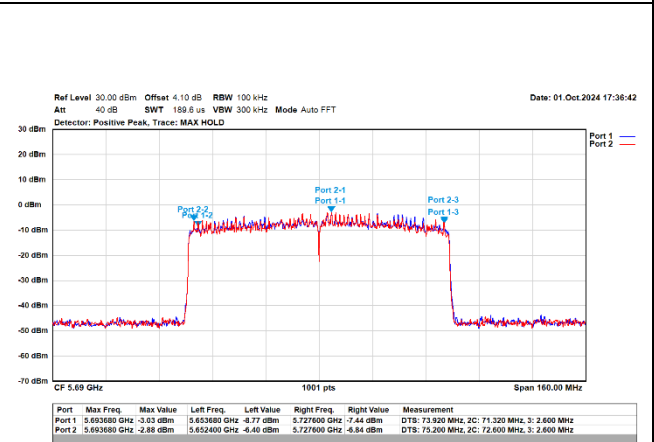802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5785MHz / Ch157

802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5825MHz / Ch165

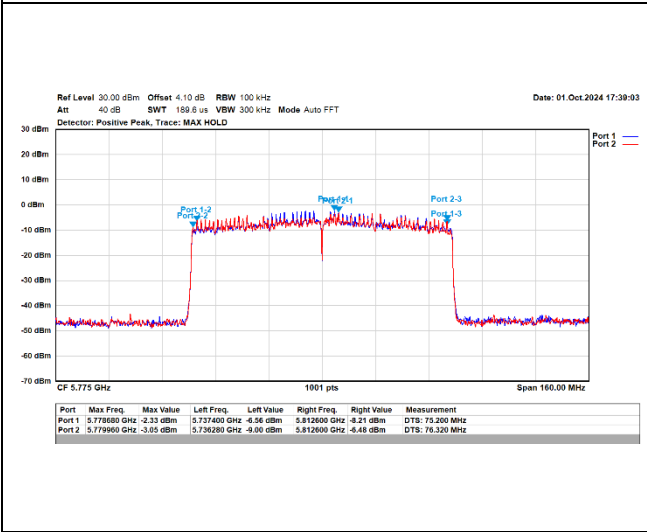802.11be / 40MHz / Ant.1+Ant.2 / MCS0 / 5710MHz / Ch142

802.11be / 40MHz / Ant.1+Ant.2 / MCS0 / 5755MHz / Ch151

802.11be / 40MHz / Ant.1+Ant.2 / MCS0 / 5795MHz / Ch159

802.11be / 80MHz / Ant.1+Ant.2 / MCS0 / 5690MHz / Ch138


802.11be / 80MHz / Ant.1+Ant.2 / MCS0 / 5775MHz / Ch155



Appendix C. Test Result of Maximum Conducted Output Power

<2TX, NSS1>

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)			
		Ant. 1	Ant. 2	Total	Limit
802.11a	5720 (U-NII-2C)	12.960	12.450	15.723	22.424
	5720 (U-NII-3)	6.720	3.680	8.471	30.000
	5745	12.720	12.540	15.641	30.000
	5785	12.970	12.690	15.843	30.000
	5825	12.950	12.630	15.803	30.000
802.11be (20 MHz)	5720 (U-NII-2C)	12.920	12.650	15.797	22.760
	5720 (U-NII-3)	5.770	5.880	8.836	30.000
	5745	12.610	12.460	15.546	30.000
	5785	12.940	12.700	15.832	30.000
	5825	12.890	12.710	15.811	30.000
802.11be (40 MHz)	5710 (U-NII-2C)	12.720	12.220	15.487	24.000
	5710 (U-NII-3)	1.610	1.040	4.345	30.000
	5755	12.520	12.430	15.486	30.000
	5795	12.750	12.660	15.716	30.000
802.11be (80 MHz)	5690 (U-NII-2C)	12.320	12.290	15.315	24.000
	5690 (U-NII-3)	-1.840	-2.160	1.013	30.000
	5775	12.570	12.550	15.570	30.000

Note: For straddle channels, the total power = conducted output power + duty factor, and the duty factor refer to section 2.3.


<2TX, NSS 2>

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)			
		Ant. 1	Ant. 2	Total	Limit
802.11be (20 MHz)	5720 (U-NII-2C)	12.190	12.370	15.291	22.760
	5720 (U-NII-3)	5.540	5.670	8.616	30.000
	5745	12.600	12.450	15.536	30.000
	5785	12.800	12.720	15.770	30.000
	5825	12.630	12.560	15.605	30.000
802.11be (40 MHz)	5710 (U-NII-2C)	12.630	12.520	15.586	24.000
	5710 (U-NII-3)	1.690	1.540	4.626	30.000
	5755	12.870	12.900	15.895	30.000
	5795	12.580	12.660	15.630	30.000
802.11be (80 MHz)	5690 (U-NII-2C)	12.640	12.570	15.615	24.000
	5690 (U-NII-3)	-1.510	-2.040	1.243	30.000
	5775	12.740	12.880	15.821	30.000


For Straddle Channels: <2TX, NSS 1>

Spectrum plot value of power


802.11a / Ant. 1 / 5720 MHz (U-NII-2C)

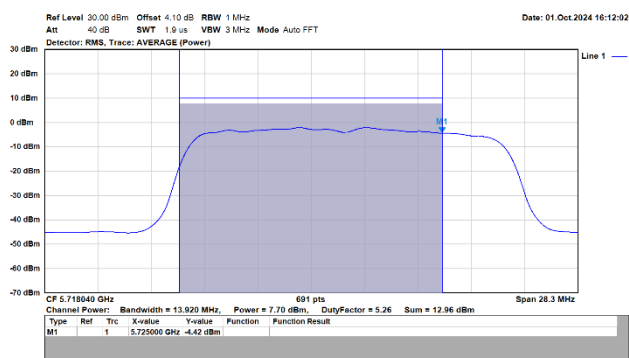


802.11a / Ant. 1 / 5720 MHz (U-NII-3)

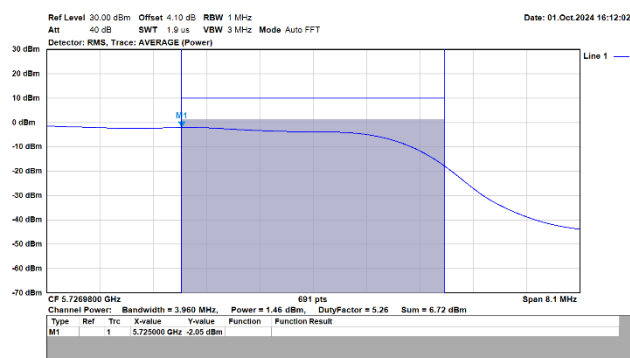


802.11a / Ant. 2 / 5720 MHz (U-NII-2C)

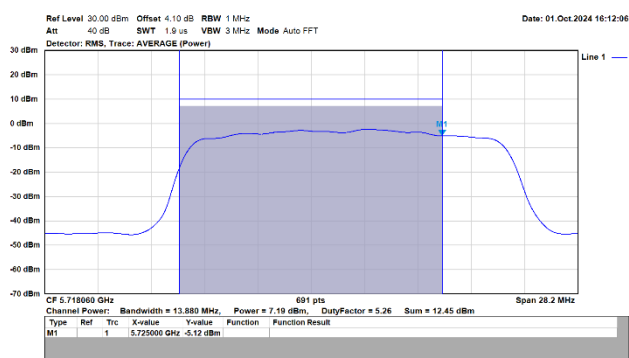


802.11a / Ant. 2 / 5720 MHz (U-NII-3)

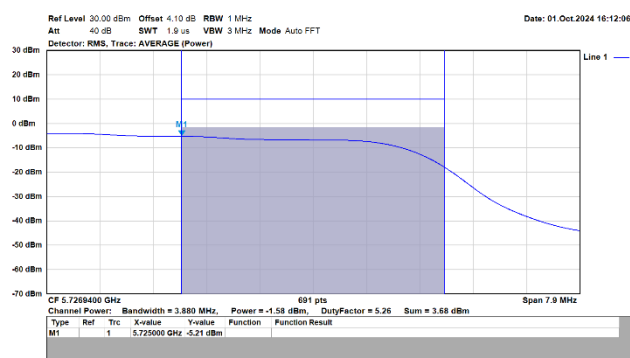

802.11be (20 MHz) / Ant. 1 / 5720 MHz (U-NII-2C)

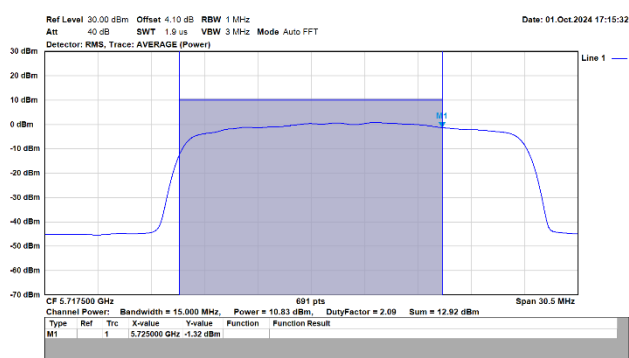


802.11be (20 MHz) / Ant. 1 / 5720 MHz (U-NII-3)

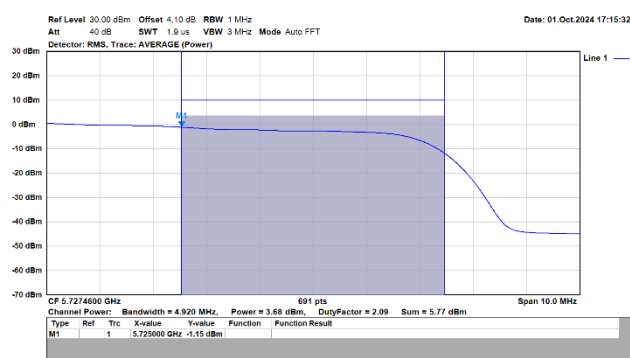


Spectrum plot value of power


802.11be (20 MHz) / Ant. 2 / 5720 MHz (U-NII-2C)

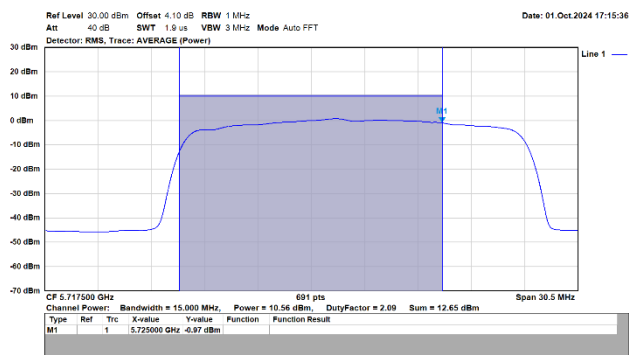


802.11be (20 MHz) / Ant. 2 / 5720 MHz (U-NII-3)

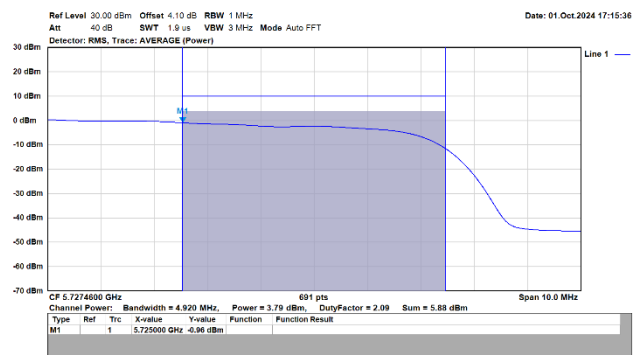


802.11be (40 MHz) / Ant. 1 / 5710 MHz (U-NII-2C)

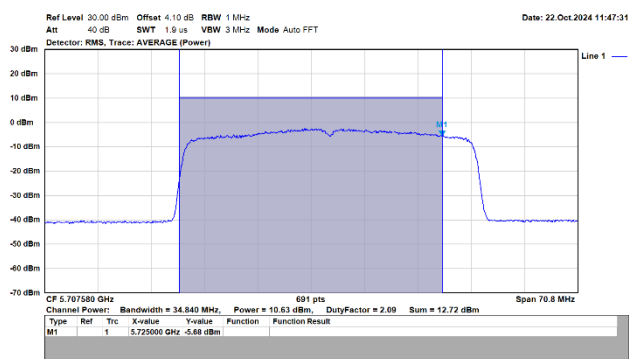


802.11be (40 MHz) / Ant. 1 / 5710 MHz (U-NII-3)

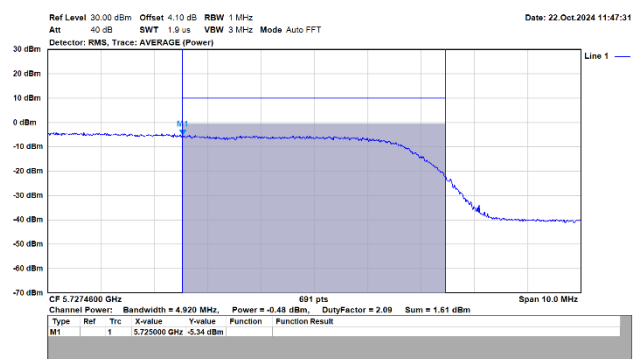


802.11be (40 MHz) / Ant. 2 / 5710 MHz (U-NII-2C)

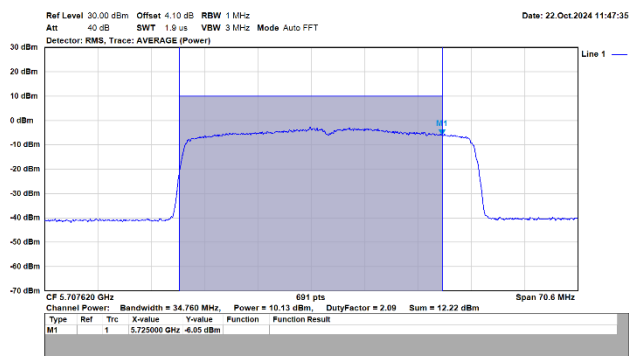

802.11be (40 MHz) / Ant. 2 / 5710 MHz (U-NII-3)

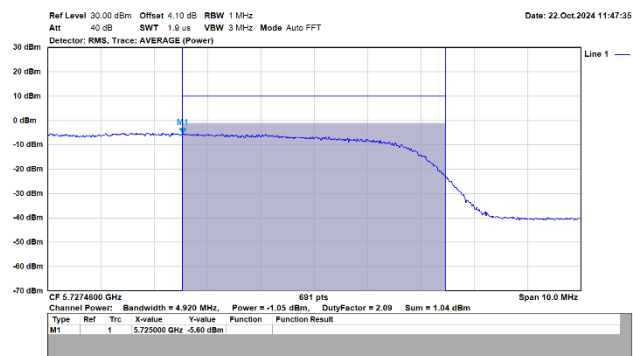


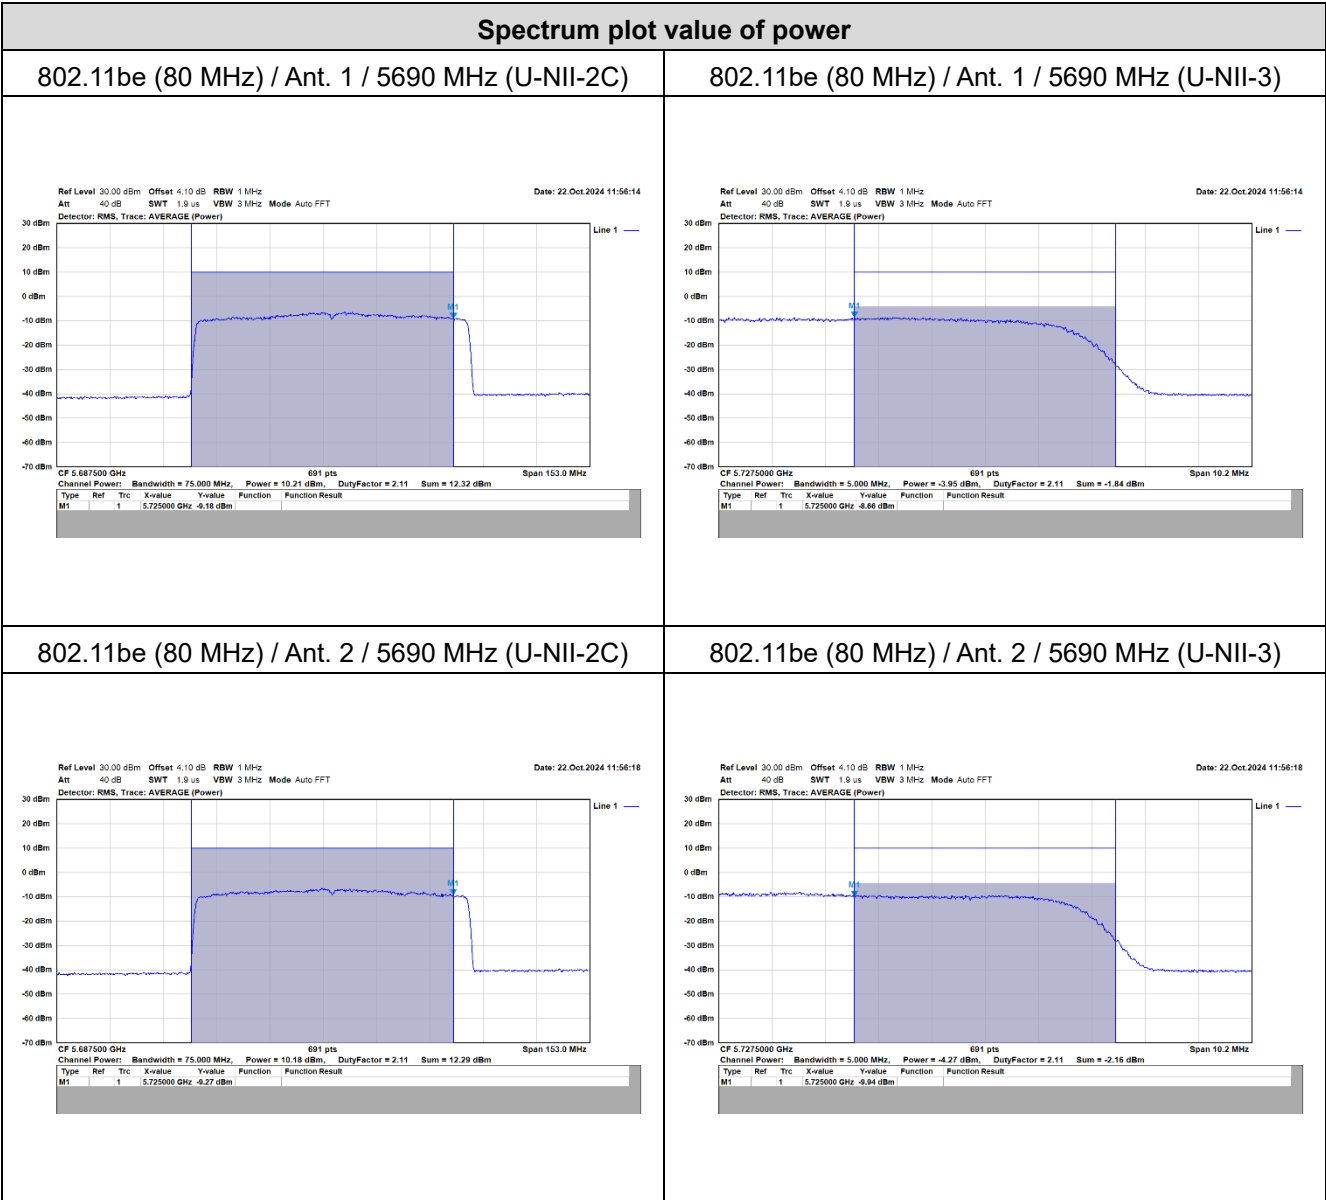


<2TX, NSS2>

Spectrum plot value of power


802.11be (20 MHz) / Ant. 1 / 5720 MHz (U-NII-2C)

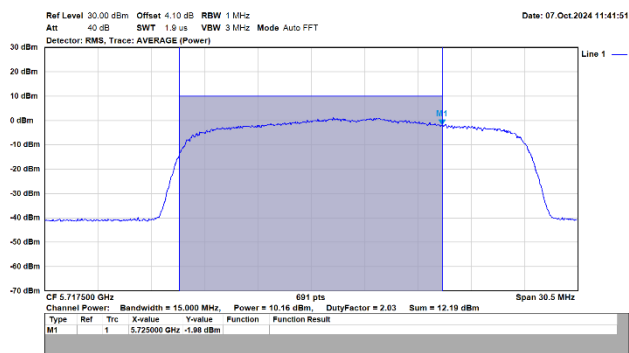


802.11be (20 MHz) / Ant. 1 / 5720 MHz (U-NII-3)

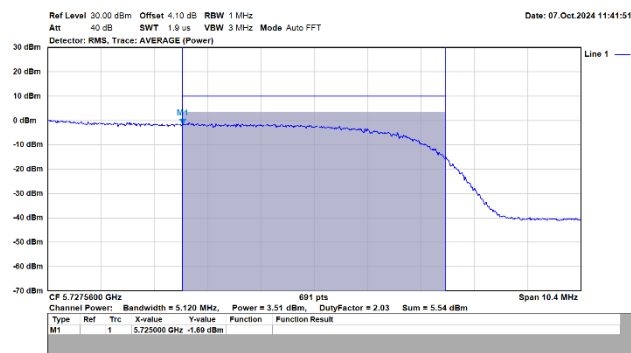


802.11be (20 MHz) / Ant. 2 / 5720 MHz (U-NII-2C)

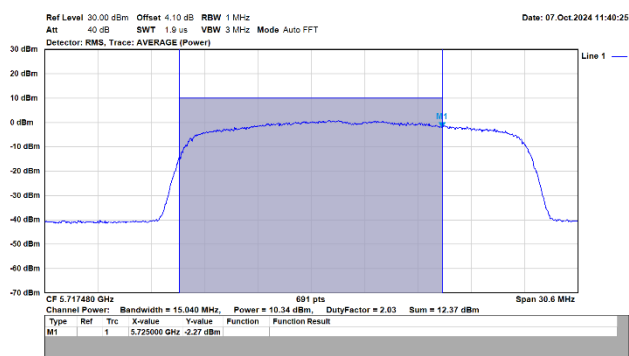


802.11be (20 MHz) / Ant. 2 / 5720 MHz (U-NII-3)

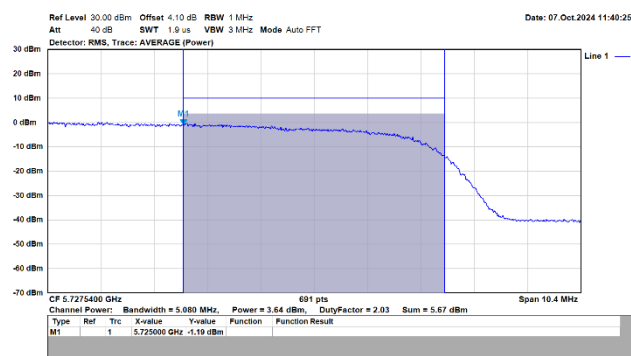

802.11be (40 MHz) / Ant. 1 / 5710 MHz (U-NII-2C)

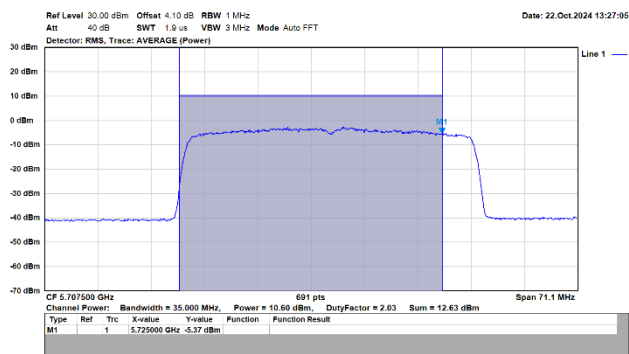


802.11be (40 MHz) / Ant. 1 / 5710 MHz (U-NII-3)

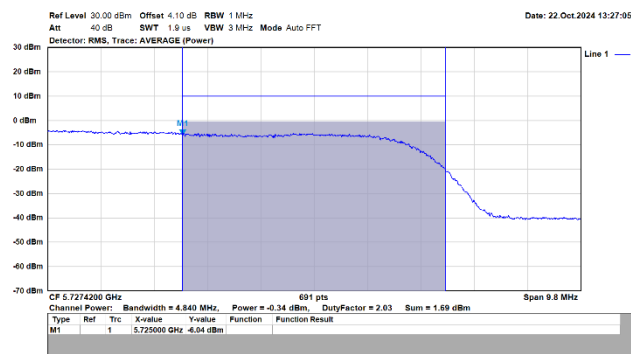


Spectrum plot value of power


802.11be (40 MHz) / Ant. 2 / 5710 MHz (U-NII-2C)

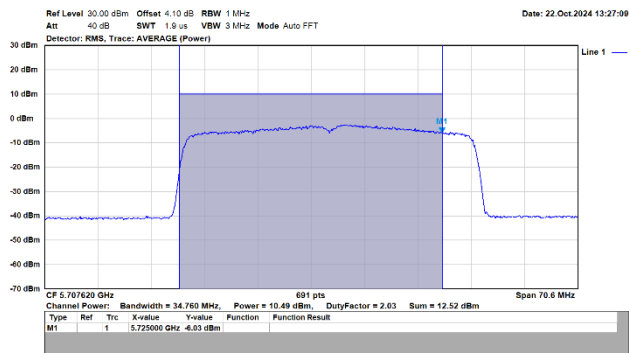


802.11be (40 MHz) / Ant. 2 / 5710 MHz (U-NII-3)

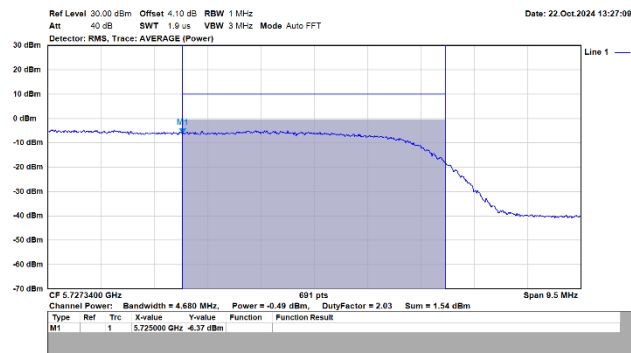


802.11be (80 MHz) / Ant. 1 / 5690 MHz (U-NII-2C)

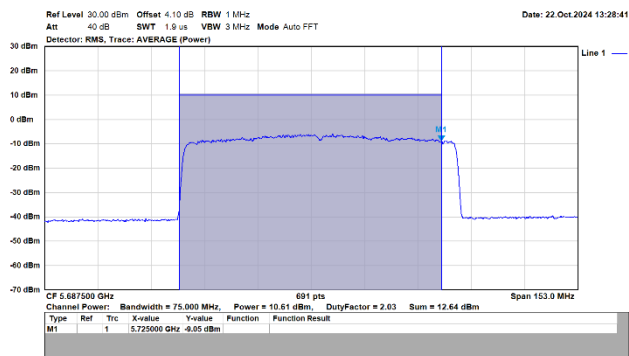


802.11be (80 MHz) / Ant. 1 / 5690 MHz (U-NII-3)

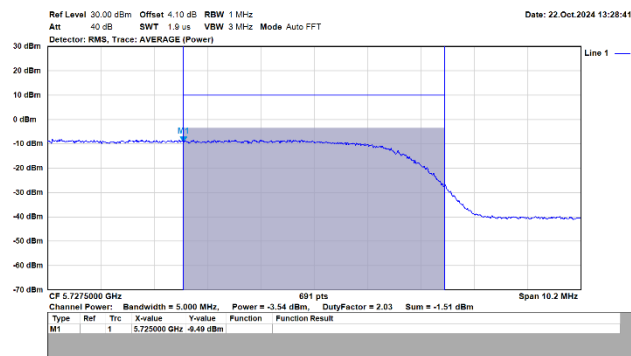

802.11be (80 MHz) / Ant. 2 / 5690 MHz (U-NII-2C)

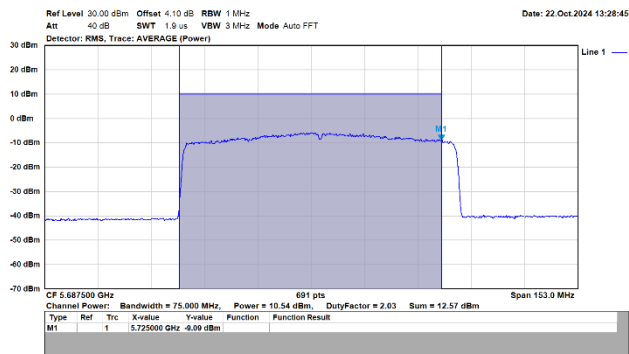

802.11be (80 MHz) / Ant. 2 / 5690 MHz (U-NII-3)

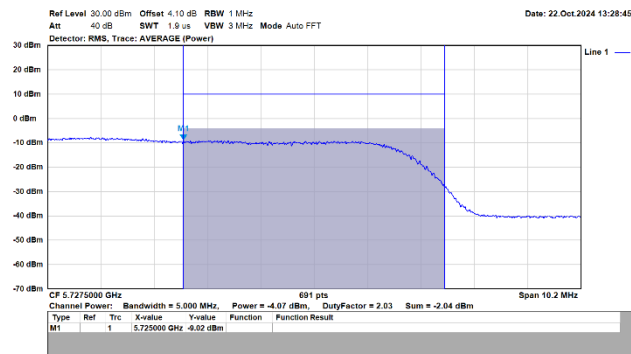

Appendix D. Test Result of Maximum Power Spectral Density

<2TX, NSS1>


Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total		
802.11a	5720 (U-NII-2C)	-1.43	-1.52	6.41	11.00	Pass
Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
		Ant. 1	Ant. 2	Total		
802.11a	5720 (U-NII-3)	-6.14	-5.38	2.14	30.00	Pass
	5745	-2.84	-5.34	3.78	30.00	Pass
	5785	-3.67	-5.06	3.11	30.00	Pass
	5825	-3.59	-4.28	4.31	30.00	Pass

Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total		
802.11be (20 MHz)	5720 (U-NII-2C)	1.36	0.53	5.94	11.00	Pass
Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
		Ant. 1	Ant. 2	Total		
802.11be (20 MHz)	5720 (U-NII-3)	-3.63	-3.60	1.47	30.00	Pass
	5745	-1.76	-1.78	3.10	30.00	Pass
	5785	-1.45	-1.43	3.46	30.00	Pass
	5825	-1.81	-1.75	3.25	30.00	Pass


Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total		
802.11be (40 MHz)	5710 (U-NII-2C)	-0.70	-1.35	3.99	11.00	Pass
Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
		Ant. 1	Ant. 2	Total		
802.11be (40 MHz)	5710 (U-NII-3)	-7.19	-6.73	-1.86	30.00	Pass
	5755	-3.59	-4.29	0.75	30.00	Pass
	5795	-4.18	-3.48	1.14	30.00	Pass

Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total		
802.11be (80 MHz)	5690 (U-NII-2C)	-4.32	-4.75	0.50	11.00	Pass
Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
		Ant. 1	Ant. 2	Total		
802.11be (80 MHz)	5690 (U-NII-3)	-10.08	-10.67	-5.63	30.00	Pass
	5775	-7.15	-7.79	-2.82	30.00	Pass


802.11a / Ant.1+Ant.2 / 6M / 5720MHz / Ch144
(UNII-2C)

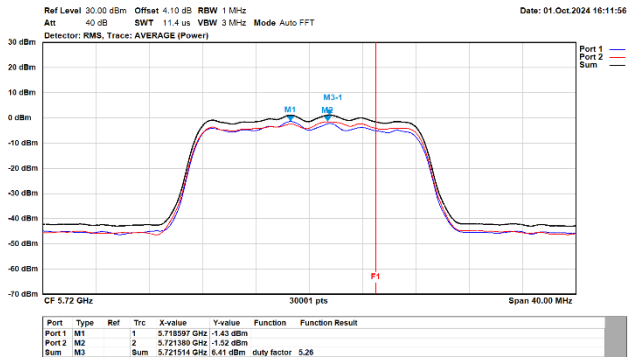


802.11a / Ant.1+Ant.2 / 6M / 5720MHz / Ch144
(UNII-3)

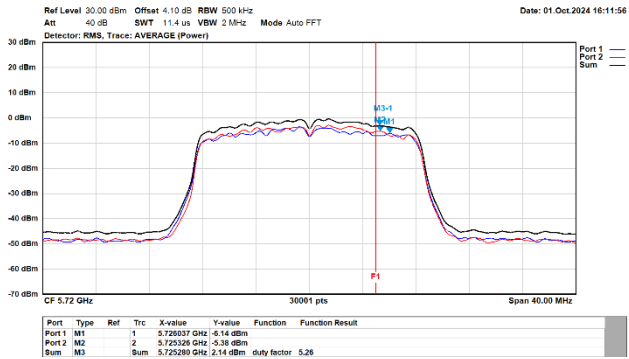


802.11a / Ant.1+Ant.2 / 6M / 5745MHz / Ch149

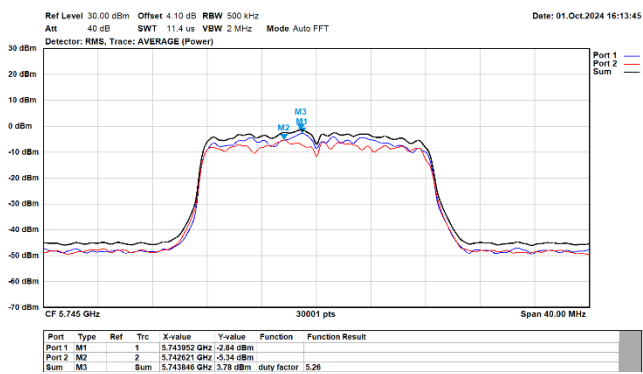


802.11a / Ant.1+Ant.2 / 6M / 5785MHz / Ch157

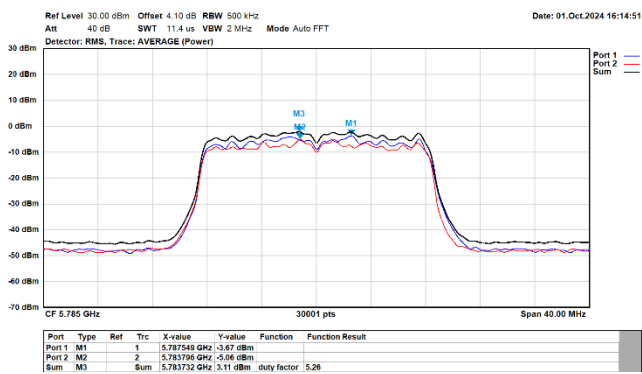


802.11a / Ant.1+Ant.2 / 6M / 5825MHz / Ch165

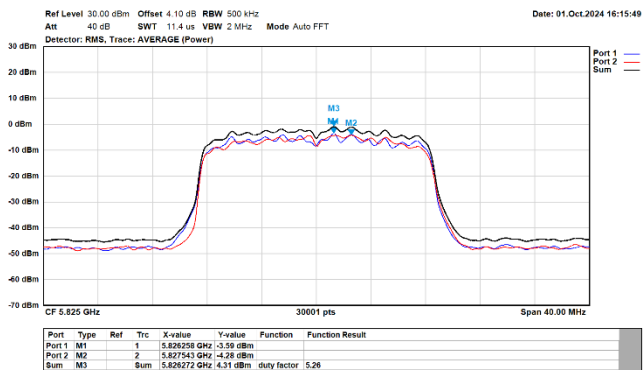


802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5720MHz
/ Ch144 (UNII-2C)

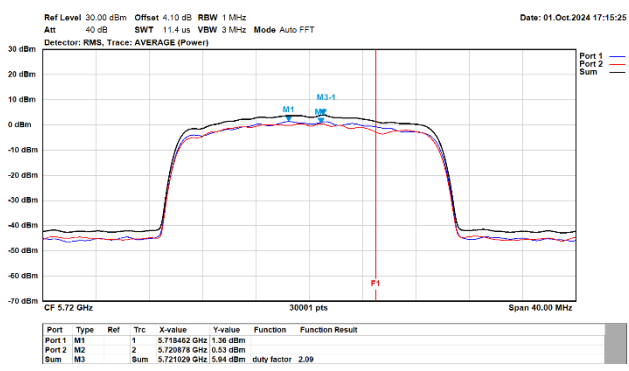


802.11be / 20MHz / Ant.1+Ant.2 / MCS0 /
5720MHz / Ch144 (UNII-3)

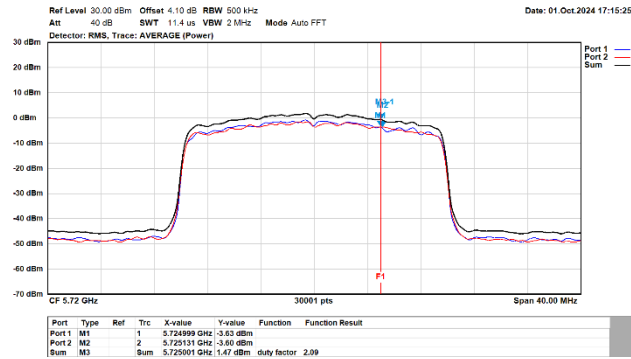


802.11be / 20MHz / Ant.1+Ant.2 / MCS0 /
5745MHz / Ch149

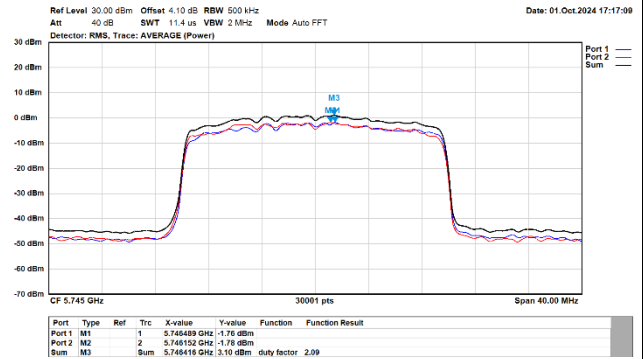


802.11be / 20MHz / Ant.1+Ant.2 / MCS0 /
5785MHz / Ch157

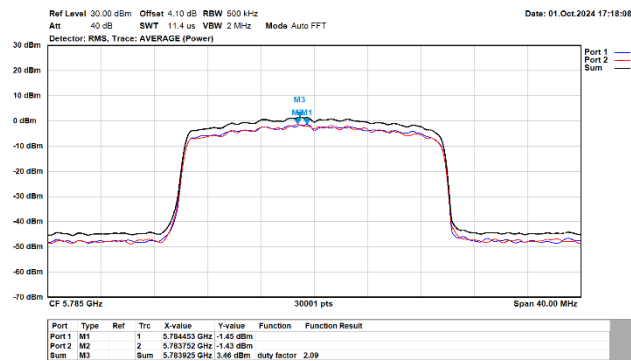


802.11be / 20MHz / Ant.1+Ant.2 / MCS0 /
5825MHz / Ch165

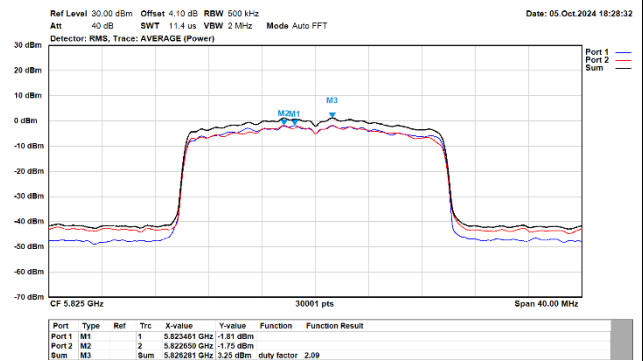


802.11be / 40MHz / Ant.1+Ant.2 / MCS0 /
5710MHz / Ch142 (UNII-2C)

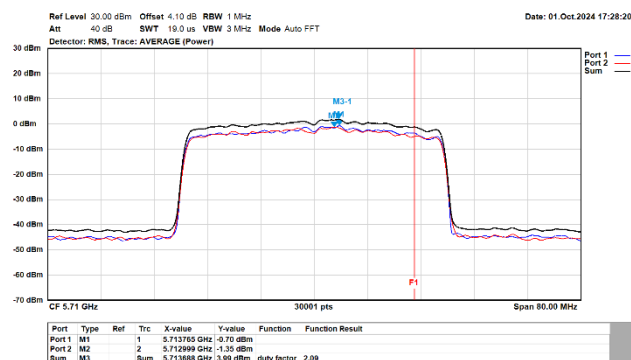

802.11be / 40MHz / Ant.1+Ant.2 / MCS0 /
5710MHz / Ch142 (UNII-3)

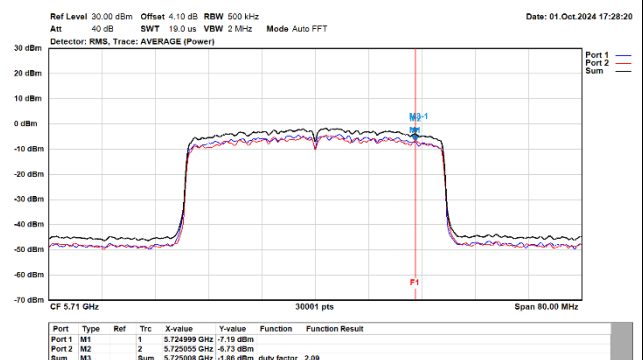






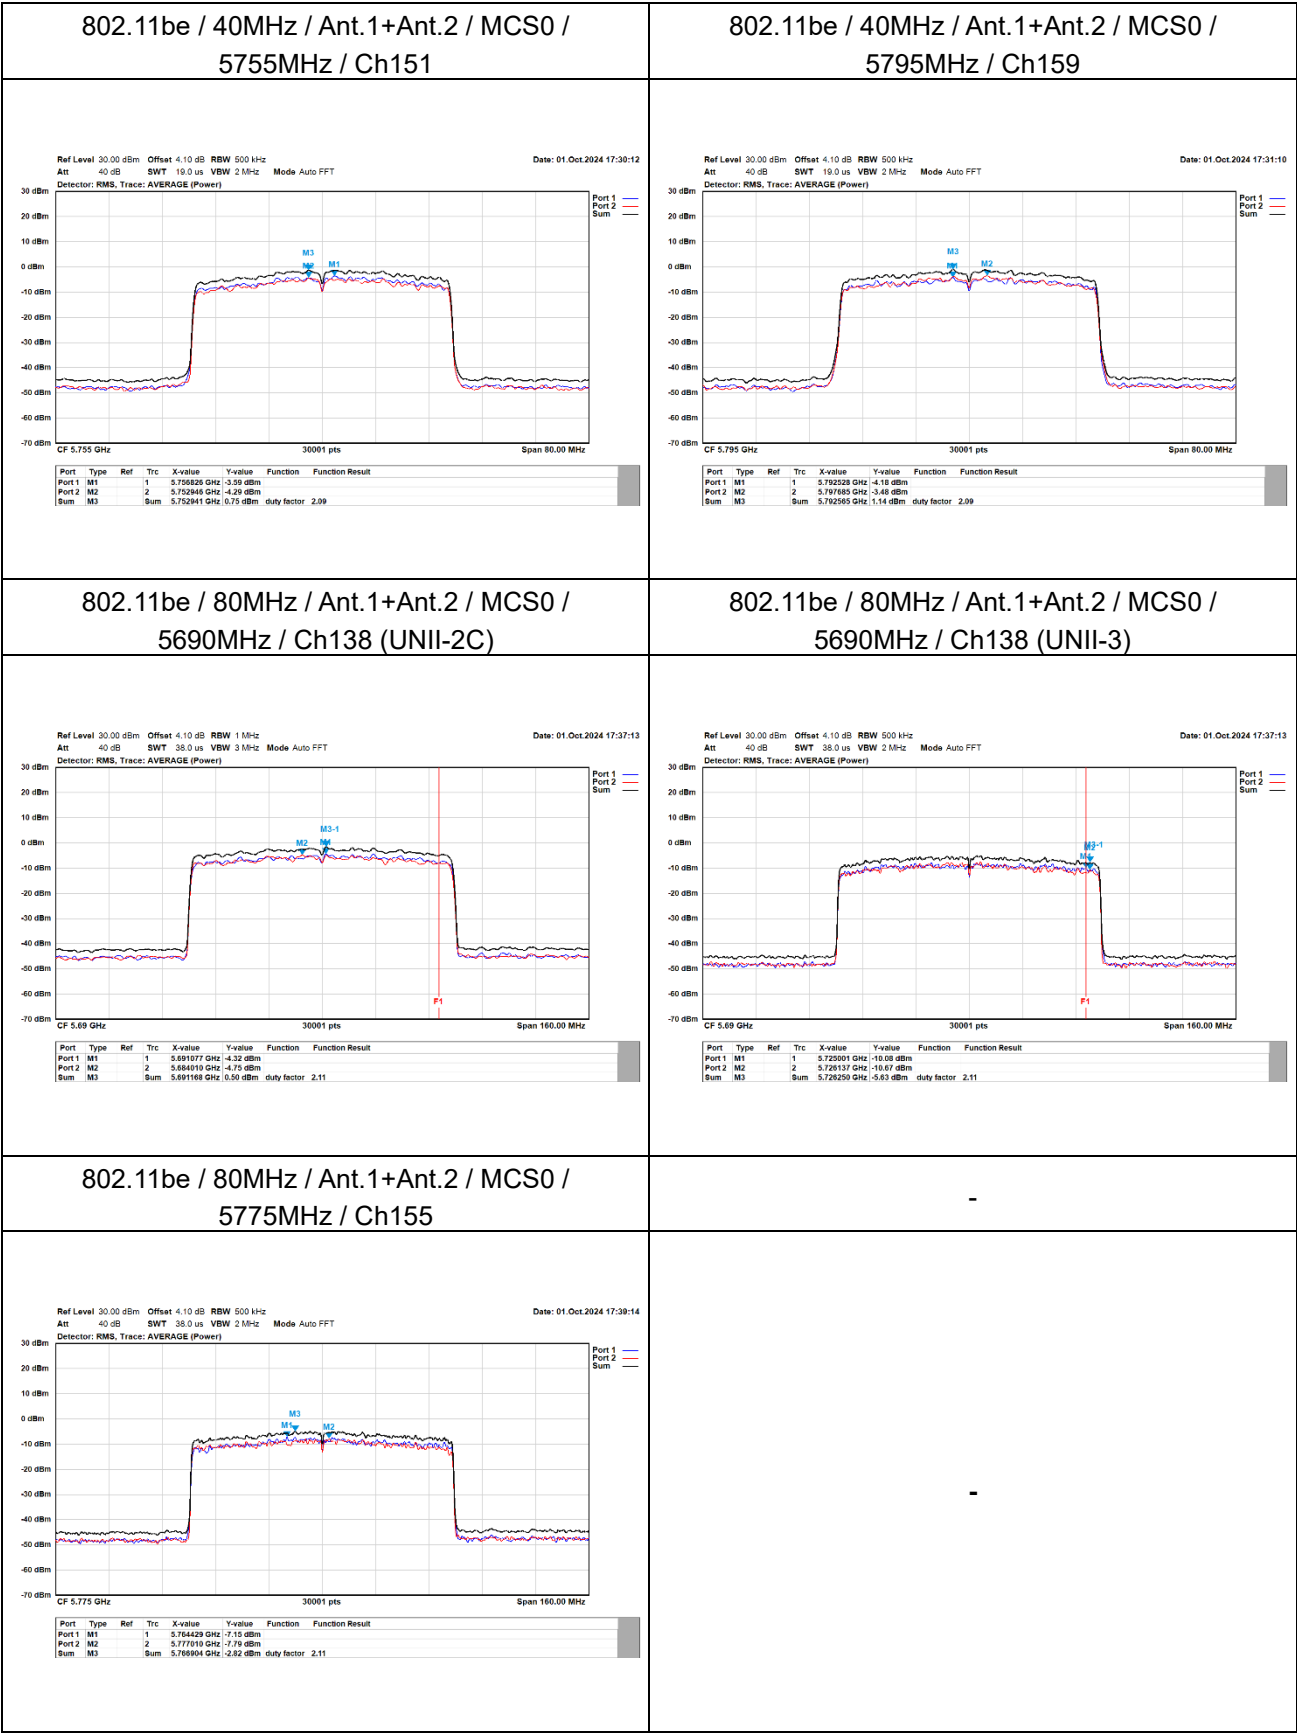



<2TX, NSS2>

Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total		
802.11be (20 MHz)	5720 (U-NII-2C)	0.06	0.80	5.33	11.00	Pass
Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
		Ant. 1	Ant. 2	Total		
802.11be (20 MHz)	5720 (U-NII-3)	-3.76	-4.27	1.02	30.00	Pass
	5745	-2.26	-1.97	2.85	30.00	Pass
	5785	-1.78	-1.83	3.18	30.00	Pass
	5825	-2.23	-1.77	3.02	30.00	Pass






Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total		
802.11be (40 MHz)	5710 (U-NII-2C)	-1.92	-1.42	3.30	11.00	Pass
Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
		Ant. 1	Ant. 2	Total		
802.11be (40 MHz)	5710 (U-NII-3)	-6.94	-8.20	-2.53	30.00	Pass
	5755	-4.74	-3.47	0.58	30.00	Pass
	5795	-5.04	-3.23	0.92	30.00	Pass

Modulation	Frequency (MHz)	Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total		
802.11be (80 MHz)	5690 (U-NII-2C)	-4.80	-5.02	-0.17	11.00	Pass
Modulation	Frequency (MHz)	Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
		Ant. 1	Ant. 2	Total		
802.11be (80 MHz)	5690 (U-NII-3)	-11.35	-11.10	-6.34	30.00	Pass
	5775	-7.46	-7.33	-2.96	30.00	Pass

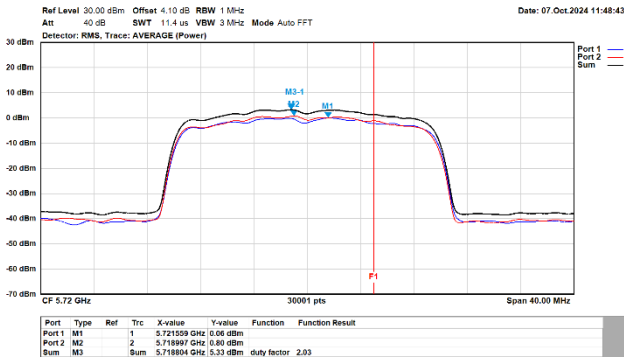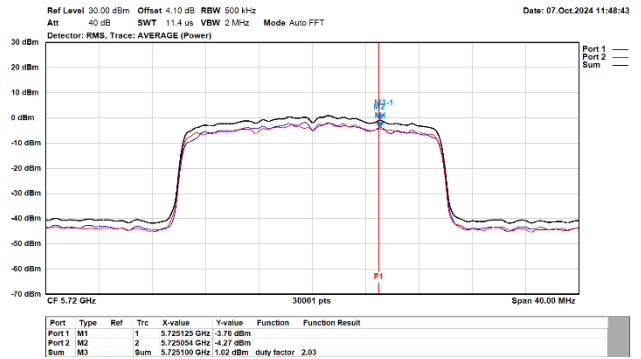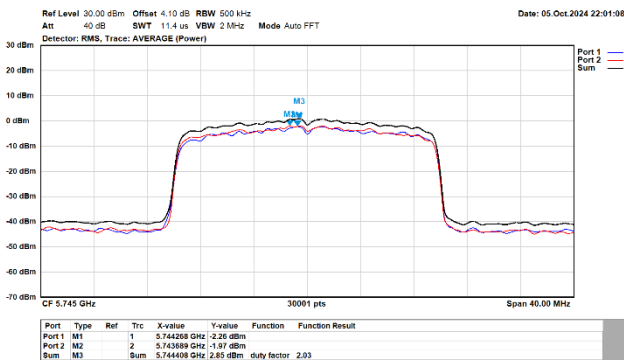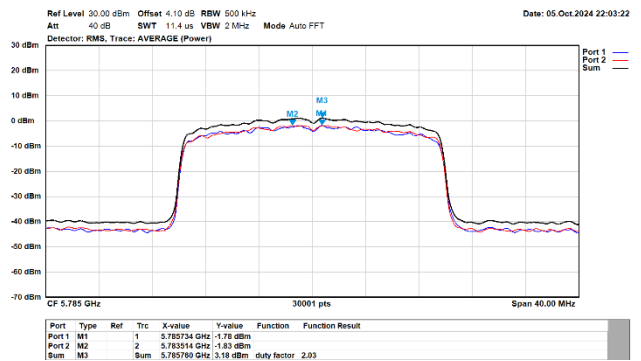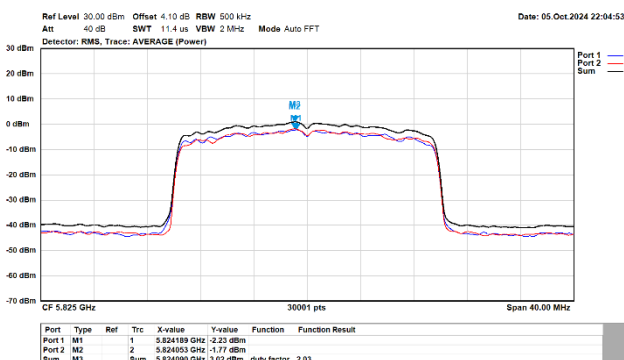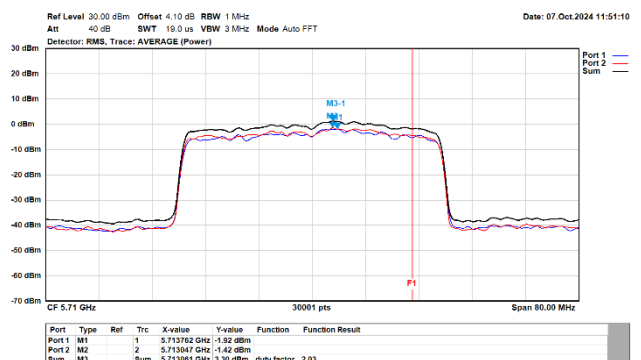**802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5720MHz
/ Ch144 (UNII-2C)**

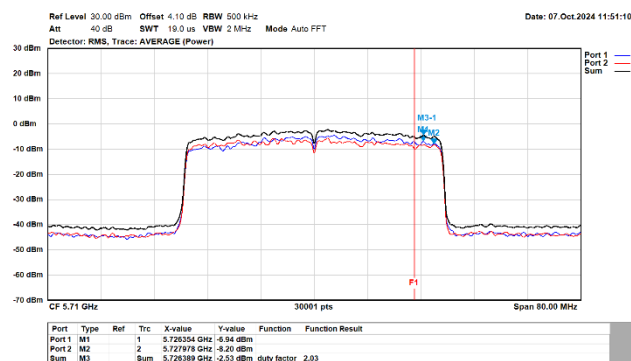**802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5720MHz
/ Ch144 (UNII-3)**

**802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5745MHz
/ Ch149**

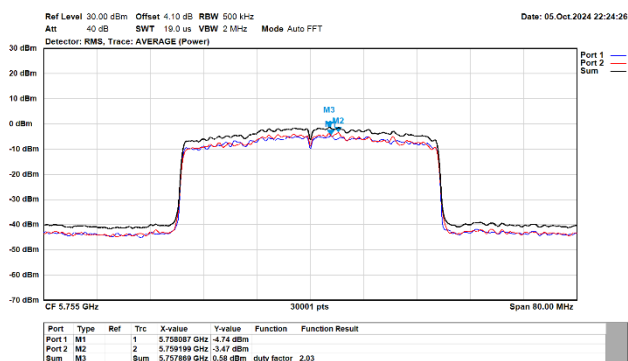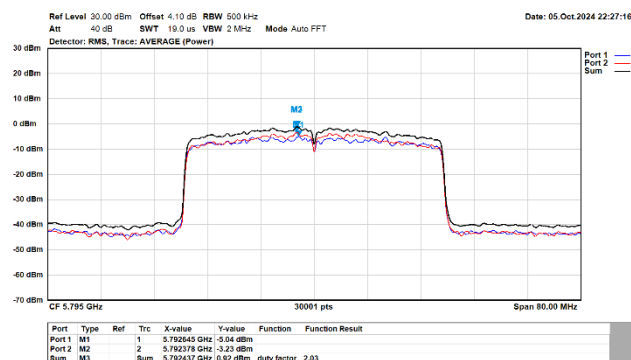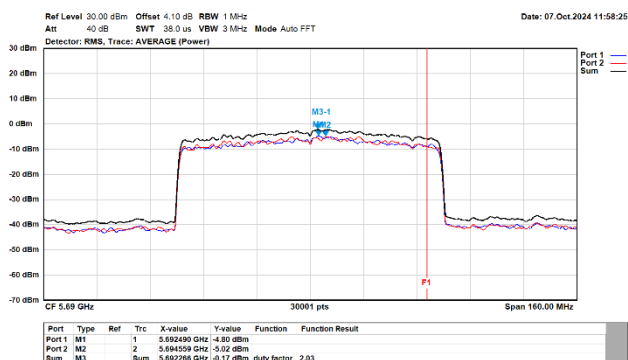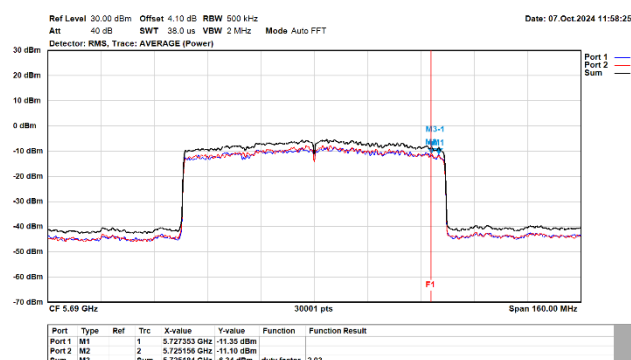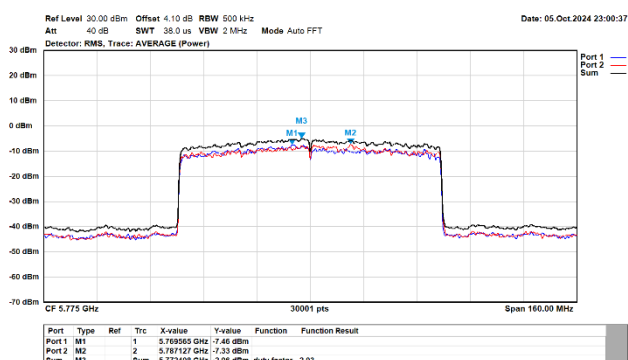**802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5785MHz
/ Ch157**

**802.11be / 20MHz / Ant.1+Ant.2 / MCS0 / 5825MHz
/ Ch165**

**802.11be / 40MHz / Ant.1+Ant.2 / MCS0 / MCS0 /
5710MHz / Ch142 (UNII-2C)**


802.11be / 40MHz / Ant.1+Ant.2 / MCS0 /
5710MHz / Ch142 (UNII-3)


802.11be/40MHz/MCS0/5755MHz/Ch151

802.11be / 40MHz / Ant.1+Ant.2 / MCS0 /
5795MHz / Ch159802.11be / 80MHz / Ant.1+Ant.2 / MCS0 /
5690MHz / Ch138 (UNII-2C)802.11be / 80MHz / Ant.1+Ant.2 / MCS0 /
5690MHz / Ch138 (UNII-3)802.11be / 80MHz / Ant.1+Ant.2 / MCS0 /
5775MHz / Ch155

Appendix E. Test Result of Transmitter Radiated Spurious Emission

30 MHz ~ 1 GHz

Site :HC-CB04
Condition :3m Horizontal
Mode :LF_be80_TX
Test By :Ling Chen

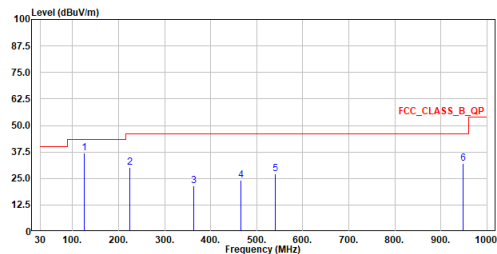


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	125.012	36.81	43.50	-6.69	41.63	-4.82	QP
2	225.019	30.08	46.00	-15.92	36.44	-6.36	QP
3	363.389	21.65	46.00	-24.35	22.67	-1.02	QP
4	465.433	24.00	46.00	-22.00	22.15	1.85	QP
5	540.657	27.03	46.00	-18.97	23.79	3.24	QP
6	948.202	32.03	46.00	-13.97	22.31	9.72	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Vertical
Mode :LF_be80_TX
Test By :Ling Chen

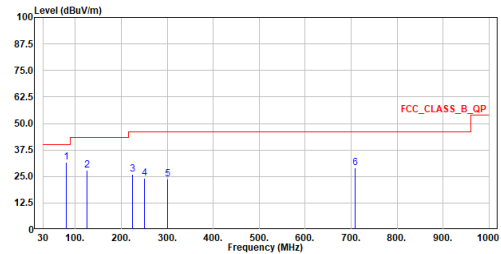


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	80.004	31.68	40.00	-8.32	38.68	-7.00	QP
2	124.963	27.75	43.50	-15.75	32.57	-4.82	QP
3	225.019	25.92	46.00	-20.08	32.28	-6.36	QP
4	249.996	24.33	46.00	-21.67	28.73	-4.40	QP
5	300.000	23.62	46.00	-22.38	26.19	-2.57	QP
6	709.049	28.90	46.00	-17.10	22.48	6.42	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.


Above 1 GHz

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5720MHz
Test By :Brook Cheng

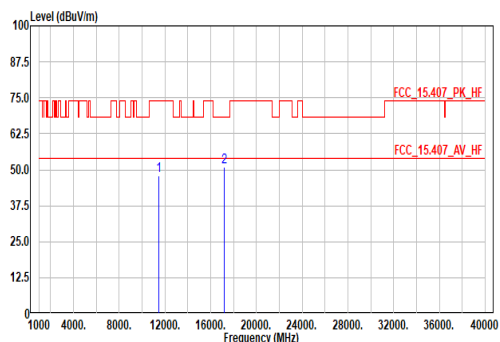


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level		

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5720MHz
Test By :Brook Cheng

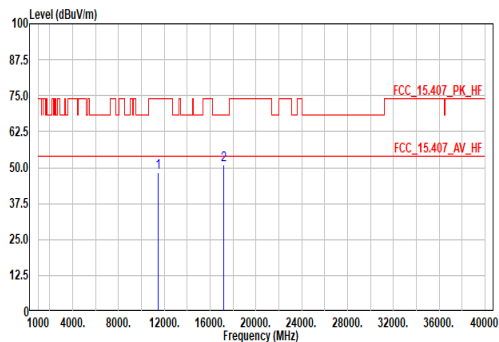

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level		


Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :a_TX_5745MHz
Test By :Ling Chen

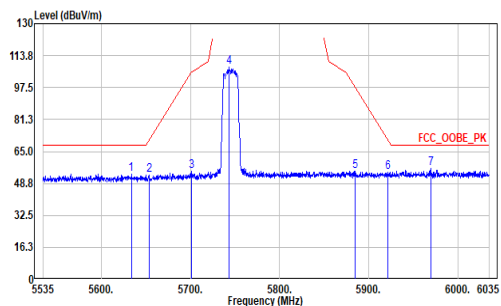

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level		

1	5633.750	53.68	68.20	-14.52	31.69	21.99	Peak
2	5654.000	53.03	71.17	-18.14	30.97	22.06	Peak
3	5701.500	55.18	105.62	-50.44	32.99	22.19	Peak
4	5743.000	107.78	-----	-----	85.46	22.32	Peak
5	5885.000	55.11	97.80	-42.69	32.39	22.72	Peak
6	5921.750	54.41	70.61	-16.20	31.58	22.83	Peak
7	5969.500	56.44	68.20	-11.76	33.46	22.98	Peak


Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :a_TX_5745MHz
Test By :Brook Cheng

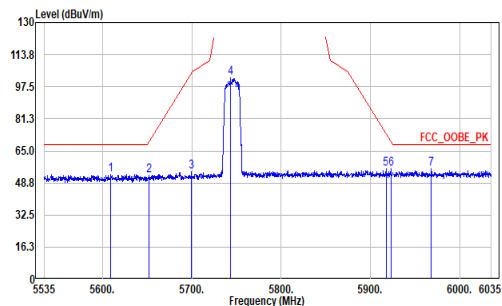

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level		

1	5609.250	52.99	68.20	-15.21	31.06	21.93	Peak
2	5652.500	52.34	70.06	-17.72	30.30	22.04	Peak
3	5699.500	54.33	104.83	-50.50	32.14	22.19	Peak
4	5743.250	102.24	-----	-----	79.92	22.32	Peak
5	5917.500	55.88	73.76	-17.88	33.06	22.82	Peak
6	5923.000	55.69	69.69	-14.00	32.86	22.83	Peak
7	5968.250	55.73	68.20	-12.47	32.77	22.96	Peak

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5745MHz
Test By :Brook Cheng

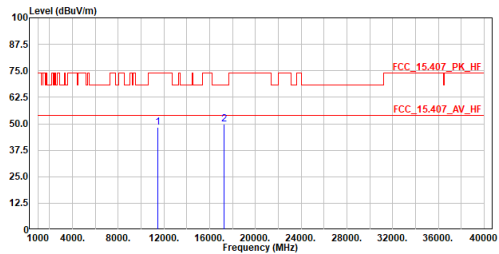


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11490.000	48.32	74.00	-25.68	54.41	-6.09	Peak
2	17235.000	49.91	68.20	-18.29	53.28	-3.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5745MHz
Test By :Brook Cheng

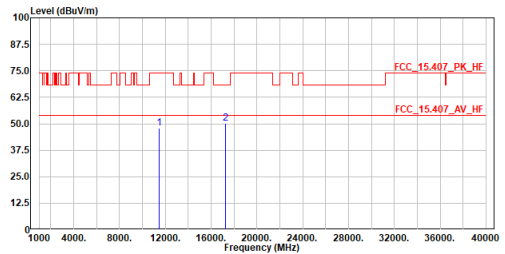


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11490.000	47.83	74.00	-26.17	53.92	-6.09	Peak
2	17235.000	50.08	68.20	-18.12	53.45	-3.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :a_TX_5785MHz
Test By :Ling Chen

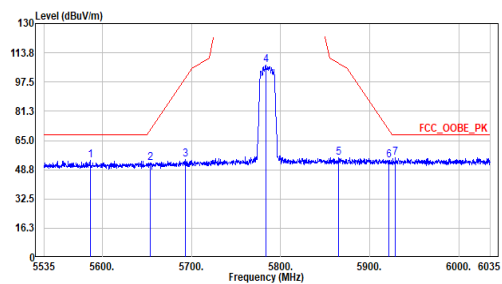


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5586.500	54.17	68.20	-14.03	32.31	21.86	Peak
2	5654.000	52.63	71.17	-18.54	30.57	22.06	Peak
3	5693.000	54.34	100.02	-45.68	32.17	22.17	Peak
4	5783.500	107.01	-----	-----	84.57	22.44	Peak
5	5865.500	55.54	107.86	-52.32	32.86	22.68	Peak
6	5921.500	53.95	70.80	-16.85	31.12	22.83	Peak
7	5929.000	55.54	68.20	-12.66	32.68	22.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :a_TX_5785MHz
Test By :Brook Cheng

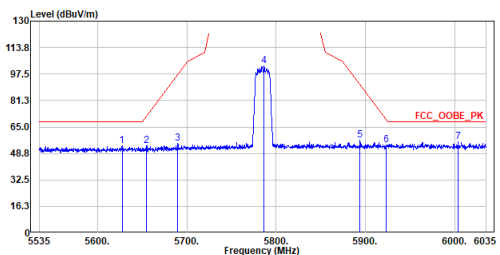


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5627.500	53.45	68.20	-14.75	31.47	21.98	Peak
2	5655.000	53.45	71.91	-18.46	31.39	22.06	Peak
3	5690.000	55.07	97.80	-42.73	32.91	22.16	Peak
4	5786.750	102.33	-----	-----	79.88	22.45	Peak
5	5894.000	56.77	91.14	-34.37	34.02	22.75	Peak
6	5923.250	53.94	69.50	-15.56	31.11	22.83	Peak
7	6004.000	55.80	68.20	-12.40	32.72	23.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5785MHz
Test By :Brook Cheng

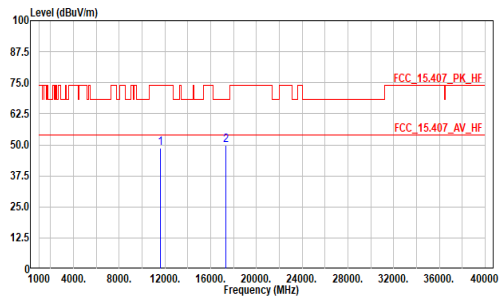


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11570.000	48.56	74.00	-25.44	54.60	-6.04	Peak
2	17355.000	49.89	68.20	-18.31	53.12	-3.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5785MHz
Test By :Brook Cheng

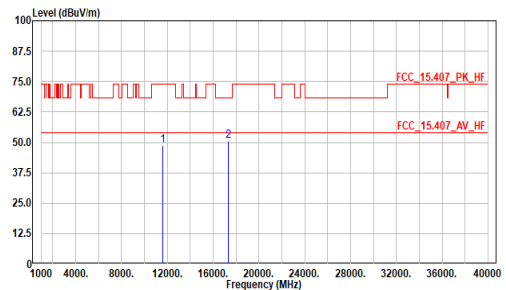


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11570.000	48.64	74.00	-25.36	54.68	-6.04	Peak
2	17355.000	50.53	68.20	-17.67	53.76	-3.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :a_TX_5825MHz
Test By :Ling Chen

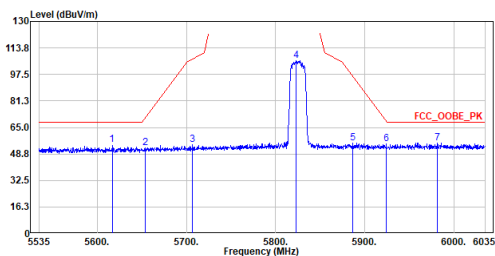


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5616.750	54.21	68.20	-13.99	32.26	21.95	Peak
2	5653.500	52.35	70.80	-18.45	30.29	22.06	Peak
3	5706.750	54.32	107.09	-52.77	32.11	22.21	Peak
4	5823.000	106.09	-----	-----	83.54	22.55	Peak
5	5886.750	55.46	96.51	-41.05	32.72	22.74	Peak
6	5924.000	54.74	68.95	-14.21	31.91	22.83	Peak
7	5981.750	55.49	68.20	-12.71	32.48	23.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :a_TX_5825MHz
Test By :Brook Cheng

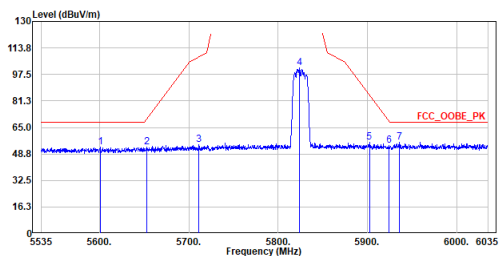


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5601.000	53.12	68.20	-15.08	31.22	21.90	Peak
2	5652.750	53.03	70.24	-17.21	30.99	22.04	Peak
3	5711.250	54.63	108.35	-53.72	32.41	22.22	Peak
4	5824.000	101.77	-----	-----	79.22	22.55	Peak
5	5902.250	55.72	85.04	-29.32	32.95	22.77	Peak
6	5924.000	54.01	68.95	-14.94	31.18	22.83	Peak
7	5935.750	55.97	68.20	-12.23	33.10	22.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5825MHz
Test By :Brook Cheng

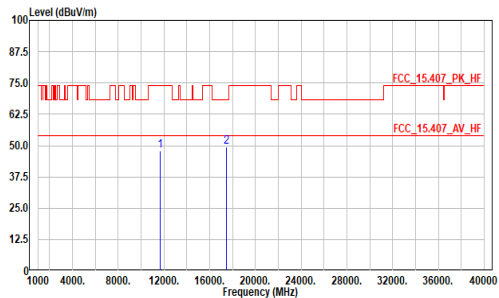

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	47.77	74.00	-26.23	53.76	-5.99	Peak
2	17475.000	49.55	68.20	-18.65	52.63	-3.08	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5825MHz
Test By :Brook Cheng

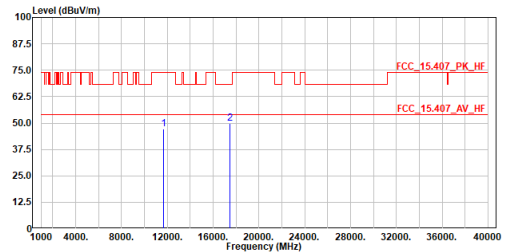

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	47.21	74.00	-26.79	53.20	-5.99	Peak
2	17475.000	49.97	68.20	-18.23	53.05	-3.08	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_5720MHz
Test By :Brook Cheng

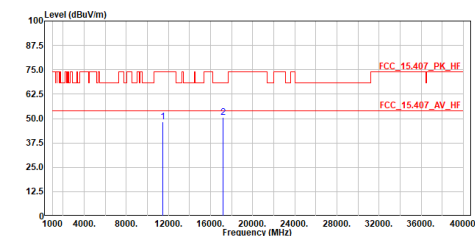

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11440.000	48.29	74.00	-25.71	54.49	-6.20	Peak
2	17160.000	50.53	68.20	-17.67	53.99	-3.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_5720MHz
Test By :Brook Cheng

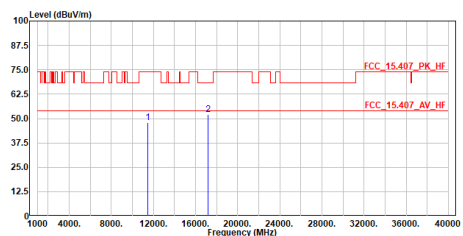

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11440.000	47.87	74.00	-26.13	54.07	-6.20	Peak
2	17160.000	51.94	68.20	-16.26	55.40	-3.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_5745MHz
Test By :Ling Chen

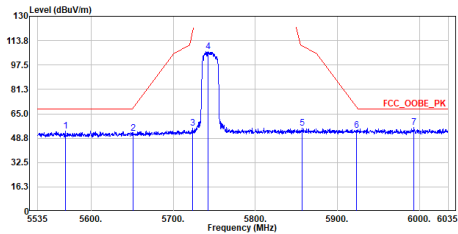


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5568.750	53.44	68.20	-14.76	31.64	21.80	Peak
2	5651.000	52.12	68.95	-16.83	30.88	22.04	Peak
3	5724.000	55.58	119.92	-64.34	33.32	22.26	Peak
4	5742.250	106.68	-----	84.36	22.32	Peak	
5	5857.250	55.47	110.17	-54.70	32.83	22.64	Peak
6	5923.250	54.01	69.50	-15.49	31.18	22.83	Peak
7	5993.000	55.95	68.20	-12.25	32.90	23.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_5745MHz
Test By :Brook Cheng

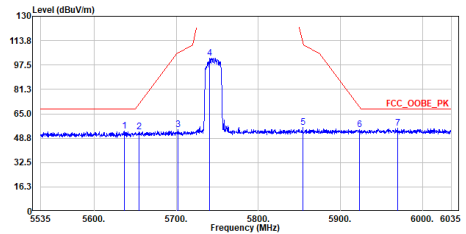


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5636.500	53.34	68.20	-14.86	31.33	22.01	Peak
2	5655.000	52.84	71.91	-19.07	30.78	22.06	Peak
3	5702.000	54.62	105.76	-51.14	32.42	22.20	Peak
4	5740.750	102.12	-----	79.81	22.31	Peak	
5	5854.250	55.89	112.51	-56.62	33.25	22.64	Peak
6	5923.000	54.53	69.69	-15.16	31.70	22.83	Peak
7	5969.500	55.21	68.20	-12.99	32.23	22.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_5745MHz
Test By :Brook Cheng

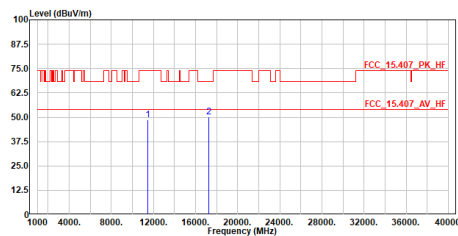


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	48.83	74.00	-25.17	54.92	-6.09	Peak
2	17235.000	50.19	68.20	-18.01	53.56	-3.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_5745MHz
Test By :Brook Cheng

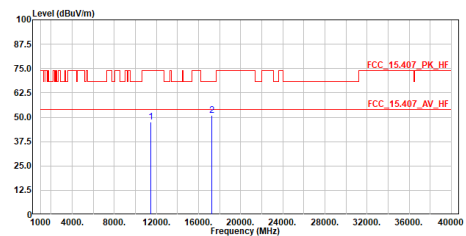


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	47.48	74.00	-26.52	53.57	-6.09	Peak
2	17235.000	50.00	68.20	-17.40	54.17	-3.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_5785MHz
Test By :Ling Chen

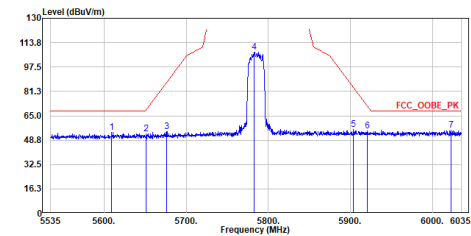


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5609.500	54.14	68.20	-14.06	32.21	21.93	Peak
2	5651.250	53.06	69.13	-16.07	31.02	22.04	Peak
3	5676.000	54.64	87.44	-32.80	32.52	22.12	Peak
4	5782.750	107.56	-----	85.12	22.44	-----	Peak
5	5903.750	56.15	83.93	-27.78	33.37	22.78	Peak
6	5921.000	54.79	71.17	-16.38	31.96	22.83	Peak
7	6022.250	55.66	68.20	-12.54	32.49	23.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_5785MHz
Test By :Brook Cheng

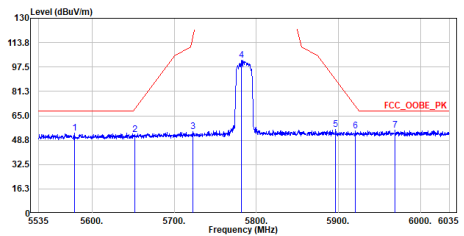


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	5578.500	53.34	68.20	-14.86	31.50	21.84	Peak
2	5652.250	52.53	69.87	-17.34	30.49	22.04	Peak
3	5723.000	54.35	117.64	-63.29	32.09	22.26	Peak
4	5782.250	102.11	-----	79.68	22.43	-----	Peak
5	5896.750	55.86	89.11	-33.25	33.10	22.76	Peak
6	5920.500	54.86	71.54	-16.68	32.03	22.83	Peak
7	5969.000	55.36	68.20	-12.84	32.39	22.97	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_5785MHz
Test By :Brook Cheng

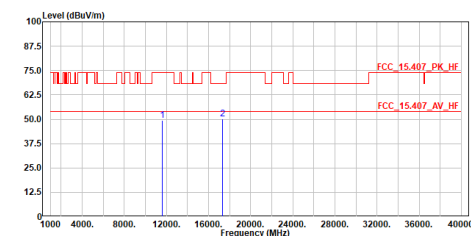


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11570.000	49.26	74.00	-24.74	55.30	-6.04	Peak
2	17355.000	50.04	68.20	-18.16	53.27	-3.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_5785MHz
Test By :Brook Cheng

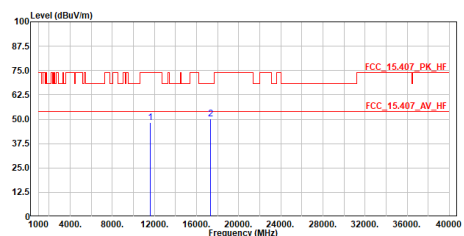


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11570.000	48.17	74.00	-25.83	54.21	-6.04	Peak
2	17355.000	50.17	68.20	-18.03	53.40	-3.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be20_TX_5825MHz
Test By :Ling Chen

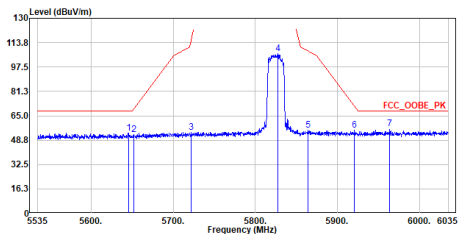


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5645.500	53.35	68.20	-14.85	31.32	22.03	Peak
2	5652.250	52.28	69.87	-17.59	30.24	22.04	Peak
3	5721.500	53.82	114.22	-60.40	31.56	22.26	Peak
4	5827.250	106.51	-----	-----	83.95	22.56	Peak
5	5864.500	55.58	108.14	-52.56	32.91	22.67	Peak
6	5920.750	55.26	71.35	-16.09	32.43	22.83	Peak
7	5963.750	56.17	68.20	-12.03	33.22	22.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be20_TX_5825MHz
Test By :Brook Cheng

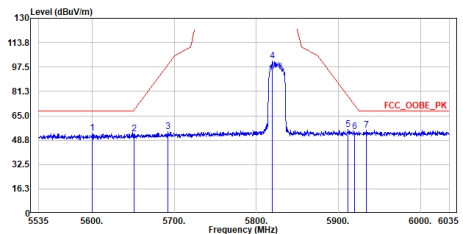


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5600.250	53.32	68.20	-14.88	31.42	21.90	Peak
2	5651.500	52.94	69.32	-16.38	30.90	22.04	Peak
3	5692.500	54.27	99.65	-45.38	32.10	22.17	Peak
4	5819.750	101.51	-----	-----	78.97	22.54	Peak
5	5911.500	55.80	78.20	-22.40	32.99	22.81	Peak
6	5920.000	54.24	71.91	-17.67	31.41	22.83	Peak
7	5934.000	55.67	68.20	-12.53	32.80	22.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_5825MHz
Test By :Brook Cheng

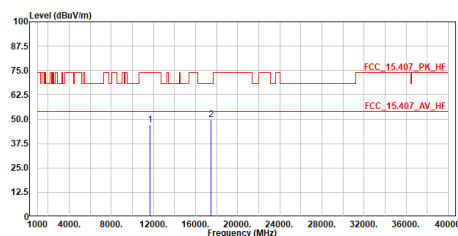


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	47.27	74.00	-26.73	53.26	-5.99	Peak
2	17475.000	49.89	68.20	-18.31	52.97	-3.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_5825MHz
Test By :Brook Cheng

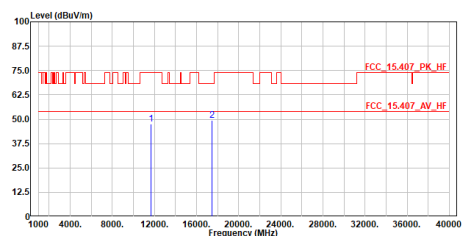


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	47.43	74.00	-26.57	53.42	-5.99	Peak
2	17475.000	49.60	68.20	-18.60	52.68	-3.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be20_TX_5845MHz
Test By :Brook Cheng

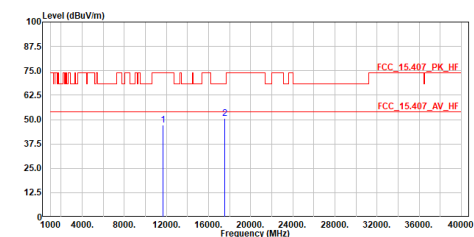


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11690.000	47.17	74.00	-26.83	53.15	-5.98	Peak
2	17535.000	50.43	68.20	-17.77	53.41	-2.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be20_TX_5845MHz
Test By :Brook Cheng

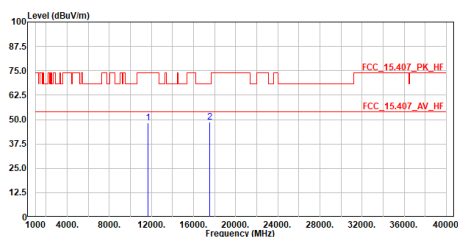


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11690.000	48.20	74.00	-25.80	54.18	-5.98	Peak
2	17535.000	48.61	68.20	-19.59	51.59	-2.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_5710MHz
Test By :Brook Cheng

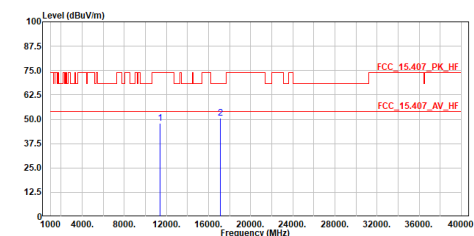


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11420.000	47.77	74.00	-26.23	54.01	-6.24	Peak
2	17130.000	50.68	68.20	-17.52	54.18	-3.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_5710MHz
Test By :Brook Cheng

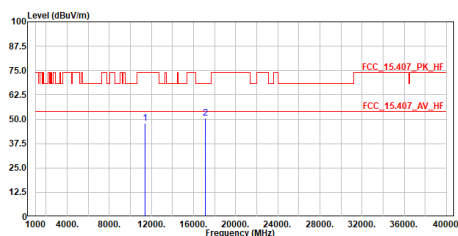


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11420.000	47.94	74.00	-26.06	54.18	-6.24	Peak
2	17130.000	50.50	68.20	-17.70	54.00	-3.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_5755MHz
Test By :Ling Chen

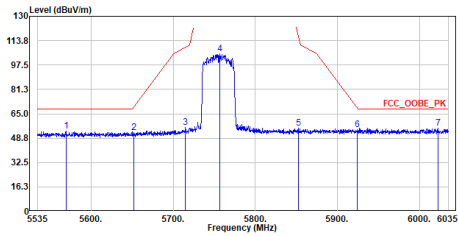


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5569.500	53.61	68.20	-14.59	31.80	21.81	Peak
2	5652.500	52.72	70.06	-17.34	30.68	22.04	Peak
3	5715.000	55.94	109.40	-53.46	33.71	22.23	Peak
4	5757.250	104.83	-----	82.48	22.35	Peak	
5	5852.250	55.25	117.07	-61.82	32.62	22.63	Peak
6	5924.000	54.52	68.95	-14.43	31.69	22.83	Peak
7	6022.750	55.36	68.20	-12.84	32.19	23.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_5755MHz
Test By :Brook Cheng

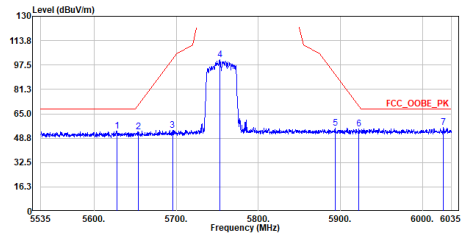


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5628.250	53.57	68.20	-14.63	31.59	21.98	Peak
2	5653.500	52.85	70.80	-17.95	30.79	22.06	Peak
3	5695.500	54.87	101.87	-47.00	31.90	22.17	Peak
4	5753.000	101.14	-----	78.79	22.35	Peak	
5	5893.750	55.50	91.33	-35.83	32.75	22.75	Peak
6	5922.750	55.01	69.87	-14.86	32.18	22.83	Peak
7	6025.750	55.69	68.20	-12.51	32.51	23.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_5755MHz
Test By :Brook Cheng

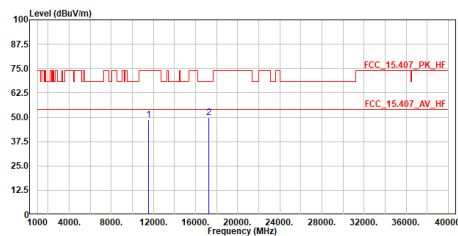


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11510.000	48.83	74.00	-25.17	54.89	-6.06	Peak
2	17265.000	49.98	68.20	-18.22	53.31	-3.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_5755MHz
Test By :Brook Cheng

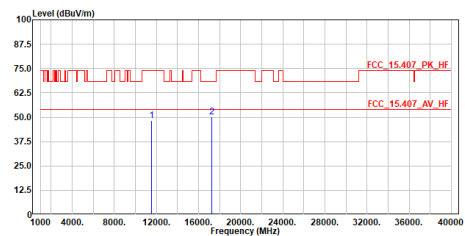


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11510.000	48.47	74.00	-25.53	54.53	-6.06	Peak
2	17265.000	50.30	68.20	-17.90	53.63	-3.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be40_TX_5795MHz
Test By :Ling Chen

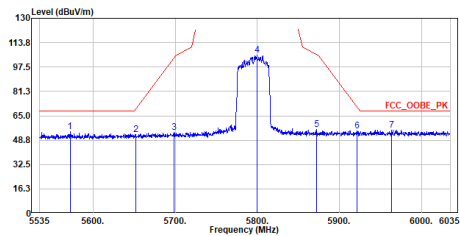


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5572.000	54.28	68.20	-13.92	32.47	21.81	Peak
2	5652.250	52.51	69.87	-17.36	30.47	22.04	Peak
3	5699.000	54.07	104.46	-50.39	31.88	22.19	Peak
4	5799.750	105.44	-----	82.96	22.48	-----	Peak
5	5872.000	55.70	106.04	-50.34	33.01	22.69	Peak
6	5921.500	54.93	70.80	-15.87	32.10	22.83	Peak
7	5963.750	55.57	68.20	-12.63	32.62	22.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be40_TX_5795MHz
Test By :Brook Cheng

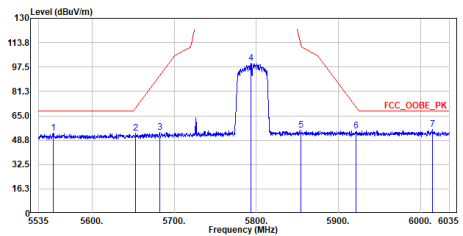


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5552.500	53.51	68.20	-14.69	31.75	21.76	Peak
2	5653.000	53.62	70.43	-16.81	31.57	22.05	Peak
3	5682.250	53.87	92.07	-38.20	31.73	22.14	Peak
4	5793.750	100.01	-----	77.55	22.46	-----	Peak
5	5854.250	55.64	112.51	-56.87	33.00	22.64	Peak
6	5921.250	54.70	70.98	-16.28	31.87	22.83	Peak
7	6014.250	55.86	68.20	-12.34	32.72	23.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be40_TX_5795MHz
Test By :Brook Cheng

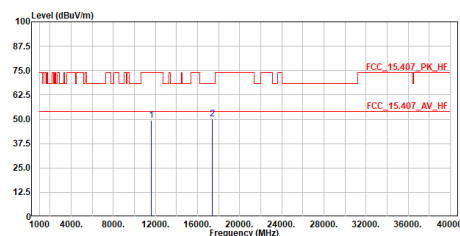


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11590.000	49.26	74.00	-24.74	55.29	-6.03	Peak
2	17385.000	50.08	68.20	-18.12	53.27	-3.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be40_TX_5795MHz
Test By :Brook Cheng

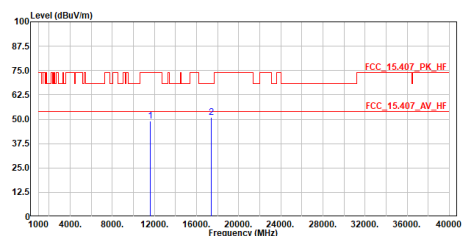


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11590.000	49.24	74.00	-24.76	55.27	-6.03	Peak
2	17385.000	50.93	68.20	-17.27	54.12	-3.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :be80_TX_5690MHz
Test By :Brook Cheng

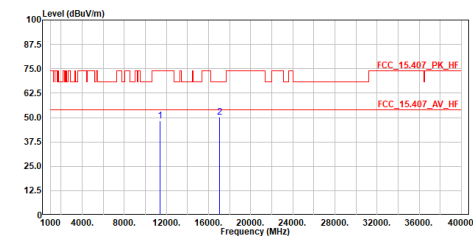


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11380.000	48.25	74.00	-25.75	54.57	-6.32	Peak
2	17070.000	50.17	68.20	-18.03	53.73	-3.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :be80_TX_5690MHz
Test By :Brook Cheng

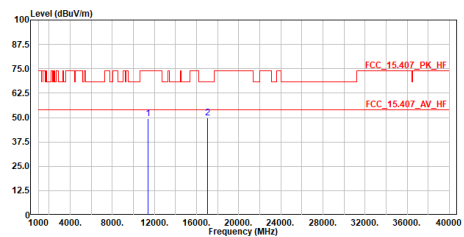


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	11380.000	49.25	74.00	-24.75	55.57	-6.32	Peak
2	17070.000	49.67	68.20	-18.53	53.23	-3.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :be80_TX_5775MHz
Test By :Ling Chen

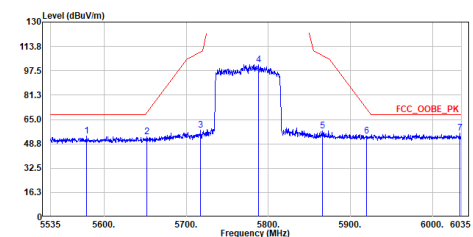


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5578.750	53.81	68.20	-14.39	31.97	21.84	Peak
2	5652.000	53.44	69.69	-16.25	31.40	22.04	Peak
3	5717.500	57.83	110.10	-52.27	35.60	22.23	Peak
4	5788.000	101.54	-----	-----	79.09	22.45	Peak
5	5866.250	57.17	107.65	-50.48	34.49	22.68	Peak
6	5920.000	53.85	71.91	-18.06	31.02	22.83	Peak
7	6033.500	55.84	68.20	-12.36	32.61	23.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :be80_TX_5775MHz
Test By :Brook Cheng

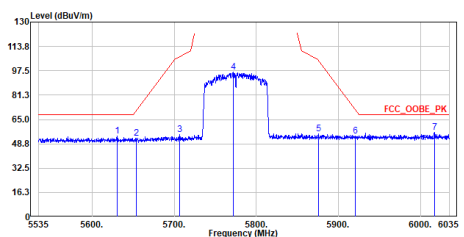


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5630.250	53.77	68.20	-14.43	31.79	21.98	Peak
2	5654.250	52.31	71.35	-19.04	30.25	22.06	Peak
3	5706.500	55.00	107.02	-52.02	32.79	22.21	Peak
4	5771.750	96.70	-----	-----	74.30	22.40	Peak
5	5875.500	55.59	104.83	-49.24	32.89	22.70	Peak
6	5921.000	53.76	71.17	-17.41	30.93	22.83	Peak
7	6017.000	56.19	68.20	-12.01	33.04	23.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
Condition :3m Horizontal
Mode :be80_TX_5775MHz
Test By :Brook Cheng

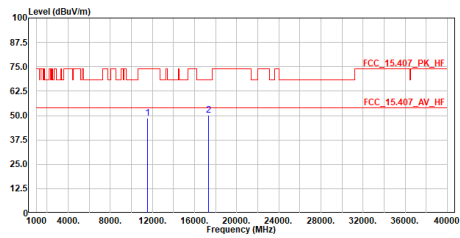

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	Line	Limit	Level	dB	
		dBuV/m	dBuV/m	dB	dBuV	dB	
1	11550.000	48.84	74.00	-25.16	54.88	-6.04	Peak
2	17325.000	50.17	68.20	-18.03	53.43	-3.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Vertical
Mode :be80_TX_5775MHz
Test By :Brook Cheng

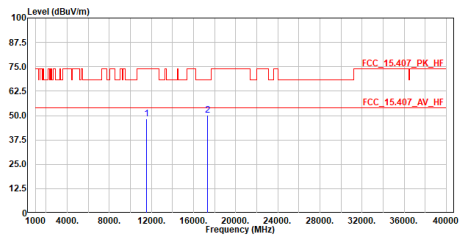

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	Line	Limit	Level	dB	
		dBuV/m	dBuV/m	dB	dBuV	dB	
1	11550.000	48.33	74.00	-25.67	54.37	-6.04	Peak
2	17325.000	50.38	68.20	-17.82	53.64	-3.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.