



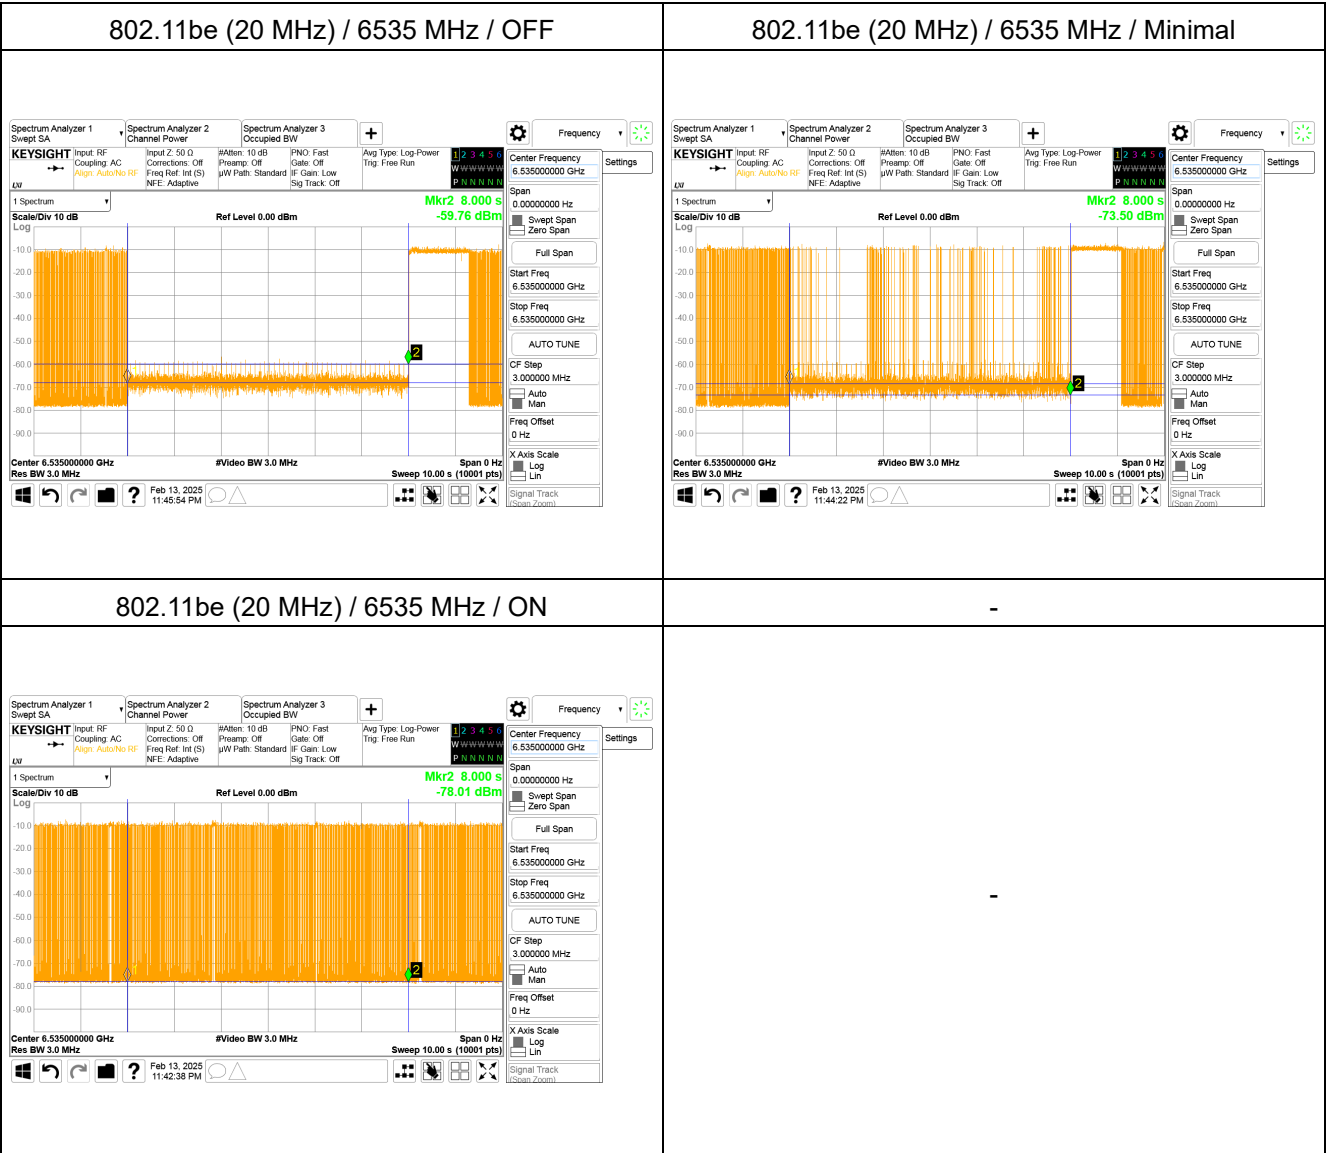

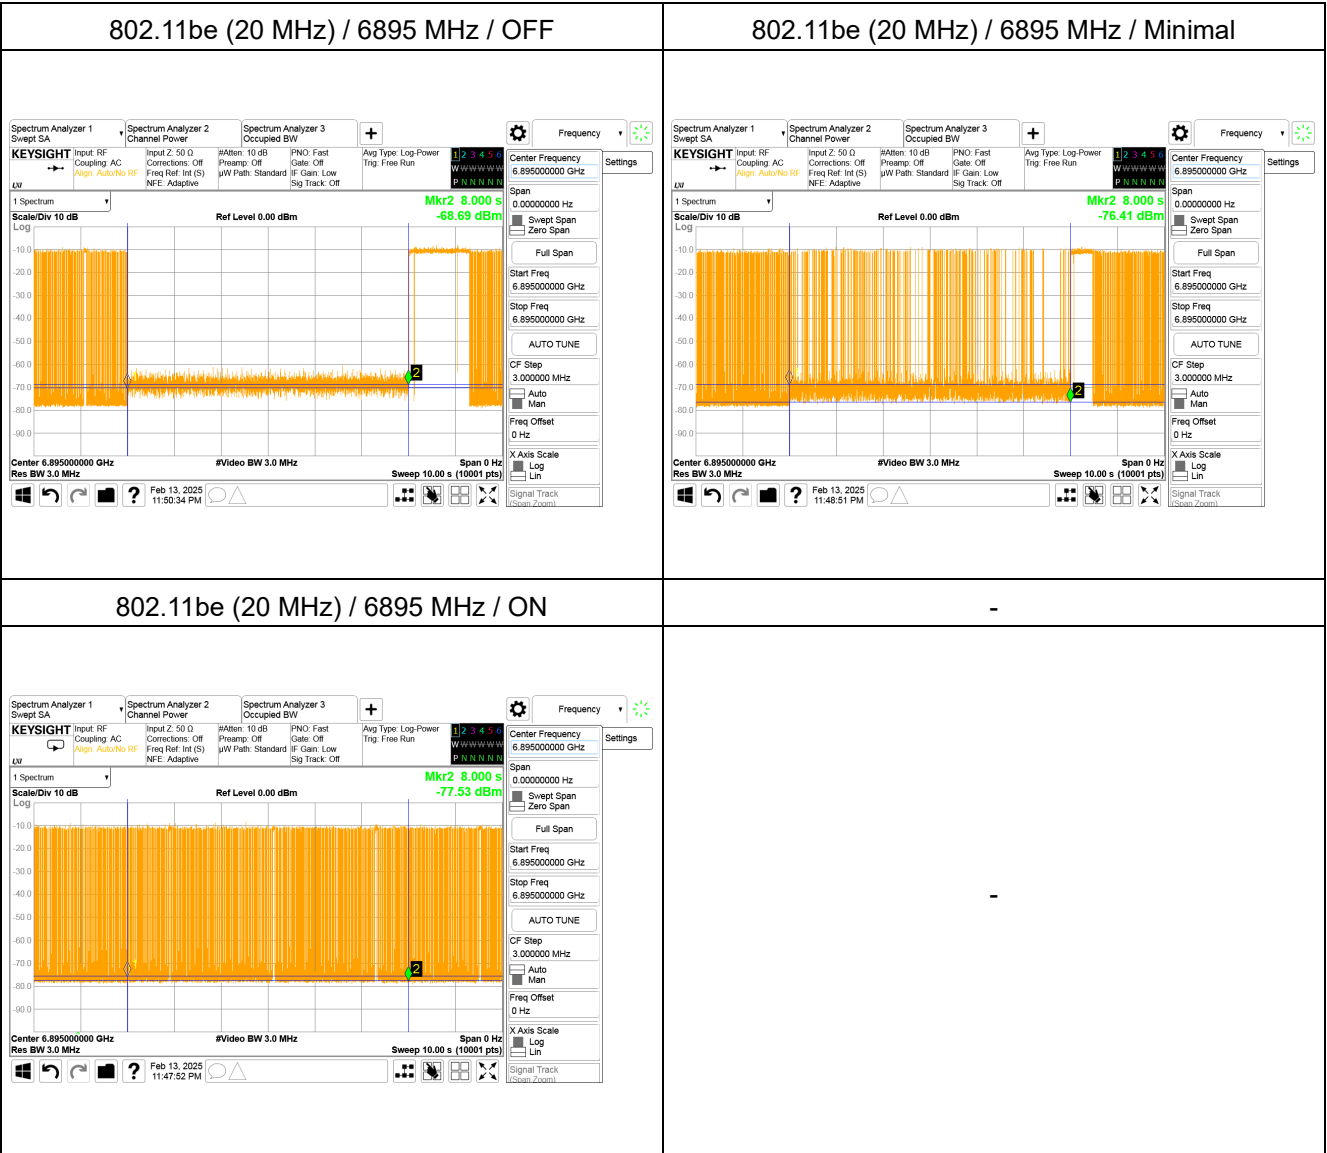

UNII Band	Operation Mode	Channel Bandwidth (MHz)	Test Channel	Channel Frequency (MHz)	Interference frequency (MHz)	Test Result					
						AWGN Thresh old (MHz)	EUT Status	Number of times	Detection Rate (%)	Limit (%)	Pass / Fail
U-NII 5	802.11be	160	47	6185	6110	-63.84	OFF	10	100	90	Pass
					6185	-63.84	OFF	10	100	90	Pass
					6260	-63.84	OFF	10	100	90	Pass
U-NII 6			111	6505	6430	-63.84	OFF	10	100	90	Pass
					6505	-63.84	OFF	10	100	90	Pass
					6580	-63.84	OFF	10	100	90	Pass
U-NII 7			143	6665	6590	-63.84	OFF	10	100	90	Pass
					6665	-63.84	OFF	10	100	90	Pass
					6740	-63.84	OFF	10	100	90	Pass
U-NII 8			207	6985	6910	-63.84	OFF	10	100	90	Pass
					6985	-63.84	OFF	10	100	90	Pass
					7060	-63.84	OFF	10	100	90	Pass

Lowest Interference Level check (AWGN)											
UNII Band	Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Frequency (MHz)	Interference frequency (MHz)	EUT Status	Injected AWGN Power (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Detected Power (dBm)	Detected Limit (dBm)
U-NII 5	802.11be	160	47	6185	6110	OFF	-62	1.84	0	-63.84	≤ -62
						Minimal	-64	1.84	0	-65.84	≤ -62
						ON	-82	1.84	0	-83.84	≤ -62
					6185	OFF	-62	1.84	0	-63.84	≤ -62
						Minimal	-63	1.84	0	-64.84	≤ -62
						ON	-82	1.84	0	-83.84	≤ -62
					6260	OFF	-62	1.84	0	-63.84	≤ -62
						Minimal	-63	1.84	0	-64.84	≤ -62
						ON	-82	1.84	0	-83.84	≤ -62

Note:

- Detected Power (dBm) = Injected AWGN Power (dBm) - Ant Gain (dBi) + Cable Loss (dB)
- Antenna gain values include all the applicable path losses.

Lowest Interference Level check (AWGN)											
UNII Band	Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Frequency (MHz)	Interference frequency (MHz)	EUT Status	Injected AWGN Power (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Detected Power (dBm)	Detected Limit (dBm)
U-NII 6	802.11be	160	111	6505	6430	OFF	-62	1.84	0	-63.84	≤-62
						Minimal	-63	1.84	0	-64.84	≤-62
						ON	-82	1.84	0	-83.84	≤-62
					6505	OFF	-62	1.84	0	-63.84	≤-62
						Minimal	-63	1.84	0	-64.84	≤-62
						ON	-82	1.84	0	-83.84	≤-62
					6580	OFF	-62	1.84	0	-63.84	≤-62
						Minimal	-63	1.84	0	-64.84	≤-62
						ON	-82	1.84	0	-83.84	≤-62
U-NII 7			143	6665	6590	OFF	-62	1.84	0	-63.84	≤-62
						Minimal	-63	1.84	0	-64.84	≤-62
						ON	-82	1.84	0	-83.84	≤-62
					6665	OFF	-62	1.84	0	-63.84	≤-62
						Minimal	-63	1.84	0	-64.84	≤-62
						ON	-82	1.84	0	-83.84	≤-62
					6740	OFF	-62	1.84	0	-63.84	≤-62
						Minimal	-63	1.84	0	-64.84	≤-62
						ON	-82	1.84	0	-83.84	≤-62
U-NII 8			207	6985	6910	OFF	-62	1.84	0	-63.84	≤-62
						Minimal	-63	1.84	0	-64.84	≤-62
						ON	-82	1.84	0	-83.84	≤-62
					6985	OFF	-62	1.84	0	-63.84	≤-62
						Minimal	-63	1.84	0	-64.84	≤-62
						ON	-82	1.84	0	-83.84	≤-62
					7060	OFF	-62	1.84	0	-63.84	≤-62
						Minimal	-63	1.84	0	-64.84	≤-62
						ON	-82	1.84	0	-83.84	≤-62


Note:


- Detected Power (dBm) = Injected AWGN Power (dBm) - Ant Gain (dBi) + Cable Loss (dB)
- Antenna gain values include all the applicable path losses.








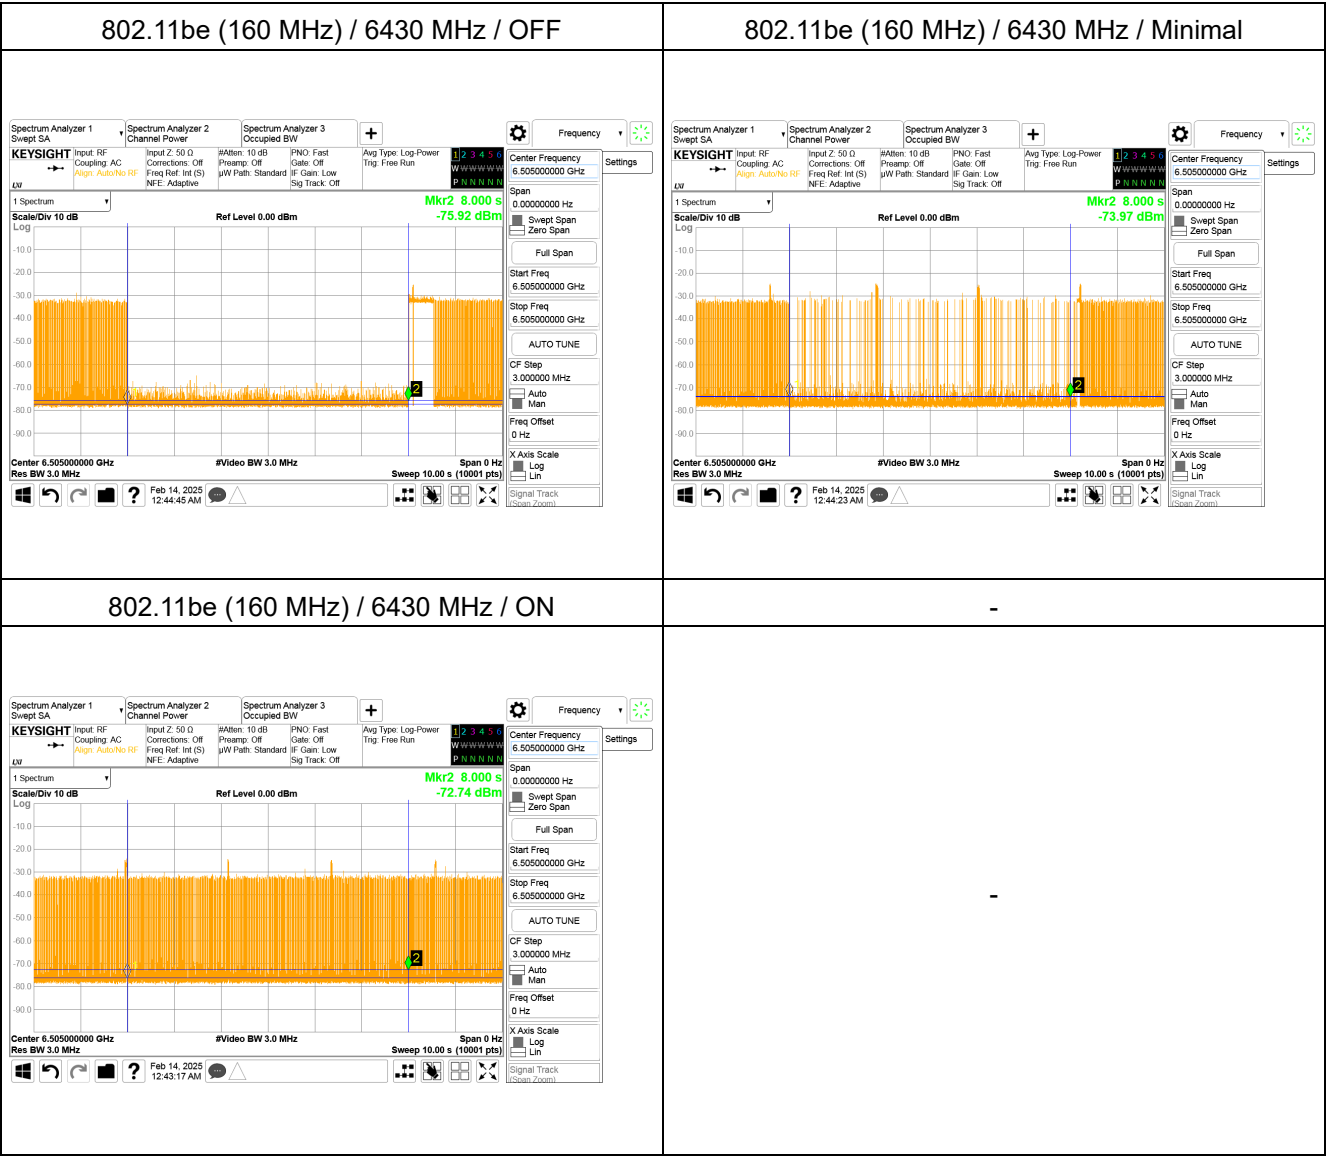


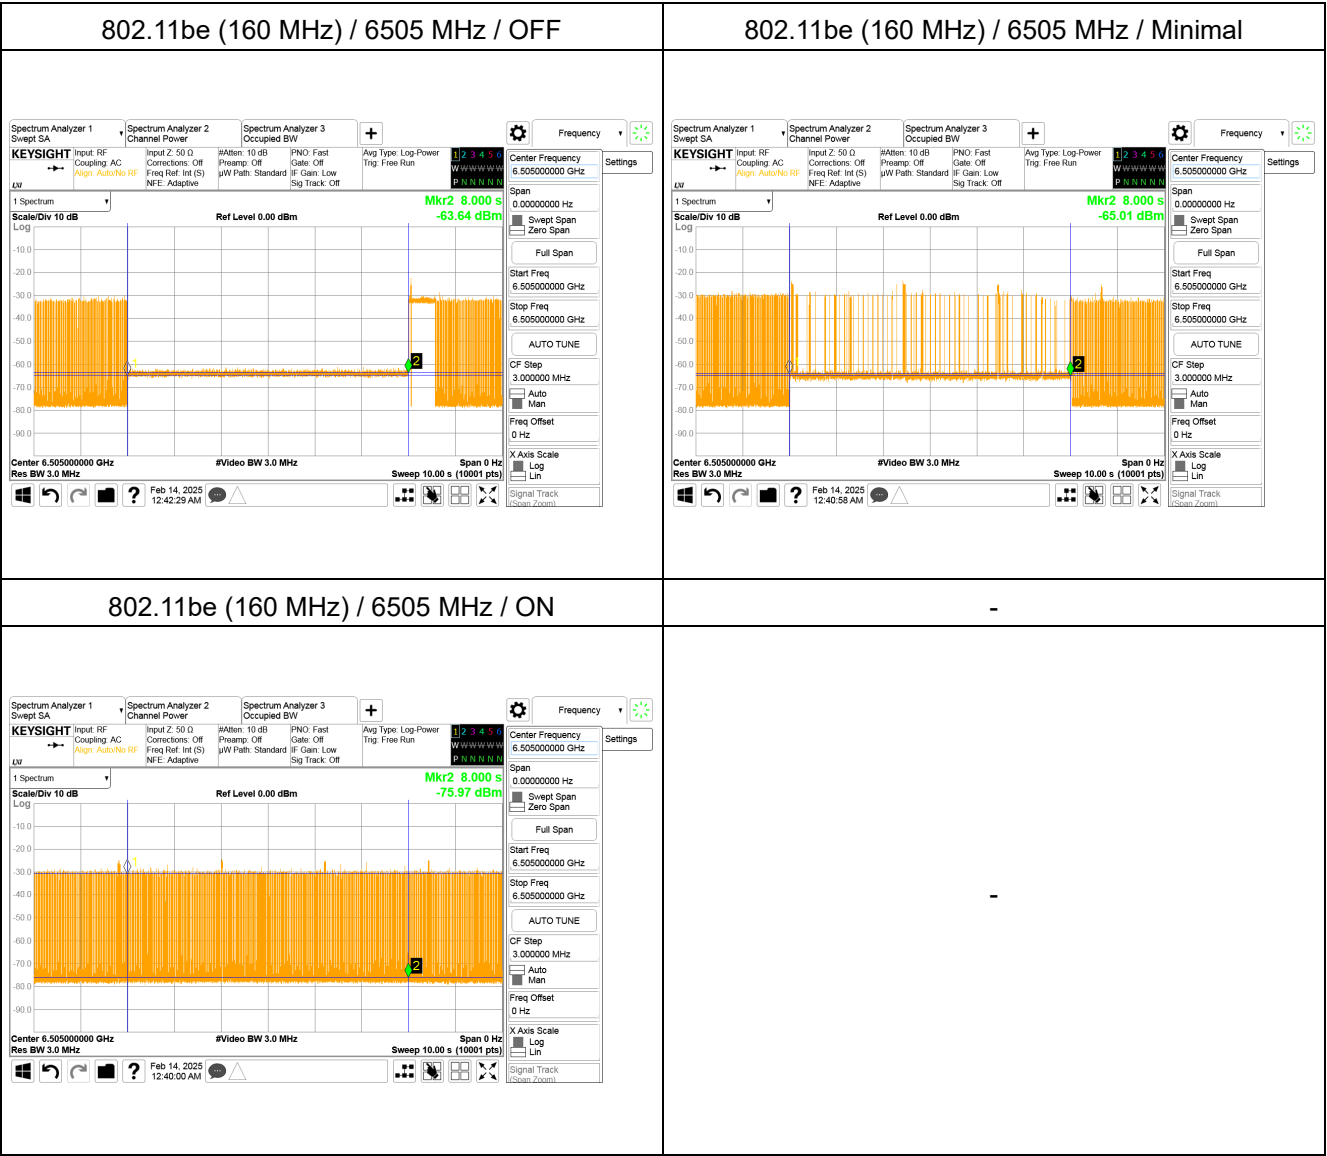




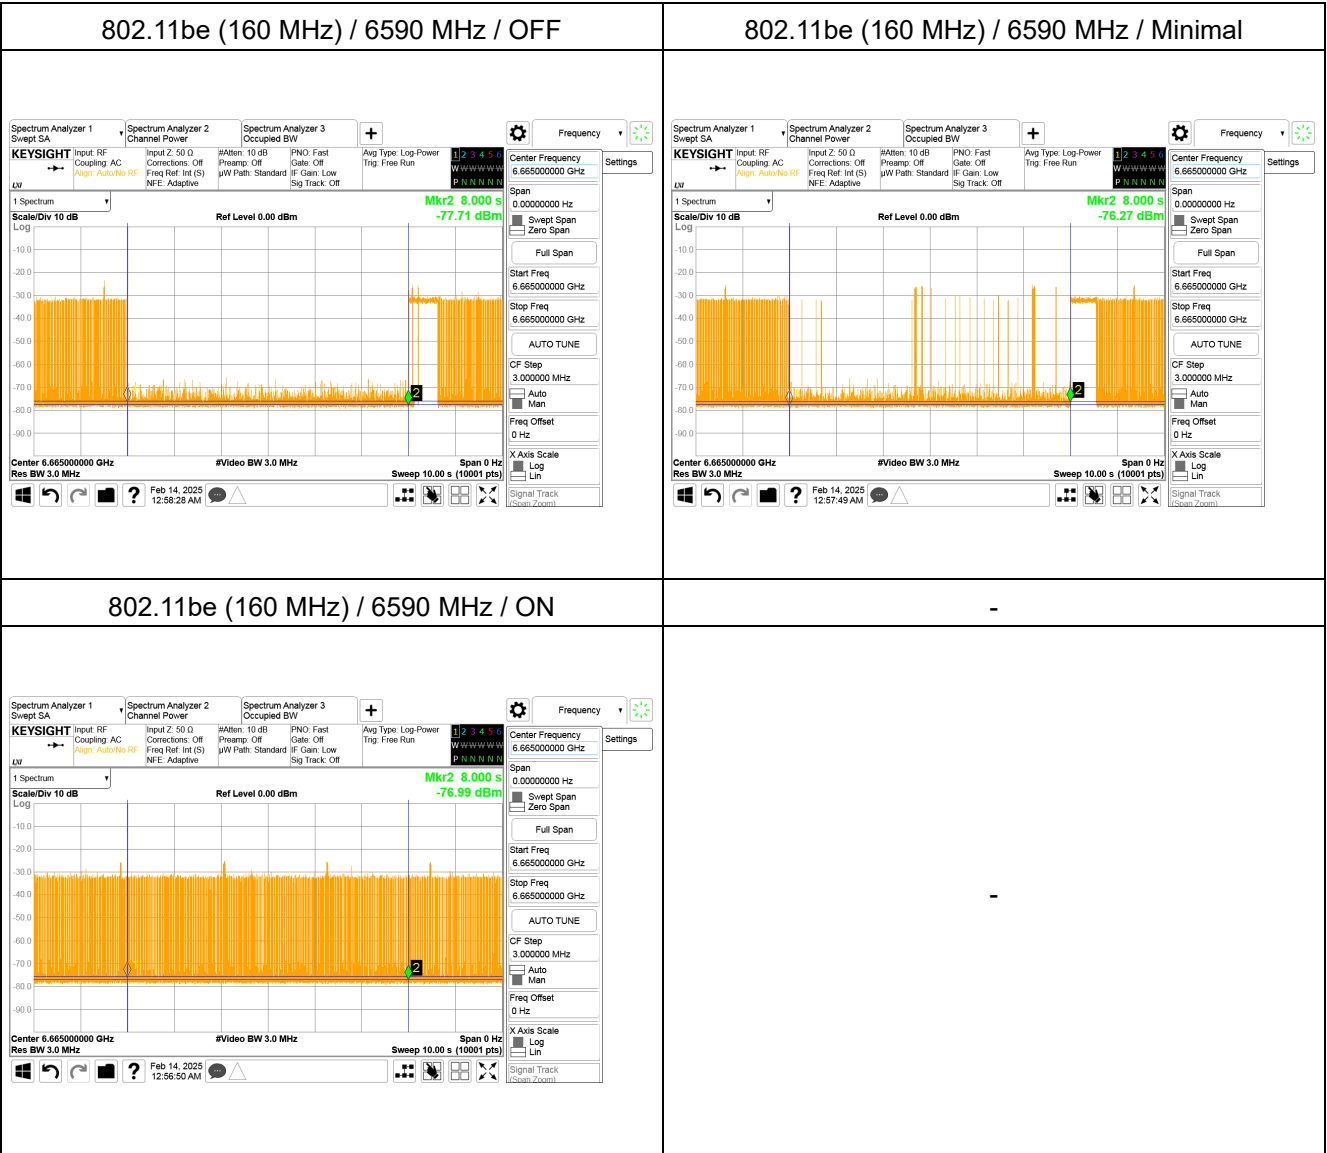


802.11be (160 MHz) / 6665 MHz / OFF

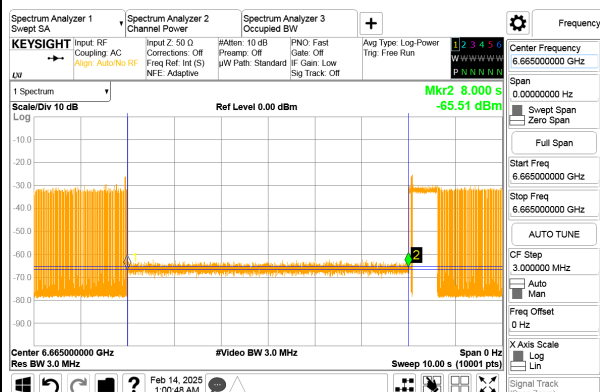

802.11be (160 MHz) / 6665 MHz / Minimal

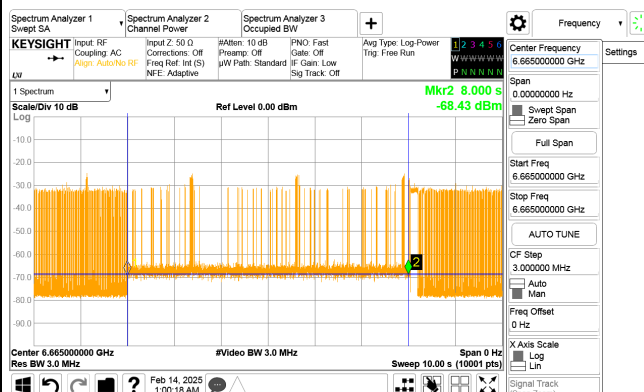


802.11be (160 MHz) / 6665 MHz / ON

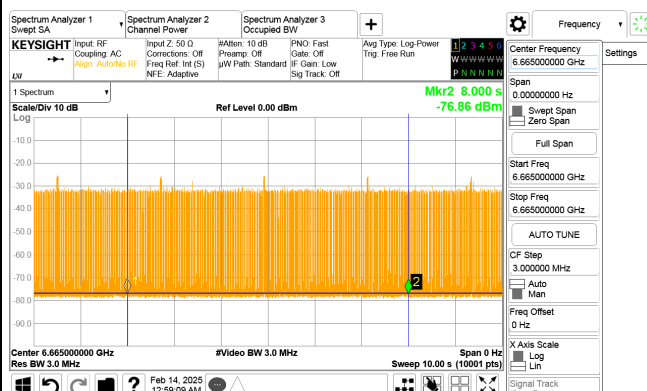


-

-




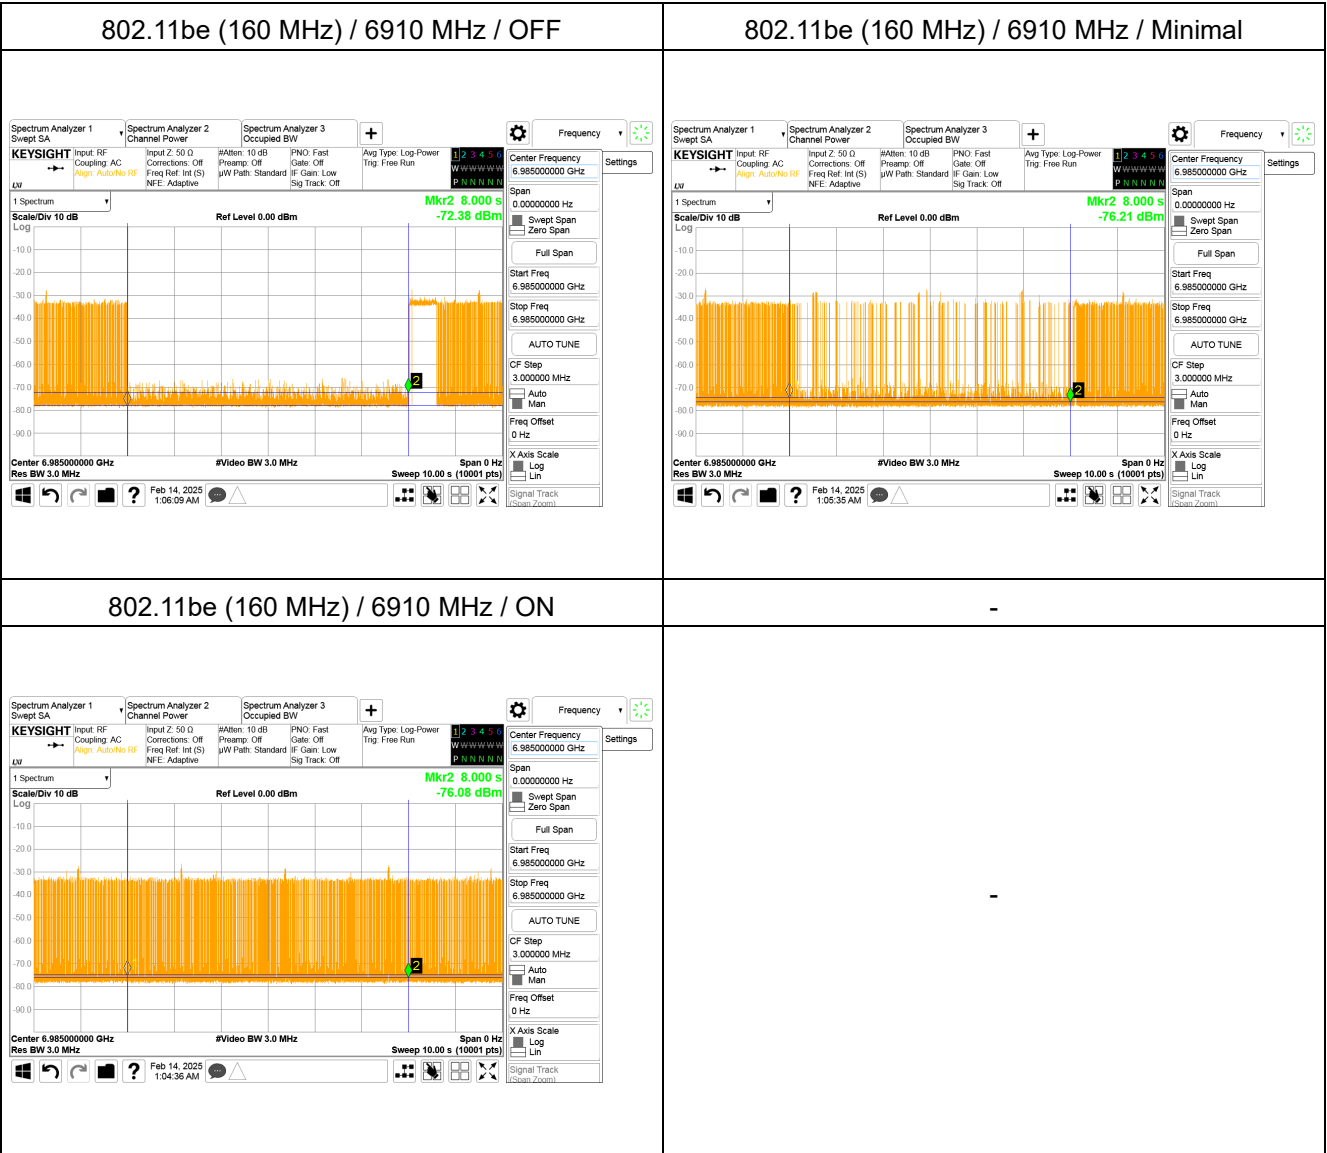


802.11be (160 MHz) / 6985 MHz / OFF

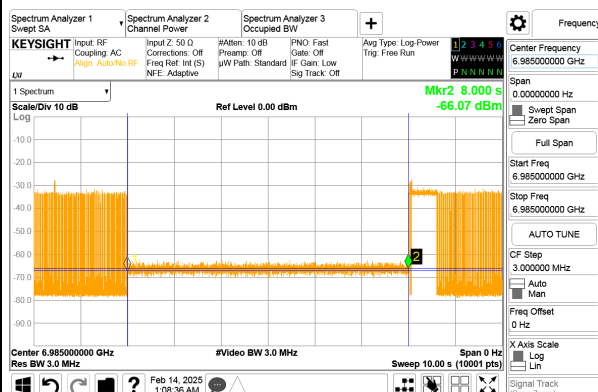

802.11be (160 MHz) / 6985 MHz / Minimal

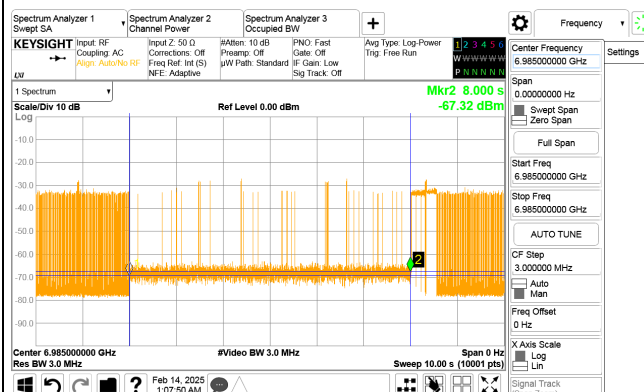

802.11be (160 MHz) / 6985 MHz / ON

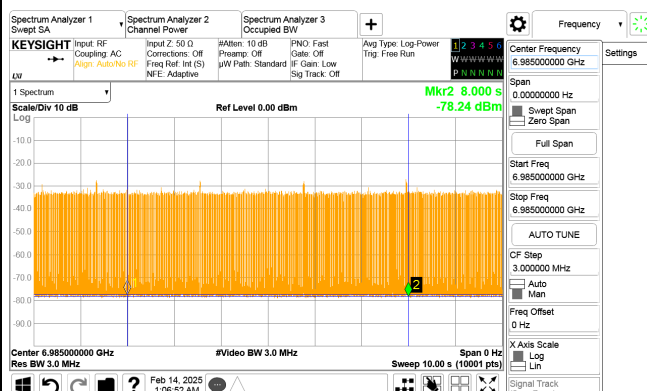

-

-

