



FCC RADIO TEST REPORT

Applicant : Micro-Star Int'l Co.,Ltd.

Address : No.69, Lide St., Zhonghe Dist. New Taipei City 235
Taiwan

Equipment : Wireless Controller

Model No. : MS-8ZBZ

Trade Name : msi

FCC ID : I4L-MS-8ZBZ

I HEREBY CERTIFY THAT :

The sample was received on Feb. 06, 2024 and the testing was completed on Apr. 16, 2024 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software	8
2.4 Description of Test System.....	8
2.5 General Information of Test.....	9
2.6 Measurement Uncertainty	10
3. Test Equipment and Ancillaries Used for Tests	11
4. Antenna Requirements.....	13
4.1 Standard Applicable	13
4.2 Antenna Construction and Directional Gain.....	13
5. Test of AC Power Line Conducted Emission	14
5.1 Test Limit	14
5.2 Test Procedures	14
5.3 Typical Test Setup	15
5.4 Test Result and Data.....	16
5.5 Test Photographs	18
6. Test of Radiated Spurious Emission.....	19
6.1 Test Limit	19
6.2 Test Procedures	20
6.3 Typical Test Setup	21
6.4 Test Result and Data (9KHz ~ 30MHz)	22
6.5 Test Result and Data (30MHz ~ 1GHz)	22
6.6 Test Result and Data (1GHz ~ 25GHz).....	24
6.7 Restricted Bands of Operation	30
6.8 Test Photographs (30MHz ~ 1GHz)	31
6.9 Test Photographs (1GHz ~ 25GHz)	32
7. Test of Conducted Spurious Emission	34
7.1 Test Limit	34
7.2 Test Procedure	34
7.3 Test Setup Layout	34
7.4 Test Result and Data.....	34
8. On Time, Duty Cycle and Measurement methods	37
8.1 Test Limit	37
8.2 Test Procedure	37
8.3 Test Setup Layout	37
8.4 Test Result and Data.....	37
9. 6dB Bandwidth Measurement Data.....	39
9.1 Test Limit	39
9.2 Test Procedures	39



9.3	Test Setup Layout	39
9.4	Test Result and Data.....	40
10.	Maximum Average Output Power	42
10.1	Test Limit	42
10.2	Test Procedures	42
10.3	Test Setup Layout	42
10.4	Test Result and Data.....	43
11.	Power Spectral Density	44
11.1	Test Limit	44
11.2	Test Procedures	44
11.3	Test Setup Layout	44
11.4	Test Result and Data.....	44
12.	Radio Frequency Exposure	46
12.1	Applicable Standards	46
12.2	EUT Specification.....	47
12.3	Result	47



History of this test report

Report No.	Issued Date	Description
24020108-TRFCC01	Apr. 30, 2024	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(b)	. Output Power	PASS
15.247(e)	. Power Spectral Density	PASS
2.1091	. Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operation Frequency Range	2400MHz-2483.5MHz
Center Frequency Range	BLE(1Mbps): 2402MHz-2480MHz SRD(2Mbps): 2403MHz-2480MHz
Modulation Type	BLE / SRD: GFSK
Modulation Technology	BLE / SRD: DTS
Data Rate	BLE: GFSK: 1Mbps SRD: GFSK: 2Mbps
Antenna Type	BLE / SRD: Monopole Antenna
Antenna Gain	BLE / SRD: 2402-2480MHz: -0.21dBi
USB Cable	Brand: msi Model: Force Pro USB cable
Battery	Brand: Apower Electronics Co., Ltd Model: AEC682160

Note: For more details, please refer to the User's manual of the EUT.

Difference description:

The only difference between models is the appearance color (black, gray), the rest of the circuit diagrams are the same.



2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	*78	2480
19	2421	*39	2441	59	2461	--	--
20	2422	40	2442	60	2462	--	--

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- The complete test system included remote workstation and EUT for RF test. The remote workstation included Notebook.
- An executive program, Hardware control was executed to transmit and receive data via SRD.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	DC 5V Power from Adapter (AC 120V/60Hz), GFSK (2Mbps), TX Mode
2	DC 5V Power from Adapter (AC 240V/60Hz), GFSK (2Mbps), TX Mode
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (9KHz ~30MHz & 30MHz ~ 1GHz)	
Test Mode	Operating Description
1	DC 5V Power from Adapter (AC 120V/60Hz), GFSK (2Mbps), TX Mode
2	DC 5V Power from Adapter (AC 240V/60Hz), GFSK (2Mbps), TX Mode
caused "Test Mode 2" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	DC 5V Power from Adapter (AC 120V/60Hz), GFSK (2Mbps), TX Mode
2	DC 5V Power from Adapter (AC 240V/60Hz), GFSK (2Mbps), TX Mode
caused "Test Mode 2" generated the worst case, it was reported as the final data.	

Modulation Type	TX CONFIGURATION
GFSK (2Mbps)	1TX

2.4 Description of Test System

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Adapter	hoda	TC-03	N/A	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Adapter	hoda	TC-03	N/A	N/A



2.5 General Information of Test

☒ Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
Frequency Range Investigated	Conducted: from 150kHz to 30 MHz Radiation: from 9kHz to 25,000MHz	
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2024/3/20~2024/3/21	22.7~23.3°C / 46~48%	Leon Huang
Radiated Emissions	3M02-NK	2024/03/19	19.5°C / 42%	Leon Huang
Radiated Emissions	3M02-NK	2024/04/16	22.2°C / 42%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2024/04/16	23.7°C / 64%	Park Chen



2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.12dB
Radiated Spurious Emission(9KHz~30MHz)	±3.5dB
Radiated Spurious Emission(30MHz~1GHz)	±5.1dB
Radiated Spurious Emission(1GHz~40GHz)	±5.2dB
Conducted Spurious Emission	±2.1dB
6dB Bandwidth	±5.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.5%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±7.6%
Power Spectral Density	±2.0dB
Duty Cycle	±3.5%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2024/02/19	2025/02/18
Active Loop Antenna	Schwarzbeck	FMZB 1513	414	2024/01/16	2025/01/15
Horn Antenna	EMCO	3115	31601	2023/10/18	2024/10/17
Horn Antenna	EMCO	3116	31974	2023/10/16	2024/10/15
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2023/07/05	2024/07/04
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2023/08/15	2024/08/14
Preamplifier	EM Electronics corp.	EMC118A45V1SEE	980993	2023/10/16	2024/10/15
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2023/10/13	2024/10/12
Preamplifier	EM Electronics corp.	EM330	60659	2024/02/17	2025/02/16
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2023/07/31	2024/07/30
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2024/02/23	2025/02/22
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2024/03/05	2025/03/04
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2024/03/05	2025/03/04
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA203SM	CCE1374	2024/03/05	2025/03/04
Cable-1m(1G-40G)	HUBER SUHNER	HUBER SUHNER / SF102	552450	2023/06/08	2024/06/07
Cable-3m(1G-40G)	HUBER SUHNER	HUBER SUHNER / SF102	552451	2023/06/08	2024/06/07
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	Warison	WFIL-H3000-18000F-03	WRJ5CFWC2J1	2023/07/03	2024/07/02

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100047	2024/03/01	2025/02/28
Attenuator	KEYSIGHT	8491B	MY39250703	2024/02/20	2025/02/19
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2023/10/12	2024/10/11
Power Meter	Anritsu	ML2495A	1224005	2024/02/17	2025/02/16
Power Sensor	Anritsu	MA2411B	1207295	2024/02/17	2025/02/16
Switch Box	Theda	1-4	TW5451159	NA	NA



Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2023/05/08	2024/05/07
TWO-LINE V-NETWORK	ROHDE & SCHWARZ	ENV216	102185	2023/08/29	2024/08/28
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2023/07/31	2024/07/30
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	Monopole Antenna
Antenna Gain	2402-2480MHz: -0.21dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



5.3 Typical Test Setup

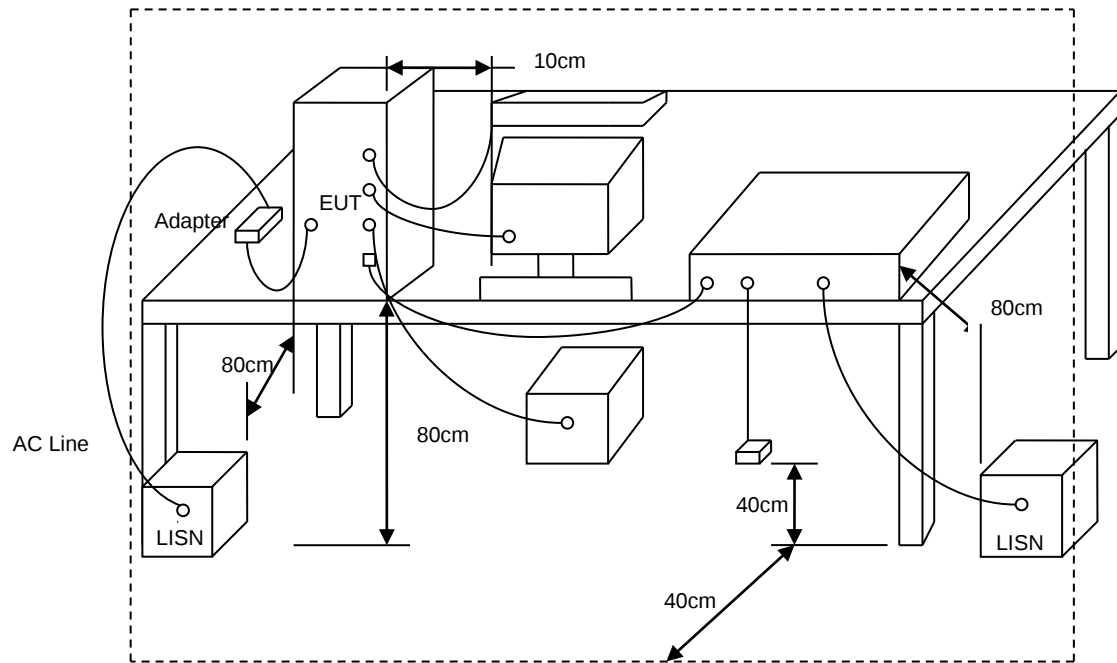




5.4 Test Result and Data

Test Mode : SRD 1TX 2441MHz 2Mbps
Voltage : From Adapter(AC 120V/60Hz)
Phase : Line

Data: 13

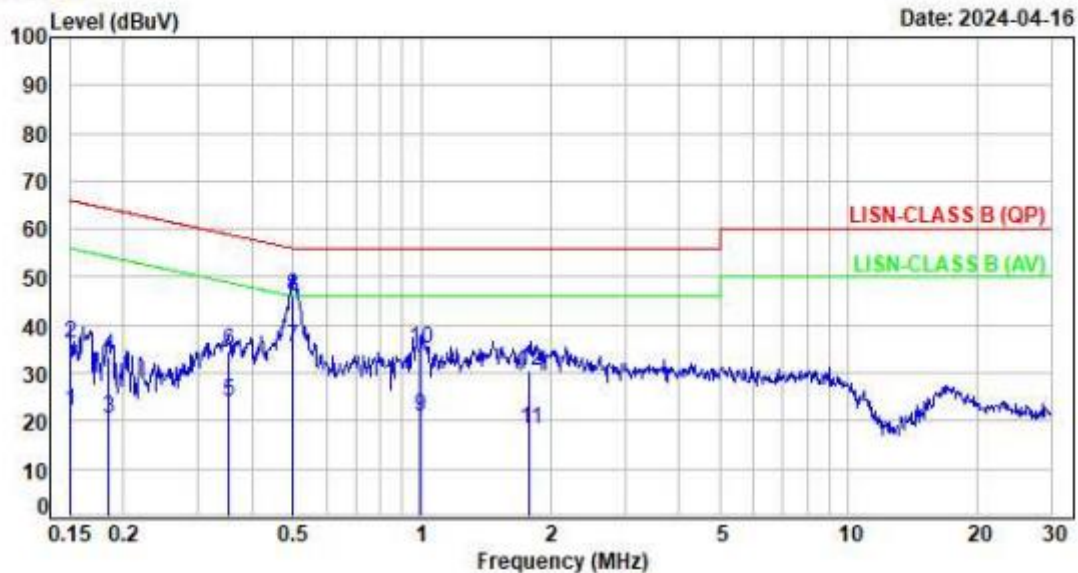

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1503	9.66	12.22	21.88	55.98	-34.10	Average	P
2	0.1503	9.66	26.52	36.18	65.98	-29.80	QP	P
3	0.1840	9.65	10.75	20.40	54.30	-33.90	Average	P
4	0.1840	9.65	23.84	33.49	64.30	-30.81	QP	P
5	0.3545	9.66	14.24	23.90	48.86	-24.96	Average	P
6	0.3545	9.66	24.83	34.49	58.86	-24.37	QP	P
7	0.4992	9.65	25.71	35.36	46.01	-10.65	Average	P
8	0.4992	9.65	36.40	46.05	56.01	-9.96	QP	P
9	0.9942	9.64	11.46	21.10	46.00	-24.90	Average	P
10	0.9942	9.64	25.28	34.92	56.00	-21.08	QP	P
11	1.7896	9.69	8.42	18.11	46.00	-27.89	Average	P
12	1.7896	9.69	20.68	30.37	56.00	-25.63	QP	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Test Mode : SRD 1TX 2441MHz 2Mbps
Voltage : From Adapter(AC 120V/60Hz)
Phase : Neutral

Data: 14

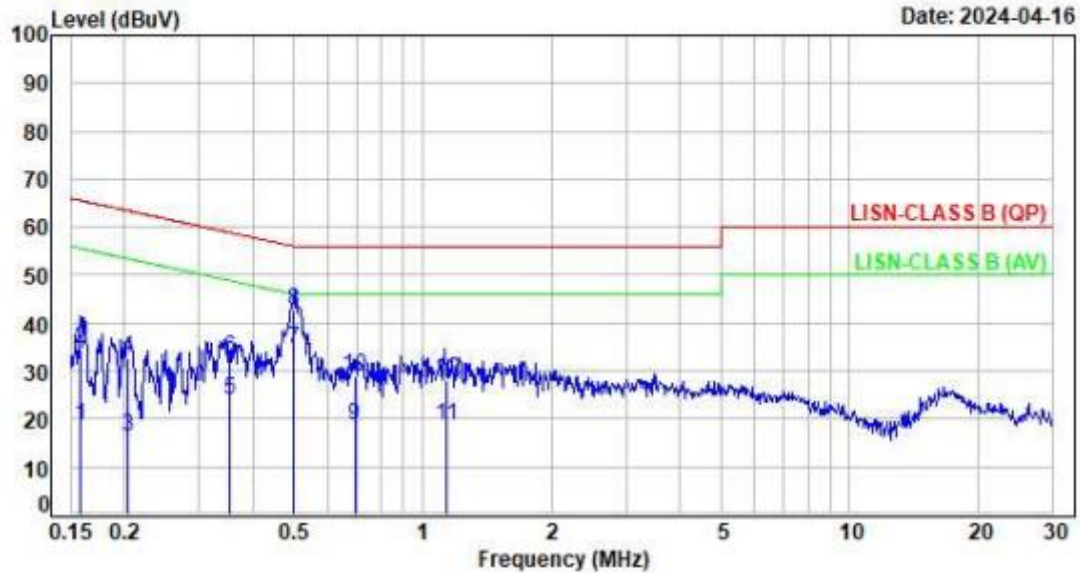

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1581	9.57	9.16	18.73	55.56	-36.83	Average	P
2	0.1581	9.57	24.97	34.54	65.56	-31.02	QP	P
3	0.2042	9.59	6.76	16.35	53.44	-37.09	Average	P
4	0.2042	9.59	23.24	32.83	63.44	-30.61	QP	P
5	0.3534	9.58	14.29	23.87	48.88	-25.01	Average	P
6	0.3534	9.58	22.94	32.52	58.88	-26.36	QP	P
7	0.4993	9.57	25.19	34.76	46.01	-11.25	Average	P
8	0.4993	9.57	33.08	42.65	56.01	-13.36	QP	P
9	0.6924	9.58	9.00	18.58	46.00	-27.42	Average	P
10	0.6924	9.58	19.17	28.75	56.00	-27.25	QP	P
11	1.1329	9.61	9.12	18.73	46.00	-27.27	Average	P
12	1.1329	9.61	18.69	28.30	56.00	-27.70	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
(Y-AXIS is the worst.)
- 2.Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




6.3 Typical Test Setup


Below 30MHz test setup

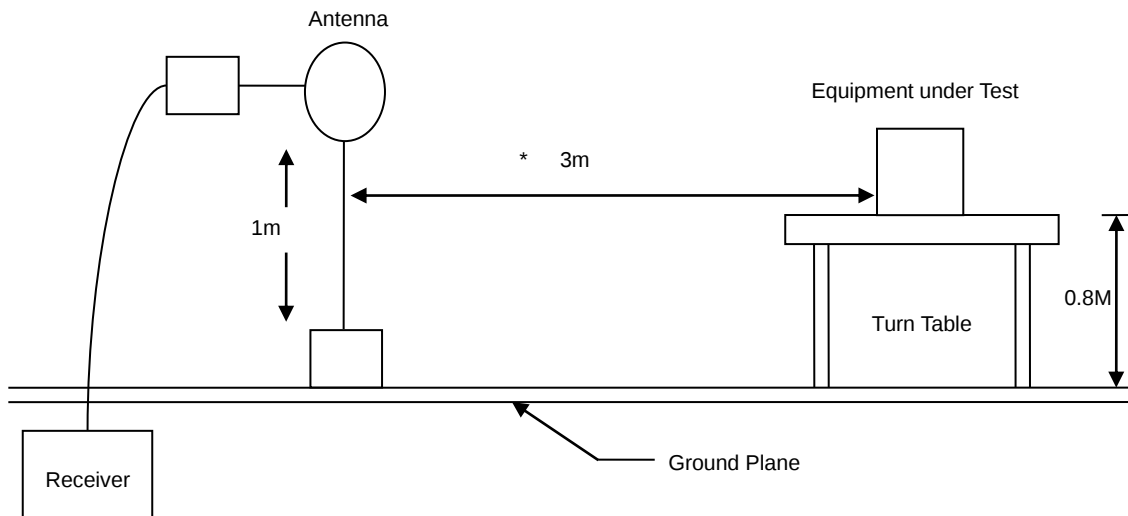

30MHz- 1GHz Test Setup

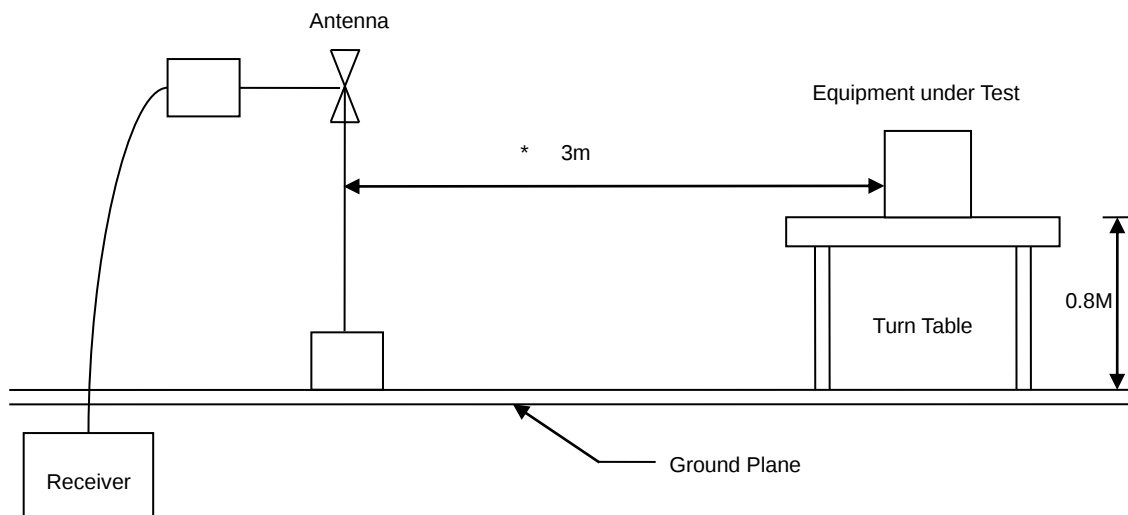

Above 1GHz Test Setup

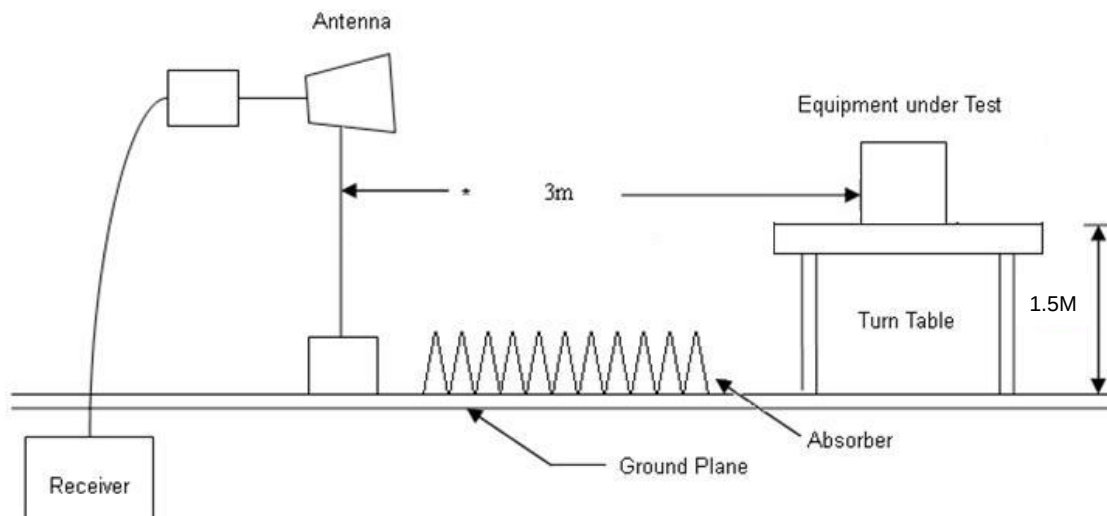




6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Test Mode : SRD 1TX 2441 2Mbps
Voltage : From Adapter (240V/60Hz)
Pol : Vertical

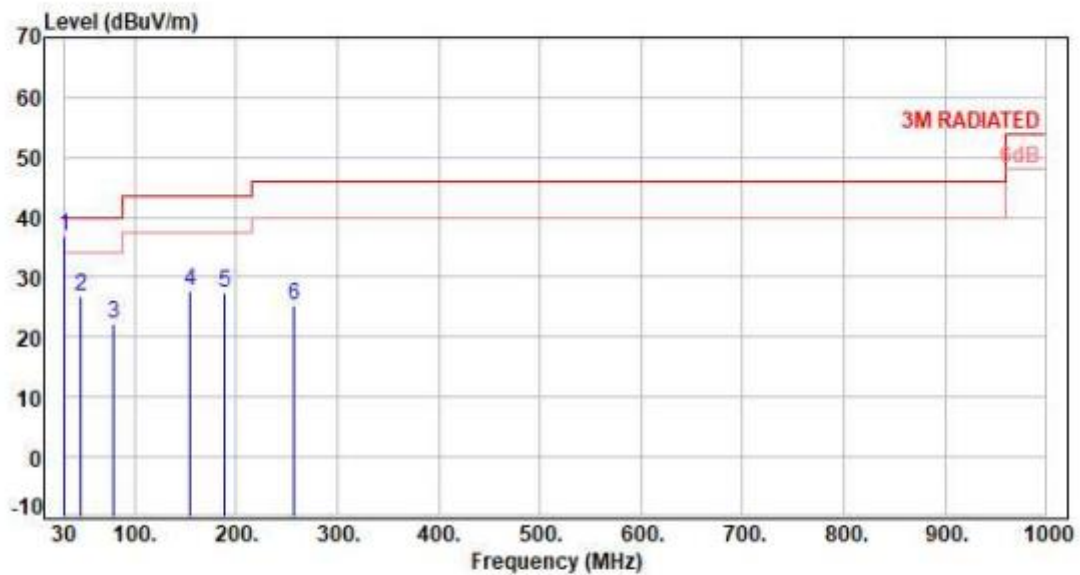

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-10.01	46.83	36.82	40.00	-3.18	Peak	400	360	P
2	47.46	-9.27	36.03	26.76	40.00	-13.24	Peak	400	360	P
3	78.50	-14.23	36.34	22.11	40.00	-17.89	Peak	400	360	P
4	154.16	-9.46	37.26	27.80	43.50	-15.70	Peak	400	360	P
5	189.08	-11.51	38.95	27.44	43.50	-16.06	Peak	400	360	P
6	256.98	-9.89	35.22	25.33	46.00	-20.67	Peak	400	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : SRD 1TX 2441 2Mbps
Voltage : From Adapter (240V/60Hz)
Pol : Horizontal

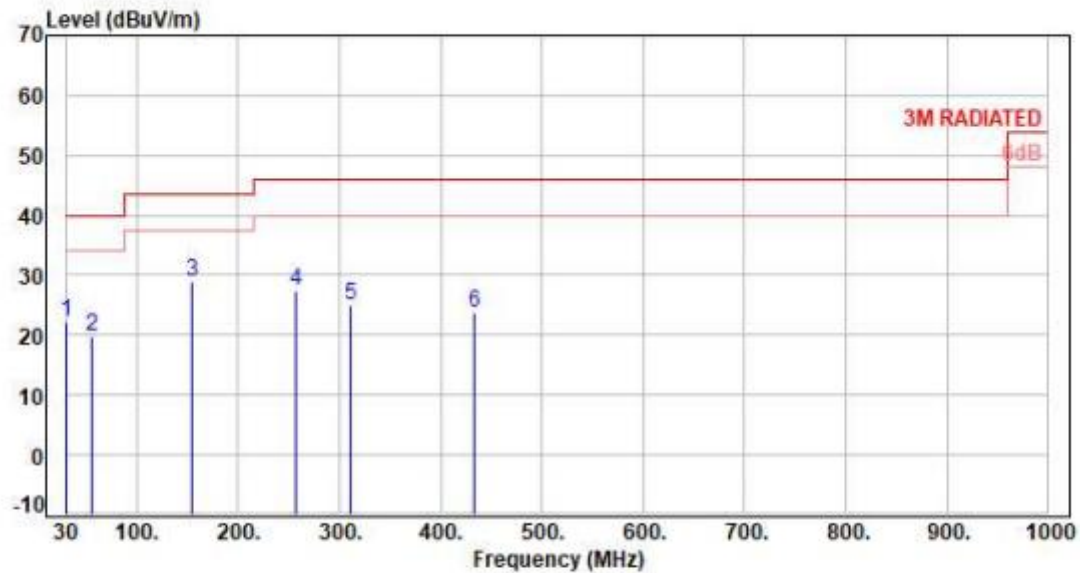

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-10.01	32.24	22.23	40.00	-17.77	Peak	400	360	P
2	55.22	-9.22	29.01	19.79	40.00	-20.21	Peak	400	360	P
3	154.16	-9.46	38.52	29.06	43.50	-14.44	Peak	400	360	P
4	256.98	-9.89	37.22	27.33	46.00	-18.67	Peak	400	360	P
5	311.30	-8.23	33.35	25.12	46.00	-20.88	Peak	400	360	P
6	433.52	-4.85	28.62	23.77	46.00	-22.23	Peak	400	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Test Mode : SRD 1TX 2403MHz 2Mbps
Voltage : From Adapter(120V/60Hz)
Pol : Vertical

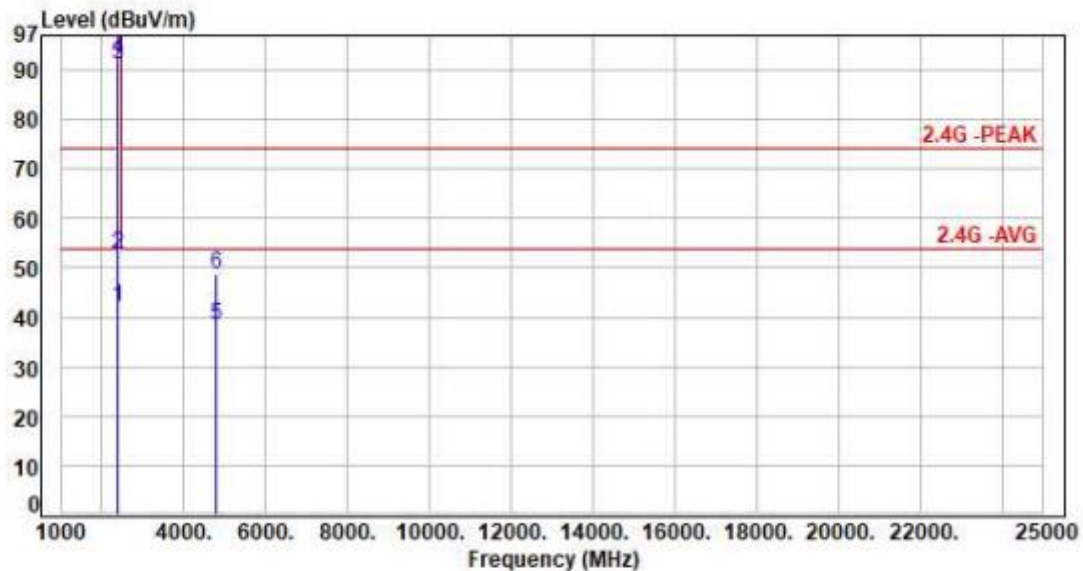

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	44.44	42.11	54.00	-11.89	Average	108	291	P
2	2390.00	-2.33	55.14	52.81	74.00	-21.19	Peak	108	291	P
3	2403.00	-2.32	93.55	91.23	200.00	-108.77	Average	108	291	P
4	2403.00	-2.32	94.52	92.20	200.00	-107.80	Peak	108	291	P
5	4806.00	6.01	32.53	38.54	54.00	-15.46	Average	100	118	P
6	4806.00	6.01	42.72	48.73	74.00	-25.27	Peak	100	118	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : SRD 1TX 2403MHz 2Mbps
Voltage : From Adapter(120V/60Hz)
Pol : Horizontal

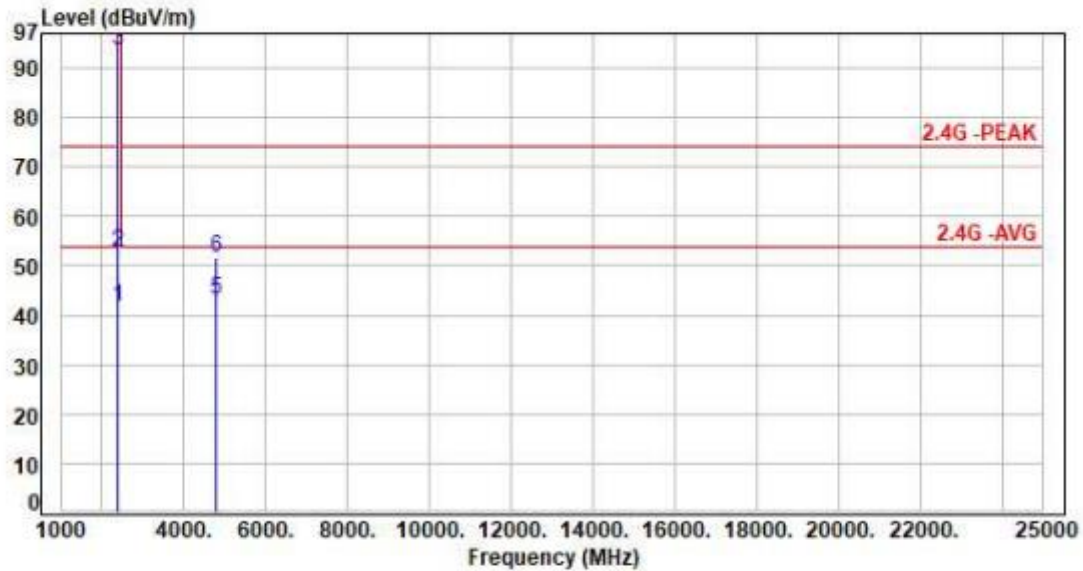

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	44.18	41.85	54.00	-12.15	Average	278	334	P
2	2390.00	-2.33	55.21	52.88	74.00	-21.12	Peak	278	334	P
3	2403.00	-2.32	96.14	93.82	200.00	-106.18	Average	278	334	P
4	2403.00	-2.32	97.32	95.00	200.00	-105.00	Peak	278	334	P
5	4806.00	6.01	37.20	43.21	54.00	-10.79	Average	100	360	P
6	4806.00	6.01	45.76	51.77	74.00	-22.23	Peak	100	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : SRD 1TX 2441MHz 2Mbps
Voltage : From Adapter(120V/60Hz)
Pol : Vertical

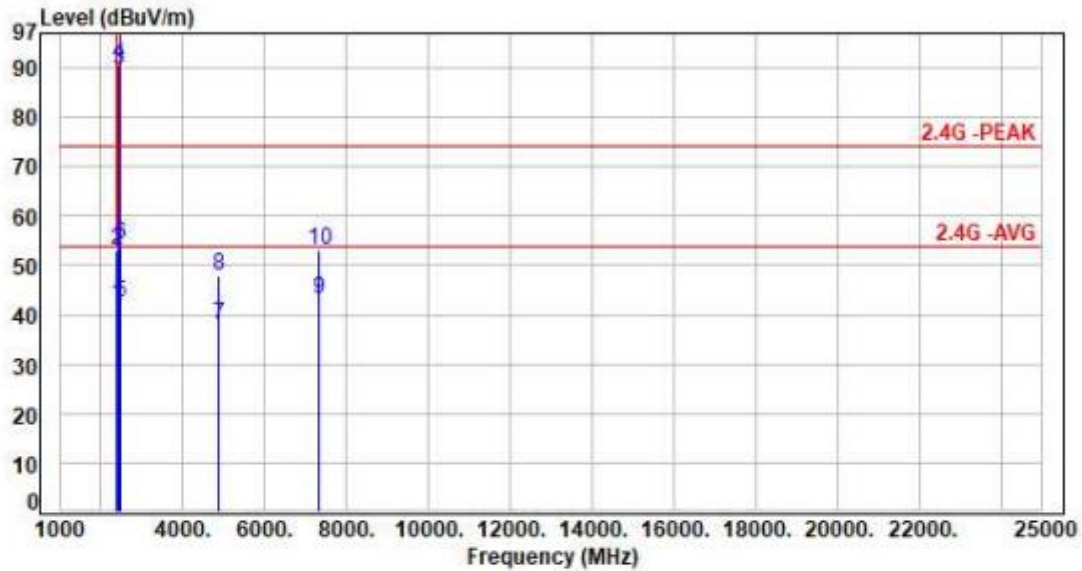

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	44.36	42.03	54.00	-11.97	Average	100	255	P
2	2390.00	-2.33	55.28	52.95	74.00	-21.05	Peak	100	255	P
3	2441.00	-2.16	91.75	89.59	200.00	-110.41	Average	100	255	P
4	2441.00	-2.16	92.93	90.77	200.00	-109.23	Peak	100	255	P
5	2483.50	-2.01	44.29	42.28	54.00	-11.72	Average	100	255	P
6	2483.50	-2.01	56.09	54.08	74.00	-19.92	Peak	100	255	P
7	4882.00	6.26	31.89	38.15	54.00	-15.85	Average	100	359	P
8	4882.00	6.26	41.83	48.09	74.00	-25.91	Peak	100	359	P
9	7323.00	11.36	31.65	43.01	54.00	-10.99	Average	100	154	P
10	7323.00	11.36	41.90	53.26	74.00	-20.74	Peak	100	154	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : SRD 1TX 2441MHz 2Mbps
Voltage : From Adapter(120V/60Hz)
Pol : Horizontal

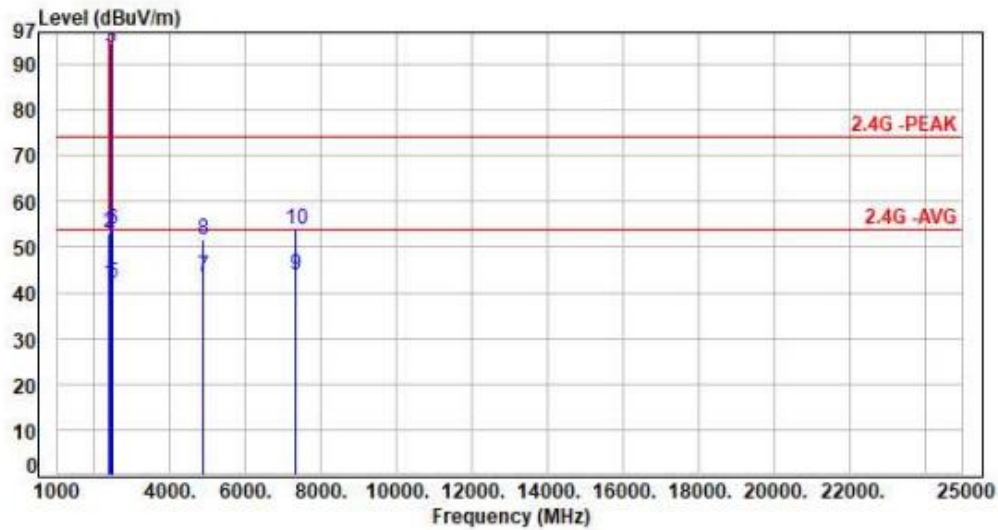

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	44.26	41.93	54.00	-12.07	Average	271	342	P
2	2390.00	-2.33	55.36	53.03	74.00	-20.97	Peak	271	342	P
3	2441.00	-2.16	95.76	93.60	200.00	-106.40	Average	271	342	P
4	2441.00	-2.16	96.88	94.72	200.00	-105.28	Peak	271	342	P
5	2483.50	-2.01	44.20	42.19	54.00	-11.81	Average	271	342	P
6	2483.50	-2.01	55.88	53.87	74.00	-20.13	Peak	271	342	P
7	4882.00	6.26	37.16	43.42	54.00	-10.58	Average	100	360	P
8	4882.00	6.26	45.32	51.58	74.00	-22.42	Peak	100	360	P
9	7323.00	11.36	32.43	43.79	54.00	-10.21	Average	100	115	P
10	7323.00	11.36	42.36	53.72	74.00	-20.28	Peak	100	115	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : SRD 1TX 2480MHz 2Mbps
Voltage : From Adapter(120V/60Hz)
Pol : Vertical

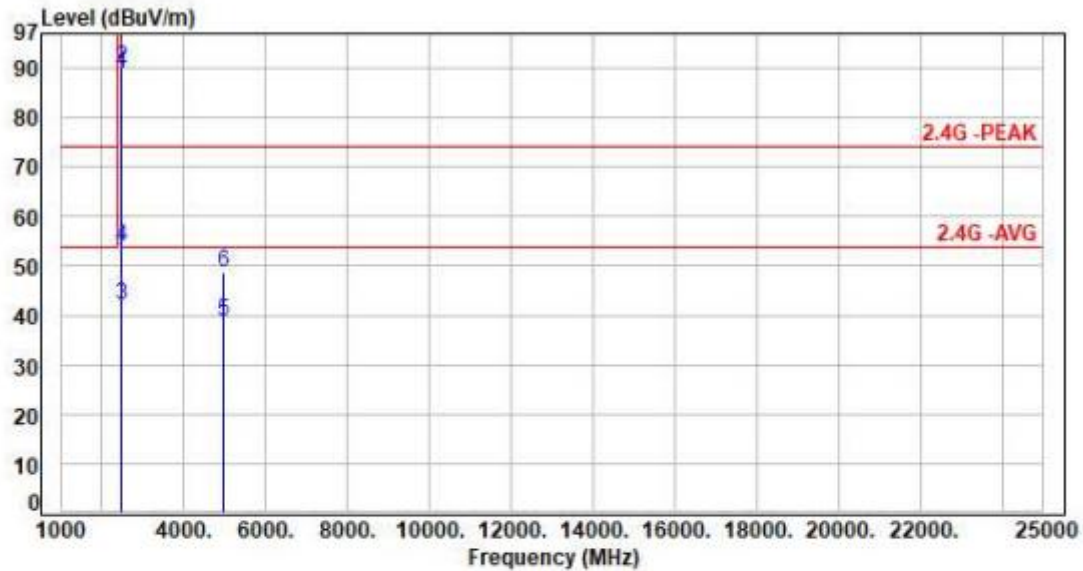

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-2.01	90.76	88.75	200.00	-111.25	Average	100	284	P
2	2480.00	-2.01	92.02	90.01	200.00	-109.99	Peak	100	284	P
3	2483.50	-2.01	44.18	42.17	54.00	-11.83	Average	100	284	P
4	2483.50	-2.01	55.75	53.74	74.00	-20.26	Peak	100	284	P
5	4960.00	6.51	32.20	38.71	54.00	-15.29	Average	100	124	P
6	4960.00	6.51	42.07	48.58	74.00	-25.42	Peak	100	124	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : SRD 1TX 2480MHz 2Mbps
Voltage : From Adapter(120V/60Hz)
Pol : Horizontal

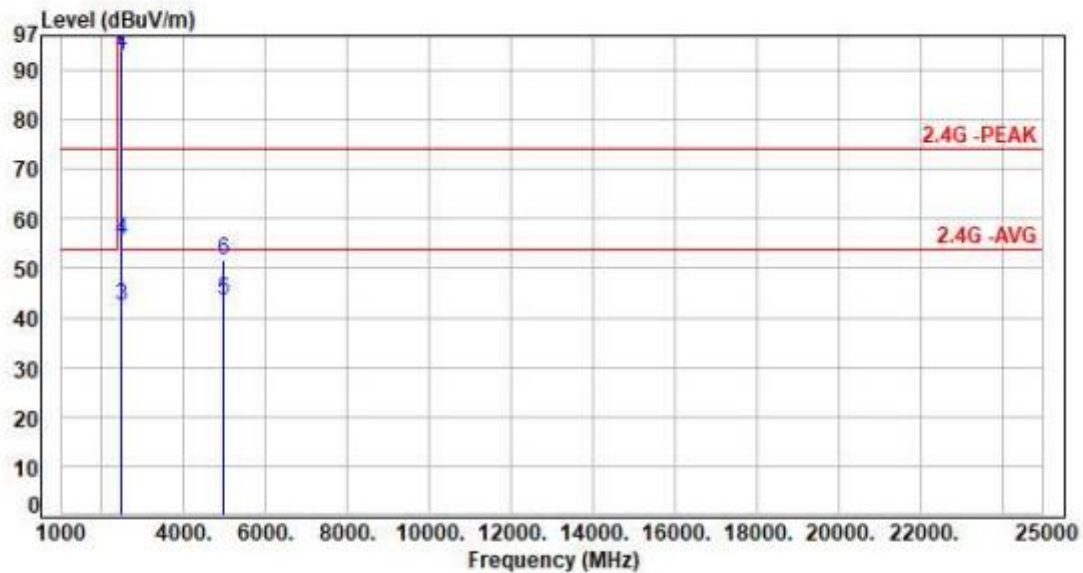

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-2.01	94.84	92.83	200.00	-107.17	Average	261	343	P
2	2480.00	-2.01	96.05	94.04	200.00	-105.96	Peak	261	343	P
3	2483.50	-2.01	44.32	42.31	54.00	-11.69	Average	261	343	P
4	2483.50	-2.01	57.67	55.66	74.00	-18.34	Peak	261	343	P
5	4960.00	6.51	36.84	43.35	54.00	-10.65	Average	100	360	P
6	4960.00	6.51	45.14	51.65	74.00	-22.35	Peak	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Conducted Spurious Emission

7.1 Test Limit

According to the methods defined in ANSI C63.10-2013 Section 11.11.1


Below –30dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.11.2 & 11.11.3







- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 30dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout






7.4 Test Result and Data

Note: Test plots refers to the following pages.

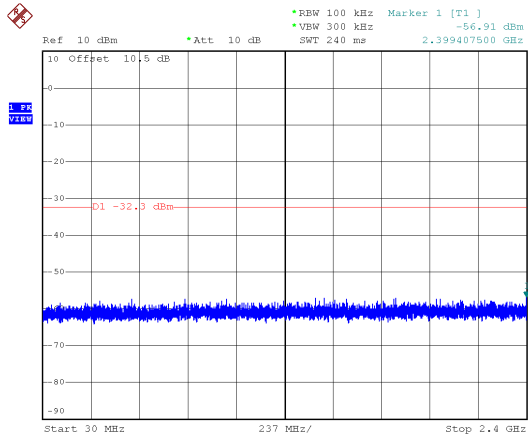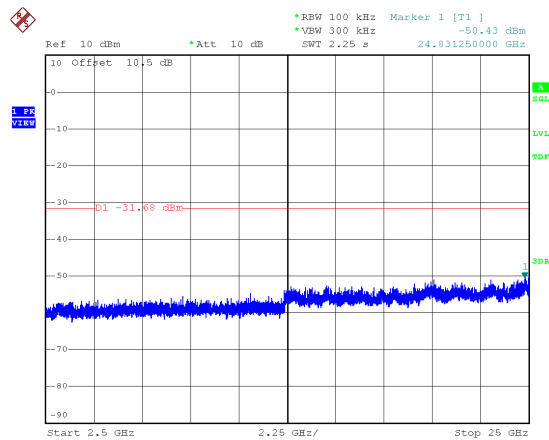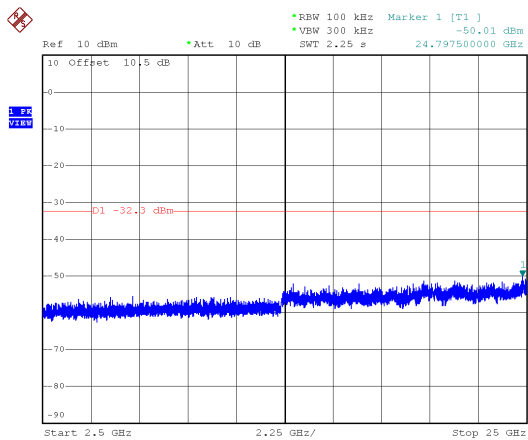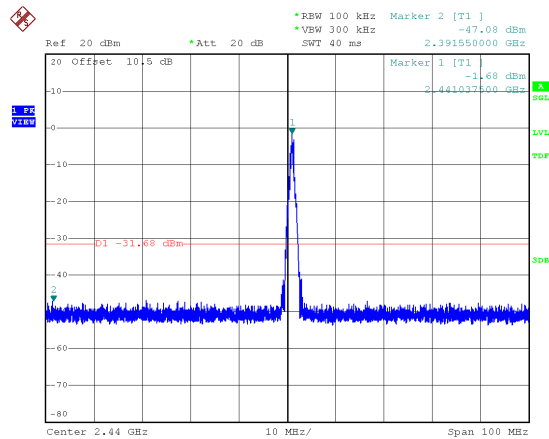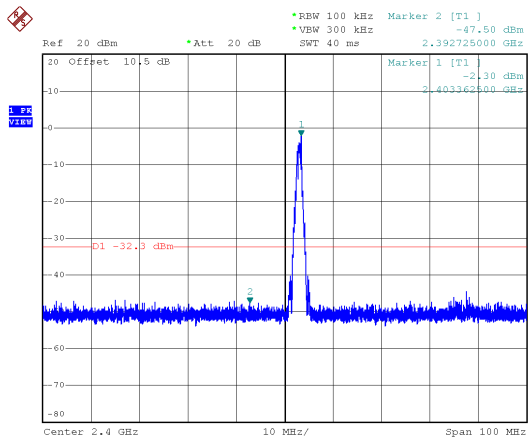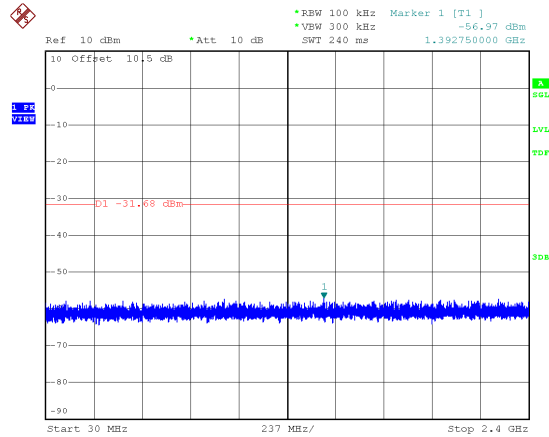Modulation Type: GFSK(2Mbps)
CH01Modulation Type: GFSK(2Mbps)
CH39



Modulation Type: GFSK(2Mbps)
CH78

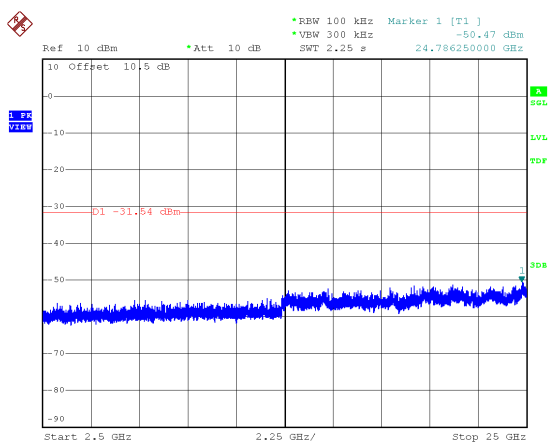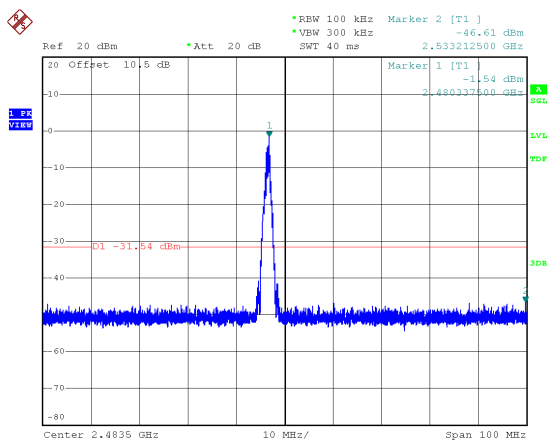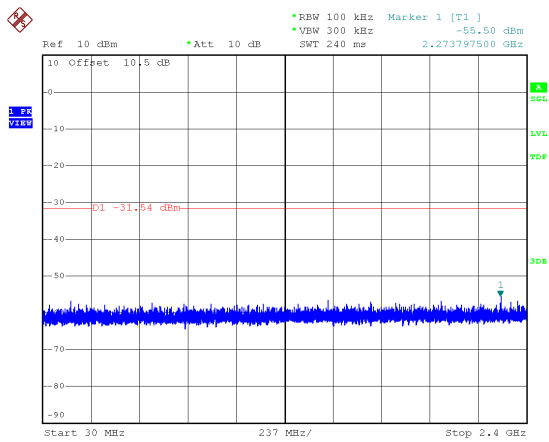



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.6
Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout




8.4 Test Result and Data

Modulation Type	On Time (msec)	Period Time (msec)	Duty Cycle (%)
GFSK(2Mbps)	0.28	0.31	90.28%



Modulation Type: GFSK(2Mbps)

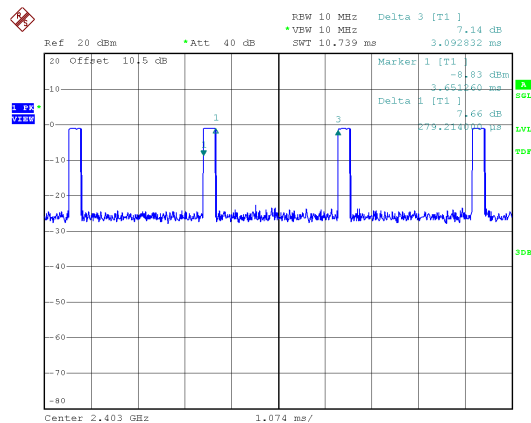



9. 6dB Bandwidth Measurement Data

9.1 Test Limit


The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.8

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout




**9.4 Test Result and Data**

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK(2Mbps)	1	2403	753.00	500
	39	2441	756.00	500
	78	2480	756.00	500




6dB Bandwidth
Modulation Type: GFSK(2Mbps)
CH01

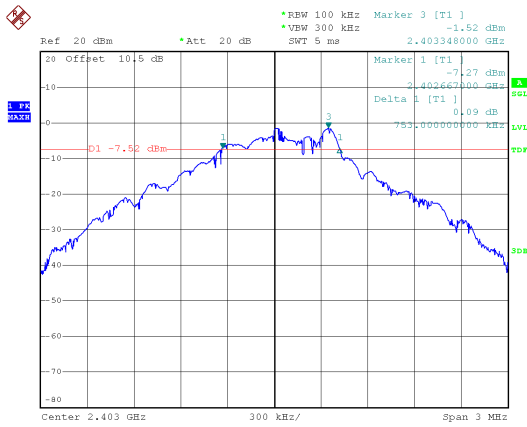

CH39



CH78

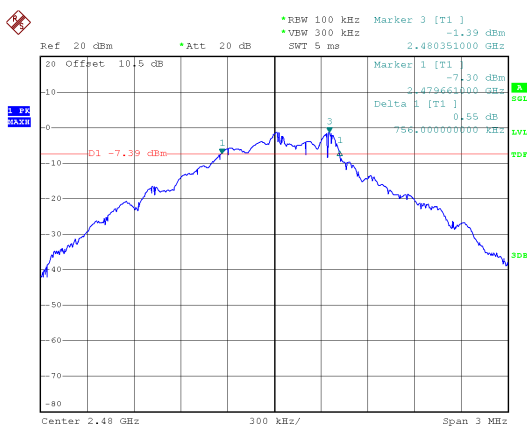



10. Maximum Average Output Power

10.1 Test Limit

The Maximum Average Output Power Measurement is 30dBm.


If transmitting antennas of directional gain greater than 6 dBi are used, the average output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

10.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.9.2.3.2

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout



**10.4 Test Result and Data**

Conducted Setting	Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)	Power Output (mW)
				Average	Average
Default	GFSK	1	2403	-1.48	0.711
Default		39	2441	-1.26	0.748
Default		78	2480	-1.28	0.745



11. Power Spectral Density

11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

11.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.10

11.3 Test Setup Layout




11.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 10KHz Bandwidth(dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit
GFSK(2Mbps)	1	2403	-22.42	0.44	-21.98	8.00
	39	2440	-22.19	0.44	-21.75	8.00
	78	2480	-22.14	0.44	-21.70	8.00



Modulation Type: GFSK(2Mbps)
CH01

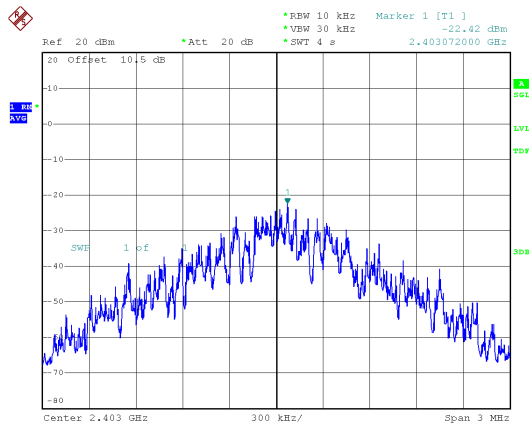

CH39

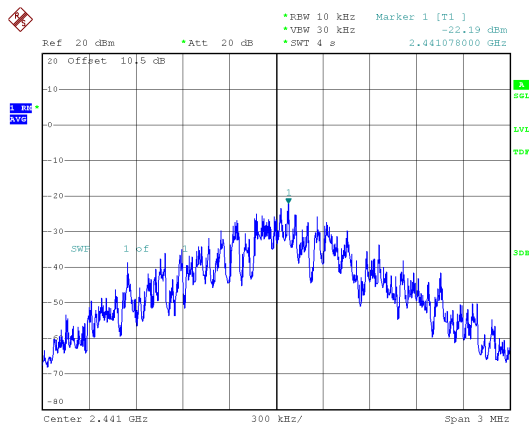

CH78

