Application for Certification For an RF amplifier

Janizary Holdings Inc. 5330 Derry Ave, Suite F Agoura Hills, CA 91301

RF amplifier

FCC ID: RFK-LMSWDJHNEX

REPORT # RV58031A-001

This report was prepared in accordance with the requirements of the FCC Rules and Regulations Part 2, Subpart J, 2.1031 through 2.1057, and FCC Parts 24, 90 and in accordance with Industry Canada Radio Standards Specification RSS-131 for Zone Enhancers and any other applicable sections of the rules or regulations as indicated herein.

Prepared By:

DNB Engineering, Inc. 5969 Robinson Avenue Riverside, Ca 92503-8620

Industry Canada Lab Code: IC 4738

23 Sep 2004

FCC ID: RFK-LMSWDJHNEX

TEST LAB PERSONNEL

Test Performed by:	Date	Signature
Thomas Elders	23 Sep 2004	Thomas Elders

APPROVALS

Management Approval	Date	Signature
Les Payne	23 Sep 2004	
Sr. Engineering Manager		Coffame If
		Will agne let

Original report RV58031A-000 Dated 23 Sep 2004 Inclusion of IC RV58031A-001 Dated 23 Sep 2004

TABLE OF CONTENTS Title

Section Sheet #

		Test Lab Personnel and Approvals	2
		Table of Contents	3
		Table of Figures	4
1.0		ADMINISTRATIVE DATA	5
1.1		Certifications and Qualifications	5
1.2		Measurements and Repeatability Information	5
1.3		Test Methodology	6
1.4		Test Equipment	6
1.5		Deviations	6
1.6		Test Description	7
Note:			
Paragrap	h numbers in this report follow	w the application section numbers found in the FEDERAL COMMUNICATION	NS COMMISSION Rules
and Regi	ulations, Part 2, Subpart J for C	ertification of electronic equipment.	
2.1033 (C) (1)	Application for Certification	8
2.1033 (C) (2)	FCC Identifier	9
2.1033 (C) (4)	Type of Emissions	9
2.1033 (C) (5)	Frequency Range	9
2.1033 (C) (6)	Operating Power	9
2.1033 (C) (7)	Maximum Power Allowed in Applicable part(s) of the Rules	9
2.1033 (C) (8)	Final RF amplifier Input Power Characteristics	9
2.1033 (C) (9)	Tune Up Procedure	9
2.1033 (C) (10)	Schematic Diagram and Circuit Description	10
2.1033 (C) (11)	Equipment Identification Plate	10
2.1033 (C) (12)	Equipment Photographs (Internal)	10
2.1033 (C) (12)	Equipment Photographs (External)	10
2.1033 (C) (13)	Digital Modulation Techniques	10
2.1033 (C) (14)	Test Data	10
		Test Set-Up	11-12
2.1046	(RSS-131 cl4.3)	Measurement of RF Power Output	13-17
2.1049	(RSS-131 cl4.4)	Measurement of Occupied Bandwidth	18-75
2.1051	(RSS-131 cl4.5)	Spurious Emissions at Antenna Terminals	76-80
2.1053		Measurement of Field Strength of Spurious Radiation	81-83
2.1055	(RSS-131 cl 4.5)	Measurement of Frequency Stability	84
2.1057		Frequency Spectrum to be Investigated	85
		RF Exposure	86-88
		Appendix A Photographs	89-91

TABLE OF FIGURES

FCC ID: RFK-LMSWDJHNEX

Figure 1 : Test Equipment	6
Figure 2 : Test Result Summary	10
Figure 3 : Test Set Up Block Diagram	12
Figure 4 : Block Diagram Radiated Emissions	12
Figure 5 : Output Power Plots	14
Figure 6 : Occupied Bandwidth / Modulation Characteristic Plots	16
Figure 7: Antenna Conducted Spurious Plots	77
Figure 8: Radiated Spurious Tabular Data	82
Appendix A : Photos	91

1.0 ADMINISTRATIVE DATA

1.1 Certifications and Qualifications

I certify that DNB Engineering, Inc conducted the tests performed in order to obtain the technical data presented in this application. Also, based on the results of the enclosed data, I have concluded that the equipment tested meets or exceeds the requirements of the Rules and Regulations governing this application.

1.2 Measurement Repeatability Information

The test data presented in this report has been acquired using the guidelines set forth in FCC Part 2.1031 through 2.1057, and Parts 24,and 90. Also included in this report is compliancy data for Industry Canada RS-131 for Zone Enhancers. The test results presented in this document are valid only for the equipment identified herein under the test conditions described. Repeatability of these test results will only be achieved with identical measurement conditions. These conditions include: The same test distance, EUT Height, Measurement Site Characteristics, and the same EUT System Components. The system must have the same Interconnecting Cables arranged in identical placement to that in the test set-up, with the system and/or EUT functioning in the identical mode of operation (i.e. software and so on) as on the date of the test. Any deviation from the test conditions and the environment on the date of the test may result in measurement repeatability difficulties.

All changes made to the EUT during the course of testing as identified in this test report must be incorporated into the EUT or identical models to ensure compliance with both FCC and Industry Canada regulations.

C. L. Payne III (Para. 1.1)

Sr Engineering Manager

DNB Engineering, Inc. Tel. (951) 637-2630

Fax (951) 637-2704

Coffayne Dy

E-mail Les@dnbenginc.com

1.3 Test Methodology

The tests were performed in accordance with both FCC Part 2 Subpart J, 2.1031 through 2.1057, 24, 90 and Industry Canada RSS-131 on a sample of the production model.

1.4 Test Equipment

FIGURE 1: TEST EQUIPMENT

Description	Manufacturer	M/N	S/N	Cal Date	Test Used On
Signal Generator	Rhode & Schwarz	SMU200A	N/A	09/10/05	RF Power Out put, Emissions Lim, Cond Spur, Rad Spur, CE
Signal Generator	Marconi	2024	112231/034	02/02/05	RF Power Out put, Emissions Lim, Cond Spur, Rad Spur, CE
Spectrum Analyzer Display	H/P	85662A	259101-1	01/10/05	RF Power Out put, Emissions Lim, Cond Spur, Rad Spur, CE
Spectrum Analyzer	H/P	8566B	259101-2	01/10/05	RF Power Out put, Emissions Lim, Cond Spur, Rad Spur, CE
Spec Analyzer Display	H/P	85662A	2318A05282	8/14/05	RE
Spectrum Analyzer	H/P	85680B	2049A01403	6/2/05	RE
Quasi-Peak Adapter	H/P	85650A	2043A00184	6/2/05	RE
Bicon Antenna	H/P	85650A	2043A00184	6/2/05	RE
Logarithmic Antenna	AH Systems	SAS-200/540	524	12/26/04	RE
DRG Antenna	EMCO	3146	1284	1/2/05	RE
S/A	Rhode & Schwarz	FSU 46	N/A	09/10/05	RF Power Out put, Emissions Lim, Cond Spur, Rad Spur, CE

1. 5 DEVIATIONS

Deviations/Modifications to the EUT

None.

Deviations/Modifications from test standard.

None

1.6 TEST DESCRIPTION

1.6.1 RF Power Output

For RF amplifier.

1.6.2 Emissions Limitation and Occupied Bandwidth

Occupied Bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are equal to 0.5 percent of the total mean power radiated by a given emission (also known as the 99% bandwidth).

1.6.3 Conducted Spurious Emissions at Antenna Terminals

Conducted Spurious Emissions are emissions at the antenna terminals on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communication desired. The reduction in the level of these spurious emissions will not affect the quality of the information being transmitted.

1.6.4 Radiated Field Strength of Spurious Emissions

Emissions from the equipment when connected into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communication desired. The reduction in the level of these spurious emissions will not affect the quality of the information being transmitted.

2.1033 (C) (1) Application for Certification

Name of Applicant: Janizary Holdings Inc.

5330 Derry Ave, Suite F Agoura Hills, CA 91301

FRN: 0009486226

Applicant is: X Manufacturer

Vendor Licensee

Prospective Licensee

Other

Name of Manufacturer Janizary Holdings Inc.

Description: RF amplifier

Part Number: LMSWDJHNEX

Anticipated Production Quantity: Multiple Units

Applicable FCC Parts: 24 and 90

Applicable IC Standard: RSS-131

FCC ID No: Customer to provide

FCC Emissions Designator: 24E F3E

24E GXW 24E DXW

24E AMP

Frequency Range: Uplink 806-825 MHz

 Uplink
 1850-1910
 MHz

 Downlink
 850-869
 MHz

 Downlink
 1930-1990
 MHz

Rated Output Power: Uplink 806-825 140mW

Uplink 1850-1910 250mW Downlink 850-869 1mW Downlink 1930-1990 1mW

2.1033 (C) (2)	FCC Identif	fier			
	FCC ID:	RFK-LMSWI	DJHNEX		
2.1033 (C) (4)	Type of Em	ission			
		24E 24E 24E 24E 24E	F3E GXW DXW AMP		
2.1033 (C) (5)	Frequency	Range			
Uplink Uplink	806.0 - 825.0 1850.0 - 1910		Downlink Downlink	850.0 – 869.0 1930.0 – 1990	
2.1033 (C) (6)	Operating	Power			
	Uplink Downlink Uplink Downlink	806.0 - 825.0 850.0 - 869.0 1850.0 - 1910 1930.0 - 1990	MHz).0 MHz	0.140W 0.001W 0.250W 0.001W	(+21.5dBm) (+ 0.0dBm) (+24.0dBm) (+ 0.0dBm)
2.1033 (C) (7)	Maximum I	Power Allow	ed in Applica	able Part(s)	of the Rules
	RULES PAR	<u>T</u>	MAXIMUM	POWER (WAT	<u>TS</u>)
	Part 24 Part 90		2 5		
2.1033 (C) (8)	Input Powe	er Character	istics	10 - 60 mW M	Iaximum
2.1033 (C) (9)	Tune Up Pr	ocedure		Customer will	provide.

FCC ID: RFK-LMSWDJHNEX

2.1033 (C) (10) Schematic Diagram and Circuit Description

Customer will provide.

2.1033 (C) (11) Equipment Identification Plate

Customer will provide.

2.1033 (C) (12) Equipment Photographs - Internal

Customer will provide.

2.1033 (C) (12) Equipment Photographs - External

Customer will provide.

2.1033 (C) (13) Digital Modulation Techniques


AMPS / CDMA / TDMA /GSM

2.1033 (c) (14) Test Data

See 2.1046-2.1053 and Radiated Emissions

FIGURE 2: TEST RESULT SUMMARY

NAME OF TEST	FCC PARA. NO.	Industry Canada No.	RESULTS
		(RSS-131)	
RF Power Output	2.1046	RSS-131 Cl 4.3	Complies
Emissions	2.1049	RSS-131 Cl 4.2	Complies
Limitations: TDMA			
Emissions	2.1049	RSS-131 Cl 4.2	Complies
Limitations: GSM			
Occupied Bandwidth:	2.1049	RSS-131 Cl 4.2	Complies
TDMA/GSM			
Conducted Spurious	2.1051	IC RSS-131 cl4.4	Complies
Emissions at Antenna			
Terminals			
Radiated Field	2.1053	RSS-131 cl4.4	Complies
Strength of Spurious			
Emissions			
Intermodulation		RSS-131 Cl 4.3	Complies
		RSS-131 Cl 4.4	

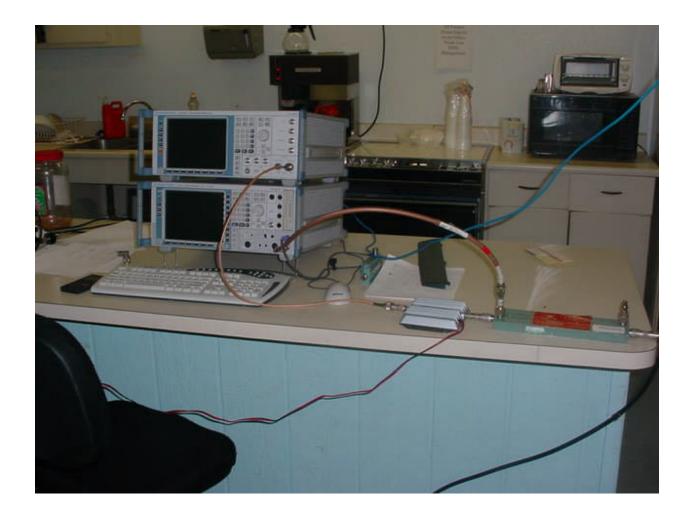

2.1033 (c) (14)

FIGURE 3: Test Set up Block Diagram for RF Power Output, Emissions Limitations GSM/TDMA, Occupied Bandwidth GSM/TDMA, Conducted Spurious Emissions at Antenna Terminals.


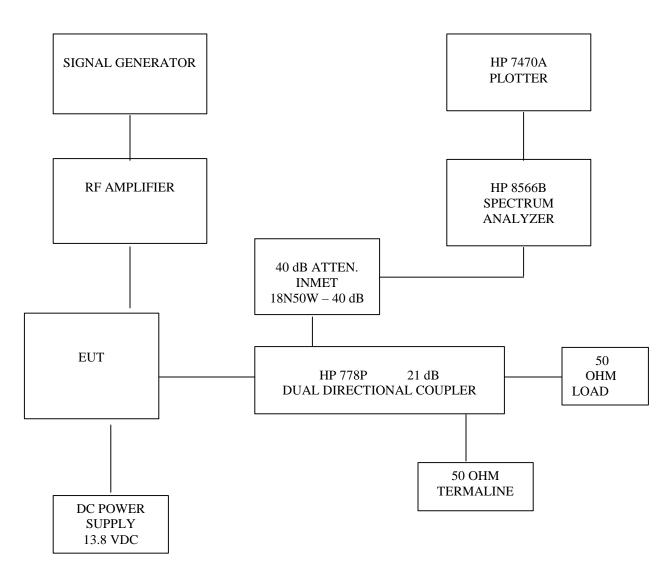


FIGURE 4: TEST SET UP BLOCK DIAGRAM FOR RADIATED EMISSIONS



Measurement of RF Power Output (IC RSS-131 CI 4.3)

<u>Definition:</u> For RF amplifier

<u>Test Method:</u> See FIGURE 1.

Output Power is measured across a precision 50 ohm load with a Spectrum Analyzer. For the power measurement, CW (no modulation) is used. CW signal provided maximum emissions signature for all modulation types.


Test Results:

POWER OUTPUT MEASURED AT NOMINAL VOLTAGE WAS:

Frequency in MHz	Power (dBm)	Power (W)
806-824	20.84	0.121
851-869	0.25	0.00106
1860-1910	24.16	0.261
1930-1980	0.22	0.00105

FIGURE 5: OUTPUT POWER PLOTS, UPLINK.


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Output Power	
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.3
	Uplink 815MHz		

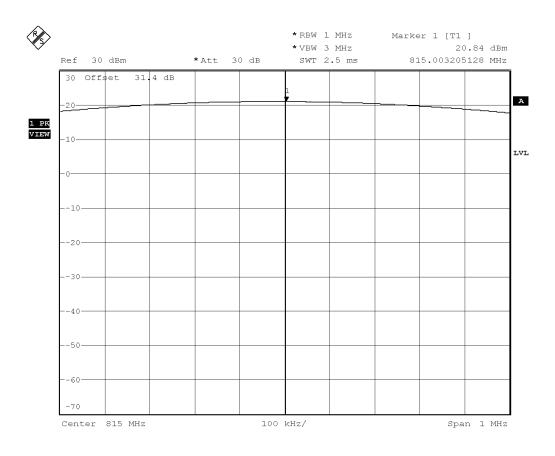

Date: 11.SEP.2004 10:57:23

FIGURE 5: OUTPUT POWER PLOTS, UPLINK.


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Output Power	
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.3
	Downlink 860MHz		

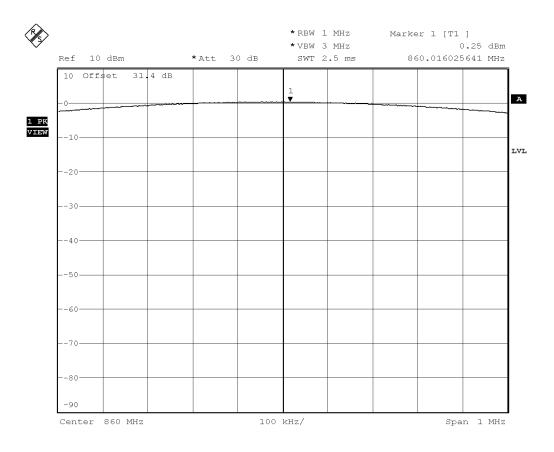

Date: 11.SEP.2004 11:04:49

FIGURE 5: OUTPUT POWER PLOTS, UPLINK.


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Output Power	
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.3
	Uplink 1885MHz		

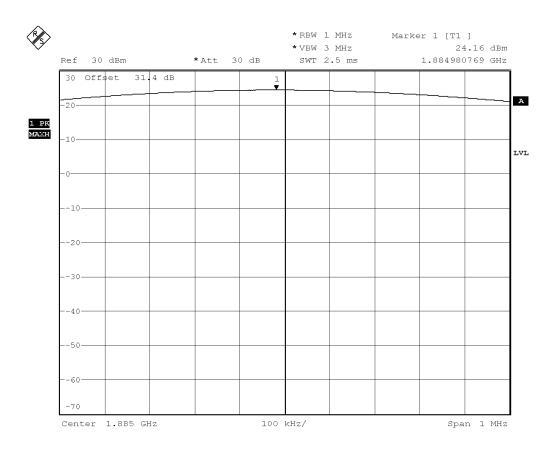

Date: 11.SEP.2004 11:10:30

FIGURE 5: OUTPUT POWER PLOTS, UPLINK.

ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Output Power	
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.3
	Downlink 1910MHz		

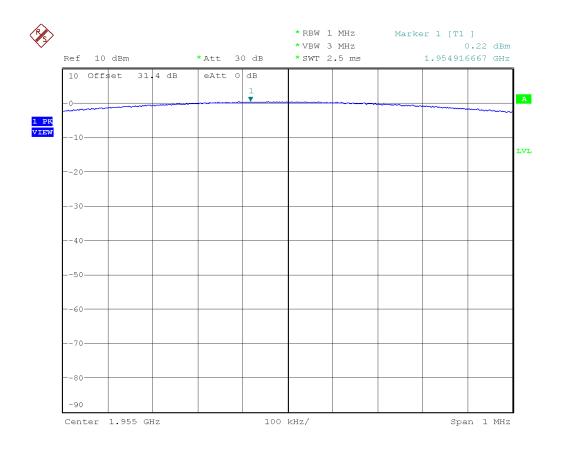

Date: 11.SEP.2004 11:39:04

2.1049 Measurement of Occupied Bandwidth (IC RSS-131 Clause 4.2)

Definition:

Occupied Bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are equal to 0.5 percent of the total mean power radiated by a given emission.

<u>Test Method:</u> Connect the Equipment per FIGURE 1. Measurements were made while the driving source generated the following:

> TDMA Signal GSM Signal CDMA Signal

<u>Test Results:</u> See Plots


The center frequency of the signal did not shift with modulation. The Spectrum Bandwidth was well within the limits specified in the FCC Regulations.

Inter-modulation test are required for the downlink only as this device is a single use channel device and is to be dedicated to one phone, therefore only one channel uplink can be active at any given time.

Modulation characteristic plots are shown in this section.

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC RSS-131 C14.2
	Signal Source - GSM – Input – 806N	ИНz	

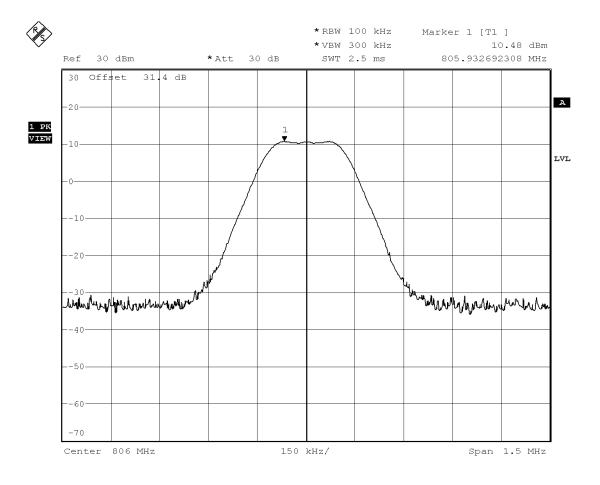

Date: 11.SEP.2004 10:40:01

FIGURE 6: OCCUPIED BANDWIDTH


<u>ONB</u>	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC RSS-131 Cl 4.2
	Signal Source - GSM – Output – 806	MHz	

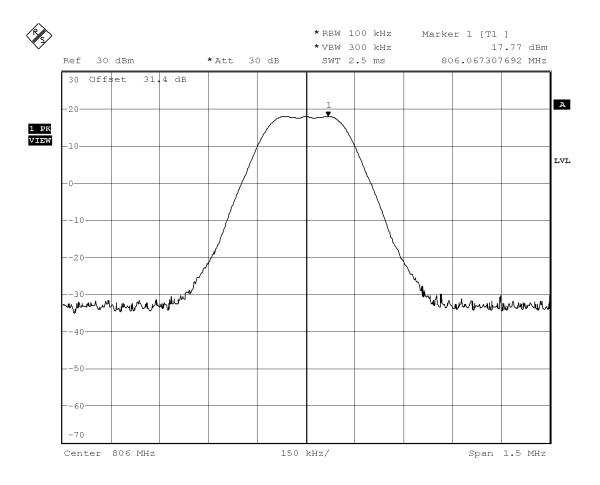

Date: 11.SEP.2004 10:29:10

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	ndwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC RSS-131 Cl 4.2
	Signal Source - GSM - Input - 815M	IHz	

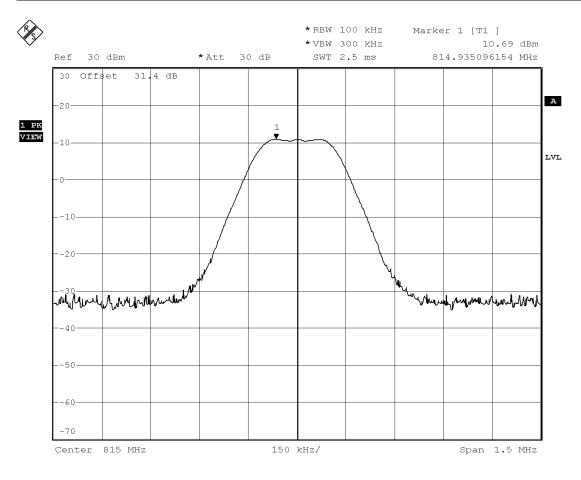

Date: 11.SEP.2004 10:38:29

FIGURE 6: OCCUPIED BANDWIDTH


<u>ONB</u>	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC RSS-131 CI 4.2
	Signal Source - GSM – Output – 815	5MHz	

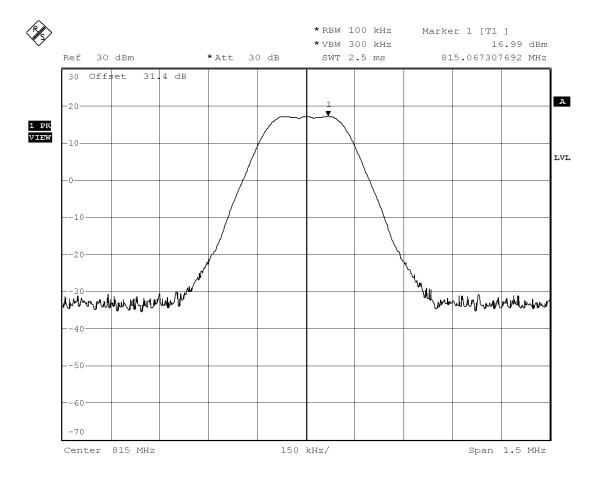

Date: 11.SEP.2004 10:31:01

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 - [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55-131 C1 4.2
	Signal Source - GSM – Input – 824M	ΙΗz	

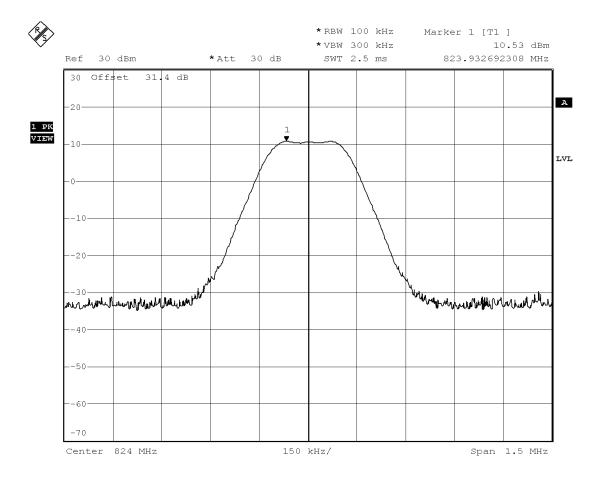

Date: 11.SEP.2004 10:34:57

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55-151 C14.2
	Signal Source - GSM – Output – 824	MHz	

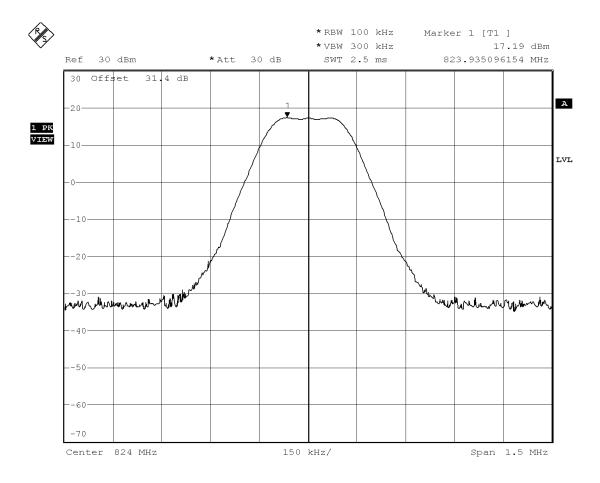

Date: 11.SEP.2004 10:32:22

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standards
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC RSS-131 C14.2
	Signal Source - GSM – Input – 1860	MHz	

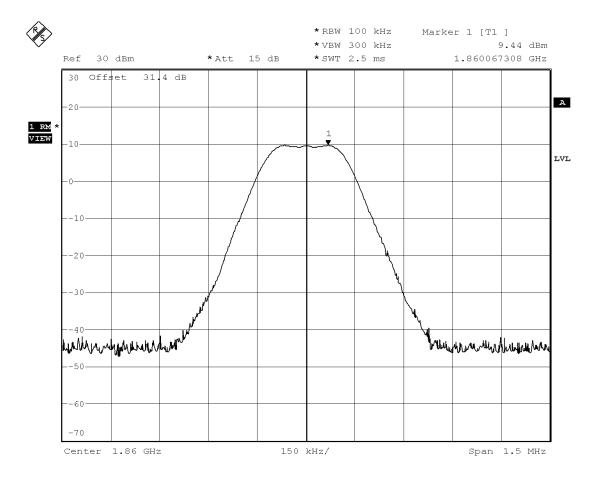

Date: 8.SEP.2004 17:40:08

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC RSS-131 CI 4.2
	Signal Source - GSM – Output – 186	0MHz	

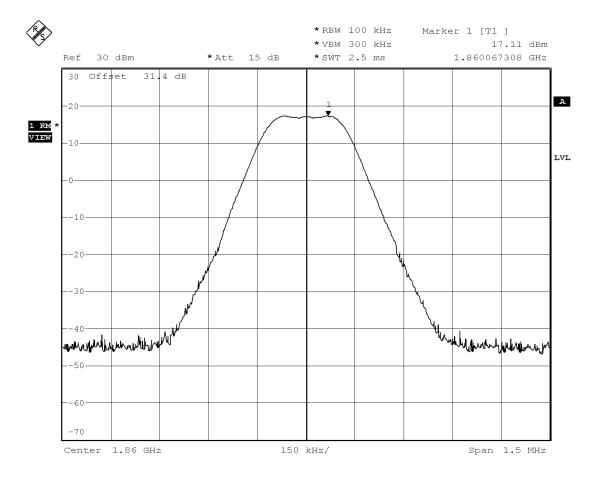

Date: 8.SEP.2004 17:22:30

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55-151 C14.2
	Signal Source - GSM – Input – 1885		

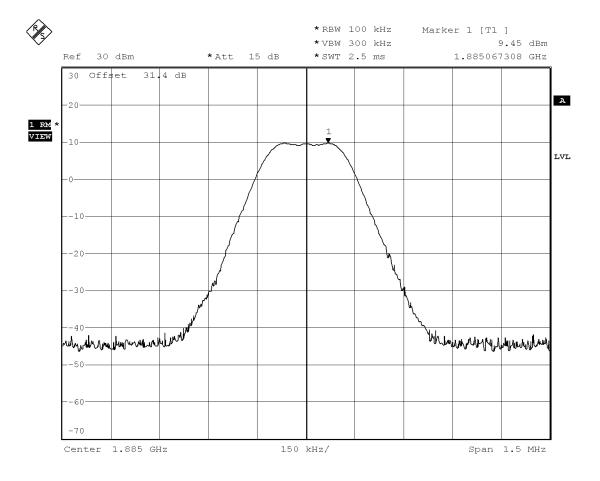

Date: 8.SEP.2004 17:39:10

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 - [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55-151 C14.2
	Signal Source - GSM – Output – 188	5MHz	

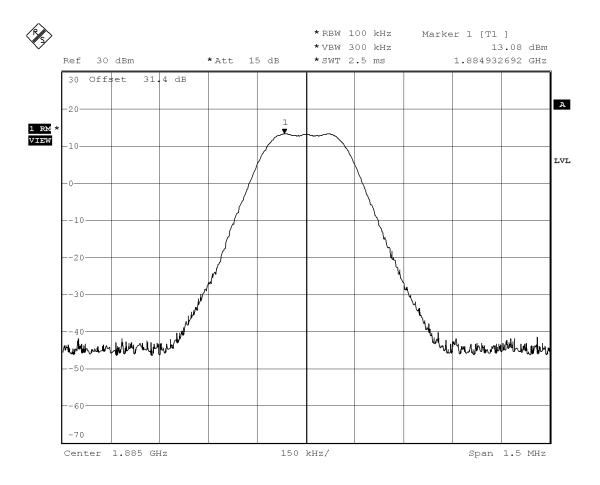

Date: 8.SEP.2004 17:24:02

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55-151 C14.2
	Signal Source - GSM – Input – 1910	MHz	

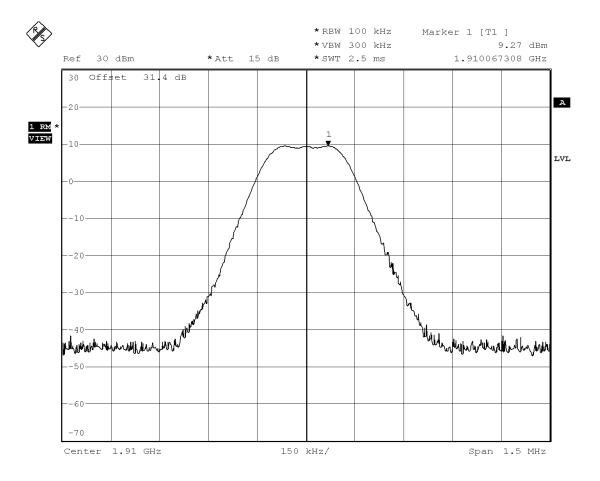

Date: 8.SEP.2004 17:37:50

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standards Standards
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55-131 C14.2
	Signal Source - GSM – Output – 191	0MHz	

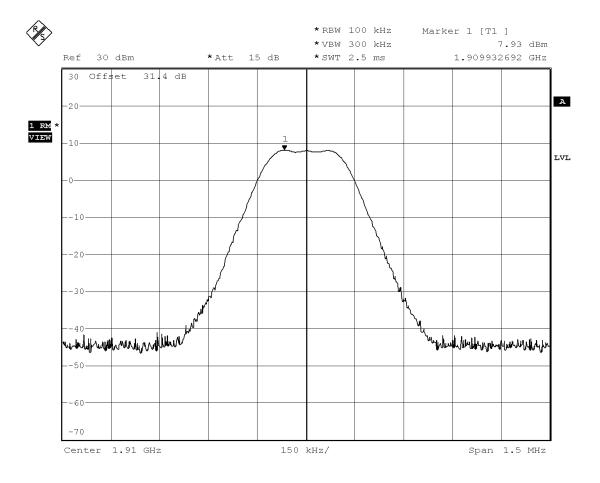

Date: 8.SEP.2004 17:25:05

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55-151 C1 4.2
	Signal Source - TDMA – Input – 806MHz		

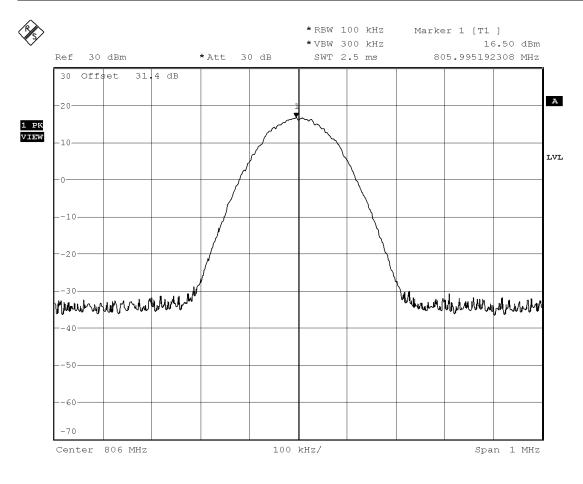

Date: 11.SEP.2004 10:03:39

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standards Standards
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 - [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55*131 C1 4.2
	Signal Source - TDMA – Output – 806MHz		

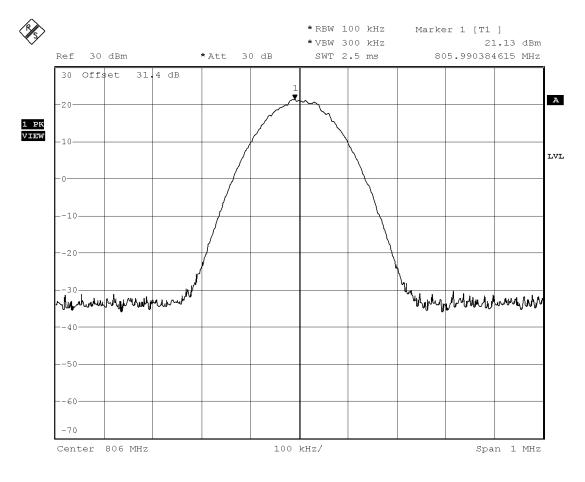

Date: 11.SEP.2004 10:17:36

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC RSS-131 C14.2
	Signal Source - TDMA – Input – 815MHz		

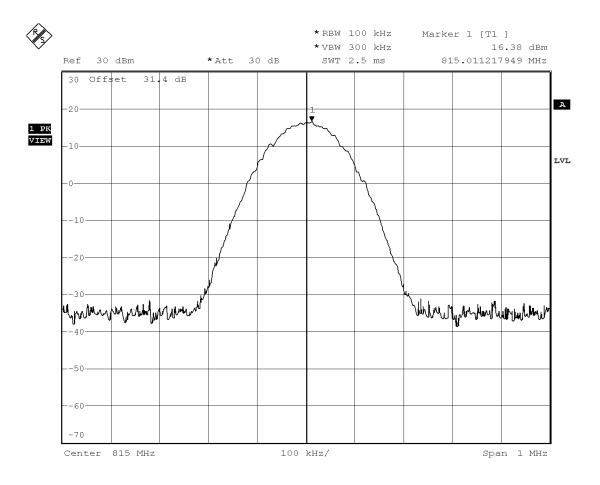

Date: 11.SEP.2004 10:05:37

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC R55-151 Cl 4.2
	Signal Source - TDMA – Output – 815MHz		

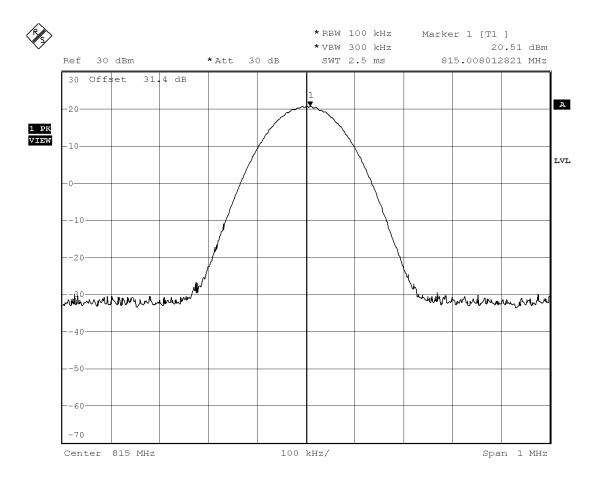

Date: 11.SEP.2004 10:14:15

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55-151 C1 4.2
	Signal Source - TDMA – Input – 824MHz		

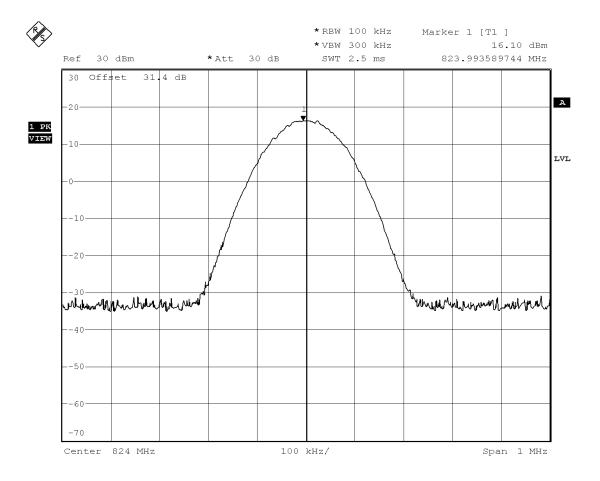

Date: 11.SEP.2004 10:12:23

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55-151 C14.2
	Signal Source - TDMA – Output – 824MHz		

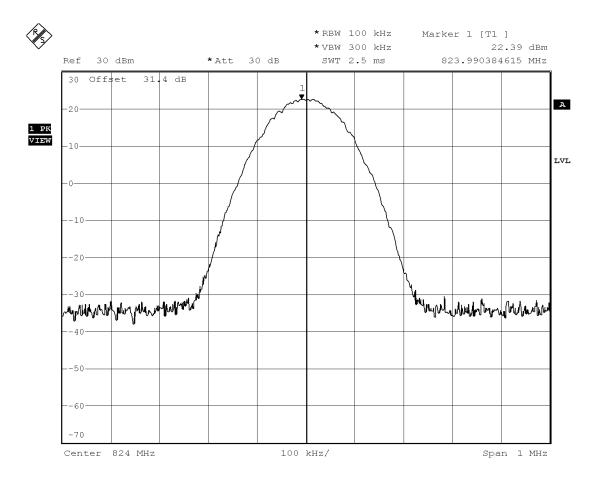

Date: 11.SEP.2004 10:11:05

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 - [X] IC RSS-131 Cl 4.2
	Uplink		[X] IC K55-131 C1 4.2
	Signal Source - TDMA – Input – 186	60MHz	

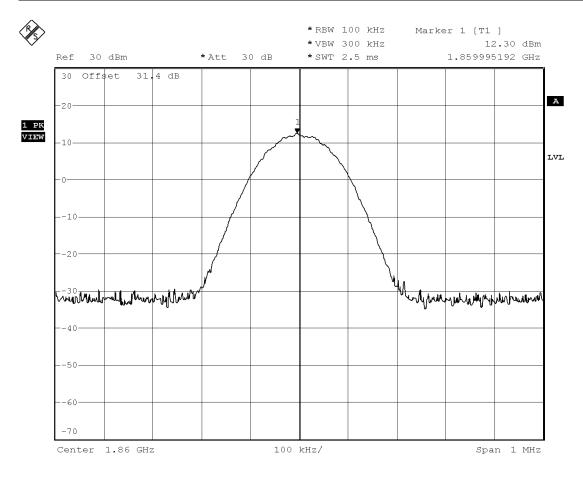

Date: 10.SEP.2004 10:55:21

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 - [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC NSS-131 CI 4.2
	Signal Source - TDMA – Output – 18	860MHz	

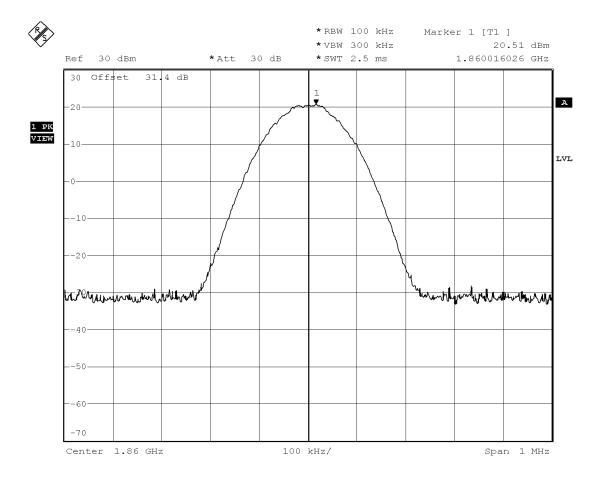

Date: 10.SEP.2004 12:14:57

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC RSS-131 C14.2
	Signal Source - TDMA – Input – 188	85MHz	

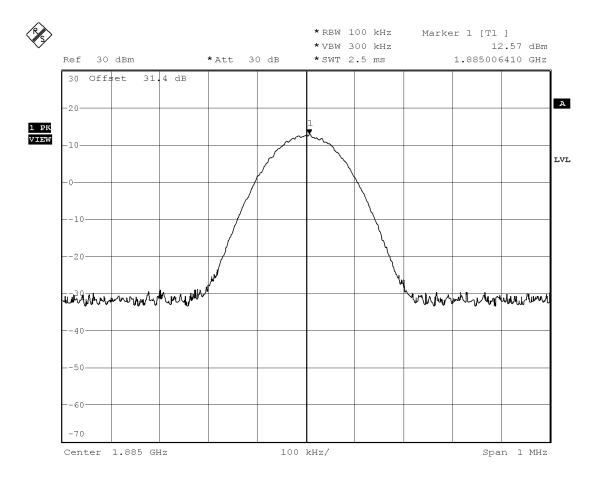

Date: 10.SEP.2004 10:54:18

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC RSS-131 C14.2
	Signal Source - TDMA – Output – 1	885MHz	

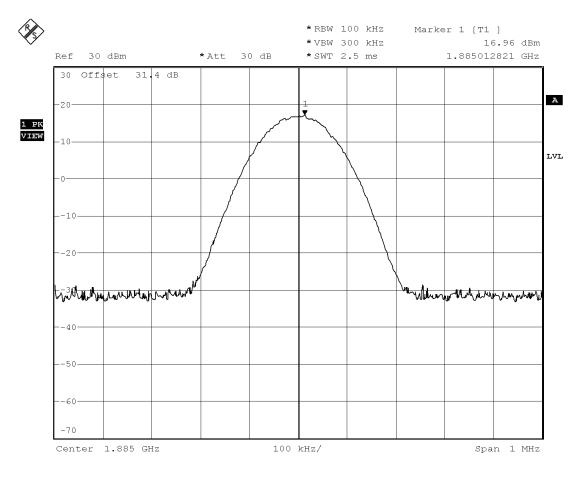

Date: 10.SEP.2004 12:10:24

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 - [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55-131 C1 4.2
	Signal Source - TDMA – Input – 191	0MHz	

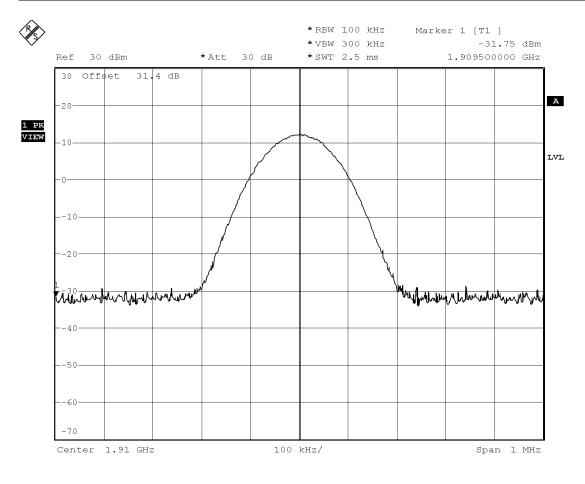

Date: 10.SEP.2004 10:58:08

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55-151 C14.2
	Signal Source - TDMA – Output – 1	910MHz	

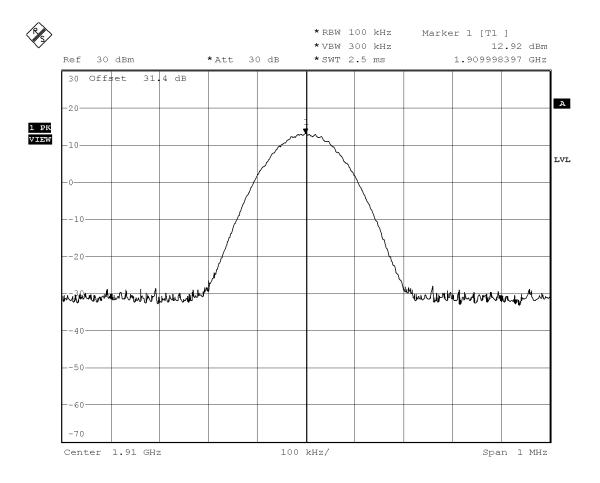

Date: 10.SEP.2004 12:12:25

FIGURE 6: OCCUPIED BANDWIDTH


<u>ONB</u>	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 - [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC RSS-131 CI 4.2
	Signal Source - CDMA – Input – 815	5MHz	

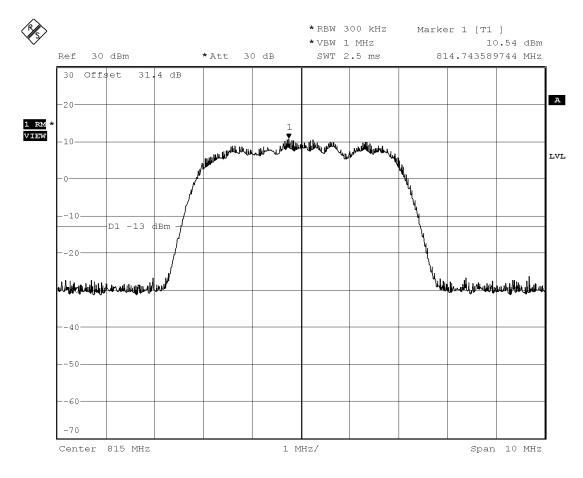

Date: 11.SEP.2004 09:43:30

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K35-131 C14.2
	Signal Source - CDMA – Output – 8	15MHz	

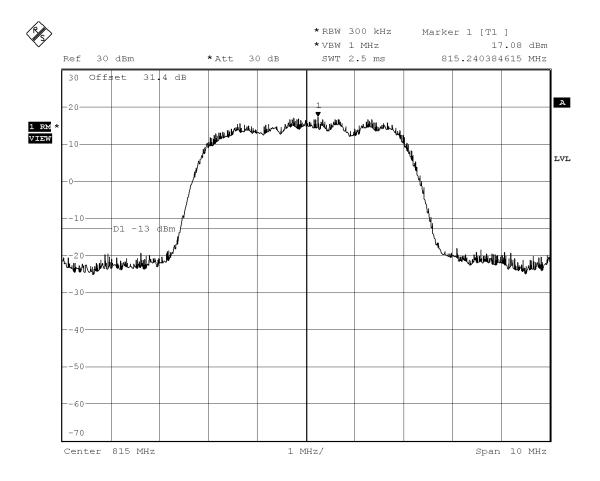

Date: 11.SEP.2004 09:40:23

FIGURE 6: OCCUPIED BANDWIDTH


<u>ONB</u>	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55-151 C14.2
	Signal Source - CDMA – Input – 188	85MHz	

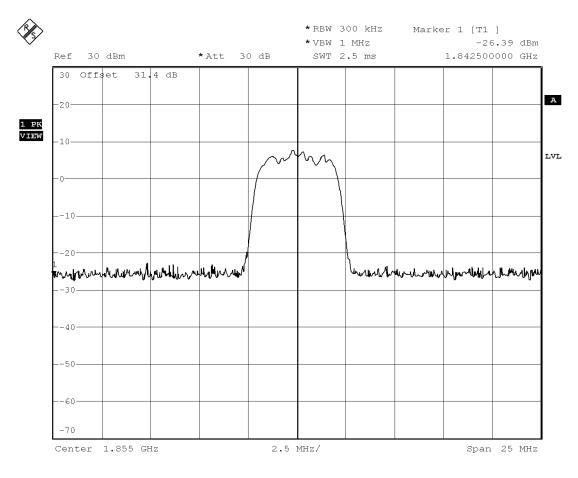

Date: 10.SEP.2004 13:26:43

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Uplink		[A] IC K55-131 C14.2
	Signal Source - CDMA – Output – 1	885MHz	

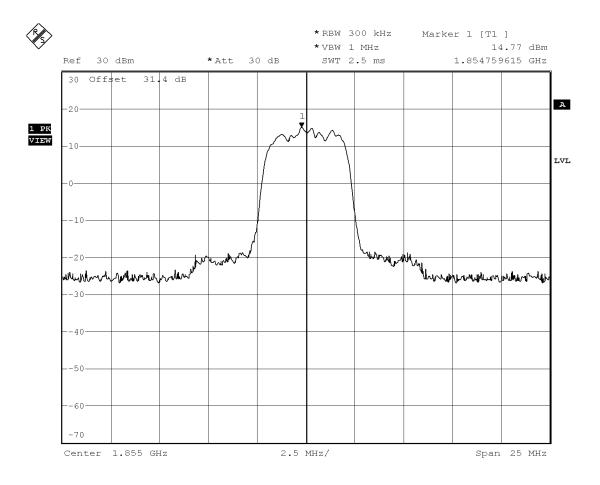

Date: 10.SEP.2004 13:34:10

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC RSS-131 CI 4.2
	Signal Source - GSM – Input – 851M	ſНz	

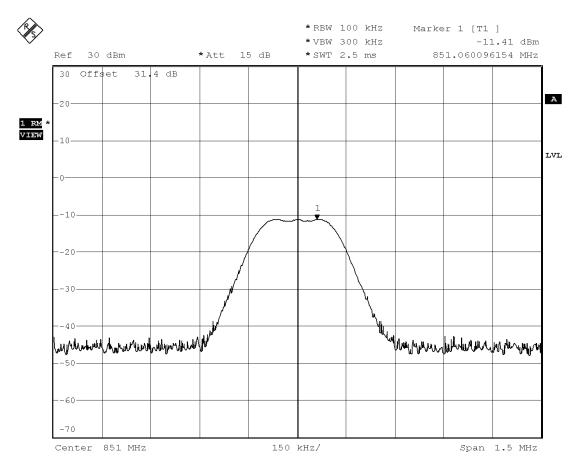

Date: 8.SEP.2004 17:46:41

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC RSS-131 Cl 4.2
	Signal Source - GSM – Output – 851	MHz	

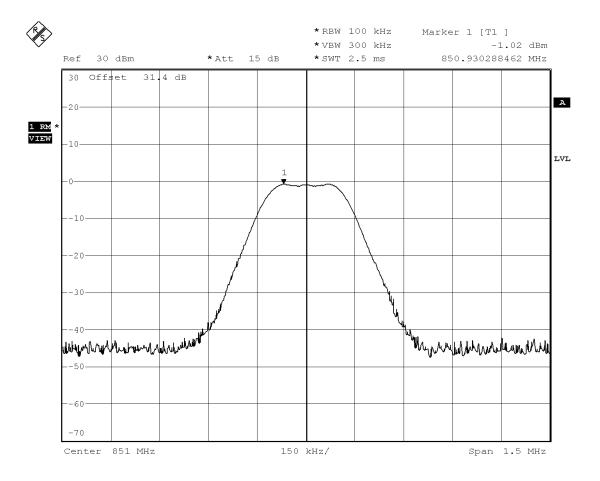

Date: 8.SEP.2004 17:09:53

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-151 C14.2
	Signal Source - GSM – Input – 860N	ИHz	

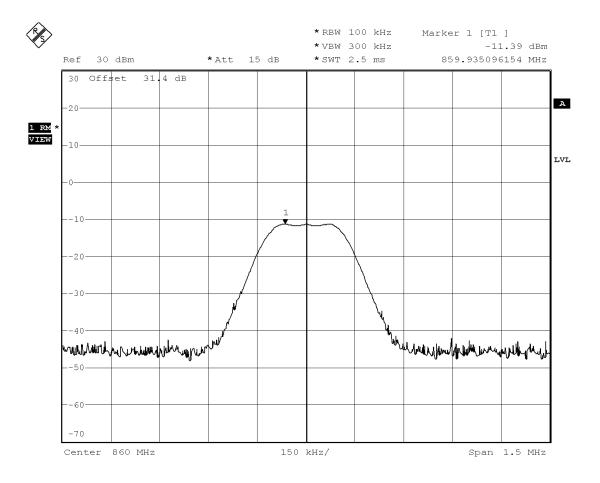

Date: 8.SEP.2004 17:45:12

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 - [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC NSS-131 C1 4.2
	Signal Source - GSM – Output – 860)MHz	

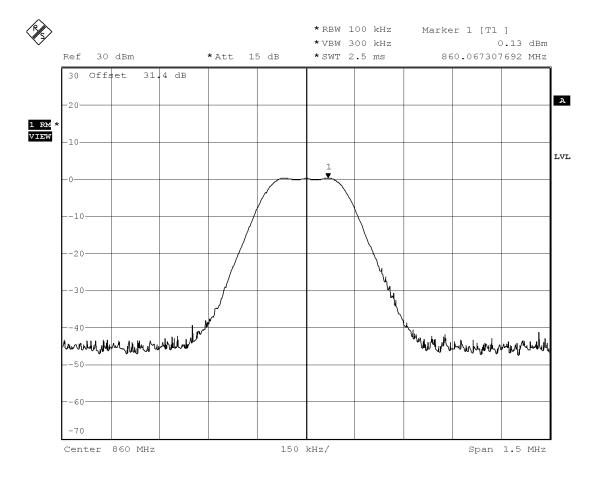

Date: 8.SEP.2004 17:06:40

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 - [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-151 C1 4.2
	Signal Source - GSM – Input – 869M	ИНz	

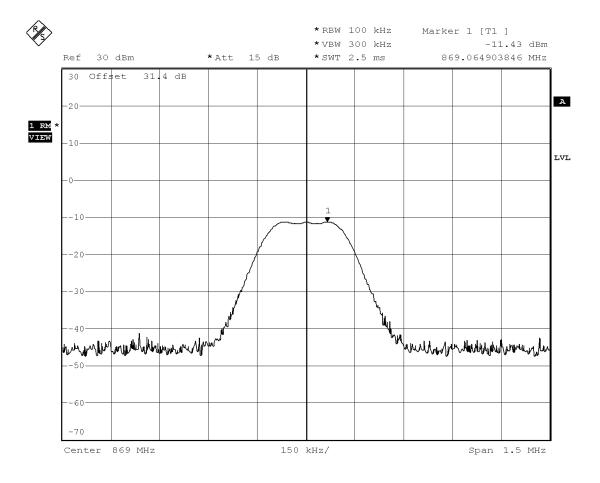

Date: 8.SEP.2004 17:43:51

FIGURE 6: OCCUPIED BANDWIDTH


<u>ONB</u>	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 - [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC RSS-131 C14.2
	Signal Source - GSM – Output – 869	9MHz	

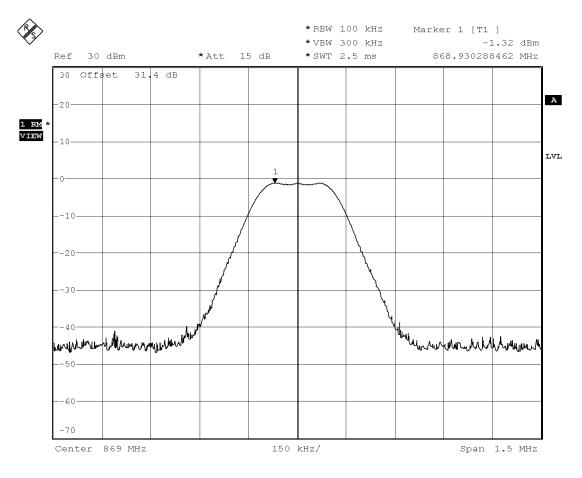

Date: 8.SEP.2004 17:11:21

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC RSS-131 CI 4.2
	Signal Source - GSM – Input – 1930	MHz	

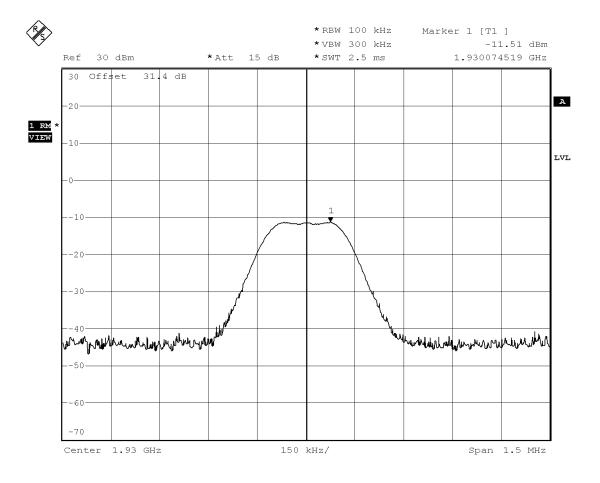

Date: 8.SEP.2004 17:36:38

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standards
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-151 C14.2
	Signal Source - GSM – Output – 193	0MHz	

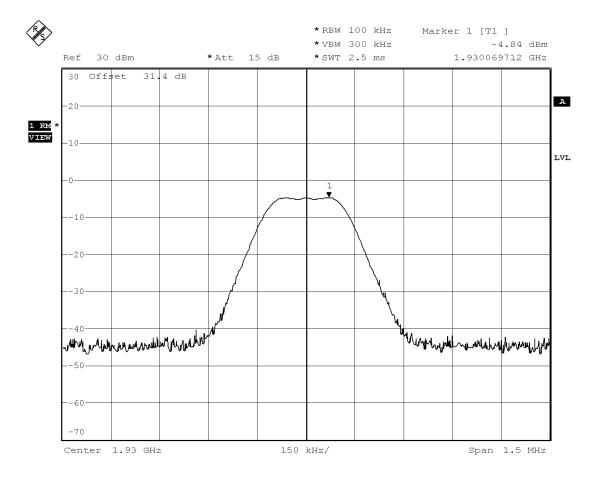

Date: 8.SEP.2004 17:28:35

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-151 C14.2
	Signal Source - GSM – Input – 1955	MHz	

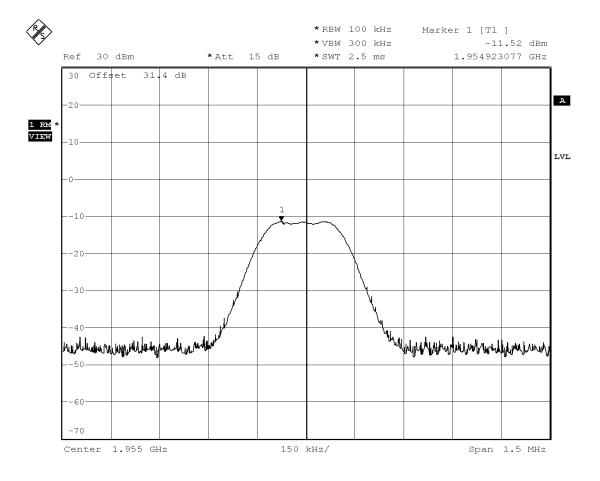

Date: 8.SEP.2004 17:35:36

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-131 C14.2
	Signal Source - GSM – Output – 195	55MHz	

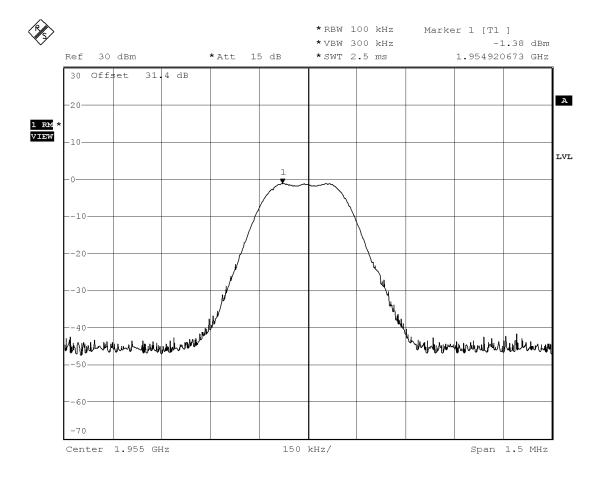

Date: 8.SEP.2004 17:29:33

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 - [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC NSS-131 C1 4.2
	Signal Source - GSM – Input – 1980MHz		

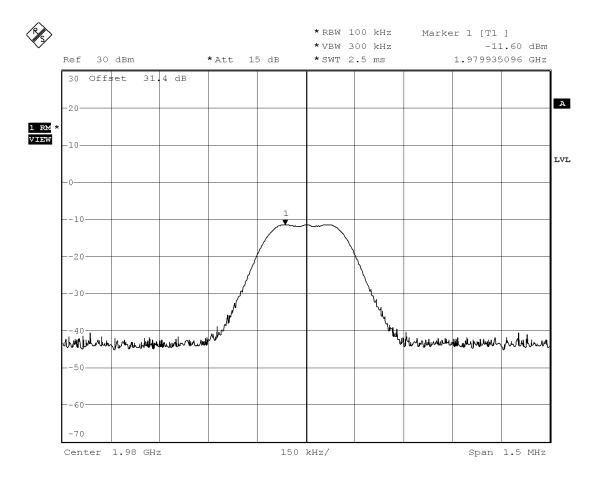

Date: 8.SEP.2004 17:34:48

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-131 C14.2
	Signal Source - GSM – Output – 198	80MHz	

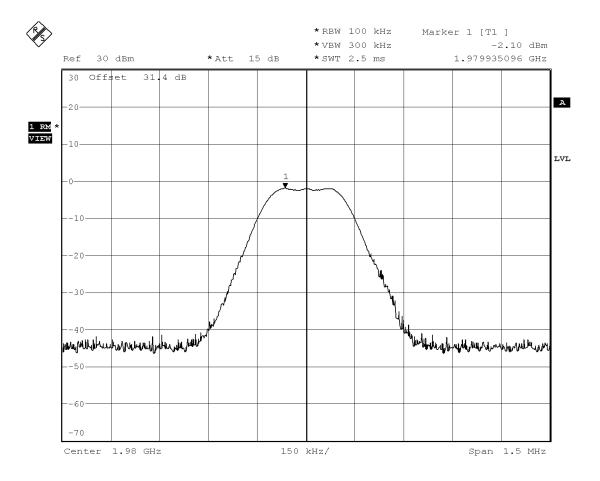

Date: 8.SEP.2004 17:30:31

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-151 Cl 4.2
	Signal Source - TDMA – Input – 851	MHz	

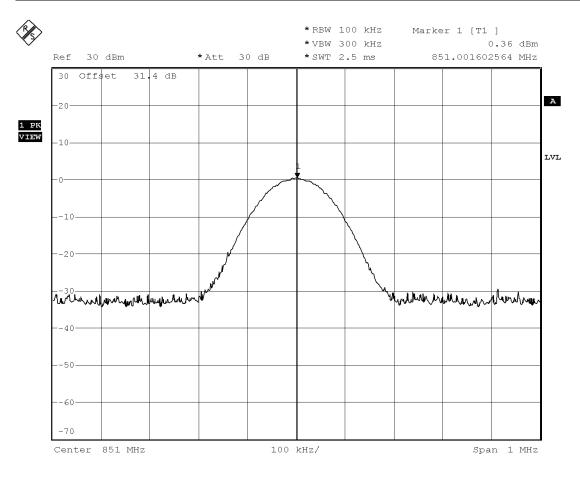

Date: 10.SEP.2004 12:28:42

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-151 Cl 4.2
	Signal Source - TDMA – Output – 8:	51MHz	

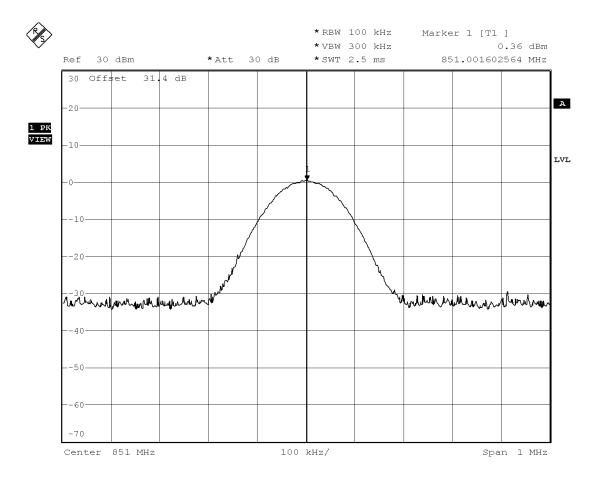

Date: 10.SEP.2004 12:28:42

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC RSS-131 C14.2
	Signal Source - TDMA – Input – 860)MHz	

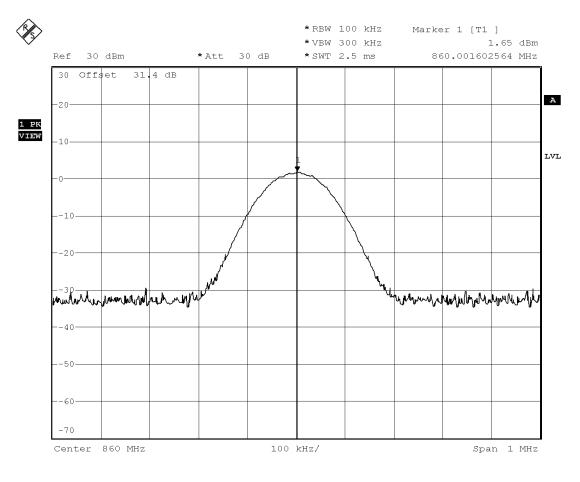

Date: 10.SEP.2004 12:30:08

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 - [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55*131 C1 4.2
	Signal Source - TDMA – Output – 80	60MHz	

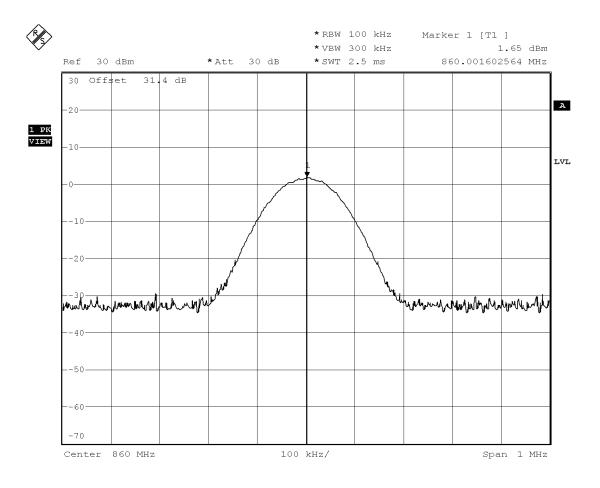

Date: 10.SEP.2004 12:30:08

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 - [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-151 Cl 4.2
	Signal Source - TDMA – Input – 869	9MHz	

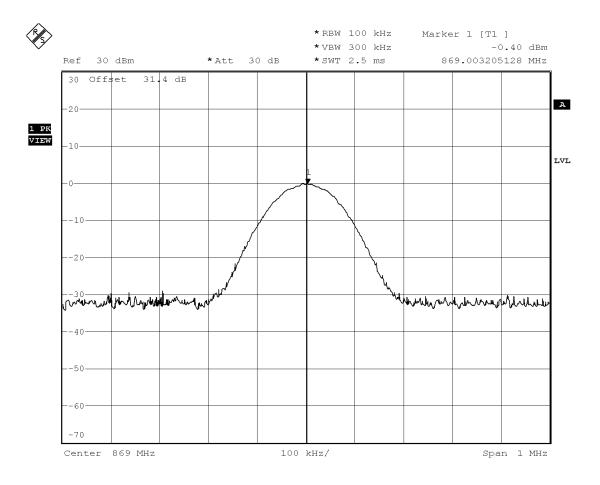

Date: 10.SEP.2004 12:31:04

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	ndwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC RSS-131 Cl 4.2
	Signal Source - TDMA – Output – 86	59MHz	

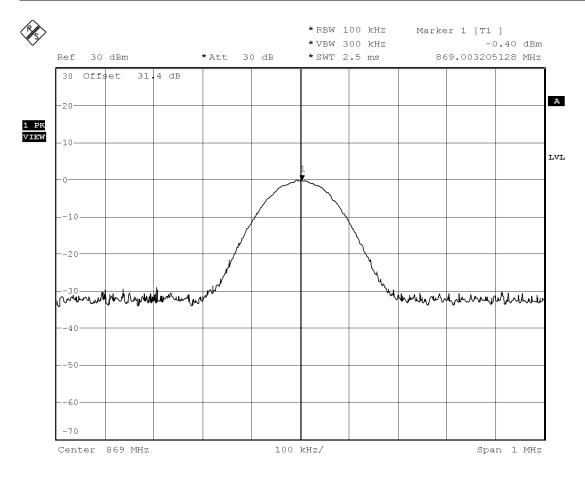

Date: 10.SEP.2004 12:31:04

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-151 C14.2
	Signal Source - TDMA – Input – 193	0MHz	

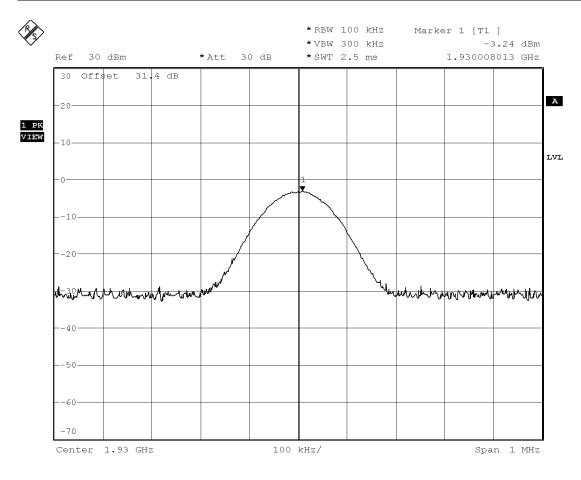

Date: 10.SEP.2004 11:58:04

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-151 Cl 4.2
	Signal Source - TDMA – Output – 1	930MHz	

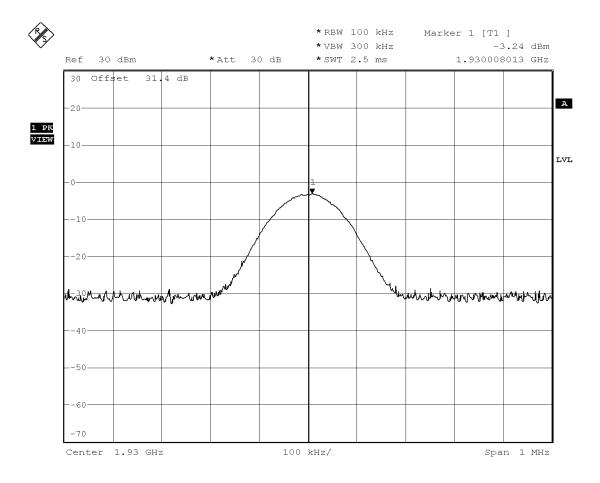

Date: 10.SEP.2004 11:58:04

FIGURE 6: OCCUPIED BANDWIDTH


<u>ONB</u>	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	Bandwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-151 C1 4.2
	Signal Source - TDMA – Input – 1	955MHz	

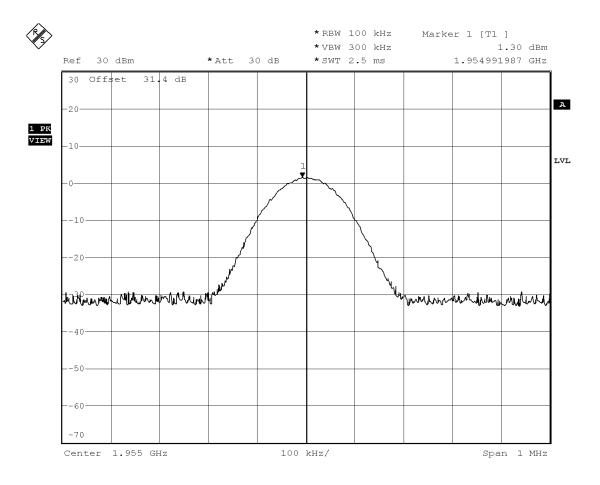

Date: 10.SEP.2004 11:55:10

FIGURE 6: OCCUPIED BANDWIDTH


<u>ONB</u>	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC RSS-151 CI 4.2
	Signal Source - TDMA – Output – 1	955MHz	

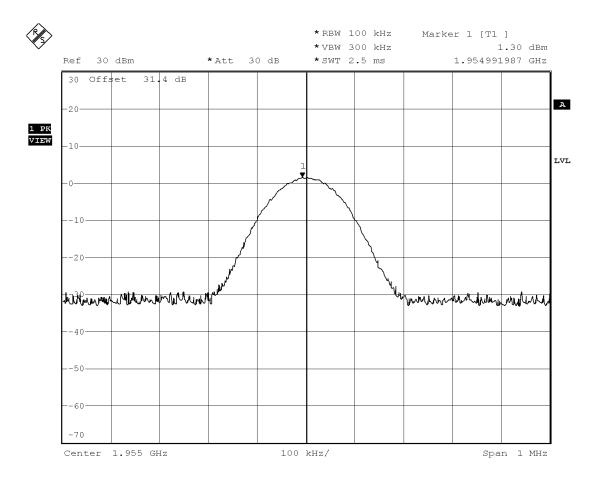

Date: 10.SEP.2004 11:55:10

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied Ba	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-151 C1 4.2
	Signal Source - TDMA – Input – 198	60MHz	

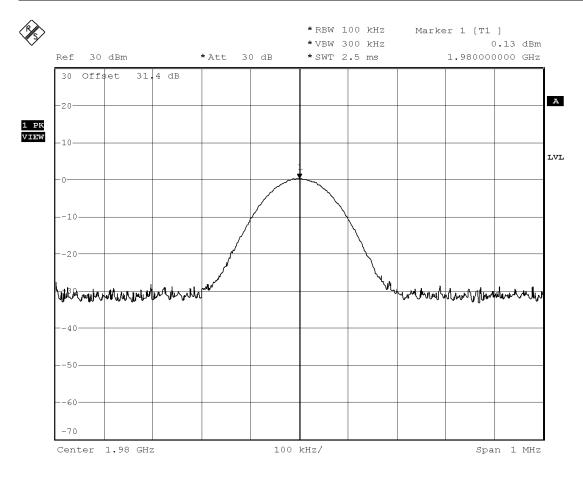

Date: 10.SEP.2004 11:53:55

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-131 C14.2
	Signal Source - TDMA – Output – 1	980MHz	

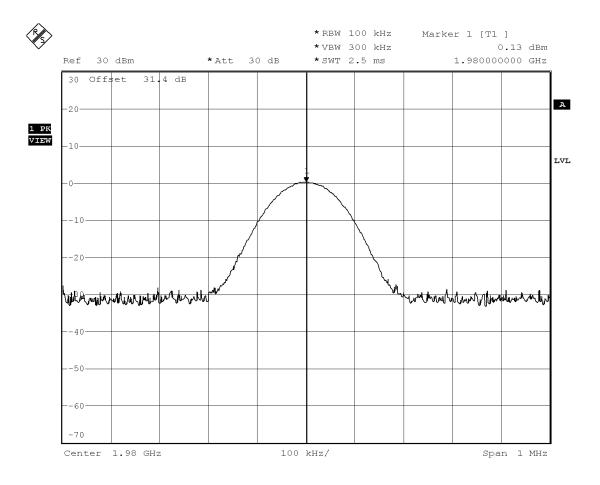

Date: 10.SEP.2004 11:53:55

FIGURE 6: OCCUPIED BANDWIDTH


<u>ONB</u>	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	Bandwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC RSS-131 C1 4.2
	Signal Source - CDMA – Input – 8	60MHz	

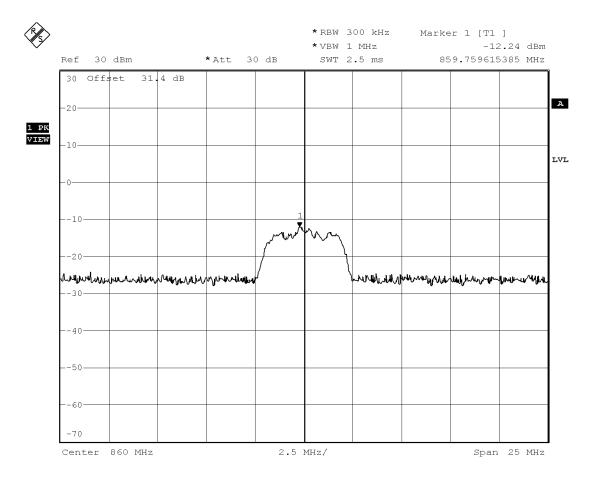

Date: 10.SEP.2004 13:13:04

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier		[X] FCC Part 90 [X] IC RSS-131 Cl 4.2
	Downlink		[A] IC K55-131 C14.2
	Signal Source - CDMA – Output – 8	60MHz	

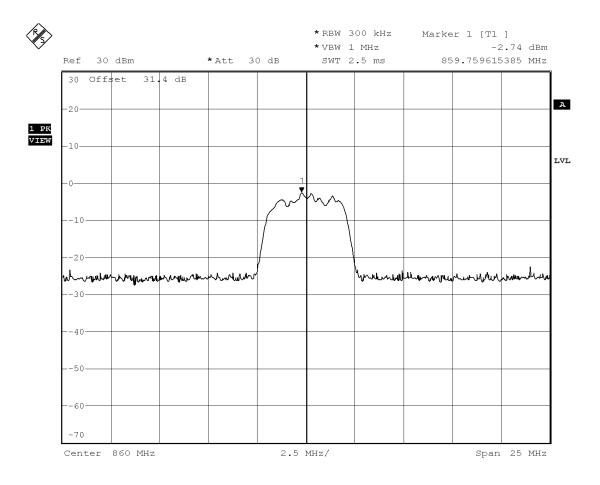

Date: 10.SEP.2004 13:11:30

FIGURE 6: OCCUPIED BANDWIDTH


<u>ONB</u>	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	Bandwidth		
DNB Job Number:	RV58031A Date: 10 Sep 2004		Conformance		
Customer:	Janizary Holdings Inc	Standards [X] FCC Part 24			
Model Number:	LMSWDJHNEX				
Description:	RF amplifier	[X] FCC Part 90 [X] IC RSS-131 Cl 4.2			
	Downlink [A] ic R55-1				
	Signal Source - CDMA – Input – 1				

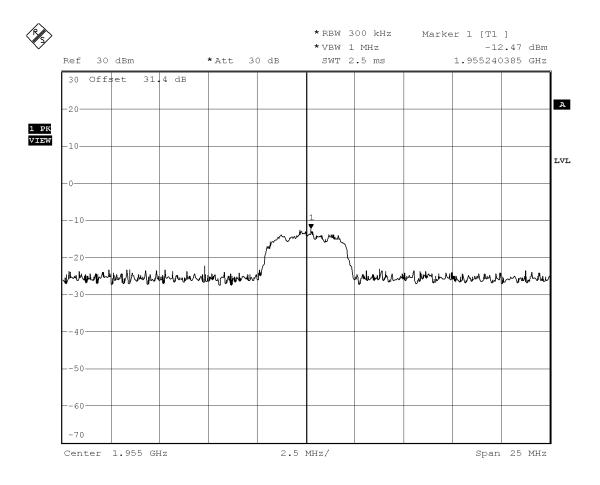

Date: 10.SEP.2004 13:37:19

FIGURE 6: OCCUPIED BANDWIDTH


ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Occupied B	andwidth		
DNB Job Number:	RV58031A Date: 10 Sep 2004		Conformance		
Customer:	Janizary Holdings Inc		Standard s		
Model Number:	LMSWDJHNEX	[X] FCC Part 24			
Description:	RF amplifier	[X] FCC Part 90 [X] IC RSS-131 Cl 4.2			
	Downlink [A] ic R55-131 ct 4.2				
	Signal Source - CDMA – Output – 1				

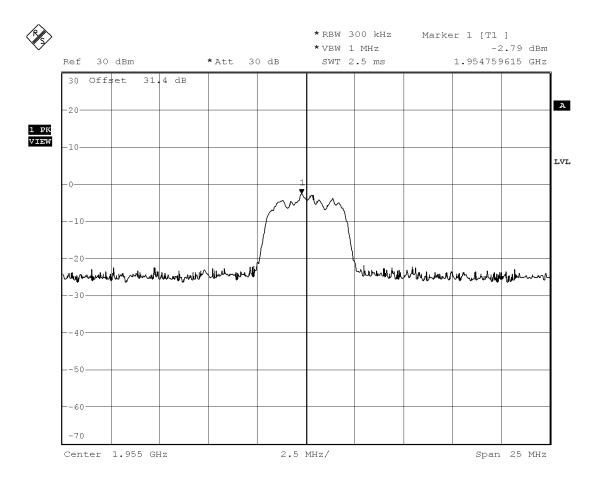

Date: 10.SEP.2004 13:39:24

FIGURE 6: OCCUPIED BANDWIDTH

ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Inter-Mod	ulation
DNB Job Number:	RV58031A	Date: 9 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	[X] FCC Part 24	
Description:	RF amplifier	[X] FCC Part 90 [X] IC RSS-131 Cl 4.3	
	Downlink	[X] IC RSS-131 Cl 4.3	
	Signal Source - CW – Input – Part 24	4 Band	

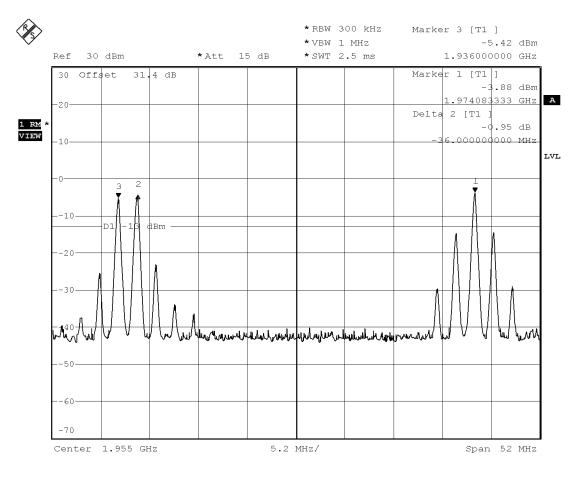

Date: 9.SEP.2004 09:14:37

2.1051 Spurious Emissions at Antenna Terminals (IC RSS-131 clause 4.4)

Definition:

Conducted Spurious Emissions are emissions at the antenna terminals on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communication desired. The reduction in the level of these spurious emissions will not affect the quality of the information being transmitted.

Conducted Spurious Emissions shall be attenuated below the maximum level of the carrier frequency in accordance with the following formula:

-13dB= Measured Power - (43+10 log10 (Rated Power))

<u>Test Method:</u> Per EIA RS 152-B, Paragraph 4 as modified below.

Connect the equipment as shown in FIGURE 1.


Adjust the drive source to produce FM modulation. Adjust the Spectrum Analyzer to display the Modulated Carrier.

Scan the frequency spectrum from the lowest radio frequency generated in the equipment through the 10th harmonic of the carrier frequency.

<u>Test Results:</u> See Plots


All spurious emissions at the antenna terminals are below the FCC specifications

NB NB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Antenna Conduc	eted Spurious
DNB Job Number:	RV58031A	Date: 11 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier	[X] FCC Part 90	
		[X] IC RSS-131 cl4.4	
	Uplink – 815MHz		[24] 10 1035-131 014.4

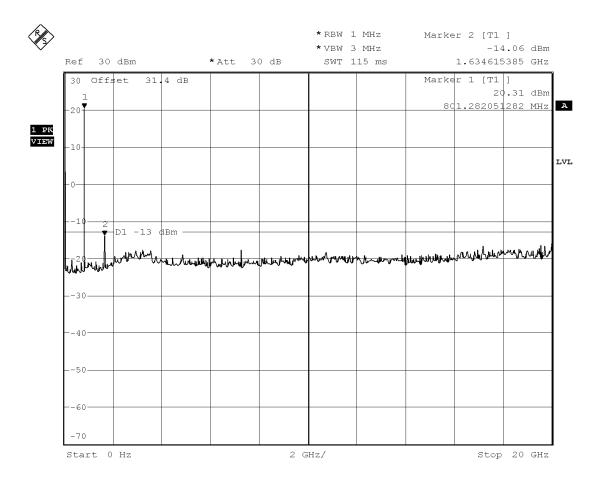


Date: 11.SEP.2004 10:46:06

ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Antenna Conduc	cted Spurious
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc	Standard s	
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier	[X] FCC Part 24 [X] FCC Part 90	
		[X] IC RSS-131 cl4.4	
	Uplink – 1885MHz		[21] 10 1005-131 014.4

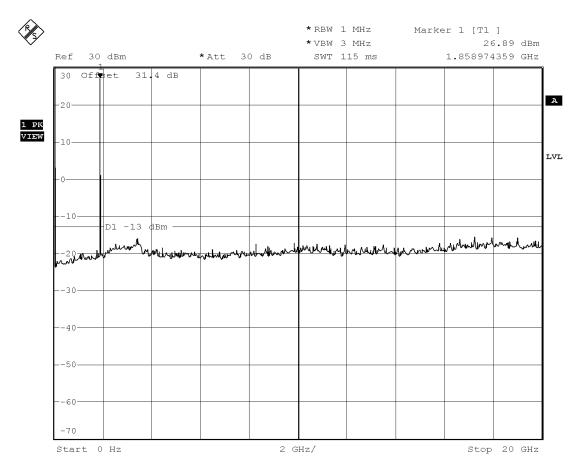


Date: 10.SEP.2004 14:04:23

ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Antenna Conduc	eted Spurious
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier	[X] FCC Part 24 [X] FCC Part 90	
		[X] ICC Fait 90 [X] IC RSS-131 cl4.4	
	Downlink – 860MHz		[24] 10 1055-131 014.4

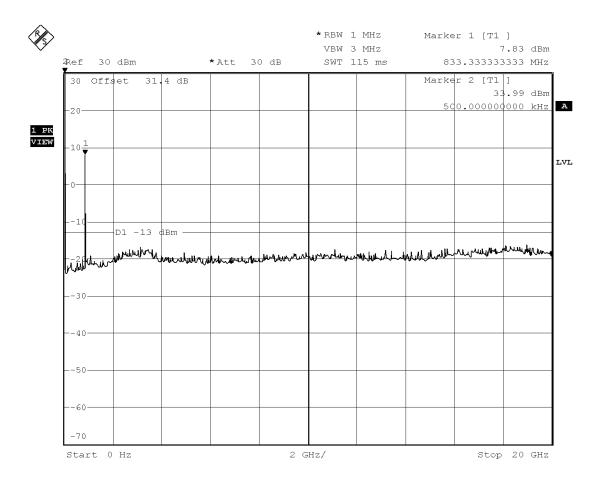

Date: 10.SEP.2004 14:53:33

ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Antenna Conduc	cted Spurious
DNB Job Number:	RV58031A	Date: 10 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	Serial Number:	[X] FCC Part 24
Description:	RF amplifier	[X] FCC Part 24 [X] FCC Part 90	
		[X] ICC Fait 90 [X] IC RSS-131 cl4.4	
	Downlink – 1955MHz		[24] 10 100-101 014.4

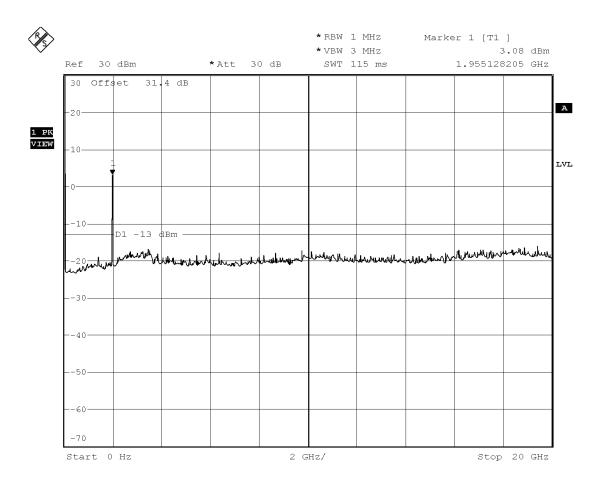

Date: 10.SEP.2004 13:57:48

2.1053 Field Strength of Spurious Radiation (IC RSS-131 clause 4.4)

Definition:

Emissions from the equipment when connected into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communication desired. The reduction in the level of these spurious emissions will not affect the quality of the information being transmitted.

Test Method: Per TIA /EIA 603.

Connect the equipment and follow the procedure described in paragraph 2.2.1.12. Measure the amplitude of each spurious radiated signal through the 10th harmonic. The spurious signals are then measured on the 3 meter range. First the EUT is measured using a tuned reference dipole below 1GHz and a double ridge guide Horn antenna above 1GHz. If the DRG antenna is used the appropriate gain factor for the antenna is subtracted from the final measurement. Then a dipole to dipole (or drg to drg) measurement is conducted to determine the actual power at each harmonic being generated by the EUT. If no noticeable emission can be observed the ground floor is recorded in the data sheets.

<u>Test Results:</u> All readings were at the spectrum analyzer ground floor above the fundamental.

All radiated spurious emissions are below the FCC Specifications.

FIGURE 8: RADIATED FIELD STRENGTH OF SPURIOUS EMISSIONS. UPLINK.

ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Radiated S	purious	
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance	
Customer:	Janizary Holdings Inc		Standard s	
Model Number:	LMSWDJHNEX	[X] FCC Part 24		
Description:	RF amplifier	- [X] FCC Part 24 - [X] FCC Part 90		
	[X] I C RSS-			
	Uplink 815MHz		[71] IC N33-131 014.4	

Harmonics	Freq In MHz	Antenna Polar	dBm Reading	-13dB Limit	Margin
2nd	1630	Н	-31.7	-13	-18.7
	1630	V	-35.6	-13	-22.6
3rd	2445	Н	-43.0	-13	-30.0
	2445	V	-40.2	-13	-27.2
4th	3260 *	Н	< -60.0	-13	> -47.0
	3260 *	V	< -60.0	-13	> -47.0
5th	4075 *	Н	< -60.0	-13	> -47.0
	4075 *	V	< -60.0	-13	> -47.0
6th	4890 *	Н	< -60.0	-13	> -47.0
	4890 *	V	< -60.0	-13	> -47.0
7th	5705 *	Н	< -60.0	-13	> -47.0
	5705 *	V	< -60.0	-13	> -47.0
8th	6520 *	Н	< -60.0	-13	> -47.0
	6520 *	V	< -60.0	-13	> -47.0
9th	7335 *	Н	< -60.0	-13	> -47.0
	7335 *	V	< -60.0	-13	> -47.0
10th	8150 *	Н	< -60.0	-13	> -47.0
	8150 *	V	< -60.0	-13	> -47.0

^{*} Measurement made at instrument ground floor - no discernible reading

FIGURE 8: RADIATED FIELD STRENGTH OF SPURIOUS EMISSIONS, UPLINK,

ONB	5969 Robinson Avenue Riverside, CA 92503 (951) 637-2630 FAX (951) 637-2704	Radiated S	purious
DNB Job Number:	RV58031A	Date: 8 Sep 2004	Conformance
Customer:	Janizary Holdings Inc		Standard s
Model Number:	LMSWDJHNEX	[X] FCC Part 24	
Description:	RF amplifier	[X] FCC Part 24 [X] FCC Part 90	
		[X] IC RSS-131 cl4.4	
	Uplink – 1885 MHz		[21] IC K55-151 Cl4.4

	Freq	Antenna	dBm	-13dB	
Harmonics	In MHz	Polar	Reading	Limit	Margin
2nd	3770	Н	-57.3	-13	-44.3
	3770	V	-48.4	-13	-35.4
3rd	5655 *	Н	< -60.0	-13	> -47.0
	5655 *	V	< -60.0	-13	> -47.0
4th	7540 *	Н	< -60.0	-13	> -47.0
	7540 *	V	< -60.0	-13	> -47.0
5th	9425 *	Н	< -60.0	-13	> -47.0
	9425 *	V	< -60.0	-13	> -47.0
6th	11310 *	Н	< -60.0	-13	> -47.0
	11310 *	V	< -60.0	-13	> -47.0
7th	13195 *	Н	< -60.0	-13	> -47.0
	13195 *	V	< -60.0	-13	> -47.0
8th	15080 *	Н	< -60.0	-13	> -47.0
	15080 *	V	< -60.0	-13	> -47.0
9th	16965 *	Н	< -60.0	-13	> -47.0
	16965 *	V	< -60.0	-13	> -47.0
10th	18850 *	Н	< -60.0	-13	> -47.0
	18850 *	V	< -60.0	-13	> -47.0

^{*} Measurement made at instrument ground floor - no discernible reading

2.1055 Measurement of Frequency Stability (IC RSS-131)

The EUT is a power amplifier and contains no circuitry for generating or stabilizing the RF signal.

2.1057 Frequency Spectrum to be Investigated

The Frequency was searched from the lowest radio frequency generated in the equipment through the $10^{\rm th}$ harmonic of the carrier frequency.

RF Exposure

The LMSWDJHNEX (800 / 1900 MHz) dual band RF Compensator is operated as a mobile device as defined in 2.1091(b) bases on its design and installation. The compensator is installed into a vehicle such that it is physically secured and is generally located more than 20 cm from the end-user. This information is included in the user manual. It is suggested that the antenna be installed such that there is at least 20 cm of separation between the occupants of the vehicle and the antenna.

The LMSWDJHNEX (800 / 1900 MHz) dual band RF Compensator has a transmitted conducted power of 0.14 W in the low band and 0.25W in the high band. The mobile antenna supplied with the transceiver has a maximum gain of 3 dB, and minimum cable loss of –1.0 dB, together resulting in a maximum EIRP of 1 W. Since the transmit SMR band (806-824 MHz) (Part 90) is below 1.5 GHz and its EIRP with the supplied antenna is below 1.5 and transmit PCS band (1860-1910 MHz) (Part 24) is above 1.5 GHz and its EIRP with the supplied antenna is below 3W, the 800 / 1900 MHz RF Compensator is categorically excluded from routine environmental evaluation per 2.1091(c).

86

RF Exposure – MPE Calculations

<u>Input</u>

Transmitter Power: Lo band 140 mW Hi band 250mW

Antenna Gain: 3 dB

Cable loss: 1 dB @ 806 – 825 MHz

2 dB @ 1850 – 1910 MHz

Frequency range: 806-825 MHz and 1850-1910 MHz

<u>Assumptions</u>

1. A single ¼ wavelength radiating antenna is assumed.

2. Closest exposure distance is assumed to be 20 cm

RF Exposure – MPE Calculations

Calculations

The following results shall be assumed to be accurate for the far-field only. These predictions will over-estimate power density in the near-field. Based on the use of a ¼ wavelength radiator, a distance of 20 cm is considered to be in the far-field for all cases.

 $S = PG/4*PI*R^2$

@ 806 – 825 MHz

P is 140 mW G is 2 dB (Antenna gain – loss) or $10^{(2/20)}$ or 1.25 R is 20 cm

$S = 0.028 \text{ mW/cm}^2$

For Occupational/Controlled Exposure

From 300 to 1500 MHz, power density limit is f/300 mW/cm² @ 806 MHz, power density limit is **2.69 mW/cm² for 6 minutes.**

For General Population/Uncontrolled Exposure

From 300 to 1500 MHz, power density limit is f/1500 mW/cm² @ 806 MHz, Power density limit is **0.54 mW/cm² for 30 minutes.**

Conclusion: Meets MPE limits

@ 1850 – 1910 MHz

P is 250 mW G is 1 dB (Antenna gain – loss) or $10^{(1/20)}$ or 1.12 R is 20 cm

$S = 0.044 \text{ mW/cm}^2$

For Occupational/Controlled Exposure

From 1,500 to 100,000 MHz, power density limit is **6.17 mW/cm² for 6 minutes.**

For General Population/Uncontrolled Exposure

From 1,500 to 100,000 MHz, power density limit is 1.23 mW/cm² for 30 minutes.

Conclusion: Meets MPE limits

Appendix A	Photographs
------------	--------------------

INTENTIONALLY LEFT BLANK

PHOTOS: RADIATED FIELD STRENGTH OF SPURIOUS EMISSIONS

Notes:



PHOTO: RF POWER OUTPUT, EMISSIONS LIMITATIONS

GSM/TDMA, OCCUPIED BANDWIDTH GSM/TDMA, CONDUCTED SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Notes:

