

FCC EMC TEST REPORT

Name of Sample: Mobile Cellular Phone

Model of Sample: XT2529-3, XT2529-4

Applicant: Motorola Mobility LLC

Issued Date: 2025-03-12



ADR TEST AND CERTIFICATION CENTER

Motorola Mobility LLC, a Lenovo Company

Add: No. 19, Gao Xin 4th Road Wuhan, People's Republic of China 430205

Phone: (86) 13696970830

E-mail: suyj3@motorola.com

Name of Client	Motorola Mobility LLC		
Address of Client	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA		
Trademark	Motorola	Type Name or ID	IHDT56AV3
Applicant No.	RF189618	Sample No.	SN: N4BS220198 SN: N4BS2B0112
Delivering Date	2025-02-26	Test Date(s)	2025-02-28 to 2025-03-12
Sample Illustration	None		
Standard	47 CFR FCC PART 15 Subpart B ANSI C63.4-2014		
Conclusion	PASS		
Remarks	None		

Editor: Chuan Sun

Chuan Sun

Reviewer: Jianfeng Wen

Jianfeng Wen

Signatory: Eric Lin

Eric Lin

Matters Needing Attention

- a) The electronic report shall be valid after encryption.
- b) The paper report shall be valid after being stamped with the official seal of the company.
- c) The report is invalid without the signature of the Editor, Reviewer and Signatory.
- d) The test report is invalid if there is any evidence of erasure and/or falsification.
- e) If there is any dissidence for the test report, please file objection to the lab within 15 days from the date of receiving the test report.
- f) The test report is only responsible for the tested model/sample; the sample(s) presented in the report are provided by the Client.
- g) Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the lab.

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
25ADRTCC5011	Rev. 01	Initial issue of report	2025-03-08
25ADRTCC5011	Rev. 02	Added two USB cables for test	2025-03-12

Catalogue

1.	Information Of Equipment Under Test(EUT)	5
2.	Details Of Test	6
2.1	Applicant	6
2.2	Location of Test	6
2.3	Applied Standards	6
3.	Result Summary	7
4.	Tests Configuration Of EUT	8
4.1	EUT Test Modes	8
4.2	Configuration Of Test System	11
4.3	Support Unit For Test	11
5.	Test Result	12
5.1	Radiated Emissions	12
5.2	Conducted Emissions	14
6.	Test Equipment And Software	15
7.	System Measurement Uncertainty	15
8.	Test Data	16
8.1	Radiated Emissions	16
8.2	Conducted Emissions	18
9.	EUT And Test Set-up Photos	19
9.1	EUT	19
9.2	Radiated Emissions	21
9.3	Conducted Emissions	22

1. Information Of Equipment Under Test(EUT)

Product Name:		Mobile Cellular Phone
Brand Name:		Motorola
Model Name:		XT2529-3, XT2529-4
FCC ID:		IHDT56AV3
Software Version:		V2VOJ35.45
Hardware Version:		DVT2
IMEI Code:		Conduction: 357325840026256 / 357325840026264 for Sample 1 357325840031819 / 357325840031827 for Sample 2 Radiation: 357325840026256 / 357325840026264 for Sample 1 357325840031819 / 357325840031827 for Sample 2
Supports Radio application in this standard:		
GSM/WCDMA/LTE/5G NR/WLAN/BLE/BT/GNSS/NFC/FM		
Accessory		
Product	Brand	model
AC Adapter 1(US)	Motorola（Salcomp）	MC-331L
AC Adapter 1(US)	Motorola（Chenyang）	MC-331L
AC Adapter 1(US)	Motorola（Salcomp）	MC-331
Battery 1	Motorola（Sunwoda）	RB52
Battery 2	Motorola（ATL）	RB52
USB Cable 1	Motorola(Yihuaxing)	T365-020/T365-020-01/T365-020-02
USB Cable 2	Motorola(WASHIN)	HX-TL-01/HX-TL-07/HX-TL-08
USB Cable 3	Motorola(Juwei)	JWUB1614-T03H / JWUB1705-T03H JWUB1856-T03H
USB Cable 4	Motorola(Saibao)	STN-A131A
USB Cable 5	Motorola(WASHIN)	HX-TL-04

Remark:

1. The EUT's information was declared by manufacturer. Please refer to the manufacturer's specifications or user's manual for more detailed description.
2. This report includes the first and second source sample. The first source sample (SN: N4BS220198, Applicant No. is RF189618) collectively referred to as sample1, and the second source sample (SN: N4BS2B0112, Applicant No. is RF189618) collectively referred to as sample2.
3. There are two models of EUT. They are XT2529-3 and XT2529-4. The details of the differences can be found in the product equality statement. Base on similarity, XT2529-3 can refer to the relevant data of XT2529-4. Based on the differences, we selected XT2529-4 (sample 1) for full testing and selected XT2529-4 (sample 2) to verify the differences.

2. Details Of Test

2.1 Applicant

Applicant Name:	Motorola Mobility LLC
Address:	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

2.2 Location of Test

Test Site 1:	ADR TEST AND CERTIFICATION CENTER
Address:	NO.19, Gao Xin 4 th Road, Wuhan, 430205, P.R China

2.3 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

47 CFR FCC PART 15 Subpart B

ANSI C63.4-2014

3. Result Summary

Test Items	Test Standard	Limit	Result (PASS/FAIL)	Site
Radiated emissions	ANSI C63.4-2014	15.109 Class B	PASS	Site 1
Conducted emissions	ANSI C63.4-2014	15.107 Class B	PASS	Site 1
decision rules: Statements of conformity (e.g. Pass/Fail) to specifications are made in this report without taking measurement uncertainty into account except when requested by the customer. Where statements of conformity are made in this report, the following decision rules are applied: PASS- Results within limits/specifications FAIL- Results exceed limits/specifications				

Remark: For the test result, the EUT had been tested with all test modes. But only the worst case was shown in test report.

Summary of Environment Condition, Test Date and Test Engineer for all Test Items

Test items	Ambient Temperature (°C)	Relative Humidity (%)	Atmospheric Pressure (kPa)	Test Date	Test Engineer
Radiated emissions	25~26	35~40	/	Feb.28,2025~ Mar.12.2025	Mingzhu Li
Conducted emissions	25~26	33~38	/	Feb.28,2025~ Mar.12.2025	Mingzhu Li

4. Tests Configuration Of EUT

4.1 EUT Test Modes

All the test modes were carried out with the EUT under the normal operation, which were shown in this test report and defined as below:

Test Items	configuration
Radiated Emissions	Mode 1: GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable 1(Charging from Adapter 1) + SIM for Sample 1
	Mode 2: GSM1900 Idle + Bluetooth Idle + Earphone + WLAN (5G) Idle + Camera (Front) + NFC On + USB Cable 2(Charging from Adapter 2) + E-SIM for Sample 1
	Mode3: WCDMA Band 5 Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Rear) + USB Cable 3(Charging from Adapter 3) + SIM for Sample 1
	Mode4: LTE Band 5 Idle + Bluetooth Idle + WLAN(2.4G)Idle + MPEG4(Run Color Bar) + USB Cable 1(Charging from Adapter 2) + SIM for Sample 1
	Mode5: LTE Band 12 Idle + Bluetooth Idle + WLAN(5G)Idle + GNSS On + USB Cable 1(Data Link with Notebook) + EUT(eMMC)USB Data Link to NB + SIM for Sample 1
	Mode6: GSM 850 Idle + Bluetooth Idle + WLAN(2.4G)Idle + USB Cable 3(Data Link with Notebook) + NB USB Data Link to EUT(eMMC) + SD for Sample 1
	Mode7: n78 Idle+ Bluetooth Idle + WLAN(2.4G)Idle + Camera(Front) + USB Cable 2(Charging from Adapter 1) + SIM for Sample 1
	Mode8: GSM 1900 Idle + Bluetooth Idle + WLAN (2.4G) Idle + FM + USB Cable 3(Charging from Adapter 2) + SIM for Sample 1
	Mode9: GSM1900 Idle + Bluetooth Idle + Earphone + WLAN (5G) Idle + Camera (Front) + NFC On + USB Cable 2(Charging from Adapter 2) + SIM for Sample 2
	Mode10: GSM1900 Idle + Bluetooth Idle + Earphone + WLAN (5G) Idle + Camera (Rear) + NFC On + USB Cable 2(Charging from Adapter 2) + SIM for Sample 2
	Mode11: GSM1900 Idle + Bluetooth Idle + Earphone + WLAN (5G) Idle + MPEG4 (Run Color Bar) + NFC On + USB Cable 2(Charging from Adapter 2) + SIM for Sample 2
	Mode12: GSM1900 Idle + Bluetooth Idle + Earphone + WLAN (5G) Idle + NFC On + USB Cable 2(Data Link with Notebook) + EUT(eMMC)USB Data Link to NB + SIM for Sample 2
	Mode13: GSM 850 Idle + Bluetooth Idle + WLAN(2.4G)Idle + USB Cable 4(Data Link with Notebook) + NB USB Data Link to EUT(eMMC) + SD for Sample 1
	Mode14: LTE Band 5 Idle + Bluetooth Idle + WLAN(5G)Idle + USB Cable 5(Data Link with Notebook) + EUT(eMMC)USB Data Link to NB + SIM for Sample 1
	Mode15: GSM1900 Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Front) + NFC On + USB Cable 4(Charging from Adapter) +SIM for Sample 1
	Mode16: n78 Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Front) + NFC On +

	USB Cable 5(Charging from Adapter) +SIM for Sample 1
AC Conducted Emission	Mode 1: GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + USB Cable 1(Charging from Adapter 1) + SIM for Sample 1 Mode2: GSM1900 Idle + Bluetooth Idle +Earphone + WLAN (5G) Idle + Camera (Front) + NFC On + USB Cable 2(Charging from Adapter 2) + E-SIM for Sample 1 Mode3: WCDMA Band V Idle + Bluetooth Idle + WLAN(5G) Idle + USB Cable 3(Charging from Adapter 3) + SIM for Sample 1 Mode4: LTE Band 5 Idle + Bluetooth Idle + WLAN(5G)Idle + MPEG4(Run Color Bar) + USB Cable 2(Charging from Adapter 1) + SIM for Sample 1 Mode5: LTE Band 12 Idle + Bluetooth Idle + WLAN(2.4G)Idle + GNSS On + USB Cable 2(Data Link with Notebook) + EUT(eMMC)USB Data Link to NB + SIM for Sample 1 Mode6: GSM 1900 Idle + Bluetooth Idle + WLAN(5G)Idle + USB Cable 3(Data Link with Notebook) + NB USB Data Link to EUT(eMMC) + SD for Sample 1 Mode7: n78 Idle + Bluetooth Idle + WLAN(2.4G)Idle + Camera(Front) + USB Cable 1(Charging from Adapter 2) + SIM for Sample 1 Mode8: GSM 850 Idle + Bluetooth Idle + WLAN (5G) Idle + Camera(Rear) + FM + USB Cable 2(Charging from Adapter 1) + SIM for Sample 1 Mode9: LTE Band 5 Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Rear) + USB Cable 2(Charging from Adapter 1) + SIM for Sample 2 Mode10: LTE Band 5 Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Front) + USB Cable 2(Charging from Adapter 1) + SIM for Sample 2 Mode11: LTE Band 5 Idle + Bluetooth Idle + WLAN(5G)Idle + MPEG4(Run Color Bar) + USB Cable 2(Charging from Adapter 1) + SIM for Sample 2 Mode12: LTE Band 5 Idle + Bluetooth Idle + WLAN(5G)Idle + USB Cable 2(Data Link with Notebook) + EUT(eMMC)USB Data Link to NB + SIM for Sample 2 Mode13: GSM 850 Idle + Bluetooth Idle + WLAN(2.4G)Idle + USB Cable 4(Data Link with Notebook) + NB USB Data Link to EUT(eMMC) + SD for Sample 1 Mode14: LTE Band 5 Idle + Bluetooth Idle + WLAN(5G)Idle + USB Cable 5(Data Link with Notebook) + EUT(eMMC)USB Data Link to NB + SIM for Sample 1 Mode15: GSM 850 Idle + Bluetooth Idle + WLAN(2.4G)Idle + Camera(Rear) + USB Cable 4(Charging from Adapter) + SIM for Sample 1 Mode16: GSM1900 Idle + Bluetooth Idle + WLAN(5G)Idle + Camera(Front) + NFC On + USB Cable 5(Charging from Adapter) +SIM for Sample 1

Remark:

1. If there is over one kind of accessories, each one should be applied in the all test modes. However, only the worst case will be recorded in this report.
2. If EUT has more than one typical operation, only the worst case will be recorded in this report.

Link Mode:

When the EUT state is switched on and worked.

Idle Mode:


When the EUT state is switch on but without Radio Resource Control (RRC) connection.

Worst mode of all test items listed in section 4.1

Test items	Worst mode
Radiated Emission	9
Conducted Emission	4

Remark: Only data of worst mode (if test item has) was reported in test result.

4.2 Configuration Of Test System

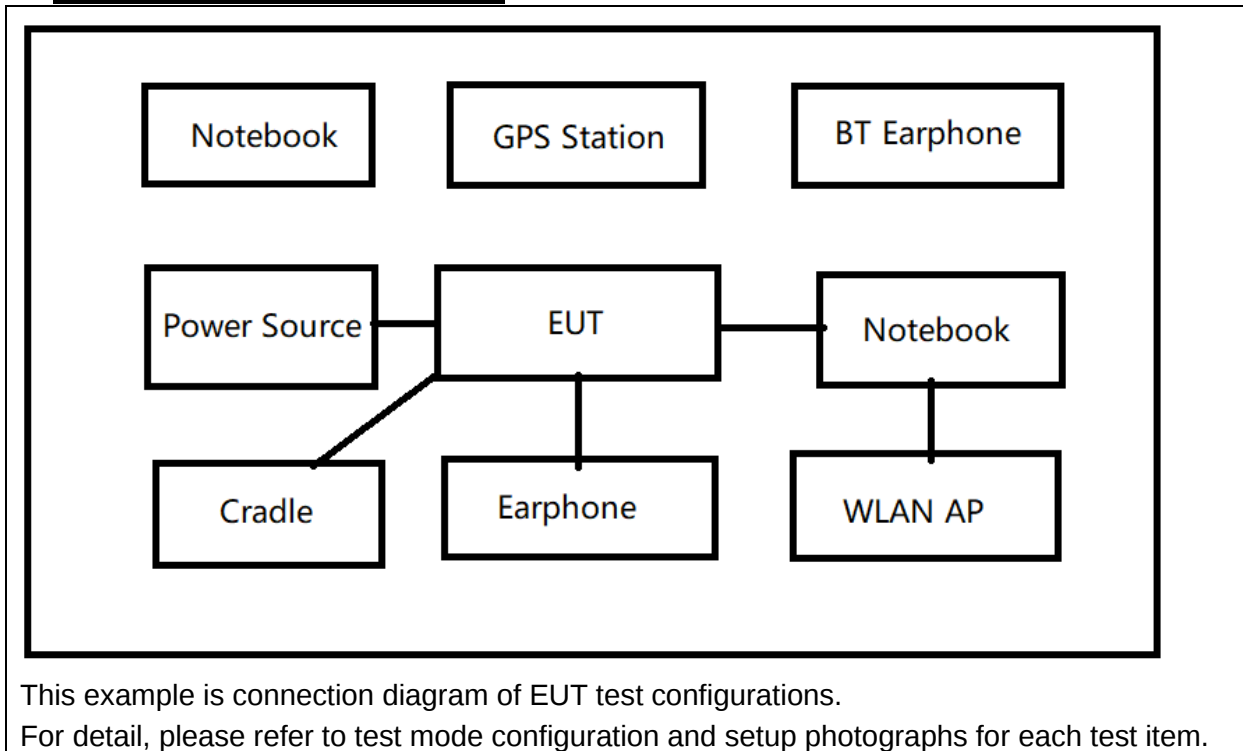

4.3 Support Unit For Test

Name	Model Name	Manufacturer	S/N
System Simulator	CMW500	R&S	141518
System Simulator	CMW500	R&S	171184
System Simulator	CMX500	R&S	101840
Vector Signal Generator	SMBV100A	R&S	258462
WLAN AP	TP-Link-8342	TP-Link	NA
WLAN AP	H3C Magic NX54	H3C	NA
Notebook	YOGA Pro 14s	Lenovo	PF48HYHV
Bluetooth Earphone	TR6	SOA/Y	NA
Bluetooth Earphone	Earbuds X2	COSONIC	NA
SD Card	128 PRO Plus	Samsung	NA
U disk	L7C	Lenovo	NA
Earphone	/	/	53253056
Adapter	30W MC-308		SA18C79905

5. Test Result

5.1 Radiated Emissions

5.1.1 Limit

Frequency range MHz	Quasi-peak limits dB (μV/m)		RBW kHz
30 to 88	40		120
88 to 216	43.5		120
216 to 960	46		120
960 to 1000	54		120
Frequency range MHz	Peak limits dB (μV/m)	Average limits dB (μV/m)	RBW MHz
Above 1000	74	54	1
At transitional frequencies the lower limit applies.			

5.1.2 Test Procedure

1. The test site, test set-up and test methods were according to ANSI C63.4-2014.
2. The EUT was placed on a non-metallic table 0.8m above the reference ground plane. The table was rotated 360 degrees to determine the position of the highest radiation.
3. The EUT was set 3m from the receiving antenna, which was mounted on a variable height antenna tower. The height range of tower was 1m to 4m.
4. A preliminary scan and a final scan of the emissions were made by using test script of software; The emissions were measured using quasi-peak detector (30M~1000MHz) and PK/AV detector (above 1GHz).
5. The maximal emission was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup.
6. The EUT was configured in the typical operating mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported for frequency range below 1GHz.
8. If emission level of the EUT in Peak measurement mode is 20dB lower than Peak limit line (that means the emission level in Peak measurement mode complies with both Peak and Average limit lines), then only Peak measurement result is reported. Otherwise, emissions in Average measurement mode shall be measured and reported above 1GHz.

5.1.3 Test Set-up

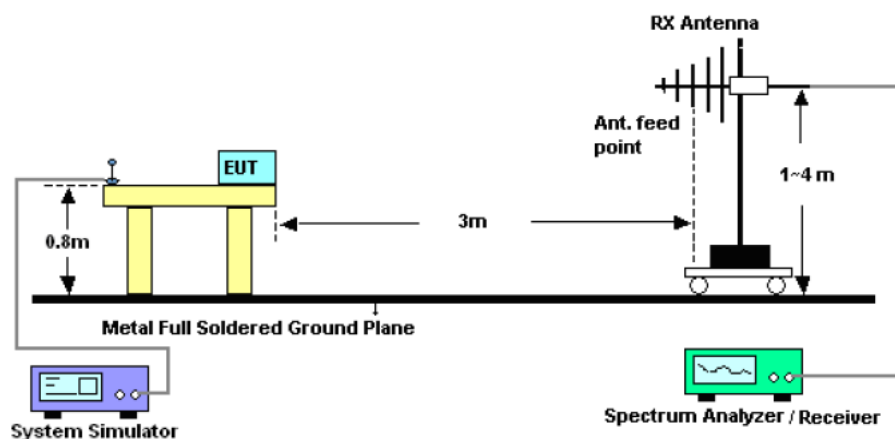


Figure.1 Test set-up of radiated emissions (30MHz~1000MHz)

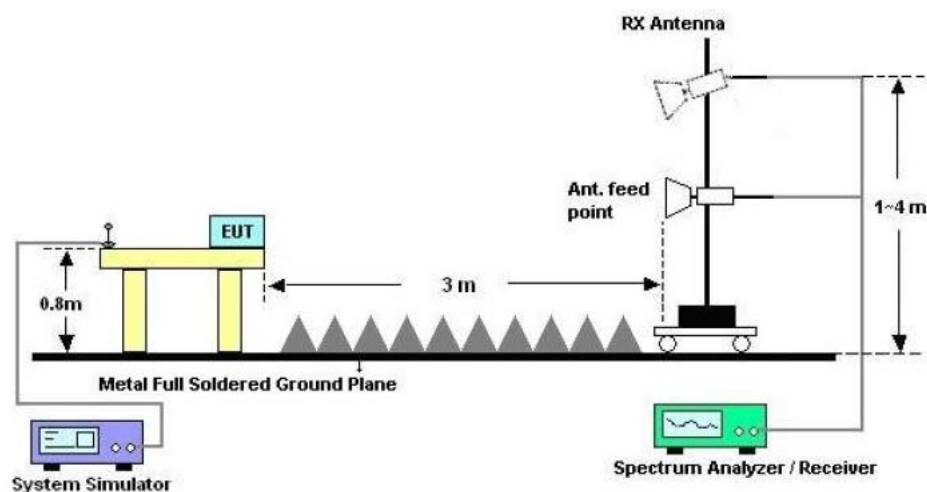


Figure.2 Test set-up of radiated emissions (above 1GHz)

5.1.4 Test Results

The EUT has met the requirements for Radiated Emissions.

Test data refer to the section 8.1 of this report.

Only the worst test result was shown in this report.

5.2 Conducted Emissions

5.2.1 Limit

Frequency range MHz	Class B Limits dB (μV)		RBW kHz
	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	9
0.50 to 5	56	46	9
5 to 30	60	50	9

NOTE 1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

NOTE 2: The lower limit is applicable at the transition frequency.

5.2.2 Test Procedure

1. The test site, test set-up and test methods were according to ANSI C63.4-2014.
2. The EUT was placed on a non-metallic table 0.8m above the reference ground plane.
3. The EUT was connected to LISN and LISN was connected to the reference ground plane. EUT was 80cm away from LISN.
4. A preliminary scan and a final scan of the emissions were made by using test script of software; the emissions were measured using quasi-peak and average detector.
5. Conducted Emission at AC port measurements were undertaken on the L and N lines.
6. The EUT was configured in the typical operating mode.

5.2.3 Test Set-up

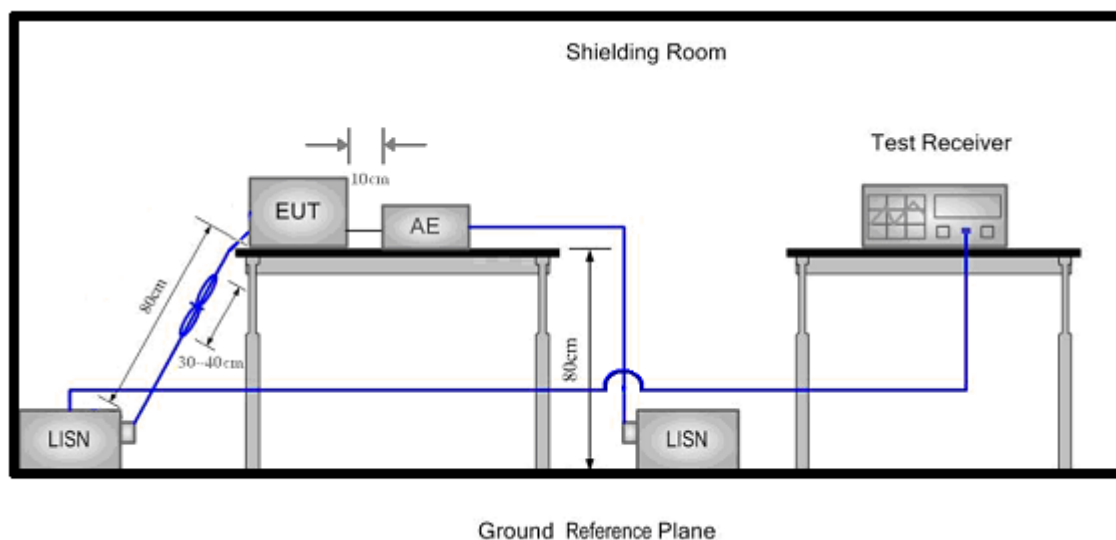


Figure.3 Test set-up of conducted emissions

5.2.4 Test Results

The EUT has met the requirements for Conducted Emissions.
 Test data refer to the section 8.2 of this report.
 Only the worst test result was shown in this report.

6. Test Equipment And Software

Main Test Equipments						
Test items	Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration interval (year)
RE	Double Ridged Horde Antenna	R&S	HF907	100545	2025/02/10	3
	Log-per.-Antenna	R&S	VULB9163	9163-893	2024/01/19	2
	broadband Antenna	R&S	QWH-SL-18-40-K-SG	12005	2025/02/10	3
	EMI Test Receiver (30M~1GHz)	R&S	ESR7	101188	2024/07/08	1
	Signal Analyzer (Above 1GHz)	R&S	FSV40	100956	2024/11/13	1
CE	LISN	R&S	ENV216	101223	2024/07/08	1
	EMI Test Receiver	R&S	ESR7	101188	2024/07/08	1
Software Information						
Test Item		Software Name		Version		
RE		EMC32		V 10.60.20		
CE		EMC32		V 10.60.20		

7. System Measurement Uncertainty


For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Measurement Uncertainty		
Items		Extended Uncertainty
RE(30MHz~1GHz)	Field strength(dB μ V/m)	U=5.9dB; k=2
RE(1GHz~18GHz)	Field strength(dB μ V/m)	U=5.0dB; k=2
RE(18GHz~40GHz)	Field strength(dB μ V/m)	U=5.1dB; k=2
CE(150kHz~30MHz)	Voltage(dB μ V)	U=3.3dB; k=2

8. Test Data

8.1 Radiated Emissions

30MHz~1GHz

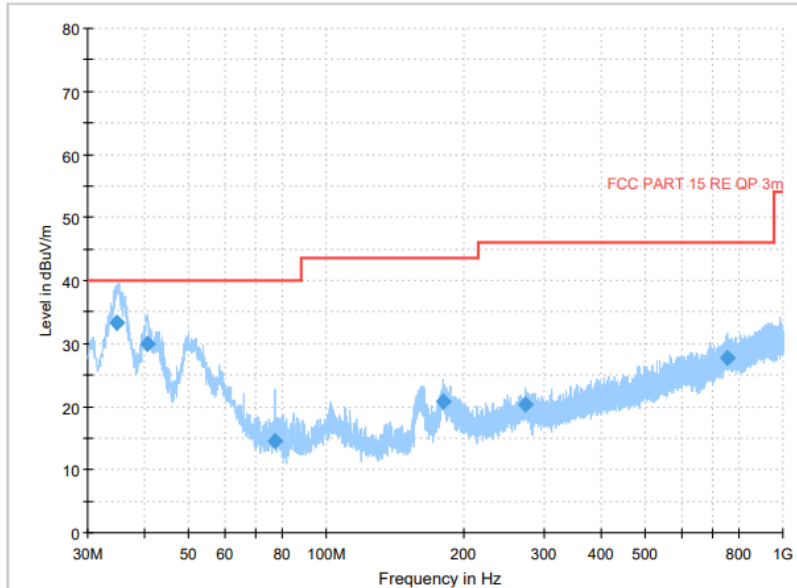

Final Result


Frequency (MHz)	QuasiPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
34.792277	33.36	40.00	6.64	120.000	V	16.0	18.0
40.661778	30.03	40.00	9.97	120.000	V	-44.0	19.6
77.278611	14.46	40.00	25.54	120.000	V	166.0	14.2
180.241278	20.87	43.50	22.63	120.000	V	0.0	16.3
272.429389	20.38	46.00	25.62	120.000	V	90.0	20.2
753.333722	27.82	46.00	18.18	120.000	H	286.0	29.2

Note:

Level = Reading level by receiver + Corr. (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

1GHz~40GHz

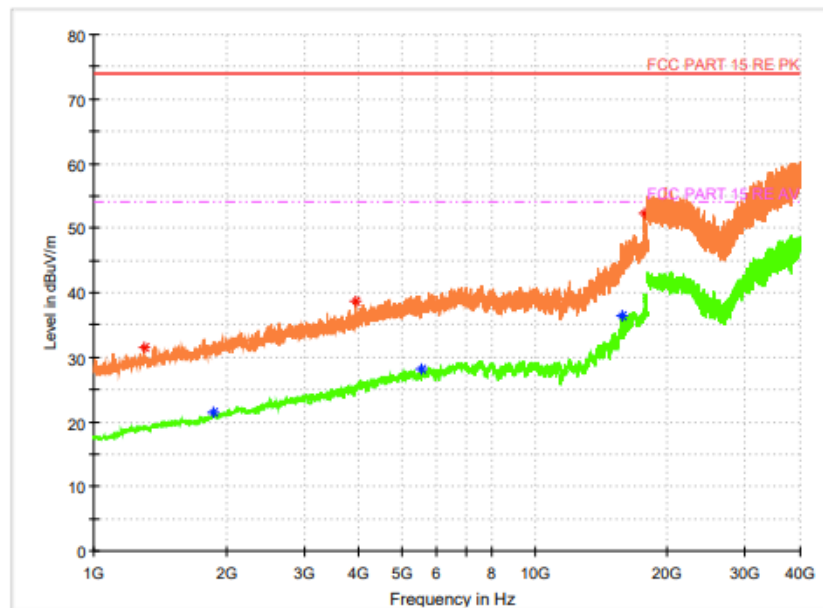

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
1300.900000	31.44	---	74.00	42.56	---	H	0.0	-14.3
1865.300000	---	21.50	54.00	32.50	---	V	45.0	-10.4
3927.400000	38.73	---	74.00	35.27	---	V	0.0	-3.6
5523.700000	---	28.09	54.00	25.91	---	V	225.0	-0.2
15733.900000	---	36.36	54.00	17.64	---	V	0.0	8.7
17806.200000	52.19	---	74.00	21.81	---	H	270.0	14.0

Level = Reading level by receiver + Corr. (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

8.2 Conducted Emissions

AC Port Test Data

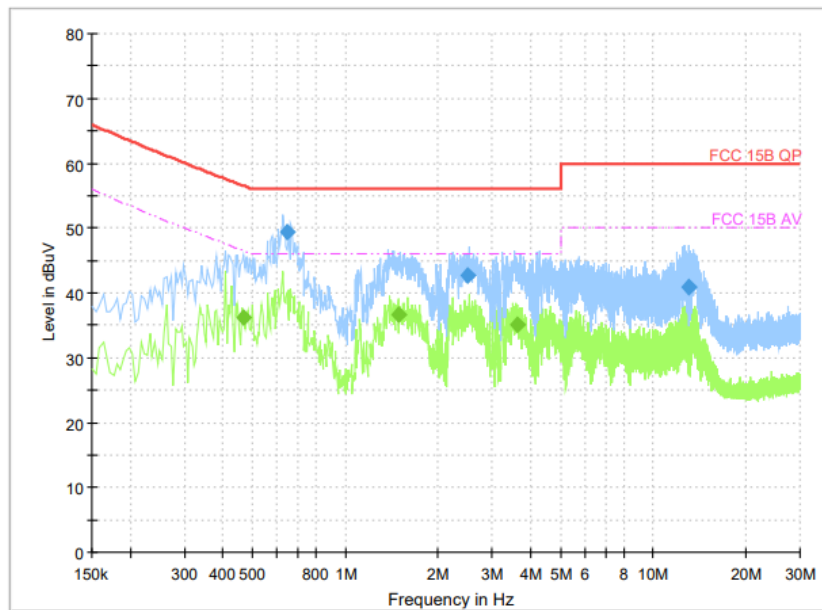

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.469796	---	36.12	46.47	10.35	9.000	N	ON	9.8
0.646886	49.31	---	56.00	6.69	9.000	N	ON	9.8
1.485841	---	36.56	46.00	9.44	9.000	N	ON	9.9
2.506954	42.63	---	56.00	13.37	9.000	N	ON	9.9
3.624409	---	35.17	46.00	10.83	9.000	N	ON	10.0
13.053591	40.94	---	60.00	19.06	9.000	L1	ON	10.1

Note:

Level = Reading level by receiver + Corr. (cable loss+ insertion loss)

The reading level is calculated by software which is not shown in the sheet.