

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2535-2, XT2535-1
FCC ID : IHDT56AV6
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied	5
4. Equipment Under Test (EUT) Information	6
4.1 General Information.....	6
4.2 General LTE SAR Test and Reporting Considerations	7
5. RF Exposure Limits.....	10
5.1 Uncontrolled Environment	10
5.2 Controlled Environment.....	10
6. Specific Absorption Rate (SAR)	11
6.1 Introduction	11
6.2 SAR Definition	11
7. System Description and Setup.....	12
7.1 E-Field Probe	13
7.2 Data Acquisition Electronics (DAE)	13
7.3 Phantom.....	14
7.4 Device Holder.....	15
8. Measurement Procedures.....	16
8.1 Spatial Peak SAR Evaluation	16
8.2 Power Reference Measurement.....	17
8.3 Area Scan.....	17
8.4 Zoom Scan.....	18
8.5 Volume Scan Procedures.....	18
8.6 Power Drift Monitoring.....	18
9. Test Equipment List	19
10. System Verification	20
10.1 Tissue Simulating Liquids.....	20
10.2 Tissue Verification	20
10.3 System Performance Check Results.....	22
11. RF Exposure Positions	23
11.1 Ear and handset reference point	23
11.2 Definition of the cheek position.....	24
11.3 Definition of the tilt position.....	25
11.4 Body Worn Accessory	26
11.5 Product Specific 10g SAR Exposure	27
11.6 Wireless Router	27
12. Conducted RF Output Power (Unit: dBm).....	28
13. Antenna Location	38
14. SAR Test Results	39
14.1 Head SAR	42
14.2 Hotspot SAR	46
14.3 Body Worn Accessory SAR	51
14.4 Product specific 10g SAR.....	54
14.5 Repeated SAR Measurement	56
15. Simultaneous Transmission Analysis	57
15.1 Head Exposure Conditions.....	58
15.2 Hotspot Exposure Conditions.....	59
15.3 Body-Worn Accessory Exposure Conditions	61
15.4 Product specific 10g SAR Exposure Conditions.....	62
15.5 SPLSR Evaluation and Analysis.....	63
16. Uncertainty Assessment.....	70
17. References	71
Appendixes	72
Appendix A. Plots of System Performance Check.....	72
Appendix B. Plots of High SAR Measurement	72
Appendix C. DASY Calibration Certificate.....	72
Appendix D. Test Setup Photos.....	72
Appendix E. Conducted RF Output Power Table	72



Revision History

[illegible]

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2535-2, XT2535-1**, are as follows.

Frequency Band		Highest SAR Summary				Highest Simultaneous Transmission 1g SAR SAR (W/kg)	Highest Simultaneous Transmission 10g SAR SAR (W/kg)
		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Extremity (Separation 0mm)		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	10g SAR (W/kg)		
GSM	GSM850	0.26	1.41	1.39	1.80	1.59	2.63
	GSM1900	0.10	1.40	1.35	1.03		
WCDMA	WCDMA II	0.15	1.35	1.12	0.89		
	WCDMA IV	0.26	1.27	1.39	1.41		
	WCDMA V	0.35	1.40	1.39	1.35		
LTE	LTE Band 2	0.88	1.36	1.31	1.15		
	LTE Band 7	0.84	1.42	1.28	1.83		
	LTE Band 13	0.12	0.93	0.93			
	LTE Band 26/5	0.29	1.37	1.38	1.39		
	LTE Band 38	0.81	1.29	1.16	1.76		
	LTE Band 66/4	0.19	1.24	1.34	1.38		
WLAN	2.4GHz WLAN	0.54	0.79	0.61	0.61	1.54	2.41
	5GHz WLAN	0.70	0.86	0.51	0.96	1.59	2.63
Bluetooth	Bluetooth	0.13	0.15	0.15		1.59	
Date of Testing:		2025/6/24 ~ 2025/8/1					

Remark:

1. This device supports LTE B4 / B5 and B66 / B26. Since the supported frequency span for LTE B4 / B5 falls completely within the support's frequency span for LTE B66 / B26, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B66 / B26.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR02-KS	CN1257	314309

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2535-2, XT2535-1
FCC ID	IHDT56AV6
IMEI Code	Sample 1: 353078410015076/353078410015084, 353078410014939/353078410014947 Sample 2: 353078410023138/353078410023146, 353078410023211/353078410023229 Sample 3: 353078410025612/353078410025620
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 66: 1710 MHz ~ 1780 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink is supported) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	DVT2
SW Version	VVOB35.52
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: - This device supports VoIP in GPRS, EGPRS, WCDMA, and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. - This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. - This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). - This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 12. - This device supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active).	

6. The device implements receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table.
7. There are three samples, the difference between them refer to the XT2535-2, XT2535-1_Operational Description of Product Equality Declaration which is exhibit separately. According to the differences, so sample 1 was chosen to perform full SAR testing, and the sample 2/3 are verified the difference with the sample 1.

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																												
FCC ID	IHDT56AV6																																																																											
Equipment Name	Mobile Cellular Phone																																																																											
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 66: 1710 MHz ~ 1780 MHz																																																																											
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 13: 5MHz, 10MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																																											
uplink modulations used	QPSK / 16QAM / 64QAM																																																																											
LTE Voice / Data requirements	Voice and Data																																																																											
LTE Release Version	R9																																																																											
CA Support	Not Supported																																																																											
LTE MPR permanently built-in by design	<table><tr><th colspan="7">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>							Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																												
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																					
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																						
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																					
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																					
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																					
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																					
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																					
256 QAM	≥ 1						≤ 5																																																																					
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																											
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																											
Power reduction applied to satisfy SAR compliance	Yes, when operating in receiver/hotspot detect mechanism, head/body -worn /hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 14.																																																																											

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20525	836.5	20550	839.5
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 25 MHz		Bandwidth 30 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20875	2512.5	20900	2515
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21325	2557.5	21300	2555
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23255		785.5	
M	23230		782		23255		785.5		23280		788	
H	23255		784.5		23280		787.5		23305		790.5	
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5	26790	824
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5	26940	838
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 25 MHz		Bandwidth 30 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37875	2582.5	37900	2585
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38125	2607.5	38100	2605
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

**<For LTE Overlap Bands Description>**

1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 5	Yes	Yes	Yes	Yes		
LTE Band 26	Yes	Yes	Yes	Yes	Yes	

2) LTE Bands tune up:

Band	Antenna	Head	Hotspot	Bodyworn &Extremity	Default
		DSI 2	DSI 7	DSI 4	
		Tune-up Limit	Tune-up Limit	Tune-up Limit	
LTE Band 66(4)	Ant 0	24.00	16.00	16.00	24.00
LTE Band 26(5)	Ant 0	24.00	24.00	24.00	24.00

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

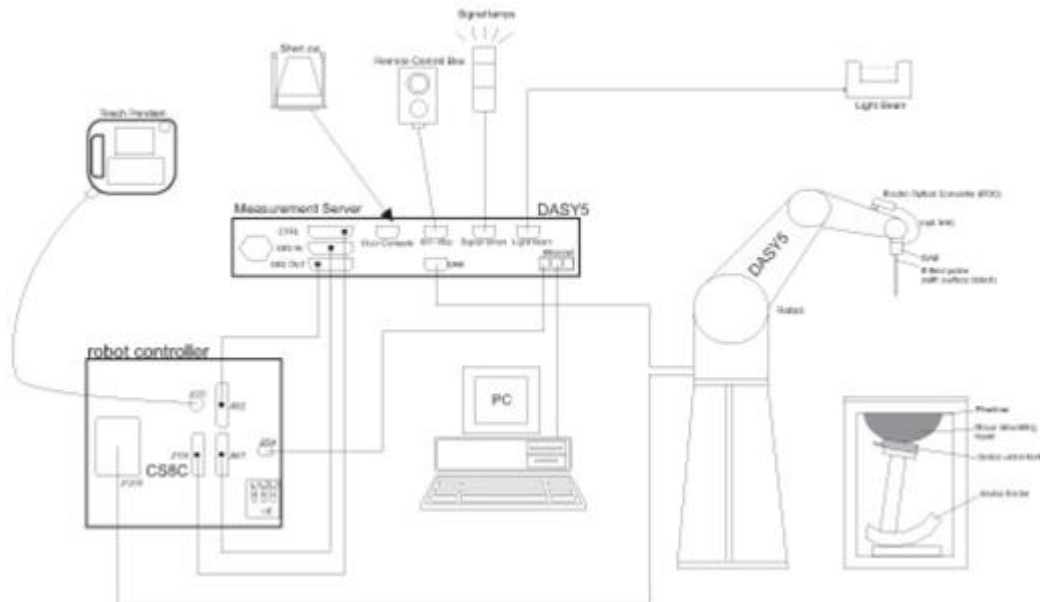

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 10 GHz Linearity: ± 0.2 dB (30 MHz – 10 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	Mar. 12, 2025	Mar. 11, 2026
SPEAG	835MHz System Validation Kit	D835V2	4d162	Dec. 13, 2024	Dec. 12, 2025
SPEAG	1750MHz System Validation Kit	D1750V2	1090	Mar. 12, 2025	Mar. 11, 2026
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Dec. 16, 2024	Dec. 15, 2025
SPEAG	2450MHz System Validation Kit	D2450V2	1095	Feb. 08, 2024	Feb. 06, 2026
SPEAG	2600MHz System Validation Kit	D2600V2	1112	Dec. 18, 2023	Dec. 16, 2025
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	Sep. 23, 2022	Sep. 21, 2025
SPEAG	Data Acquisition Electronics	DAE4	1279	Aug. 20, 2024	Aug. 19, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	Feb. 19, 2025	Feb. 18, 2026
SPEAG	SAM Twin Phantom	SAM Twin	TP-1842	NCR	NCR
Beichuang	Thermo-Hygrometer	HTC-1	1949250	Jan. 11, 2025	Jan. 10, 2026
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6262306175	Jul. 04, 2024	Jul. 03, 2025
Anritsu	Radio Communication Analyzer	MT8820C	6201563900	Jul. 02, 2025	Jul. 01, 2026
Agilent	ENA Series Network Analyzer	E5071C	MY46112129	Jul. 04, 2024	Jul. 03, 2025
Agilent	ENA Series Network Analyzer	E5071C	MY46112129	Jul. 02, 2025	Jul. 01, 2026
SPEAG	Dielectric Probe Kit	DAK-3.5	1144	Aug. 20, 2024	Aug. 19, 2025
Anritsu	Vector Signal Generator	MG3710A	6201682672	Jan. 03, 2025	Jan. 02, 2026
Rohde & Schwarz	Power Meter	NRVD	102081	Jul. 04, 2024	Jul. 03, 2025
Rohde & Schwarz	Power Meter	NRVD	102081	Jul. 02, 2025	Jul. 01, 2026
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	Jul. 04, 2024	Jul. 03, 2025
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	Jul. 02, 2025	Jul. 01, 2026
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	Jul. 04, 2024	Jul. 03, 2025
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	Jul. 02, 2025	Jul. 01, 2026
R&S	BLUETOOTH TESTER	CBT	101246	Jul. 04, 2024	Jul. 03, 2025
R&S	BLUETOOTH TESTER	CBT	101246	Jul. 03, 2025	Jul. 02, 2026
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	Oct. 11, 2024	Oct. 10, 2025
TES	DIGITAC THERMOMETER	TYPE-K	220305411	Jan. 02, 2025	Jan. 01, 2026
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	

Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check.
- Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

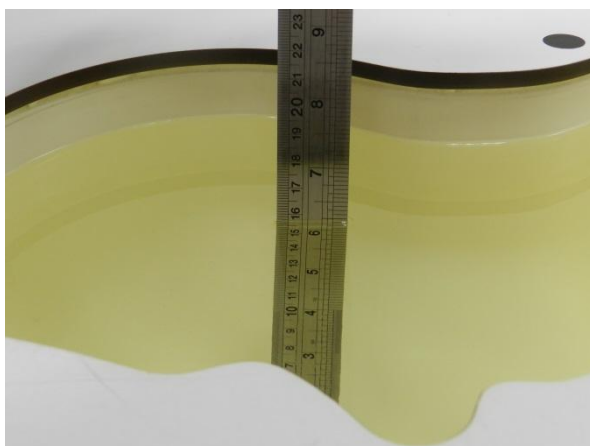


Fig 11.1 Photo of Liquid Height for Head SAR



Fig 11.2 Photo of Liquid Height for Body SAR

10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.6	0.886	42.915	0.89	41.9	-0.45	2.42	±5.0	2025/6/24
750	Head	22.7	0.891	42.877	0.89	41.9	0.11	2.33	±5.0	2025/6/25
750	Head	22.8	0.884	42.886	0.89	41.9	-0.67	2.35	±5.0	2025/6/26
835	Head	22.7	0.917	42.61	0.9	41.5	1.89	2.67	±5.0	2025/6/25
835	Head	22.9	0.914	42.598	0.9	41.5	1.56	2.65	±5.0	2025/6/26
835	Head	22.8	0.921	42.525	0.9	41.5	2.33	2.47	±5.0	2025/6/27
1750	Head	22.9	1.374	40.622	1.37	40.1	0.29	1.3	±5.0	2025/6/26
1750	Head	22.7	1.363	40.647	1.37	40.1	-0.51	1.36	±5.0	2025/6/27
1750	Head	22.8	1.374	40.62	1.37	40.1	0.29	1.3	±5.0	2025/6/28
1900	Head	22.7	1.44	39.087	1.4	40	2.86	-2.28	±5.0	2025/6/28
1900	Head	22.6	1.443	39.122	1.4	40	3.07	-2.2	±5.0	2025/6/29
1900	Head	22.8	1.441	39.217	1.4	40	2.93	-1.96	±5.0	2025/6/30
2450	Head	22.7	1.765	39.26	1.8	39.2	-1.94	0.15	±5.0	2025/7/1
2600	Head	22.6	1.915	38.789	1.96	39	-2.3	-0.54	±5.0	2025/6/27
2600	Head	22.6	1.917	38.877	1.96	39	-2.19	-0.32	±5.0	2025/6/28
2600	Head	22.7	1.908	38.839	1.96	39	-2.65	-0.41	±5.0	2025/6/29
5250	Head	22.6	4.69	36.266	4.71	36	-0.42	0.88	±5.0	2025/7/2
5600	Head	22.9	4.988	35.851	5.07	35.5	-1.62	0.99	±5.0	2025/7/3
5750	Head	22.7	5.168	35.739	5.22	35.4	-1	1.1	±5.0	2025/7/4
5250	Head	22.5	4.631	36.287	4.71	36.00	-1.68	0.80	±5.0	2025/8/1
5600	Head	22.8	4.99	35.879	5.07	35.50	-1.58	1.07	±5.0	2025/8/1

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2025/6/24	750	Head	50	1087	3857	1279	0.419	8.68	8.38	-3.46	0.282	5.61	5.64	0.53
2025/6/25	750	Head	50	1087	3857	1279	0.422	8.68	8.44	-2.76	0.283	5.61	5.66	0.89
2025/6/26	750	Head	50	1087	3857	1279	0.418	8.68	8.36	-3.69	0.281	5.61	5.62	0.18
2025/6/25	835	Head	50	4d162	3857	1279	0.486	9.08	9.72	7.05	0.314	5.85	6.28	7.35
2025/6/26	835	Head	50	4d162	3857	1279	0.485	9.08	9.7	6.83	0.311	5.85	6.22	6.32
2025/6/27	835	Head	50	4d162	3857	1279	0.488	9.08	9.76	7.49	0.316	5.85	6.32	8.03
2025/6/26	1750	Head	50	1090	3857	1279	1.89	36.6	37.8	3.28	1.03	19.5	20.6	5.64
2025/6/27	1750	Head	50	1090	3857	1279	1.88	36.6	37.6	2.73	1.02	19.5	20.4	4.62
2025/6/28	1750	Head	50	1090	3857	1279	1.89	36.6	37.8	3.28	1.03	19.5	20.6	5.64
2025/6/28	1900	Head	50	5d182	3857	1279	1.95	39.8	39	-2.01	1.02	21	20.4	-2.86
2025/6/29	1900	Head	50	5d182	3857	1279	1.95	39.8	39	-2.01	1.02	21	20.4	-2.86
2025/6/30	1900	Head	50	5d182	3857	1279	1.95	39.8	39	-2.01	1.02	21	20.4	-2.86
2025/7/1	2450	Head	50	1095	3857	1279	2.67	52.6	53.4	1.52	1.27	24.7	25.4	2.83
2025/6/27	2600	Head	50	1112	3857	1279	2.72	55.1	54.4	-1.27	1.26	24.8	25.2	1.61
2025/6/28	2600	Head	50	1112	3857	1279	2.73	55.1	54.6	-0.91	1.26	24.8	25.2	1.61
2025/6/29	2600	Head	50	1112	3857	1279	2.72	55.1	54.4	-1.27	1.25	24.8	25	0.81
2025/7/2	5250	Head	50	1113	3857	1279	4.13	81.5	82.6	1.35	1.18	23.3	23.6	1.29
2025/7/3	5600	Head	50	1113	3857	1279	4.34	82.6	86.8	5.08	1.22	23.7	24.4	2.95
2025/7/4	5750	Head	50	1113	3857	1279	3.67	80.8	73.4	-9.16	1.09	23	21.8	-5.22
2025/8/1	5250	Head	50	1113	3857	1279	4.08	81.5	81.6	0.12	1.17	23.3	23.4	0.43
2025/8/1	5600	Head	50	1113	3857	1279	4.34	82.6	86.8	5.08	1.22	23.7	24.4	2.95

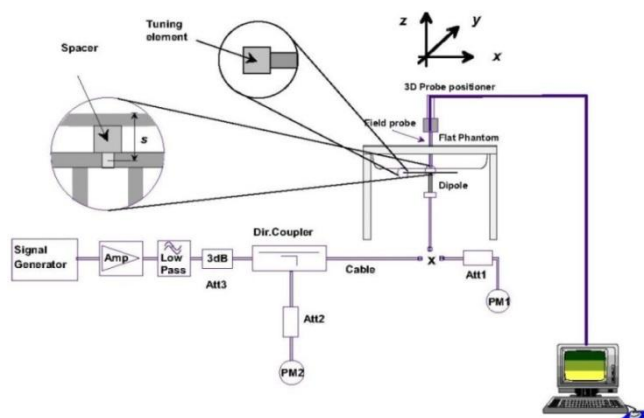


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

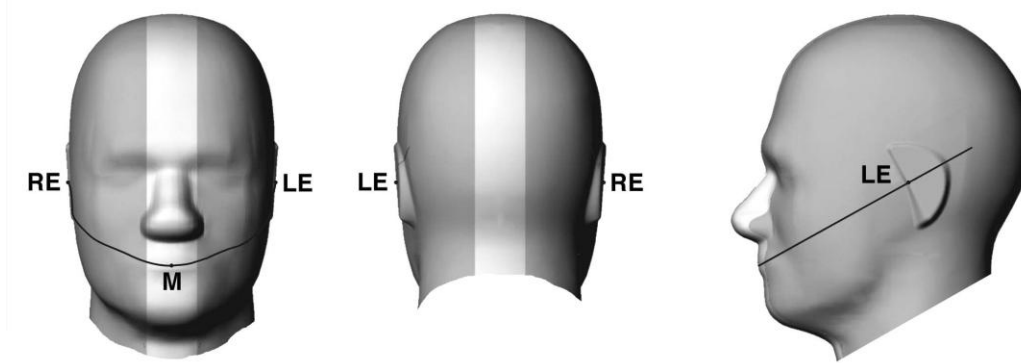


Fig 12.1.1 Front, back, and side views of SAM twin phantom

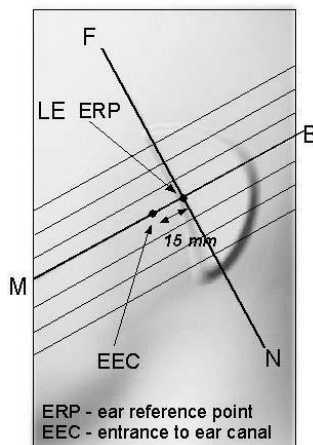


Fig 12.1.2 Close-up side view of phantom showing the ear region.

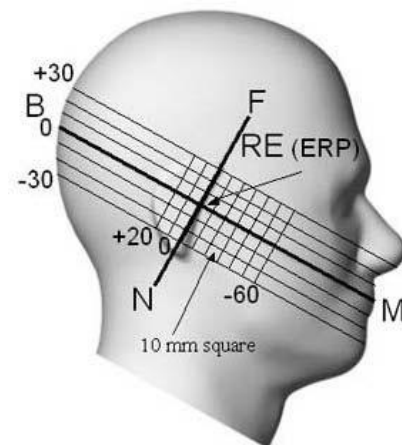


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

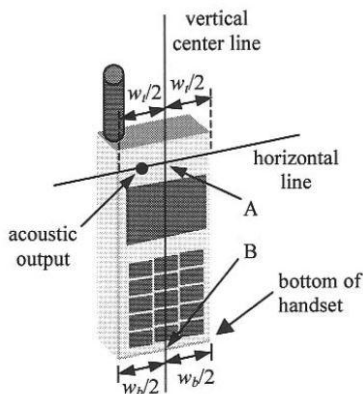


Fig 12.2.1 Handset vertical and horizontal reference lines—"fixed case"

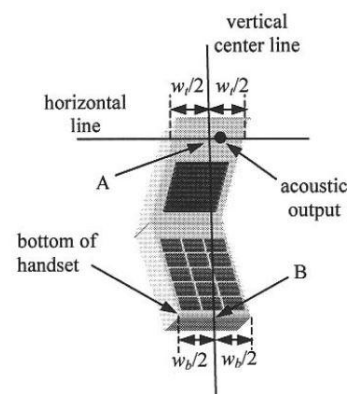


Fig 12.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

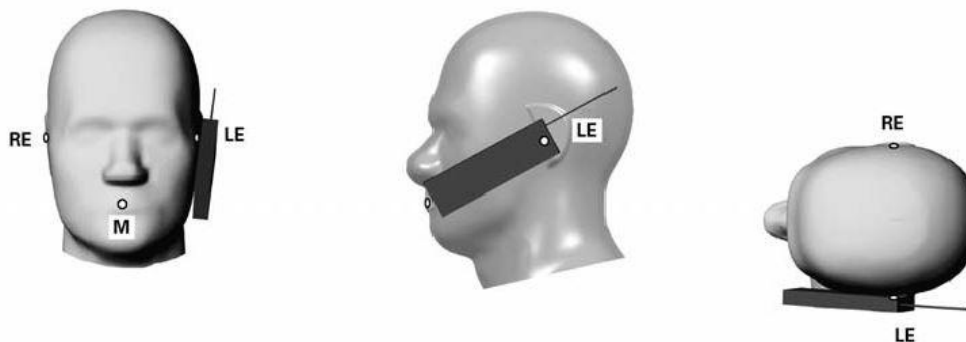


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

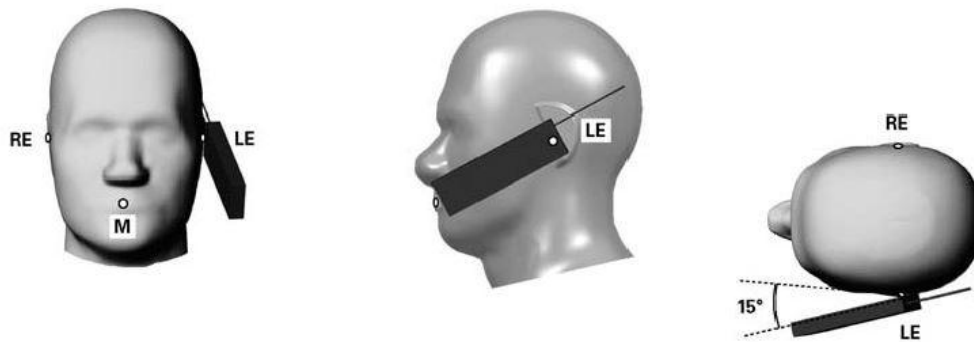


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

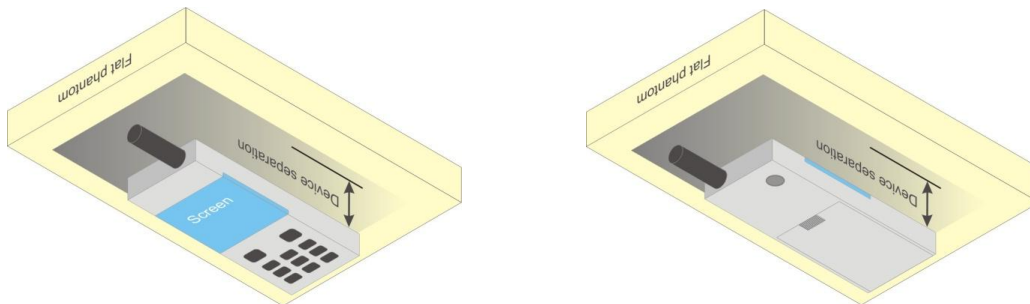


Fig 12.4 Body Worn Position

11.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

11.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

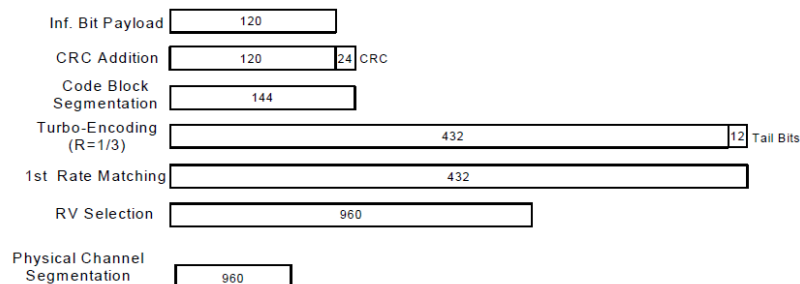


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- i. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- ii. The RF path losses were compensated into the measurements.
- iii. A call was established between EUT and Base Station with following setting * :
 4. Call Configs = 5.2E:HSPA+:UL with 16QAM
 5. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 6. Set Channel Params
 7. Set Cell Power = -86 dBm
 8. Set Channel Type = HSPA
 9. Set UE Target Power =21 dBm
 10. Power Ctrl Mode= All Up Bits
 11. Set Manual Uplink DPCH Bc/Bd = Manual
 12. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 13. Set HSPA Conn DL Channel Levels
 14. Set HS-SCCH Configs
 15. Set RB Test Mode Setup
 16. Set Common HSUPA Parameters
 17. Set Serving Grant
 18. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- iv. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{fs} = 30/15 * \beta_c$.
 Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).
 Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.
 Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.
 Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.


Setup Configuration
<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B4 / B5 SAR test was covered by B66 / B26; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 16QAM and 64QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

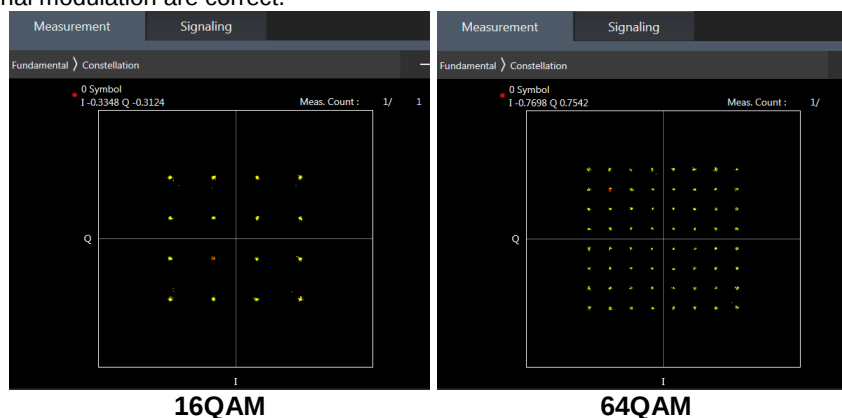

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

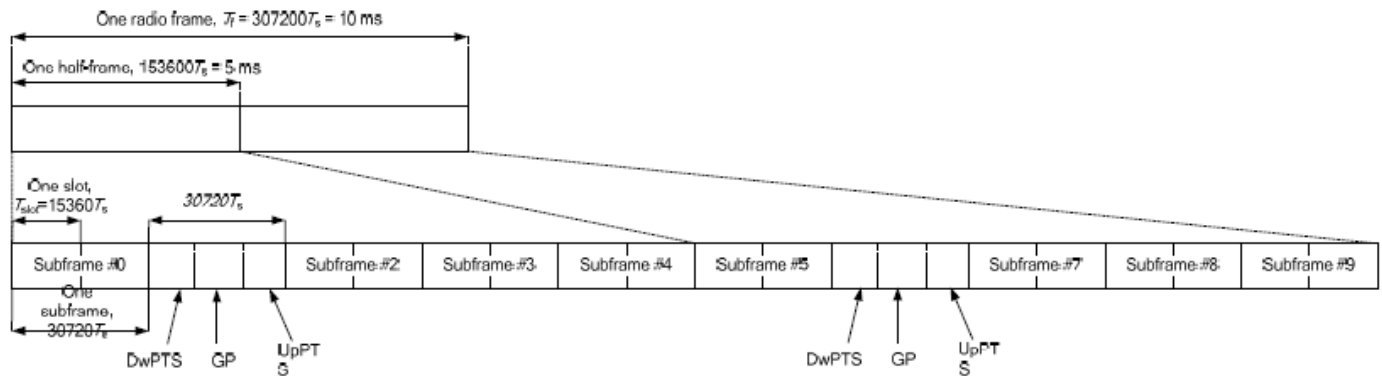


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE TDD Power class 3

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<WLAN Conducted Power>


General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle are 76.69% as following figure, for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation.

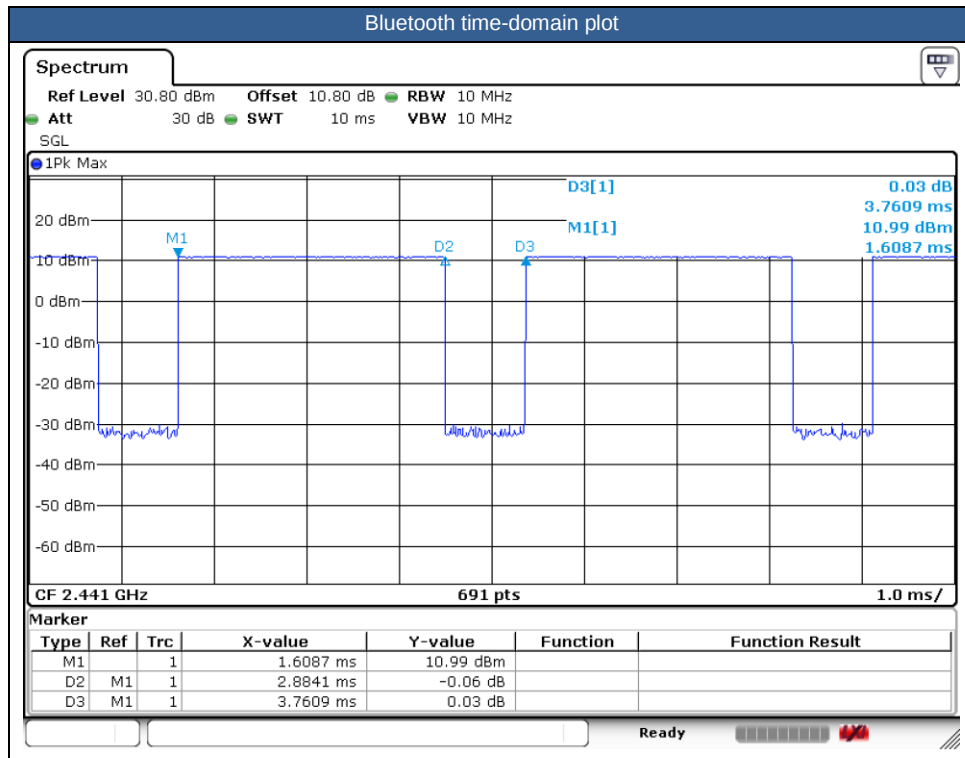



13. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For SAR testing of Bluetooth signal with 83.3% theoretical duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle) *83.3%".
 - d. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - e. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - f. For TDD LTE SAR measurement of power class 3, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = Measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The device implements receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN/WLAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of GSM850/1900, WCDMA Band II/IV/V, LTE Band 2/4/5/7/26/66/38, WLAN 2.4/5.2/5.8GHz, therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
6. Although the headset SAR is greater than 0.8 W/kg, the headset SAR verified the worst of the non-headset SAR and less than non-headset SAR, so there is no need to be tested other channels.
7. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot SAR.
8. For Phablet devices, when hotspot mode is not supported, Product specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+ .

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B4 / B5 SAR test was covered by B66 / B26; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

ECI status description:

The device has the following DSI state which used at different exposure condition.

Exposure Condition	DSI	Trigger conditions
Head SAR	DSI2	Earpiece On
Hotspot SAR	DSI7	Hotspot On
Body worn/Extremity SAR	DSI4	receiver Off

14.1 Head SAR

【GSM SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Right Cheek	0mm	Ant 0	DSI 2	189	836.4	1	29.48	30.50	1.265	0.15	0.198	0.250
	GSM850	GPRS 4 Tx slots	Right Tilted	0mm	Ant 0	DSI 2	189	836.4	1	29.48	30.50	1.265	0.01	0.110	0.139
01	GSM850	GPRS 4 Tx slots	Left Cheek	0mm	Ant 0	DSI 2	189	836.4	1	29.48	30.50	1.265	0.19	0.208	0.263
	GSM850	GPRS 4 Tx slots	Left Tilted	0mm	Ant 0	DSI 2	189	836.4	1	29.48	30.50	1.265	0.05	0.115	0.145
02	GSM1900	GPRS 4 Tx slots	Right Cheek	0mm	Ant 0	DSI 2	810	1909.8	1	25.54	26.50	1.247	0.03	0.079	0.099
	GSM1900	GPRS 4 Tx slots	Right Tilted	0mm	Ant 0	DSI 2	810	1909.8	1	25.54	26.50	1.247	-0.15	0.048	0.060
	GSM1900	GPRS 4 Tx slots	Left Cheek	0mm	Ant 0	DSI 2	810	1909.8	1	25.54	26.50	1.247	-0.08	0.064	0.080
	GSM1900	GPRS 4 Tx slots	Left Tilted	0mm	Ant 0	DSI 2	810	1909.8	1	25.54	26.50	1.247	0.08	0.068	0.085

【WCDMA SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	9400	1880.0	1	23.36	24.00	1.159	0.02	0.125	0.145
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	9400	1880.0	1	23.36	24.00	1.159	-0.18	0.078	0.090
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	9400	1880.0	1	23.36	24.00	1.159	0.12	0.117	0.136
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	9400	1880.0	1	23.36	24.00	1.159	-0.16	0.113	0.131
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	9400	1880.0	2	23.36	24.00	1.159	0.04	0.110	0.127
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	9400	1880.0	3	23.36	24.00	1.159	0.02	0.106	0.123
04	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	1413	1732.6	1	23.34	24.00	1.164	0.17	0.223	0.260
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	1413	1732.6	1	23.34	24.00	1.164	0.18	0.109	0.127
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	1413	1732.6	1	23.34	24.00	1.164	0.15	0.182	0.212
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	1413	1732.6	1	23.34	24.00	1.164	0.13	0.160	0.186
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	1413	1732.6	2	23.34	24.00	1.164	-0.01	0.154	0.179
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	1413	1732.6	3	23.34	24.00	1.164	0.04	0.159	0.185
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	4182	836.4	1	23.45	24.00	1.135	-0.02	0.302	0.343
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	4182	836.4	1	23.45	24.00	1.135	0.10	0.186	0.211
05	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	4182	836.4	1	23.45	24.00	1.135	0.16	0.310	0.352
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	4182	836.4	1	23.45	24.00	1.135	-0.07	0.190	0.216
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	4182	836.4	2	23.45	24.00	1.135	0.04	0.254	0.288
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	4182	836.4	3	23.45	24.00	1.135	0.02	0.213	0.242



【LTE SAR】

Plot No	Band	BW	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	Ant 0	DSI 2	18900	1880.0	1	22.91	24.00	1.285			0.08	0.109	0.140
	LTE Band 2	20M	QPSK	50	0	Right Cheek	0mm	Ant 0	DSI 2	18900	1880.0	1	22.08	23.00	1.236			0.08	0.090	0.111
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	Ant 0	DSI 2	18900	1880.0	1	22.91	24.00	1.285			-0.17	0.058	0.075
	LTE Band 2	20M	QPSK	50	0	Right Tilted	0mm	Ant 0	DSI 2	18900	1880.0	1	22.08	23.00	1.236			0.09	0.057	0.070
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	Ant 0	DSI 2	18900	1880.0	1	22.91	24.00	1.285			-0.16	0.086	0.111
	LTE Band 2	20M	QPSK	50	0	Left Cheek	0mm	Ant 0	DSI 2	18900	1880.0	1	22.08	23.00	1.236			-0.01	0.077	0.095
	LTE Band 2	20M	QPSK	1	0	Left Tilted	0mm	Ant 0	DSI 2	18900	1880.0	1	22.91	24.00	1.285			0.16	0.097	0.125
	LTE Band 2	20M	QPSK	50	0	Left Tilted	0mm	Ant 0	DSI 2	18900	1880.0	1	22.08	23.00	1.236			-0.18	0.084	0.104
	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	Ant 1	DSI 2	18900	1880.0	1	13.39	15.00	1.449			-0.18	0.477	0.691
	LTE Band 2	20M	QPSK	50	0	Right Cheek	0mm	Ant 1	DSI 2	18900	1880.0	1	13.36	15.00	1.459			-0.18	0.403	0.588
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	Ant 1	DSI 2	18900	1880.0	1	13.39	15.00	1.449			0.07	0.575	0.833
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	Ant 1	DSI 2	18700	1860.0	1	13.29	15.00	1.483			0.03	0.479	0.710
06	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	Ant 1	DSI 2	19100	1900.0	1	13.31	15.00	1.476			-0.08	0.599	0.884
	LTE Band 2	20M	QPSK	50	0	Right Tilted	0mm	Ant 1	DSI 2	18900	1880.0	1	13.36	15.00	1.459			0.10	0.493	0.719
	LTE Band 2	20M	QPSK	100	0	Right Tilted	0mm	Ant 1	DSI 2	18900	1880.0	1	13.22	15.00	1.507			-0.17	0.493	0.743
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	Ant 1	DSI 2	18900	1880.0	1	13.39	15.00	1.449			-0.05	0.345	0.500
	LTE Band 2	20M	QPSK	50	0	Left Cheek	0mm	Ant 1	DSI 2	18900	1880.0	1	13.36	15.00	1.459			0.06	0.293	0.427
	LTE Band 2	20M	QPSK	1	0	Left Tilted	0mm	Ant 1	DSI 2	18900	1880.0	1	13.39	15.00	1.449			-0.14	0.444	0.643
	LTE Band 2	20M	QPSK	50	0	Left Tilted	0mm	Ant 1	DSI 2	18900	1880.0	1	13.36	15.00	1.459			-0.08	0.379	0.553
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	Ant 1	DSI 2	19100	1900.0	2	13.31	15.00	1.476			-0.03	0.402	0.593
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	Ant 1	DSI 2	19100	1900.0	3	13.31	15.00	1.476			0.08	0.433	0.639
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	Ant 0	DSI 2	21100	2535.0	1	23.42	24.00	1.143			-0.18	0.084	0.096
	LTE Band 7	20M	QPSK	50	0	Right Cheek	0mm	Ant 0	DSI 2	21100	2535.0	1	22.57	23.00	1.104			0.07	0.088	0.097
	LTE Band 7	20M	QPSK	1	0	Right Tilted	0mm	Ant 0	DSI 2	21100	2535.0	1	23.42	24.00	1.143			-0.07	0.001	0.001
	LTE Band 7	20M	QPSK	50	0	Right Tilted	0mm	Ant 0	DSI 2	21100	2535.0	1	22.57	23.00	1.104			-0.02	0.001	0.001
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Ant 0	DSI 2	21100	2535.0	1	23.42	24.00	1.143			-0.03	0.070	0.080
	LTE Band 7	20M	QPSK	50	0	Left Cheek	0mm	Ant 0	DSI 2	21100	2535.0	1	22.57	23.00	1.104			0.11	0.057	0.063
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	Ant 0	DSI 2	21100	2535.0	1	23.42	24.00	1.143			0.15	0.050	0.057
	LTE Band 7	20M	QPSK	50	0	Left Tilted	0mm	Ant 0	DSI 2	21100	2535.0	1	22.57	23.00	1.104			-0.02	0.001	0.001
07	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	Ant 1	DSI 2	21100	2535.0	1	17.49	18.00	1.125			-0.02	0.744	0.837
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	Ant 1	DSI 2	20850	2510.0	1	17.45	18.00	1.135			-0.03	0.658	0.747
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	Ant 1	DSI 2	21350	2560.0	1	17.42	18.00	1.143			0.00	0.725	0.829
	LTE Band 7	20M	QPSK	50	0	Right Cheek	0mm	Ant 1	DSI 2	21100	2535.0	1	17.45	18.00	1.135			0.00	0.693	0.787
	LTE Band 7	20M	QPSK	100	0	Right Cheek	0mm	Ant 1	DSI 2	21100	2535.0	1	17.50	18.00	1.122			-0.13	0.630	0.707
	LTE Band 7	20M	QPSK	1	0	Right Tilted	0mm	Ant 1	DSI 2	21100	2535.0	1	17.49	18.00	1.125			-0.10	0.569	0.640
	LTE Band 7	20M	QPSK	50	0	Right Tilted	0mm	Ant 1	DSI 2	21100	2535.0	1	17.45	18.00	1.135			-0.03	0.486	0.552
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Ant 1	DSI 2	21100	2535.0	1	17.49	18.00	1.125			0.05	0.413	0.465
	LTE Band 7	20M	QPSK	50	0	Left Cheek	0mm	Ant 1	DSI 2	21100	2535.0	1	17.45	18.00	1.135			0.08	0.353	0.401
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	Ant 1	DSI 2	21100	2535.0	1	17.49	18.00	1.125			0.14	0.556	0.626
	LTE Band 7	20M	QPSK	50	0	Left Tilted	0mm	Ant 1	DSI 2	21100	2535.0	1	17.45	18.00	1.135			-0.00	0.474	0.538
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	Ant 1	DSI 2	21100	2535.0	2	17.49	18.00	1.125			-0.07	0.701	0.789
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	Ant 1	DSI 2	21100	2535.0	3	17.49	18.00	1.125			0.04	0.717	0.807
08	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	Ant 0	DSI 2	23230	782.0	1	23.15	24.00	1.216			0.07	0.099	0.120
	LTE Band 13	10M	QPSK	25	0	Right Cheek	0mm	Ant 0	DSI 2	23230	782.0	1	22.12	23.00	1.225			-0.06	0.072	0.088
	LTE Band 13	10M	QPSK	1	0	Right Tilted	0mm	Ant 0	DSI 2	23230	782.0	1	23.15	24.00	1.216			0.13	0.062	0.075
	LTE Band 13	10M	QPSK	25	0	Right Tilted	0mm	Ant 0	DSI 2	23230	782.0	1	22.12	23.00	1.225			-0.06	0.043	0.053
	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	Ant 0	DSI 2	23230	782.0	1	23.15	24.00	1.216			0.05	0.096	0.117
	LTE Band 13	10M	QPSK	25	0	Left Cheek	0mm	Ant 0	DSI 2	23230	782.0	1	22.12	23.00	1.225			-0.16	0.067	0.082
	LTE Band 13	10M	QPSK	1	0	Left Tilted	0mm	Ant 0	DSI 2	23230	782.0	1	23.15	24.00	1.216			-0.10	0.050	0.061
	LTE Band 13	10M	QPSK	25	0	Left Tilted	0mm	Ant 0	DSI 2	23230	782.0	1	22.12	23.00	1.225			0.07	0.036	0.044
	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	Ant 0	DSI 2	23230	782.0	2	23.15	24.00	1.216			0.04	0.074	0.090



FCC SAR Test Report

Report No. : FA552802

	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	Ant 0	DSI 2	23230	782.0	3	23.15	24.00	1.216			0.01	0.064	0.078
09	LTE Band 26	15M	QPSK	1	0	Right Cheek	0mm	Ant 0	DSI 2	26865	831.5	1	23.24	24.00	1.191			0.08	0.245	0.292
	LTE Band 26	15M	QPSK	36	0	Right Cheek	0mm	Ant 0	DSI 2	26865	831.5	1	22.31	23.00	1.172			0.19	0.211	0.247
	LTE Band 26	15M	QPSK	1	0	Right Tilted	0mm	Ant 0	DSI 2	26865	831.5	1	23.24	24.00	1.191			0.17	0.147	0.175
	LTE Band 26	15M	QPSK	36	0	Right Tilted	0mm	Ant 0	DSI 2	26865	831.5	1	22.31	23.00	1.172			-0.09	0.126	0.148
	LTE Band 26	15M	QPSK	1	0	Left Cheek	0mm	Ant 0	DSI 2	26865	831.5	1	23.24	24.00	1.191			0.01	0.238	0.283
	LTE Band 26	15M	QPSK	36	0	Left Cheek	0mm	Ant 0	DSI 2	26865	831.5	1	22.31	23.00	1.172			-0.07	0.205	0.240
	LTE Band 26	15M	QPSK	1	0	Left Tilted	0mm	Ant 0	DSI 2	26865	831.5	1	23.24	24.00	1.191			0.14	0.136	0.162
	LTE Band 26	15M	QPSK	36	0	Left Tilted	0mm	Ant 0	DSI 2	26865	831.5	1	22.31	23.00	1.172			-0.03	0.118	0.138
10	LTE Band 66	20M	QPSK	1	0	Right Cheek	0mm	Ant 0	DSI 2	132322	1745.0	1	22.92	24.00	1.282			0.07	0.151	0.194
	LTE Band 66	20M	QPSK	50	0	Right Cheek	0mm	Ant 0	DSI 2	132322	1745.0	1	22.03	23.00	1.250			-0.02	0.121	0.151
	LTE Band 66	20M	QPSK	1	0	Right Tilted	0mm	Ant 0	DSI 2	132322	1745.0	1	22.92	24.00	1.282			0.07	0.078	0.100
	LTE Band 66	20M	QPSK	50	0	Right Tilted	0mm	Ant 0	DSI 2	132322	1745.0	1	22.03	23.00	1.250			-0.17	0.068	0.085
	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	Ant 0	DSI 2	132322	1745.0	1	22.92	24.00	1.282			-0.11	0.126	0.162
	LTE Band 66	20M	QPSK	50	0	Left Cheek	0mm	Ant 0	DSI 2	132322	1745.0	1	22.03	23.00	1.250			-0.07	0.107	0.134
	LTE Band 66	20M	QPSK	1	0	Left Tilted	0mm	Ant 0	DSI 2	132322	1745.0	1	22.92	24.00	1.282			0.09	0.105	0.135
	LTE Band 66	20M	QPSK	50	0	Left Tilted	0mm	Ant 0	DSI 2	132322	1745.0	1	22.03	23.00	1.250			0.02	0.093	0.116
	LTE Band 38	20M	QPSK	1	0	Right Cheek	0mm	Ant 0	DSI 2	38000	2595.0	1	23.35	24.00	1.161	62.9	1.006	-0.12	0.060	0.070
	LTE Band 38	20M	QPSK	50	0	Right Cheek	0mm	Ant 0	DSI 2	38000	2595.0	1	22.18	23.00	1.208	62.9	1.006	0.03	0.049	0.060
	LTE Band 38	20M	QPSK	1	0	Right Tilted	0mm	Ant 0	DSI 2	38000	2595.0	1	23.35	24.00	1.161	62.9	1.006	0.06	0.001	0.001
	LTE Band 38	20M	QPSK	50	0	Right Tilted	0mm	Ant 0	DSI 2	38000	2595.0	1	22.18	23.00	1.208	62.9	1.006	-0.08	0.001	0.001
	LTE Band 38	20M	QPSK	1	0	Left Cheek	0mm	Ant 0	DSI 2	38000	2595.0	1	23.35	24.00	1.161	62.9	1.006	0.18	0.001	0.001
	LTE Band 38	20M	QPSK	50	0	Left Cheek	0mm	Ant 0	DSI 2	38000	2595.0	1	22.18	23.00	1.208	62.9	1.006	-0.15	0.001	0.001
	LTE Band 38	20M	QPSK	1	0	Left Tilted	0mm	Ant 0	DSI 2	38000	2595.0	1	23.35	24.00	1.161	62.9	1.006	0.02	0.001	0.001
	LTE Band 38	20M	QPSK	50	0	Left Tilted	0mm	Ant 0	DSI 2	38000	2595.0	1	22.18	23.00	1.208	62.9	1.006	0.03	0.001	0.001
11	LTE Band 38	20M	QPSK	1	0	Right Cheek	0mm	Ant 1	DSI 2	38000	2595.0	1	20.37	20.50	1.030	62.9	1.006	0.06	0.777	0.805
	LTE Band 38	20M	QPSK	50	0	Right Cheek	0mm	Ant 1	DSI 2	38000	2595.0	1	20.35	20.50	1.035	62.9	1.006	0.18	0.647	0.674
	LTE Band 38	20M	QPSK	100	0	Right Cheek	0mm	Ant 1	DSI 2	38000	2595.0	1	20.28	20.50	1.052	62.9	1.006	-0.09	0.652	0.690
	LTE Band 38	20M	QPSK	1	0	Right Tilted	0mm	Ant 1	DSI 2	38000	2595.0	1	20.37	20.50	1.030	62.9	1.006	-0.01	0.601	0.623
	LTE Band 38	20M	QPSK	50	0	Right Tilted	0mm	Ant 1	DSI 2	38000	2595.0	1	20.35	20.50	1.035	62.9	1.006	0.02	0.499	0.520
	LTE Band 38	20M	QPSK	1	0	Left Cheek	0mm	Ant 1	DSI 2	38000	2595.0	1	20.37	20.50	1.030	62.9	1.006	0.19	0.421	0.436
	LTE Band 38	20M	QPSK	50	0	Left Cheek	0mm	Ant 1	DSI 2	38000	2595.0	1	20.35	20.50	1.035	62.9	1.006	0.13	0.341	0.355
	LTE Band 38	20M	QPSK	1	0	Left Tilted	0mm	Ant 1	DSI 2	38000	2595.0	1	20.37	20.50	1.030	62.9	1.006	-0.13	0.554	0.574
	LTE Band 38	20M	QPSK	50	0	Left Tilted	0mm	Ant 1	DSI 2	38000	2595.0	1	20.35	20.50	1.035	62.9	1.006	-0.05	0.458	0.477

[WLAN 2.4GHz_5GHz SAR]

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 3	Standalone	11	2462.0	1	14.61	15.50	1.227	99.11	1.009	0.05	0.181	0.224
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 3	Standalone	11	2462.0	1	14.61	15.50	1.227	99.11	1.009	-0.14	0.206	0.255
12	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 3	Standalone	11	2462.0	1	14.61	15.50	1.227	99.11	1.009	0.04	0.434	0.537
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 3	Standalone	11	2462.0	1	14.61	15.50	1.227	99.11	1.009	-0.10	0.371	0.459
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 3	Standalone	11	2462.0	2	14.61	15.50	1.227	99.11	1.009	-0.01	0.240	0.297
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 3	Standalone	11	2462.0	3	14.61	15.50	1.227	99.11	1.009	0.04	0.302	0.374
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 3	Standalone	54	5270	1	14.33	16.00	1.469	93.54	1.069	-0.12	0.173	0.272
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 3	Standalone	54	5270	1	14.33	16.00	1.469	93.54	1.069	-0.05	0.212	0.333
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 3	Standalone	54	5270	1	14.33	16.00	1.469	93.54	1.069	0.07	0.235	0.369
13	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 3	Standalone	54	5270	1	14.33	16.00	1.469	93.54	1.069	0.06	0.346	0.543
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 3	Standalone	54	5270	2	14.33	16.00	1.469	93.54	1.069	-0.01	0.324	0.509
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 3	Standalone	54	5270	3	14.33	16.00	1.469	93.54	1.069	0.01	0.254	0.399
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 3	Standalone	122	5610	1	13.44	15.00	1.432	87.55	1.142	-0.02	0.188	0.308
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 3	Standalone	122	5610	1	13.44	15.00	1.432	87.55	1.142	0.19	0.221	0.361
14	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 3	Standalone	122	5610	1	13.44	15.00	1.433	87.55	1.142	0.04	0.427	0.699
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 3	Standalone	122	5610	1	13.44	15.00	1.432	87.55	1.142	0.13	0.341	0.558
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 3	Standalone	122	5610	2	13.44	15.00	1.432	87.55	1.142	0.07	0.316	0.517
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 3	Standalone	122	5610	3	13.44	15.00	1.432	87.55	1.142	0.05	0.236	0.386
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 3	Standalone	155	5775.0	1	12.90	14.50	1.445	87.55	1.142	-0.00	0.167	0.276
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 3	Standalone	155	5775.0	1	12.90	14.50	1.445	87.55	1.142	0.01	0.160	0.264
15	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 3	Standalone	155	5775.0	1	12.90	14.50	1.445	87.55	1.142	-0.02	0.422	0.696
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 3	Standalone	155	5775.0	1	12.90	14.50	1.445	87.55	1.142	-0.11	0.274	0.452
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 3	Standalone	155	5775.0	2	12.90	14.50	1.445	87.55	1.142	-0.01	0.374	0.617
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 3	Standalone	155	5775.0	3	12.90	14.50	1.445	87.55	1.142	0.04	0.279	0.460

[Bluetooth SAR]

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 3	Full Power	78	2480.0	1	11.49	12.00	1.125	76.69	1.086	-0.13	0.001	0.001
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 3	Full Power	78	2480.0	1	11.49	12.00	1.125	76.69	1.086	-0.11	0.001	0.001
16	Bluetooth	1Mbps	Left Cheek	0mm	Ant 3	Full Power	78	2480.0	1	11.49	12.00	1.125	76.69	1.086	-0.01	0.110	0.134
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 3	Full Power	78	2480.0	1	11.49	12.00	1.125	76.69	1.086	0.11	0.068	0.083

14.2 Hotspot SAR

【GSM SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	5mm	Ant 0	DSI 7	189	836.4	1	29.48	30.50	1.265	-0.08	0.465	0.588
	GSM850	GPRS 4 Tx slots	Back	5mm	Ant 0	DSI 7	189	836.4	1	29.48	30.50	1.265	-0.00	1.040	1.316
	GSM850	GPRS 4 Tx slots	Back	5mm	Ant 0	DSI 7	128	824.2	1	29.48	30.50	1.265	0.10	0.921	1.165
17	GSM850	GPRS 4 Tx slots	Back	5mm	Ant 0	DSI 7	251	848.8	1	29.46	30.50	1.271	0.11	1.110	1.411
	GSM850	GPRS 4 Tx slots	Left Side	5mm	Ant 0	DSI 7	189	836.4	1	29.48	30.50	1.265	0.11	0.231	0.292
	GSM850	GPRS 4 Tx slots	Right Side	5mm	Ant 0	DSI 7	189	836.4	1	29.48	30.50	1.265	0.08	0.343	0.434
	GSM850	GPRS 4 Tx slots	Top Side	5mm	Ant 0	DSI 7	189	836.4	1	29.48	30.50	1.265	-0.08	0.001	0.001
	GSM850	GPRS 4 Tx slots	Bottom Side	5mm	Ant 0	DSI 7	189	836.4	1	29.48	30.50	1.265	-0.05	0.541	0.684
	GSM850	GPRS 4 Tx slots	Back	5mm	Ant 0	DSI 7	251	848.8	2	29.46	29.50	1.009	0.11	0.837	0.845
	GSM850	GPRS 4 Tx slots	Back	5mm	Ant 0	DSI 7	251	848.8	3	29.46	30.50	1.271	0.01	0.931	1.183
	GSM1900	GPRS 4 Tx slots	Front	5mm	Ant 0	DSI 7	810	1909.8	1	20.33	21.00	1.167	0.02	0.389	0.454
	GSM1900	GPRS 4 Tx slots	Back	5mm	Ant 0	DSI 7	810	1909.8	1	20.33	21.00	1.167	0.05	1.130	1.319
	GSM1900	GPRS 4 Tx slots	Back	5mm	Ant 0	DSI 7	512	1850.2	1	20.06	21.00	1.242	0.02	0.854	1.061
	GSM1900	GPRS 4 Tx slots	Back	5mm	Ant 0	DSI 7	661	1880.0	1	20.21	21.00	1.199	-0.02	0.991	1.188
	GSM1900	GPRS 4 Tx slots	Left Side	5mm	Ant 0	DSI 7	810	1909.8	1	20.33	21.00	1.167	0.19	0.080	0.093
	GSM1900	GPRS 4 Tx slots	Right Side	5mm	Ant 0	DSI 7	810	1909.8	1	20.33	21.00	1.167	0.16	0.134	0.156
	GSM1900	GPRS 4 Tx slots	Top Side	5mm	Ant 0	DSI 7	810	1909.8	1	20.33	21.00	1.167	0.03	0.001	0.001
18	GSM1900	GPRS 4 Tx slots	Bottom Side	5mm	Ant 0	DSI 7	810	1909.8	1	20.33	21.00	1.167	0.05	1.200	1.400
	GSM1900	GPRS 4 Tx slots	Bottom Side	5mm	Ant 0	DSI 7	512	1850.2	1	20.06	21.00	1.242	0.10	0.766	0.951
	GSM1900	GPRS 4 Tx slots	Bottom Side	5mm	Ant 0	DSI 7	661	1880.0	1	20.21	21.00	1.199	0.02	0.975	1.169
	GSM1900	GPRS 4 Tx slots	Bottom Side	5mm	Ant 0	DSI 7	810	1909.8	2	20.33	21.00	1.167	0.04	0.925	1.079
	GSM1900	GPRS 4 Tx slots	Bottom Side	5mm	Ant 0	DSI 7	810	1909.8	3	20.33	21.00	1.167	-0.04	1.020	1.190

【WCDMA SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	5mm	Ant 0	DSI 7	9400	1880.0	1	15.36	15.50	1.033	-0.07	0.394	0.407
	WCDMA II	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	9400	1880.0	1	15.36	15.50	1.033	0.19	1.090	1.126
	WCDMA II	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	9262	1852.4	1	15.20	15.50	1.072	0.05	0.880	0.943
	WCDMA II	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	9538	1907.6	1	15.21	15.50	1.069	0.03	1.210	1.293
	WCDMA II	RMC 12.2Kbps	Left Side	5mm	Ant 0	DSI 7	9400	1880.0	1	15.36	15.50	1.033	0.07	0.040	0.041
	WCDMA II	RMC 12.2Kbps	Right Side	5mm	Ant 0	DSI 7	9400	1880.0	1	15.36	15.50	1.033	-0.09	0.143	0.148
	WCDMA II	RMC 12.2Kbps	Top Side	5mm	Ant 0	DSI 7	9400	1880.0	1	15.36	15.50	1.033	0.03	0.001	0.001
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	9400	1880.0	1	15.36	15.50	1.033	-0.04	1.120	1.157
	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	9262	1852.4	1	15.20	15.50	1.072	0.02	0.990	1.061
19	WCDMA II	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	9538	1907.6	1	15.21	15.50	1.069	0.02	1.260	1.347
	WCDMA IV	RMC 12.2Kbps	Front	5mm	Ant 0	DSI 7	1413	1732.6	1	15.39	15.50	1.026	-0.03	0.326	0.334
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	1413	1732.6	1	15.39	15.50	1.026	-0.11	0.858	0.880
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	1312	1712.4	1	15.22	15.50	1.067	0.01	0.910	0.971
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	1513	1752.6	1	15.34	15.50	1.038	-0.09	0.797	0.827
	WCDMA IV	RMC 12.2Kbps	Left Side	5mm	Ant 0	DSI 7	1413	1732.6	1	15.39	15.50	1.026	0.13	0.041	0.042
	WCDMA IV	RMC 12.2Kbps	Right Side	5mm	Ant 0	DSI 7	1413	1732.6	1	15.39	15.50	1.026	0.06	0.082	0.084
	WCDMA IV	RMC 12.2Kbps	Top Side	5mm	Ant 0	DSI 7	1413	1732.6	1	15.39	15.50	1.026	0.19	0.001	0.001
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	1413	1732.6	1	15.39	15.50	1.026	-0.06	1.130	1.159
20	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	1312	1712.4	1	15.22	15.50	1.067	0.06	1.190	1.270
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	1513	1752.6	1	15.34	15.50	1.038	-0.07	1.060	1.100
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	1312	1712.4	2	15.22	15.50	1.067	0.06	1.170	1.248
	WCDMA IV	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	1312	1712.4	3	15.22	15.50	1.067	0.02	0.797	0.850
	WCDMA V	RMC 12.2Kbps	Front	5mm	Ant 0	DSI 7	4182	836.4	1	23.56	24.00	1.107	-0.18	0.666	0.737
	WCDMA V	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	4182	836.4	1	23.56	24.00	1.107	0.19	1.240	1.373
	WCDMA V	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	4132	826.4	1	23.31	24.00	1.172	0.02	1.160	1.360



FCC SAR Test Report

Report No. : FA552802

21	WCDMA V	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	4233	846.6	1	23.53	24.00	1.114	-0.06	1.260	1.404
	WCDMA V	RMC 12.2Kbps	Left Side	5mm	Ant 0	DSI 7	4182	836.4	1	23.56	24.00	1.107	-0.05	0.334	0.370
	WCDMA V	RMC 12.2Kbps	Right Side	5mm	Ant 0	DSI 7	4182	836.4	1	23.56	24.00	1.107	-0.11	0.478	0.529
	WCDMA V	RMC 12.2Kbps	Top Side	5mm	Ant 0	DSI 7	4182	836.4	1	23.56	24.00	1.107	0.01	0.001	0.001
	WCDMA V	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	4182	836.4	1	23.56	24.00	1.107	-0.06	0.583	0.645

【LTE SAR】

Plot No	Band	BW	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	5mm	Ant 0	DSI 7	18900	1880.0	1	15.31	16.00	1.172			-0.13	0.371	0.435
	LTE Band 2	20M	QPSK	50	0	Front	5mm	Ant 0	DSI 7	18900	1880.0	1	15.27	16.00	1.183			-0.07	0.291	0.344
	LTE Band 2	20M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	18900	1880.0	1	15.31	16.00	1.172			-0.07	1.020	1.195
	LTE Band 2	20M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	18700	1860.0	1	15.24	16.00	1.191			0.01	0.950	1.131
	LTE Band 2	20M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	19100	1900.0	1	15.25	16.00	1.189			0.18	1.110	1.320
	LTE Band 2	20M	QPSK	50	0	Back	5mm	Ant 0	DSI 7	18900	1880.0	1	15.27	16.00	1.183			0.13	0.809	0.957
	LTE Band 2	20M	QPSK	50	0	Back	5mm	Ant 0	DSI 7	18700	1860.0	1	15.15	16.00	1.216			-0.01	0.715	0.869
	LTE Band 2	20M	QPSK	50	0	Back	5mm	Ant 0	DSI 7	19100	1900.0	1	15.13	16.00	1.222			0.05	0.704	0.860
	LTE Band 2	20M	QPSK	100	0	Back	5mm	Ant 0	DSI 7	18900	1880.0	1	15.24	16.00	1.191			0.13	0.800	0.953
	LTE Band 2	20M	QPSK	1	0	Left Side	5mm	Ant 0	DSI 7	18900	1880.0	1	15.31	16.00	1.172			0.18	0.037	0.043
	LTE Band 2	20M	QPSK	50	0	Left Side	5mm	Ant 0	DSI 7	18900	1880.0	1	15.27	16.00	1.183			-0.14	0.029	0.034
	LTE Band 2	20M	QPSK	1	0	Right Side	5mm	Ant 0	DSI 7	18900	1880.0	1	15.31	16.00	1.172			0.16	0.134	0.157
	LTE Band 2	20M	QPSK	50	0	Right Side	5mm	Ant 0	DSI 7	18900	1880.0	1	15.27	16.00	1.183			0.12	0.106	0.125
	LTE Band 2	20M	QPSK	1	0	Top Side	5mm	Ant 0	DSI 7	18900	1880.0	1	15.31	16.00	1.172			0.05	0.001	0.001
	LTE Band 2	20M	QPSK	50	0	Top Side	5mm	Ant 0	DSI 7	18900	1880.0	1	15.27	16.00	1.183			0.02	0.001	0.001
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	18900	1880.0	1	15.31	16.00	1.172			-0.08	1.050	1.231
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	18700	1860.0	1	15.24	16.00	1.191			0.06	0.963	1.147
22	LTE Band 2	20M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	19100	1900.0	1	15.25	16.00	1.189			0.04	1.140	1.355
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5mm	Ant 0	DSI 7	18900	1880.0	1	15.27	16.00	1.183			0.01	0.827	0.978
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5mm	Ant 0	DSI 7	18700	1860.0	1	15.15	16.00	1.216			0.13	0.743	0.903
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5mm	Ant 0	DSI 7	19100	1900.0	1	15.13	16.00	1.222			0.02	0.754	0.921
	LTE Band 2	20M	QPSK	100	0	Bottom Side	5mm	Ant 0	DSI 7	18900	1880.0	1	15.24	16.00	1.191			0.04	0.824	0.981
	LTE Band 2	20M	QPSK	1	0	Front	5mm	Ant 1	DSI 7	18900	1880.0	1	9.93	11.50	1.435			-0.05	0.130	0.187
	LTE Band 2	20M	QPSK	50	0	Front	5mm	Ant 1	DSI 7	18900	1880.0	1	9.92	11.50	1.439			0.04	0.125	0.180
	LTE Band 2	20M	QPSK	1	0	Back	5mm	Ant 1	DSI 7	18900	1880.0	1	9.93	11.50	1.435			-0.05	0.300	0.430
	LTE Band 2	20M	QPSK	50	0	Back	5mm	Ant 1	DSI 7	18900	1880.0	1	9.92	11.50	1.439			-0.03	0.280	0.403
	LTE Band 2	20M	QPSK	1	0	Left Side	5mm	Ant 1	DSI 7	18900	1880.0	1	9.93	11.50	1.435			-0.18	0.024	0.034
	LTE Band 2	20M	QPSK	50	0	Left Side	5mm	Ant 1	DSI 7	18900	1880.0	1	9.92	11.50	1.439			0.07	0.021	0.030
	LTE Band 2	20M	QPSK	1	0	Right Side	5mm	Ant 1	DSI 7	18900	1880.0	1	9.93	11.50	1.435			0.14	0.001	0.001
	LTE Band 2	20M	QPSK	50	0	Right Side	5mm	Ant 1	DSI 7	18900	1880.0	1	9.92	11.50	1.439			-0.07	0.001	0.001
	LTE Band 2	20M	QPSK	1	0	Top Side	5mm	Ant 1	DSI 7	18900	1880.0	1	9.93	11.50	1.435			0.07	0.383	0.550
	LTE Band 2	20M	QPSK	50	0	Top Side	5mm	Ant 1	DSI 7	18900	1880.0	1	9.92	11.50	1.439			-0.07	0.331	0.476
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5mm	Ant 1	DSI 7	18900	1880.0	1	9.93	11.50	1.435			0.03	0.001	0.001
	LTE Band 2	20M	QPSK	50	0	Bottom Side	5mm	Ant 1	DSI 7	18900	1880.0	1	9.92	11.50	1.439			-0.03	0.001	0.001
	LTE Band 2	20M	QPSK	1	0	Top Side	5mm	Ant 1	DSI 7	18900	1880.0	2	9.93	11.50	1.435			-0.01	0.301	0.432
	LTE Band 2	20M	QPSK	1	0	Top Side	5mm	Ant 1	DSI 7	18900	1880.0	3	9.93	11.50	1.435			-0.05	0.238	0.342
	LTE Band 7	20M	QPSK	1	0	Front	5mm	Ant 0	DSI 7	21100	2535.0	1	12.36	13.00	1.159			-0.05	0.329	0.381
	LTE Band 7	20M	QPSK	50	0	Front	5mm	Ant 0	DSI 7	21100	2535.0	1	12.34	13.00	1.164			-0.07	0.258	0.300
	LTE Band 7	20M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	21100	2535.0	1	12.36	13.00	1.159			0.07	0.796	0.923
	LTE Band 7	20M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	20850	2510.0	1	12.25	13.00	1.189			0.00	0.891	1.059
	LTE Band 7	20M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	21350	2560.0	1	12.31	13.00	1.172			0.18	0.703	0.824
	LTE Band 7	20M	QPSK	50	0	Back	5mm	Ant 0	DSI 7	21100	2535.0	1	12.34	13.00	1.164			-0.14	0.645	0.751
	LTE Band 7	20M	QPSK	100	0	Back	5mm	Ant 0	DSI 7	21100	2535.0	1	12.21	13.00	1.199			0.05	0.635	0.761
	LTE Band 7	20M	QPSK	1	0	Left Side	5mm	Ant 0	DSI 7	21100	2535.0	1	12.36	13.00	1.159			-0.00	0.022	0.025
	LTE Band 7	20M	QPSK	50	0	Left Side	5mm	Ant 0	DSI 7	21100	2535.0	1	12.34	13.00	1.164			0.14	0.017	0.020



FCC SAR Test Report

Report No. : FA552802

	LTE Band 7	20M	QPSK	1	0	Right Side	5mm	Ant 0	DSI 7	21100	2535.0	1	12.36	13.00	1.159			-0.09	0.034	0.039
	LTE Band 7	20M	QPSK	50	0	Right Side	5mm	Ant 0	DSI 7	21100	2535.0	1	12.34	13.00	1.164			0.09	0.027	0.031
	LTE Band 7	20M	QPSK	1	0	Top Side	5mm	Ant 0	DSI 7	21100	2535.0	1	12.36	13.00	1.159			-0.06	0.001	0.001
	LTE Band 7	20M	QPSK	50	0	Top Side	5mm	Ant 0	DSI 7	21100	2535.0	1	12.34	13.00	1.164			0.09	0.001	0.001
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	21100	2535.0	1	12.36	13.00	1.159			0.12	1.060	1.229
23	LTE Band 7	20M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	20850	2510.0	1	12.25	13.00	1.189			0.04	1.190	1.415
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	21350	2560.0	1	12.31	13.00	1.172			0.00	0.977	1.145
	LTE Band 7	20M	QPSK	50	0	Bottom Side	5mm	Ant 0	DSI 7	21100	2535.0	1	12.34	13.00	1.164			0.01	0.906	1.055
	LTE Band 7	20M	QPSK	50	0	Bottom Side	5mm	Ant 0	DSI 7	20850	2510.0	1	12.12	13.00	1.225			0.17	0.961	1.177
	LTE Band 7	20M	QPSK	50	0	Bottom Side	5mm	Ant 0	DSI 7	21350	2560.0	1	12.15	13.00	1.216			-0.08	0.796	0.968
	LTE Band 7	20M	QPSK	100	0	Bottom Side	5mm	Ant 0	DSI 7	21100	2535.0	1	12.21	13.00	1.199			0.05	0.904	1.084
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	20850	2510.0	2	12.25	13.00	1.189			0.04	1.140	1.355
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	20850	2510.0	3	12.25	13.00	1.189			-0.01	1.070	1.272
	LTE Band 7	20M	QPSK	1	0	Front	5mm	Ant 1	DSI 7	21100	2535.0	1	13.08	14.00	1.236			-0.17	0.154	0.190
	LTE Band 7	20M	QPSK	50	0	Front	5mm	Ant 1	DSI 7	21100	2535.0	1	13.04	14.00	1.247			-0.17	0.112	0.140
	LTE Band 7	20M	QPSK	1	0	Back	5mm	Ant 1	DSI 7	21100	2535.0	1	13.08	14.00	1.236			-0.02	0.226	0.279
	LTE Band 7	20M	QPSK	50	0	Back	5mm	Ant 1	DSI 7	21100	2535.0	1	13.04	14.00	1.247			-0.12	0.178	0.222
	LTE Band 7	20M	QPSK	1	0	Left Side	5mm	Ant 1	DSI 7	21100	2535.0	1	13.08	14.00	1.236			0.01	0.114	0.141
	LTE Band 7	20M	QPSK	50	0	Left Side	5mm	Ant 1	DSI 7	21100	2535.0	1	13.04	14.00	1.247			-0.14	0.095	0.118
	LTE Band 7	20M	QPSK	1	0	Right Side	5mm	Ant 1	DSI 7	21100	2535.0	1	13.08	14.00	1.236			0.16	0.014	0.017
	LTE Band 7	20M	QPSK	50	0	Right Side	5mm	Ant 1	DSI 7	21100	2535.0	1	13.04	14.00	1.247			-0.13	0.012	0.015
	LTE Band 7	20M	QPSK	1	0	Top Side	5mm	Ant 1	DSI 7	21100	2535.0	1	13.08	14.00	1.236			0.07	0.469	0.580
	LTE Band 7	20M	QPSK	50	0	Top Side	5mm	Ant 1	DSI 7	21100	2535.0	1	13.04	14.00	1.247			-0.08	0.364	0.454
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5mm	Ant 1	DSI 7	21100	2535.0	1	13.08	14.00	1.236			0.06	0.030	0.037
	LTE Band 7	20M	QPSK	50	0	Bottom Side	5mm	Ant 1	DSI 7	21100	2535.0	1	13.04	14.00	1.247			-0.16	0.025	0.031
	LTE Band 13	10M	QPSK	1	0	Front	5mm	Ant 0	DSI 7	23230	782.0	1	23.15	24.00	1.216			0.11	0.605	0.736
	LTE Band 13	10M	QPSK	25	0	Front	5mm	Ant 0	DSI 7	23230	782.0	1	22.12	23.00	1.225			-0.06	0.305	0.374
24	LTE Band 13	10M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	23230	782.0	1	23.15	24.00	1.216			-0.03	0.764	0.929
	LTE Band 13	10M	QPSK	25	0	Back	5mm	Ant 0	DSI 7	23230	782.0	1	22.12	23.00	1.225			-0.04	0.611	0.748
	LTE Band 13	10M	QPSK	50	0	Back	5mm	Ant 0	DSI 7	23230	782.0	1	22.14	23.00	1.219			-0.09	0.602	0.734
	LTE Band 13	10M	QPSK	1	0	Left Side	5mm	Ant 0	DSI 7	23230	782.0	1	23.15	24.00	1.216			-0.08	0.235	0.286
	LTE Band 13	10M	QPSK	25	0	Left Side	5mm	Ant 0	DSI 7	23230	782.0	1	22.12	23.00	1.225			0.17	0.187	0.229
	LTE Band 13	10M	QPSK	1	0	Right Side	5mm	Ant 0	DSI 7	23230	782.0	1	23.15	24.00	1.216			0.07	0.382	0.465
	LTE Band 13	10M	QPSK	25	0	Right Side	5mm	Ant 0	DSI 7	23230	782.0	1	22.12	23.00	1.225			0.09	0.308	0.377
	LTE Band 13	10M	QPSK	1	0	Top Side	5mm	Ant 0	DSI 7	23230	782.0	1	23.15	24.00	1.216			-0.03	0.001	0.001
	LTE Band 13	10M	QPSK	25	0	Top Side	5mm	Ant 0	DSI 7	23230	782.0	1	22.12	23.00	1.225			-0.17	0.001	0.001
	LTE Band 13	10M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	23230	782.0	1	23.15	24.00	1.216			-0.05	0.695	0.845
	LTE Band 13	10M	QPSK	25	0	Bottom Side	5mm	Ant 0	DSI 7	23230	782.0	1	22.12	23.00	1.225			-0.14	0.549	0.673
	LTE Band 13	10M	QPSK	50	0	Bottom Side	5mm	Ant 0	DSI 7	23230	782.0	1	22.14	23.00	1.219			0.09	0.584	0.712
	LTE Band 13	10M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	23230	782.0	2	23.15	24.00	1.216			0.02	0.507	0.617
	LTE Band 13	10M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	23230	782.0	3	23.15	24.00	1.216			0.05	0.475	0.578
	LTE Band 26	15M	QPSK	1	0	Front	5mm	Ant 0	DSI 7	26865	831.5	1	23.24	24.00	1.191			-0.13	0.599	0.713
	LTE Band 26	15M	QPSK	36	0	Front	5mm	Ant 0	DSI 7	26865	831.5	1	22.31	23.00	1.172			0.04	0.472	0.553
25	LTE Band 26	15M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	26865	831.5	1	23.24	24.00	1.191			-0.06	1.150	1.370
	LTE Band 26	15M	QPSK	36	0	Back	5mm	Ant 0	DSI 7	26865	831.5	1	22.31	23.00	1.172			0.01	0.920	1.078
	LTE Band 26	15M	QPSK	75	0	Back	5mm	Ant 0	DSI 7	26865	831.5	1	22.28	23.00	1.180			0.01	0.928	1.095
	LTE Band 26	15M	QPSK	1	0	Left Side	5mm	Ant 0	DSI 7	26865	831.5	1	23.24	24.00	1.191			-0.12	0.312	0.372
	LTE Band 26	15M	QPSK	36	0	Left Side	5mm	Ant 0	DSI 7	26865	831.5	1	22.31	23.00	1.172			-0.05	0.253	0.297
	LTE Band 26	15M	QPSK	1	0	Right Side	5mm	Ant 0	DSI 7	26865	831.5	1	23.24	24.00	1.191			-0.16	0.444	0.529
	LTE Band 26	15M	QPSK	36	0	Right Side	5mm	Ant 0	DSI 7	26865	831.5	1	22.31	23.00	1.172			-0.18	0.360	0.422
	LTE Band 26	15M	QPSK	1	0	Top Side	5mm	Ant 0	DSI 7	26865	831.5	1	23.24	24.00	1.191			0.01	0.001	0.001
	LTE Band 26	15M	QPSK	36	0	Top Side	5mm	Ant 0	DSI 7	26865	831.5	1	22.31	23.00	1.172			-0.12	0.001	0.001
	LTE Band 26	15M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	26865	831.5	1	23.24	24.00	1.191			-0.02	0.586	0.698
	LTE Band 26	15M	QPSK	36	0	Bottom Side	5mm	Ant 0	DSI 7	26865	831.5	1	22.31	23.00	1.172			0.13	0.471	0.552
	LTE Band 66	20M	QPSK	1	0	Front	5mm	Ant 0	DSI 7	132322	1745.0	1	15.08	16.00	1.236			-0.07	0.261	0.323
	LTE Band 66	20M	QPSK	50	0	Front	5mm	Ant 0	DSI 7	132322	1745.0	1	15.05	16.00	1.245			0.07	0.204	0.254



FCC SAR Test Report

Report No. : FA552802

	LTE Band 66	20M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	132322	1745.0	1	15.08	16.00	1.236			-0.03	0.730	0.902
	LTE Band 66	20M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	132072	1720.0	1	15.03	16.00	1.250			0.13	0.814	1.017
	LTE Band 66	20M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	132572	1770.0	1	15.00	16.00	1.259			-0.19	0.669	0.842
	LTE Band 66	20M	QPSK	50	0	Back	5mm	Ant 0	DSI 7	132322	1745.0	1	15.05	16.00	1.245			-0.07	0.580	0.722
	LTE Band 66	20M	QPSK	100	0	Back	5mm	Ant 0	DSI 7	132322	1745.0	1	15.01	16.00	1.256			0.05	0.567	0.712
	LTE Band 66	20M	QPSK	1	0	Left Side	5mm	Ant 0	DSI 7	132322	1745.0	1	15.08	16.00	1.236			0.14	0.048	0.059
	LTE Band 66	20M	QPSK	50	0	Left Side	5mm	Ant 0	DSI 7	132322	1745.0	1	15.05	16.00	1.245			0.02	0.039	0.049
	LTE Band 66	20M	QPSK	1	0	Right Side	5mm	Ant 0	DSI 7	132322	1745.0	1	15.08	16.00	1.236			-0.03	0.084	0.104
	LTE Band 66	20M	QPSK	50	0	Right Side	5mm	Ant 0	DSI 7	132322	1745.0	1	15.05	16.00	1.245			0.11	0.068	0.085
	LTE Band 66	20M	QPSK	1	0	Top Side	5mm	Ant 0	DSI 7	132322	1745.0	1	15.08	16.00	1.236			-0.09	0.008	0.010
	LTE Band 66	20M	QPSK	50	0	Top Side	5mm	Ant 0	DSI 7	132322	1745.0	1	15.05	16.00	1.245			0.05	0.006	0.007
	LTE Band 66	20M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	132322	1745.0	1	15.08	16.00	1.236			0.10	0.916	1.132
26	LTE Band 66	20M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	132072	1720.0	1	15.03	16.00	1.250			0.04	0.995	1.244
	LTE Band 66	20M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	132572	1770.0	1	15.00	16.00	1.259			-0.09	0.863	1.087
	LTE Band 66	20M	QPSK	50	0	Bottom Side	5mm	Ant 0	DSI 7	132322	1745.0	1	15.05	16.00	1.245			0.11	0.729	0.908
	LTE Band 66	20M	QPSK	50	0	Bottom Side	5mm	Ant 0	DSI 7	132072	1720.0	1	14.87	16.00	1.297			0.12	0.781	1.013
	LTE Band 66	20M	QPSK	50	0	Bottom Side	5mm	Ant 0	DSI 7	132572	1770.0	1	14.87	16.00	1.297			-0.03	0.689	0.894
	LTE Band 66	20M	QPSK	100	0	Bottom Side	5mm	Ant 0	DSI 7	132322	1745.0	1	15.01	16.00	1.256			-0.12	0.724	0.909
	LTE Band 38	20M	QPSK	1	0	Front	5mm	Ant 0	DSI 7	38000	2595.0	1	15.85	16.50	1.161	62.9	1.006	0.07	0.331	0.387
	LTE Band 38	20M	QPSK	50	0	Front	5mm	Ant 0	DSI 7	38000	2595.0	1	15.83	16.50	1.167	62.9	1.006	0.13	0.260	0.305
	LTE Band 38	20M	QPSK	1	0	Back	5mm	Ant 0	DSI 7	38000	2595.0	1	15.85	16.50	1.161	62.9	1.006	-0.13	0.775	0.905
	LTE Band 38	20M	QPSK	50	0	Back	5mm	Ant 0	DSI 7	38000	2595.0	1	15.83	16.50	1.167	62.9	1.006	-0.05	0.615	0.722
	LTE Band 38	20M	QPSK	100	0	Back	5mm	Ant 0	DSI 7	38000	2595.0	1	15.76	16.50	1.186	62.9	1.006	-0.05	0.617	0.736
	LTE Band 38	20M	QPSK	1	0	Left Side	5mm	Ant 0	DSI 7	38000	2595.0	1	15.85	16.50	1.161	62.9	1.006	0.02	0.025	0.029
	LTE Band 38	20M	QPSK	50	0	Left Side	5mm	Ant 0	DSI 7	38000	2595.0	1	15.83	16.50	1.167	62.9	1.006	0.08	0.019	0.022
	LTE Band 38	20M	QPSK	1	0	Right Side	5mm	Ant 0	DSI 7	38000	2595.0	1	15.85	16.50	1.161	62.9	1.006	-0.02	0.036	0.042
	LTE Band 38	20M	QPSK	50	0	Right Side	5mm	Ant 0	DSI 7	38000	2595.0	1	15.83	16.50	1.167	62.9	1.006	-0.13	0.028	0.033
	LTE Band 38	20M	QPSK	1	0	Top Side	5mm	Ant 0	DSI 7	38000	2595.0	1	15.85	16.50	1.161	62.9	1.006	-0.18	0.001	0.001
	LTE Band 38	20M	QPSK	50	0	Top Side	5mm	Ant 0	DSI 7	38000	2595.0	1	15.83	16.50	1.167	62.9	1.006	0.01	0.001	0.001
27	LTE Band 38	20M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 7	38000	2595.0	1	15.85	16.50	1.161	62.9	1.006	0.01	1.100	1.285
	LTE Band 38	20M	QPSK	50	0	Bottom Side	5mm	Ant 0	DSI 7	38000	2595.0	1	15.83	16.50	1.167	62.9	1.006	0.17	0.898	1.054
	LTE Band 38	20M	QPSK	100	0	Bottom Side	5mm	Ant 0	DSI 7	38000	2595.0	1	15.76	16.50	1.186	62.9	1.006	0.06	0.891	1.063
	LTE Band 38	20M	QPSK	1	0	Front	5mm	Ant 1	DSI 7	38000	2595.0	1	16.24	17.00	1.191	62.9	1.006	0.12	0.184	0.220
	LTE Band 38	20M	QPSK	50	0	Front	5mm	Ant 1	DSI 7	38000	2595.0	1	16.21	17.00	1.199	62.9	1.006	-0.01	0.154	0.186
	LTE Band 38	20M	QPSK	1	0	Back	5mm	Ant 1	DSI 7	38000	2595.0	1	16.24	17.00	1.191	62.9	1.006	-0.16	0.295	0.353
	LTE Band 38	20M	QPSK	50	0	Back	5mm	Ant 1	DSI 7	38000	2595.0	1	16.21	17.00	1.199	62.9	1.006	-0.03	0.254	0.306
	LTE Band 38	20M	QPSK	1	0	Left Side	5mm	Ant 1	DSI 7	38000	2595.0	1	16.24	17.00	1.191	62.9	1.006	-0.16	0.157	0.188
	LTE Band 38	20M	QPSK	50	0	Left Side	5mm	Ant 1	DSI 7	38000	2595.0	1	16.21	17.00	1.199	62.9	1.006	-0.04	0.131	0.158
	LTE Band 38	20M	QPSK	1	0	Right Side	5mm	Ant 1	DSI 7	38000	2595.0	1	16.24	17.00	1.191	62.9	1.006	0.01	0.024	0.029
	LTE Band 38	20M	QPSK	50	0	Right Side	5mm	Ant 1	DSI 7	38000	2595.0	1	16.21	17.00	1.199	62.9	1.006	-0.02	0.016	0.019
	LTE Band 38	20M	QPSK	1	0	Top Side	5mm	Ant 1	DSI 7	38000	2595.0	1	16.24	17.00	1.191	62.9	1.006	-0.07	0.572	0.685
	LTE Band 38	20M	QPSK	50	0	Top Side	5mm	Ant 1	DSI 7	38000	2595.0	1	16.21	17.00	1.199	62.9	1.006	-0.09	0.505	0.609
	LTE Band 38	20M	QPSK	1	0	Bottom Side	5mm	Ant 1	DSI 7	38000	2595.0	1	16.24	17.00	1.191	62.9	1.006	-0.07	0.013	0.016
	LTE Band 38	20M	QPSK	50	0	Bottom Side	5mm	Ant 1	DSI 7	38000	2595.0	1	16.21	17.00	1.199	62.9	1.006	0.06	0.011	0.013
	LTE Band 38	20M	QPSK	1	0	Top Side	5mm	Ant 1	DSI 7	38000	2595.0	2	16.24	17.00	1.191	62.9	1.006	0.01	0.474	0.568
	LTE Band 38	20M	QPSK	1	0	Top Side	5mm	Ant 1	DSI 7	38000	2595.0	3	16.24	17.00	1.191	62.9	1.006	0.02	0.380	0.455

【WLAN 2.4GHz_5GHz SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
28	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 3	Standalone	11	2462.0	1	14.95	16.00	1.274	99.11	1.009	0.03	0.276	0.355
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 3	Standalone	11	2462.0	1	14.95	16.00	1.274	99.11	1.009	0.11	0.616	0.792
	WLAN2.4GHz	802.11b 1Mbps	Left Side	5mm	Ant 3	Standalone	11	2462.0	1	14.95	16.00	1.274	99.11	1.009	-0.15	0.027	0.035
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5mm	Ant 3	Standalone	11	2462.0	1	14.95	16.00	1.274	99.11	1.009	-0.12	0.240	0.309
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	Ant 3	Standalone	11	2462.0	1	14.95	16.00	1.274	99.11	1.009	-0.07	0.218	0.280
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	5mm	Ant 3	Standalone	11	2462.0	1	14.95	16.00	1.274	99.11	1.009	0.09	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 3	Standalone	11	2462.0	2	14.95	16.00	1.274	99.11	1.009	-0.02	0.480	0.617
29	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 3	Standalone	11	2462.0	3	14.95	16.00	1.274	99.11	1.009	0.06	0.432	0.555
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 3	Standalone	42	5210.0	1	11.75	13.50	1.496	87.55	1.142	-0.04	0.054	0.092
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	Standalone	42	5210.0	1	11.75	13.50	1.496	87.55	1.142	0.01	0.504	0.861
	WLAN5.2GHz	802.11n-HT40 MCS0	Back	5mm	Ant 3	Standalone	46	5230.0	1	11.68	13.50	1.521	93.54	1.069	-0.07	0.453	0.737
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Left Side	5mm	Ant 3	Standalone	42	5210.0	1	11.75	13.50	1.496	87.55	1.142	0.16	0.018	0.031
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Right Side	5mm	Ant 3	Standalone	42	5210.0	1	11.75	13.50	1.496	87.55	1.142	0.14	0.397	0.678
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 3	Standalone	42	5210.0	1	11.75	13.50	1.496	87.55	1.142	0.12	0.285	0.487
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Bottom Side	5mm	Ant 3	Standalone	42	5210.0	1	11.75	13.50	1.496	87.55	1.142	0.06	0.001	0.002
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	Standalone	42	5210.0	2	11.75	13.50	1.496	87.55	1.142	0.02	0.391	0.668
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	Standalone	42	5210.0	3	11.75	13.50	1.496	87.55	1.142	-0.04	0.229	0.391
30	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 3	Standalone	155	5775.0	1	12.89	14.50	1.449	87.55	1.142	0.16	0.248	0.410
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	Standalone	155	5775.0	1	12.89	14.50	1.449	87.55	1.142	-0.01	0.518	0.857
	WLAN5.8GHz	802.11n-HT40 MCS0	Back	5mm	Ant 3	Standalone	159	5795.0	1	12.93	14.50	1.435	93.54	1.069	0.02	0.508	0.779
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Side	5mm	Ant 3	Standalone	155	5775.0	1	12.89	14.50	1.449	87.55	1.142	0.16	0.048	0.079
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Side	5mm	Ant 3	Standalone	155	5775.0	1	12.89	14.50	1.449	87.55	1.142	-0.10	0.340	0.563
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 3	Standalone	155	5775.0	1	12.89	14.50	1.449	87.55	1.142	0.02	0.321	0.531
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Bottom Side	5mm	Ant 3	Standalone	155	5775.0	1	12.89	14.50	1.449	87.55	1.142	-0.06	0.001	0.002
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	Standalone	155	5775.0	2	12.89	14.50	1.449	87.55	1.142	-0.05	0.449	0.743
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	Standalone	155	5775.0	3	12.89	14.50	1.449	87.55	1.142	0.08	0.383	0.634

【Bluetooth SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
31	Bluetooth	1Mbps	Front	5mm	Ant 3	Full Power	78	2480.0	1	11.49	12.00	1.125	76.69	1.086	-0.03	0.066	0.081
	Bluetooth	1Mbps	Back	5mm	Ant 3	Full Power	78	2480.0	1	11.49	12.00	1.125	76.69	1.086	-0.06	0.125	0.153
	Bluetooth	1Mbps	Left Side	5mm	Ant 3	Full Power	78	2480.0	1	11.49	12.00	1.125	76.69	1.086	0.16	0.011	0.013
	Bluetooth	1Mbps	Right Side	5mm	Ant 3	Full Power	78	2480.0	1	11.49	12.00	1.125	76.69	1.086	0.15	0.061	0.075
	Bluetooth	1Mbps	Top Side	5mm	Ant 3	Full Power	78	2480.0	1	11.49	12.00	1.125	76.69	1.086	0.13	0.070	0.086
	Bluetooth	1Mbps	Bottom Side	5mm	Ant 3	Full Power	78	2480.0	1	11.49	12.00	1.125	76.69	1.086	-0.04	0.001	0.001



14.3 Body Worn Accessory SAR

【GSM SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	5mm	Ant 0	-	DSI 4	189	836.4	1	29.48	30.5	1.265	-0.14	0.465	0.588
	GSM850	GPRS 4 Tx slots	Back	5mm	Ant 0	-	DSI 4	189	836.4	1	29.48	30.5	1.265	-0.18	1.04	1.316
	GSM850	GPRS 4 Tx slots	Back	5mm	Ant 0	-	DSI 4	128	824.2	1	29.48	30.5	1.265	-0.03	0.921	1.165
32	GSM850	GPRS 4 Tx slots	Back	5mm	Ant 0	-	DSI 4	251	848.8	1	29.46	30.5	1.271	0.11	1.09	1.385
	GSM850	GPRS 4 Tx slots	Back	5mm	Ant 0	Headset	DSI 4	251	848.8	1	29.46	30.5	1.271	0.02	1.01	1.284
	GSM1900	GPRS 4 Tx slots	Front	5mm	Ant 0	-	DSI 4	810	1909.8	1	20.33	21	1.167	0.13	0.399	0.466
33	GSM1900	GPRS 4 Tx slots	Back	5mm	Ant 0	-	DSI 4	810	1909.8	1	20.33	21	1.167	0.05	1.16	1.354
	GSM1900	GPRS 4 Tx slots	Back	5mm	Ant 0	-	DSI 4	512	1850.2	1	20.06	21	1.242	0.16	1.02	1.267
	GSM1900	GPRS 4 Tx slots	Back	5mm	Ant 0	-	DSI 4	661	1880	1	20.21	21	1.199	0.15	0.72	0.863
	GSM1900	GPRS 4 Tx slots	Back	5mm	Ant 0	Headset	DSI 4	810	1909.8	1	20.33	21	1.167	0.01	1.08	1.26
	GSM1900	GPRS 4 Tx slots	Back	5mm	Ant 0	-	DSI 4	810	1909.8	2	20.33	21	1.167	0.02	1.11	1.295
	GSM1900	GPRS 4 Tx slots	Back	5mm	Ant 0	-	DSI 4	810	1909.8	3	20.33	21	1.167	-0.08	0.96	1.12

【WCDMA SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 4	9400	1880	1	15.44	16	1.138	-0.13	0.304	0.346
	WCDMA II	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 4	9400	1880	1	15.44	16	1.138	-0.03	0.84	0.956
	WCDMA II	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 4	9262	1852.4	1	15.2	16	1.202	0.14	0.718	0.863
34	WCDMA II	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 4	9538	1907.6	1	15.21	16	1.199	0.08	0.933	1.119
	WCDMA IV	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 4	1413	1732.6	1	16.45	17	1.135	0.19	0.443	0.503
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 4	1413	1732.6	1	16.45	17	1.135	-0.1	1.17	1.328
35	WCDMA IV	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 4	1312	1712.4	1	16.44	17	1.138	0.03	1.22	1.388
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 4	1513	1752.6	1	16.39	17	1.151	0.12	1.08	1.243
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 4	1312	1712.4	2	16.44	17	1.138	0.05	0.737	0.839
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Ant 0	Headset	DSI 4	1312	1712.4	1	16.44	17	1.138	0.04	1.08	1.229
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 4	1312	1712.4	3	16.44	17	1.138	0.06	0.601	0.684
	WCDMA V	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 4	4182	836.4	1	23.56	24	1.107	0.09	0.666	0.737
	WCDMA V	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 4	4182	836.4	1	23.56	24	1.107	-0.01	1.21	1.339
	WCDMA V	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 4	4132	826.4	1	23.31	24	1.172	-0.13	1.14	1.336
36	WCDMA V	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 4	4233	846.6	1	23.53	24	1.114	-0.06	1.25	1.393
	WCDMA V	RMC 12.2Kbps	Back	5mm	Ant 0	Headset	DSI 4	4233	846.6	1	23.53	24	1.114	0.05	1.12	1.248
	WCDMA V	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 4	4233	846.6	2	23.53	24	1.114	-0.01	1.15	1.281
	WCDMA V	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 4	4233	846.6	3	23.53	24	1.114	0.08	0.774	0.862



[LTE SAR]

Plot No	Band	BW	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	5mm	Ant 0	-	DSI 4	18900	1880	1	15.53	16	1.114			-0.14	0.393	0.438
	LTE Band 2	20M	QPSK	50	0	Front	5mm	Ant 0	-	DSI 4	18900	1880	1	15.5	16	1.122			0.11	0.303	0.34
	LTE Band 2	20M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	18900	1880	1	15.53	16	1.114			0.08	1.06	1.181
	LTE Band 2	20M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	18700	1860	1	15.41	16	1.146			0	0.943	1.081
37	LTE Band 2	20M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	19100	1900	1	15.46	16	1.132			0.05	1.16	1.313
	LTE Band 2	20M	QPSK	50	0	Back	5mm	Ant 0	-	DSI 4	18900	1880	1	15.5	16	1.122			-0.13	0.844	0.947
	LTE Band 2	20M	QPSK	50	50	Back	5mm	Ant 0	-	DSI 4	18700	1860	1	15.32	16	1.169			0.07	0.746	0.872
	LTE Band 2	20M	QPSK	50	0	Back	5mm	Ant 0	-	DSI 4	19100	1900	1	15.4	16	1.148			0.17	0.922	1.058
	LTE Band 2	20M	QPSK	100	0	Back	5mm	Ant 0	-	DSI 4	18900	1880	1	15.46	16	1.132			-0.03	0.834	0.944
	LTE Band 2	20M	QPSK	1	0	Back	5mm	Ant 0	Headset	DSI 4	19100	1900	1	15.46	16	1.132			0.07	0.985	1.115
	LTE Band 2	20M	QPSK	1	0	Front	5mm	Ant 1	-	DSI 4	18900	1880	1	11.95	13	1.274			-0.1	0.161	0.205
	LTE Band 2	20M	QPSK	50	0	Front	5mm	Ant 1	-	DSI 4	18900	1880	1	11.93	13	1.279			-0.13	0.155	0.198
	LTE Band 2	20M	QPSK	1	0	Back	5mm	Ant 1	-	DSI 4	18900	1880	1	11.95	13	1.274			-0.12	0.622	0.792
	LTE Band 2	20M	QPSK	50	0	Back	5mm	Ant 1	-	DSI 4	18900	1880	1	11.93	13	1.279			-0.05	0.347	0.444
	LTE Band 2	20M	QPSK	1	0	Back	5mm	Ant 1	-	DSI 4	18900	1880	2	11.95	13	1.274			0.03	0.541	0.689
	LTE Band 2	20M	QPSK	1	0	Back	5mm	Ant 1	-	DSI 4	18900	1880	3	11.95	13	1.274			0.02	0.422	0.538
	LTE Band 7	20M	QPSK	1	0	Front	5mm	Ant 0	-	DSI 4	21100	2535	1	14.04	14.5	1.112			-0.11	0.422	0.469
	LTE Band 7	20M	QPSK	50	0	Front	5mm	Ant 0	-	DSI 4	21100	2535	1	14.03	14.5	1.114			-0.05	0.33	0.368
	LTE Band 7	20M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	21100	2535	1	14.04	14.5	1.112			0.12	1.02	1.134
38	LTE Band 7	20M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	20850	2510	1	14.01	14.5	1.119			0.15	1.14	1.276
	LTE Band 7	20M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	21350	2560	1	13.98	14.5	1.127			0.04	0.9	1.014
	LTE Band 7	20M	QPSK	50	0	Back	5mm	Ant 0	-	DSI 4	21100	2535	1	14.03	14.5	1.114			-0.12	0.826	0.92
	LTE Band 7	20M	QPSK	50	0	Back	5mm	Ant 0	-	DSI 4	20850	2510	1	13.98	14.5	1.127			-0.19	0.899	1.013
	LTE Band 7	20M	QPSK	50	0	Back	5mm	Ant 0	-	DSI 4	21350	2560	1	13.95	14.5	1.135			0.12	0.721	0.818
	LTE Band 7	20M	QPSK	100	0	Back	5mm	Ant 0	-	DSI 4	21100	2535	1	13.83	14.5	1.167			-0.03	0.819	0.956
	LTE Band 7	20M	QPSK	1	0	Back	5mm	Ant 0	Headset	DSI 4	20850	2510	1	14.01	14.5	1.119			0.04	0.878	0.982
	LTE Band 7	20M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	20850	2510	2	14.01	14.5	1.119			-0.14	0.987	1.104
	LTE Band 7	20M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	20850	2510	3	14.01	14.5	1.119			0.05	1.01	1.13
	LTE Band 7	20M	QPSK	1	0	Front	5mm	Ant 1	-	DSI 4	21100	2535	1	16.61	17.5	1.227			0.14	0.371	0.455
	LTE Band 7	20M	QPSK	50	0	Front	5mm	Ant 1	-	DSI 4	21100	2535	1	16.56	17.5	1.242			-0.19	0.312	0.388
	LTE Band 7	20M	QPSK	1	0	Back	5mm	Ant 1	-	DSI 4	21100	2535	1	16.61	17.5	1.227			0.02	0.629	0.772
	LTE Band 7	20M	QPSK	50	0	Back	5mm	Ant 1	-	DSI 4	21100	2535	1	16.56	17.5	1.242			-0.18	0.496	0.616
	LTE Band 13	10M	QPSK	1	0	Front	5mm	Ant 0	-	DSI 4	23230	782	1	23.15	24	1.216			-0.04	0.38	0.462
	LTE Band 13	10M	QPSK	25	0	Front	5mm	Ant 0	-	DSI 4	23230	782	1	22.12	23	1.225			0.18	0.304	0.372
39	LTE Band 13	10M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	23230	782	1	23.15	24	1.216			-0.03	0.762	0.927
	LTE Band 13	10M	QPSK	25	0	Back	5mm	Ant 0	-	DSI 4	23230	782	1	22.12	23	1.225			0.04	0.609	0.746
	LTE Band 13	10M	QPSK	50	0	Back	5mm	Ant 0	-	DSI 4	23230	782	1	22.14	23	1.219			-0.1	0.234	0.285
	LTE Band 13	10M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	23230	782	2	23.15	24	1.216			-0.04	0.611	0.743
	LTE Band 13	10M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	23230	782	3	23.15	24	1.216			0.06	0.451	0.548
	LTE Band 26	15M	QPSK	1	0	Front	5mm	Ant 0	-	DSI 4	26865	831.5	1	23.24	24	1.191			0.04	0.604	0.719
	LTE Band 26	15M	QPSK	36	0	Front	5mm	Ant 0	-	DSI 4	26865	831.5	1	22.31	23	1.172			0	0.476	0.558
40	LTE Band 26	15M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	26865	831.5	1	23.24	24	1.191			-0.06	1.16	1.382
	LTE Band 26	15M	QPSK	36	0	Back	5mm	Ant 0	-	DSI 4	26865	831.5	1	22.31	23	1.172			0.1	0.928	1.088
	LTE Band 26	15M	QPSK	75	0	Back	5mm	Ant 0	-	DSI 4	26865	831.5	1	22.28	23	1.18			-0.15	0.937	1.106
	LTE Band 26	15M	QPSK	1	0	Back	5mm	Ant 0	Headset	DSI 4	26865	831.5	1	23.24	24	1.191			0.04	1.01	1.203
	LTE Band 66	20M	QPSK	1	0	Front	5mm	Ant 0	-	DSI 4	132322	1745	1	15.44	16	1.138			-0.04	0.352	0.401
	LTE Band 66	20M	QPSK	50	0	Front	5mm	Ant 0	-	DSI 4	132322	1745	1	15.39	16	1.151			0.02	0.291	0.335
	LTE Band 66	20M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	132322	1745	1	15.44	16	1.138			0.03	1.04	1.184
41	LTE Band 66	20M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	132072	1720	1	15.36	16	1.159			0.05	1.16	1.344
	LTE Band 66	20M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	132572	1770	1	15.33	16	1.167			-0.14	0.954	1.113
	LTE Band 66	20M	QPSK	50	0	Back	5mm	Ant 0	-	DSI 4	132322	1745	1	15.39	16	1.151			-0.19	0.827	0.952
	LTE Band 66	20M	QPSK	50	0	Back	5mm	Ant 0	-	DSI 4	132072	1720	1	15.29	16	1.178			-0.05	0.922	1.086



FCC SAR Test Report

Report No. : FA552802

	LTE Band 66	20M	QPSK	50	0	Back	5mm	Ant 0	-	DSI 4	132572	1770	1	15.24	16	1.191			0.08	0.762	0.908
	LTE Band 66	20M	QPSK	100	0	Back	5mm	Ant 0	-	DSI 4	132322	1745	1	15.29	16	1.178			-0.08	0.808	0.952
	LTE Band 66	20M	QPSK	1	0	Back	5mm	Ant 0	Headset	DSI 4	132072	1720	1	15.36	16	1.159			0.01	0.957	1.109
	LTE Band 38	20M	QPSK	1	0	Front	5mm	Ant 0	-	DSI 4	38000	2595	1	17.58	18	1.102	62.9	1.006	0.14	0.448	0.497
	LTE Band 38	20M	QPSK	50	0	Front	5mm	Ant 0	-	DSI 4	38000	2595	1	17.52	18	1.117	62.9	1.006	0.04	0.352	0.396
42	LTE Band 38	20M	QPSK	1	0	Back	5mm	Ant 0	-	DSI 4	38000	2595	1	17.58	18	1.102	62.9	1.006	0.02	1.05	1.164
	LTE Band 38	20M	QPSK	50	0	Back	5mm	Ant 0	-	DSI 4	38000	2595	1	17.52	18	1.117	62.9	1.006	-0.1	0.834	0.937
	LTE Band 38	20M	QPSK	100	0	Back	5mm	Ant 0	-	DSI 4	38000	2595	1	17.51	18	1.119	62.9	1.006	-0.19	0.837	0.942
	LTE Band 38	20M	QPSK	1	0	Front	5mm	Ant 1	-	DSI 4	38000	2595	1	19.32	20	1.169	62.9	1.006	0.12	0.414	0.487
	LTE Band 38	20M	QPSK	50	0	Front	5mm	Ant 1	-	DSI 4	38000	2595	1	19.31	20	1.172	62.9	1.006	0	0.347	0.409
	LTE Band 38	20M	QPSK	1	0	Back	5mm	Ant 1	-	DSI 4	38000	2595	1	19.32	20	1.169	62.9	1.006	-0.03	0.665	0.782
	LTE Band 38	20M	QPSK	50	0	Back	5mm	Ant 1	-	DSI 4	38000	2595	1	19.31	20	1.172	62.9	1.006	-0.09	0.573	0.676
	LTE Band 38	20M	QPSK	1	0	Back	5mm	Ant 1	-	DSI 4	38000	2595	2	19.32	20	1.169	62.9	1.006	-0.05	0.512	0.602
	LTE Band 38	20M	QPSK	1	0	Back	5mm	Ant 1	-	DSI 4	38000	2595	3	19.32	20	1.169	62.9	1.006	-0.01	0.731	0.86

【WLAN 2.4GHz_5GHz SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 3	-	Standalone-1	11	2462	1	14.95	16	1.274	99.11	1.009	0.16	0.262	0.337
43	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 3	-	Standalone-1	11	2462	1	14.95	16	1.274	99.11	1.009	0.02	0.476	0.612
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 3	-	Standalone-1	11	2462	2	14.95	16	1.274	99.11	1.009	-0.04	0.357	0.459
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 3	-	Standalone-1	11	2462	3	14.95	16	1.274	99.11	1.009	0.02	0.455	0.585
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 3	-	Standalone-1	42	5210	1	9.57	11	1.39	87.55	1.142	-0.09	0.043	0.068
44	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	-	Standalone-1	42	5210	1	9.57	11	1.39	87.55	1.142	-0.01	0.28	0.444
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	-	Standalone-1	42	5210	2	9.57	11	1.39	87.55	1.142	-0.07	0.214	0.340
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	-	Standalone-1	42	5210	3	9.57	11	1.39	87.55	1.142	-0.05	0.152	0.241
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 3	-	Standalone-1	58	5290	1	10.55	11.5	1.245	87.55	1.142	-0.16	0.033	0.047
45	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	-	Standalone-1	58	5290	1	10.55	11.5	1.245	87.55	1.142	0.01	0.271	0.385
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 3	-	Standalone-1	106	5530	1	10.47	12	1.422	87.55	1.142	-0.12	0.087	0.141
46	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	-	Standalone-1	106	5530	1	10.47	12	1.422	87.55	1.142	-0.09	0.258	0.419
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	-	Standalone-1	106	5530	2	10.47	12	1.422	87.55	1.142	0.02	0.174	0.283
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	-	Standalone-1	106	5530	3	10.47	12	1.422	87.55	1.142	0.07	0.254	0.412
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 3	-	Standalone-1	155	5775	1	11.4	13	1.445	87.55	1.142	0.11	0.139	0.229
47	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	-	Standalone-1	155	5775	1	11.4	13	1.445	87.55	1.142	0.07	0.309	0.510
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	-	Standalone-1	155	5775	2	11.4	13	1.445	87.55	1.142	-0.05	0.245	0.404
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 3	-	Standalone-1	155	5775	3	11.4	13	1.445	87.55	1.142	0.03	0.251	0.414

【Bluetooth SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5mm	Ant 3	-	Full Power	78	2480	1	11.49	12	1.125	76.69	1.086	-0.01	0.066	0.081
48	Bluetooth	1Mbps	Back	5mm	Ant 3	-	Full Power	78	2480	1	11.49	12	1.125	76.69	1.086	-0.06	0.125	0.153



14.4 Product specific 10g SAR

[GSM SAR]

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
49	GSM850	GPRS 4 Tx slots	Back	0mm	Ant 0	DSI 4	189	836.4	1	29.48	30.50	1.265	0.16	1.42	1.796
	GSM850	GPRS 4 Tx slots	Back	0mm	Ant 0	DSI 4	189	836.4	2	29.48	30.50	1.265	0.01	1.32	1.67
	GSM850	GPRS 4 Tx slots	Back	0mm	Ant 0	DSI 4	189	836.4	3	29.48	30.50	1.265	0.09	1.36	1.72
	GSM1900	GPRS 4 Tx slots	Back	0mm	Ant 0	DSI 4	810	1909.8	1	20.33	21.00	1.167	0.01	0.830	0.969
50	GSM1900	GPRS 4 Tx slots	Bottom Side	0mm	Ant 0	DSI 4	810	1909.8	1	20.33	21.00	1.167	-0.02	0.880	1.027
	GSM1900	GPRS 4 Tx slots	Bottom Side	0mm	Ant 0	DSI 4	810	1909.8	2	20.33	21.00	1.167	-0.03	0.685	0.799
	GSM1900	GPRS 4 Tx slots	Bottom Side	0mm	Ant 0	DSI 4	810	1909.8	3	20.33	21.00	1.167	0.02	0.775	0.904

[WCDMA SAR]

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	0mm	Ant 0	DSI 4	9400	1880.0	1	15.44	16.00	1.138	-0.04	0.321	0.365
51	WCDMA II	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 4	9400	1880.0	1	15.44	16.00	1.138	0.09	0.781	0.889
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 4	9400	1880.0	1	15.44	16.00	1.138	-0.16	0.669	0.761
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Ant 0	DSI 4	1413	1732.6	1	16.45	17.00	1.135	-0.06	0.548	0.622
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 4	1413	1732.6	1	16.45	17.00	1.135	-0.04	1.020	1.158
52	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 4	1413	1732.6	1	16.45	17.00	1.135	0.03	1.240	1.407
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 4	1413	1732.6	2	16.45	17.00	1.135	0.07	0.853	0.968
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 4	1413	1732.6	3	16.45	17.00	1.135	-0.05	0.705	0.800
53	WCDMA V	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 4	4182	836.4	1	23.56	24.00	1.107	0.11	1.220	1.351

[LTE SAR]

Plot No	Band	BW	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	0mm	Ant 0	DSI 4	18900	1880.0	1	15.53	16.00	1.114			0.15	0.387	0.431
	LTE Band 2	20M	QPSK	50	0	Front	0mm	Ant 0	DSI 4	18900	1880.0	1	15.50	16.00	1.122			0.02	0.305	0.342
	LTE Band 2	20M	QPSK	1	0	Back	0mm	Ant 0	DSI 4	18900	1880.0	1	15.53	16.00	1.114			-0.03	0.849	0.946
	LTE Band 2	20M	QPSK	50	0	Back	0mm	Ant 0	DSI 4	18900	1880.0	1	15.50	16.00	1.122			0.15	0.663	0.744
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0mm	Ant 0	DSI 4	18900	1880.0	1	15.53	16.00	1.114			0.17	0.808	0.900
	LTE Band 2	20M	QPSK	50	0	Bottom Side	0mm	Ant 0	DSI 4	18900	1880.0	1	15.50	16.00	1.122			-0.13	0.640	0.718
	LTE Band 2	20M	QPSK	1	0	Front	0mm	Ant 1	DSI 4	18900	1880.0	1	11.95	13.00	1.274			0.13	0.328	0.418
	LTE Band 2	20M	QPSK	50	0	Front	0mm	Ant 1	DSI 4	18900	1880.0	1	11.93	13.00	1.279			0.17	0.288	0.368
	LTE Band 2	20M	QPSK	1	0	Back	0mm	Ant 1	DSI 4	18900	1880.0	1	11.95	13.00	1.274			0.04	0.470	0.599
	LTE Band 2	20M	QPSK	50	0	Back	0mm	Ant 1	DSI 4	18900	1880.0	1	11.93	13.00	1.279			0.00	0.394	0.504
54	LTE Band 2	20M	QPSK	1	0	Top Side	0mm	Ant 1	DSI 4	18900	1880.0	1	11.95	13.00	1.274			0.04	0.906	1.154
	LTE Band 2	20M	QPSK	50	0	Top Side	0mm	Ant 1	DSI 4	18900	1880.0	1	11.93	13.00	1.279			-0.06	0.788	1.008
	LTE Band 2	20M	QPSK	1	0	Top Side	0mm	Ant 1	DSI 4	18900	1880.0	2	11.95	13.00	1.274			0.02	0.617	0.786
	LTE Band 2	20M	QPSK	1	0	Top Side	0mm	Ant 1	DSI 4	18900	1880.0	3	11.95	13.00	1.274			0.02	0.644	0.820
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Ant 0	DSI 4	21100	2535.0	1	14.04	14.50	1.112			-0.05	0.545	0.606
	LTE Band 7	20M	QPSK	50	0	Front	0mm	Ant 0	DSI 4	21100	2535.0	1	14.03	14.50	1.114			0.17	0.430	0.479
	LTE Band 7	20M	QPSK	1	0	Back	0mm	Ant 0	DSI 4	21100	2535.0	1	14.04	14.50	1.112			0.17	1.040	1.156
	LTE Band 7	20M	QPSK	50	0	Back	0mm	Ant 0	DSI 4	21100	2535.0	1	14.03	14.50	1.114			0.03	0.816	0.909
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0mm	Ant 0	DSI 4	21100	2535.0	1	14.04	14.50	1.112			-0.15	0.643	0.715
	LTE Band 7	20M	QPSK	50	0	Bottom Side	0mm	Ant 0	DSI 4	21100	2535.0	1	14.03	14.50	1.114			-0.07	0.508	0.566
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Ant 1	DSI 4	21100	2535.0	1	16.61	17.50	1.227			-0.08	0.575	0.706
	LTE Band 7	20M	QPSK	50	0	Front	0mm	Ant 1	DSI 4	21100	2535.0	1	16.56	17.50	1.242			0.12	0.493	0.612
	LTE Band 7	20M	QPSK	1	0	Back	0mm	Ant 1	DSI 4	21100	2535.0	1	16.61	17.50	1.227			0.08	0.654	0.802
	LTE Band 7	20M	QPSK	50	0	Back	0mm	Ant 1	DSI 4	21100	2535.0	1	16.56	17.50	1.242			0.16	0.512	0.636
55	LTE Band 7	20M	QPSK	1	0	Top Side	0mm	Ant 1	DSI 4	21100	2535.0	1	16.61	17.50	1.227			0.15	1.490	1.828
	LTE Band 7	20M	QPSK	50	0	Top Side	0mm	Ant 1	DSI 4	21100	2535.0	1	16.56	17.50	1.242			0.05	1.300	1.615



FCC SAR Test Report

Report No. : FA552802

	LTE Band 7	20M	QPSK	1	0	Top Side	0mm	Ant 1	DSI 4	21100	2535.0	2	16.61	17.50	1.227			0.08	1.010	1.239
	LTE Band 7	20M	QPSK	1	0	Top Side	0mm	Ant 1	DSI 4	21100	2535.0	3	16.61	17.50	1.227			-0.06	0.966	1.185
56	LTE Band 26	15M	QPSK	1	0	Back	0mm	Ant 0	DSI 4	26865	831.5	1	23.24	24.00	1.191			0.16	1.170	1.393
	LTE Band 26	15M	QPSK	36	0	Back	0mm	Ant 0	DSI 4	26865	831.5	1	22.31	23.00	1.172			0.05	1.020	1.195
	LTE Band 66	20M	QPSK	1	0	Front	0mm	Ant 0	DSI 4	132322	1745.0	1	15.44	16.00	1.138			0.05	0.519	0.591
	LTE Band 66	20M	QPSK	50	0	Front	0mm	Ant 0	DSI 4	132322	1745.0	1	15.39	16.00	1.151			0.17	0.413	0.475
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Ant 0	DSI 4	132322	1745.0	1	15.44	16.00	1.138			0.11	1.010	1.149
	LTE Band 66	20M	QPSK	50	0	Back	0mm	Ant 0	DSI 4	132322	1745.0	1	15.39	16.00	1.151			0.02	0.790	0.909
57	LTE Band 66	20M	QPSK	1	0	Bottom Side	0mm	Ant 0	DSI 4	132322	1745.0	1	15.44	16.00	1.138			0.06	1.210	1.377
	LTE Band 66	20M	QPSK	50	0	Bottom Side	0mm	Ant 0	DSI 4	132322	1745.0	1	15.39	16.00	1.151			-0.12	0.956	1.100
	LTE Band 38	20M	QPSK	1	0	Front	0mm	Ant 0	DSI 4	38000	2595.0	1	17.58	18.00	1.102	62.9	1.006	0.13	0.662	0.734
	LTE Band 38	20M	QPSK	50	0	Front	0mm	Ant 0	DSI 4	38000	2595.0	1	17.52	18.00	1.117	62.9	1.006	-0.08	0.521	0.585
	LTE Band 38	20M	QPSK	1	0	Back	0mm	Ant 0	DSI 4	38000	2595.0	1	17.58	18.00	1.102	62.9	1.006	0.01	1.380	1.530
	LTE Band 38	20M	QPSK	50	0	Back	0mm	Ant 0	DSI 4	38000	2595.0	1	17.52	18.00	1.117	62.9	1.006	-0.05	1.090	1.225
	LTE Band 38	20M	QPSK	1	0	Bottom Side	0mm	Ant 0	DSI 4	38000	2595.0	1	17.58	18.00	1.102	62.9	1.006	0.13	0.945	1.048
	LTE Band 38	20M	QPSK	50	0	Bottom Side	0mm	Ant 0	DSI 4	38000	2595.0	1	17.52	18.00	1.117	62.9	1.006	0.15	0.757	0.851
	LTE Band 38	20M	QPSK	1	0	Back	0mm	Ant 0	DSI 4	38000	2595.0	2	17.58	18.00	1.102	62.9	1.006	-0.07	1.120	1.242
	LTE Band 38	20M	QPSK	1	0	Back	0mm	Ant 0	DSI 4	38000	2595.0	3	17.58	18.00	1.102	62.9	1.006	0.08	1.010	1.120
	LTE Band 38	20M	QPSK	1	0	Back	0mm	Ant 1	DSI 4	38000	2595.0	1	19.32	20.00	1.169	62.9	1.006	0.16	0.783	0.921
	LTE Band 38	20M	QPSK	50	0	Back	0mm	Ant 1	DSI 4	38000	2595.0	1	19.31	20.00	1.172	62.9	1.006	0.08	0.755	0.890
58	LTE Band 38	20M	QPSK	1	0	Top Side	0mm	Ant 1	DSI 4	38000	2595.0	1	19.32	20.00	1.169	62.9	1.006	0.07	1.500	1.764
	LTE Band 38	20M	QPSK	50	0	Top Side	0mm	Ant 1	DSI 4	38000	2595.0	1	19.31	20.00	1.172	62.9	1.006	-0.09	1.240	1.462

[WLAN 2.4GHz_5GHz SAR]

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
59	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 3	Standalone-2	11	2462.0	1	14.95	16.00	1.274	99.11	1.009	0.02	0.476	0.612
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 3	Standalone-2	42	5210.0	1	9.57	11.00	1.390	87.55	1.142	0.11	0.120	0.190
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 3	Standalone-2	42	5210.0	1	9.57	11.00	1.390	87.55	1.142	0.02	0.522	0.829
60	WLAN5.2GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 3	Standalone-2	42	5210.0	1	9.57	11.00	1.390	87.55	1.142	-0.03	0.606	0.962
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 3	Standalone-2	42	5210.0	1	9.57	11.00	1.390	87.55	1.142	-0.17	0.430	0.683
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 3	Standalone-2	42	5210.0	2	9.57	11.00	1.390	87.55	1.142	0.04	0.324	0.514
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 3	Standalone-2	42	5210.0	3	9.57	11.00	1.390	87.55	1.142	0.06	0.111	0.176
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 3	Standalone-2	58	5290.0	1	10.55	11.50	1.245	87.55	1.142	0.18	0.065	0.092
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 3	Standalone-2	58	5290.0	1	10.55	11.50	1.245	87.55	1.142	0.00	0.167	0.237
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 3	Standalone-2	58	5290.0	1	10.55	11.50	1.245	87.55	1.142	-0.01	0.012	0.017
61	WLAN5.3GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 3	Standalone-2	58	5290.0	1	10.55	11.50	1.245	87.55	1.142	-0.04	0.195	0.277
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 3	Standalone-2	58	5290.0	1	10.55	11.50	1.245	87.55	1.142	0.02	0.143	0.203
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 3	Standalone-2	58	5290.0	1	10.55	11.50	1.245	87.55	1.142	0.02	0.009	0.013
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 3	Standalone-2	106	5530.0	1	10.47	12.00	1.422	87.55	1.142	-0.11	0.224	0.364
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 3	Standalone-2	106	5530.0	1	10.47	12.00	1.422	87.55	1.142	-0.05	0.416	0.676
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 3	Standalone-2	106	5530.0	1	10.47	12.00	1.422	87.55	1.142	0.07	0.015	0.024
62	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 3	Standalone-2	106	5530.0	1	10.47	12.00	1.422	87.55	1.142	-0.09	0.521	0.846
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 3	Standalone-2	106	5530.0	1	10.47	12.00	1.422	87.55	1.142	0.09	0.210	0.341
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 3	Standalone-2	106	5530.0	1	10.47	12.00	1.422	87.55	1.142	-0.18	0.021	0.034
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 3	Standalone-2	106	5530.0	2	10.47	12.00	1.422	87.55	1.142	-0.06	0.360	0.585
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 3	Standalone-2	106	5530.0	3	10.47	12.00	1.422	87.55	1.142	0.12	0.149	0.242
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 3	Standalone-2	155	5775.0	1	11.40	13.00	1.445	87.55	1.142	-0.01	0.108	0.178
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 3	Standalone-2	155	5775.0	1	11.40	13.00	1.445	87.55	1.142	0.10	0.122	0.201
63	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 3	Standalone-2	155	5775.0	1	11.40	13.00	1.445	87.55	1.142	0.09	0.196	0.323
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 3	Standalone-2	155	5775.0	1	11.40	13.00	1.445	87.55	1.142	-0.17	0.091	0.150
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 3	Standalone-2	155	5775.0	2	11.40	13.00	1.445	87.55	1.142	0.03	0.185	0.305
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 3	Standalone-2	155	5775.0	3	11.40	13.00	1.445	87.55	1.142	0.13	0.184	0.304

14.5 Repeated SAR Measurement

<1g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850	-	-	-	-	GPRS 4 Tx slots	Back	5mm	Ant 0	DSI 7	251	848.8	29.46	30.50	1.271	0.11	1.110	1	1.411
2nd	GSM850	-	-	-	-	GPRS 4 Tx slots	Back	5mm	Ant 0	DSI 7	251	848.8	29.46	30.50	1.271	0.02	0.902	1.231	1.146
1st	GSM1900	-	-	-	-	GPRS 4 Tx slots	Bottom Side	5mm	Ant 0	DSI 7	810	1909.8	20.33	21.00	1.167	0.05	1.200	1	1.400
2nd	GSM1900	-	-	-	-	GPRS 4 Tx slots	Bottom Side	5mm	Ant 0	DSI 7	810	1909.8	20.33	21.00	1.167	-0.06	1.090	1.101	1.272
1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	9538	1907.6	15.21	15.50	1.069	0.02	1.260	1	1.347
2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 7	9538	1907.6	15.21	15.50	1.069	0.05	1.020	1.235	1.090
1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	4233	846.6	23.53	24.00	1.114	-0.06	1.260	1	1.404
2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	4233	846.6	23.53	24.00	1.114	0.04	1.120	1.125	1.248
1st	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	20850	2510.0	12.25	13.00	1.189	0.04	1.190	1	1.415
2nd	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	20850	2510.0	12.25	13.00	1.189	0.00	1.020	1.167	1.213
1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 4	1312	1712.4	16.44	17	1.138	0.03	1.22	1	1.388
2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 4	1312	1712.4	16.44	17	1.138	-0.04	1.17	1.043	1.331

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes	Yes
2.	WWAN + WLAN5GHz	Yes	Yes	Yes	Yes
3.	WWAN + Bluetooth	Yes	Yes	Yes	Yes
4.	WLAN5GHz + Bluetooth	Yes	Yes	Yes	Yes
5.	WWAN + WLAN5GHz + Bluetooth	Yes	Yes	Yes	Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA, and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- EUT will choose each GSM, WCDMA, and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
- The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
- According to the EUT characteristic, WLAN 5GHz and Bluetooth can transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz and WLAN 2.4GHz cannot transmit simultaneously.
- WLAN 2.4GHz and Bluetooth share the same antenna, and they cannot transmit simultaneously.
- For Headset SAR and non-Headset SAR always chose higher SAR to do co-located analysis.
- For standalone WWAN, always choose the highest SAR among all WWAN bands within the selected antenna for each exposure position to perform simultaneous transmission analysis with WLAN/BT together. This is the worst co-located analysis and can represent each band. If the co-located analysis within standalone SAR is higher SAR limit (1.6W/kg for 1g SAR, 4.0W/kg for 10g SAR), always choose the highest SAR among the selected WWAN bands within the selected antenna for each exposure position to perform simultaneous transmission analysis with WLAN/BT.
- The maximum SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - The SPLSR calculated results please refer to section 15.5.

15.1 Head Exposure Conditions

WWAN1		Exposure Position	1	3	4	5	1+3 Summed 10g SAR (W/kg)	1+4+5 Summed 10g SAR (W/kg)
			WWAN1	2.4GHz WLAN Ant 3	5GHz WLAN Ant 3	Bluetooth Ant 3		
			1g SAR	1g SAR	1g SAR	1g SAR		
All bands	Ant 0	Right Cheek	0.343	0.224	0.308	0.001	0.57	0.65
		Right Tilted	0.211	0.255	0.361	0.001	0.47	0.57
		Left Cheek	0.352	0.537	0.699	0.134	0.89	1.19
		Left Tilted	0.216	0.459	0.558	0.083	0.68	0.86
All bands	Ant 1	Right Cheek	0.837	0.224	0.308	0.001	1.06	1.15
		Right Tilted	0.884	0.255	0.361	0.001	1.14	1.25
		Left Cheek	0.500	0.537	0.699	0.134	1.04	1.33
		Left Tilted	0.643	0.459	0.558	0.083	1.10	1.28



15.2 Hotspot Exposure Conditions

WWAN1		Exposure Position	1	3	4	5	1+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	SPLSR Case
			WWAN1	2.4GHz WLAN Ant 3	5GHz WLAN Ant 3	Bluetooth Ant 3			
			1g SAR	1g SAR	1g SAR	1g SAR			
All bands	Ant 1	Front	0.220	0.355	0.410	0.081	0.58	0.71	-
		Back	0.430	0.792	0.861	0.153	1.22	1.44	-
		Left Side	0.188	0.035	0.079	0.013	0.22	0.28	-
		Right Side	0.029	0.309	0.678	0.075	0.34	0.78	-
		Top Side	0.685	0.280	0.531	0.086	0.97	1.30	-
		Bottom Side	0.037	0.001	0.002	0.001	0.04	0.04	-
GSM850	Ant 0	Front	0.588	0.355	0.410	0.081	0.94	1.08	-
		Back	1.411	0.792	0.861	0.153	2.20	2.43	Case 12/1
		Left Side	0.292	0.035	0.079	0.013	0.33	0.38	-
		Right Side	0.434	0.309	0.678	0.075	0.74	1.19	-
		Top Side	0.001	0.280	0.531	0.086	0.28	0.62	-
		Bottom Side	0.684	0.001	0.002	0.001	0.69	0.69	-
GSM1900	Ant 0	Front	0.454	0.355	0.410	0.081	0.81	0.95	-
		Back	1.319	0.792	0.861	0.153	2.11	2.33	Case 13/2
		Left Side	0.093	0.035	0.079	0.013	0.13	0.19	-
		Right Side	0.156	0.309	0.678	0.075	0.47	0.91	-
		Top Side	0.001	0.280	0.531	0.086	0.28	0.62	-
		Bottom Side	1.400	0.001	0.002	0.001	1.40	1.40	-
WCDMA II	Ant 0	Front	0.407	0.355	0.410	0.081	0.76	0.90	-
		Back	1.293	0.792	0.861	0.153	2.09	2.31	Case 14/3
		Left Side	0.041	0.035	0.079	0.013	0.08	0.13	-
		Right Side	0.148	0.309	0.678	0.075	0.46	0.90	-
		Top Side	0.001	0.280	0.531	0.086	0.28	0.62	-
		Bottom Side	1.347	0.001	0.002	0.001	1.35	1.35	-
WCDMA IV	Ant 0	Front	0.334	0.355	0.410	0.081	0.69	0.83	-
		Back	0.971	0.792	0.861	0.153	1.76	1.99	Case 15/4
		Left Side	0.042	0.035	0.079	0.013	0.08	0.13	-
		Right Side	0.084	0.309	0.678	0.075	0.39	0.84	-
		Top Side	0.001	0.280	0.531	0.086	0.28	0.62	-
		Bottom Side	1.270	0.001	0.002	0.001	1.27	1.27	-
WCDMA V	Ant 0	Front	0.737	0.355	0.410	0.081	1.09	1.23	-
		Back	1.404	0.792	0.861	0.153	2.20	2.42	Case 16/5
		Left Side	0.370	0.035	0.079	0.013	0.41	0.46	-
		Right Side	0.529	0.309	0.678	0.075	0.84	1.28	-
		Top Side	0.001	0.280	0.531	0.086	0.28	0.62	-
		Bottom Side	0.645	0.001	0.002	0.001	0.65	0.65	-
LTE Band 2	Ant 0	Front	0.435	0.355	0.410	0.081	0.79	0.93	-
		Back	1.320	0.792	0.861	0.153	2.11	2.33	Case 17/6
		Left Side	0.043	0.035	0.079	0.013	0.08	0.14	-
		Right Side	0.157	0.309	0.678	0.075	0.47	0.91	-
		Top Side	0.001	0.280	0.531	0.086	0.28	0.62	-
		Bottom Side	1.355	0.001	0.002	0.001	1.36	1.36	-
LTE Band 7	Ant 0	Front	0.381	0.355	0.410	0.081	0.74	0.87	-
		Back	1.059	0.792	0.861	0.153	1.85	2.07	Case 18/7
		Left Side	0.025	0.035	0.079	0.013	0.06	0.12	-
		Right Side	0.039	0.309	0.678	0.075	0.35	0.79	-
		Top Side	0.001	0.280	0.531	0.086	0.28	0.62	-
		Bottom Side	1.415	0.001	0.002	0.001	1.42	1.42	-



LTE Band 13	Ant 0	Front	0.736	0.355	0.410	0.081	1.09	1.23	-
		Back	0.929	0.792	0.861	0.153	1.72	1.94	Case 19/8
		Left Side	0.286	0.035	0.079	0.013	0.32	0.38	-
		Right Side	0.465	0.309	0.678	0.075	0.77	1.22	-
		Top Side	0.001	0.280	0.531	0.086	0.28	0.62	-
		Bottom Side	0.845	0.001	0.002	0.001	0.85	0.85	-
LTE Band 26	Ant 0	Front	0.713	0.355	0.410	0.081	1.07	1.20	-
		Back	1.370	0.792	0.861	0.153	2.16	2.38	Case 20/9
		Left Side	0.372	0.035	0.079	0.013	0.41	0.46	-
		Right Side	0.529	0.309	0.678	0.075	0.84	1.28	-
		Top Side	0.001	0.280	0.531	0.086	0.28	0.62	-
		Bottom Side	0.698	0.001	0.002	0.001	0.70	0.70	-
LTE Band 66	Ant 0	Front	0.323	0.355	0.410	0.081	0.68	0.81	-
		Back	1.018	0.792	0.861	0.153	1.81	2.03	Case 21/10
		Left Side	0.059	0.035	0.079	0.013	0.09	0.15	-
		Right Side	0.104	0.309	0.678	0.075	0.41	0.86	-
		Top Side	0.010	0.280	0.531	0.086	0.29	0.63	-
		Bottom Side	1.244	0.001	0.002	0.001	1.25	1.25	-
LTE Band 38	Ant 0	Front	0.387	0.355	0.410	0.081	0.74	0.88	-
		Back	0.905	0.792	0.861	0.153	1.70	1.92	Case 22/11
		Left Side	0.029	0.035	0.079	0.013	0.06	0.12	-
		Right Side	0.042	0.309	0.678	0.075	0.35	0.80	-
		Top Side	0.001	0.280	0.531	0.086	0.28	0.62	-
		Bottom Side	1.285	0.001	0.002	0.001	1.29	1.29	-

**15.3 Body-Worn Accessory Exposure Conditions**

WWAN1		Exposure Position	1	3	4	5	1+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	SPLSR Case
			WWAN1	2.4GHz WLAN Ant 3	5GHz WLAN Ant 3	Bluetooth Ant 3			
			1g SAR	1g SAR	1g SAR	1g SAR			
All bands	Ant 1	Front	0.487	0.337	0.229	0.081	0.82	0.80	-
		Back	0.860	0.612	0.510	0.153	1.47	1.52	-
GSM850	Ant 0	Front	0.588	0.337	0.229	0.081	0.93	0.90	-
		Back	1.385	0.612	0.510	0.153	2.00	2.05	Case 11/1
GSM1900	Ant 0	Front	0.466	0.337	0.229	0.081	0.80	0.78	-
		Back	1.354	0.612	0.510	0.153	1.97	2.02	Case 12/2
WCDMA II	Ant 0	Front	0.346	0.337	0.229	0.081	0.68	0.66	-
		Back	1.119	0.612	0.510	0.153	1.73	1.78	Case 13/3
WCDMA IV	Ant 0	Front	0.503	0.337	0.229	0.081	0.84	0.81	-
		Back	1.388	0.612	0.510	0.153	2.00	2.05	Case 14/4
WCDMA V	Ant 0	Front	0.737	0.337	0.229	0.081	1.07	1.05	-
		Back	1.393	0.612	0.510	0.153	2.01	2.06	Case 15/5
LTE Band 2	Ant 0	Front	0.438	0.337	0.229	0.081	0.78	0.75	-
		Back	1.313	0.612	0.510	0.153	1.93	1.98	Case 16/6
LTE Band 7	Ant 0	Front	0.469	0.337	0.229	0.081	0.81	0.78	-
		Back	1.276	0.612	0.510	0.153	1.89	1.94	Case 17/7
LTE Band 13	Ant 0	Front	0.462	0.337	0.229	0.081	0.80	0.77	-
		Back	0.927	0.612	0.510	0.153	1.54	1.59	-
LTE Band 26	Ant 0	Front	0.719	0.337	0.229	0.081	1.06	1.03	-
		Back	1.382	0.612	0.510	0.153	1.99	2.05	Case 18/8
LTE Band 66	Ant 0	Front	0.401	0.337	0.229	0.081	0.74	0.71	-
		Back	1.344	0.612	0.510	0.153	1.96	2.01	Case 19/9
LTE Band 38	Ant 0	Front	0.497	0.337	0.229	0.081	0.83	0.81	-
		Back	1.164	0.612	0.510	0.153	1.78	1.83	Case 20/10

15.4 Product specific 10g SAR Exposure Conditions

Remark:


- For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.

WWAN1		Exposure Position	1	3	4	1+3 Summed 10g SAR (W/kg)	1+4 Summed 10g SAR (W/kg)
			WWAN1	2.4GHz WLAN Ant 3	5GHz WLAN Ant 3		
			10g SAR	10g SAR	10g SAR		
All bands	Ant 0	Back	1.796	0.612	0.829	2.41	2.63
		Bottom Side	1.407	-	0.034	1.41	1.44
		Front	0.734	-	0.364	0.73	1.10
		Top Side	-	-	0.683	0.00	0.68
		Right Side	-	-	0.962	0.00	0.96
		Left Side	-	-	0.024	0.00	0.02
All bands	Ant 1	Back	0.921	0.612	0.829	1.53	1.75
		Bottom Side	-	-	0.034	0.00	0.03
		Front	0.706	-	0.364	0.71	1.07
		Top Side	1.828	-	0.683	1.83	2.51
		Right Side	-	-	0.962	0.00	0.96
		Left Side	-	-	0.024	0.00	0.02

15.5 SPLSR Evaluation and Analysis

General Note:

1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR_1 + SAR_2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR, simultaneously transmission SAR measurement is not necessary.
3. Per April 2022 TCB Workshop Notes, BT antenna was summed algebraically with the WIFI5GHz Antenna separately for the purposes of hybrid SPLSR combination and they share the same antenna.
4. Per April 2022 TCB Workshop, instead of doing a small volume scan over a co-located antenna pair, used summing the SAR values of the co-located pair and using that value in SPLSR calculation. In the calculation used the minimum distance between the spatially separated antenna and the closest antenna of the co-located antenna pair to be conservative.
5. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

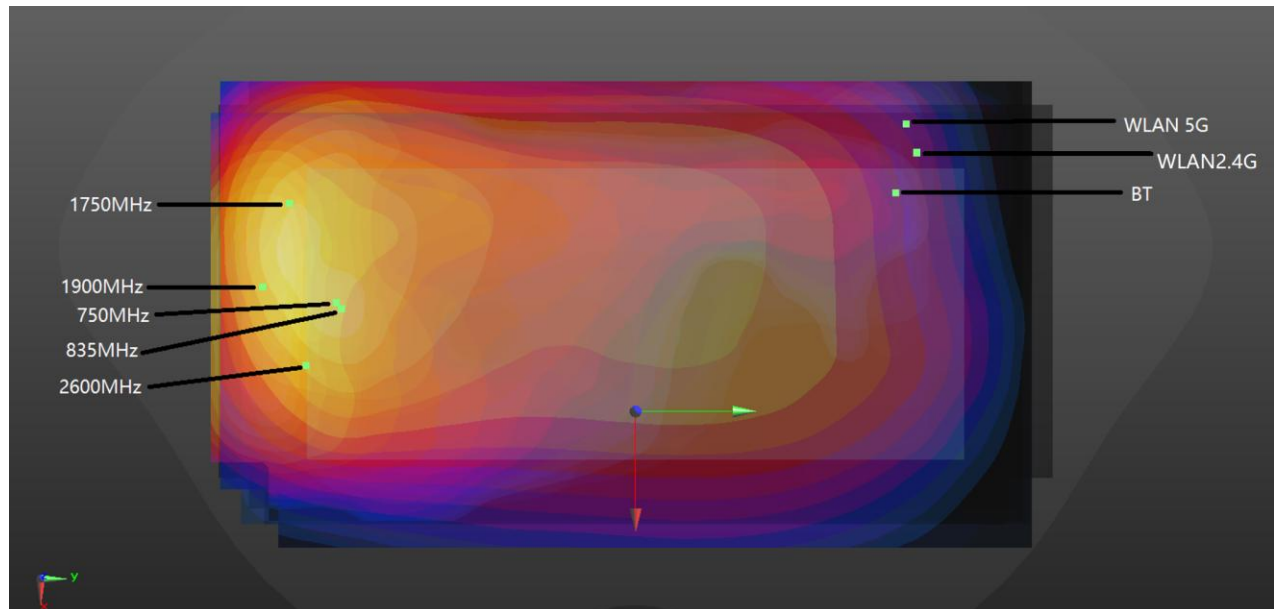

WWAN+WWAN+Bluetooth Back 5mm

<Hotspot>

Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
						X	Y	Z				
Case 1	GSM850 Ant0	Back	1.411	1.411	5mm	-3	-82.3	-0.67	152.0	2.43	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	GSM850 Ant0	Back	1.411	1.411	5mm	-3	-82.3	-0.67	158.3	2.43	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 2	GSM1900 Ant0	Back	1.319	1.319	5mm	-7	-94.9	-1.08	163.5	2.33	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	GSM1900 Ant0	Back	1.319	1.319	5mm	-7	-94.9	-1.08	169.4	2.33	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 3	WCDMA II Ant0	Back	1.293	1.293	5mm	-17.7	-86.3	-0.71	153.5	2.31	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	WCDMA II Ant0	Back	1.293	1.293	5mm	-17.7	-86.3	-0.71	158.6	2.31	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 4	WCDMA IV Ant0	Back	0.971	0.971	5mm	-25.3	-87.9	-0.6	154.4	1.99	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	WCDMA IV Ant0	Back	0.971	0.971	5mm	-25.3	-87.9	-0.6	158.9	1.99	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 5	WCDMA V Ant0	Back	1.404	1.404	5mm	-4.7	-80.8	-0.79	150.1	2.42	0.03	Not required
	5G WLAN Ant3		0.861	1.01	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	WCDMA V Ant0	Back	1.404	1.404	5mm	-4.7	-80.8	-0.79	156.4	2.42	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 6	LTE Band 2 Ant0	Back	1.32	1.32	5mm	-16.6	-80.5	-0.69	147.9	2.33	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	LTE Band 2 Ant0	Back	1.32	1.32	5mm	-16.6	-80.5	-0.69	153.2	2.33	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 7	LTE Band 7 Ant0	Back	1.059	1.059	5mm	12.2	-84.2	-0.53	85.1	2.07	0.04	Not required
	5G WLAN Ant3		0.861	1.01	5mm							
	Bluetooth Ant 3		0.153		5mm							



FCC SAR Test Report

Report No. : FA552802

	LTE Band 7 Ant0	Back	1.059	1.059	5mm	12.2	-84.2	-0.53	165.2	2.07	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
						X	Y	Z				
Case 8	LTE Band 13 Ant0	Back	0.929	0.929	5mm	-6.2	-80.7	-0.7	149.7	1.94	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	LTE Band 13 Ant0	Back	0.929	0.929	5mm	-6.2	-80.7	-0.7	155.9	1.94	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
						X	Y	Z				
Case 9	LTE Band 26 Ant0	Back	1.37	1.37	5mm	-3.1	-80.8	-0.68	150.5	2.38	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	LTE Band 26 Ant0	Back	1.37	1.37	5mm	-3.1	-80.8	-0.68	156.9	2.38	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
						X	Y	Z				
Case 10	LTE Band 66 Ant0	Back	1.018	1.018	5mm	-23.8	-86.3	-0.62	152.9	2.03	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	LTE Band 66 Ant0	Back	1.018	1.018	5mm	-23.8	-86.3	-0.62	157.5	2.03	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
						X	Y	Z				
Case 11	LTE Band 38 Ant0	Back	0.905	0.905	5mm	11.2	-84.2	-0.54	157.4	1.92	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	LTE Band 38 Ant0	Back	0.905	0.905	5mm	11.2	-84.2	-0.54	164.8	1.92	0.02	Not required
	5G WLAN Ant3		0.861	1.01	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				

Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 12	GSM850 Ant0	Back	1.411	5mm	-3	-82.3	-0.67	156.0	2.20	0.02	Not required
	2.4G WLAN Ant3		0.792	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 13	GSM1900 Ant0	Back	1.319	5mm	-7	-94.9	-1.08	167.3	2.11	0.02	Not required
	2.4G WLAN Ant3		0.792	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 14	WCDMA II Ant0	Back	1.293	5mm	-17.7	-86.3	-0.71	156.9	2.09	0.02	Not required
	2.4G WLAN Ant3		0.792	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 15	WCDMA IV Ant0	Back	0.971	5mm	-25.3	-87.9	-0.6	157.4	1.76	0.01	Not required
	2.4G WLAN Ant3		0.792	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 16	WCDMA V Ant0	Back	1.404	5mm	-4.7	-80.8	-0.79	154.1	2.20	0.02	Not required

	2.4G WLAN Ant3		0.792	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 17	LTE Band 2 Ant0	Back	1.32	5mm	-16.6	-80.5	-0.69	151.3	2.11	0.02	Not required
	2.4G WLAN Ant3		0.792	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 18	LTE Band 7 Ant0	Back	1.059	5mm	12.2	-84.2	-0.53	162.4	1.85	0.02	Not required
	2.4G WLAN Ant3		0.792	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 19	LTE Band 13 Ant0	Back	0.929	5mm	-6.2	-80.7	-0.7	153.7	1.72	0.01	Not required
	2.4G WLAN Ant3		0.792	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 20	LTE Band 26 Ant0	Back	1.37	5mm	-3.1	-80.8	-0.68	154.5	2.16	0.02	Not required
	2.4G WLAN Ant3		0.792	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 21	LTE Band 66 Ant0	Back	1.018	5mm	-23.8	-86.3	-0.62	156.0	1.81	0.02	Not required
	2.4G WLAN Ant3		0.792	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 22	LTE Band 38 Ant0	Back	0.905	5mm	11.2	-84.2	-0.54	162.0	1.70	0.01	Not required
	2.4G WLAN Ant3		0.792	5mm	-43	68.5	-0.63				



<Body-worn>

Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
						X	Y	Z				
Case 1	GSM850 Ant0	Back	1.385	1.385	5mm	-3	-82.3	-0.67	152.0	2.05	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	GSM850 Ant0	Back	1.385	1.385	5mm	-3	-82.3	-0.67	158.3	2.05	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 2	GSM1900 Ant0	Back	1.354	1.354	5mm	-7	-94.9	-1.08	163.5	2.02	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	GSM1900 Ant0	Back	1.354	1.354	5mm	-7	-94.9	-1.08	169.4	2.02	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 3	WCDMA II Ant0	Back	1.119	1.119	5mm	-17.7	-86.3	-0.71	153.5	1.78	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	WCDMA II Ant0	Back	1.119	1.119	5mm	-17.7	-86.3	-0.71	158.6	1.78	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 4	WCDMA IV Ant0	Back	1.388	1.388	5mm	-25.3	-87.9	-0.6	154.4	2.05	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	WCDMA IV Ant0	Back	1.388	1.388	5mm	-25.3	-87.9	-0.6	158.9	2.05	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 5	WCDMA V Ant0	Back	1.393	1.393	5mm	-4.7	-80.8	-0.79	150.1	2.06	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	WCDMA V Ant0	Back	1.393	1.393	5mm	-4.7	-80.8	-0.79	156.4	2.06	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 6	LTE Band 2 Ant0	Back	1.313	1.313	5mm	-16.6	-80.5	-0.69	147.9	1.98	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	LTE Band 2 Ant0	Back	1.313	1.313	5mm	-16.6	-80.5	-0.69	153.2	1.98	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 7	LTE Band 7 Ant0	Back	1.276	1.276	5mm	12.2	-84.2	-0.53	157.7	1.94	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	LTE Band 7 Ant0	Back	1.276	1.276	5mm	12.2	-84.2	-0.53	165.2	1.94	0.02	Not required



FCC SAR Test Report

Report No. : FA552802

	5G WLAN Ant3		0.51	0.66	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
						X	Y	Z				
Case 8	LTE Band 26 Ant0	Back	1.382	1.382	5mm	-3.1	-80.8	-0.68	150.5	2.05	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	LTE Band 26 Ant0	Back	1.382	1.382	5mm	-3.1	-80.8	-0.68	156.9	2.05	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
						X	Y	Z				
Case 9	LTE Band 66 Ant0	Back	1.344	1.344	5mm	-23.8	-86.3	-0.62	152.9	2.01	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	LTE Band 66 Ant0	Back	1.344	1.344	5mm	-23.8	-86.3	-0.62	157.5	2.01	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
						X	Y	Z				
Case 10	LTE Band 38 Ant0	Back	1.164	1.164	5mm	11.2	-84.2	-0.54	157.4	1.83	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm	-35.2	66.2	-0.69				
	Bluetooth Ant 3		0.153		5mm							
	LTE Band 38 Ant0	Back	1.164	1.164	5mm	11.2	-84.2	-0.54	164.8	1.83	0.02	Not required
	5G WLAN Ant3		0.51	0.66	5mm							
	Bluetooth Ant 3		0.153		5mm	-49	69.2	-0.63				

Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 11	GSM850 Ant0	Back	1.385	5mm	-3	-82.3	-0.67	156.0	2.00	0.02	Not required
	2.4G WLAN Ant3		0.612	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 12	GSM1900 Ant0	Back	1.354	5mm	-7	-94.9	-1.08	167.3	1.97	0.02	Not required
	2.4G WLAN Ant3		0.612	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 13	WCDMA II Ant0	Back	1.119	5mm	-17.7	-86.3	-0.71	156.9	1.73	0.01	Not required
	2.4G WLAN Ant3		0.612	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 14	WCDMA IV Ant0	Back	1.388	5mm	-25.3	-87.9	-0.6	157.4	2.00	0.02	Not required
	2.4G WLAN Ant3		0.612	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 15	WCDMA V Ant0	Back	1.393	5mm	-4.7	-80.8	-0.79	154.1	2.01	0.02	Not required
	2.4G WLAN Ant3		0.612	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 16	LTE Band 2 Ant0	Back	1.313	5mm	-16.6	-80.5	-0.69	151.3	1.93	0.02	Not required
	2.4G WLAN Ant3		0.612	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 17	LTE Band 7 Ant0	Back	1.276	5mm	12.2	-84.2	-0.53	162.4	1.89	0.02	Not required
	2.4G WLAN Ant3		0.612	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				



FCC SAR Test Report

Report No. : FA552802

Case 18	LTE Band 26 Ant0	Back	1.382	5mm	-3.1	-80.8	-0.68	154.5	1.99	0.02	Not required
	2.4G WLAN Ant3		0.612	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 19	LTE Band 66 Ant0	Back	1.344	5mm	-23.8	-86.3	-0.62	156.0	1.96	0.02	Not required
	2.4G WLAN Ant3		0.612	5mm	-43	68.5	-0.63				
Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 20	LTE Band 38 Ant0	Back	1.164	5mm	11.2	-84.2	-0.54	162.0	1.78	0.01	Not required
	2.4G WLAN Ant3		0.612	5mm	-43	68.5	-0.63				

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu

16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [9] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [10] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015

Appendixes

Please refer to separated files for the following appendixes

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Test Setup Photos

Appendix E. Conducted RF Output Power Table

-----THE END-----