



FCC RF Test Report

APPLICANT : Motorola Mobility, LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 9653
FCC ID : IHDT56WA1
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Feb. 03, 2017 and testing was completed on Feb. 17, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : IHDT56WA1

Page Number : 1 of 32

Report Issued Date : Mar. 20, 2017

Report Version : Rev. 01

Report Template No.: BU5-FR15EWLB4 AC MA Version 1.5



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	14
3.3 Power Spectral Density Measurement	15
3.4 Unwanted Emissions Measurement.....	17
3.5 AC Conducted Emission Measurement.....	23
3.6 Frequency Stability Measurement	28
3.7 Automatically Discontinue Transmission	29
3.8 Antenna Requirements	30
4 LIST OF MEASURING EQUIPMENT	31
5 UNCERTAINTY OF EVALUATION	32
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR720310F	Rev. 01	Initial issue of report	Mar. 20, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 6.58 dB at 30.810 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 17.90 dB at 0.150 MHz
0	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

1.2 Manufacturer

Motorola Mobility, LLC

222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	9653
FCC ID	IHDT56WA1
IMEI Code	351884080021126 (for Radiation) 351884080020995 (for Conduction)
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/NFC/FM WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 Bluetooth BR/EDR/LE
HW Version	DVT2
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Accessory List	
AC Adapter 1	Brand Name : Motorola
	Model Name : SPN5970A
AC Adapter 2	Brand Name : Motorola
	Model Name : SPN5993A
AC Adapter 3	Brand Name : Motorola
	Model Name : SPN5978A
Battery 1	Brand Name : Motorola
	Model Name : SNN5983A
Battery 2	Brand Name : Motorola
	Model Name : SNN5985A
Earphone	Brand Name : Motorola
	Model Name : SH38C16618
USB Cable	Brand Name : Motorola
	Model Name : SKN6473A

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11a : 18.61 dBm / 0.0726 W 802.11n HT20 : 18.20 dBm / 0.0661 W 802.11n HT40 : 18.50 dBm / 0.0708 W
99% Occupied Bandwidth	802.11a : 19.85 MHz 802.11n HT20 : 20.10 MHz 802.11n HT40 : 37.60 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)
Antenna Type / Gain	Loop Antenna with gain -2.50 dBi

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	-	-	165	5825

Note: The above Frequency and Channel in "*" were 802.11n HT40.

2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

AC Conducted Emission	Mode 1 GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + MP3 + Battery 1 + USB Cable (Charging from Adapter 1)
Remark: All the radiated test cases were performance with Adapter 1 and Battery 1.	


Ch. #		Band IV : 5725-5850 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

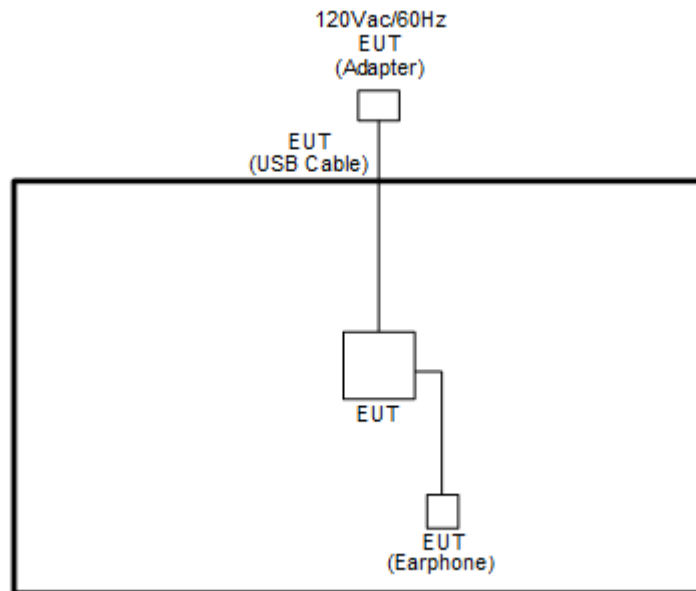

<AC Conducted Emission Mode>

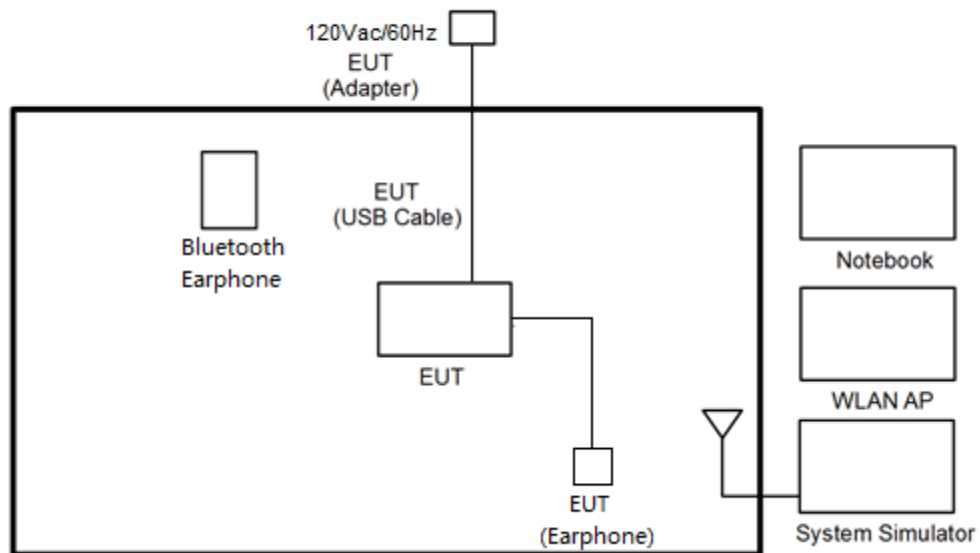

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, programmed RF utility, "CMD" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



3.1.4 Test Setup

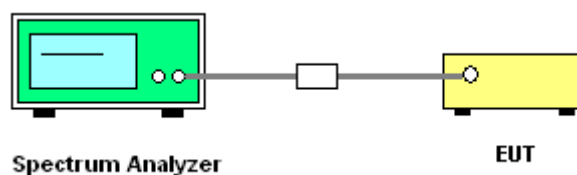




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

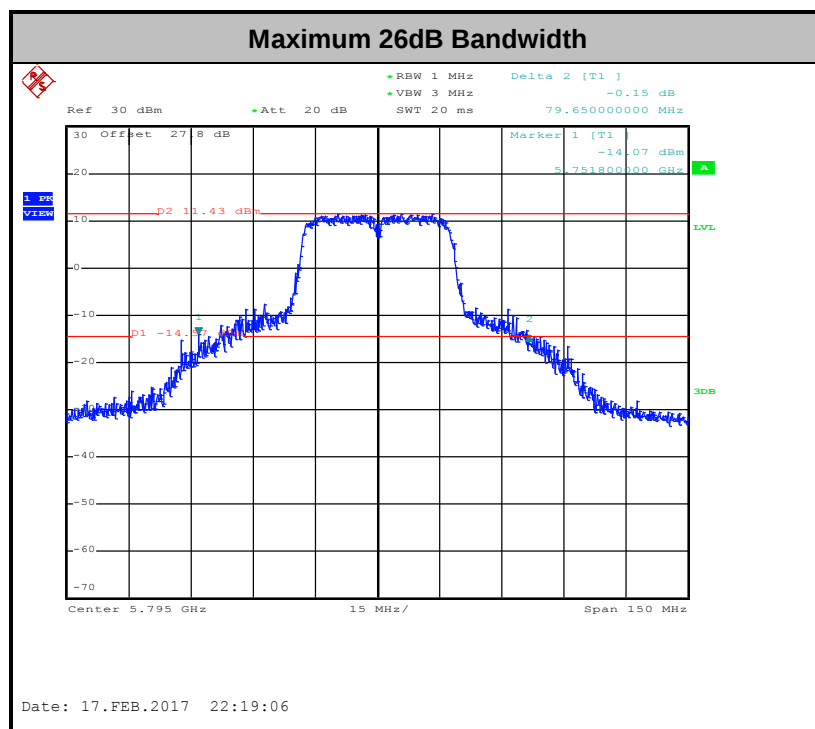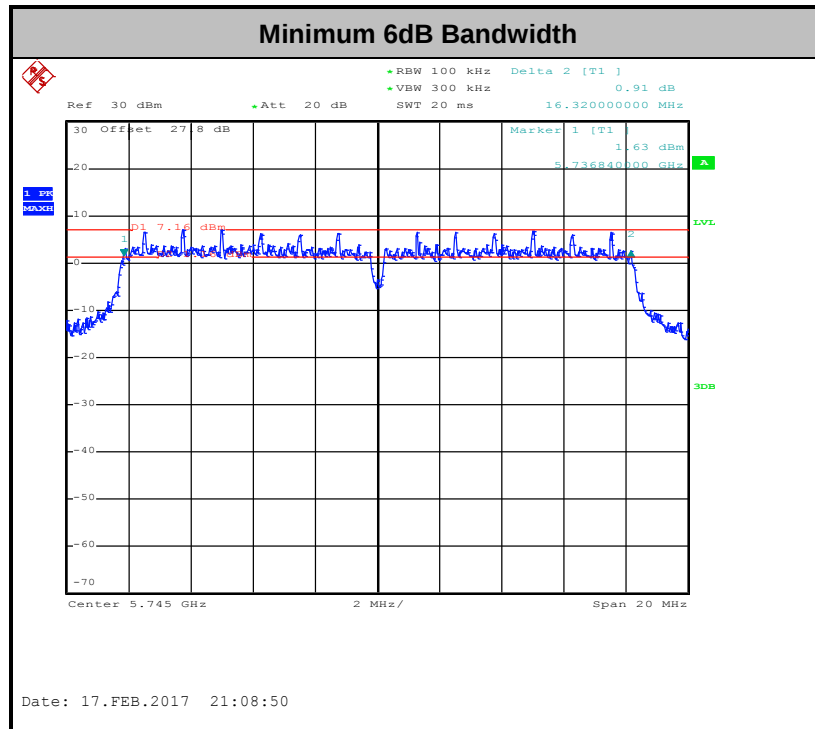

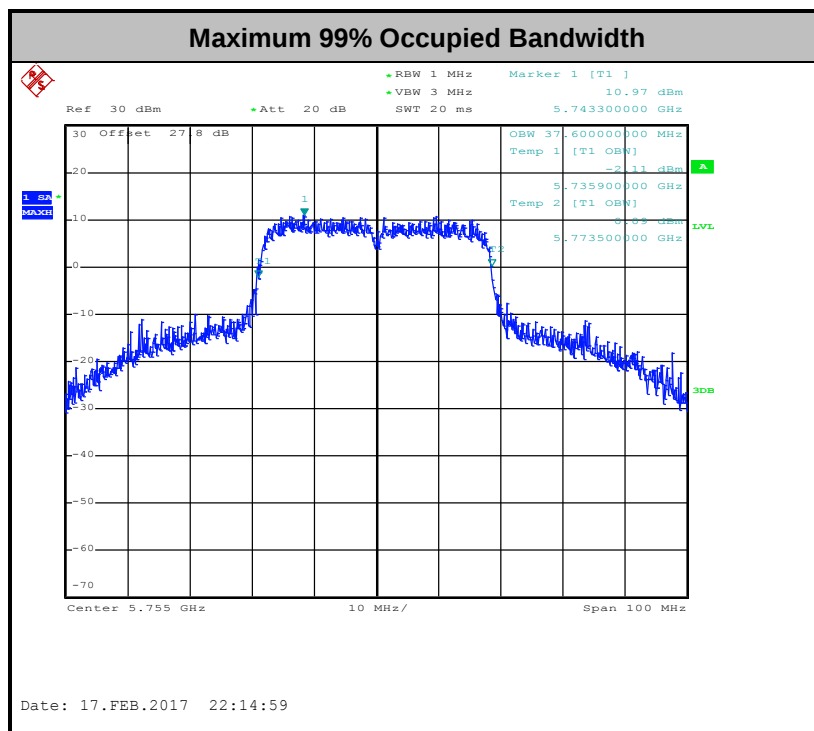

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

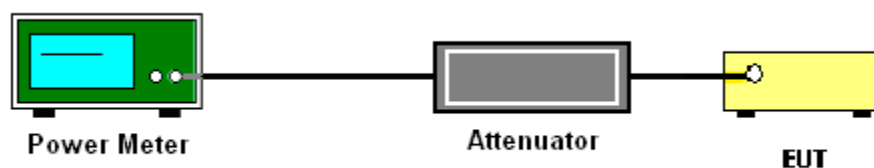

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW $\geq$ 1 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

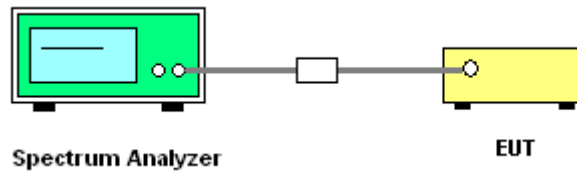

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

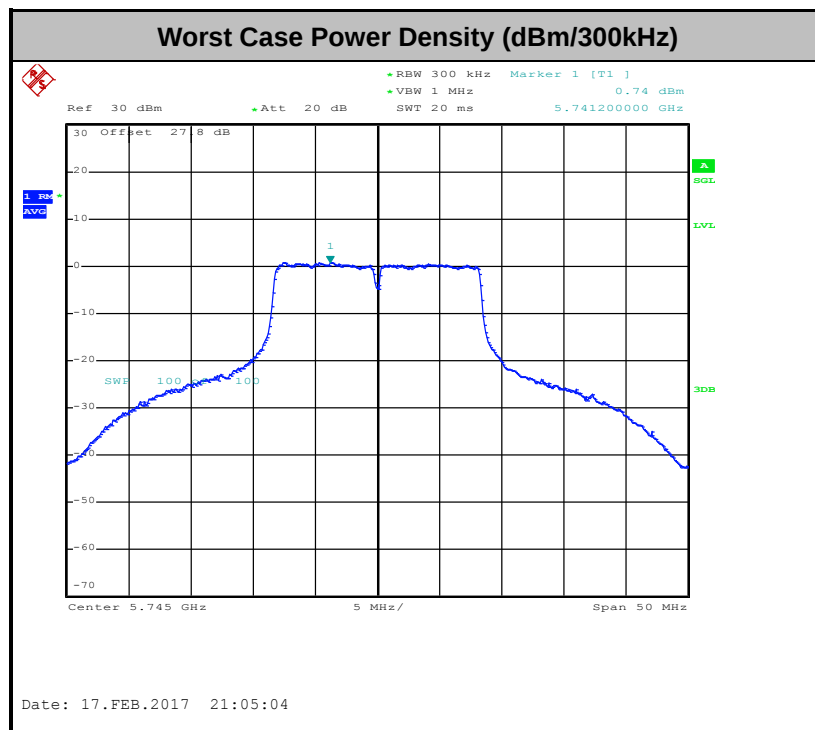

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part 15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

(3) KDB789033 D01 v01r03 G)2)c)

- (i) Section 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and 2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz. However, an out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz dBm/MHz peak emission limit.
- (ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the alternative limit

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

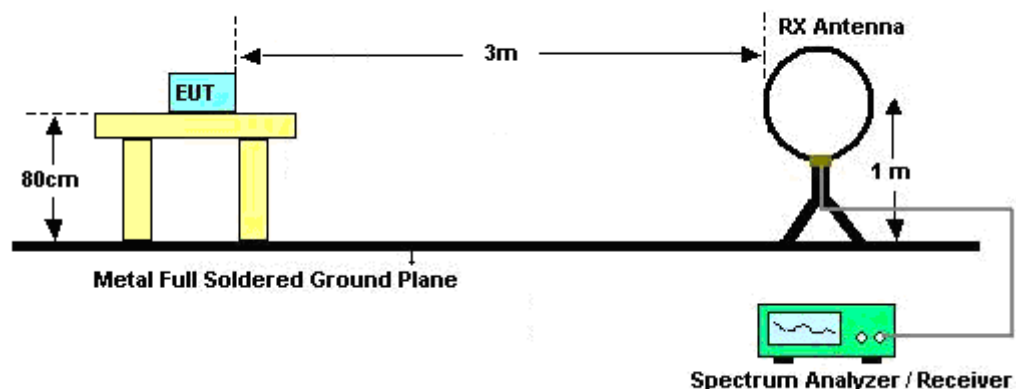

For radiated emissions from 30MHz to 1GHz

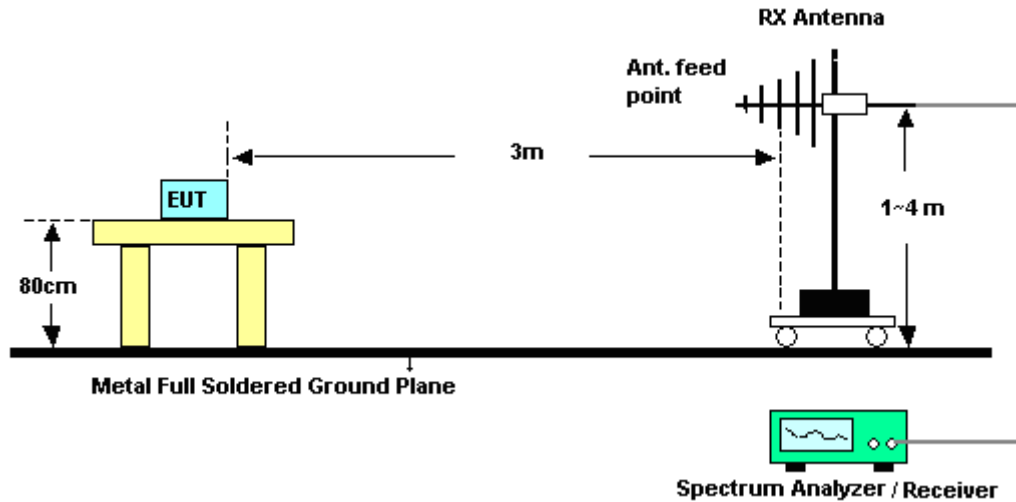

For radiated emissions above 1GHz

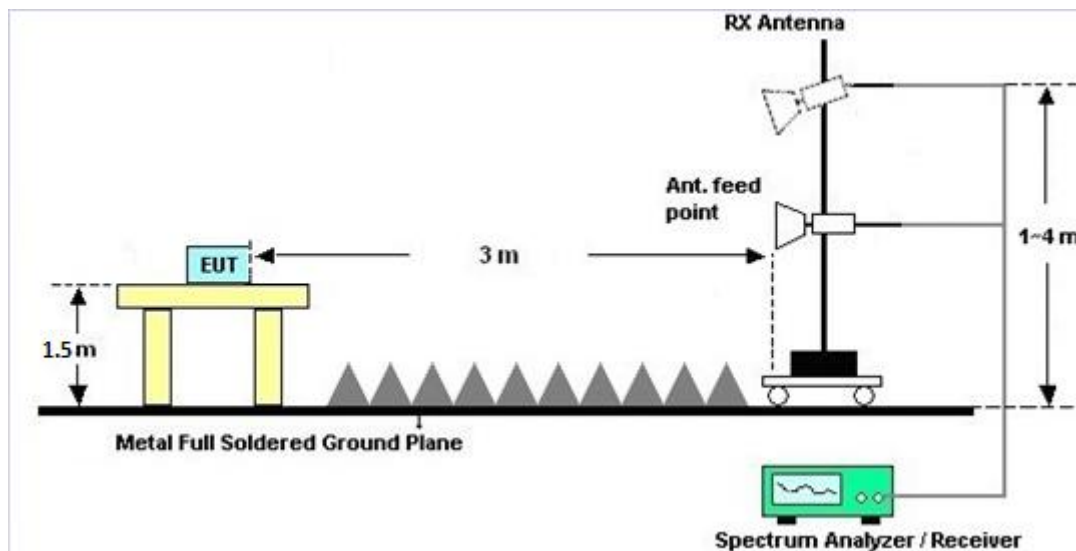



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

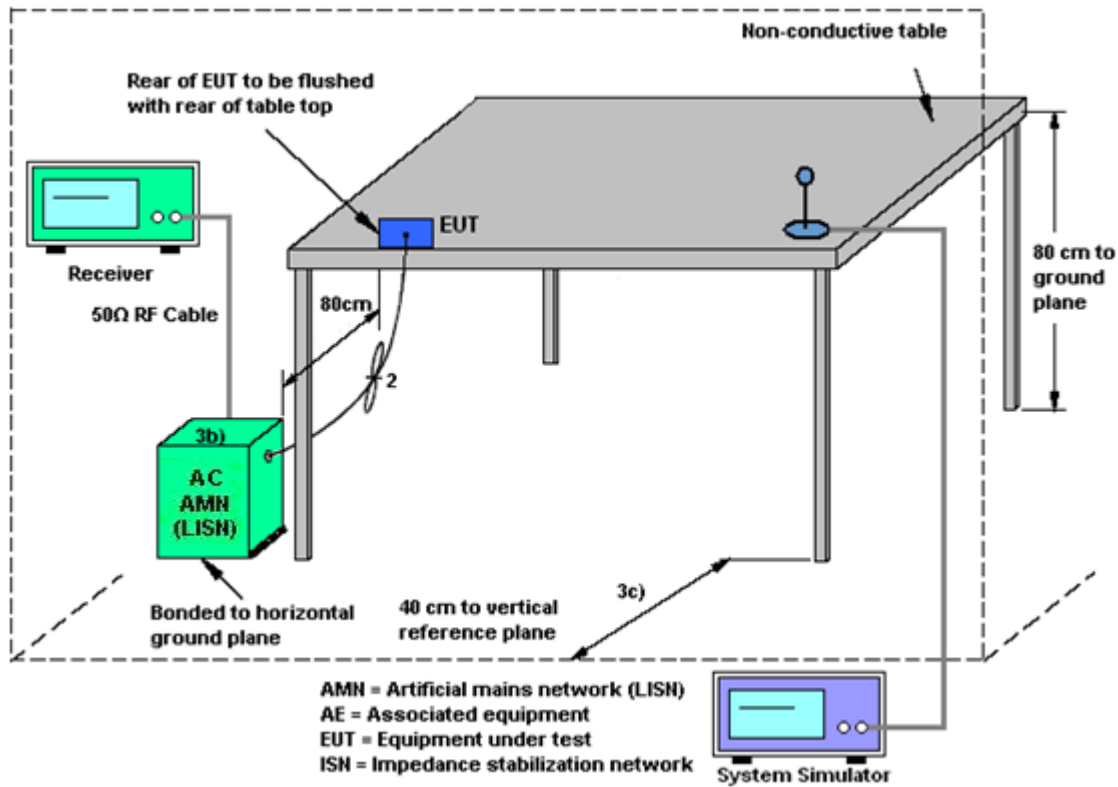

3.5.5 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + MP3 + Battery 1 + USB Cable (Charging from Adapter 1)		

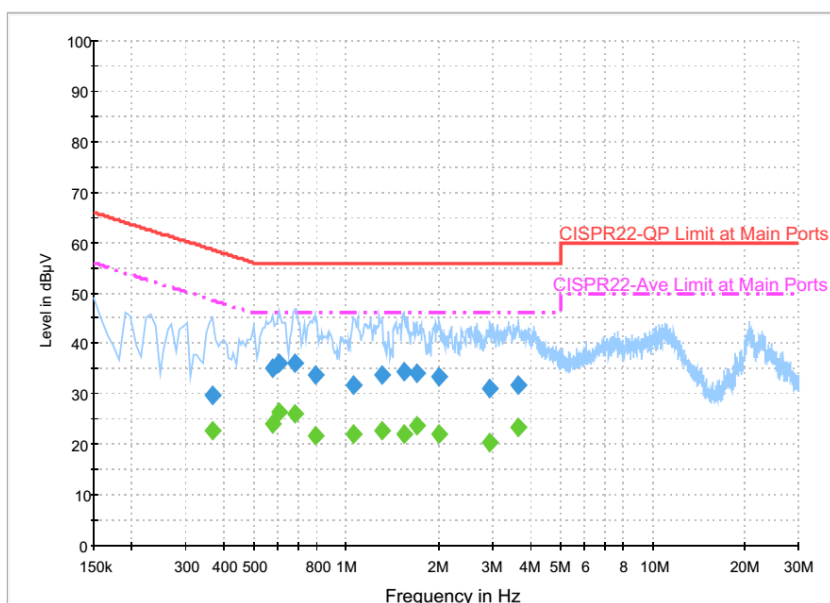

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.366000	29.7	Off	L1	19.6	28.9	58.6
0.574000	35.1	Off	L1	19.6	20.9	56.0
0.606000	36.0	Off	L1	19.6	20.0	56.0
0.678000	36.2	Off	L1	19.6	19.8	56.0
0.798000	33.6	Off	L1	19.6	22.4	56.0
1.054000	31.9	Off	L1	19.6	24.1	56.0
1.310000	33.7	Off	L1	19.6	22.3	56.0
1.542000	34.5	Off	L1	19.6	21.5	56.0
1.702000	34.2	Off	L1	19.6	21.8	56.0
2.022000	33.4	Off	L1	19.6	22.6	56.0
2.958000	31.0	Off	L1	19.6	25.0	56.0
3.638000	31.7	Off	L1	19.7	24.3	56.0


Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + MP3 + Battery 1 + USB Cable (Charging from Adapter 1)		

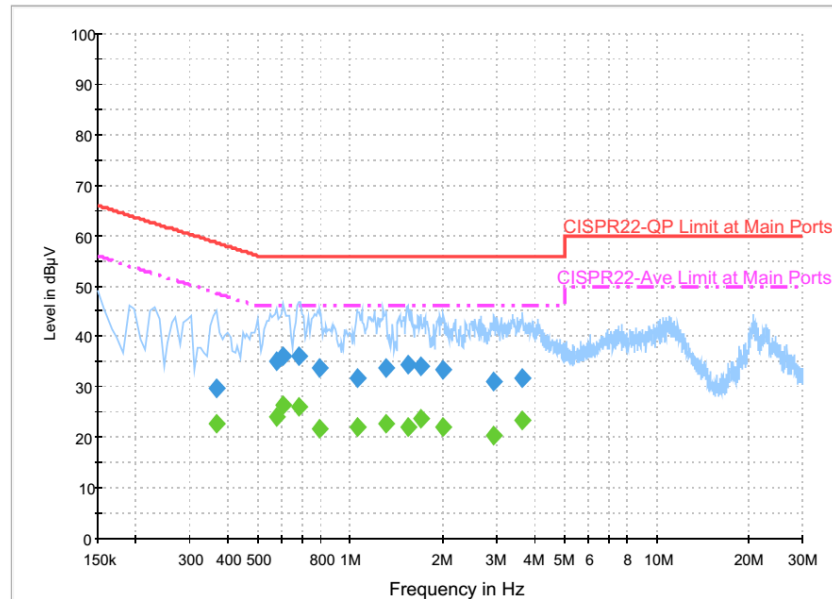
Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.366000	22.9	Off	L1	19.6	25.7	48.6
0.574000	24.2	Off	L1	19.6	21.8	46.0
0.606000	26.5	Off	L1	19.6	19.5	46.0
0.678000	25.9	Off	L1	19.6	20.1	46.0
0.798000	21.9	Off	L1	19.6	24.1	46.0
1.054000	22.1	Off	L1	19.6	23.9	46.0
1.310000	22.6	Off	L1	19.6	23.4	46.0
1.542000	22.1	Off	L1	19.6	23.9	46.0
1.702000	23.6	Off	L1	19.6	22.4	46.0
2.022000	22.2	Off	L1	19.6	23.8	46.0
2.958000	20.3	Off	L1	19.6	25.7	46.0
3.638000	23.4	Off	L1	19.7	22.6	46.0



Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + MP3 + Battery 1 + USB Cable (Charging from Adapter 1)		

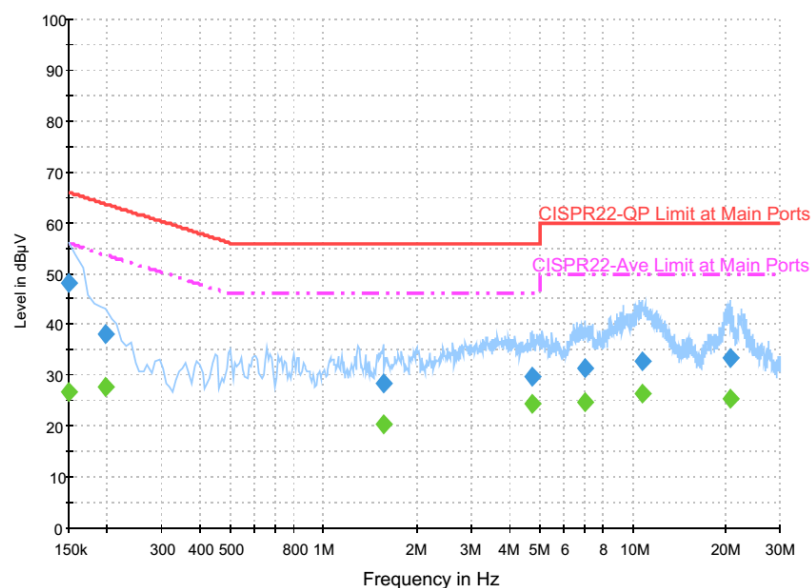

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	48.1	Off	N	19.5	17.9	66.0
0.198000	38.2	Off	N	19.5	25.5	63.7
1.558000	28.6	Off	N	19.6	27.4	56.0
4.758000	29.9	Off	N	19.7	26.1	56.0
7.038000	31.4	Off	N	19.9	28.6	60.0
10.830000	32.9	Off	N	20.1	27.1	60.0
20.830000	33.5	Off	N	20.7	26.5	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	26.9	Off	N	19.5	29.1	56.0
0.198000	27.6	Off	N	19.5	26.1	53.7
1.558000	20.5	Off	N	19.6	25.5	46.0
4.758000	24.3	Off	N	19.7	21.7	46.0
7.038000	24.7	Off	N	19.9	25.3	50.0
10.830000	26.5	Off	N	20.1	23.5	50.0
20.830000	25.5	Off	N	20.7	24.5	50.0

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

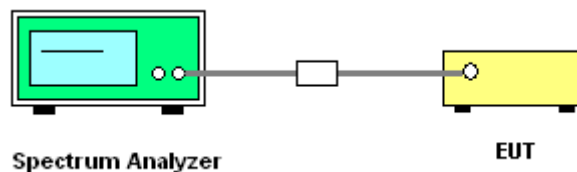

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	0932001	300MHz~40GHz	Sep. 29, 2016	Feb. 09, 2017 ~ Feb. 17, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	0846202	300MHz~40GHz	Sep. 29, 2016	Feb. 09, 2017 ~ Feb. 17, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Jul. 17, 2016	Feb. 09, 2017 ~ Feb. 17, 2017	Jul. 16, 2017	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40℃ ~90℃	Sep. 01, 2016	Feb. 09, 2017 ~ Feb. 17, 2017	Aug. 31, 2017	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 11, 2016	Feb. 09, 2017 ~ Feb. 17, 2017	Oct. 10, 2017	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Feb. 15, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Feb. 15, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Feb. 15, 2017	Nov. 28, 2017	Conduction (CO05-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Feb. 09, 2017 ~ Feb. 15, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Feb. 09, 2017 ~ Feb. 15, 2017	Sep. 01, 2017	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Oct. 15, 2016	Feb. 09, 2017 ~ Feb. 15, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1GHz ~ 18GHz	Oct. 07, 2016	Feb. 09, 2017 ~ Feb. 15, 2017	Oct. 06, 2017	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 10, 2016	Feb. 09, 2017 ~ Feb. 15, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY52350276	10Hz ~ 44GHz	Oct. 12, 2016	Feb. 09, 2017 ~ Feb. 15, 2017	Oct. 11, 2017	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Feb. 09, 2017 ~ Feb. 15, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Feb. 09, 2017 ~ Feb. 15, 2017	N/A	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1815698	1GHz~18GHz	Dec. 01, 2016	Feb. 09, 2017 ~ Feb. 15, 2017	Nov. 30, 2017	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Nov. 08, 2016	Feb. 09, 2017 ~ Feb. 15, 2017	Nov. 07, 2017	Radiation (03CH11-HY)
Preamplifier	MITEQ	TTA0204	1872107	2GHz~40GHz	Feb. 15, 2016	Feb. 09, 2017 ~ Feb. 13, 2017	Feb. 14, 2017	Radiation (03CH11-HY)
Preamplifier	MITEQ	TTA0204	1872107	2GHz~40GHz	Feb. 15, 2017	Feb. 15, 2017	Feb. 14, 2018	Radiation (03CH11-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7
--	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
--	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
--	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
--	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Aking Chang	Temperature:	21~25	°C
Test Date:	2017/02/09~2017/02/17	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	19.8	42.6	16.32	0.5	Pass
11a	6Mbps	1	157	5785	19.55	44.1	16.32	0.5	Pass
11a	6Mbps	1	165	5825	19.85	43.6	16.32	0.5	Pass
HT20	MCS 0	1	149	5745	19.75	45.3	17.28	0.5	Pass
HT20	MCS 0	1	157	5785	20.1	46.95	17.56	0.5	Pass
HT20	MCS 0	1	165	5825	20.1	45.25	17.56	0.5	Pass
HT40	MCS 0	1	151	5755	37.6	74.55	35.08	0.5	Pass
HT40	MCS 0	1	159	5795	37.5	79.65	35.36	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.61	18.42	30.00	-2.50		Pass
11a	6Mbps	1	157	5785	0.61	18.61	30.00	-2.50		Pass
11a	6Mbps	1	165	5825	0.61	18.36	30.00	-2.50		Pass
HT20	MCS 0	1	149	5745	0.66	18.07	30.00	-2.50		Pass
HT20	MCS 0	1	157	5785	0.66	18.20	30.00	-2.50		Pass
HT20	MCS 0	1	165	5825	0.66	18.11	30.00	-2.50		Pass
HT40	MCS 0	1	151	5755	0.70	18.14	30.00	-2.50		Pass
HT40	MCS 0	1	159	5795	0.70	18.50	30.00	-2.50		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.61	2.22	3.57	30.00	-2.50	Pass
11a	6Mbps	1	157	5785	0.61	2.22	3.48	30.00	-2.50	Pass
11a	6Mbps	1	165	5825	0.61	2.22	3.26	30.00	-2.50	Pass
HT20	MCS 0	1	149	5745	0.66	2.22	3.26	30.00	-2.50	Pass
HT20	MCS 0	1	157	5785	0.66	2.22	3.00	30.00	-2.50	Pass
HT20	MCS 0	1	165	5825	0.66	2.22	3.02	30.00	-2.50	Pass
HT40	MCS 0	1	151	5755	0.70	2.22	0.37	30.00	-2.50	Pass
HT40	MCS 0	1	159	5795	0.70	2.22	0.39	30.00	-2.50	Pass

TEST RESULTS DATA
Frequency Stability

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6M bps	1	149	5745	5745.050	0.050	8.70	50	3.9	
11a	6M bps	1	149	5745	5745.050	0.050	8.70	-30	3.9	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	20	4.35	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	20	3.4	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	20	3.9	



Appendix B. Radiated Spurious Emission

Test Engineer :	J.C. Liang, Jacky Hung, and Kan Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5605.4	53.09	-15.11	68.2	41.85	32.84	11.48	33.08	245	126	P	H
		5692.8	55.97	-43.92	99.89	44.65	32.97	11.47	33.12	245	126	P	H
		5715.8	63.33	-46.3	109.63	52.01	32.99	11.46	33.13	245	126	P	H
		5724.8	78.02	-43.72	121.74	66.68	33.01	11.46	33.13	245	126	P	H
	*	5745	110.42	-	-	99.07	33.04	11.46	33.15	245	126	P	H
	*	5745	102.66	-	-	91.31	33.04	11.46	33.15	245	126	A	H
													H
													H
		5624.8	51.39	-16.81	68.2	40.13	32.87	11.47	33.08	372	66	P	V
		5694.4	51.19	-49.88	101.07	39.87	32.97	11.47	33.12	372	66	P	V
		5718.6	59.04	-51.37	110.41	47.7	33.01	11.46	33.13	372	66	P	V
		5725	68.86	-53.34	122.2	57.52	33.01	11.46	33.13	372	66	P	V
	*	5745	104.4	-	-	93.05	33.04	11.46	33.15	372	66	P	V
	*	5745	97	-	-	85.65	33.04	11.46	33.15	372	66	A	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5637.2	51.36	-16.84	68.2	40.1	32.89	11.47	33.1	251	124	P	H
		5666.6	51.22	-29.3	80.52	39.92	32.94	11.47	33.11	251	124	P	H
		5717.2	52.63	-57.39	110.02	41.31	32.99	11.46	33.13	251	124	P	H
		5720.4	50.33	-61.38	111.71	38.99	33.01	11.46	33.13	251	124	P	H
	*	5785	110.52	-	-	99.15	33.09	11.45	33.17	251	124	P	H
	*	5785	102.4	-	-	91.03	33.09	11.45	33.17	251	124	A	H
		5852.8	50.29	-65.53	115.82	38.77	33.18	11.53	33.19	251	124	P	H
		5863.4	50.84	-57.61	108.45	39.24	33.21	11.6	33.21	251	124	P	H
		5883.2	50.64	-48.47	99.11	39.02	33.23	11.6	33.21	251	124	P	H
		5934.2	49.99	-18.21	68.2	38.25	33.3	11.67	33.23	251	124	P	H
													H
													H
		5638.4	51.07	-17.13	68.2	39.81	32.89	11.47	33.1	366	66	P	V
		5689.2	50.4	-46.84	97.24	39.08	32.97	11.47	33.12	366	66	P	V
		5700.4	49.21	-56.1	105.31	37.9	32.97	11.46	33.12	366	66	P	V
		5720.2	49	-62.26	111.26	37.66	33.01	11.46	33.13	366	66	P	V
	*	5785	103.62	-	-	92.25	33.09	11.45	33.17	366	66	P	V
	*	5785	96.4	-	-	85.03	33.09	11.45	33.17	366	66	A	V
		5852.4	49.73	-67	116.73	38.21	33.18	11.53	33.19	366	66	P	V
		5861	51.14	-57.98	109.12	39.54	33.21	11.6	33.21	366	66	P	V
		5906.4	51.21	-30.72	81.93	39.48	33.28	11.67	33.22	366	66	P	V
		5939	50.92	-17.28	68.2	39.16	33.33	11.67	33.24	366	66	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	109.26	-	-	97.75	33.16	11.53	33.18	233	124	P	H
	*	5825	102.03	-	-	90.52	33.16	11.53	33.18	233	124	A	H
		5850.6	62.39	-58.44	120.83	50.87	33.18	11.53	33.19	233	124	P	H
		5856.2	57.46	-53	110.46	45.91	33.21	11.53	33.19	233	124	P	H
		5877.8	52.92	-50.2	103.12	41.3	33.23	11.6	33.21	233	124	P	H
		5948.4	51.33	-16.87	68.2	39.5	33.33	11.74	33.24	233	124	P	H
													H
													H
	*	5825	103.16	-	-	91.65	33.16	11.53	33.18	362	66	P	V
	*	5825	95.95	-	-	84.44	33.16	11.53	33.18	362	66	A	V
		5850	56.47	-65.73	122.2	44.95	33.18	11.53	33.19	362	66	P	V
		5855	54.43	-56.37	110.8	42.88	33.21	11.53	33.19	362	66	P	V
		5887	50.61	-45.68	96.29	39	33.23	11.6	33.22	362	66	P	V
		5948	50.25	-17.95	68.2	38.42	33.33	11.74	33.24	362	66	P	V
													V
													V
													V
Remark 1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	46.9	-27.1	74	49.5	39.12	15.85	57.57	100	0	P	H
		17235	49.69	-18.51	68.2	43.11	42.84	20.57	56.83	100	0	P	H
													H
													H
		11490	48.14	-25.86	74	50.74	39.12	15.85	57.57	100	0	P	V
		17235	49.51	-18.69	68.2	42.93	42.84	20.57	56.83	100	0	P	V
													V
													V
802.11a CH 157 5785MHz		11570	45.57	-28.43	74	48.19	39.07	15.91	57.6	100	0	P	H
		17355	49.16	-19.04	68.2	42.42	43.26	20.78	57.3	100	0	P	H
													H
													H
		11570	48.1	-25.9	74	50.72	39.07	15.91	57.6	100	0	P	V
		17355	48.8	-19.4	68.2	42.06	43.26	20.78	57.3	100	0	P	V
													V
													V
802.11a CH 165 5825MHz		11650	45.18	-28.82	74	47.77	39.04	15.97	57.6	100	0	P	H
		17475	50.62	-17.58	68.2	43.72	43.68	20.99	57.77	100	0	P	H
													H
													H
		11650	48.1	-25.9	74	50.69	39.04	15.97	57.6	100	0	P	V
		17475	49.88	-18.32	68.2	42.98	43.68	20.99	57.77	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5627.8	49.8	-18.4	68.2	38.54	32.87	11.47	33.08	244	121	P	H
		5694	55.49	-45.29	100.78	44.17	32.97	11.47	33.12	244	121	P	H
		5720	65.25	-45.55	110.8	53.91	33.01	11.46	33.13	244	121	P	H
		5725	77.55	-44.65	122.2	66.21	33.01	11.46	33.13	244	121	P	H
	*	5745	109.89	-	-	98.54	33.04	11.46	33.15	244	121	P	H
	*	5745	102.48	-	-	91.13	33.04	11.46	33.15	244	121	A	H
													H
													H
		5607.6	50.27	-17.93	68.2	39.03	32.84	11.48	33.08	373	66	P	V
		5654.2	51.26	-20.06	71.32	39.98	32.92	11.47	33.11	373	66	P	V
		5715.4	58.24	-51.27	109.51	46.92	32.99	11.46	33.13	373	66	P	V
		5724.2	68.16	-52.22	120.38	56.82	33.01	11.46	33.13	373	66	P	V
	*	5745	103.91	-	-	92.56	33.04	11.46	33.15	373	66	P	V
	*	5745	95.86	-	-	84.51	33.04	11.46	33.15	373	66	A	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5627	51.07	-17.13	68.2	39.81	32.87	11.47	33.08	252	123	P	H
		5698	51.01	-52.72	103.73	39.69	32.97	11.47	33.12	252	123	P	H
		5719.6	51.21	-59.48	110.69	39.87	33.01	11.46	33.13	252	123	P	H
		5720.2	48.62	-62.64	111.26	37.28	33.01	11.46	33.13	252	123	P	H
	*	5785	109.53	-	-	98.16	33.09	11.45	33.17	252	123	P	H
	*	5785	101.68	-	-	90.31	33.09	11.45	33.17	252	123	A	H
		5853	51	-64.36	115.36	39.48	33.18	11.53	33.19	252	123	P	H
		5865.6	50.89	-56.94	107.83	39.29	33.21	11.6	33.21	252	123	P	H
		5888.2	52.24	-43.16	95.4	40.6	33.26	11.6	33.22	252	123	P	H
		5942.8	50.39	-17.81	68.2	38.56	33.33	11.74	33.24	252	123	P	H
													H
													H
		5626	50.77	-17.43	68.2	39.51	32.87	11.47	33.08	365	66	P	V
		5673.6	50.67	-35.03	85.7	39.37	32.94	11.47	33.11	365	66	P	V
		5700.8	50.29	-55.13	105.42	38.96	32.99	11.46	33.12	365	66	P	V
		5723	49.05	-68.59	117.64	37.71	33.01	11.46	33.13	365	66	P	V
	*	5785	103.17	-	-	91.8	33.09	11.45	33.17	365	66	P	V
	*	5785	95.74	-	-	84.37	33.09	11.45	33.17	365	66	A	V
		5850.4	51.42	-69.87	121.29	39.9	33.18	11.53	33.19	365	66	P	V
		5855.4	51.13	-59.56	110.69	39.58	33.21	11.53	33.19	365	66	P	V
		5908.6	50.76	-29.54	80.3	39.03	33.28	11.67	33.22	365	66	P	V
		5929.2	50.14	-18.06	68.2	38.4	33.3	11.67	33.23	365	66	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz	*	5825	107.81	-	-	96.3	33.16	11.53	33.18	218	121	P	H
	*	5825	100.42	-	-	88.91	33.16	11.53	33.18	218	121	A	H
		5850	62.82	-59.38	122.2	51.3	33.18	11.53	33.19	218	121	P	H
		5855.6	58.93	-51.7	110.63	47.38	33.21	11.53	33.19	218	121	P	H
		5879.8	53.33	-48.3	101.63	41.71	33.23	11.6	33.21	218	121	P	H
		5939.2	50.79	-17.41	68.2	39.03	33.33	11.67	33.24	218	121	P	H
													H
													H
	*	5825	102.95	-	-	91.44	33.16	11.53	33.18	361	66	P	V
	*	5825	95.07	-	-	83.56	33.16	11.53	33.18	361	66	A	V
		5850.2	57.83	-63.91	121.74	46.31	33.18	11.53	33.19	361	66	P	V
		5856.4	54.87	-55.54	110.41	43.32	33.21	11.53	33.19	361	66	P	V
		5890.8	51.63	-41.84	93.47	39.99	33.26	11.6	33.22	361	66	P	V
		5940.4	50.21	-17.99	68.2	38.38	33.33	11.74	33.24	361	66	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	46.05	-27.95	74	48.65	39.12	15.85	57.57	100	0	P	H
		17235	49.12	-19.08	68.2	42.54	42.84	20.57	56.83	100	0	P	H
													H
													H
		11490	44.66	-29.34	74	47.26	39.12	15.85	57.57	100	0	P	V
		17235	48.46	-19.74	68.2	41.88	42.84	20.57	56.83	100	0	P	V
													V
													V
802.11n HT20 CH 157 5785MHz		11570	44.74	-29.26	74	47.36	39.07	15.91	57.6	100	0	P	H
		17355	48.31	-19.89	68.2	41.57	43.26	20.78	57.3	100	0	P	H
													H
													H
		11570	47.43	-26.57	74	50.05	39.07	15.91	57.6	100	0	P	V
		17355	48.66	-19.54	68.2	41.92	43.26	20.78	57.3	100	0	P	V
													V
													V
802.11n HT20 CH 165 5825MHz		11650	44.36	-29.64	74	46.95	39.04	15.97	57.6	100	0	P	H
		17475	50.2	-18	68.2	43.3	43.68	20.99	57.77	100	0	P	H
													H
													H
		11650	47.33	-26.67	74	49.92	39.04	15.97	57.6	100	0	P	V
		17475	50.6	-17.6	68.2	43.7	43.68	20.99	57.77	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5648.6	51.21	-16.99	68.2	39.95	32.89	11.47	33.1	216	126	P	H
		5698.2	56.36	-47.51	103.87	45.04	32.97	11.47	33.12	216	126	P	H
		5716.4	69.34	-40.45	109.79	58.02	32.99	11.46	33.13	216	126	P	H
		5724.8	73.07	-48.67	121.74	61.73	33.01	11.46	33.13	216	126	P	H
	*	5755	105.02	-	-	93.65	33.06	11.46	33.15	216	126	P	H
	*	5755	98.06	-	-	86.69	33.06	11.46	33.15	216	126	A	H
		5854.4	50.6	-61.57	112.17	39.05	33.21	11.53	33.19	216	126	P	H
		5858.2	50.54	-59.36	109.9	39.01	33.21	11.53	33.21	216	126	P	H
		5898.4	50.56	-37.29	87.85	38.92	33.26	11.6	33.22	216	126	P	H
		5948.4	51.69	-16.51	68.2	39.86	33.33	11.74	33.24	216	126	P	H
													H
													H
		5607.4	50.08	-18.12	68.2	38.84	32.84	11.48	33.08	271	53	P	V
		5695.4	52.88	-48.93	101.81	41.56	32.97	11.47	33.12	271	53	P	V
		5717.4	60.86	-49.21	110.07	49.54	32.99	11.46	33.13	271	53	P	V
		5725	64.91	-57.29	122.2	53.57	33.01	11.46	33.13	271	53	P	V
	*	5755	99.49	-	-	88.12	33.06	11.46	33.15	271	53	P	V
	*	5755	91.75	-	-	80.38	33.06	11.46	33.15	271	53	A	V
		5855	49.46	-61.34	110.8	37.91	33.21	11.53	33.19	271	53	P	V
		5862	50.48	-58.36	108.84	38.88	33.21	11.6	33.21	271	53	P	V
		5887.4	51.36	-44.63	95.99	39.75	33.23	11.6	33.22	271	53	P	V
		5950	50.29	-17.91	68.2	38.46	33.33	11.74	33.24	271	53	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5648.4	51.26	-16.94	68.2	40	32.89	11.47	33.1	251	125	P	H
		5690.2	52.48	-45.49	97.97	41.16	32.97	11.47	33.12	251	125	P	H
		5715	53.08	-56.32	109.4	41.76	32.99	11.46	33.13	251	125	P	H
		5720.6	57.46	-54.71	112.17	46.12	33.01	11.46	33.13	251	125	P	H
	*	5795	106.95	-	-	95.56	33.11	11.45	33.17	251	125	P	H
	*	5795	99.27	-	-	87.88	33.11	11.45	33.17	251	125	A	H
		5852.8	57.86	-57.96	115.82	46.34	33.18	11.53	33.19	251	125	P	H
		5857.4	54.5	-55.63	110.13	42.95	33.21	11.53	33.19	251	125	P	H
		5878.2	51.67	-51.15	102.82	40.05	33.23	11.6	33.21	251	125	P	H
		5933.6	50.64	-17.56	68.2	38.9	33.3	11.67	33.23	251	125	P	H
													H
													H
		5640.8	50.75	-17.45	68.2	39.49	32.89	11.47	33.1	369	66	P	V
		5692	51.54	-47.76	99.3	40.22	32.97	11.47	33.12	369	66	P	V
		5712.4	50.4	-58.27	108.67	39.08	32.99	11.46	33.13	369	66	P	V
		5721.4	53.46	-60.53	113.99	42.12	33.01	11.46	33.13	369	66	P	V
	*	5795	100.99	-	-	89.6	33.11	11.45	33.17	369	66	P	V
	*	5795	93.52	-	-	82.13	33.11	11.45	33.17	369	66	A	V
		5852.8	53.21	-62.61	115.82	41.69	33.18	11.53	33.19	369	66	P	V
		5860	54.18	-55.22	109.4	42.65	33.21	11.53	33.21	369	66	P	V
		5877.4	52.2	-51.22	103.42	40.58	33.23	11.6	33.21	369	66	P	V
		5930.8	50.83	-17.37	68.2	39.09	33.3	11.67	33.23	369	66	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	47.82	-26.18	74	50.44	39.1	15.88	57.6	100	0	P	H
		17265	49.18	-19.02	68.2	42.55	42.96	20.64	56.97	100	0	P	H
													H
													H
		11510	44.19	-29.81	74	46.81	39.1	15.88	57.6	100	0	P	V
		17265	49.16	-19.04	68.2	42.53	42.96	20.64	56.97	100	0	P	V
													V
													V
802.11n HT40 CH 159 5795MHz		11590	47.55	-26.45	74	50.14	39.07	15.94	57.6	100	0	P	H
		17385	48.66	-19.54	68.2	41.86	43.38	20.85	57.43	100	0	P	H
													H
													H
		11590	44.82	-29.18	74	47.41	39.07	15.94	57.6	100	0	P	V
		17385	48.82	-19.38	68.2	42.02	43.38	20.85	57.43	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

Emission below 1GHz

5GHz WIFI 802.11a (LF @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11a LF		30	24.06	-15.94	40	29.57	25.7	1.29	32.5	-	-	P	H
		162.03	27.16	-16.34	43.5	41.19	16.7	2	32.73	-	-	P	H
		210.09	27.22	-16.28	43.5	41.76	16.2	2.1	32.84	-	-	P	H
		469.4	25.23	-20.77	46	30.7	23.61	3.28	32.36	-	-	P	H
		760.6	30.14	-15.86	46	30.51	27.83	4.09	32.29	-	-	P	H
		948.2	33.74	-12.26	46	29.7	30.57	4.69	31.22	100	0	P	H
													H
													H
													H
													H
													H
													H
		30.81	33.42	-6.58	40	39.44	25.18	1.29	32.49	200	87	P	V
		38.91	31.75	-8.25	40	42.09	20.86	1.29	32.49	-	-	P	V
		46.2	29.63	-10.37	40	44.2	16.63	1.29	32.49	-	-	P	V
		449.8	24.04	-21.96	46	29.99	23.3	3.11	32.36	-	-	P	V
		715.1	28.79	-17.21	46	30.21	26.99	4.02	32.43	-	-	P	V
		929.3	32.95	-13.05	46	29.69	30.02	4.63	31.39	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Emission below 1GHz

5GHz WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11n HT20 LF		30	23.01	-16.99	40	28.52	25.7	1.29	32.5	-	-	P	H
		99.93	25.31	-18.19	43.5	40.18	16.1	1.51	32.48	-	-	P	H
		200.64	27.13	-16.37	43.5	41.89	16.02	2.1	32.88	-	-	P	H
		433	23.53	-22.47	46	29.78	22.99	3.11	32.35	-	-	P	H
		710.2	28.33	-17.67	46	29.85	26.9	4.02	32.44	-	-	P	H
		948.2	33.39	-12.61	46	29.35	30.57	4.69	31.22	100	0	P	H
													H
													H
													H
													H
													H
													H
		31.08	32.19	-7.81	40	38.21	25.18	1.29	32.49	200	100	P	V
		38.64	30.95	-9.05	40	41.29	20.86	1.29	32.49	-	-	P	V
		47.01	29.21	-10.79	40	44.21	16.2	1.29	32.49	-	-	P	V
		414.1	23.15	-22.85	46	29.92	22.66	2.91	32.34	-	-	P	V
		667.5	27.62	-18.38	46	29.78	26.37	3.94	32.47	-	-	P	V
		944	33.57	-12.43	46	29.7	30.44	4.69	31.26	-	-	P	V
													V
													V
												V	
												V	
												V	
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Emission below 1GHz

5GHz WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11n HT40 LF		30.54	23.08	-16.92	40	29.11	25.18	1.29	32.5	-	-	P	H
		162.84	27.19	-16.31	43.5	41.33	16.6	2	32.74	-	-	P	H
		202.53	28.13	-15.37	43.5	42.86	16.05	2.1	32.88	-	-	P	H
		486.2	24.78	-21.22	46	30	23.87	3.28	32.37	-	-	P	H
		782.3	30.06	-15.94	46	29.94	28.09	4.26	32.23	-	-	P	H
		953.1	33.64	-12.36	46	29.53	30.59	4.69	31.17	100	0	P	H
													H
													H
													H
													H
													H
													H
													H
		30.81	31.82	-8.18	40	37.84	25.18	1.29	32.49	200	86	P	V
		38.64	30.92	-9.08	40	41.26	20.86	1.29	32.49	-	-	P	V
		47.82	28.76	-11.24	40	43.76	16.2	1.29	32.49	-	-	P	V
		471.5	24.81	-21.19	46	30.26	23.64	3.28	32.37	-	-	P	V
		736.1	29.54	-16.46	46	30.46	27.43	4.02	32.37	-	-	P	V
		957.3	33.86	-12.14	46	29.73	30.58	4.69	31.14	-	-	P	V
													V
													V
													V
													V
													V
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	J.C. Liang, Jacky Hung, and Kan Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%



Note symbol

-L	Low channel location
-R	High channel location





Band 4 - 5725~5850MHz




WIFI 802.11a (Band Edge @ 3m)

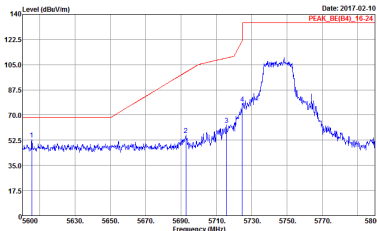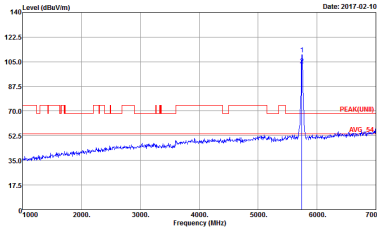WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CHI1-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF HORIZONTAL	 Site : 03CHI1-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL


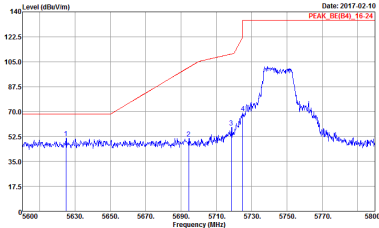
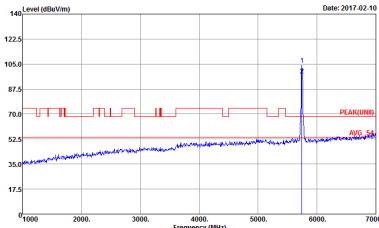


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL	 Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL

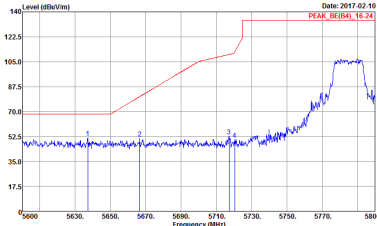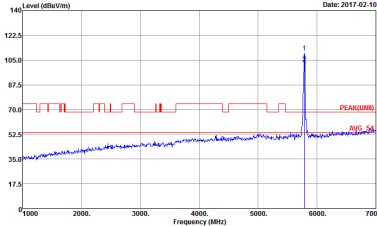
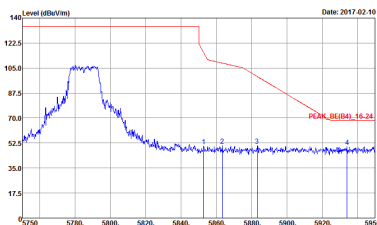


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF HORIZONTAL	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL
Peak	 Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF HORIZONTAL	Left blank

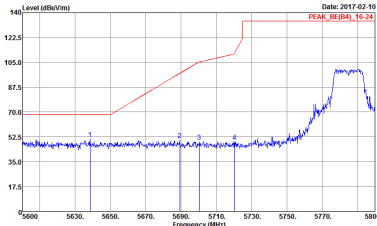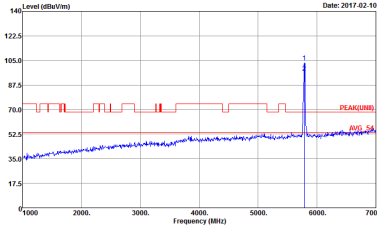
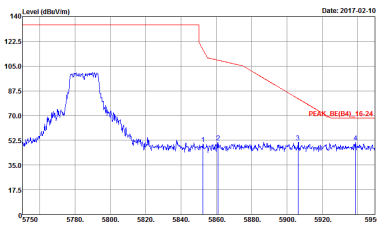


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 91200-HF VERTICAL	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 91200-HF VERTICAL
	 Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 91200-HF VERTICAL	Left blank

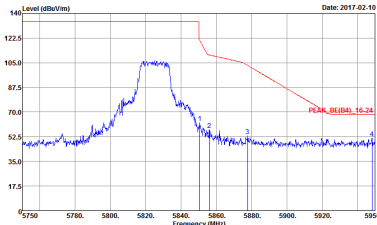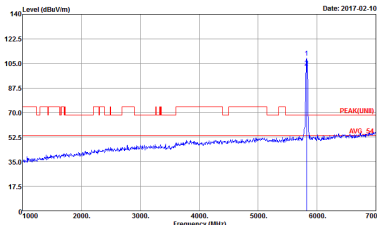

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CHI1-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL	 Site : 03CHI1-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL

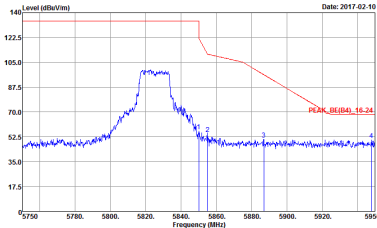
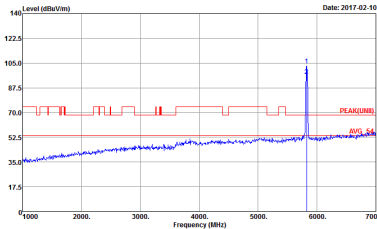


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	 Site : 03CHI1-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL	 Site : 03CHI1-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL





Band 4 5725~5850MHz




WIFI 802.11n HT20 (Band Edge @ 3m)

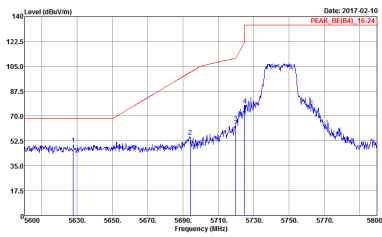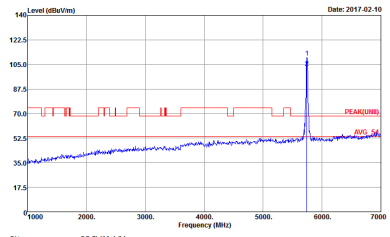WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-JHY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL	 Site : 03CH11-JHY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL


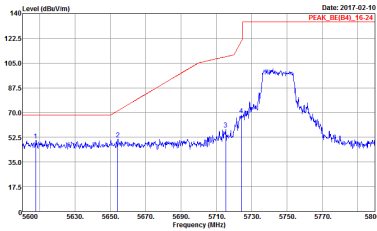
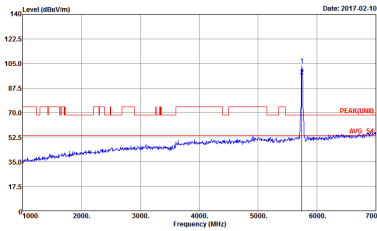


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Vertical	Fundamental
Peak	 Site : 03CHI1-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL	 Site : 03CHI1-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL

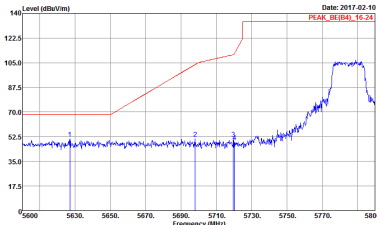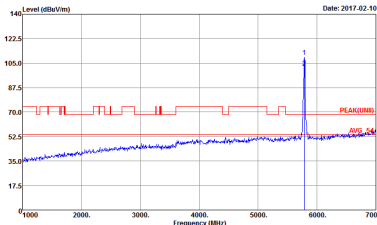
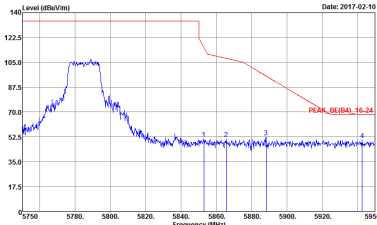


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-I-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL	 Site : 03CH11-I-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL
	 Site : 03CH11-I-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL	Left blank

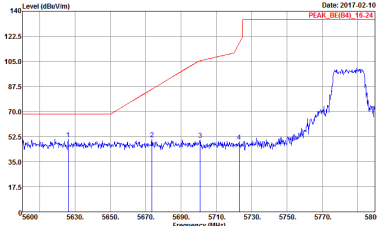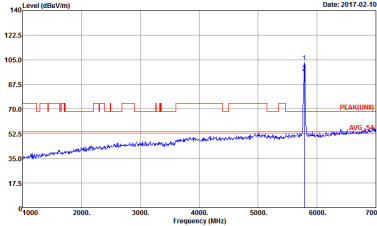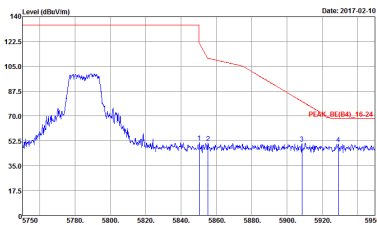

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 91200-HF VERTICAL	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 91200-HF VERTICAL
	 Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 91200-HF VERTICAL	Left blank

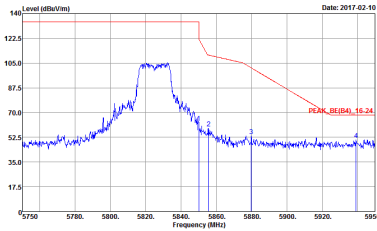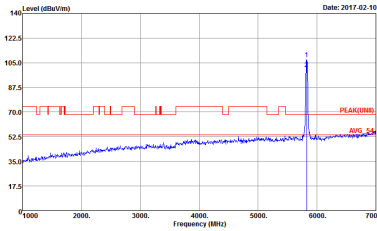

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL









WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Vertical	Fundamental
Peak	Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL	Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL






Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

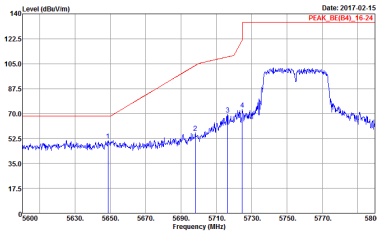
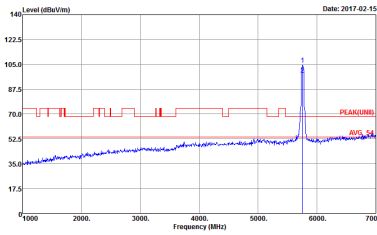
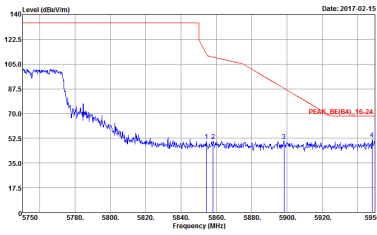
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL	Left blank

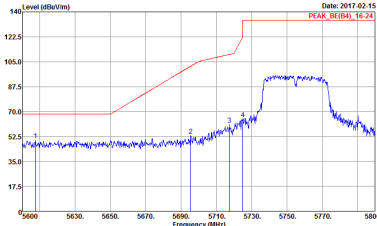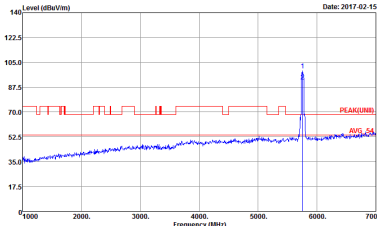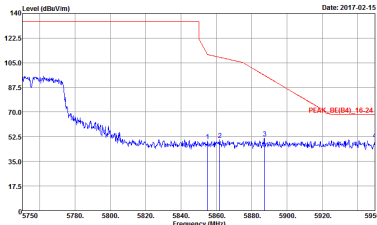WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL	 Site : 03CH11-HY Condition : PEAK(B4)_16-24 3m HORN 9120D-HF VERTICAL
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL	Left blank

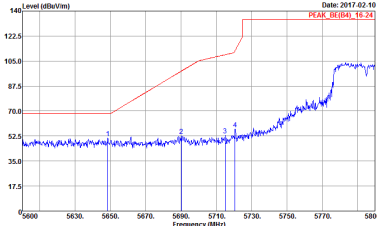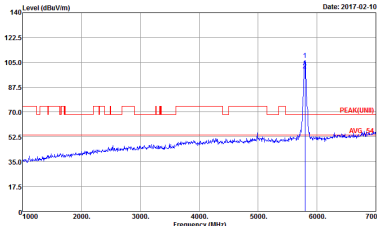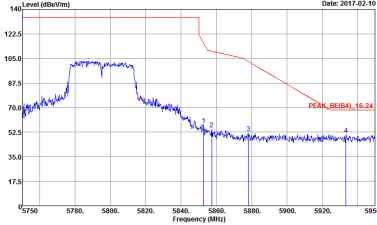

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL	 Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL	Left blank

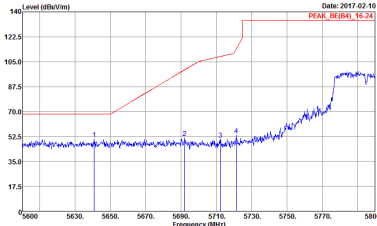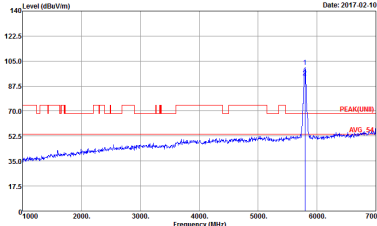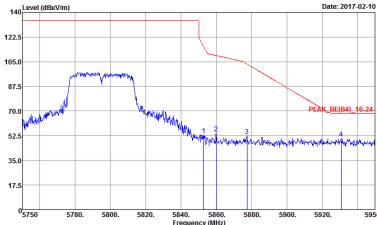



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 91200-HF VERTICAL	 Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 91200-HF VERTICAL
	 Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 91200-HF VERTICAL	Left blank





Band 4 5725~5850MHz

Band 4 - 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

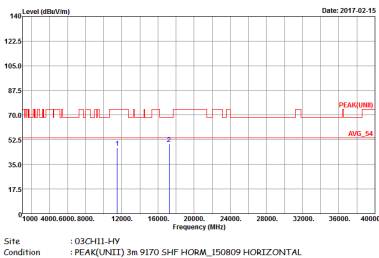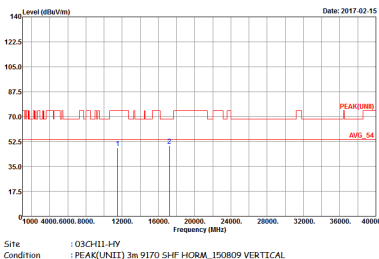WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 HORIZONTAL	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 VERTICAL

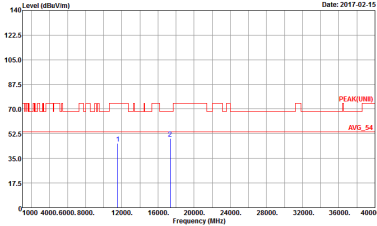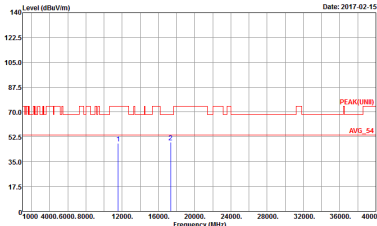

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 HORIZONTAL	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 VERTICAL





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : PEAK[UNIT] 3m 9170 SHF HORM_150809 HORIZONTAL	Site : 03CH11-HY Condition : PEAK[UNIT] 3m 9170 SHF HORM_150809 VERTICAL





Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 HORIZONTAL	Site : 03CH11-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 VERTICAL

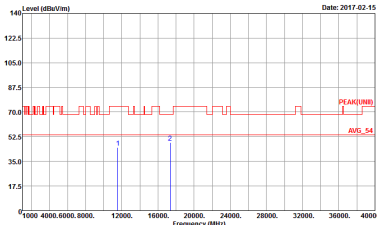
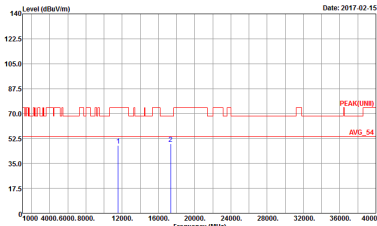


WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 HORIZONTAL	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 VERTICAL

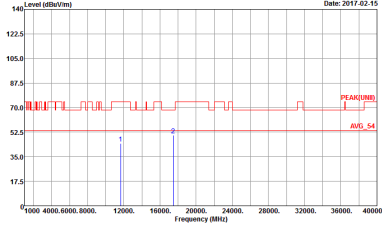
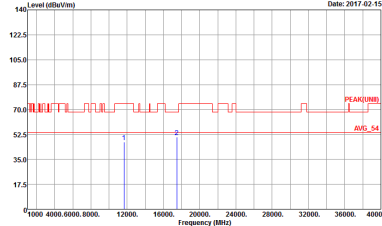


WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : PEAK[UNIT] 3m 9170 SHF HORM_150809 HORIZONTAL	 Site : 03CH11-HY Condition : PEAK[UNIT] 3m 9170 SHF HORM_150809 VERTICAL



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

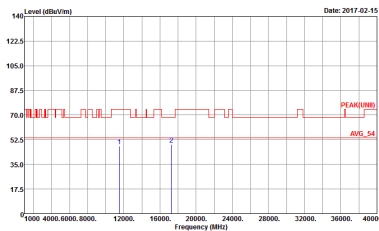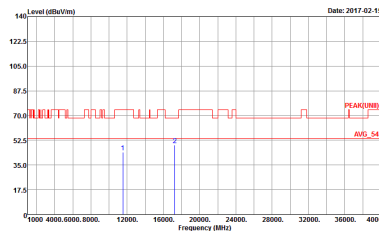WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-1HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 HORIZONTAL	 Site : 03CH11-1HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 VERTICAL

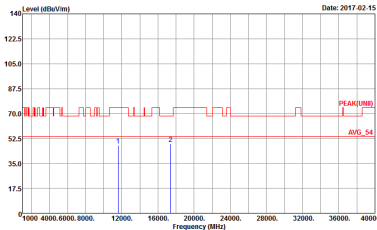
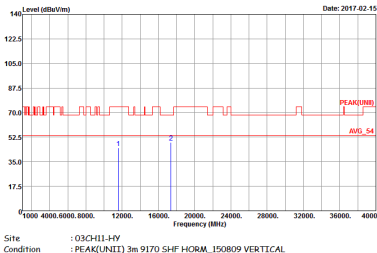


WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CHI1-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 HORIZONTAL	 Site : 03CHI1-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 VERTICAL



Band 4 5725~5850MHz
Emission below 1GHz
5GHz WIFI 802.11a (LF)

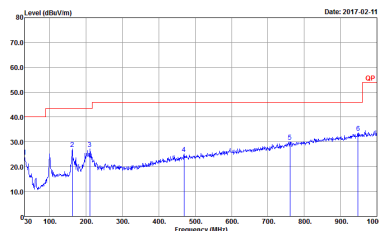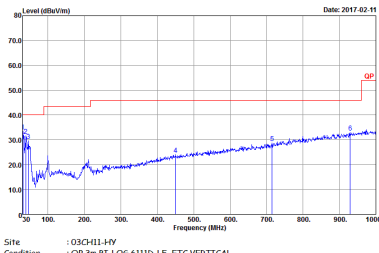WIFI	5GHz 5725~5850MHz	
ANT	802.11a LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL

Emission below 1GHz
5GHz WIFI 802.11n HT20 (LF)

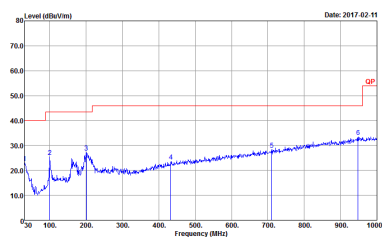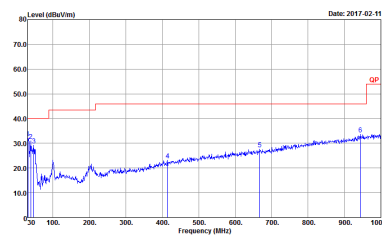WIFI	5GHz 5725~5850MHz	
ANT	802.11n HT20 LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL


Emission below 1GHz
5GHz WIFI 802.11n HT40 (LF)

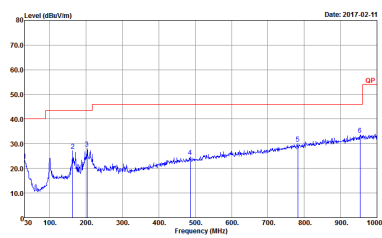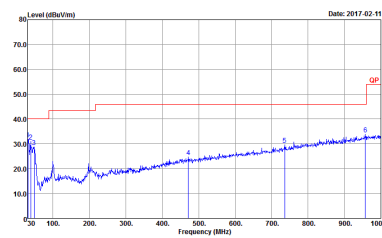WIFI	5GHz 5725~5850MHz	
ANT	802.11n HT40 LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL


Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11a	86.923	1356	0.74	1kHz
5GHz 802.11n HT20	85.906	1280	0.78	1kHz
5GHz 802.11n HT40	85.135	630	1.59	3kHz


802.11a

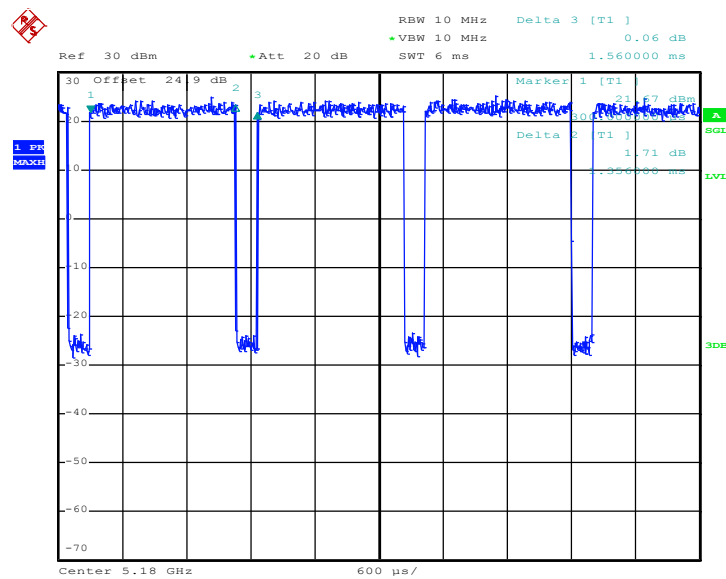

Date: 9.FEB.2017 19:44:12

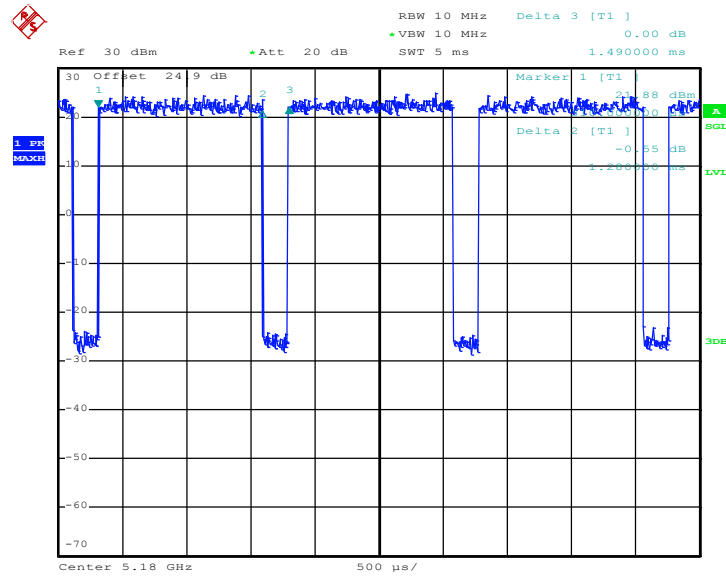802.11n HT20


Date: 9.FEB.2017 19:45:12

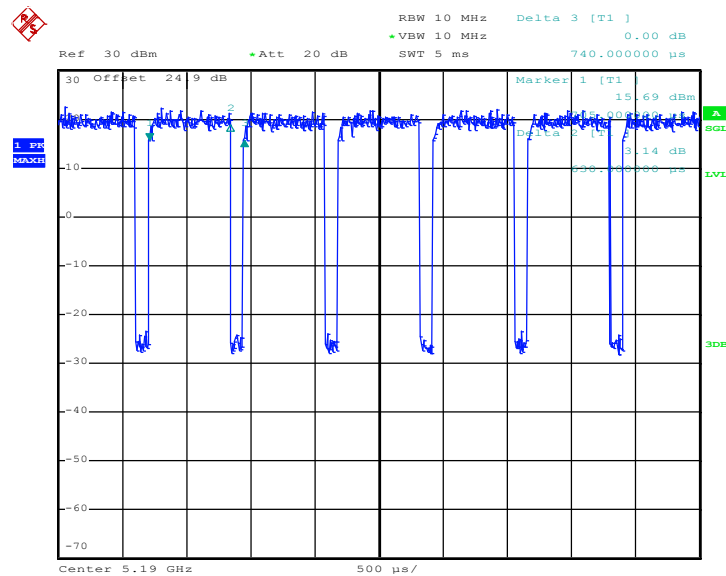802.11n HT40


Date: 9.FEB.2017 19:51:26