

# Application for Grant of Certification FCC CFR47 Part 87

GMN-00676

Market Label: GWX 70

GPN: 011-01768-0( )

9300-9500 MHz

Aviation Weather Radar

FCC ID: IPH-0126000

For

Garmin International, Inc.

1200 East 151st Street


Olathe, KS 66062

Test Report Number 120619

Authorized Signatory: *Scot D Rogers*  
Scot D. Rogers



NVLAP Lab Code 200087-0



# Rogers Labs, Inc.

4405 West 259th Terrace  
Louisburg, KS 66053  
Phone / Fax (913) 837-3214

## Test Report For Application of Certification For

# Garmin International, Inc.

1200 East 151st Street  
Olathe, KS 66062  
Phone: (913) 397-8200

Mr. Van Ruggles  
Director of Quality Assurance

GMN-00676  
Market Label: GWX 70  
GPN: 011-01768-0()  
Aviation Weather Radar  
Frequency Range: 9300-9500 MHz

FCC ID: IPH-0126000

Test Date: June 19, 2012

Certifying Engineer: *Scot D Rogers*

Scot D. Rogers  
Rogers Labs, Inc.  
4405 West 259th Terrace  
Louisburg, KS 66053  
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Rogers Labs, Inc.  
4405 West 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Garmin International, Inc.  
Model: GMN-00676  
Test #: 120619  
Test to: CFR47 Parts 2, 87  
File: TstRpt GMN00676 120619

GPN: 011-01768-0()  
SN: 1DP000323  
FCC ID: IPH-0126000  
Date: July 30, 2012  
Page 2 of 29



# Table of Contents

**TABLE OF CONTENTS..... 3**

**FORWARD ..... 5**

**OPINION / INTERPRETATION OF RESULTS ..... 5**

**APPLICABLE STANDARDS & TEST PROCEDURES ..... 5**

**ENVIRONMENTAL CONDITIONS..... 5**

**APPLICATION FOR CERTIFICATION..... 6**

**SYSTEM DESCRIPTION ..... 7**

**UNITS OF MEASUREMENTS ..... 7**

**TEST SITE LOCATIONS ..... 7**

**LIST OF TEST EQUIPMENT ..... 8**

**RADIO FREQUENCY POWER OUTPUT ..... 9**

**Measurements Required .....9**

**Test Arrangement .....9**

        Figure 1 Maximum Power Output ..... 10

**Radio Frequency Power Output Results .....10**

**MODULATION CHARACTERISTICS..... 11**

**Measurements Required .....11**

**Modulation Characteristics Results .....11**

**OCCUPIED BANDWIDTH ..... 12**

**Measurements Required .....12**

**Test Arrangement .....12**

        Figure 2 Occupied Band Width, Carrier frequency 9323 MHz..... 13

        Figure 3 Occupied Band Width, Carrier frequency 9375 MHz..... 13

        Figure 4 Occupied Band Width, Carrier frequency 9486 MHz..... 14

**Occupied Bandwidth Results .....14**

**SPURIOUS EMISSIONS AT ANTENNA TERMINALS..... 15**

**Measurements Required .....15**



**Test Arrangement** ..... 15

**Antenna Port Spurious Emissions Results**..... 15

    Figure 6 Spurious Emissions at Antenna Terminal ..... 16

    Figure 7 Spurious Emissions at Antenna Terminal ..... 17

    Figure 8 Spurious Emissions at Antenna Terminal ..... 17

    Figure 9 Spurious Emissions at Antenna Terminal ..... 18

    Figure 10 Spurious Emissions at Antenna Terminal ..... 18

**FIELD STRENGTH OF SPURIOUS RADIATION**..... 19

**Measurements Required** ..... 19

**Test Arrangement** ..... 19

**Radiated Spurious Emissions Results** ..... 20

**FREQUENCY STABILITY** ..... 22

**Measurements Required** ..... 22

**Test Arrangement** ..... 22

**Frequency Stability Results** ..... 23

**ANNEX**..... 24

**Annex A Measurement Uncertainty Calculations** ..... 25

**Annex B Rogers Labs Test Equipment List** ..... 26

**Annex C Rogers Qualifications**..... 27

**Annex D FCC Test Site Registration Letter** ..... 28

**Annex E Industry Canada Test Site Registration Letter** ..... 29



## Forward

In accordance with the Federal Communications, Code of Federal Regulations dated October 1, 2011, Part 2 Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.915, 2.925, 2.926, 2.1031 through 2.1057, and Part 87, Subchapter D, Paragraphs 87.131 through 87.147 the following information is submitted for consideration in obtaining grant of certification.

## Opinion / Interpretation of Results

Tests Performed	Results
Requirements per CFR47 paragraphs 2.1031-2.1057	Complies
Requirements per CFR47 paragraphs 87.131	Complies
Requirements per CFR47 paragraphs 87.133 (d)	Complies
Requirements per CFR47 paragraphs 87.135	Complies
Requirements per CFR47 paragraphs 87.139	Complies
Requirements per CFR47 paragraphs 87.141	Complies

## Applicable Standards & Test Procedures

In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2011, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057 the following is submitted for consideration in obtaining Grant of Certification. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.4-2009 and/or TIA/EIA 603-C (2004).

## Environmental Conditions

Ambient Temperature            23.7° C

Relative Humidity                52%

Atmospheric Pressure          1008.2 mb



## Application for Certification

- (1) Manufacturer:  
Garmin International, Inc.  
1200 East 151st Street  
Olathe, KS 66062
- (2) Identification: FCC I.D.: IPH-0126000
- (3) Instruction Book: Refer to exhibit for Draft Manual
- (4) Emission Type: Emissions designator 2M07Q7N
- (5) Frequency Range: 9323-9486 MHz
- (6) Operating Power Level: 40 Watts peak, 4 Watts (Average Power)
- (7) Maximum Po: Maximum power output as determined by appropriate standards during certification per CFR 47 paragraph 87.131.
- (8) Power into final amplifying circuitry: Final amplifier Final amplifier circuitry utilizes six power amplifiers operating in parallel for the final amplifier stage of the transmitter. Each of the six power amplifiers is biased at +12 V and pulls a peak current of 2.5 A.
- (9) Tune Up Procedure for Output Power: Refer to Exhibit for Alignment Procedure.
- (10) Circuit Diagrams; description of circuits, frequency stability, spurious suppression, and power and modulation limiting: Refer to Exhibit for Circuit Diagrams and theory of Operation.
- (11) Photograph or drawing of the Identification Plate: Refer to Exhibit for Photograph or Drawing.
- (12) Drawings of Construction and Layout: Refer to Exhibit for Drawings of Components Layout and Chassis Drawings.
- (13) Detail Description of Digital Modulation: Reference description of modulation contained in operational description exhibit submitted with this application.
- (14) Data required by CFR47 paragraphs 2.1046 through 2.1057 are contained in the report.
- (15) External power amplifier requirements do not apply to this device or application.
- (16) AM broadcast requirements do not apply to this device or application.



- (17) Requirements of CFR47 paragraph 25.129 do not apply to this device or application.
- (18) The device is not a software-defined radio and requirements of 2.944 do not apply to this application.

## System Description

The EUT is a solid state Airborne Aviation X-band Weather Radar. It provides digital weather radar information or ground mapping information. The EUT also provides a pilot selectable ground clutter suppression feature such that ground returns will be reduced on the avionics display in weather radar mode. The EUT also provides a forward-looking turbulence detection function that displays the locations that pose potential turbulence conditions within the returned weather radar information.

## Units of Measurements

AC Line Conducted EMI Data is in dB $\mu$ V; dB referenced to one microvolt.

Radiated EMI Data is in dB $\mu$ V/m; dB/m referenced to one microvolt per meter

Antenna Conducted Data is in dBm, dB referenced to one milliwatt

## Test Site Locations

Conducted EMI The conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS.

Radiated EMI The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS.

Site Registration Refer to Annex for FCC Site Registration Letter, # 90910, and Industry Canada Site Registration Letter, IC3041A-1.

## List of Test Equipment

A Rohde & Schwarz ESU 40 and/or Hewlett Packard 8591EM was used as the measuring device for emissions testing of frequencies below 1 GHz. A Rohde & Schwarz ESU 40 and/or Hewlett Packard 8562A was used as the measuring device for testing emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

Emissions at Frequencies below 1000 MHz		
Conducted Emissions		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Radiated Emissions		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Emissions at Frequencies above 1000 MHz		
RBW	Video BW	Detector Function
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Calibration Date</u>	<u>Due</u>
LISN	Comp. Design	FCC-LISN-2-MOD.CD	10/11	10/12
Antenna	ARA	BCD-235-B	10/11	10/12
Antenna	EMCO	3147	10/11	10/12
Antenna	Sunol	JB6	10/11	10/12
Antenna	Com Power	AH-118	10/11	10/12
Antenna	EMCO	3143	5/12	5/13
Analyzer	HP	8591EM	5/12	5/13
Analyzer	HP	8562A	5/12	5/13
Analyzer	Rohde & Schwarz	ESU40	5/12	5/13


## Radio Frequency Power Output

### Measurements Required

Measurements shall be made to establish the radio frequency power delivered by the transmitter into the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun except as noted below:


If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

### Test Arrangement

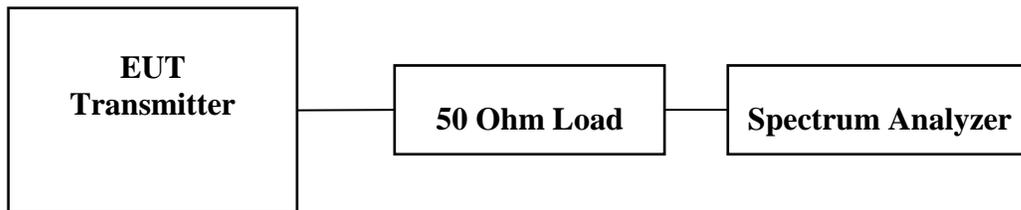

The radio frequency power output was measured at the antenna terminal by placing appropriate attenuation in the antenna line and observing the emission with the spectrum analyzer. The spectrum analyzer had an impedance of 50Ω to match the impedance of the standard antenna. A Rohde Schwarz ESU-40 and/or HP 8562A Spectrum Analyzer was used to measure the radio frequency power at the antenna port. The data was taken in dBm and converted to watts as shown in the following Table. Refer to Figure 1 showing the maximum output power of the transmitter. Data was taken per CFR47 Paragraph 2.1046(a) and applicable paragraphs of Part 87.

PdBm	= power in dB above 1 milliwatt.
Milliwatts	= $10^{(PdBm/10)}$
Watts	= (Milliwatts) (0.001)(W/mW)
Milliwatts	= $10^{(46/10)}$
	= 39,810 mW
	= 40 Watts Peak power

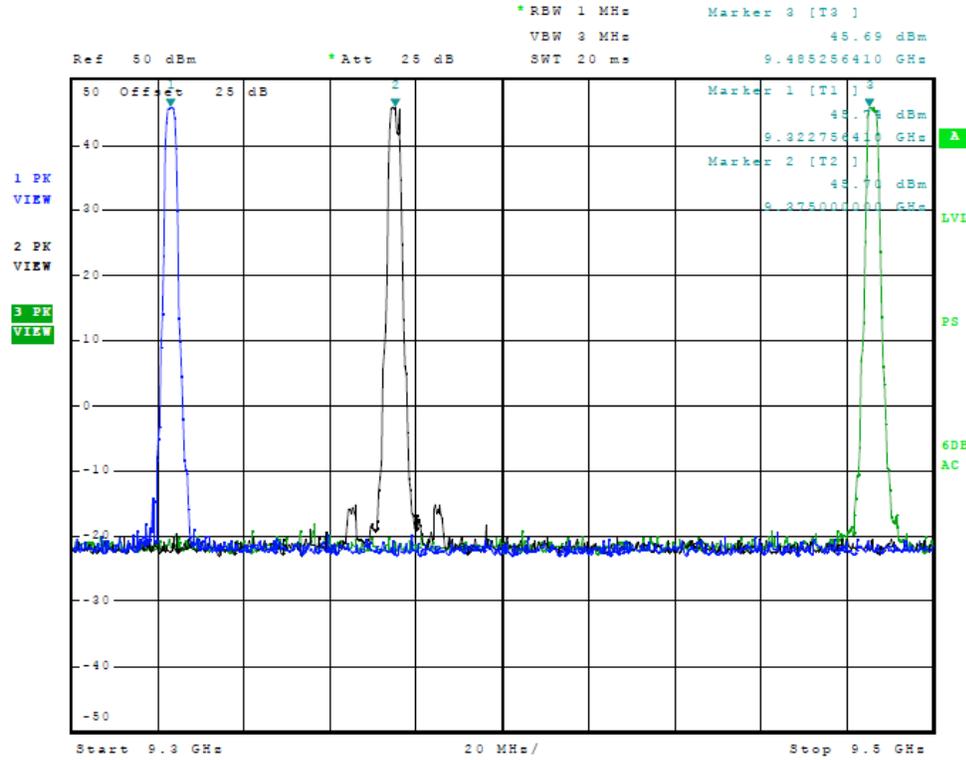

**Figure 1 Maximum Power Output**

**Radio Frequency Power Output Results**

Frequency (MHz)	P (dBm)	P (mw)	P (Watts)
9323.0	45.96	39,446	39
9375.0	45.83	38,282	38
9486.0	45.62	36,475	37

The EUT demonstrated compliance with the specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.131. There are no deviations to the specifications.



## **Modulation Characteristics**

### ***Measurements Required***

A curve or equivalent data, which shows that the equipment will meet the modulation requirements of the rules, under which the equipment is to be licensed, shall be submitted.

The EUT transmits no message and utilizes no modulation. Therefore, no modulation curves are available or required.

### ***Modulation Characteristics Results***


The EUT transmits no message and utilizes no modulation. Therefore, no modulation curves are available or required. The EUT demonstrated compliance with the specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.141. There are no deviations to the specifications.

## Occupied Bandwidth

### *Measurements Required*

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

### *Test Arrangement*

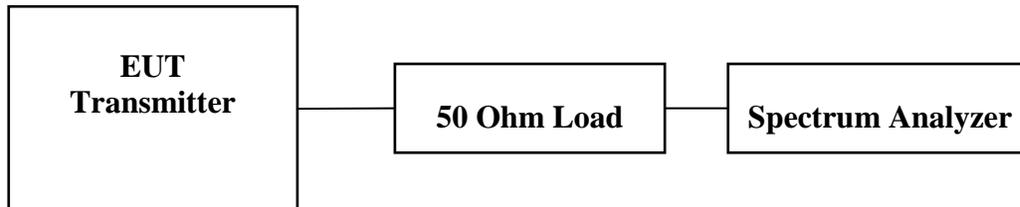

A Rohde & Schwarz ESU 40 spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating in all normal modes. The EUT was set to transmit in typical mode while measurements were made.

The power ratio in dB representing 99% of the total mean power was recorded from the spectrum analyzer. Refer to figures two through four showing the plots of the 99% power occupied bandwidth.

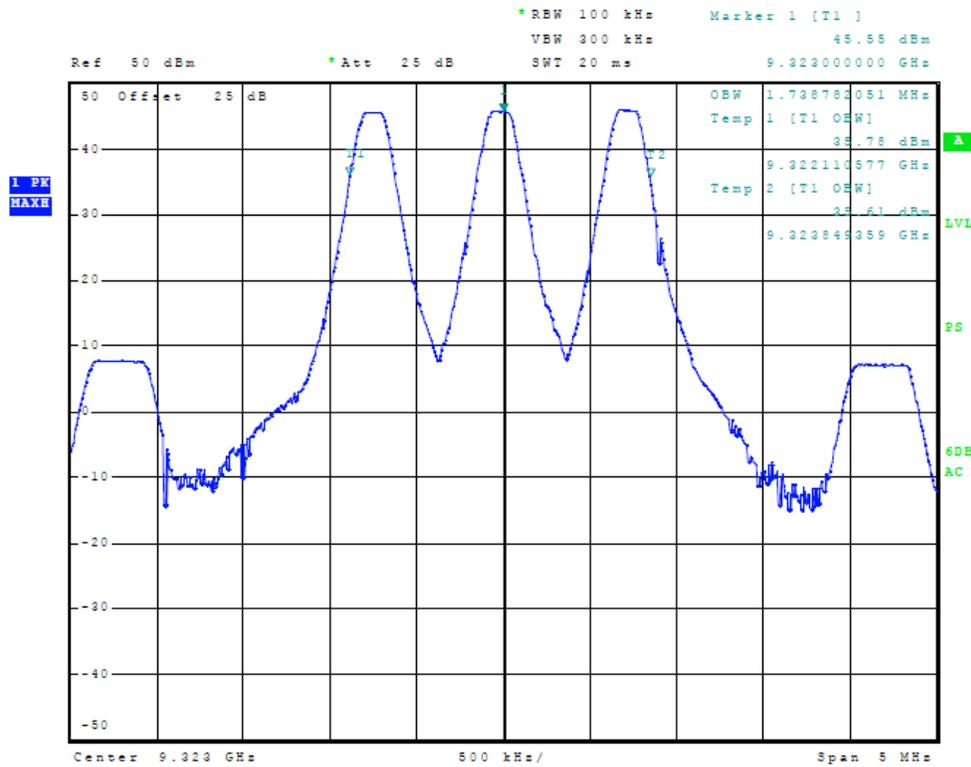


Figure 2 Occupied Band Width, Carrier frequency 9323 MHz

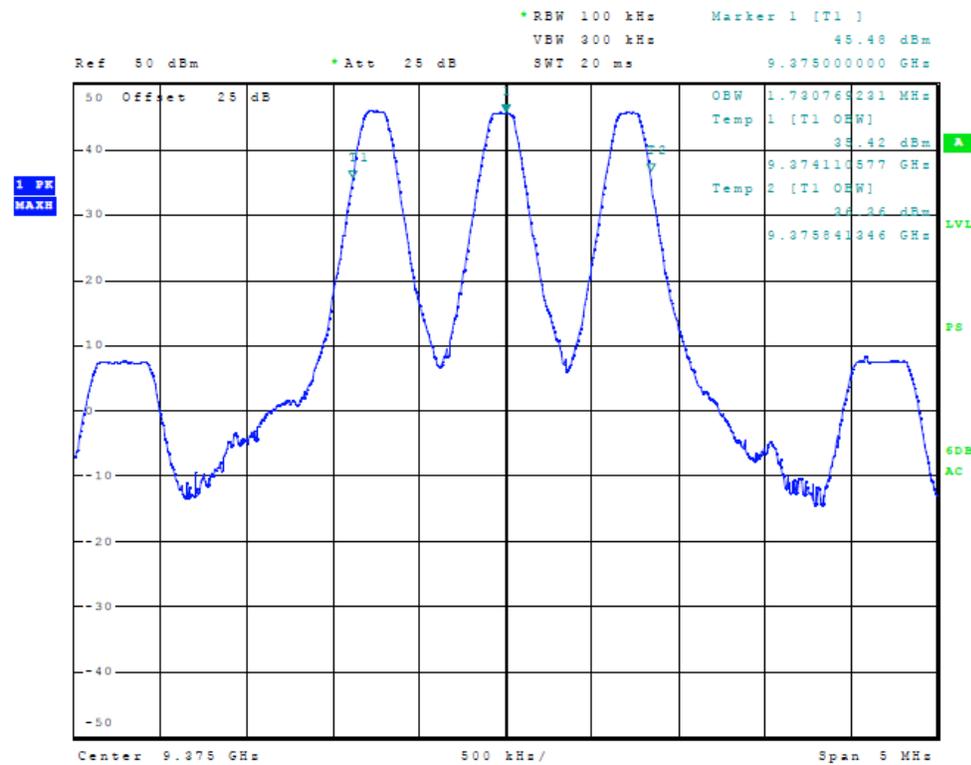


Figure 3 Occupied Band Width, Carrier frequency 9375 MHz




## Spurious Emissions at Antenna Terminals

### Measurements Required

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna.

### Test Arrangement

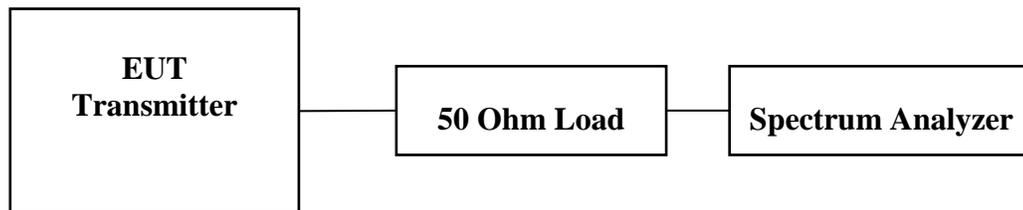

The radio frequency output was coupled to a Rohde & Schwarz ESU 40 Spectrum Analyzer. The spectrum analyzer was used to observe the radio frequency spectrum with the transmitter modulated per section 2.1049 and operated in all normal modes. The frequency spectrum from 30 MHz to 40,000 MHz was observed and plots produced of the frequency spectrum. Figures five through ten represents data for the worst-case antenna spurious emissions of the GMN-00676. Data was taken per CFR47 2.1051, 2.1057, and applicable paragraphs of Part 87.139.

### Antenna Port Spurious Emissions Results

The output of the unit was coupled to a Rohde & Schwarz ESU 40 Spectrum Analyzer and the frequency emissions were measured. Data was taken as per CFR47 2.1051 and applicable paragraphs of Part 87. The EUT demonstrated compliance with the specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.139. There are no deviations to the specifications.

All spurious emissions must be attenuated at least  $43 + 10\log(P)$  [P=Average Transmitter power] below the fundamental emission power level. The following equations represent the calculated attenuation levels for the equipment.

Spurious Emissions Limit shall be attenuated at least 49 dB below fundamental carrier

$$\text{Limit} = 43 + 10 \text{ Log} (P_{\text{ave}}) = 43 + 10 \text{ Log} (4)$$

$$\text{Limit} = 49.0$$

Antenna Port Conducted Data

Channel MHz	Spurious Freq. (MHz)	Measured Level (dBm)	Level Below Carrier (dB)
9323.0	18646.0	-22.55	-68.5
	27969.0	-20.02	-66.0
	37292.0	-20.05	-66.0
9375.0	18750.0	-21.98	-67.8
	28125.0	-20.37	-66.2
	37500.0	-20.36	-66.2
9486	18972.0	-22.26	-67.9
	28458.0	-20.00	-65.6
	37944.0	-19.88	-65.5



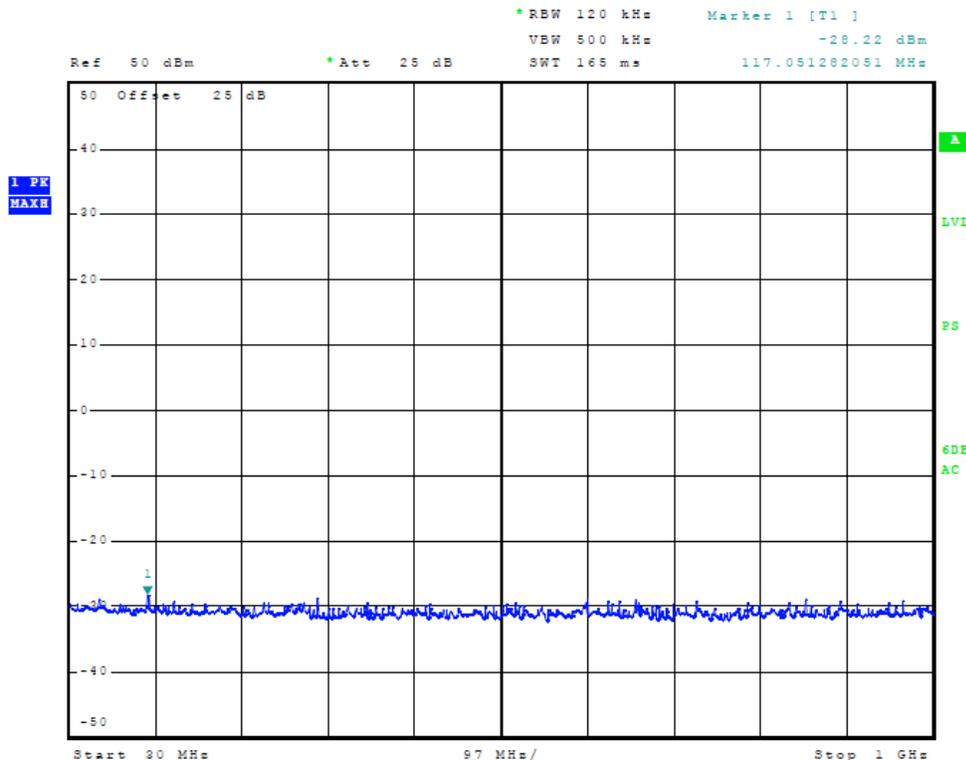


Figure 6 Spurious Emissions at Antenna Terminal

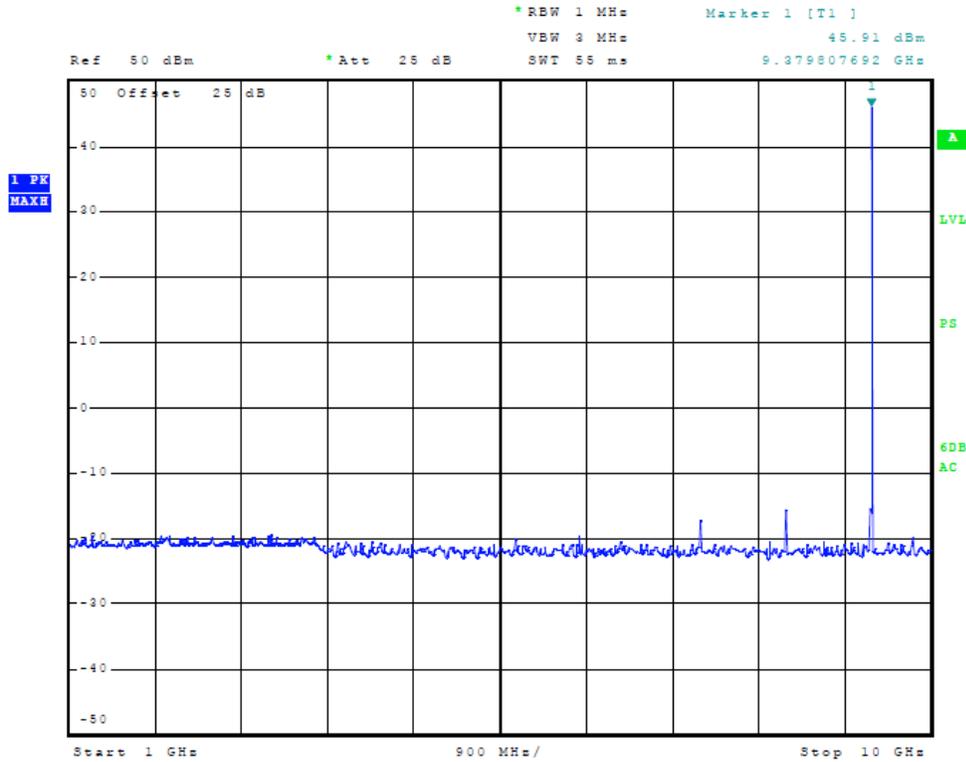

**Figure 7 Spurious Emissions at Antenna Terminal**

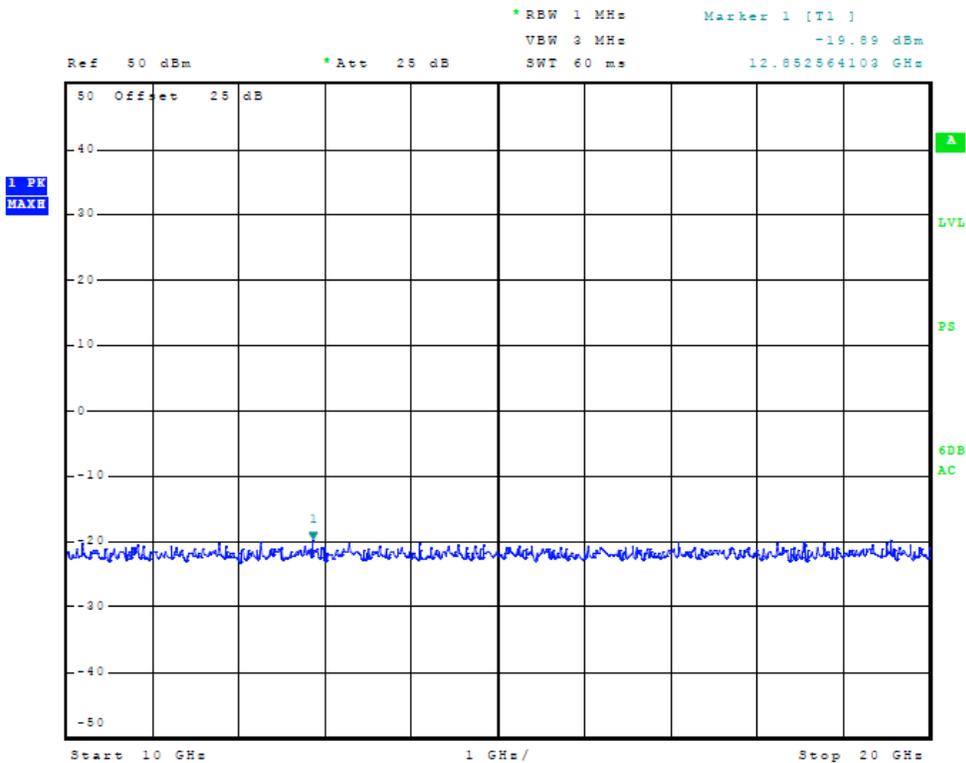

**Figure 8 Spurious Emissions at Antenna Terminal**

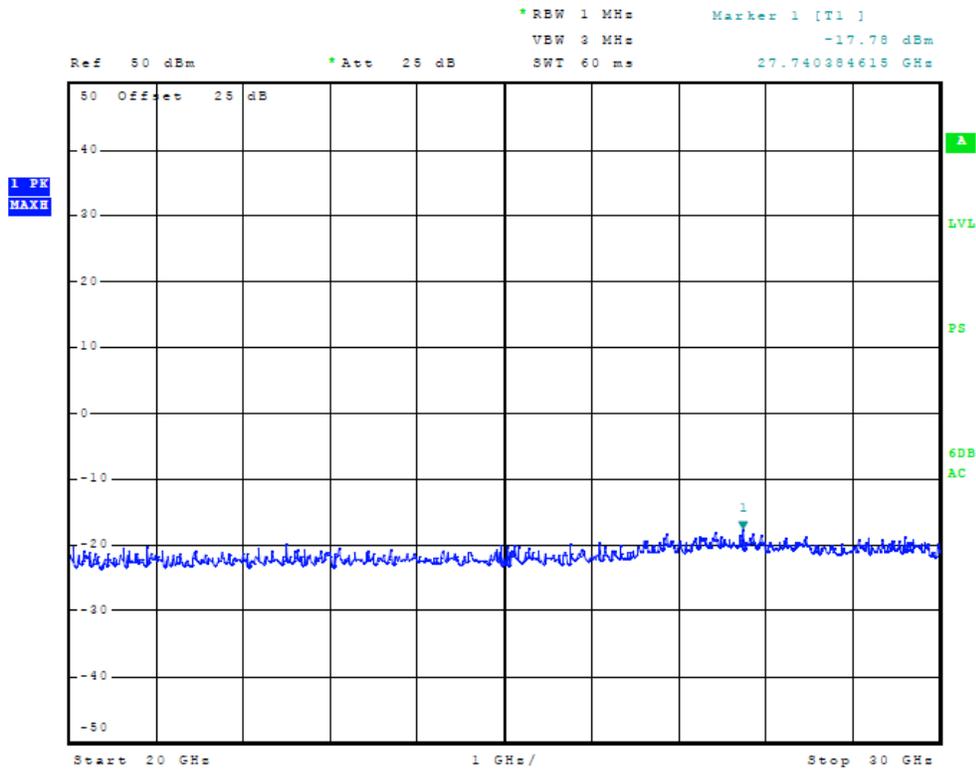


Figure 9 Spurious Emissions at Antenna Terminal


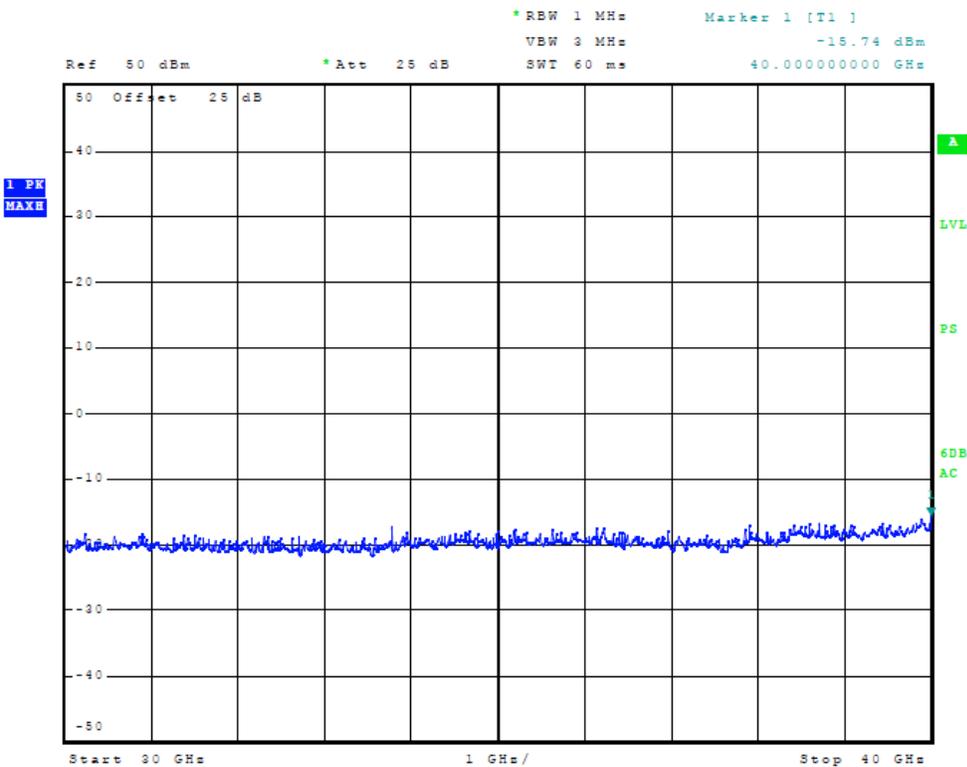


Figure 10 Spurious Emissions at Antenna Terminal

## Field Strength of Spurious Radiation *Measurements Required*

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. This equipment is typically remotely mounted and incorporated into a rack of equipment. Communications with user interface and remotely mounted antennas are connected through appropriate interface cables. Communications for transmitter control during testing was accomplished with use of laptop computer for testing support. The laptop computer offered transmitter control of the unit during testing. 50-ohm loads were connected to the transmitter antenna ports and the GPS antenna was attached to GPS input.

### *Test Arrangement*

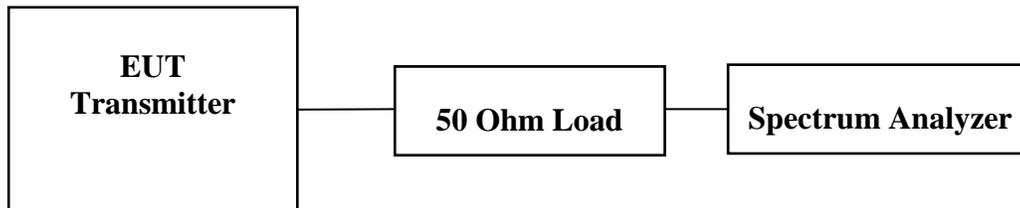

The test setup was assembled in a screen room for preliminary screening. The transmitter was placed on a wooden turntable 0.8 meters above the ground plane and at a distance of 1 meter from the receive antenna, plots were made of the radiated emissions. During final radiated emissions, testing the transmitter was placed on a wooden turntable 0.8 meters above the ground plane and at a distance of 3 meters from the Field Strength Measuring (FSM) antenna. With the EUT modulated and radiating into a 50Ω load. The receiving antenna was raised and lowered from 1m to 4m in height to obtain the maximum reading of spurious radiation from the EUT, cabinet, and interface cabling. The turntable was rotated through 360 degrees to locate the position registering the highest amplitude of emission. The frequency spectrum was then searched for spurious emissions generated from the transmitter, interface cabling, and test setup. The amplitude of each spurious emission was maximized by raising and lowering the FSM antenna, and rotating the turntable before final data was recorded. The frequency spectrum from 9 kHz to 12,000 MHz was investigated during radiated emissions testing. A Biconilog antenna was used for frequency measurements of 30 to 1000 MHz. A double-ridge horn antenna was used for frequencies of 1000 MHz to 12,000 MHz. Emission levels were measured and recorded



from the spectrum analyzer in dBµV. Data was taken at the Rogers Labs, Inc. 3 meters open area test site (OATS).

**Radiated Spurious Emissions Results**

The EUT was connected to power and antenna load as required and operated in all available normal modes while radiated emissions testing were performed. The amplitude of each spurious emission was maximized and amplitude levels recorded while operating at the open area test site at a distance of 3-meters.

General Radiated Emissions

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	General Emissions Limit @ 3m (dBµV/m)
70.0	27.6	21.4	N/A	32.1	24.2	N/A	40.0
71.0	28.0	20.9	N/A	31.7	22.7	N/A	40.0
105.0	31.1	24.4	N/A	34.3	30.7	N/A	43.5
110.0	36.6	30.2	N/A	38.7	32.1	N/A	43.5
124.2	37.4	31.8	N/A	37.3	32.9	N/A	43.5
125.2	39.2	34.2	N/A	36.3	31.9	N/A	43.5
129.3	38.3	36.5	N/A	37.5	31.9	N/A	43.5
148.9	30.4	25.2	N/A	26.0	21.1	N/A	43.5
150.0	39.8	35.4	N/A	36.7	30.1	N/A	43.5
160.0	30.8	24.2	N/A	24.9	20.3	N/A	43.5
250.0	41.6	40.7	N/A	35.6	34.2	N/A	46.0
330.0	36.9	30.9	N/A	30.9	24.5	N/A	46.0
335.0	33.9	26.3	N/A	26.9	18.6	N/A	46.0
490.0	38.6	34.8	N/A	39.3	36.3	N/A	46.0
510.0	39.2	33.8	N/A	32.9	29.1	N/A	46.0
525.0	43.9	40.7	N/A	41.1	38.2	N/A	46.0
1852.6	43.1	29.6	N/A	45.1	30.0	N/A	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Harmonic Radiated Emissions

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	General Average Emissions Limit @ 3m (dBµV/m)
18646.0	48.3	N/A	35.5	49.0	N/A	35.5	54.0
27969.0	48.8	N/A	35.1	49.2	N/A	36.1	54.0
37292.0	51.7	N/A	39.4	52.0	N/A	39.4	54.0
18750.0	48.3	N/A	35.6	48.9	N/A	35.7	54.0
28125.0	48.4	N/A	35.6	48.5	N/A	35.6	54.0
37500.0	51.7	N/A	38.9	51.8	N/A	38.9	54.0
18972.0	47.2	N/A	34.8	47.1	N/A	34.9	54.0
28458.0	48.3	N/A	35.3	47.9	N/A	35.4	54.0
37944.0	54.1	N/A	41.2	54.1	N/A	41.3	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.

The EUT demonstrated compliance with the specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.139. There are no deviations or exceptions to the specifications.


## Frequency Stability

### Measurements Required

The frequency stability shall be measured with variations of ambient temperature from  $-30^{\circ}$  to  $+50^{\circ}$  centigrade. Measurements shall be made at the extremes of the temperature range and at intervals not exceeding  $10^{\circ}$  centigrade through the range. A period sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. In addition to temperature stability, the frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value.
- (2) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

### Test Arrangement

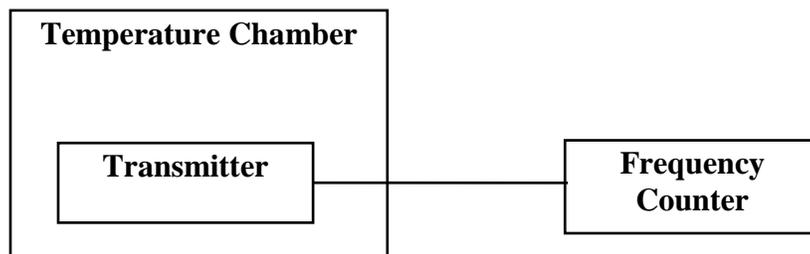

The measurement procedure outlined below shall be followed.

**Step 1:** The transmitter shall be installed in an environmental test chamber whose temperature is controllable. Provision shall be made to measure the frequency of the transmitter.

**Step 2:** With the transmitter located in the temperature chamber the temperature of the chamber shall be adjusted to  $+25^{\circ}$  C. After a temperature stabilization period of one hour at  $+25^{\circ}$  C, the transmitter shall be switched "ON" with standard test voltage applied.

**Step 3:** The carrier shall be keyed "ON", and the transmitter shall be operated at full radio frequency power output at the duty cycle, for which it is rated, for duration of at least 5 minutes. The radio frequency carrier frequency shall be monitored and measurements shall be recorded.

**Step 4:** The test procedures outlined in Steps 2 and 3, shall be repeated after stabilizing the transmitter at the environmental temperatures specified,  $-30^{\circ}$  C to  $+50^{\circ}$  C in 10-degree increments.



The frequency stability was measured with variations in the power supply voltage from 85 to 115 percent of the nominal value. The frequency was measured and the variation in parts per million calculated. Data was taken per CFR47 Paragraphs 2.1055 and applicable paragraphs of part 87.133. CFR47 87.133 requires stability maintained at least 20 ppm.

**Frequency Stability Results**

Frequency 9374.9666 (MHz)	Frequency Stability Vs Temperature In Parts Per Million (PPM)								
Temperature °C	-30	-20	-10	0	+10	+20	+30	+40	+50
Change (kHz)	11.6	13.0	9.4	13.2	2.8	1.8	1.0	5.6	5.2
PPM	0	0	0	0	0	0	0	0	0
%	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Frequency 9374.9780 (MHz)	Frequency Stability Vs Voltage Variation 14 or 28 volts nominal		
Voltage Vdc	11.9	14	16.1
Change (kHz)	-2.0	0.0	-0.7
PPM	0	0	0
%	0.000	0.000	0.000
Voltage Vdc	23.8	28	32.2
Change (kHz)	-2.0	0.0	-2.0
PPM	0	0	0
%	0.000	0.000	0.000

The EUT demonstrated compliance with the specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.133. There are no deviations or exceptions to the specifications.



NVLAP Lab Code 200087-0

## **Annex**

- Annex A Measurement Uncertainty Calculations
- Annex B Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

**Annex A Measurement Uncertainty Calculations**

Measurement uncertainty calculations were made for the laboratory. Result of measurement uncertainty calculations are recorded below for AC line conducted and radiated emission measurements.

Measurement Uncertainty	$U_{(E)}$	$U_{(lab)}$
3 Meter Horizontal 30-200 MHz Measurements	2.08	4.16
3 Meter Vertical 30-200 MHz Measurements	2.16	4.33
3 Meter Vertical Measurements 200-1000 MHz	2.99	5.97
10 Meter Horizontal Measurements 30-200 MHz	2.07	4.15
10 Meter Vertical Measurements 30-200 MHz	2.06	4.13
10 Meter Horizontal Measurements 200-1000 MHz	2.32	4.64
10 Meter Vertical Measurements 200-1000 MHz	2.33	4.66
3 Meter Measurements 1-6 GHz	2.57	5.14
3 Meter Measurements 6-18 GHz	2.58	5.16
AC Line Conducted	1.72	3.43



**Annex B Rogers Labs Test Equipment List**

List of Test Equipment	Calibration Date
Spectrum Analyzer: Rohde & Schwarz ESU40	5/12
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, and 11520	5/12
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
Spectrum Analyzer: HP 8591EM	5/12
Antenna: EMCO Biconilog Model: 3143	5/12
Antenna: Sunol Biconilog Model: JB6	10/11
Antenna: EMCO Log Periodic Model: 3147	10/11
Antenna: Antenna Research Biconical Model: BCD 235	10/11
LISN: Compliance Design Model: FCC-LISN-2.Mod.cd, 50 µHy/50 ohm/0.1 µf	10/11
R.F. Preamp CPPA-102	10/11
Attenuator: HP Model: HP11509A	10/11
Attenuator: Mini Circuits Model: CAT-3	10/11
Attenuator: Mini Circuits Model: CAT-3	10/11
Cable: Belden RG-58 (L1)	10/11
Cable: Belden RG-58 (L2)	10/11
Cable: Belden 8268 (L3)	10/11
Cable: Time Microwave: 4M-750HF290-750	10/11
Cable: Time Microwave: 10M-750HF290-750	10/11
Frequency Counter: Leader LDC825	2/12
Oscilloscope Scope: Tektronix 2230	2/12
Wattmeter: Bird 43 with Load Bird 8085	2/12
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/12
R.F. Generators: HP 606A, HP 8614A, HP 8640B	2/12
R.F. Power Amp 65W Model: 470-A-1010	2/12
R.F. Power Amp 50W M185- 10-501	2/12
R.F. Power Amp A.R. Model: 10W 1010M7	2/12
R.F. Power Amp EIN Model: A301	2/12
LISN: Compliance Eng. Model 240/20	2/12
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08	2/12
Antenna: EMCO Dipole Set 3121C	2/12
Antenna: C.D. B-101	2/12
Antenna: Solar 9229-1 & 9230-1	2/12
Antenna: EMCO 6509	2/12
Audio Oscillator: H.P. 201CD	2/12
Peavey Power Amp Model: IPS 801	2/12
ELGAR Model: 1751	2/12
ELGAR Model: TG 704A-3D	2/12
ESD Test Set 2010i	2/12
Fast Transient Burst Generator Model: EFT/B-101	2/12
Field Intensity Meter: EFM-018	2/12
KEYTEK Ecat Surge Generator	2/12
Shielded Room 5 M x 3 M x 3.0 M	



## ***Annex C Rogers Qualifications***

***Scot D. Rogers, Engineer***

### **Rogers Labs, Inc.**

Mr. Rogers has approximately 17 years experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

#### Positions Held:

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

#### Educational Background:

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University
- 2) Bachelor of Science Degree in Business Administration Kansas State University
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



NVLAP Lab Code 200087-0

**Annex D FCC Test Site Registration Letter**

**FEDERAL COMMUNICATIONS COMMISSION**

**Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD 21046**

November 01, 2011

Registration Number: 90910

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace,  
Louisburg, KS 66053

Attention: Scot Rogers,

Re: Measurement facility located at Louisburg  
3 & 10 meter site  
Date of Renewal: November 01, 2011

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website [www.fcc.gov](http://www.fcc.gov) under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Phyllis Parrish  
Industry Analyst

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1


Garmin International, Inc.  
Model: GMN-00676  
Test #: 120619  
Test to: CFR47 Parts 2, 87  
File: TstRpt GMN00676 120619

GPN: 011-01768-0()  
SN: 1DP000323  
FCC ID: IPH-0126000  
Date: July 30, 2012  
Page 28 of 29



NVLAP Lab Code 200087-0

## Annex E Industry Canada Test Site Registration Letter



December 28, 2011

OUR FILE: 46405-3041  
Submission No: 152685

Rogers Labs Inc.  
4405 West 259th Terrace  
Louisburg, KS, 66053  
USA

**Attention:** Mr. Scot D. Rogers

Dear Sir/Madame:

The Bureau has received your application for the renewal of 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought ( **Site# 3041A-1** ). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to **exceed three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;

[http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h\\_tt00052e.html](http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html).

If you have any questions, you may contact the Bureau by e-mail at [certification.bureau@ic.gc.ca](mailto:certification.bureau@ic.gc.ca) Please reference our file and submission number above for all correspondence.

Yours sincerely,

Dalwinder Gill  
For: Wireless Laboratory Manager  
**Certification and Engineering Bureau**  
3701 Carling Ave., Building 94  
P.O. Box 11490, Station "H"  
Ottawa, Ontario K2H 8S2  
Email: [dalwinder.gill@ic.gc.ca](mailto:dalwinder.gill@ic.gc.ca)  
Tel. No. (613) 998-8363  
Fax. No. (613) 990-4752

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Garmin International, Inc.  
Model: GMN-00676  
Test #: 120619  
Test to: CFR47 Parts 2, 87  
File: TstRpt GMN00676 120619

GPN: 011-01768-0( )  
SN: 1DP000323  
FCC ID: IPH-0126000  
Date: July 30, 2012  
Page 29 of 29