

**APPLICATION**  
For  
**GRANT OF**  
**CERTIFICATION**

FOR

Model:

**011-01839-XX**

Low Power Transmitter

FCC ID: IPH-01326

IC: 1792A-01326

FOR

**Garmin International, Inc.**


1200 East 151st Street

Olathe, KS 66062

Test Report number 080528

Authorized Signatory: *Scot D Rogers*

Scot D. Rogers



# ROGERS LABS, INC.

4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone / Fax (913) 837-3214

## TEST REPORT

For

### Application for Grant of Certification

For

### Garmin International, Inc.

1200 East 151st Street  
Olathe, KS 66062  
Phone: (913) 397-8200

Mr. Van Ruggles  
Director of Quality Assurance

Model: 011-01839-XX

Low Power Transmitter  
Frequency Range: 2402 - 2479 MHz

FCC ID: IPH-01326  
IC: 1792A-01326

Test Report Number: 080528

Test Date: May 28, 2008

Certifying Engineer: *Scot D. Rogers*

Scot D. Rogers  
Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Telephone: (913) 837-3214  
FAX: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product endorsement by NVLAP, NIST, or any agency of the U.S. Government.



# Table of Contents

**TABLE OF CONTENTS..... 3**

**FORWARD ..... 5**

**APPLICABLE STANDARDS & TEST PROCEDURES ..... 5**

**ENVIRONMENTAL CONDITIONS..... 5**

**EQUIPMENT TESTED ..... 6**

**LIST OF TEST EQUIPMENT ..... 6**

**2.1033(B) APPLICATION FOR CERTIFICATION ..... 7**

**EQUIPMENT AND CABLE CONFIGURATION ..... 8**

    Test Setup ..... 8

**EQUIPMENT FUNCTION AND TESTING PROCEDURES ..... 8**

    Configuration options for the EUT ..... 9

    AC Line Conducted Emission Test Procedure..... 10

    Radiated Emission Test Procedure ..... 10

    Units of Measurements..... 10

    Test Site Locations..... 10

**SUBPART C - INTENTIONAL RADIATORS ..... 11**

**15.203 ANTENNA REQUIREMENTS ..... 11**

**15.205 RESTRICTED BANDS OF OPERATION..... 11**

    Radiated Emissions in Restricted Bands Data per 15.205 ..... 12

    Summary of Results for Radiated Emissions in Restricted Bands 15.205..... 12

**15.209 RADIATED EMISSIONS LIMITS; GENERAL REQUIREMENTS ..... 12**

    General Radiated EMI per 15.209 ..... 12

        Figure one Radiated Emissions Plot ..... 14

        Figure two Radiated Emissions Plot ..... 14

        Figure three Radiated Emissions Plot ..... 15

        Figure four Radiated Emissions Plot ..... 15

        Figure five Radiated Emissions Plot ..... 16

        Figure six Radiated Emissions Plot ..... 16

    General Radiated Emissions Data per 15.209 ..... 17

    Summary of Results for General Radiated Emissions per 15.209..... 17

**15.249 OPERATION IN THE BAND 2,400-2,483.5 MHZ ..... 18**

    Figure seven Occupied Bandwidth ..... 19

    Figure eight Occupied Bandwidth ..... 19

    Figure nine Occupied Bandwidth ..... 20

    Figure ten Operation in Frequency Band ..... 20

    Transmitter Radiated Emissions Data per 15.249 ..... 21

    Summary of Results for Transmitter Radiated Emissions per 15.249 ..... 21



NVLAP Lab Code 200087-0

**ANNEX..... 22**

**Annex A Measurement Uncertainty Calculations ..... 23**

**Annex B Test Equipment List For Rogers Labs, Inc. .... 25**

**Annex C Qualifications ..... 26**

**Annex D FCC Test Site Registration Letter..... 27**



## Forward

The following information is submitted for consideration in obtaining a Grant of Certification for low power intentional radiator per CFR47 Paragraph 15.249, and Industry Canada RSS-210 Low Power Transmitter, operation in the 2400 – 2483.5 MHz band.

Name of Applicant: Garmin International, Inc.  
1200 East 151st Street  
Olathe, KS 66062

Model: 011-01839-XX

FCC ID: IPH-01326

Industry Canada ID: 1792A-01326

Frequency Range: 2402 - 2479 MHz

Operating Power: 1 mW (as design specification, measured 93.1 dB $\mu$ V/m @ 3 meters),  
for operation in the 2400-2483.5 MHz.

## Applicable Standards & Test Procedures

In accordance with the Federal Communications Commission, Code of Federal Regulations CFR47, dated October 1, 2007, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, applicable parts of paragraph 15, Part 15C paragraph 15.249, and Industry Canada RSS-210, the following information is submitted.

Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI 63.4-2003 Document.

## Environmental Conditions

Ambient Temperature	23.3° C
Relative Humidity	49%
Atmospheric Pressure	29.43 in Hg



## Equipment Tested

<u>Equipment</u>	<u>Serial Number</u>	<u>FCC ID.#</u>
011-01839-XX	FCC Unit	IPH-01326

## List of Test Equipment

A Hewlett Packard 8591EM and or 8562A Spectrum Analyzer was used as the measuring device for the emissions testing. The analyzer settings used are described in the following table. Refer to the Appendix for a complete list of Test Equipment.

HP 8591EM SPECTRUM ANALYZER SETTINGS		
CONDUCTED EMISSIONS		
RBW	AVG. BW	DETECTOR FUNCTION
9 kHz	30 kHz	Peak/Quasi Peak
RADIATED EMISSIONS (30 – 1000 MHz)		
RBW	AVG. BW	DETECTOR FUNCTION
120 kHz	300 kHz	Peak/Quasi Peak
HP 8562A SPECTRUM ANALYZER SETTINGS		
RADIATED EMISSIONS (1 – 40 GHz)		
RBW	AVG. BW	DETECTOR FUNCTION
1 MHz	1 MHz	Peak/Average
ANTENNA CONDUCTED EMISSIONS		
RBW	AVG. BW	DETECTOR FUNCTION
120 kHz	300 kHz	Peak

<u>EQUIPMENT</u>	<u>MFG.</u>	<u>MODEL</u>	<u>CAL. DATE</u>	<u>DUE.</u>
LISN	Comp. Design	FCC-LISN-2-MOD.CD	10/07	10/08
LISN	Comp. Design	1762	2/08	2/09
Antenna	ARA	BCD-235-B	10/07	10/08
Antenna	EMCO	3147	10/07	10/08
Antenna	EMCO	3143	5/08	5/09
Analyzer	HP	8591EM	5/08	5/09
Analyzer	HP	8562A	5/08	5/09

## 2.1033(b) Application for Certification

- (1) Manufacturer:     Garmin International, Inc.  
                           1200 East 151st Street  
                           Olathe, KS 66062  
                           Telephone: (913) 397-8200
  
- (2)    FCC Identification:   FCC I.D.: IPH-01326                    IC: 1792A-01326
  
- (3)    Copy of the installation and operating manual: Refer to exhibit for Draft Instruction Manual.
  
- (4)    Description of Circuit Functions, Device Operation: The 011-01839-XX is a splay device used in the marine environment to display information received from remote sensors. The equipment incorporates a wireless interface allowing display manipulation from short distances. The transmitter was designed to communicate with compliant remote equipment. This device features communications operation in the 2400-2483.5 MHz frequency band.
  
- (5)    Block Diagram with Frequencies: Refer to exhibit for the Block Diagram
  
- (6)    Report of measurements showing compliance with the pertinent FCC/IC technical requires are provided in this report.
  
- (7)    Photographs of equipment are provided in application exhibits.
  
- (8)    Peripheral equipment or accessories for the equipment. No optional equipment was available other than that shown in the configuration diagram. The available configuration options were investigated for this report with worst-case data presented.
  
- (9)    Transition Provisions of 15.37 are not being requested.
  
- (10)   The equipment is not a scanning receiver.
  
- (11)   The equipment is not a transmitter operating in the 59-64 GHz frequency range.

## Equipment and Cable Configuration

### ***Test Setup***

The 011-01839-XX is a hand held or accessory mounted GPS receiver used for location and navigation and incorporates a low power transmitter allowing short-range communications in the 2400-2483.5 MHz band. The GPS receiver allows reception of navigation information and displays location information for the user. The design allows for hand-held operation during GPS use and the transmitter section allows for short-range communications to other compatible equipment for data transfer. The EUT was arranged in all typical user equipment configurations during testing. The transmitter offers no other interface connections than those in the configuration options shown below. The EUT receives power from internal batteries, and/or external power from the USB interface, or D/C power adapter options. As requested by the manufacturer and required by the regulations, the unit was tested for emissions compliance using the available configurations with the worst-case data presented. Test results in this report relate only to the products described in this report.


### **Equipment Function and Testing Procedures**

The EUT is a low power transmitter with operation capability in the 2400-2483.5 MHz frequency band (CFR47, 15.249). The unit allows for communications to other 2400-2483.5 MHz compliant equipment. The design is offered for the outdoor enthusiast wishing to monitor location and navigation information and allows for data transfer to complaint equipment through direct cable of wireless interface.

**Configuration options for the EUT**

**Configurations for the 011-01839**


1. 011-01839-XX operating off internal batteries

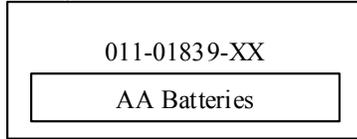


2. 011-01839-XX connected to (and powered by) computer through USB cable (GPN: 325-00128-0x).




3. 011-01839-XX connected to (and powered by) car cigarette lighter mini-B cable (GPN: 320-00239-24).

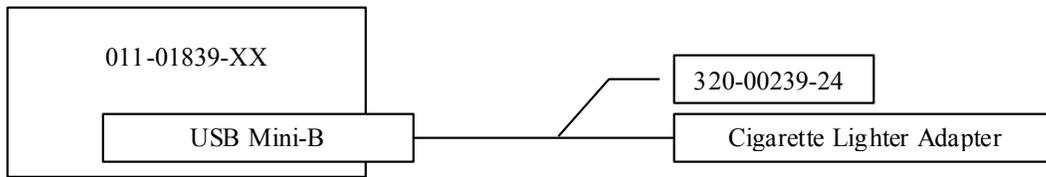

4. 011-01839-XX connected to computer UART and 12V power supply through Serial/Power cable (GPN: 320-00405-00).

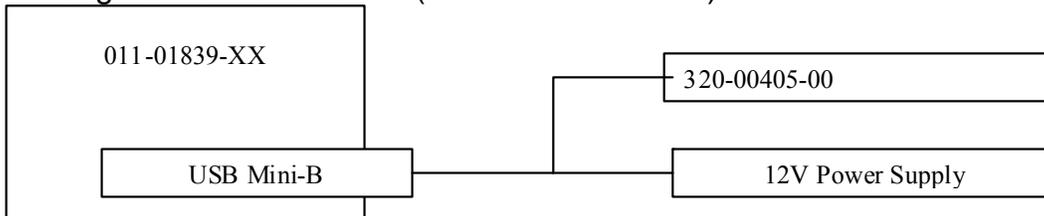

5. 011-01839-XX connected to 011-01839-XX through wireless ANT communication – transmitting and receiving data.

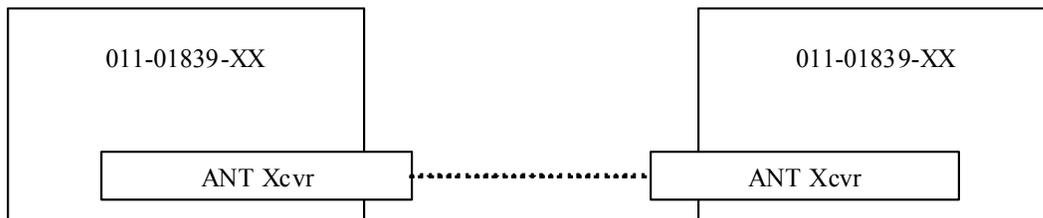



**AC Line Conducted Emission Test Procedure**

The equipment operates solely from direct current power and offers no provision to connect to utility AC power. Therefore, no AC power line conducted emissions testing were performed for this report. The EUT has demonstrated compliance to AC line conducted emissions during USB communications as demonstrated in other documentation.

**Radiated Emission Test Procedure**

The EUT was arranged in the test configurations as shown above for testing. The EUT was placed on a rotating 1 x 1.5-meter wooden platform 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before final data was taken using a spectrum analyzer. Refer to photographs in exhibits for EUT placement used during testing.

**Units of Measurements**

Conducted EMI: Data is in dBµV; dB referenced to one microvolt.

Radiated EMI: Data is in dBµV/m; dB/m referenced to one microvolt per meter.

Radiated Emissions Calculations:

Note: The limit is expressed for a measurement in dBµV/m when the measurement is taken at a distance of 3 meters. Data taken for this report was taken at a distance of 3 meters.

**Test Site Locations**

Conducted EMI ROGERS LABS, INC. located at 4405 W. 259<sup>th</sup> Terrace, Louisburg, KS.

Radiated EMI The radiated emissions tests were performed at Rogers Labs, Inc. 3 meters Open Area Test Site (OATS) located at 4405 W. 259<sup>th</sup> Terrace, Louisburg, KS.

Site Approval Refer to Annex for FCC Site Registration Letter, Reference 90910, and Industry Canada Site Registration Letter Reference IC 3041-1.

## Subpart C - Intentional Radiators

As per CFR47 Part 15, Subpart C the following information is submitted for consideration in obtaining a grant of certification for unlicensed intentional radiators.

### 15.203 Antenna Requirements

The unit is produced with a permanently attached antenna inside the sealed plastic case. No provisions for modification or alterations of the antenna configuration are available. The requirements of 15.203 are met there are no deviations or exceptions to the specification.

### 15.205 Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the 3-meter OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI 63.4-2003 paragraphs 13.1 and 8.3.1.2 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values take into account the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Sample Calculations:

$$\begin{aligned} \text{Computed Peak (dB}\mu\text{V/m @ 3m)} &= \text{FSM (dB}\mu\text{V)} + \text{A.F. (dB)} - \text{Gain (dB)} \\ &= 54.8 + 6.7 - 30 \\ &= 31.5 \end{aligned}$$

**Radiated Emissions in Restricted Bands Data per 15.205**

Emission Frequency (MHz)	FSM Horz. (dBµV)	FSM Vert. (dBµV)	Ant. Factor (dB)	Amp. Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	Limit @ 3m (dBµV/m)
117.0	54.8	54.7	6.7	30	31.5	31.4	43.5
117.7	55.4	53.5	6.7	30	32.1	30.2	43.5
120.7	52.9	49.6	7.1	30	30.0	26.7	43.5
123.8	54.2	51.8	7.6	30	31.8	29.4	43.5
133.3	57.3	48.2	8.5	30	35.8	26.7	43.5
266.5	56.1	51.5	13.1	30	39.2	34.6	46.0
4804.0	19.2	20.6	32.5	30	21.7	23.1	54.0
4914.0	20.3	20.5	32.8	30	23.1	23.3	54.0
4958.0	19.6	21.0	32.9	30	22.5	23.9	54.0
7371.0	19.8	20.3	36.3	30	26.1	26.6	54.0
7437.0	19.0	18.5	36.7	30	25.7	25.2	54.0
12010.0	20.0	18.3	40.0	30	30.0	28.3	54.0
12285.0	20.5	18.0	40.4	30	30.9	28.4	54.0
12395.0	19.8	20.8	40.6	30	30.4	31.4	54.0

No other emissions found in the restricted bands.

**Summary of Results for Radiated Emissions in Restricted Bands 15.205**

The radiated emissions for the EUT meet the requirements for FCC CFR47 Part 15.205 restricted bands of operation. The EUT had a 6.8 dB minimum margin below the limits. Other emissions were present with amplitudes at least 20 dB below the required limits.

**15.209 Radiated emissions limits; general requirements**

**General Radiated EMI per 15.209**

Testing was performed with the EUT arranged in all typical equipment configurations and operated through available modes. Preliminary testing was performed in a screen room with the EUT



positioned 1 meter from the FSM. Radiated emissions investigations were performed to identify the frequencies, which produced the highest emissions. Plots were made of the radiated emission frequency spectrum from 30 MHz to 18,000 MHz for the preliminary transmitter testing. Refer to figures one through six showing the worst-case radiated emission spectrum displayed on the spectrum analyzer taken in a screen room. Each radiated emission was then re-maximized at the OATS site before final radiated emissions measurements were performed. Final data was taken with the EUT located at the open field test site at a distance of 3 meters between the EUT and the receiving antenna. Test procedures of ANSI 63.4-2003 paragraphs 13.1 and 8.3.1.2 were used during radiated emissions testing. The frequency spectrum from 30 MHz to 25,000 MHz was searched for radiated emissions. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Measured emission levels were maximized by EUT placement on the table, changing cable location, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna polarization between horizontal and vertical. Antennas used were Broadband Biconical from 30 MHz to 200 MHz, Log Periodic from 200 MHz to 5 GHz, and/or Biconilog from 30 MHz to 1000 MHz, Double-Ridge horn and/or Pyramidal Horns from 5 GHz to 25 GHz, and amplification stages.

Sample Calculations:

RFS = Radiated Field Strength

DB $\mu$ V/m @ 3m = dB $\mu$ V + A.F. - Amplifier Gain

$$\begin{aligned} \text{DB}\mu\text{V/m @ 3m} &= 54.8 + 6.7 - 30 \\ &= 31.5 \end{aligned}$$


MARKER  
118.0 MHz  
30.67 dB $\mu$ V

ACTV DET: PEAK  
MEAS DET: PEAK QP  
MKR 118.0 MHz  
30.67 dB $\mu$ V

LOG REF 80.0 dB $\mu$ V

10  
dB/  
#ATN  
0 dB

MA SB  
SC FC  
CORR

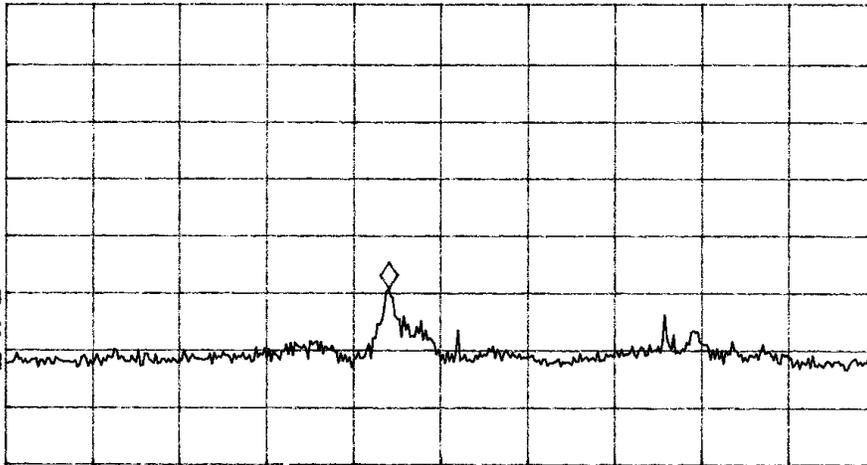

START 30.0 MHz STOP 230.0 MHz  
#IF BW 120 kHz AVG BW 300 kHz SWP 41.7 msec

Figure one Radiated Emissions Plot


MARKER  
270 MHz  
29.36 dB $\mu$ V

ACTV DET: PEAK  
MEAS DET: PEAK QP  
MKR 270 MHz  
29.36 dB $\mu$ V

LOG REF 80.0 dB $\mu$ V

10  
dB/  
#ATN  
0 dB

VA SB  
SC FC  
CORR

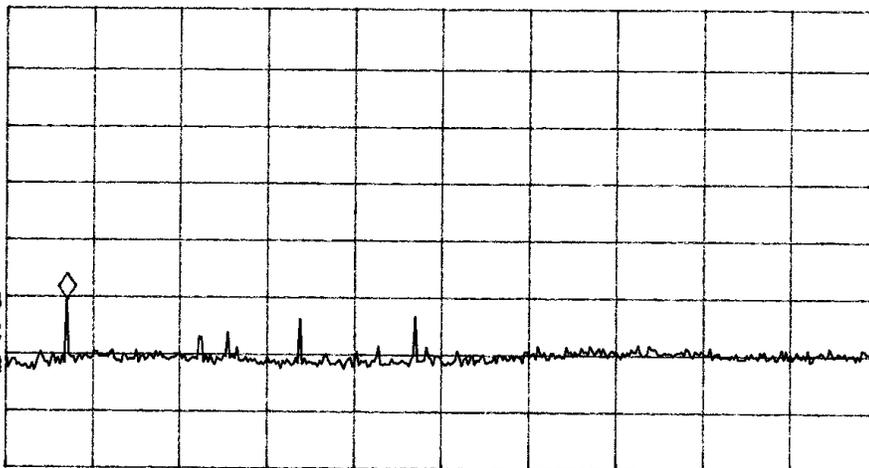

START 200 MHz STOP 1.200 GHz  
#IF BW 120 kHz AVG BW 300 kHz SWP 208 msec

Figure two Radiated Emissions Plot



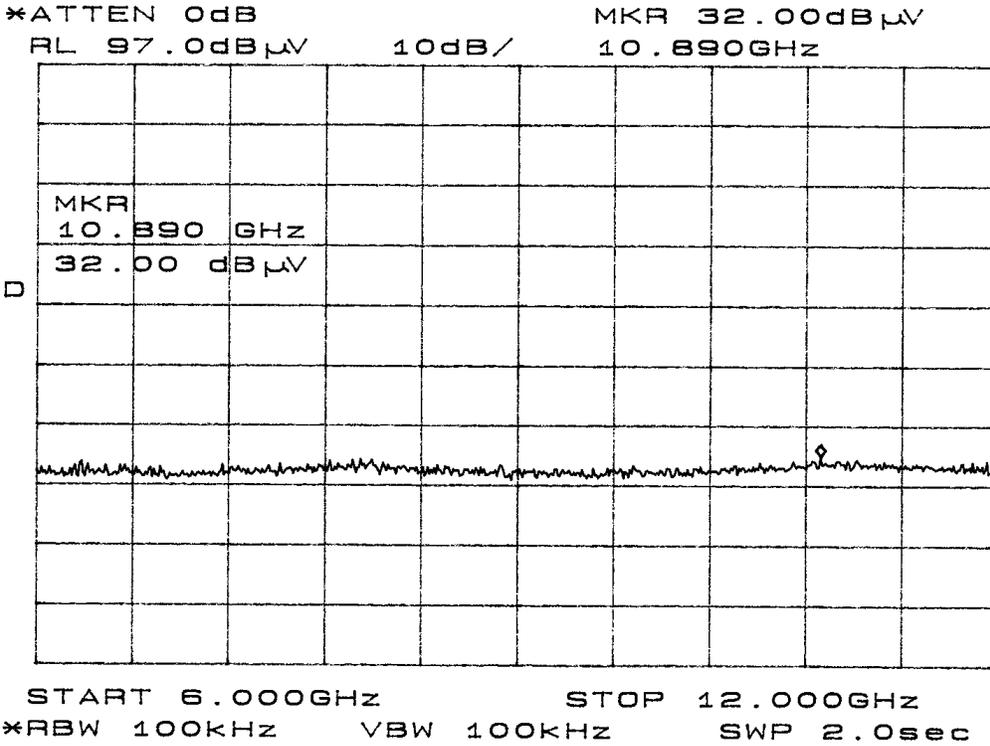


Figure five Radiated Emissions Plot

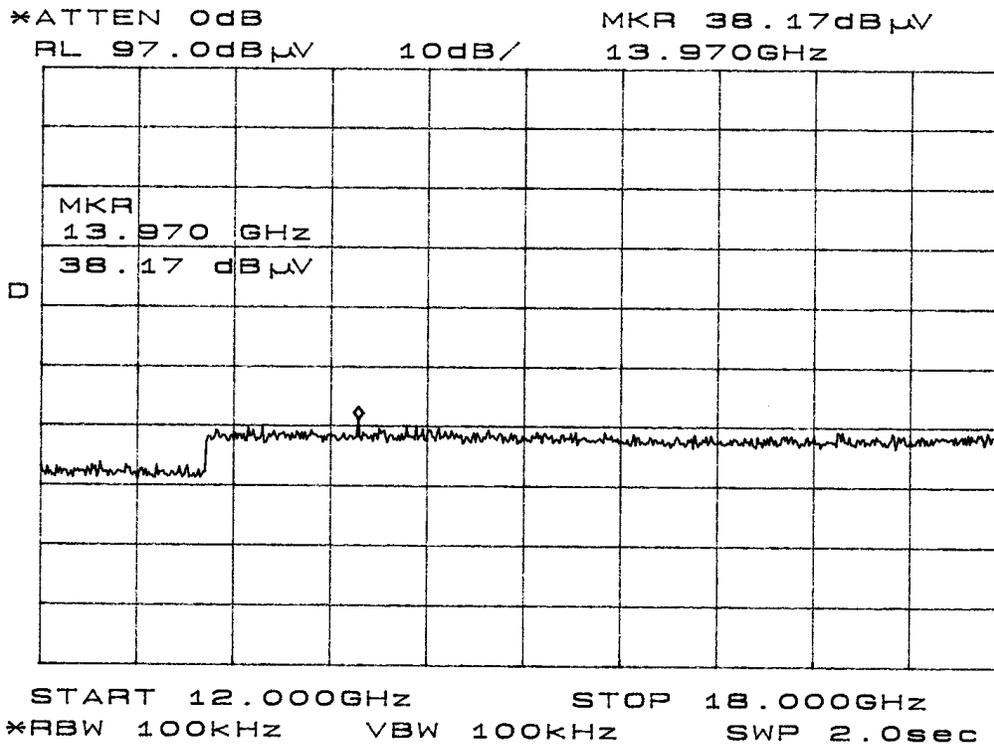


Figure six Radiated Emissions Plot



**General Radiated Emissions Data per 15.209**

Emission Freq. (MHz)	FSM Horz. (dBµV)	FSM Vert. (dBµV)	Ant. Factor (dB)	Amp. Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	Limit @ 3m (dBµV/m)
117.0	54.8	54.7	6.7	30	31.5	31.4	43.5
117.7	55.4	53.5	6.7	30	32.1	30.2	43.5
120.7	52.9	49.6	7.1	30	30.0	26.7	43.5
123.8	54.2	51.8	7.6	30	31.8	29.4	43.5
133.3	57.3	48.2	8.5	30	35.8	26.7	43.5
181.5	42.9	38.7	9.2	30	22.1	17.9	43.5
187.7	45.9	45.5	10.7	30	26.6	26.2	43.5
266.5	56.1	51.5	13.1	30	39.2	34.6	46.0
533.0	44.3	41.2	18.6	30	32.9	29.8	46.0
666.2	52.6	45.7	20.5	30	43.1	36.2	46.0

Other emissions were present with amplitudes at least 20 dB below limits.

**Summary of Results for General Radiated Emissions per 15.209**

The radiated emissions for the EUT meet the requirements for FCC Part 15C and other applicable standards for Intentional Radiators. The EUT had a 2.9 dB minimum margin below the limits. Other emissions were present with amplitudes at least 20 dB below the FCC Limits.

## 15.249 Operation in the Band 2,400-2,483.5 MHz

The power output was measured on an open field test site @ 3-meters. Test procedures of ANSI 63.4-2003 paragraphs 13.1 and 8.3.1.2 were used during testing. The EUT was placed on a wooden turntable 0.8 meters above the ground plane and at a distance of 3-meters from the FSM antenna. The peak and quasi-peak amplitude of frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of frequencies above 1000 MHz were measured using a spectrum analyzer. The amplitude of the emission was then recorded from the analyzer display. Emissions radiated outside of the specified bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation. Refer to figures seven through ten showing the occupied bandwidth, frequency, and amplitude of fundamental emissions as displayed on the spectrum analyzer demonstrating compliance. The amplitudes of each spurious emission were measured at the OATS at a distance of 3 meters from the FSM antenna. The amplitude of each radiated emission was maximized by varying the FSM antenna height, polarization, and by rotating the turntable. A Biconilog Antenna was used for measuring emissions from 30 to 1000 MHz, a Log Periodic Antenna for 200 to 5000 MHz, and Double-ridge horn and/or Pyramidal Horn Antennas from 4 GHz to 25 GHz. Emissions were measured in dB $\mu$ V/m @ 3 meters.

Sample calculation.

$$\begin{aligned}
 \text{dB}\mu\text{V/m@ 3m} &= \text{FSM} + \text{A.F.} + \text{cable loss} - \text{amplifier Gain} \\
 &= 88.2 + 32.9 - 30 \\
 &= 91.1
 \end{aligned}$$





**Transmitter Radiated Emissions Data per 15.249**

Emission Frequency (MHz)	FSM Horz. (dBµV)	FSM Vert. (dBµV)	Ant. Factor (dB)	Amp Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	Limit @ 3m (dBµV/m)
2402.0	88.2	82.0	32.9	30	91.1	84.9	94.0
4804.0	19.2	20.6	32.5	30	21.7	23.1	54.0
7206.0	18.7	19.0	36.0	30	24.7	25.0	54.0
9608.0	21.1	22.0	38.1	30	29.2	30.1	54.0
12010.0	20.0	18.3	40.0	30	30.0	28.3	54.0
2457.0	89.7	82.5	33.4	30	93.1	85.9	94.0
4914.0	20.3	20.5	32.8	30	23.1	23.3	54.0
7371.0	19.8	20.3	36.3	30	26.1	26.6	54.0
9828.0	20.3	20.5	38.3	30	28.6	28.8	54.0
12285.0	20.5	18.0	40.4	30	30.9	28.4	54.0
2479.0	88.2	82.5	33.3	30	91.5	85.8	94.0
4958.0	19.6	21.0	32.9	30	22.5	23.9	54.0
7437.0	19.0	18.5	36.7	30	25.7	25.2	54.0
9916.0	18.8	19.7	38.4	30	27.2	28.1	54.0
12395.0	19.8	20.8	40.6	30	30.4	31.4	54.0

Note: Levels measured @ 3-meter OATS site.

**Summary of Results for Transmitter Radiated Emissions per 15.249**

The EUT had a peak amplitude emission of 0.9 dB margin below the average limit of CFR47 15.249. The EUT had Peak harmonic emission amplitude of 22.6 dB margin below the average limit of 15.209 and 15.249. The radiated emissions for the EUT meet the requirements for FCC CFR47 Part 15.249 and other applicable standards for Intentional Radiators. There were no measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the FCC Limits.



NVLAP Lab Code 200087-0

## Annex

- Annex A, Measurement Uncertainty Calculations
- Annex B, Test Equipment List.
- Annex C, Rogers Qualifications.
- Annex D, FCC Site Approval Letter.

## Annex A Measurement Uncertainty Calculations

### Radiated Emissions Measurement Uncertainty Calculation

Measurement of vertically polarized radiated field strength over the frequency range 30 MHz to 1 GHz on an open area test site at 3m and 10m includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Antenna factor calibration	normal (k = 2)	±0.58
Cable loss calibration	normal (k = 2)	±0.2
Receiver specification	rectangular	±1.0
Antenna directivity	rectangular	±0.1
Antenna factor variation with height	rectangular	±2.0
Antenna factor frequency interpolation	rectangular	±0.1
Measurement distance variation	rectangular	±0.2
Site Imperfections	rectangular	±1.5
Combined standard uncertainty $u_c(y)$ is		

$$U_c(y) = \pm \sqrt{\left[\frac{1.0}{2}\right]^2 + \left[\frac{0.2}{2}\right]^2 + \left[\frac{1.0^2 + 0.1^2 + 2.0^2 + 0.1^2 + 0.2^2 + 1.5^2}{3}\right]}$$

$$U_c(y) = \pm 1.6 \text{ dB}$$

It is probable that  $u_c(y) / s(q_k) > 3$ , where  $s(q_k)$  is estimated standard deviation from a sample of  $n$  readings unless the repeatability of the EUT is particularly poor, and a coverage factor of  $k = 2$  will ensure that the level of confidence will be approximately 95%, therefore:

$$s(q_k) = \sqrt{\frac{1}{(n-1)} \sum_{k=1}^n (q_k - \bar{q})^2}$$

$$U = 2 U_c(y) = 2 \times \pm 1.6 \text{ dB} = \pm 3.2 \text{ dB}$$

#### Notes:

- 1.1 Uncertainties for the antenna and cable were estimated, based on a normal probability distribution with  $k = 2$ .
- 1.2 The receiver uncertainty was obtained from the manufacturer's specification for which a rectangular distribution was assumed.
- 1.3 The antenna factor uncertainty does not take account of antenna directivity.
- 1.4 The antenna factor varies with height and since the height was not always the same in use as when the antenna was calibrated an additional uncertainty is added.
- 1.5 The uncertainty in the measurement distance is relatively small but has some effect on the received signal strength. The increase in measurement distance as the antenna height is increased is an inevitable consequence of the test method and is therefore not considered a contribution to uncertainty.
- 1.6 Site imperfections are difficult to quantify but may include the following contributions:
  - Unwanted reflections from adjacent objects.
  - Ground plane imperfections: reflection coefficient, flatness, and edge effects.
  - Losses or reflections from "transparent" cabins for the EUT or site coverings.
  - Earth currents in antenna cable (mainly effect biconical antennas).

The specified limits for the difference between measured site attenuation and the theoretical value ( $\pm 4$  dB) were not included in total since the measurement of site attenuation includes uncertainty contributions already allowed for in this budget, such as antenna factor.

*Conducted Measurements Uncertainty Calculation*

Measurement of conducted emissions over the frequency range 9 kHz to 30 MHz includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Receiver specification	rectangular	±1.5
LISN coupling specification	rectangular	±1.5
Cable and input attenuator calibration	normal (k=2)	±0.5
Combined standard uncertainty $u_c(y)$ is		

$$U_c(y) = \pm \sqrt{\left[\frac{0.5}{2}\right]^2 + \frac{1.5^2 + 1.5^2}{3}}$$

$$U_c(y) = \pm 1.2 \text{ dB}$$

As with radiated field strength uncertainty, it is probable that  $u_c(y) / s(qk) > 3$  and a coverage factor of  $k = 2$  will suffice, therefore:

$$U = 2 U_c(y) = 2 \times \pm 1.2 \text{ dB} = \pm 2.4 \text{ dB}$$



### Annex B Test Equipment List For Rogers Labs, Inc.

The test equipment used is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

List of Test Equipment	Calibration Date
Oscilloscope Scope: Tektronix 2230	2/08
Wattmeter: Bird 43 with Load Bird 8085	2/08
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/08
H/V Power Supply: Fluke Model: 408B (SN: 573)	2/08
R.F. Generator: HP 606A	2/08
R.F. Generator: HP 8614A	2/08
R.F. Generator: HP 8640B	2/08
Spectrum Analyzer: HP 8562A,	5/08
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
HP Adapters: 11518, 11519, 11520	
Spectrum Analyzer: HP 8591EM	5/08
Frequency Counter: Leader LDC825	2/08
Antenna: EMCO Biconilog Model: 3143	5/08
Antenna: EMCO Log Periodic Model: 3147	10/07
Antenna: Antenna Research Biconical Model: BCD 235	10/07
Antenna: EMCO Dipole Set 3121C	2/08
Antenna: C.D. B-101	2/08
Antenna: Solar 9229-1 & 9230-1	2/08
Antenna: EMCO 6509	2/08
Audio Oscillator: H.P. 201CD	2/08
R.F. Power Amp 65W Model: 470-A-1010	2/08
R.F. Power Amp 50W M185- 10-501	2/08
R.F. PreAmp CPPA-102	2/08
LISN 50 µHy/50 ohm/0.1 µf	10/07
LISN Compliance Eng. 240/20	2/08
LISN Fischer Custom Communications FCC-LISN-50-16-2-08	2/08
Peavey Power Amp Model: IPS 801	2/08
Power Amp A.R. Model: 10W 1010M7	2/08
Power Amp EIN Model: A301	2/08
ELGAR Model: 1751	2/08
ELGAR Model: TG 704A-3D	2/08
ESD Test Set 2010i	2/08
Fast Transient Burst Generator Model: EFT/B-101	2/08
Current Probe: Singer CP-105	2/08
Current Probe: Solar 9108-1N	2/08
Field Intensity Meter: EFM-018	2/08
KEYTEK Ecat Surge Generator	2/08
Shielded Room 5 M x 3 M x 3.0 M	



## **Annex C Qualifications**

**SCOT D. ROGERS, ENGINEER**

**ROGERS LABS, INC.**

Mr. Rogers has approximately 17 years experience in the field of electronics. Six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

### POSITIONS HELD:

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

### EDUCATIONAL BACKGROUND:

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University
- 2) Bachelor of Science Degree in Business Administration Kansas State University
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



NVLAP Lab Code 200087-0

**Annex D FCC Test Site Registration Letter**

**FEDERAL COMMUNICATIONS COMMISSION**

**Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD 21046**

May 16, 2006

Registration Number: 90910

Rogers Labs, Inc.  
4405 West 259th Terrace  
Louisburg, KS 66053

Attention: Scot Rogers

Re: Measurement facility located at Louisburg  
3 & 10 meter site  
Date of Renewal: May 16, 2006

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website [www.fcc.gov](http://www.fcc.gov) under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Phyllis Parrish  
Information Technician