

APPLICATION
For
GRANT OF
CERTIFICATION

FOR

MODEL: DC30

GPN 011-01902-00

FCC ID: IPH-01393

FOR

GARMIN INTERNATIONAL, INC.

1200 East 151st Street


Olathe, KS 66062

Test Report Number 080306

Authorized Signatory: *Scott D Rogers*



NVLAP Lab Code 200087-0



Rogers Labs, Inc.

4405 West 259th Terrace

Louisburg, KS 66053

Telephone / Fax (913) 837-3214

TEST REPORT

For

APPLICATION of CERTIFICATION

For

GARMIN INTERNATIONAL, INC.

1200 East 151st Street

Olathe, KS 66062

Phone: (913) 397-8200

Mr. Abe Cox

Compliance Engineer

Model: DC30

MURS Transmitter

Frequency: 151.820, 151.880, 151.940, 154.570, and 154.600 MHz

FCC ID: IPH-01393

Test Date: March 6, 2008

Certifying Engineer: *Scot D. Rogers*

Scot D. Rogers

ROGERS LABS, INC.

4405 West 259th Terrace

Louisburg, KS 66053

Phone: (913) 837-3214

FAX: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.
This report must not be used by the client to claim product endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Table Of Contents

TABLE OF CONTENTS..... 3

FORWARD 5

OPINION / INTERPRETATION OF RESULTS 5

ENVIRONMENTAL CONDITIONS..... 5

APPLICABLE STANDARDS & TEST PROCEDURES 5

LIST OF TEST EQUIPMENT 6

EQUIPMENT TESTED 6

EQUIPMENT FUNCTION AND CONFIGURATION..... 6

 Equipment Function.....6

 Equipment Configuration.....7

CFR47 2.1033(C) APPLICATION FOR CERTIFICATION..... 8

CFR47 2.1046 RF POWER OUTPUT 9

 Measurements Required9

 Test Arrangement.....9

 MURS Transmitter Output Power Results.....10

 Figure 1 Power Output at antenna terminal of MURS Transmitter 11

CFR47 2.1047 MODULATION CHARACTERISTICS..... 11

 Measurements Required11

 Test Arrangement.....11

 Modulation Characteristic Results12

CFR47 2.1049 OCCUPIED BANDWIDTH 12

 Measurements Required12

 Test Arrangement.....12

 Occupied Bandwidth Results.....12

 Figure 2 Occupied Band Width (Data 0101) 13

 Figure 3 Occupied Band Width (Data 0101) 13

 Figure 4 Occupied Band Width (Data 0000) 14

 Figure 5 Occupied Band Width (Data 111) 14

CFR47 2.1051 SPURIOUS EMISSIONS AT ANTENNA TERMINALS 15



Measurements Required 15
Test Arrangement..... 15
 Figure 6 Spurious Emissions at Antenna Terminal..... 15
Spurious Emissions at Antenna Terminal Results..... 16
 Antenna Spurious Emissions Results..... 16

CFR47 2.1053 FIELD STRENGTH OF SPURIOUS RADIATION..... 17
Measurements Required 17
Test Arrangement..... 17
Field Strength of Spurious Radiation Results..... 18
 Spurious Radiated Emission Results for Channel frequency 151.880..... 18
 Spurious Radiated Emission Results for Channel frequency 154.600..... 19
 Spurious Emission Results (General) 19

2.1055 FREQUENCY STABILITY 20
Measurements Required 20
Test Arrangement..... 20
Frequency Stability Results 21

ANNEX..... 22
 Annex A Measurement Uncertainty Calculations 23
 Annex B Test Equipment List For Rogers Labs, Inc. 25
 Annex C Qualifications 26
 Annex D FCC Test Site Registration Letter..... 27



Forward

The device is governed by CFR47 rule Part 95 subpart E for MURS transmitter and 15.249 for operation of the low power licensed exempt 2400-2483.5 MHz transmitter. In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2007, Part 2 Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.915, 2.925, 2.926, 2.1031 through 2.1057, applicable paragraphs of Part 95, the following information is submitted.

Applicant Gamin International, Inc.
 1200 East 151st Street
 Olathe, KS 66062

Model DC30, GPN: 011-01902-00

FCC ID IPH-01393

Opinion / Interpretation of Results

Tests Performed	Results
Emissions Tests	
Emissions as per CFR47 Part 2, paragraphs 2.1033 through 2.1057	Complies
Emissions as per CFR47 Part 95, Paragraph 95.632	Complies

Environmental Conditions

Ambient Temperature 20.6° C

Relative Humidity 18%

Atmospheric Pressure 30.12 in Hg

Applicable Standards & Test Procedures

In accordance with the Federal Communications Commission, Code of Federal Regulations CFR47, dated October 1, 2007, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, applicable parts of paragraph 15, Part 15C paragraph 15.249, the following information is submitted.

Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI 63.4-2003 Document.

List of Test Equipment

A Hewlett Packard 8591EM and or 8562A Spectrum Analyzer was used as the measuring device for the emissions testing. The analyzer settings used are described in the following table. Refer to the Appendix for a complete list of Test Equipment. Refer to annex for complete listing of test equipment.

HP 8591EM SPECTRUM ANALYZER SETTINGS		
CONDUCTED EMISSIONS		
RBW	AVG. BW	DETECTOR FUNCTION
9 kHz	30 kHz	Peak/Quasi Peak
RADIATED EMISSIONS (30 – 1000 MHz)		
RBW	AVG. BW	DETECTOR FUNCTION
120 kHz	300 kHz	Peak/Quasi Peak
HP 8562A SPECTRUM ANALYZER SETTINGS		
RADIATED EMISSIONS (1 – 40 GHz)		
RBW	AVG. BW	DETECTOR FUNCTION
1 MHz	1 MHz	Peak/Average
ANTENNA CONDUCTED EMISSIONS:		
RBW	AVG. BW	DETECTOR FUNCTION
120 kHz	300 kHz	Peak

Equipment Tested

<u>Equipment</u>	<u>Serial Number</u>	<u>FCC I.D.#</u>
DC30	2/29	IPH-01393

Equipment Function and Configuration

Equipment Function

The DC30 transmitter is mounted to a collar for placement on animals. The unit functions while attached to a collar or harness allowing a sports enthusiast to locate and track an animal wearing


the harness and transmitter. The EUT incorporates two separate transmitter sections, one operating on the approved MURS frequencies governed by rule of CFR47 95.632. The other transmitter operates as a low power license exempt intentional radiator operating between 2.4-2.4835 GHz governed by CFR47 15.249. The low power transmitter allows for channel selection and synchronization of the VHF transmitter with the remote receiver. The MURS transmissions are received on the synchronized receiver carried by the sports enthusiast allowing them to monitor the location of the transmitter.

The EUT enclosure is sealed allowing no access inside. This approach hardens the equipment to adverse conditions the tracked animal experience. Channel selection for the MURS transmitter is limited to the approved channels of operation. The EUT offers no transmitter power adjustment to the end user. The internal battery may be recharged using the approved charging accessories. Two charging options are available, AC/DC wall adapter or DC car/cigarette lighter adapter.


Equipment Configuration

Configurations for the DC30

1. DC30 (GPN: 011-01902-00) connected to car cigarette lighter adapter (GPN: 320-00340-00), and external VHF antenna (GPN: 700-00027-00).

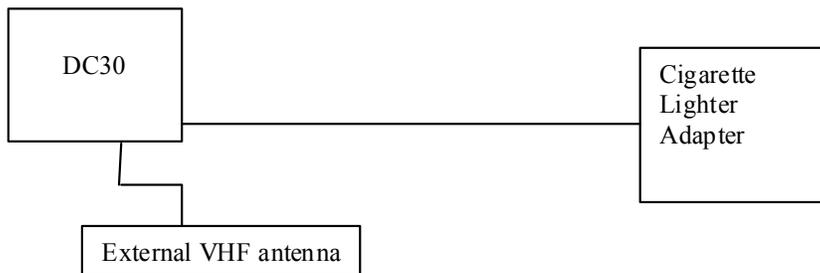

2. DC30's Li-Ion battery charged by the AC wall brick power supply (GPN: 362-00045-00).

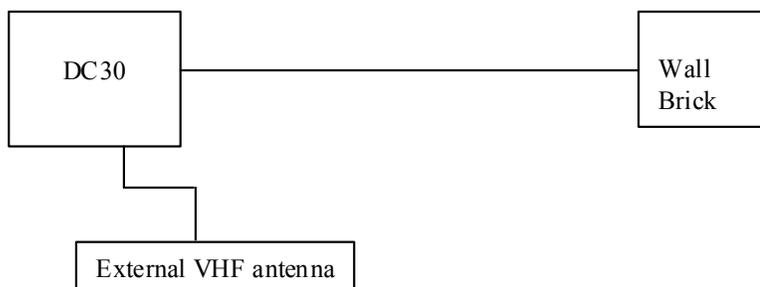

CFR47 2.1033(c) Application for Certification

- (1) Manufacturer: GARMIN INTERNATIONAL, INC.
1200 East 151st Street
Olathe, KS 66062
Phone: (913) 397-8200
- (2) FCC Identification: Model: DC30
FCC ID: IPH-01393 S/N: 2/29
- (3) Copy of the installation and operating manual:
Refer to exhibit for Draft Instruction Manual.
- (4) Emission Type: 9k38F2D
- (5) Frequency Range: MURS Transmitter, 151 MHz, and 154 MHz
- (6) Operating Power Level: 2.0 Watts MURS
- (7) Max Power allowed as defined in 95.639(h): 2.0 Watts MURS
- (8) Power into final amplifier: 2.0 Watt MURS: 6.15 Watts (4.1V @ 1.5A)
- (9) Tune Up Procedure for Output Power: Refer to Exhibit for Transmitter Alignment Procedure.
- (10) Circuit Diagrams; description of circuits, frequency stability, spurious suppression, and power and modulation limiting: Refer to Exhibit for Circuit Diagrams. Refer to Exhibit for Theory of Operation.
- (11) Photograph or drawing of the Identification Plate: Refer to Exhibit for Photograph or Drawing.
- (12) Drawings of Construction and Layout: Refer to Exhibit for Information of Components Layout and Chassis Drawings.
- (13) Detail Description of Digital Modulation: Details of modulation and description are contained in confidential exhibit Operational Description.
- (14) Data required by 2.1046 through 2.1057 is reported in this document.
- (15) Application for certification of an external radio power amplifier operating under part 97 of this chapter. This specification is not applicable to this device.

- (16) Application for certification of AM broadcast transmitter. This specification is not applicable to this device.


CFR47 2.1046 RF Power Output

Measurements Required

Measurements shall be made to establish the radio frequency power delivered by the transmitter into the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun, except as noted below:

If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

Test Arrangement



Two samples were offered for testing purposes. One sample replaced the antenna with a 50-ohm port allowing for antenna-conducted emissions measurements. The radio frequency power output of the MURS transmitter was measured at the test antenna terminal by replacing the antenna with coaxial cable, attenuation, and connected to a spectrum analyzer. The attenuator and spectrum analyzer had an impedance of 50 Ohms to match the impedance of the standard antenna. A HP 8591EM and/or 8562A Spectrum Analyzer was used to measure the radio frequency power at the antenna port. The data was taken in dBm and converted to watts as shown in the following table. Refer to Figure one showing the output power of the MURS transmitter at the antenna terminal. Data was taken per Paragraph 2.1046(a) and applicable parts of Part 95.

P_{dBm} = power in dB above 1 milliwatt.

Milliwatts = $10^{(P_{dBm}/10)}$

Watts = (Milliwatts) x (0.001)(W/mW)

33.00 dBm = $10^{(32.70/10)}$
 = 1,862.1 mW
 = 1.9 Watts

MURS Transmitter Output Power Results

Frequency	PdBm	Pmw	Pw
151.880	32.70	1,862.1	1.9
154.600	32.72	1,870.7	2.0

Using the substitution method the following data was taken per TIA/EIA-603. Utilizing the available antenna options, the radio frequency output power was measured at a three-meter distance on an approved Open Area Test Site (OATS) using the substitution method. A HP 8591EM Spectrum Analyzer was used to measure the radio frequency power produced by the EUT at a distance of three-meters. The level was recorded and the EUT was removed from the table and replaced by a substitution antenna driven by a frequency generator and amplification stages. The generator output level was then increased until the amplitude level produced by the substitution system measured the same as previously recorded from the EUT. The antenna was removed and output power then measured. This power output level was then recorded, as the power required reproducing the measured level. This procedure was repeated for all frequencies of interest with the data taken reported below. The testing procedures used conform to the procedures stated in the TIA/EIA-603 document.

Substitution method radiated power Data using antenna option

Frequency of Emission (MHz)	Amplitude of emission		Signal level to dipole required to reproduce	
	Horizontal dB μ V	Vertical dB μ V	Horizontal dBm	Vertical dBm
151.880	101.8	109.9	16.7	24.8
154.600	104.5	111.6	18.3	25.4

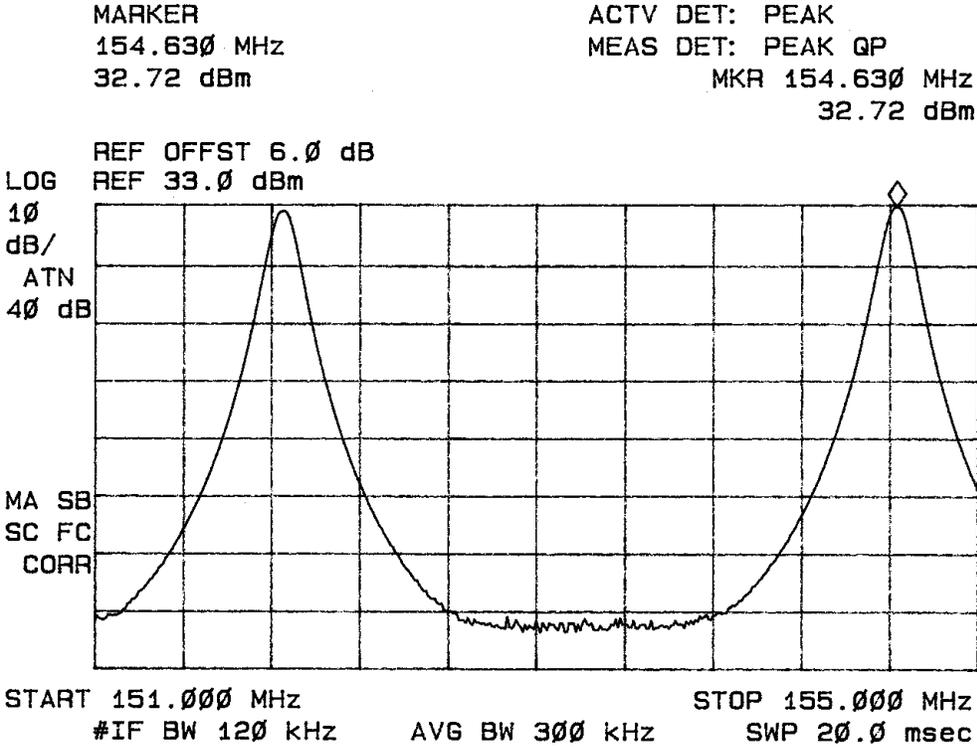


Figure 1 Power Output at antenna terminal of MURS Transmitter


The specifications of Paragraph 2.1046(a) and applicable Parts of 95 are met. There are no deviations to the specifications.

CFR47 2.1047 Modulation Characteristics

Measurements Required

A curve or equivalent data, which shows that the equipment will meet the modulation requirements of the rules, under which the equipment is to be licensed, shall be submitted.

Test Arrangement

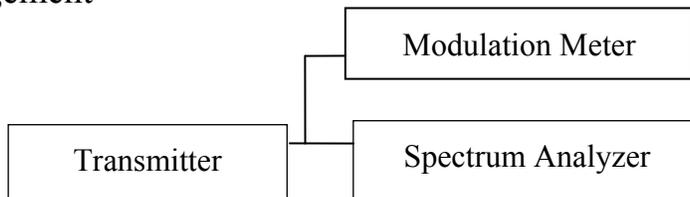

The radio frequency output was coupled to a HP Spectrum Analyzer and a modulation meter. The spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating in its various modes. The modulation meter was used to measure the percent modulation or frequency deviation.

Modulation Characteristic Results

The MURS Transmitter broadcasts only digital information and offers no connection for external audio inputs. Modulation information is recorded in this and other documentation for reference. Therefore, no modulation characteristics were measured or reported.


The specifications of Paragraph 2.1047 and applicable parts of 95 are met.

CFR47 2.1049 Occupied Bandwidth

Measurements Required

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are equal to 0.5 percent of the total mean power radiated by a given emission. Plots were taken with the unit operating in all three-test modes representing normal modes with digital data formats of zeros, ones, and alternating zero-one.

Test Arrangement

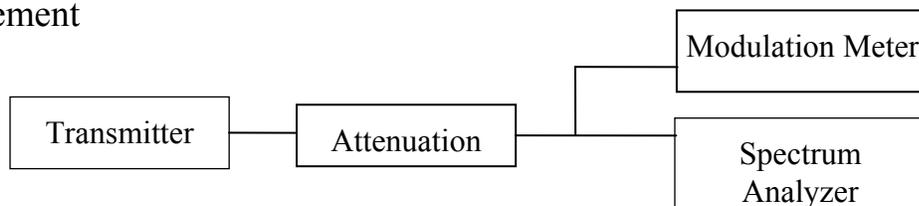

Occupied Bandwidth Results

fc (MHz)	Data Mode	Occupied Bandwidth (kHz)
151.880	0101	9.38
151.880	0000	8.94
151.880	1111	9.00
154.600	0101	9.25
154.600	0000	8.94
154.600	1111	9.00

A spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating through the test sample modes representing all normal modes. The test sample provided transmit operation streaming either all zero, all ones, or one-zero values. The power ratio in dB representing 99.5% of the total mean power was recorded from the spectrum analyzer. Refer to figures two through five for plots showing the occupied bandwidth of 99.5% power and emission mask.

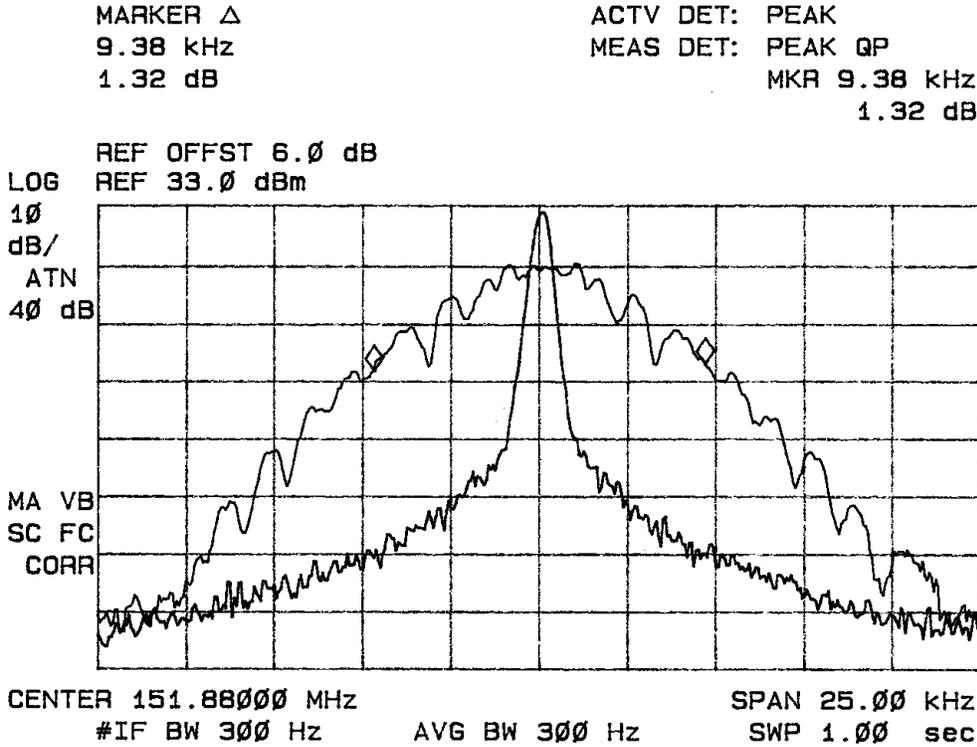


Figure 2 Occupied Band Width (Data 0101)

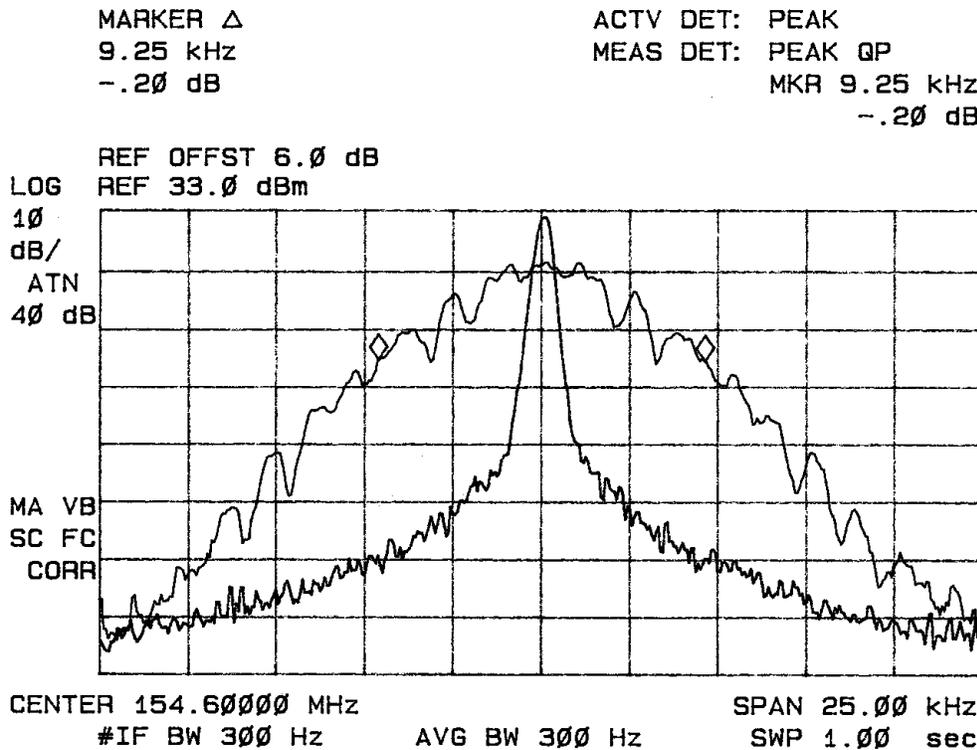


Figure 3 Occupied Band Width (Data 0101)

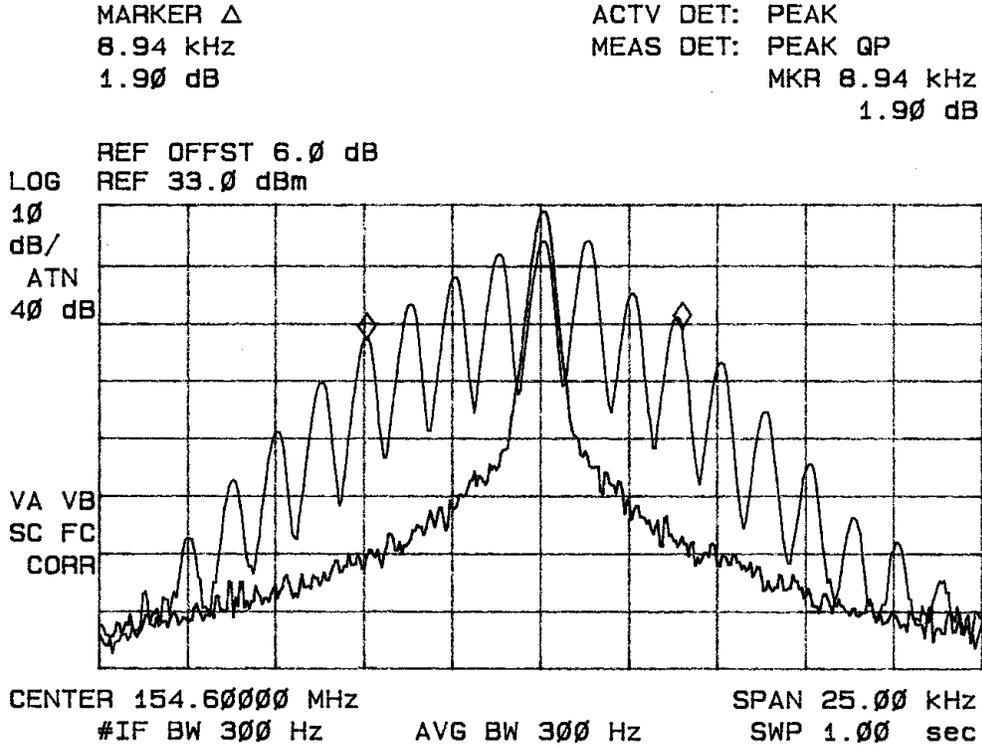


Figure 4 Occupied Band Width (Data 0000)

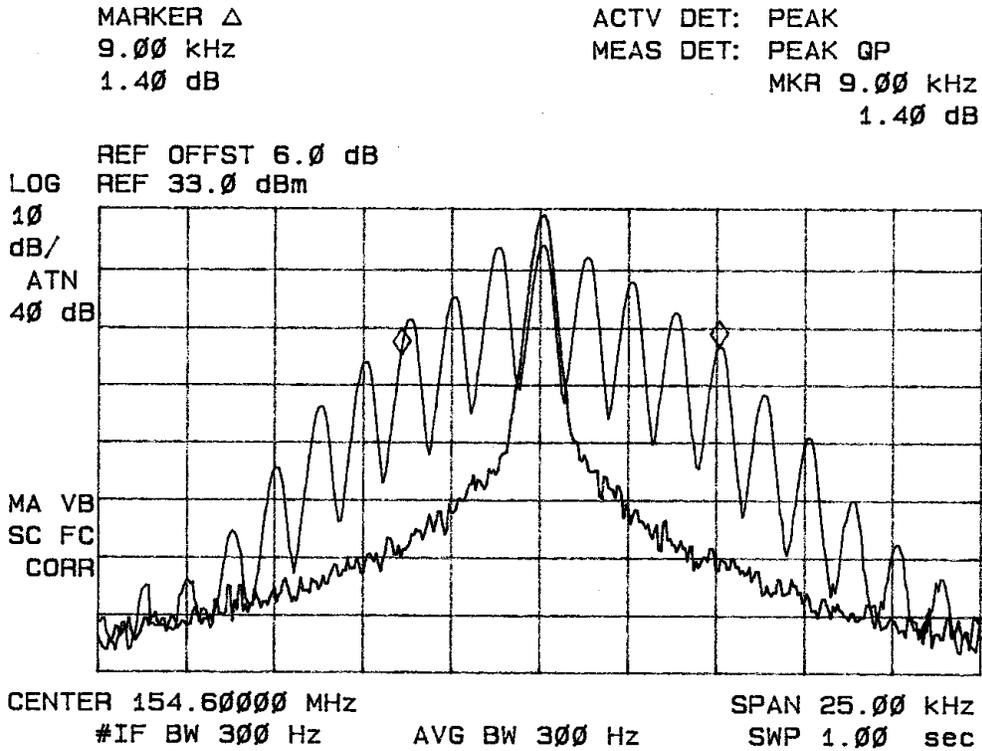



Figure 5 Occupied Band Width (Data 111)

CFR47 2.1051 Spurious Emissions at Antenna Terminals

Measurements Required

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna.

Test Arrangement



The radio frequency output was coupled to a HP 8562 Spectrum Analyzer. The spectrum analyzer was used to observe the radio frequency spectrum with the MURS transmitter operated in a normal mode. The frequency spectrum from 30 MHz to 1.6 GHz was observed and a plot produced of the frequency spectrum. Figure six represents data for the DC30 operating while transmitting data. Data was taken per 2.1051, 2.1057, and applicable paragraphs of Part and 95.

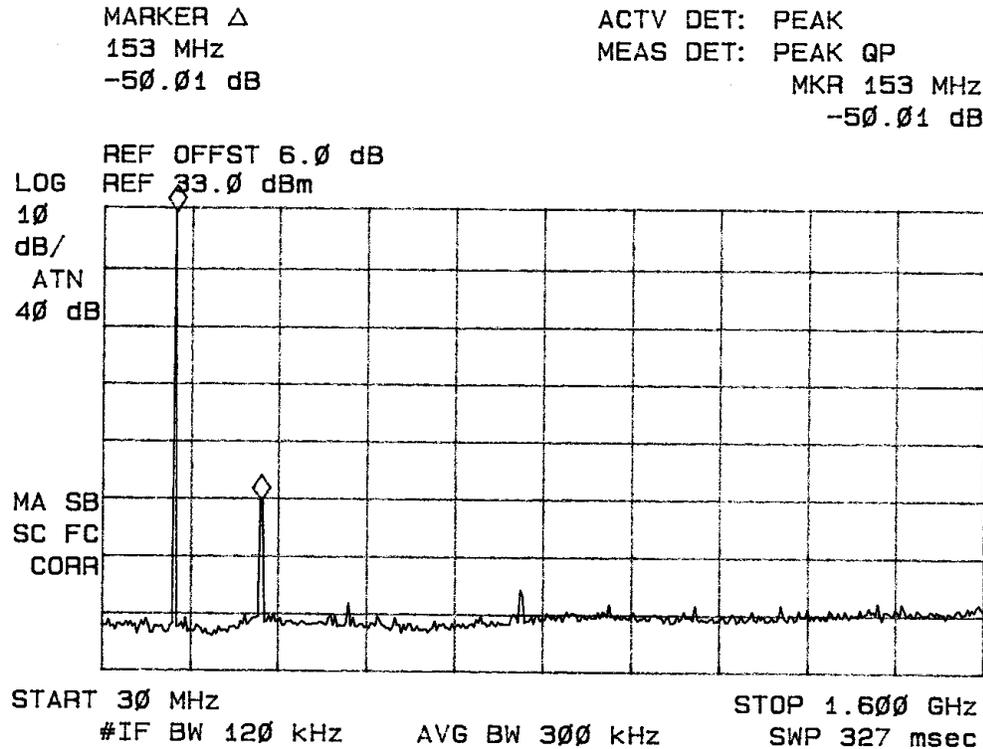


Figure 6 Spurious Emissions at Antenna Terminal



Spurious Emissions at Antenna Terminal Results

The output of the MURS transmitter was coupled to a HP Spectrum Analyzer and the frequency emissions were measured. Data was taken as per 2.1051 and applicable paragraphs of Part 95.

Spurious emissions removed from the center frequency by more than 12.5 kHz must be attenuated at least $50+10\log(P_o)$.

$$\begin{aligned}
2.0 \text{ Watt} &= 50 + 10 \text{ LOG}(P_o) \\
&= 50 + 10 \text{ LOG}(2) \\
&= 53.0
\end{aligned}$$

Antenna Spurious Emissions Results

Channel MHz	Spurious Freq. (MHz)	Level Below Carrier (dB)	Channel MHz	Spurious Freq. (MHz)	Level Below Carrier (dB)
151.880	303.76	-54.8	154.600	309.20	-55.3
	455.64	-64.7		463.80	-67.7
	607.52	-70.1		618.40	-70.9
	759.40	-68.9		773.00	-66.3
	911.28	-67.4		927.60	-67.4
	1063.16	-68.3		1082.20	-69.6
	1215.04	-69.7		1236.80	-69.0
	1366.92	-69.1		1391.40	-69.1
	1518.80	-70.8		1546.00	-70.9

Specifications of Paragraphs 2.1051, 2.1057 and applicable paragraphs of part 95 are met. There are no deviations to the specifications.

CFR47 2.1053 Field Strength of Spurious Radiation

Measurements Required

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation.

Test Arrangement



The transmitter was placed on a wooden turntable 0.8 meters above the ground plane and at a distance of 3 meters from the FSM antenna. With the MURS transmitter radiating into the standard antenna, the receiving antenna was raised and lowered from 1m to 4m to obtain the maximum reading of spurious radiation from the EUT on the spectrum analyzer. The turntable was rotated through 360 degrees to locate the position registering the highest amplitude of emission. The frequency spectrum was then searched for spurious emissions generated from the transmitter. The amplitude of each spurious emission was maximized by raising and lowering the FSM antenna, and rotating the turntable before final data was recorded. A Biconilog antenna was used for frequency measurements of 30 to 1000 MHz. A log periodic antenna was used for frequencies of 1000 MHz to 5 GHz and pyramidal horn antennas were used for frequencies of 5 GHz to 40 GHz. Emission levels were measured and recorded from the spectrum analyzer in dB μ V. The transmitter was then removed and replaced with a substitution antenna and signal generator. The signal from the generator was then adjusted such that the amplitude received was the same as that previously recorded for each frequency. This step was repeated for both horizontal and vertical polarizations. The power in dBm required to produce the desired signal level was then recorded from the signal generator. The power in dBm was then calculated by reducing the previous readings by the power loss in the cable and further corrected for the gain in the substitution antenna. Data was taken at the Rogers Labs, Inc. 3 meters open area test site (OATS). A description of the test facility is on file with the FCC, Reference 90910. The testing procedures used conform to the procedures stated in the TIA/EIA-603 document.

The limits for the spurious radiated emissions are defined by the following equation.

Limit = Amplitude of the spurious emission must be attenuated by this amount below the level of the fundamental. On any frequency removed from the assigned frequency by more than 250% of the authorized bandwidth: at least $50 + 10 \text{ Log} (P_o)$ dB.

2-watt MURS transmitter.

$$\begin{aligned}
 \text{Attenuation} &= 50 + 10 \text{ Log}_{10}(P_w) \\
 &= 50 + 10 \text{ Log}_{10}(2) \\
 &= 53.0 \text{ dB}
 \end{aligned}$$



Limit = spurious emission must be at least 53 dB below the fundamental MURS emission.

Field Strength of Spurious Radiation Results

The EUT was set to transmit at the desired frequency. The amplitude of each spurious emission was then maximized and recorded. The transmitter produces 2.0-watts (MURS) of output power (33 dBm). Then the radiated spurious emission in dB was calculated from the following equation.

Emissions Level Below Carrier (dB) = ELBC

ELBC (dB) = 10 Log₁₀[Tx power(W)/0.001] – signal level required to reproduce example:

ELBC = 10 Log₁₀[2.0/0.001]-(-38.4) = 71.41 dBc

Using the measured radiated emissions levels for each fundamental, the level below the carrier for each polarization and frequency could be represented using the following

ELBC = 16.7-(-38.4) = 55.1 dBc

Spurious Radiated Emission Results for Channel frequency 151.880

Frequency of Emission	Amplitude of Spurious emission		Signal level to dipole required to reproduce		Emission level below carrier (ELBC)		Limit
	Horizontal	Vertical	Horizontal	Vertical	Horizontal	Vertical	
(MHz)	dB _μ V	dB _μ V	dBm	dBm	dBc	dBc	dBc
151.880	101.8	109.9	16.7	27.8	0	0	0
303.77	72.4	73.3	-38.4	-37.5	55.1	62.3	53
455.65	44.6	52.4	-63.1	-55.3	79.8	80.1	53
607.52	66.1	59.6	-39.7	-46.2	56.4	71.0	53
759.40	61.0	61.6	-42.2	-41.6	58.9	66.4	53
911.30	45.5	48.2	-56.3	-53.6	73.0	78.4	53
1063.20	56.9	62.7	-43.2	-37.4	59.9	62.2	53
1215.00	54.3	60.7	-45.6	-39.2	62.3	64.0	53
1366.90	35.1	47.2	-63.6	-51.5	80.3	76.3	53
1518.80	45.0	36.1	-52.7	-61.6	69.4	86.4	53

Spurious Radiated Emission Results for Channel frequency 154.600

Frequency of Emission	Amplitude of Spurious emission		Signal level to dipole required to reproduce		Emission level below carrier		Limit
	Horizontal	Vertical	Horizontal	Vertical	Horizontal	Vertical	
(MHz)	dB μ V	dB μ V	dBm	dBm	dBc	dBc	dBc
309.20	69.4	70.2	-41.1	-40.3	59.4	65.7	53
463.80	44.6	53.6	-62.9	-53.9	81.2	79.3	53
618.40	60.7	54.7	-44.8	-50.8	63.1	76.2	53
773.00	59.5	60.4	-43.9	-43.0	62.2	68.4	53
927.60	46.1	52.4	-55.7	-49.4	74.0	74.8	53
1082.20	58.0	62.5	-42.3	-37.8	60.6	63.2	53
1236.80	54.0	55.9	-46.0	-44.1	64.3	69.5	53
1391.40	39.8	47.7	-58.9	-51.0	77.2	76.4	53
1546.00	42.3	40.6	-55.3	-57.0	73.6	82.4	53

Spurious Emission Results (General)

Emission Frequency (MHz)	FSM Horz. (dB μ V)	FSM Vert. (dB μ V)	Ant. Factor (dB)	Amp. Gain (dB)	RFS Horz. @ 3m (dB μ V/m)	RFS Vert. @ 3m (dB μ V/m)	Limit @ 3m (dB μ V/m)
290.4	28.4	31.8	13.6	30	12.0	15.4	46.0

All other measured spurious emissions were 20 db or more below the specified limit.

Specifications of Paragraph 2.1053, 2.1057, applicable paragraphs of part 15 and 95 are met. There are no deviations to the specifications.

2.1055 Frequency Stability


Measurements Required

The frequency stability shall be measured with variations of ambient temperature from -30° to +50° centigrade. Measurements shall be made at the extremes of the temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. In addition to temperature stability, the frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, batteries powered equipment, reduce primary supply voltage to the battery-operating end point, which shall be specified by the manufacturer.

The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

Test Arrangement

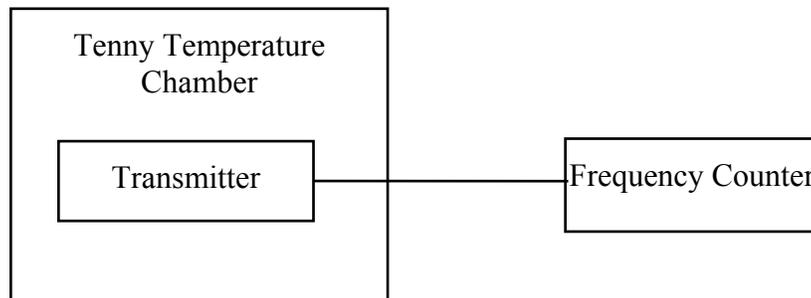

The measurement procedure outlined below shall be followed:

- Steps 1: The transmitter shall be installed in an environmental test chamber whose temperature is controllable. Provision shall be made to measure the frequency of the transmitter.
- Step 2: With the transmitter inoperative (power switched “OFF”), the temperature of the test chamber shall be adjusted to +25°C. After a temperature stabilization period of one hour at +25°C, the transmitter shall be switched “ON” with standard test voltage applied.

- Step 3: The carrier shall be keyed “ON”, and the transmitter shall be operated unmodulated at full radio frequency power output at the duty cycle, for which it is rated, for duration of at least 5 minutes. The radio frequency carrier frequency shall be monitored and measurements shall be recorded.
- Step 4: The test procedures outlined in Steps 2 and 3, shall be repeated after stabilizing the transmitter at the environmental temperatures specified, -30°C to 50°C in 10-degree increments.

The test sample was powered on and allowed to operate to the end of battery life allowing for battery endpoint stability to be measured. The frequency was measured and the variation in parts per million was calculated. Data was taken per Paragraphs 2.1055 and applicable paragraphs of part 95.

Frequency Stability Results

Frequency (MHz)	Frequency Stability Vs Temperature In Parts Per Million (Ppm)								
	Temperature in °C								
154.6000	-30	-20	-10	0	+10	+20	+30	+40	+50
Δ (Hz)	-30.0	-30.0	-30.0	-30.0	-50.0	-30.0	-60.0	-80.0	-70.0
Ppm	-0.19	-0.19	-0.19	-0.19	-0.32	-0.19	-0.38	-0.51	-0.45
%	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Frequency In MHz	Frequency Stability Vs Voltage Endpoint 3.70 Volts Nominal; Results In Ppm Battery Endpoint Voltage 3.0 Vdc
154.6000	0.0

Specifications of Paragraphs 2.1055 and applicable paragraphs of parts 2, 15, and 95 are met. There are no deviations to the specifications.



NVLAP Lab Code 200087-0

Annex

- Annex A, Measurement Uncertainty Calculations
- Annex B, Test Equipment List.
- Annex C, Rogers Qualifications.
- Annex D, FCC Site Approval Letter.

Annex A Measurement Uncertainty Calculations

Radiated Emissions Measurement Uncertainty Calculation

Measurement of vertically polarized radiated field strength over the frequency range 30 MHz to 1 GHz on an open area test site at 3m and 10m includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Antenna factor calibration	normal (k = 2)	±0.58
Cable loss calibration	normal (k = 2)	±0.2
Receiver specification	rectangular	±1.0
Antenna directivity	rectangular	±0.1
Antenna factor variation with height	rectangular	±2.0
Antenna factor frequency interpolation	rectangular	±0.1
Measurement distance variation	rectangular	±0.2
Site Imperfections	rectangular	±1.5

Combined standard uncertainty $u_c(y)$ is

$$U_c(y) = \pm \sqrt{\left[\frac{1.0}{2}\right]^2 + \left[\frac{0.2}{2}\right]^2 + \left[\frac{1.0^2 + 0.1^2 + 2.0^2 + 0.1^2 + 0.2^2 + 1.5^2}{3}\right]}$$

$$U_c(y) = \pm 1.6 \text{ dB}$$

It is probable that $u_c(y) / s(q_k) > 3$, where $s(q_k)$ is estimated standard deviation from a sample of n readings unless the repeatability of the EUT is particularly poor, and a coverage factor of $k = 2$ will ensure that the level of confidence will be approximately 95%, therefore:

$$s(q_k) = \sqrt{\frac{1}{(n-1)} \sum_{k=1}^n (q_k - \bar{q})^2}$$

$$U = 2 U_c(y) = 2 \times \pm 1.6 \text{ dB} = \pm 3.2 \text{ dB}$$

Notes:

- 1.1 Uncertainties for the antenna and cable were estimated, based on a normal probability distribution with $k = 2$.
- 1.2 The receiver uncertainty was obtained from the manufacturer's specification for which a rectangular distribution was assumed.
- 1.3 The antenna factor uncertainty does not take account of antenna directivity.
- 1.4 The antenna factor varies with height and since the height was not always the same in use as when the antenna was calibrated an additional uncertainty is added.
- 1.5 The uncertainty in the measurement distance is relatively small but has some effect on the received signal strength. The increase in measurement distance as the antenna height is increased is an inevitable consequence of the test method and is therefore not considered a contribution to uncertainty.
- 1.6 Site imperfections are difficult to quantify but may include the following contributions:
 - Unwanted reflections from adjacent objects.
 - Ground plane imperfections: reflection coefficient, flatness, and edge effects.
 - Losses or reflections from "transparent" cabins for the EUT or site coverings.
 - Earth currents in antenna cable (mainly effect biconical antennas).

The specified limits for the difference between measured site attenuation and the theoretical value (± 4 dB) were not included in total since the measurement of site attenuation includes uncertainty contributions already allowed for in this budget, such as antenna factor.

Conducted Measurements Uncertainty Calculation

Measurement of conducted emissions over the frequency range 9 kHz to 30 MHz includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Receiver specification	rectangular	±1.5
LISN coupling specification	rectangular	±1.5
Cable and input attenuator calibration	normal (k=2)	±0.5

Combined standard uncertainty $u_c(y)$ is

$$U_c(y) = \pm \sqrt{\left[\frac{0.5}{2}\right]^2 + \frac{1.5^2 + 1.5^2}{3}}$$

$$U_c(y) = \pm 1.2 \text{ dB}$$

As with radiated field strength uncertainty, it is probable that $u_c(y) / s(q_k) > 3$ and a coverage factor of $k = 2$ will suffice, therefore:

$$U = 2 U_c(y) = 2 \times \pm 1.2 \text{ dB} = \pm 2.4 \text{ dB}$$



Annex B Test Equipment List For Rogers Labs, Inc.

The test equipment used is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

List of Test Equipment	Calibration Date
Oscilloscope Scope: Tektronix 2230	2/08
Wattmeter: Bird 43 with Load Bird 8085	2/08
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/08
H/V Power Supply: Fluke Model: 408B (SN: 573)	2/08
R.F. Generator: HP 606A	2/08
R.F. Generator: HP 8614A	2/08
R.F. Generator: HP 8640B	2/08
Spectrum Analyzer: HP 8562A,	2/08
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
HP Adapters: 11518, 11519, 11520	
Spectrum Analyzer: HP 8591EM	5/07
Frequency Counter: Leader LDC825	2/08
Antenna: EMCO Biconilog Model: 3143	5/07
Antenna: EMCO Log Periodic Model: 3147	10/07
Antenna: Antenna Research Biconical Model: BCD 235	10/07
Antenna: EMCO Dipole Set 3121C	2/08
Antenna: C.D. B-101	2/08
Antenna: Solar 9229-1 & 9230-1	2/08
Antenna: EMCO 6509	2/08
Audio Oscillator: H.P. 201CD	2/08
R.F. Power Amp 65W Model: 470-A-1010	2/08
R.F. Power Amp 50W M185- 10-501	2/08
R.F. PreAmp CPPA-102	2/08
LISN 50 µHy/50 ohm/0.1 µf	10/07
LISN Compliance Eng. 240/20	2/08
LISN Fischer Custom Communications FCC-LISN-50-16-2-08	2/08
Peavey Power Amp Model: IPS 801	2/08
Power Amp A.R. Model: 10W 1010M7	2/08
Power Amp EIN Model: A301	2/08
ELGAR Model: 1751	2/08
ELGAR Model: TG 704A-3D	2/08
ESD Test Set 2010i	2/08
Fast Transient Burst Generator Model: EFT/B-101	2/08
Current Probe: Singer CP-105	2/08
Current Probe: Solar 9108-1N	2/08
Field Intensity Meter: EFM-018	2/08
KEYTEK Ecat Surge Generator	2/08
Shielded Room 5 M x 3 M x 3.0 M	



Annex C Qualifications

SCOT D. ROGERS, ENGINEER

ROGERS LABS, INC.

Mr. Rogers has approximately 17 years experience in the field of electronics. Six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

POSITIONS HELD:

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

EDUCATIONAL BACKGROUND:

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University
- 2) Bachelor of Science Degree in Business Administration Kansas State University
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



NVLAP Lab Code 200087-0

Annex D FCC Test Site Registration Letter

FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

May 16, 2006

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053

Attention: Scot Rogers


Re: Measurement facility located at Louisburg
3 & 10 meter site
Date of Renewal: May 16, 2006

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

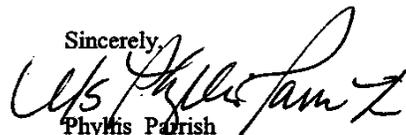

Phyllis Parrish
Information Technician

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: DC30 GPN: 011-01902-00
Test #: 080306
Test to: FCC Parts 2, 15, and 95
File: TstRpt DC30 95

MURS / 2.4 GHz Transmitter
FCC ID: IPH-01393
SN: #2/29
Page 27 of 27
Date: April 1, 2008