

FCC 47 CFR PART 15 SUBPART C

Product Type : Low Power Transmitter
Applicant : Garmin International Inc.
Address : 1200 E., 151st. Street, Olathe, Kansas, United States, 66062
Trade Name : GARMIN
Model Number : M3BPGL00
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2012
Canada RSS-210 ISSUE 8: Dec., 2010
Canada RSS-Gen ISSUE 3: Dec., 2010
ANSI C63.4:2009
Receive Date : Oct. 23, 2013
Test Period : Oct. 31~Nov.16, 2013
Issue Date : Nov. 28, 2013

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Nov. 20, 2013	Initial Issue	
01	Nov. 28, 2013	Add accessories list.	Joyce Liao

Verification of Compliance

Issued Date: 11/28/2013

Product Type : Low Power Transmitter
Applicant : Garmin International Inc.
Address : 1200 E., 151st. Street, Olathe, Kansas, United States, 66062
Trade Name : GARMIN
Model Number : M3BPGL00
FCC ID : IPH-02261B
EUT Rated Voltage : DC 10–32V, 3A
Test Voltage : DC 24V
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2012
Canada RSS-210 ISSUE 8: Dec., 2010
Canada RSS-Gen ISSUE 3: Dec., 2010
ANSI C63.4:2009

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.

Approved By : Cran Yang Reviewed By : Fly Lu
(Manager) (Cran Yang) (Testing Engineer) (Fly Lu)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation.....	8
3.2.	EUT Exercise Software	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment	9
4	Conducted Emission Measurement	10
4.1.	Limit	10
4.2.	Test Instruments	10
4.3.	Test Setup.....	10
4.4.	Test Procedure	11
4.5.	Test Result.....	11
5	Radiated Emission Measurement.....	12
5.1.	Limit	12
5.2.	Test Instruments	12
5.3.	Setup	13
5.4.	Test Procedure	14
5.5.	Test Result.....	16
6	Maximum Conducted Output Power Measurement.....	21
6.1.	Limit	21
6.2.	Test Setup.....	21
6.3.	Test Instruments	21
6.4.	Test Procedure	21
6.5.	Test Result.....	22
7	6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement	23
7.1.	Limit	23
7.2.	Test Setup.....	23
7.3.	Test Instruments	23
7.4.	Test Procedure	23
7.5.	Test Result.....	24
7.6.	Test Graphs	25
8	Maximum Power Density Measurement	27
8.1.	Limit	27
8.2.	Test Setup.....	27
8.3.	Test Instruments	27
8.4.	Test Procedure	27
8.5.	Test Result.....	28
8.6.	Test Graphs	29

9	Out of Band Conducted Emissions Measurement	31
9.1.	Limit	31
9.2.	Test Setup.....	31
9.3.	Test Instruments	31
9.4.	Test Procedure	31
9.5.	Test Graphs	32
10	Band Edges Measurement	38
10.1.	Limit	38
10.2.	Test Setup.....	38
10.3.	Test Instruments	38
10.4.	Test Procedure	39
10.5.	Test Result.....	40
11	Antenna Measurement.....	48
11.1.	Limit	48
11.2.	Antenna Connector Construction	48

1 General Information

1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	N/A	Not applicable, This device use DC power source.
-----	6	Receiver Radiated Emissions	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	A8.4	Max. Output Power	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	-----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	-----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	A8.5	Band Edge Measurement	PASS	-----
15.247(c)	A8.5	Occupied Bandwidth Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range		Uncertainty (dB)
Conducted Emission	9kHz ~ 30MHz		± 2.02
Radiated Emission	30MHz ~ 1000MHz	Horizontal	± 3.98
		Vertical	± 3.62
	1000MHz ~ 18000MHz	Horizontal	± 3.11
		Vertical	± 3.07
	18000MHz ~ 40000MHz	Horizontal	± 3.66
		Vertical	± 3.54

2 EUT Description

Product Type	Low Power Transmitter
Trade Name	GARMIN
Model Number	M3BPGL00
Applicant	Garmin International Inc. 1200 E., 151st. Street, Olathe, Kansas, United States, 66062
Manufacturer	Garmin Corporation No.68, Zhangshu 2nd Rd., Xizhi Dist., New Taipei City 221, Taiwan
FCC ID	IPH-02261B
Frequency Range	IEEE 802.11b / 802.11g: 2412 ~ 2462 MHz
Modulation Type	IEEE 802.11b:DSSS IEEE 802.11g:DSSS + OFDM
Antenna Type	PIFA Antenna
Antenna Gain	-0.64 dBi
RF Output Power	IEEE 802.11b: 0.142 W / 21.53 dBm IEEE 802.11g: 0.247 W / 23.93 dBm
99 % Occupied Bandwidth	IEEE 802.11b: 13.91 MHz IEEE 802.11g: 16.46 MHz
Emission Designator	IEEE 802.11b: 13M9G1D IEEE 802.11g: 16M5G1D

Accessories list:

Accessories	Trade Name	Model Number
Garmin GMS 10 Network Port Expander	Garmin	011-01024-00
Transducer	Garmin	011-00569-38
External antenna	Garmin	GA38 011-03201-00

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: IEEE 802.11b Link Mode
Mode 3: IEEE 802.11g Link Mode
Mode 4: Receiver Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.


IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

3.2. EUT Exercise Software

1. Setup the EUT shown on 3.3.
2. Turn on the power of all equipment.
3. Turn on Wi-Fi function link to AP.
4. EUT run test program.

3.3. Configuration of Test System Details

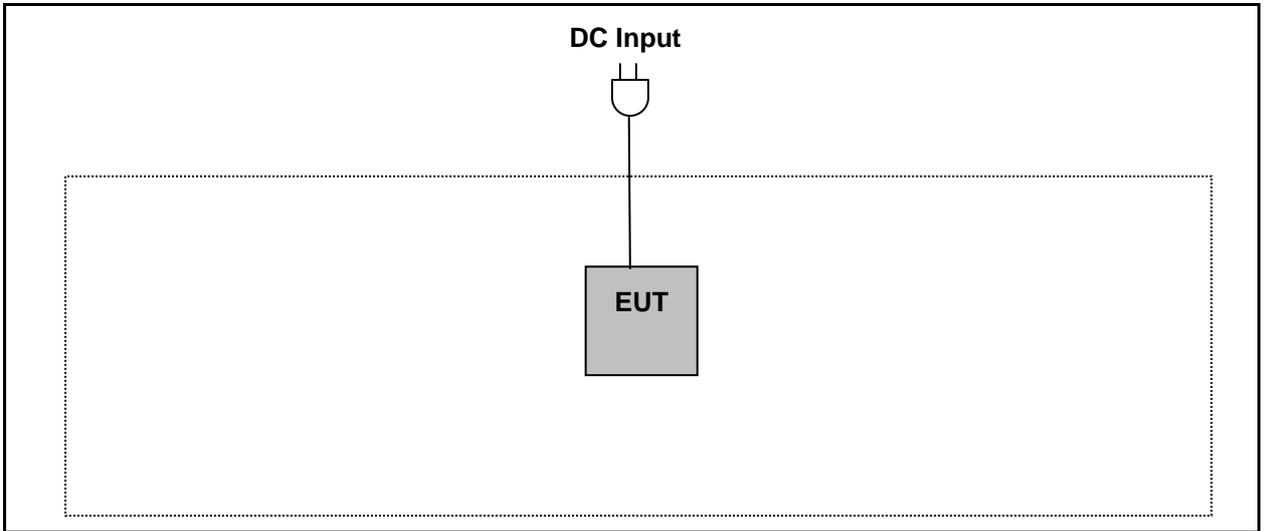

3.4. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/06/2013	(1)
LISN	R&S	ENV216	101040	03/04/2013	(1)
LISN	R&S	ENV216	101041	03/04/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

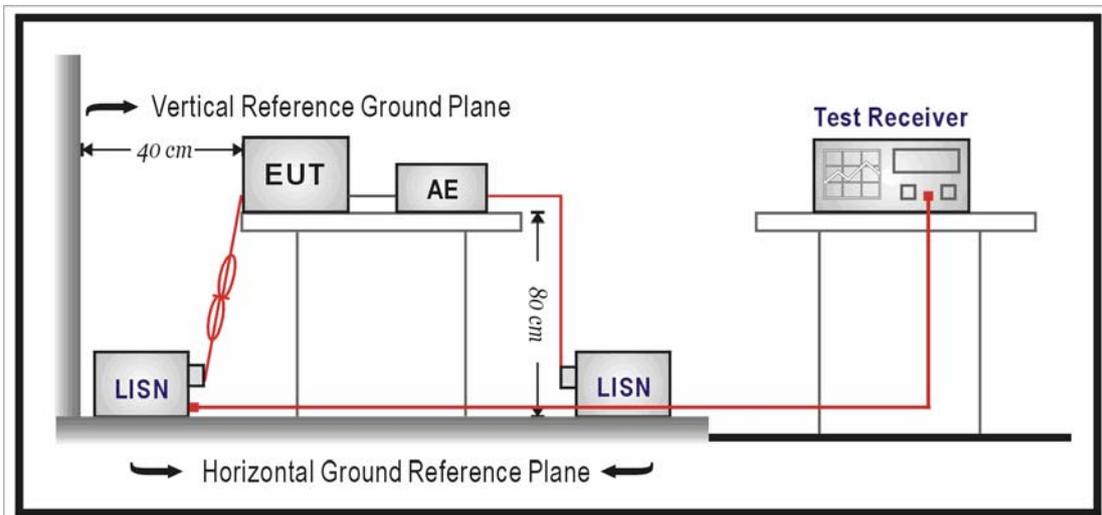

4.4. Test Procedure

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

4.5. Test Result

Not applicable, This device use DC power source.

5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/21/2013	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/21/2013	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2013	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2013	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/16/2013	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/10/2013	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/13/2013	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2012	(3)
Test Site	ATL	TE01	888001	08/28/2013	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


Note: N.C.R. = No Calibration Request.

5.3. Setup

Below 1GHz

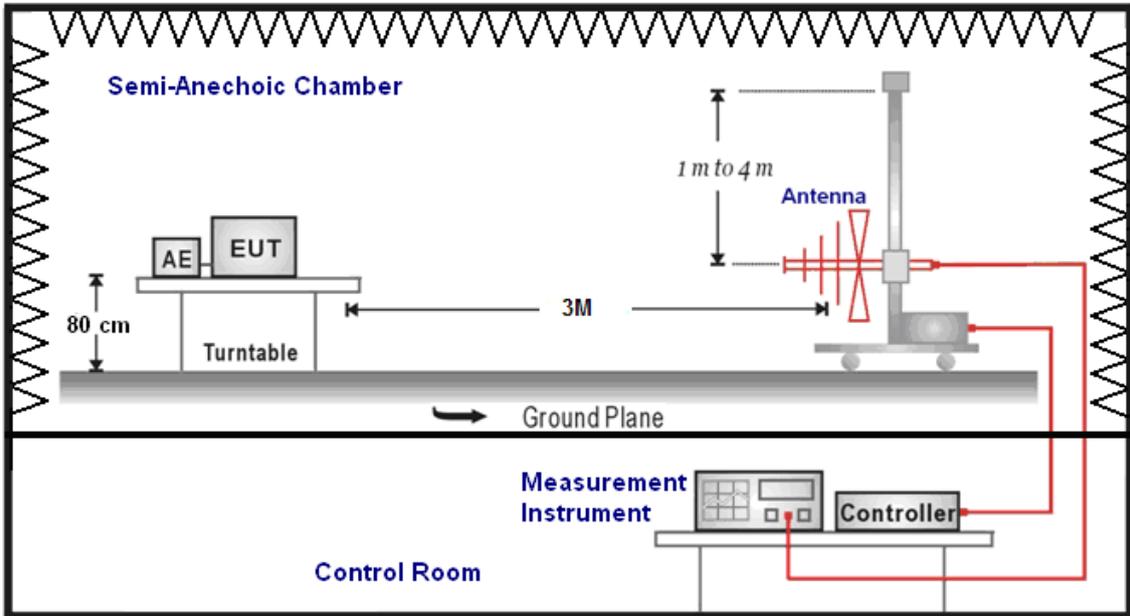

Above 1GHz

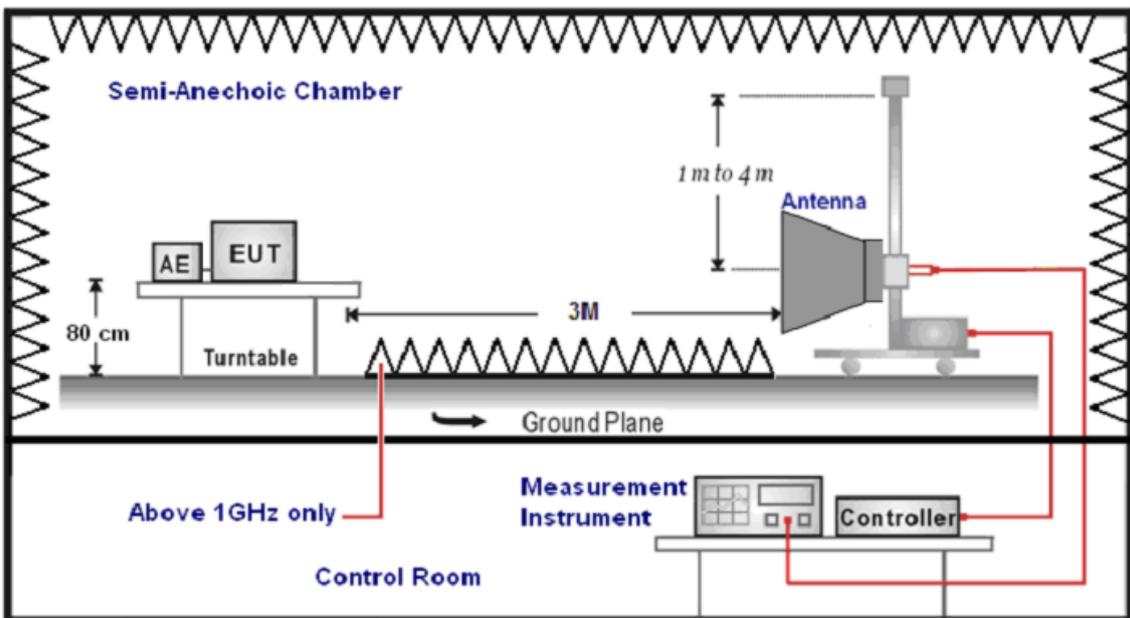

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5. Test Result

Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 24V
Model Number:	M3BPGL00	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	11/01/2013
		Test By:	Fly Lu

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
107.5000	45.16	-14.23	30.93	43.50	-12.57	QP	H
230.5000	49.89	-12.64	37.25	46.00	-8.75	QP	H
299.5000	49.90	-10.54	39.36	46.00	-6.64	QP	H
537.5000	45.16	-6.61	38.55	46.00	-7.45	QP	H
653.0000	44.31	-4.04	40.27	46.00	-5.73	QP	H
729.5000	42.12	-3.00	39.12	46.00	-6.88	QP	H
107.5000	49.20	-14.23	34.97	43.50	-8.53	QP	V
173.0000	50.72	-16.22	34.50	43.50	-9.00	QP	V
307.0000	48.53	-10.30	38.23	46.00	-7.77	QP	V
499.0000	46.25	-6.81	39.44	46.00	-6.56	QP	V
691.0000	41.45	-3.77	37.68	46.00	-8.32	QP	V
921.5000	39.49	0.74	40.23	46.00	-5.77	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 24V
Model Number:	M3BPGL00	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	11/01/2013
Frequency:	2412MHz	Test By:	Fly Lu

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2897.000	36.31	5.64	41.95	74.00	-32.05	peak	H
4563.000	34.51	11.05	45.56	74.00	-28.44	peak	H
6383.000	33.86	17.06	50.92	74.00	-23.08	peak	H
2890.000	35.64	5.63	41.27	74.00	-32.73	peak	V
4549.000	33.53	11.01	44.54	74.00	-29.46	peak	V
6593.000	32.11	17.87	49.98	74.00	-24.02	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 24V
Model Number:	M3BPGL00	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	10/31/2013
Frequency:	2437MHz	Test By:	Fly Lu

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3058.000	37.49	6.04	43.53	74.00	-30.47	peak	H
4570.000	35.08	11.06	46.14	74.00	-27.86	peak	H
6383.000	32.93	17.06	49.99	74.00	-24.01	peak	H
2918.000	37.11	5.70	42.81	74.00	-31.19	peak	V
4563.000	35.16	11.05	46.21	74.00	-27.79	peak	V
6425.000	32.55	17.18	49.73	74.00	-24.27	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	DC 24V		
Model Number:	M3BPGL00			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	10/31/2013		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2925.000	36.30	5.72	42.02	74.00	-31.98	peak	H
4549.000	34.36	11.01	45.37	74.00	-28.63	peak	H
6390.000	32.78	17.08	49.86	74.00	-24.14	peak	H
2953.000	37.87	5.79	43.66	74.00	-30.34	peak	V
4570.000	33.85	11.06	44.91	74.00	-29.09	peak	V
6418.000	33.79	17.16	50.95	74.00	-23.05	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	DC 24V		
Model Number:	M3BPGL00			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	10/31/2013		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2981.000	37.62	5.86	43.48	74.00	-30.52	peak	H
4598.000	35.21	11.14	46.35	74.00	-27.65	peak	H
6341.000	33.12	16.92	50.04	74.00	-23.96	peak	H
2925.000	38.07	5.72	43.79	74.00	-30.21	peak	V
4577.000	34.56	11.07	45.63	74.00	-28.37	peak	V
6425.000	32.80	17.18	49.98	74.00	-24.02	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	DC 24V		
Model Number:	M3BPGL00			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	10/31/2013		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3002.000	36.20	5.91	42.11	74.00	-31.89	peak	H
4598.000	35.54	11.14	46.68	74.00	-27.32	peak	H
6369.000	32.91	17.00	49.91	74.00	-24.09	peak	H
2967.000	36.68	5.82	42.50	74.00	-31.50	peak	V
4577.000	35.71	11.07	46.78	74.00	-27.22	peak	V
6418.000	32.53	17.16	49.69	74.00	-24.31	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	DC 24V		
Model Number:	M3BPGL00			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	10/31/2013		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2953.000	36.52	5.79	42.31	74.00	-31.69	peak	H
4605.000	36.32	11.15	47.47	74.00	-26.53	peak	H
6446.000	33.69	17.24	50.93	74.00	-23.07	peak	H
3023.000	36.80	5.96	42.76	74.00	-31.24	peak	V
4605.000	34.08	11.15	45.23	74.00	-28.77	peak	V
6439.000	33.14	17.22	50.36	74.00	-23.64	peak	V


Standard:	RSS-Gen	Test Distance:	3m					
Test item:	Radiated Emission	Power:	DC 24V					
Model Number:	M3BPGL00	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH					
Mode:	4	Date:	10/31/2013					
Modulation:	IEEE 802.11b	Test By:	Fly Lu					
Frequency:	2437MHz							
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/	Peak (dBuV/m)	AVG. (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2911.000	36.13	5.68	41.81	74.00	54.00	-32.19	peak	H
4598.000	34.88	11.14	46.02	74.00	54.00	-27.98	peak	H
6362.000	33.28	16.99	50.27	74.00	54.00	-23.73	peak	H
2897.000	35.97	5.64	41.61	74.00	54.00	-32.39	peak	V
4577.000	35.88	11.07	46.95	74.00	54.00	-27.05	peak	V
6425.000	32.64	17.18	49.82	74.00	54.00	-24.18	peak	V

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

6.2. Test Setup

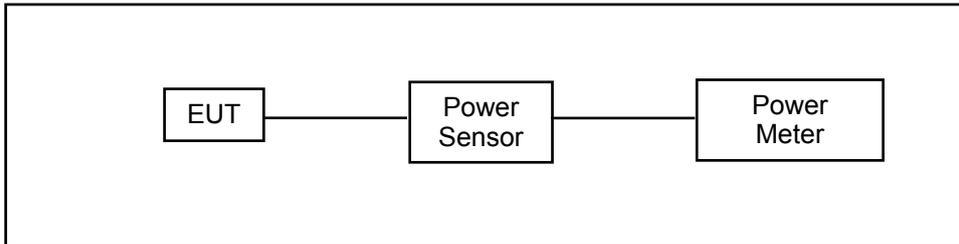

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/19/2012	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/19/2012	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result

Model Number	M3BPGL00					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 2: IEEE 802.11b Link Mode					
Date of Test	10/31/2013			Test Site	TE05	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	1M	17.41	0.055	20.71	0.118	< 30
2437		18.07	0.064	21.02	0.126	< 30
2462		18.57	0.072	21.53	0.142	< 30
2437	2M	17.68	0.059	20.99	0.126	< 30
2437	5.5M	16.46	0.044	20.79	0.120	< 30
2437	11M	15.24	0.033	20.76	0.119	< 30

Model Number	M3BPGL00					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 3: IEEE 802.11g Link Mode					
Date of Test	10/31/2013			Test Site	TE05	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	6M	14.53	0.028	23.93	0.247	< 30
2437		15.06	0.032	23.14	0.206	< 30
2462		15.53	0.036	23.26	0.212	< 30
2437	9M	14.36	0.027	23.03	0.201	< 30
2437	12M	11.08	0.013	23.00	0.200	< 30
2437	18M	9.66	0.009	22.98	0.199	< 30
2437	24M	6.76	0.005	22.94	0.197	< 30
2437	36M	5.44	0.003	22.82	0.191	< 30
2437	48M	3.00	0.002	22.69	0.186	< 30
2437	54M	2.66	0.002	22.57	0.181	< 30


7 6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

7.2. Test Setup

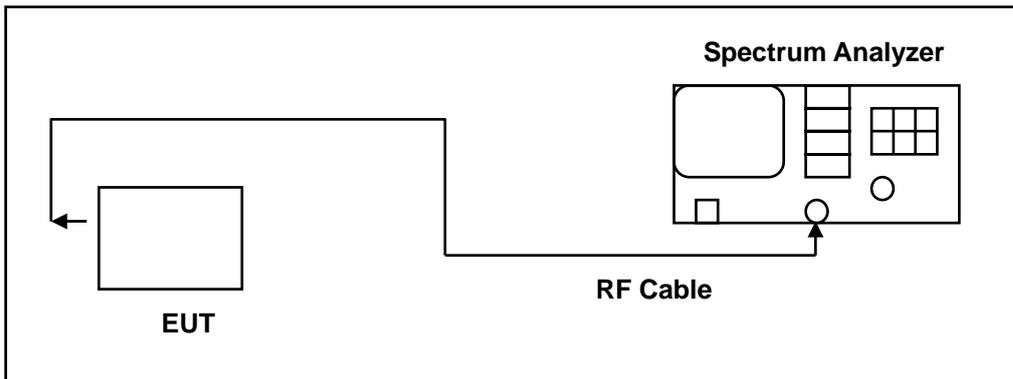

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2012 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

99 % Occupied Bandwidth: The transmitter shall be operated at its maximum carrier power measured under normal test conditions.


The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

7.5. Test Result

Model Number	M3BPGL00		
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	10/31/2013	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)
2412	8.617	13.8430	> 0.500
2437	9.122	13.9131	> 0.500
2462	9.133	13.9047	> 0.500

Model Number	M3BPGL00		
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 2: IEEE 802.11g Link Mode		
Date of Test	10/31/2013	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)
2412	14.173	16.3954	> 0.500
2437	15.147	16.4125	> 0.500
2462	15.412	16.4550	> 0.500

7.6. Test Graphs

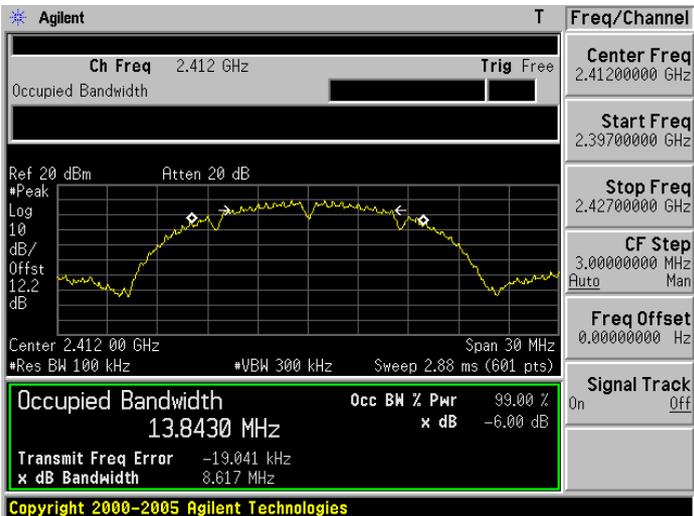Mode 2: IEEE 802.11b Link Mode	
2412	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 12.2 dB</p> <p>Center 2.412 00 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)</p> <p>Occupied Bandwidth 13.8430 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -19.041 kHz</p> <p>x dB Bandwidth 8.617 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 12.2 dB</p> <p>Center 2.437 00 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)</p> <p>Occupied Bandwidth 13.9131 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -19.907 kHz</p> <p>x dB Bandwidth 9.122 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 12.2 dB</p> <p>Center 2.462 00 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)</p> <p>Occupied Bandwidth 13.9047 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -7.337 kHz</p> <p>x dB Bandwidth 9.133 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>


Mode 3: IEEE 802.11g Link Mode	
2412	<p>Agilent T Freq/Channel</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 12.2 dB</p> <p>Center 2.412 00 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)</p> <p>Occupied Bandwidth 16.3954 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 13.788 kHz</p> <p>x dB Bandwidth 14.173 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	<p>Agilent T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 12.2 dB</p> <p>Center 2.437 00 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)</p> <p>Occupied Bandwidth 16.4125 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 1.125 kHz</p> <p>x dB Bandwidth 15.147 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	<p>Agilent T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 12.2 dB</p> <p>Center 2.462 00 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)</p> <p>Occupied Bandwidth 16.4550 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -7.675 kHz</p> <p>x dB Bandwidth 15.412 MHz</p> <p>Copyright 2000-2005 Agilent Technologies</p>

8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

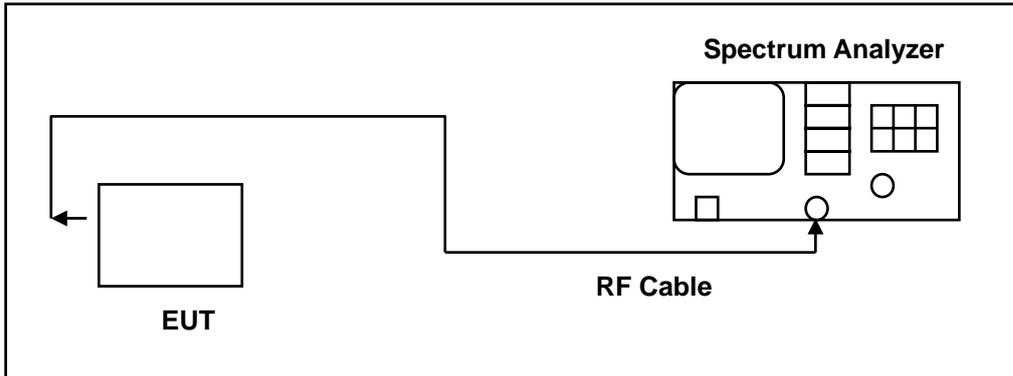

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW ≥ 3 RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.5. Test Result

Model Number	M3BPGL00		
Test Item	Maximum Power Density		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	10/31/2013	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2412	-5.62		< 8
2437	-4.10		< 8
2462	-3.04		< 8

Model Number	M3BPGL00		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	10/31/2013	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2412	-8.99		< 8
2437	-9.26		< 8
2462	-9.51		< 8

8.6. Test Graphs

Mode 2: IEEE 802.11b Link Mode	
2412	<p>Agilent T Freq/Channel</p> <p>Ref 15 dBm Atten 20 dB Mkr1 2.413 00 GHz #Peak -5.62 dBm Log 10 dB/ Offst 12.2 dB DI 8.0 dBm LgAv</p> <p>M1 S2 S3 FS</p> <p>Ⓔ(f): FTun Swp</p> <p>Center 2.412 00 GHz Span 14 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 1.476 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Center Freq 2.41200000 GHz Start Freq 2.40500000 GHz Stop Freq 2.41900000 GHz CF Step 1.40000000 MHz (Auto Man) Freq Offset 0.00000000 Hz Signal Track On Off</p>
2437	<p>Agilent T Freq/Channel</p> <p>Ref 15 dBm Atten 20 dB Mkr1 2.437 86 GHz #Peak -4.10 dBm Log 10 dB/ Offst 12.2 dB DI 8.0 dBm LgAv</p> <p>M1 S2 S3 FS</p> <p>Ⓔ(f): FTun Swp</p> <p>Center 2.437 00 GHz Span 14 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 1.476 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Center Freq 2.43700000 GHz Start Freq 2.43000000 GHz Stop Freq 2.44400000 GHz CF Step 1.40000000 MHz (Auto Man) Freq Offset 0.00000000 Hz Signal Track On Off</p>
2462	<p>Agilent T Freq/Channel</p> <p>Ref 15 dBm Atten 20 dB Mkr1 2.461 30 GHz #Peak -3.04 dBm Log 10 dB/ Offst 12.2 dB DI 8.0 dBm LgAv</p> <p>M1 S2 S3 FS</p> <p>Ⓔ(f): FTun Swp</p> <p>Center 2.462 00 GHz Span 14 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 1.476 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Center Freq 2.46200000 GHz Start Freq 2.45500000 GHz Stop Freq 2.46900000 GHz CF Step 1.40000000 MHz (Auto Man) Freq Offset 0.00000000 Hz Signal Track On Off</p>


Mode 3: IEEE 802.11g Link Mode	
2412	<p>Agilent T Freq/Channel</p> <p>Ref 15 dBm Atten 20 dB Mkr1 2.412 92 GHz #Peak -8.99 dBm Center Freq 2.41200000 GHz Start Freq 2.40000000 GHz Stop Freq 2.42400000 GHz CF Step 2.40000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p> <p>Center 2.412 00 GHz Span 24 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.531 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	<p>Agilent T Freq/Channel</p> <p>Ref 15 dBm Atten 20 dB Mkr1 2.436 04 GHz #Peak -9.26 dBm Center Freq 2.43700000 GHz Start Freq 2.42500000 GHz Stop Freq 2.44900000 GHz CF Step 2.40000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p> <p>Center 2.437 00 GHz Span 24 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.531 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	<p>Agilent T Freq/Channel</p> <p>Ref 15 dBm Atten 20 dB Mkr1 2.467 56 GHz #Peak -9.51 dBm Center Freq 2.46200000 GHz Start Freq 2.45000000 GHz Stop Freq 2.47400000 GHz CF Step 2.40000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p> <p>Center 2.462 00 GHz Span 24 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.531 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>

9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

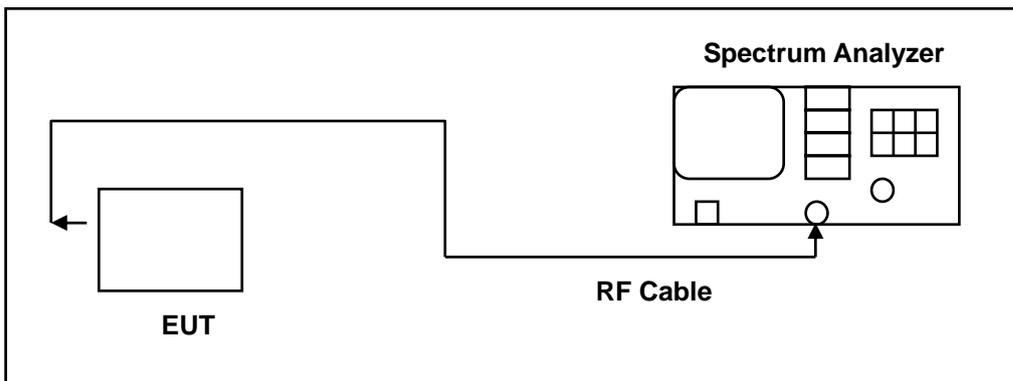

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/11/2013	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels (Channel 1, 6, 11)

9.5. Test Graphs

Reference level




Mode 2: IEEE 802.11b Link Mode	
2412	<p>Agilent T Freq/Channel</p> <p>Ref 20 dBm Atten 20 dB Mkr1 2.412 51 GHz 9.57 dBm</p> <p>#Peak 2.41200000 GHz</p> <p>Log 10 dB/Offst 12.2 dB</p> <p>LgAv</p> <p>M1 S2 S3 FS</p> <p>£(f): FTun Swp</p> <p>Center 2.412 00 GHz Span 14 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.36 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.40500000 GHz</p> <p>Stop Freq 2.41900000 GHz</p> <p>CF Step 1.40000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	<p>Agilent T Freq/Channel</p> <p>Ref 20 dBm Atten 20 dB Mkr1 2.438 00 GHz 9.98 dBm</p> <p>#Peak 2.43700000 GHz</p> <p>Log 10 dB/Offst 12.2 dB</p> <p>LgAv</p> <p>M1 S2 S3 FC</p> <p>£(f): FTun Swp</p> <p>Center 2.437 00 GHz Span 14 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.36 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.43000000 GHz</p> <p>Stop Freq 2.44400000 GHz</p> <p>CF Step 1.40000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	<p>Agilent R T Freq/Channel</p> <p>Ref 20 dBm Atten 20 dB Mkr1 2.463 00 GHz 10.46 dBm</p> <p>#Peak 2.46200000 GHz</p> <p>Log 10 dB/Offst 12.2 dB</p> <p>LgAv</p> <p>M1 S2 S3 FS</p> <p>£(f): FTun Swp</p> <p>Center 2.462 00 GHz Span 14 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.36 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.45500000 GHz</p> <p>Stop Freq 2.46900000 GHz</p> <p>CF Step 1.40000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11g Link Mode

2412	<p>Agilent T Freq/Channel</p> <p>Ref 20 dBm Atten 20 dB Mkr1 2.413 28 GHz #Peak 5.67 dBm Log 10 dB/Offst 12.2 dB LgAv</p> <p>M1 S2 S3 FS</p> <p>Ⓔ(f): FTun Swp</p> <p>Center 2.412 00 GHz Span 24 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.32 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Center Freq 2.41200000 GHz Start Freq 2.40000000 GHz Stop Freq 2.42400000 GHz CF Step 2.40000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>
2437	<p>Agilent T Freq/Channel</p> <p>Ref 20 dBm Atten 20 dB Mkr1 2.439 52 GHz #Peak 6.19 dBm Log 10 dB/Offst 12.2 dB LgAv</p> <p>M1 S2 S3 FS</p> <p>Ⓔ(f): FTun Swp</p> <p>Center 2.437 00 GHz Span 24 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.32 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Center Freq 2.43700000 GHz Start Freq 2.42500000 GHz Stop Freq 2.44900000 GHz CF Step 2.40000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>
2462	<p>Agilent T Freq/Channel</p> <p>Ref 20 dBm Atten 20 dB Mkr1 2.463 28 GHz #Peak 7.34 dBm Log 10 dB/Offst 12.2 dB LgAv</p> <p>M1 S2 S3 FS</p> <p>Ⓔ(f): FTun Swp</p> <p>Center 2.462 00 GHz Span 24 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.32 ms (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Center Freq 2.46200000 GHz Start Freq 2.45000000 GHz Stop Freq 2.47400000 GHz CF Step 2.40000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>

Out of Band Conducted Emissions

Mode 2: IEEE 802.11b Link Mode

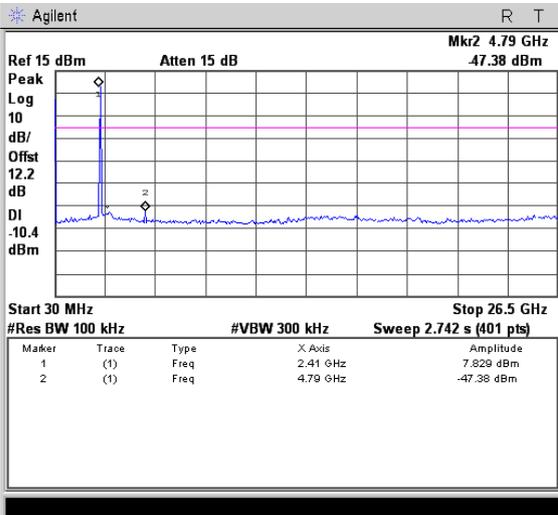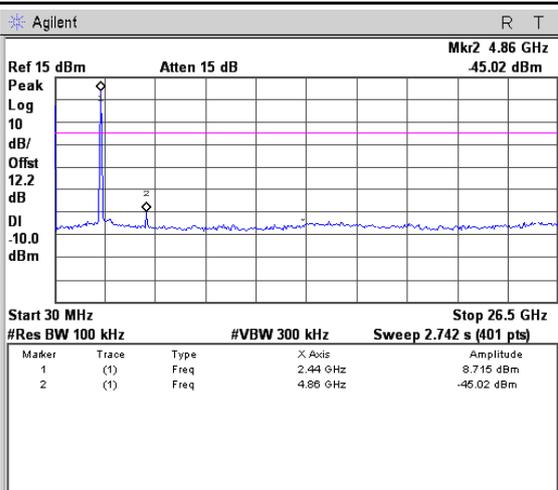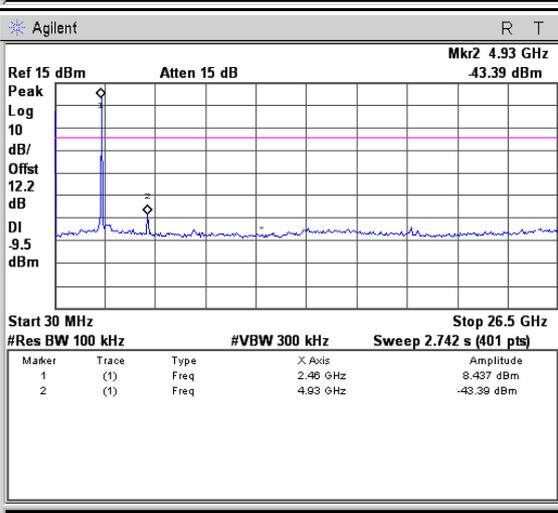
<p>2412</p>	 <table border="1" data-bbox="639 712 1197 891"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.41 GHz</td> <td>7.829 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>4.79 GHz</td> <td>-47.38 dBm</td> </tr> </tbody> </table>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.41 GHz	7.829 dBm	2	(1)	Freq	4.79 GHz	-47.38 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.41 GHz	7.829 dBm												
2	(1)	Freq	4.79 GHz	-47.38 dBm												
<p>2437</p>	 <table border="1" data-bbox="639 1234 1197 1388"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.44 GHz</td> <td>8.715 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>4.86 GHz</td> <td>-45.02 dBm</td> </tr> </tbody> </table>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.44 GHz	8.715 dBm	2	(1)	Freq	4.86 GHz	-45.02 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.44 GHz	8.715 dBm												
2	(1)	Freq	4.86 GHz	-45.02 dBm												
<p>2462</p>	 <table border="1" data-bbox="639 1733 1197 1933"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.46 GHz</td> <td>8.437 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>4.93 GHz</td> <td>-43.39 dBm</td> </tr> </tbody> </table>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.46 GHz	8.437 dBm	2	(1)	Freq	4.93 GHz	-43.39 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.46 GHz	8.437 dBm												
2	(1)	Freq	4.93 GHz	-43.39 dBm												

Mode 3: IEEE 802.11g Link Mode

<p>2412</p>	<p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.41 GHz 1.608 dBm</p> <p>Peak Log 10 dB/Offst 12.2 dB DI -14.3 dBm</p> <p>Start 30 MHz Stop 26.5 GHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.41 GHz</td> <td>1.608 dBm</td> </tr> </tbody> </table> <p>Freq/Channel</p> <p>Center Freq 13.2650000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.5000000 GHz</p> <p>CF Step 2.64700000 GHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.41 GHz	1.608 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.41 GHz	1.608 dBm							
<p>2437</p>	<p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.44 GHz 1.744 dBm</p> <p>Peak Log 10 dB/Offst 12.2 dB DI -13.8 dBm</p> <p>Start 30 MHz Stop 26.5 GHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.44 GHz</td> <td>1.744 dBm</td> </tr> </tbody> </table> <p>Freq/Channel</p> <p>Center Freq 13.2650000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.5000000 GHz</p> <p>CF Step 2.64700000 GHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.44 GHz	1.744 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.44 GHz	1.744 dBm							
<p>2462</p>	<p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.46 GHz 2.584 dBm</p> <p>Peak Log 10 dB/Offst 12.2 dB DI -12.7 dBm</p> <p>Start 30 MHz Stop 26.5 GHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.46 GHz</td> <td>2.584 dBm</td> </tr> </tbody> </table> <p>Freq/Channel</p> <p>Center Freq 13.2650000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.5000000 GHz</p> <p>CF Step 2.64700000 GHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.46 GHz	2.584 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.46 GHz	2.584 dBm							


Conducted Band Edge

Mode 2: IEEE 802.11b Link Mode

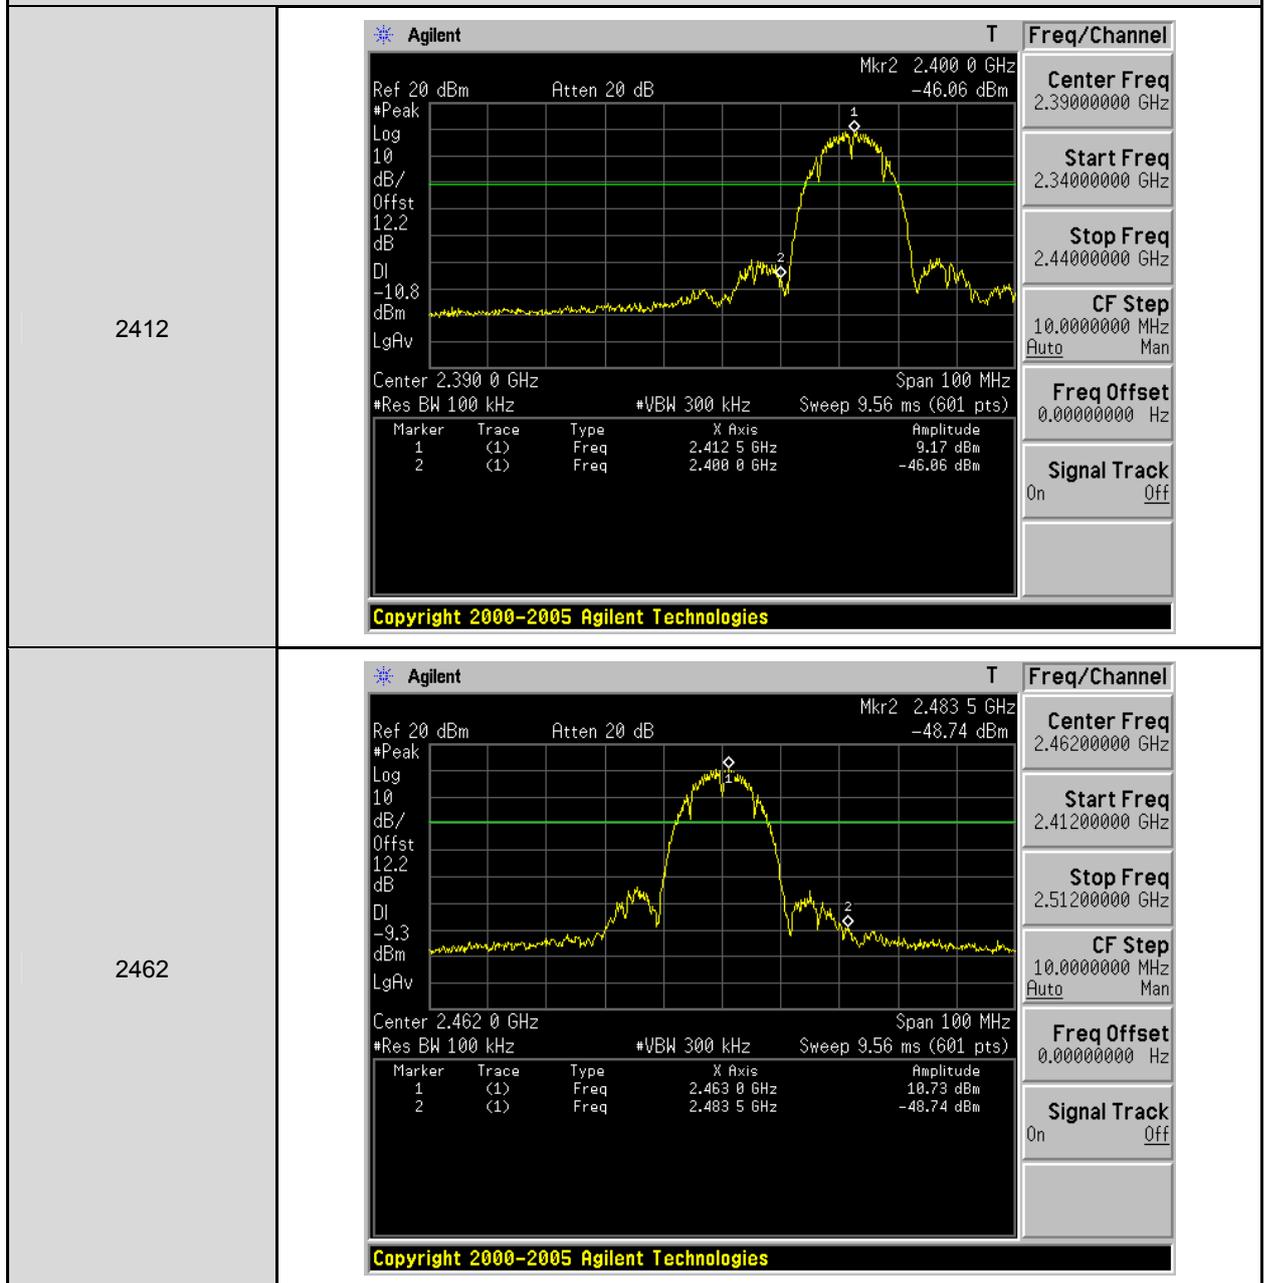


Mode 3: IEEE 802.11g Link Mode

2412

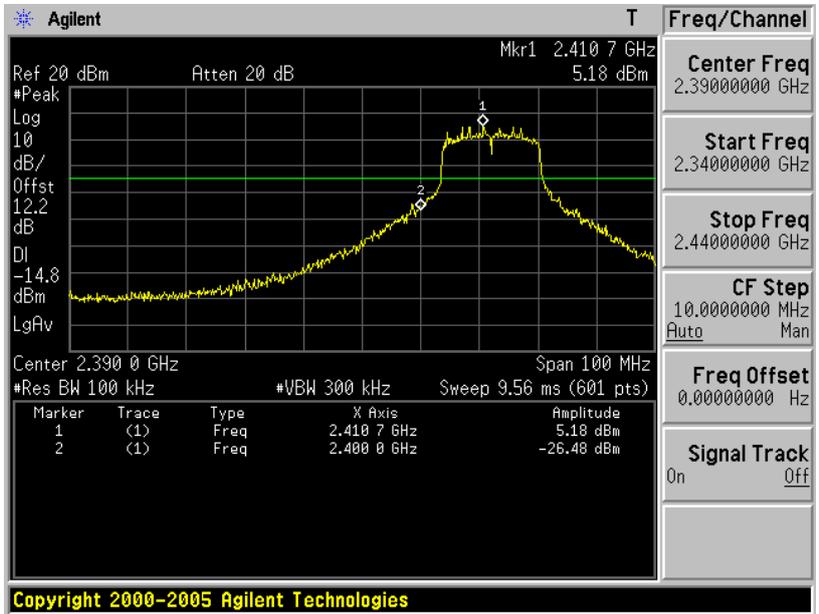

2462

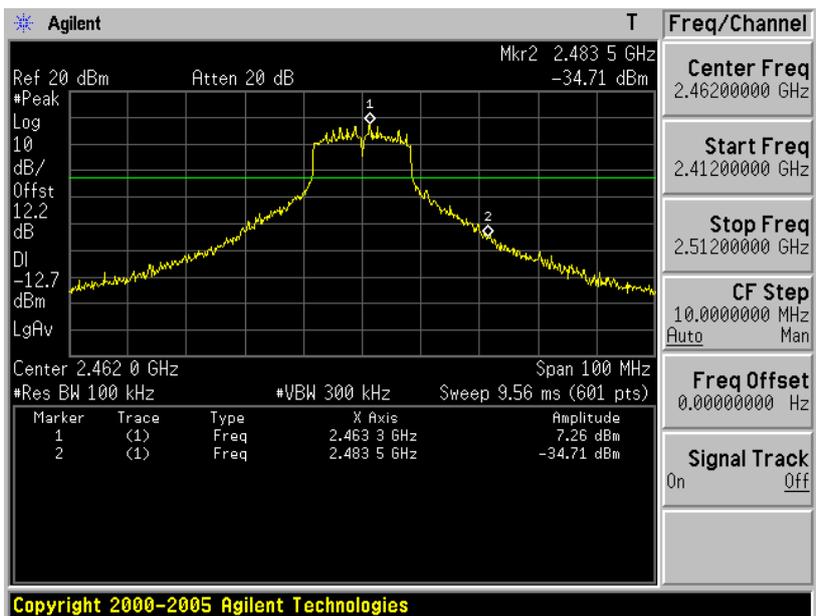


10 Band Edges Measurement

10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

10.2.Test Setup

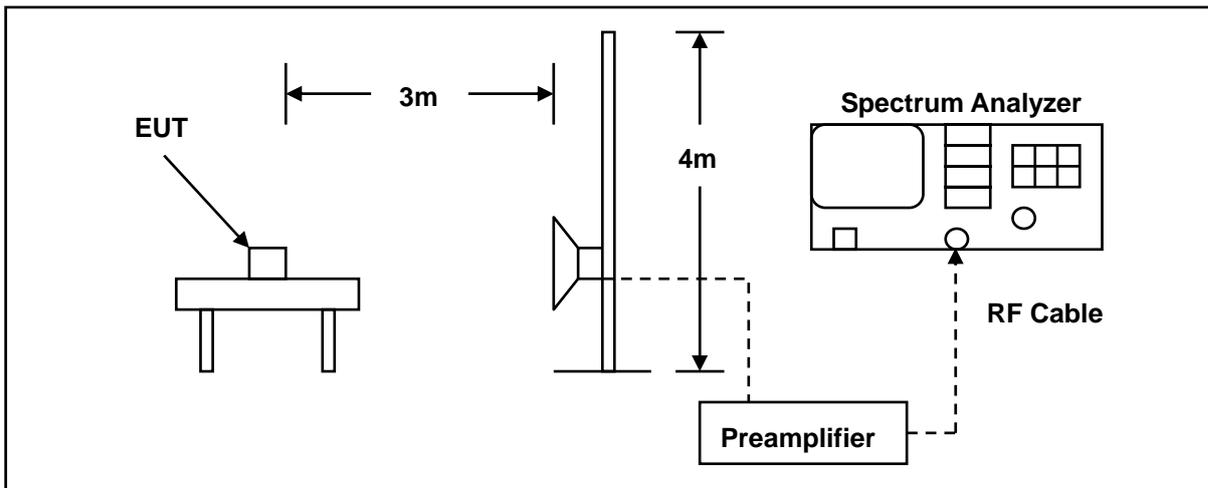

10.3.Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/16/2012	(2)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/21/2013	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2013	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2013	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/10/2013	(1)
Test Site	ATL	TE01	888001	08/28/2013	(1)

10.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2012 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.


The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


10.5. Test Result

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 24V
Model Number:	M3BPGL00	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	10/31/2013
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

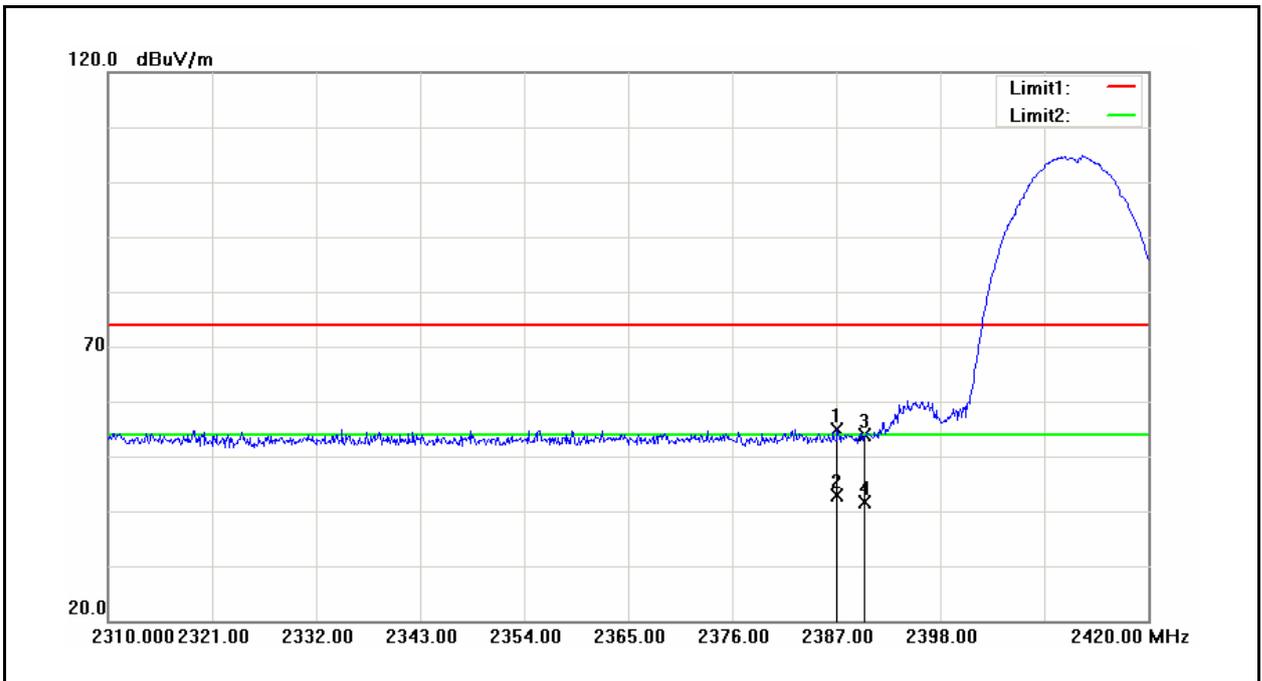


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.110	51.08	3.86	54.94	74.00	-19.06	peak
2	2387.110	39.08	3.86	42.94	54.00	-11.06	AVG
3	2390.000	50.10	3.88	53.98	74.00	-20.02	peak
4	2390.000	37.66	3.88	41.54	54.00	-12.46	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 24V
Model Number:	M3BPGL00	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	10/31/2013
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

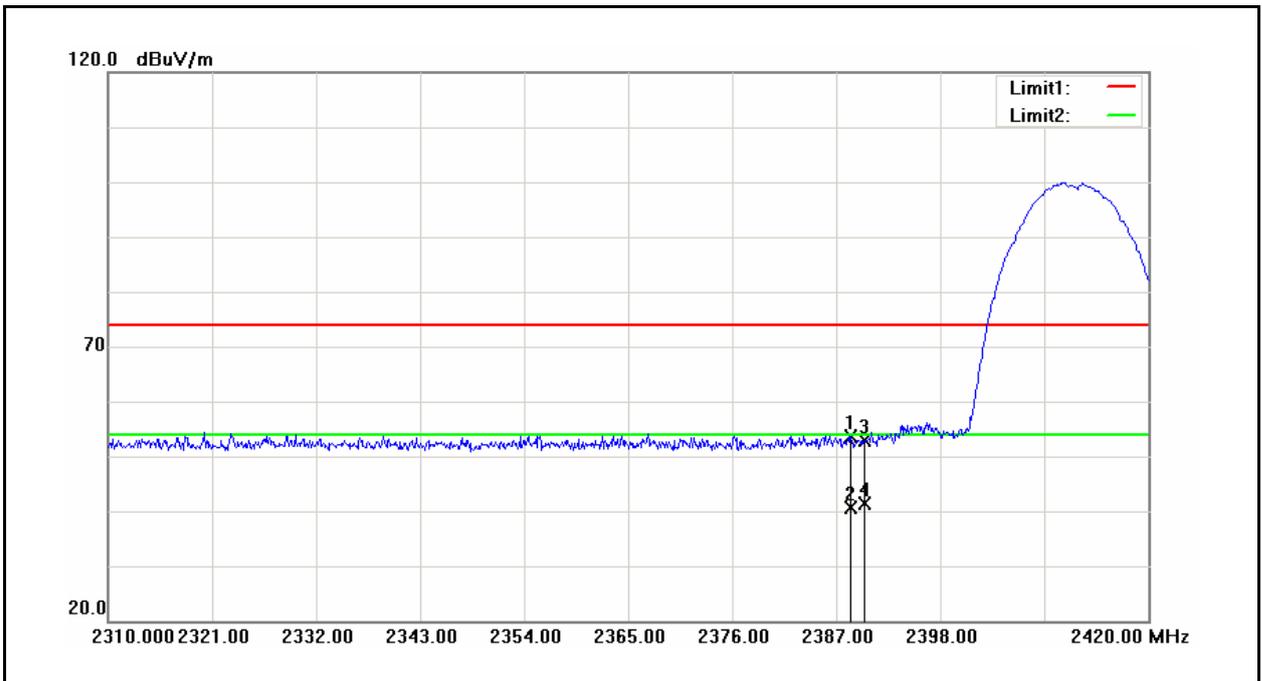


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.540	49.87	3.87	53.74	74.00	-20.26	peak
2	2388.540	36.66	3.87	40.53	54.00	-13.47	AVG
3	2390.000	49.05	3.88	52.93	74.00	-21.07	peak
4	2390.000	37.57	3.88	41.45	54.00	-12.55	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 24V
Model Number:	M3BPGL00	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	10/31/2013
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

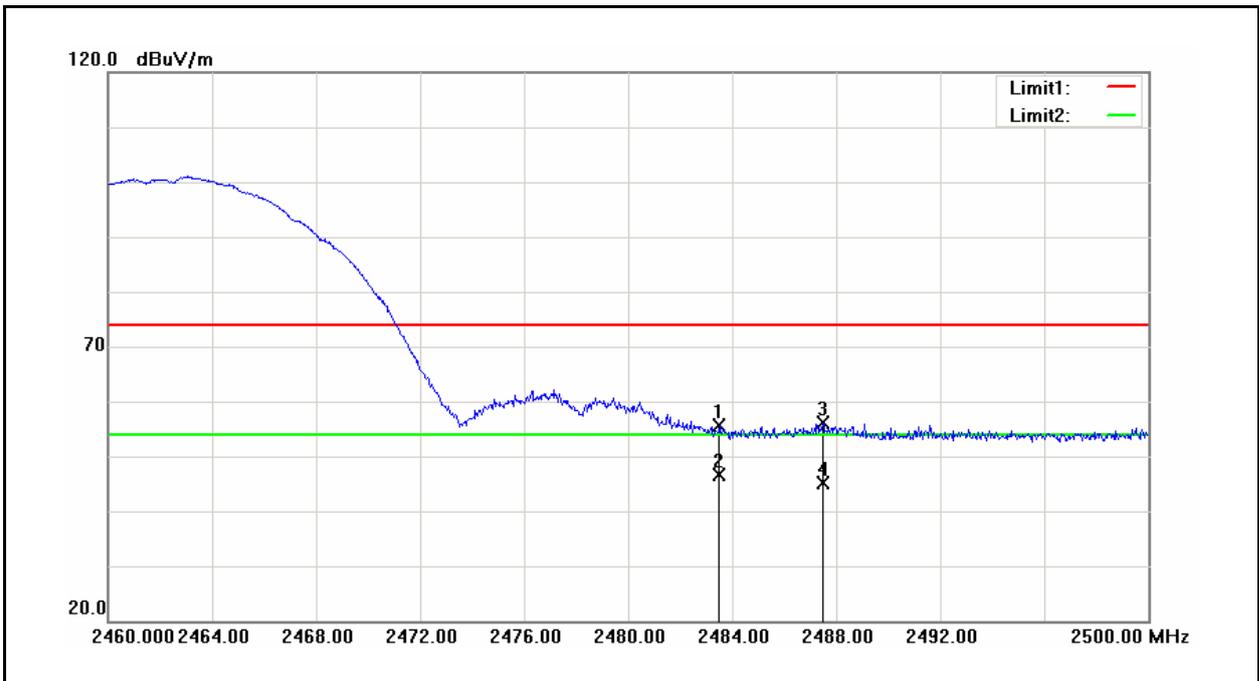


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	51.09	4.50	55.59	74.00	-18.41	peak
2	2483.500	42.19	4.50	46.69	54.00	-7.31	AVG
3	2487.480	51.67	4.53	56.20	74.00	-17.80	peak
4	2487.480	40.65	4.53	45.18	54.00	-8.82	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 24V
Model Number:	M3BPGL00	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	10/31/2013
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

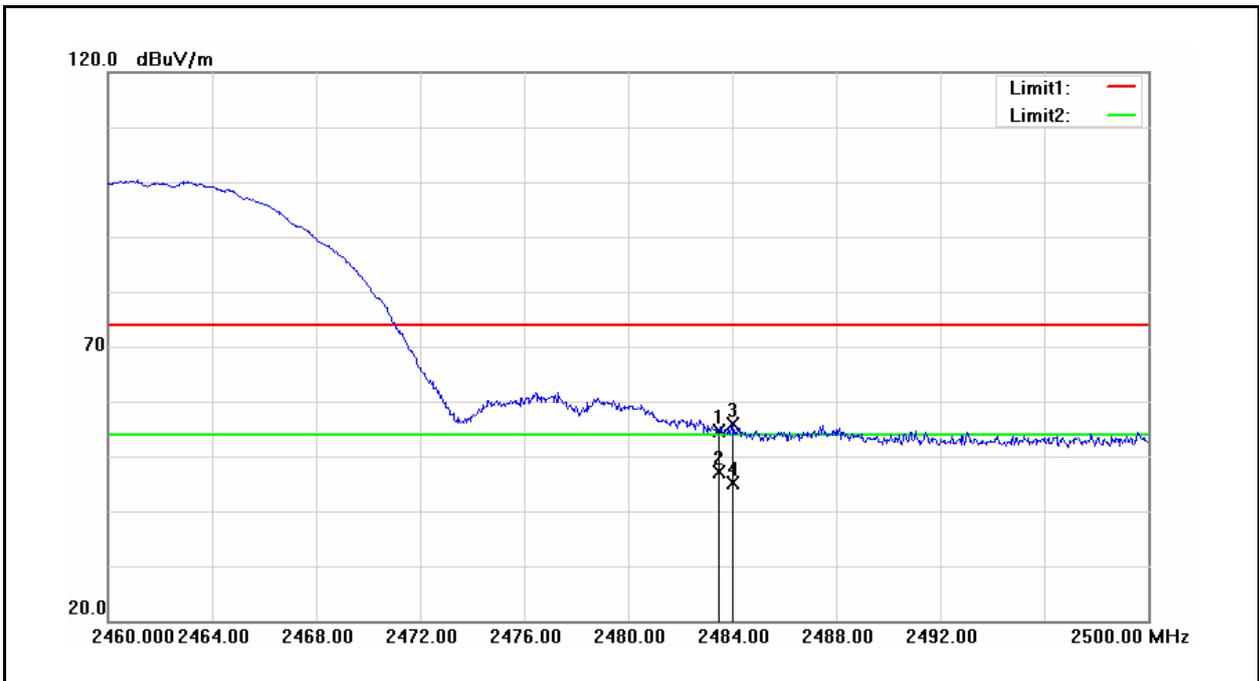


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	50.02	4.50	54.52	74.00	-19.48	peak
2	2483.500	42.56	4.50	47.06	54.00	-6.94	AVG
3	2484.000	51.36	4.51	55.87	74.00	-18.13	peak
4	2484.000	40.55	4.51	45.06	54.00	-8.94	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 24V
Model Number:	M3BPGL00	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	3	Date:	10/31/2013
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

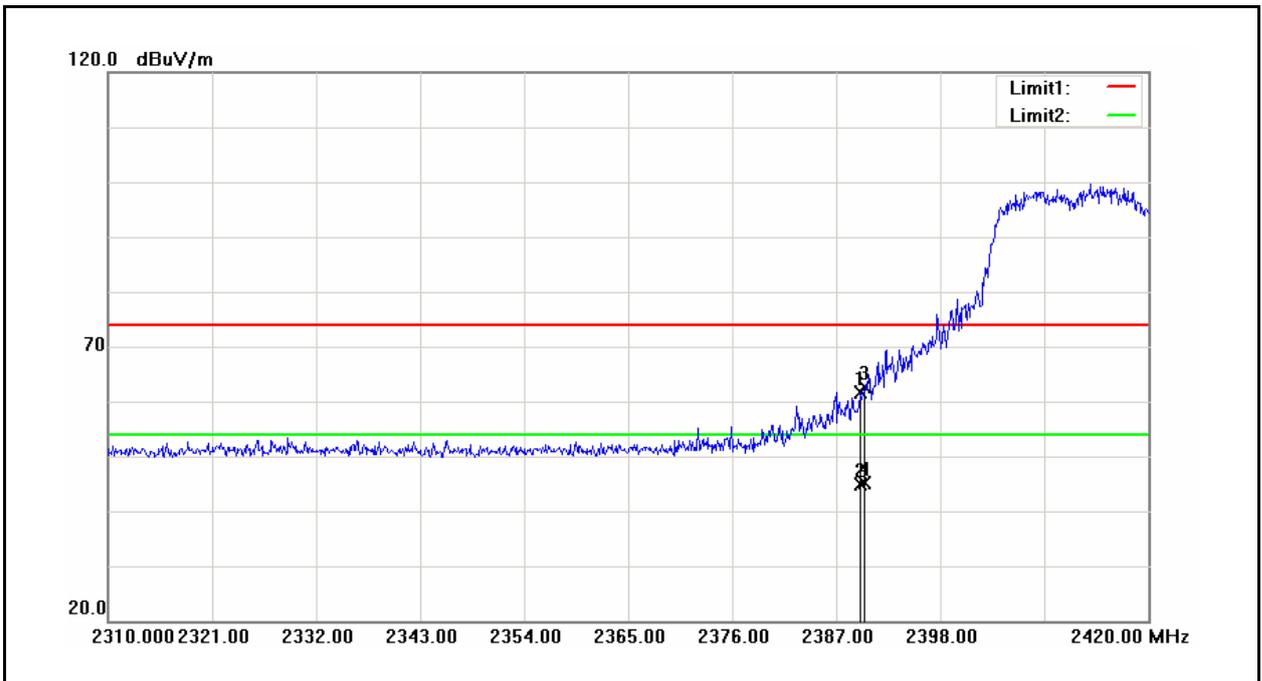


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.530	57.74	3.88	61.62	74.00	-12.38	peak
2	2389.530	41.09	3.88	44.97	54.00	-9.03	AVG
3	2390.000	58.86	3.88	62.74	74.00	-11.26	peak
4	2390.000	41.19	3.88	45.07	54.00	-8.93	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 24V
Model Number:	M3BPGL00	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	3	Date:	10/31/2013
Frequency:	2412 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

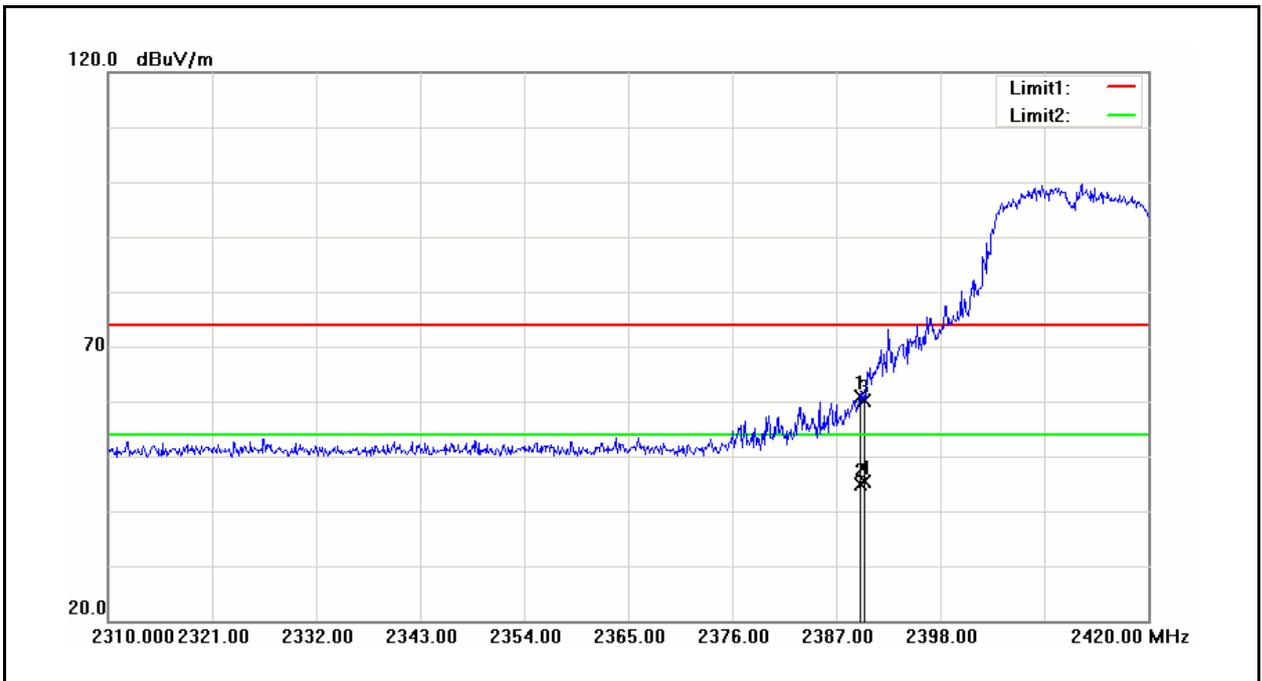


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.530	56.91	3.88	60.79	74.00	-13.21	peak
2	2389.530	41.09	3.88	44.97	54.00	-9.03	AVG
3	2390.000	56.25	3.88	60.13	74.00	-13.87	peak
4	2390.000	41.41	3.88	45.29	54.00	-8.71	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 24V
Model Number:	M3BPGL00	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	3	Date:	10/31/2013
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

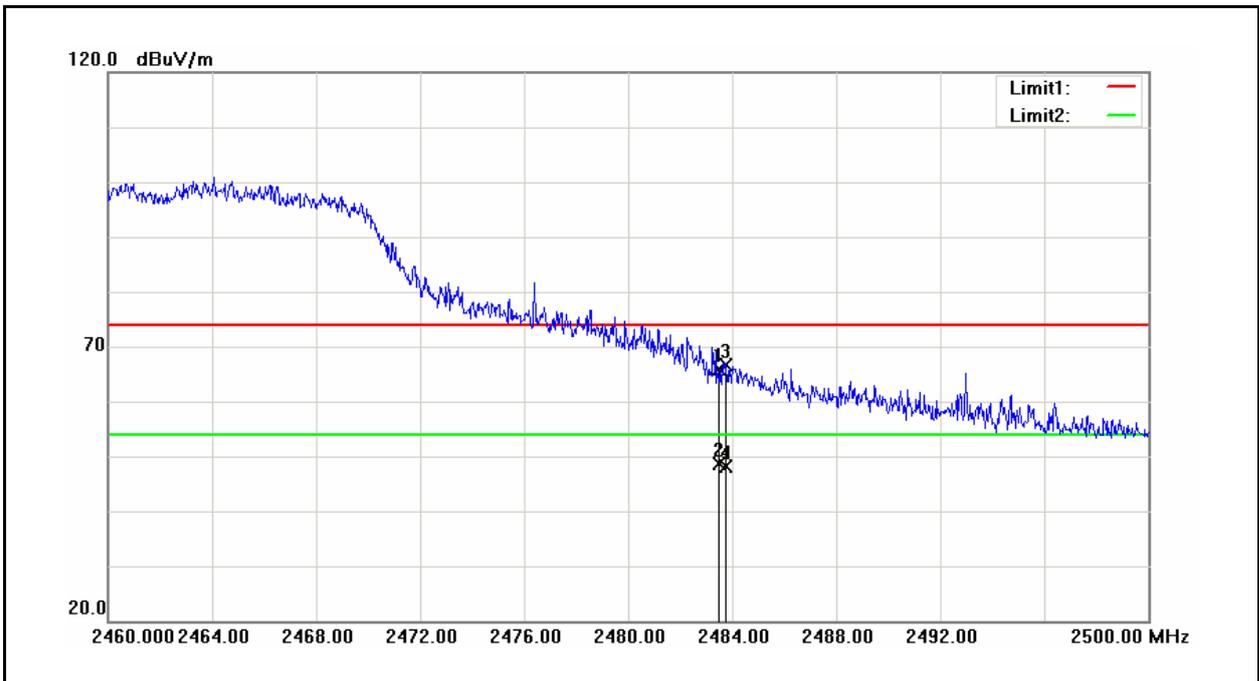

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.39	4.50	65.89	74.00	-8.11	peak
2	2483.500	44.13	4.50	48.63	54.00	-5.37	AVG
3	2483.760	62.24	4.51	66.75	74.00	-7.25	peak
4	2483.760	43.59	4.51	48.10	54.00	-5.90	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 24V
Model Number:	M3BPGL00	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	3	Date:	10/31/2013
Frequency:	2462 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

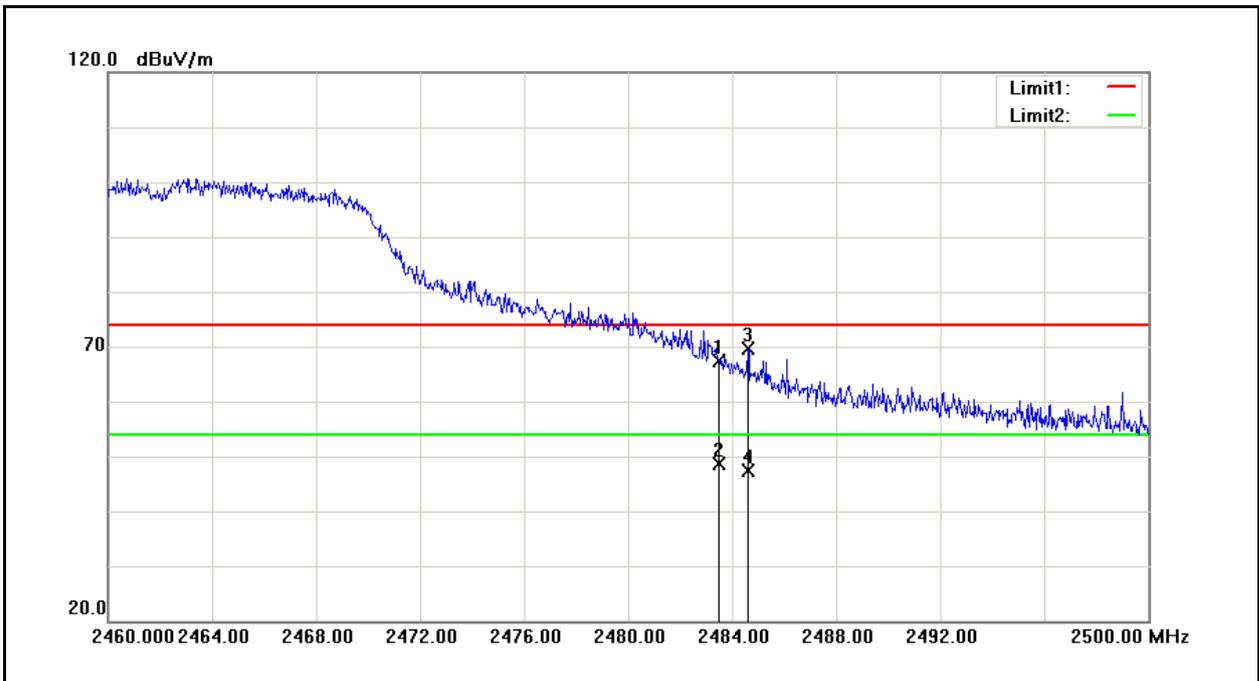

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	62.88	4.50	67.38	74.00	-6.62	peak
2	2483.500	44.24	4.50	48.74	54.00	-5.26	AVG
3	2484.600	65.16	4.51	69.67	74.00	-4.33	peak
4	2484.600	42.83	4.51	47.34	54.00	-6.66	AVG

11 Antenna Measurement

11.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2.Antenna Connector Construction

The antenna used in this product is PIFA antenna. And the maximum Gain of this antenna is only -0.64 dBi.