

Application For Grant of Certification

FOR

FOR

Models: A02293 and B02293

2402-2480 MHz

Low Power Transmitter

FCC ID: IPH-02293

IC: 1792A-02293

FOR


Garmin International, Inc.

1200 East 151st Street

Olathe, KS 66062

Test Report Number: 150429

IC Test Site Registration: 3041A-1

Authorized Signatory: 
Scot D. Rogers



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Engineering Test Report For Grant of Certification Application

FOR
CFR 47, PART 15C - Intentional Radiators
CFR 47 Paragraph 15.249
License Exempt Intentional Radiator

For
Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062

Models: A02293 and B02293

Low Power Transmitter

Frequency Range 2402-2480 MHz
FCC ID#: IPH-02293
IC: 1792A-02293

Test Date: April 29, 2015

Certifying Engineer: *Scot D. Rogers*
Scot D. Rogers
Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: A02293 and B02293
Test #: 150429
Test to: CFR47 15C, RSS-210
File: Garmin 02293 TstRpt 150429

SN: 36425
FCC ID#: IPH-02293
IC: 1792A-02293
Date: May 22, 2015
Page 2 of 25



Table Of Contents

TABLE OF CONTENTS..... 3

REVISIONS..... 4

FORWARD 5

OPINION / INTERPRETATION OF RESULTS 5

EQUIPMENT TESTED..... 5

EQUIPMENT FUNCTION AND CONFIGURATION..... 5

 Equipment Configuration.....6

APPLICATION FOR CERTIFICATION..... 7

APPLICABLE STANDARDS & TEST PROCEDURES 8

EQUIPMENT TESTING PROCEDURES 8

 AC Line Conducted Emission Test Procedure8

 Radiated Emission Test Procedure.....8

 Diagram 1 Test arrangement for radiated emissions of tabletop equipment.....9

 Diagram 2 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)..... 10

TEST SITE LOCATIONS 10

LIST OF TEST EQUIPMENT 11

UNITS OF MEASUREMENTS 12

ENVIRONMENTAL CONDITIONS..... 12

INTENTIONAL RADIATORS..... 12

 Antenna Requirements12

 Restricted Bands of Operation.....12

 Table 1 Radiated Emissions in Restricted Frequency Bands Data13

Summary of Results for Radiated Emissions in Restricted Bands13

 General Radiated Emissions Procedure.....14

 Table 2 General Radiated Emissions from EUT Data14

Summary of Results for General Radiated Emissions14

Operation in the Band 2400 – 2483.5 MHz15

 Figure 1 Plot of Transmitter Emissions (In 2402-2480 MHz Band)16

 Figure 2 Plot of Transmitter Emissions (99% Occupied Bandwidth).....16

 Figure 3 Plot of Transmitter Emissions (Low Band Edge).....17

 Figure 4 Plot of Low Band Edge (High Band Edge)17

Transmitter Emissions Data.....18

 Table 3 Transmitter Radiated Emissions18

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator19

STATEMENT OF MODIFICATIONS AND DEVIATIONS 19



ANNEX..... 20

Annex A Measurement Uncertainty Calculations.....21

Annex B Rogers Labs Test Equipment List.....22

Annex C Rogers Qualifications23

Annex D FCC Site Registration Letter.....24

Annex E Industry Canada Site Registration Letter25

Revisions

Revision 1 Issued May 22, 2015



Forward

The following information is submitted for consideration in obtaining Grant of Certification for low power intentional radiator per CFR 47 Paragraph 15.249 operation in the 2400 – 2483.5 MHz band.

Name of Applicant: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062

Model: A02293 and B02293

FCC I.D.: IPH-02293 Industry Canada ID: 1792A-02293

Operating power: 2402-2480 Maximum Average power 93.9 dBµV/m @ 3 meters (and peak 94.4 dBµV/m @ 3 meters, 950.0 kHz (99% OBW)

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Bands 47CFR 15.205	-8.2	Complies
AC Line Conducted 47CFR 15.207	N/A	Complies
Radiated Emissions 47CFR 15.209	-29.5	Complies
Harmonic Emissions per 47CFR 15.249	-8.2	Complies

Equipment Tested

<u>Equipment</u>	<u>Model / PN</u>	<u>S/N</u>	<u>FCC ID</u>	<u>IC:</u>
EUT	A02293 and B02293	36425	IPH-02293	1792A-02293
EUT (#2)	A02293 and B02293	9339	IPH-02293	1792A-02293

Test results in this report relate only to the items tested.

Equipment Function and Configuration

The EUT is a portable sensing transducer device. The device is offered in two models utilizing identical transmitter PCB and circuitry. Each electrically identical model is configured to provide operation for specific sensing and applications. The device provides ability to measure low voltage high impedance information and transmit information to compatible equipment. The design offers end user ability to view and record data. The EUT incorporates low power transmitter functioning in the 2402-2480 MHz frequency band. The design utilizes internal fixed

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1


Garmin International, Inc.
Model: A02293 and B02293
Test #: 150429
Test to: CFR47 15C, RSS-210
File: Garmin 02293 TstRpt 150429

SN: 36425
FCC ID#: IPH-02293
IC: 1792A-02293
Date: May 22, 2015
Page 5 of 25

antenna system and offers no provision for antenna replacement or modification. Two samples were provided for testing, one production design, and the other modified for testing purposes replacing integral antenna with RF connection port. Both samples were provided with test software enabling testing personnel ability to enable transmitter function on defined channels. During testing, the EUT was arranged as described by the manufacturer. For testing purposes, the A02293 and B02293 received power from internal replaceable battery and operated in manufacturer-defined mode. The design operates from replaceable internal battery only and offers no provision for alternate power sources. As requested by the manufacturer and required by regulations, the equipment was tested for emissions compliance using the available configurations with the worst-case data presented. Test results in this report relate only to the products described in this report.

Equipment Configuration

02293 operating off internal replaceable battery

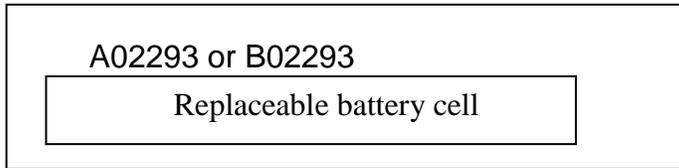



Application for Certification

- (1) Manufacturer: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062
- (2) Identification: Models: A02293 and B02293
FCC I.D.: IPH-02293 IC ID: 1792A-02293
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from DC power supplied from internal replaceable battery as documented in this report. The EUT offers no other connection ports than those presented in this filing.
- (9) Transition Provisions of CFR47 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.

Applicable Standards & Test Procedures

In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2014, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.249, following information is submitted. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2009.


Equipment Testing Procedures

AC Line Conducted Emission Test Procedure

The unit operates solely from Direct Current (DC) Power and offers no provision for connection to utility AC power systems. Therefore, no AC power line conducted emissions test is required or performed.


Radiated Emission Test Procedure

The EUT was placed on a rotating 1 x 1.5-meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. Radiated emissions testing was performed as required in CFR47 15 C and specified in ANSI C63.10-2009. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axis, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. The frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions during preliminary investigation. Refer to diagrams one and two showing typical test setup and photographs for equipment arrangement in the test setup exhibits for specific EUT placement during testing.

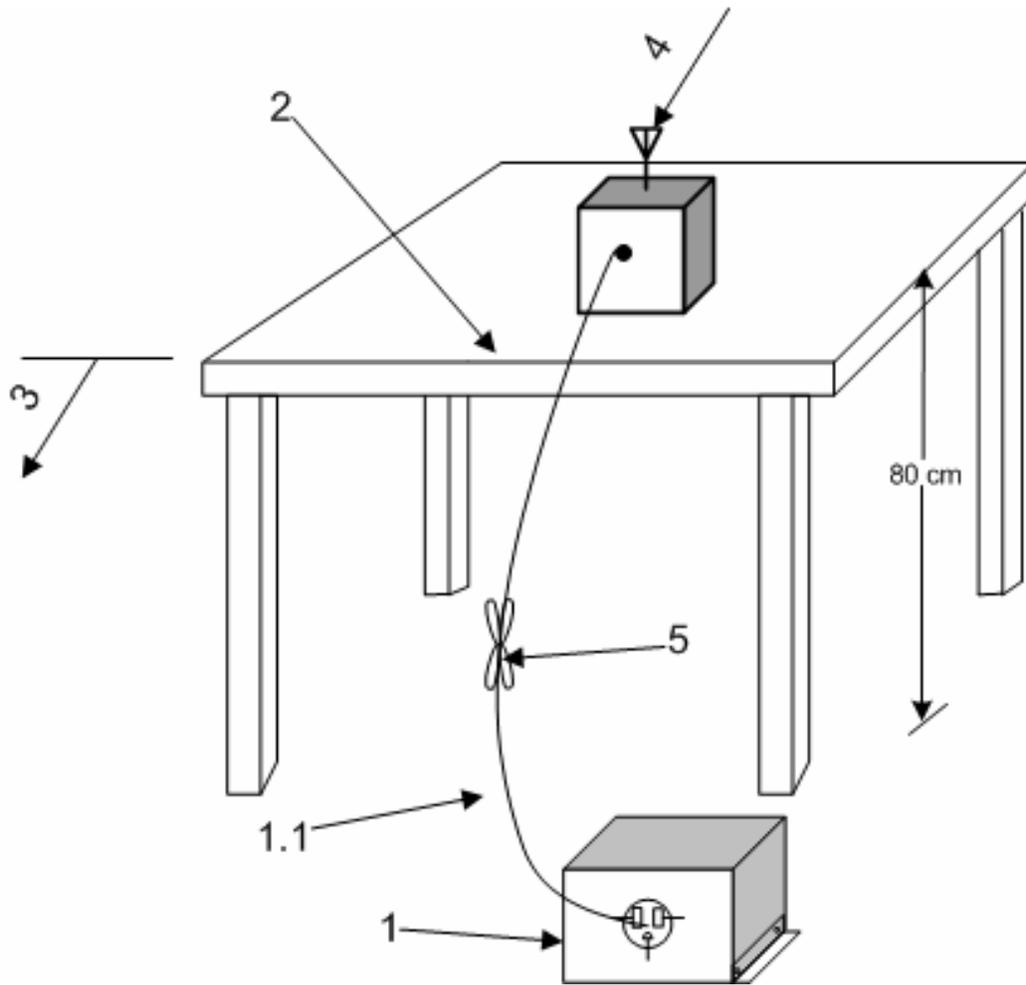

1. A LISN is optional for radiated measurements between 30 MHz to 1000 MHz, but not allowed for measurements below 30 MHz and above 1000 MHz. (See 6.4.3, 6.5.1, and 6.6.3.) If used, connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω. LISN can be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3.1).
 - 1.1 LISN spaced at least 80 cm from nearest part of EUT chassis.
2. The EUT shall be placed in the center of the table to the extent possible. (See 6.2.3.1 and 6.3.4).
3. A vertical conducting plane, if used for conducted tests per 6.2.2, shall be removed for radiated emission tests.
4. Antenna may be integral or detachable, depending on the EUT.
5. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.

Diagram 1 Test arrangement for radiated emissions of tabletop equipment

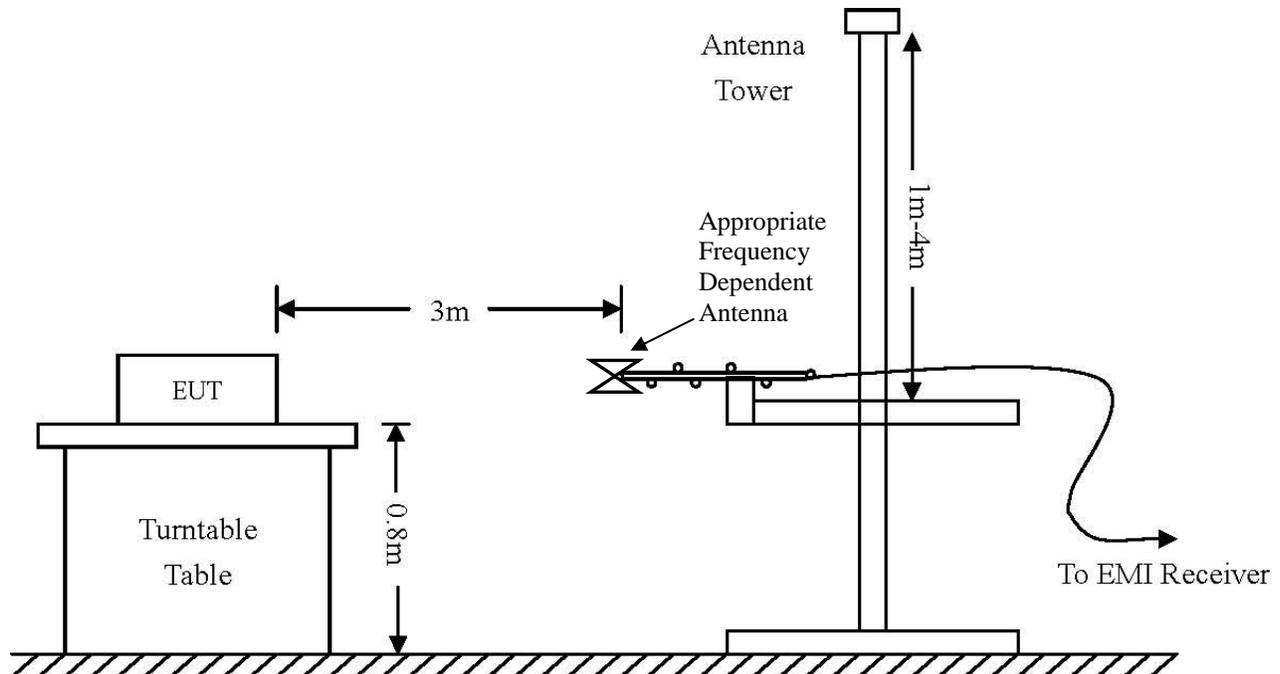

Frequency: 9 kHz-30 MHz	Frequency: 30 MHz- 1 GHz	Frequency: Above 1 GHz
Loop Antenna	Broadband Biconilog	Horn
RBW = 9 kHz	RBW = 120 kHz	RBW = 1 MHz
VBW = 30 kHz	VBW = 120 kHz	VBW = 1 MHz
Sweep time = Auto	Sweep time = Auto	Sweep time = Auto
Detector = PK, QP	Detector = PK, QP	Detector = PK, AV
Antenna Height 1m	Antenna Height 1-4m	Antenna Height 1-4m

Diagram 2 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)

Test Site Locations

Conducted EMI The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS

Radiated EMI The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS

Site Registration Refer to Annex for Site Registration Letters

NVLAP Accreditation Lab code 200087-0

List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

AC Line Conducted Emissions (0.150 -30 MHz)		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Emissions (30-1000 MHz)		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Emissions (Above 1000 MHz)		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date</u>	<u>Due</u>
<input type="checkbox"/> LISN	Comp. Design	FCC-LISN-2-MOD.CD (126)	.15-30MHz	10/14	10/15
<input checked="" type="checkbox"/> Cable	Time Microwave	750HF290-750 (L10M)	9kHz-40 GHz	10/14	10/15
<input type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	10/14	10/15
<input type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	10/14	10/15
<input type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	10/14	10/15
<input type="checkbox"/> Antenna	EMCO	3147 (40582)	200-1000MHz	10/14	10/15
<input checked="" type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	10/14	10/15
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	5/14	5/15
<input checked="" type="checkbox"/> Antenna	EMCO	6509 (9502-1374)	.001-30 MHz	10/14	10/15
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	10/14	10/15
<input checked="" type="checkbox"/> Antenna	Standard	FXRY638A (621786)	10-18 GHz	5/14	5/15
<input type="checkbox"/> Antenna	EMCO	3143 (9607-1277)	20-1200 MHz	5/14	5/15
<input type="checkbox"/> Analyzer	HP	8591EM (3628A00871)	9kHz-1.8GHz	5/14	5/15
<input type="checkbox"/> Analyzer	HP	8562A (3051A05950)	9kHz-110GHz	5/14	5/15
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	5/14	5/15
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	10/14	10/15
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	10/14	10/15
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	10/14	10/15

Rogers Labs, Inc.
 4405 W. 259th Terrace
 Louisburg, KS 66053
 Phone/Fax: (913) 837-3214
 Revision 1

Garmin International, Inc.
 Model: A02293 and B02293
 Test #: 150429
 Test to: CFR47 15C, RSS-210
 File: Garmin 02293 TstRpt 150429

SN: 36425
 FCC ID#: IPH-02293
 IC: 1792A-02293
 Date: May 22, 2015
 Page 11 of 25



Units of Measurements

Conducted EMI Data is in dB μ V; dB referenced to one microvolt

Radiated EMI Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses

RFS (dB μ V/m @ 3m) = FSM (dB μ V) + A.F. (dB) - Gain (dB)

Environmental Conditions

Ambient Temperature	20.6° C
Relative Humidity	39%
Atmospheric Pressure	1016.3 mb

Intentional Radiators

As per CFR47, Subpart C, paragraph 15.249 the following information is submitted.

Antenna Requirements

The EUT incorporates integral antenna system and offers no provision for connection to alternate system. The antenna connection point complies with the unique antenna connection requirements. The unique antenna connection requirements are fulfilled. There are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2009 paragraph 6 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values take into account the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: A02293 and B02293
Test #: 150429
Test to: CFR47 15C, RSS-210
File: Garmin 02293 TstRpt 150429

SN: 36425
FCC ID#: IPH-02293
IC: 1792A-02293
Date: May 22, 2015
Page 12 of 25

Table 1 Radiated Emissions in Restricted Frequency Bands Data

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	35.4	N/A	23.0	37.3	N/A	24.5	54.0
2483.5	36.1	N/A	23.8	45.1	N/A	30.9	54.0
4816.0	43.5	N/A	32.8	46.2	N/A	33.7	54.0
4914.0	44.0	N/A	31.4	42.9	N/A	30.4	54.0
4960.0	45.1	N/A	36.6	43.1	N/A	32.3	54.0
7224.0	46.3	N/A	33.6	49.4	N/A	37.1	54.0
7371.0	47.5	N/A	35.4	47.3	N/A	34.9	54.0
7440.0	47.0	N/A	34.3	47.8	N/A	35.1	54.0
12040.0	52.2	N/A	39.3	57.1	N/A	45.8	54.0
12285.0	52.7	N/A	39.4	53.2	N/A	39.9	54.0
12400.0	53.7	N/A	41.3	53.6	N/A	41.2	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements of CFR 47 Part 15C Intentional Radiators. The EUT demonstrated a worst-case minimum margin of -8.2 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

General Radiated Emissions Procedure

The EUT was arranged in a typical equipment configuration and operated through all available modes during testing. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 25,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or double Ridge or pyramidal horns and mixers from 1 GHz to 40 GHz, notch filters and appropriate amplifiers and external mixers were utilized.

Table 2 General Radiated Emissions from EUT Data

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	35.4	N/A	23.0	37.3	N/A	24.5	54.0
2400.0	52.1	N/A	35.3	56.3	N/A	43.8	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15C paragraph 15.209 Intentional Radiators. The EUT demonstrated a minimum margin of -7.2 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.



Operation in the Band 2400 – 2483.5 MHz

The transmitter output power; harmonic and general emissions were measured on an open area test site @ 3 meters. The EUT was placed on a wooden turntable 0.8 meters above the ground plane and at a distance of 3 meters from the FSM antenna. The table permitted orientation of the EUT in each of three orthogonal axis positions during testing. The table permitted orientation of the EUT in each of three orthogonal axis positions during testing. The peak and quasi-peak amplitude of frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of frequencies above 1000 MHz were measured using a spectrum analyzer. The amplitude of each emission was then recorded from the analyzer display. Emissions radiated outside of the specified bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits, whichever is the lesser attenuation. Plots were taken of transmitter performance for reference in this and other documentation. Refer to figures one through four showing plots taken of the 2402-2480 MHz transmitter performance displaying compliance with the specifications. The amplitude of each radiated emission was measured on the OATS at a distance of 3 meters from the FSM antenna (testing was performed on sample 1 representative of production with integral antenna). The amplitude of each radiated emission was maximized by equipment placement (orientation in three orthogonal axis), raising, and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable by varying the FSM antenna height, polarization, and by rotating the turntable. A Loop antenna was used for measuring emissions from 0.009 to 30 MHz, Biconilog Antenna for 30 to 1000 MHz, Double-Ridge, and/or Pyramidal Horn Antennas from 1 GHz to 25 GHz. Emissions were measured in dB μ V/m @ 3 meters.

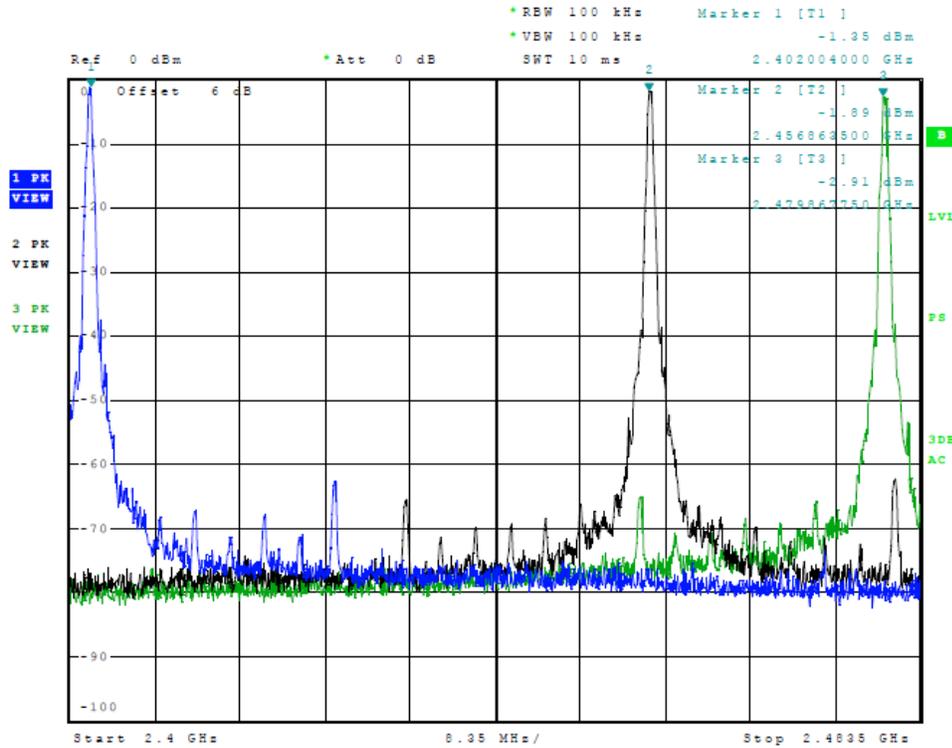


Figure 1 Plot of Transmitter Emissions (In 2402-2480 MHz Band)

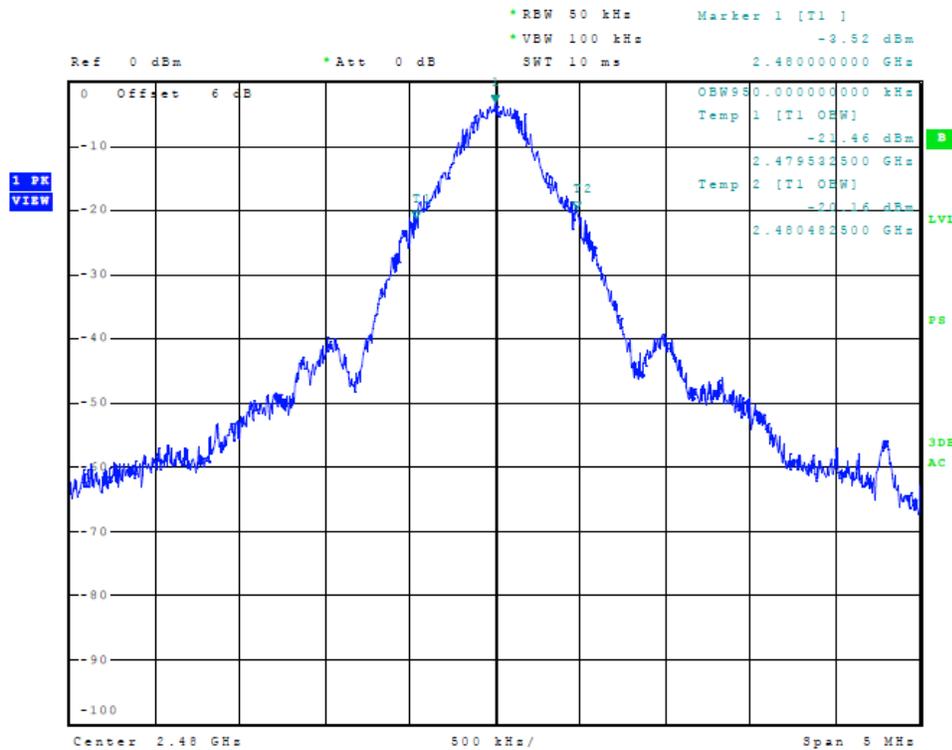


Figure 2 Plot of Transmitter Emissions (99% Occupied Bandwidth)

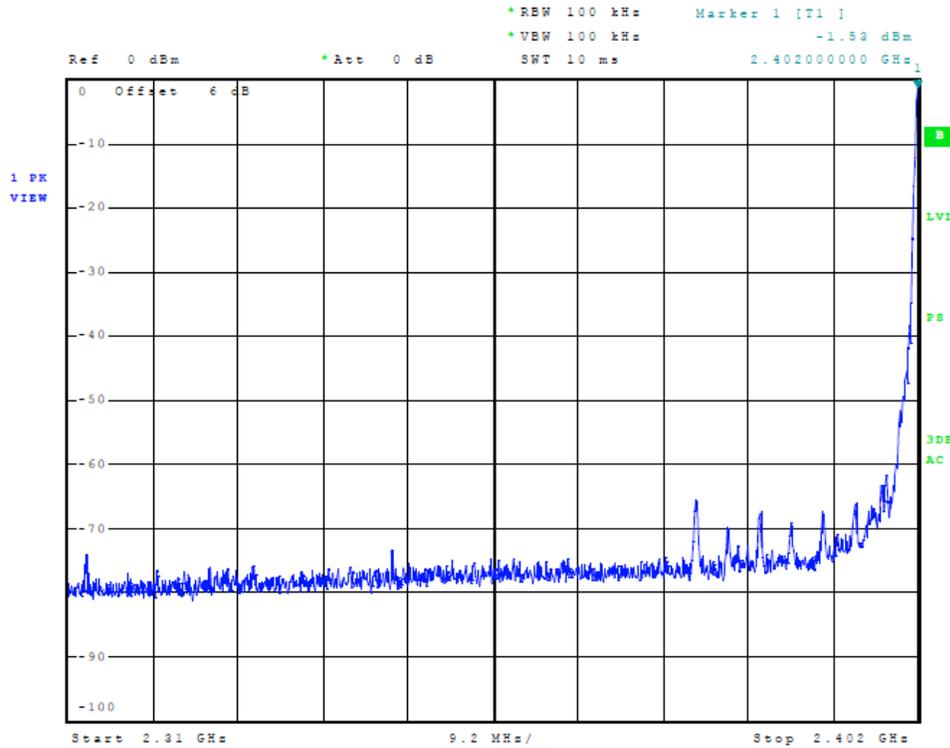


Figure 3 Plot of Transmitter Emissions (Low Band Edge)

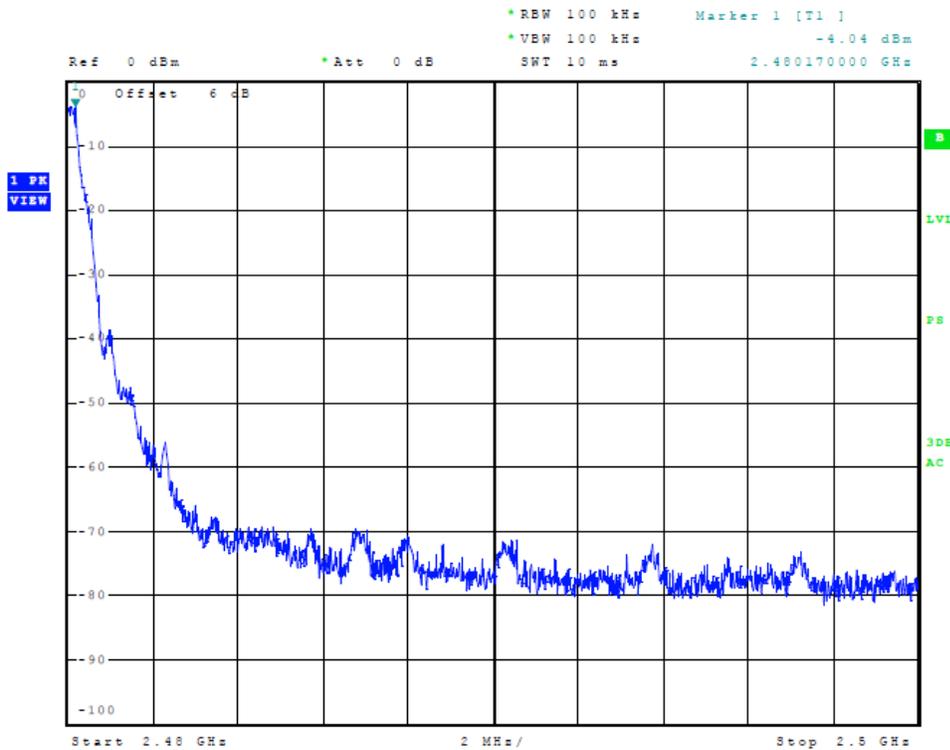


Figure 4 Plot of Low Band Edge (High Band Edge)

Transmitter Emissions Data

Table 3 Transmitter Radiated Emissions

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Quasi-Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Quasi-Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
2408.0	85.6	N/A	84.2	94.2	N/A	93.6	94.0
4816.0	43.5	N/A	32.8	46.2	N/A	33.7	54.0
7224.0	46.3	N/A	33.6	49.4	N/A	37.1	54.0
9632.0	49.5	N/A	37.2	51.1	N/A	39.1	54.0
12040.0	52.2	N/A	39.3	57.1	N/A	45.8	54.0
14448.0	56.9	N/A	44.7	57.1	N/A	44.7	54.0
2457.0	84.5	N/A	84.2	93.7	N/A	93.3	94.0
4914.0	44.0	N/A	31.4	42.9	N/A	30.4	54.0
7371.0	47.5	N/A	35.4	47.3	N/A	34.9	54.0
9828.0	49.1	N/A	36.4	49.8	N/A	36.7	54.0
12285.0	52.7	N/A	39.4	53.2	N/A	39.9	54.0
14742.0	56.8	N/A	44.3	57.3	N/A	44.6	54.0
2480.0	84.6	N/A	84.2	94.4	N/A	93.9	94.0
4960.0	45.1	N/A	36.6	43.1	N/A	32.3	54.0
7440.0	47.0	N/A	34.3	47.8	N/A	35.1	54.0
9920.0	50.3	N/A	38.1	49.2	N/A	36.6	54.0
12400.0	53.7	N/A	41.3	53.6	N/A	41.2	54.0
14880.0	55.5	N/A	42.8	54.7	N/A	42.4	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.



Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of FCC CFR 47 Part 15.249 and other applicable Intentional Radiator regulations. The EUT worst-case test sample configuration demonstrated minimum average margin of -0.1 dB below the average emission limit. The EUT worst-case configuration demonstrated minimum radiated harmonic emission margin of -8.2 dB below the limits. No other radiated emissions were found in the restricted bands less than 20 dB below limits than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the limits.

Statement of Modifications and Deviations

No modifications to the EUT were required for the equipment to demonstrate compliance with the CFR47 Part 15C emissions standards. There were no deviations to the specifications.



NVLAP Lab Code 200087-0

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: A02293 and B02293
Test #: 150429
Test to: CFR47 15C, RSS-210
File: Garmin 02293 TstRpt 150429

SN: 36425
FCC ID#: IPH-02293
IC: 1792A-02293
Date: May 22, 2015
Page 20 of 25

**Annex A Measurement Uncertainty Calculations**

Measurement uncertainty calculations were made for the laboratory. Result of measurement uncertainty calculations are recorded below for AC line conducted and radiated emission measurements.

Measurement Uncertainty	$U_{(E)}$	$U_{(lab)}$
3 Meter Horizontal 30-200 MHz Measurements	2.08	4.16
3 Meter Vertical 30-200 MHz Measurements	2.16	4.33
3 Meter Vertical Measurements 200-1000 MHz	2.99	5.97
10 Meter Horizontal Measurements 30-200 MHz	2.07	4.15
10 Meter Vertical Measurements 30-200 MHz	2.06	4.13
10 Meter Horizontal Measurements 200-1000 MHz	2.32	4.64
10 Meter Vertical Measurements 200-1000 MHz	2.33	4.66
3 Meter Measurements 1-6 GHz	2.57	5.14
3 Meter Measurements 6-18 GHz	2.58	5.16
AC Line Conducted	1.72	3.43



Annex B Rogers Labs Test Equipment List

List of Test Equipment	Calibration Date
Spectrum Analyzer: Rohde & Schwarz ESU40	5/14
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, and 11520 Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	5/14
Spectrum Analyzer: HP 8591EM	5/14
Antenna: EMCO Biconilog Model: 3143	5/14
Antenna: Sunol Biconilog Model: JB6	10/14
Antenna: EMCO Log Periodic Model: 3147	10/14
Antenna: Com Power Model: AH-118	10/14
Antenna: Com Power Model: AH-840	10/14
Antenna: Antenna Research Biconical Model: BCD 235	10/14
Antenna: EMCO Loop Model: 6509	10/14
Antenna: Schwarzbeck Biconical Model: BBA 9106 (VHBB 9124)	5/14
Antenna: Schwarzbeck Log periodic Model: VULP 9118 A	5/14
LISN: Compliance Design Model: FCC-LISN-2.Mod.cd, 50 µHy/50 ohm/0.1 µf	10/14
R.F. Preamp CPPA-102	10/14
Attenuator: HP Model: HP11509A	10/14
Attenuator: Mini Circuits Model: CAT-3	10/14
Attenuator: Mini Circuits Model: CAT-3	10/14
Cable: Belden RG-58 (L1)	10/14
Cable: Belden RG-58 (L2)	10/14
Cable: Belden 8268 (L3)	10/14
Cable: Time Microwave: 4M-750HF290-750	10/14
Cable: Time Microwave: 10M-750HF290-750	10/14
Frequency Counter: Leader LDC825	2/15
Wattmeter: Bird 43 with Load Bird 8085	2/15
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/15
R.F. Generators: HP 606A, HP 8614A, HP 8640B	2/15
R.F. Power Amp 65W Model: 470-A-1010	2/15
R.F. Power Amp 50W M185- 10-501	2/15
R.F. Power Amp A.R. Model: 10W 1010M7	2/15
R.F. Power Amp EIN Model: A301	2/15
LISN: Compliance Eng. Model 240/20	2/15
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08	2/15
Antenna: EMCO Dipole Set 3121C	2/15
Antenna: C.D. B-101	2/15
Antenna: Solar 9229-1 & 9230-1	2/15
Audio Oscillator: H.P. 201CD	2/15
ESD Keytek MZ-15 E	2/15
ESD Test Set 2010i	2/15
Fast Transient / Surge Generator system: Transient 3000	2/15
Fast Transient Burst Generator Model: EFT/B-101	2/15
Field Intensity Meter: EFM-018	2/15
Keytek Ecat Surge Generator	2/15

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: A02293 and B02293
Test #: 150429
Test to: CFR47 15C, RSS-210
File: Garmin 02293 TstRpt 150429

SN: 36425
FCC ID#: IPH-02293
IC: 1792A-02293
Date: May 22, 2015
Page 22 of 25



Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years' experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

Scot D. Rogers



NVLAP Lab Code 200087-0

Annex D FCC Site Registration Letter

FEDERAL COMMUNICATIONS COMMISSION

**Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046**

June 28, 2013

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace,
Louisburg, KS 66053

Attention: Scot Rogers,


Re: Measurement facility located at Louisburg
3 & 10 meter site
Date of Renewal: June 28, 2013

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

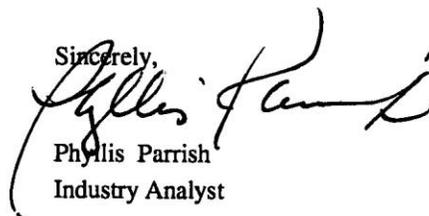

Phyllis Parrish
Industry Analyst

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1


Garmin International, Inc.
Model: A02293 and B02293
Test #: 150429
Test to: CFR47 15C, RSS-210
File: Garmin 02293 TstRpt 150429

SN: 36425
FCC ID#: IPH-02293
IC: 1792A-02293
Date: May 22, 2015
Page 24 of 25



NVLAP Lab Code 200087-0

Annex E Industry Canada Site Registration Letter



June 19, 2013

OUR FILE: 46405-3041

Submission No: 168037

Rogers Labs Inc.
4405 West 259th Terrace
Louisburg
KS, USA
66053

Attention: Mr. Scot D. Rogers

Dear Sir:

The Bureau has received your application for the renewal of 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (**Site# 3041A-1**). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to **exceed three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;

http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html.

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca Please reference our file and submission number above for all correspondence.

Yours sincerely,

Bill Payn
For: Wireless Laboratory Manager
Certification and Engineering Bureau
3701 Carling Ave., Building 94
P.O. Box 11490, Station "H"
Ottawa, Ontario K2H 8S2
Email: Bill.Payn@ic.gc.ca
Tel. No. (613) 990-3639
Fax. No. (613) 990-4752

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: A02293 and B02293
Test #: 150429
Test to: CFR47 15C, RSS-210
File: Garmin 02293 TstRpt 150429

SN: 36425
FCC ID#: IPH-02293
IC: 1792A-02293
Date: May 22, 2015
Page 25 of 25