

	Date(s) of Evaluation July 8-15, 2014	Test Report Serial No. 070414IPH-1303-SNA	Test Report Revision No. Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date August 25, 2014	Description of Test(s) Specific Absorption Rate	RF Exposure Category Gen. Pop. / Uncontrolled	

DECLARATION OF COMPLIANCE

SAR RF EXPOSURE EVALUATION - FCC / IC Original Filing

TEST LAB INFORMATION	Name	CELLTECH LABS INC.				
	Address	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada				
TEST LAB ACCREDITATION	Type	ISO / IEC 17025	Accreditation	A2LA Test Lab Certificate No. 2470.01		
APPLICANT INFORMATION	Name	GARMIN INTERNATIONAL INC.				
	Address	1200, East 151 st Street, Olathe, KS, 66062 USA				
STANDARDS APPLIED	FCC	47 CFR §2.1093	IC	Health Canada Safety Code 6		
PROCEDURES APPLIED	FCC	KDB 447498 D01v05r01, KDB 865664 D01v01r02	IC	RSS102 Issue 4		
	FCC	KDB 865664 D02v01r01, KDB 643646 D01v01r01	IEC	62209-1:2005		
	IEEE	IEEE 1528-2013	IEC	62209-2:2010		
DEVICE CLASSIFICATION	FCC	Digital Transmission System (DTS) - §15 Subpart C				
	FCC	Unlicensed National Information Infrastructure TX (NII) - §15 Subpart E				
	IC	Low Power License-Exempt Radiocommunication Device (RSS-210 Issue 8)				
DEVICE DESCRIPTION	Wireless GPS Device					
APPLICATION TYPE	Original Filing					
DATE(S) OF EVALUATION	July 8 - 15, 2014			SAMPLES RECEIVED		
DEVICE IDENTIFIERS	FCC ID	IPH-02422	IC ID	1792A-02422	TEST SAMPLE S/N	3883890932

Devices Tested

Model	Internal Transmitters	Data Rates	Frequency Range	Manufacturer's Rated Output Power
A4AVGL00	WiFi	1, 5.5 Mbps	2412-2462 MHz	11.8dBm +/-1dB
	BLE/ANT		2400-2483 MHz	

Antennas Tested

Internal

Batteries Tested

Li-ion

EVALUATION RESULTS

Maximum SAR Level Evaluated FCC	Body	1.11	W/kg	1g	FCC/IC SAR Limit	General Public / Uncontrolled
Maximum SAR Level Evaluated IC	Body	1.18			1.6 W/kg	

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada Safety Code 6 for the General Population / Uncontrolled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 4, IEEE Standard 1528-2013 and International Standard IEC 62209-2:2010. All measurements were performed in accordance with the SAR system manufacturer recommendations.

**** This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. ****

The results and statements contained in this report pertain only to the device(s) evaluated

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Test Report Approved By		Art Voss, P.Eng.	Senior Engineer	Celltech Labs Inc.
-------------------------	---	------------------	-----------------	--------------------

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 1 of 51

TABLE OF CONTENTS	
1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 CONDUCTED OUTPUT POWER MEASUREMENTS	5
4.0 FLUID DIELECTRIC PARAMETERS	7
5.0 SAR MEASUREMENT SUMMARY	9
6.0 SAR SCALING FOR TUNE-UP TOLERANCE	10
7.0 SIMULTANEOUS TRANSMISSION ASSESSMENT	10
8.0 DETAILS OF SAR EVALUATION	11
9.0 SAR EVALUATION PROCEDURES	11
10.0 SYSTEM VERIFICATION	12
11.0 SIMULATED EQUIVALENT TISSUES	13
12.0 SAR LIMITS	13
13.0 ROBOT SYSTEM SPECIFICATIONS	14
14.0 PROBE SPECIFICATION (EX3DV4)	15
15.0 SAM TWIN PHANTOM V4.0C	15
16.0 DEVICE HOLDER	15
17.0 TEST EQUIPMENT LIST	16
18.0 MEASUREMENT UNCERTAINTY (IEC 62209-2)	17
19.0 REFERENCES	18
APPENDIX A - SAR MEASUREMENT PLOTS	19
APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS	34
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	39
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	42
APPENDIX E - DIPOLE CALIBRATION	49
APPENDIX F - PROBE CALIBRATION	50
APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY	51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

REVISION HISTORY			
REVISION NO.	DESCRIPTION	IMPLEMENTED BY	RELEASE DATE
0.1	Draft Release	Mark Hoddinott	August 1, 2014
1.0	Initial Release	Art Voss	August 25, 2014

TEST REPORT SIGN-OFF			
DEVICE TESTED BY	REPORT PREPARED BY	QA REVIEW BY	REPORT APPROVED BY
Mark Hoddinott	Cheri Frangiadakis	Art Voss	Art Voss

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 3 of 51


	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

1.0 INTRODUCTION

This measurement report demonstrates that the Garmin International Inc. Model(s): A4AVGL00 Wireless GPS Device complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The measurement procedures described in KDB 447498 (see reference [8]), KDB 865664 (see reference [9]), IC RSS-102 Issue 4 (see reference [4]), IEEE Standard 1528-2013 (see reference [5]) and IEC Standard 62209-2:2010 (see reference [6]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for Head and/or Body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.

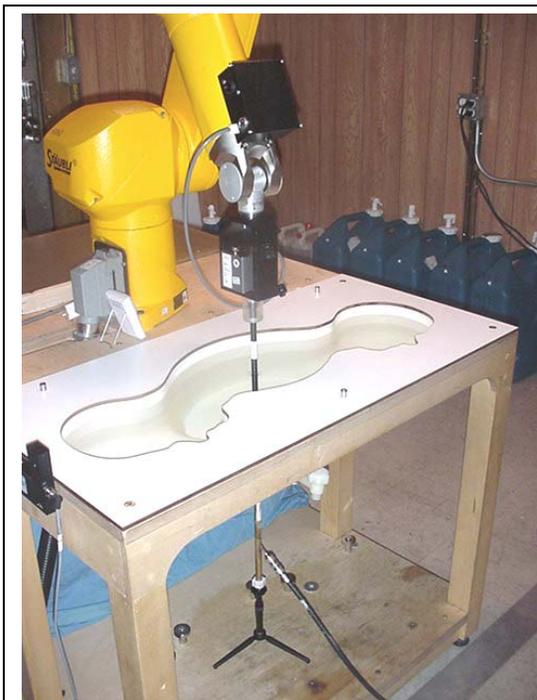

DASY4 System with SAM Twin Phantom V4.0C



DASY4 Measurement Server

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 4 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

3.0 CONDUCTED OUTPUT POWER MEASUREMENTS

Freq. (MHz)	Channel	Conducted Output Power (dBm)
		1 Mbps
2412	1	14.46
2417	2	14.81
2422	3	15.12
2427	4	15.48
2432	5	15.83
2437	6	16.19
2442	7	16.5
2447	8	16.75
2452	9	16.92
2457	10	17.03
2462	11	17.06
2467	12	17.01
2472	13	16.94
Notes		
1. The unit was tested at its maximum output power capability		
2. The unit was tested at 100% duty cycle transmit.		
3. The output power in production units will be set lower than these values.		

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 5 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Freq. (MHz)	Data Rate (Mb/s)	Conducted Output Power (dBm)	
		Channel 11	
2462	1	16.92	
2462	2	16.93	
2462	5.5	17.62	
2462	11	17.33	
2462	6	14.49	
2462	9	14.42	
2462	12	14.4	
2462	18	14.52	
2462	24	14.35	
2462	36	14.38	
2462	48	14.43	
2462	54	14.42	
2462	MCS0	16.95	
2462	MCS1	16.96	
2462	MCS2	17.65	
2462	MCS3	17.38	
2462	MCS4	14.53	
2462	MCS5	14.49	
2462	MCS6	14.46	
2462	MCS7	14.56	
2462	MCS32	9.88	
Notes			
1. The unit was tested at its maximum output power capability			
2. The unit was tested at 100% duty cycle transmit.			
3. The output power in production units will be set lower than these values.			

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 6 of 51

4.0 FLUID DIELECTRIC PARAMETERS

FLUID DIELECTRIC PARAMETERS						
Date: 8 July 2014		Frequency: 2450 MHz			Tissue: Body	
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
2350	51.12	1.80	52.83	1.85	-3.24%	-2.70%
2360	51.12	1.80	52.82	1.86	-3.22%	-3.23%
2370	51.25	1.84	52.81	1.87	-2.95%	-1.60%
2380	51.15	1.83	52.79	1.88	-3.11%	-2.66%
2390	51.35	1.85	52.78	1.89	-2.71%	-2.12%
2400	51.04	1.86	52.77	1.90	-3.28%	-2.11%
2410	51.04	1.87	52.75	1.91	-3.24%	-2.09%
2412*	51.10	1.87	52.75	1.91	-3.13%	-2.09%
2420	51.14	1.88	52.74	1.92	-3.03%	-2.08%
2430	51.03	1.89	52.73	1.93	-3.22%	-2.07%
2440	51.01	1.90	52.71	1.94	-3.23%	-2.06%
2450	51.01	1.92	52.70	1.95	-3.21%	-1.54%
2460	50.97	1.93	52.69	1.96	-3.26%	-1.53%
2462*	51.00	1.94	52.69	1.96	-3.21%	-1.02%
2470	51.01	1.99	52.67	1.98	-3.15%	0.51%
2480	51.06	1.99	52.66	1.99	-3.04%	0.00%
2490	50.90	2.00	52.65	2.01	-3.32%	-0.50%
2500	50.96	2.00	52.64	2.02	-3.19%	-0.99%
2510	50.89	2.03	52.62	2.04	-3.29%	-0.49%
2520	51.04	2.02	52.61	2.05	-2.98%	-1.46%
2530	50.75	2.02	52.60	2.06	-3.52%	-1.94%
2540	50.83	2.05	52.59	2.08	-3.35%	-1.44%
2550	50.90	4.89	52.57	2.09	-3.18%	133.97%

**interpolated using DASY4 software*

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
July 8	2450 Body	24°C	24.1°C	≥ 15 cm	101.9 kPa	33%	1000
July 10	2450 Body	24°C	24.1°C	≥ 15 cm	101.9 kPa	34%	1000
July 11	2450 Body	23°C	23.5 °C	≥ 15 cm	101.5 kPa	30%	1000

FLUID DIELECTRIC PARAMETERS						
Date: 14 July 2014		Frequency: 2450 MHz			Tissue: Body	
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
2350	51.95	1.70	52.83	1.85	-1.67%	-8.11%
2360	51.96	1.72	52.82	1.86	-1.63%	-7.53%
2370	51.90	1.75	52.81	1.87	-1.72%	-6.42%
2380	52.10	1.74	52.79	1.88	-1.31%	-7.45%
2390	51.83	1.76	52.78	1.89	-1.80%	-6.88%
2400	51.96	1.78	52.77	1.90	-1.53%	-6.32%
2410	51.83	1.81	52.75	1.91	-1.74%	-5.24%
2420	51.82	1.82	52.74	1.92	-1.74%	-5.21%
2430	51.97	1.83	52.73	1.93	-1.44%	-5.18%
2440	51.76	1.86	52.71	1.94	-1.80%	-4.12%
2450	51.72	1.87	52.70	1.95	-1.86%	-4.10%
2460	51.74	1.87	52.69	1.96	-1.80%	-4.59%
2462*	51.80	1.87	52.69	1.96	-1.69%	-4.59%
2470	51.85	1.88	52.67	1.98	-1.56%	-5.05%
2480	51.54	1.90	52.66	1.99	-2.13%	-4.52%
2490	51.61	1.91	52.65	2.01	-1.98%	-4.98%
2500	51.52	1.93	52.64	2.02	-2.13%	-4.46%
2510	51.51	1.93	52.62	2.04	-2.11%	-5.39%
2520	51.54	1.95	52.61	2.05	-2.03%	-4.88%
2530	51.61	1.97	52.60	2.06	-1.88%	-4.37%
2540	51.50	1.99	52.59	2.08	-2.07%	-4.33%
2550	51.56	4.89	52.57	2.09	-1.92%	133.97%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
July 14	2450 Body	27°C	23.4 °C	≥ 15 cm	101.7 kPa	32%	1000
July 15	2450 Body	24°C	22.6 °C	≥ 15 cm	101.7 kPa	34%	1000

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

5.0 SAR MEASUREMENT SUMMARY

BODY-WORN SAR EVALUATION RESULTS

Plot #	Test Date	Test Mode	Test Freq.	Test Chan.	Data Rate	Battery	DUT Position (Side facing phantom)	DUT Distance to Phantom	Conducted Power Before Test	Measured SAR (1g)	SAR Drift During Test	Scaled SAR (1g) with Drift
			MHz		Mbps				dBm		W/kg	dB
B1	July 8	WiFi	2412	1	1	Li-ion	Front Touch	0mm	14.46	0.045	4.76	0.045
B2	July 8	WiFi	2462	11	1	Li-ion	Front Touch	0mm	17.06	0.103	2.99	0.103
B3	July 10	WiFi	2462	11	1	Li-ion	Front Touch	0mm	17.06	0.381	-0.097	0.390
B4	July 10	WiFi	2462	11	5.5	Li-ion	Top Touch	0mm	17.62	0.419	-0.087	0.427
B5	July 10	WiFi	2462	11	5.5	Li-ion	Back Touch	0mm	17.62	0.977	-0.215	1.03
B11	July 11	WiFi	2462	11	1	Li-ion	Back Touch	0mm	17.06	1.110	-0.317	1.18
B14	July 15	WiFi	2462	11	1	Li-ion	Top Touch	0mm	17.06	0.331	-0.065	0.336
B15	July 15	WiFi	2462	11	1	Li-ion	Bottom Touch	0mm	17.06	0.025	-0.732	0.030
B16	July 15	WiFi	2462	11	1	Li-ion	Left Touch	0mm	17.06	0.040	-0.724	0.048
B17	July 15	WiFi	2462	11	1	Li-ion	Right Touch	0mm	17.06	0.046	-0.101	0.047
SAR SAFETY LIMIT(S)							BODY	SPATIAL PEAK	RF EXPOSURE CATEGORY			
FCC 47 CFR 2.1093			Health Canada Safety Code 6				1.6 W/kg	1g average	General Population / Uncontrolled			

Notes	
1.	Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
2.	The DUT was not required to be evaluated in 802.11g mode or higher data rates because the highest output power channel was < ¼ dB higher than the corresponding 802.11b channel on the lowest data rate, in accordance with the procedures of FCC KDB 248227 (see reference [9]).
3.	The SAR drift of the DUT was measured by the DASY4 system for the duration of the SAR evaluation.
4.	The DUT battery was fully charged prior to each SAR evaluation.
5.	The fluid temperature remained within +/-2°C from the dielectric parameter measurement to the completion of the SAR test.
6.	The dielectric parameters of the simulated tissue mixture were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer.

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

6.0 SAR SCALING FOR TUNE-UP TOLERANCE

SAR scaling was not applied, as the unit was tested at its maximum output power capability and 100% duty cycle. Output power for production units will be set lower than this value (manufacturer's output power rating is 11.8dBm +/-1dB vs. measured power of 14.46-17.06dBm measured across all channels before SAR tests), and they will not be able to transmit at 100% duty cycle. This SAR evaluation therefore represents the worst-case condition for the device.

7.0 SIMULTANEOUS TRANSMISSION ASSESSMENT

802.11b/g + 802.15

These transmitters are not capable of simultaneous transmission. The 802.15 is rated at 4dBm and is below the threshold for standalone SAR evaluation.

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 10 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

8.0 DETAILS OF SAR EVALUATION

1. The DUT was evaluated for body-worn SAR in accordance with the test positions required by FCC KDB 447498 D01v05 (see reference [8]).
2. The DUT was supplied with test mode software that was able to transmit at any selected channel / data-rate required for SAR testing.
3. The DUT was tested with a modulated DSSS signal in 802.11b mode.
4. The battery was fully charged before each SAR evaluation.

9.0 SAR EVALUATION PROCEDURES

- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
- (ii) For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 10mm x 10mm.
An area scan was determined as follows:
- Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
- Extrapolation is used to determine the values between the dipole center of the probe and the surface of the phantom. This data cannot be measured because the center of the dipole sensors is 1.0 mm away from the probe tip and the distance between the probe and the boundary must be larger than 25% of the probe diameter. The probe diameter is 2.4 mm. In the DASY4 software, the distance between the sensor center and phantom surface is set to 2.0 mm. This provides a distance of 1.0 mm between the probe tip and the surface. The extrapolation of the values between the dipole center and the surface of the phantom was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- A zoom scan volume of 30 mm x 30 mm x 30 mm (5x5x7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7x7x7 points) to ensure complete capture of the peak spatial-average SAR. When the area scan estimated SAR is < 1.4W/kg, less points can be used for higher frequency zoom scans.



Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 11 of 51

	Date(s) of Evaluation July 8-15, 2014	Test Report Serial No. 070414IPH-1303-SNA	Test Report Revision No. Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date August 25, 2014	Description of Test(s) Specific Absorption Rate	RF Exposure Category Gen. Pop. / Uncontrolled	

10.0 SYSTEM VERIFICATION

Prior to the SAR evaluations, a system check was performed at the planar section of the SAM phantom with a 2450MHz SPEAG validation dipole (see Appendix B) in accordance with the procedures described in IEEE Standard 1528-2013 (see reference [5]) and IEC 62209-2:2010 (see reference [7]). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the system manufacturer's dipole calibration target SAR value (see Appendix E).

SYSTEM PERFORMANCE CHECK EVALUATION																
Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. (MHz)	Target	Meas.	Dev.	Target	Meas.	Dev.	Target	Meas.						
July 8	BODY 2450	12.7 $\pm 10\%$	13.9	+9.5%	52.7 $\pm 5\%$	51	-3.2%	1.95 $\pm 5\%$	1.92	-1.5%	1000	24	24.1	≥ 15	33	101.9
July 14	BODY 2450	12.7 $\pm 10\%$	13.2	+3.9%	52.7 $\pm 5\%$	51.7	-1.9%	1.95 $\pm 5\%$	1.87	-4.1%	1000	27	23.4	≥ 15	32	101.7
Notes	1. The target SAR value is the measured value from the dipole calibration performed by the system manufacturer (see Appendix E).															
	2. The target dielectric parameters are the nominal values from the dipole calibration performed by SPEAG (see Appendix E) and specified in IC RSS-102 Issue 4 (see reference [4]).															
	3. The fluid temperature remained within $\pm 2^\circ\text{C}$ from the dielectric parameter measurement to the completion of the system performance check evaluation.															
	4. The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).															

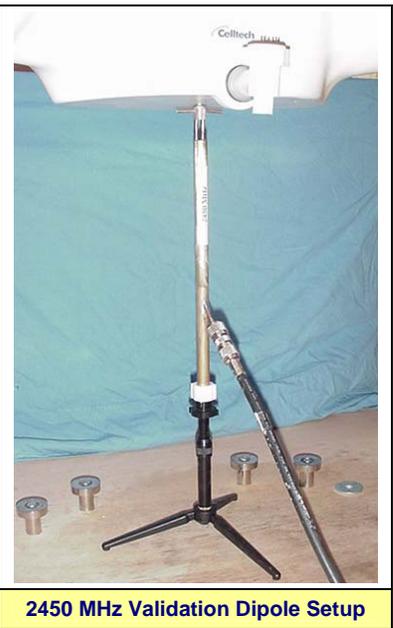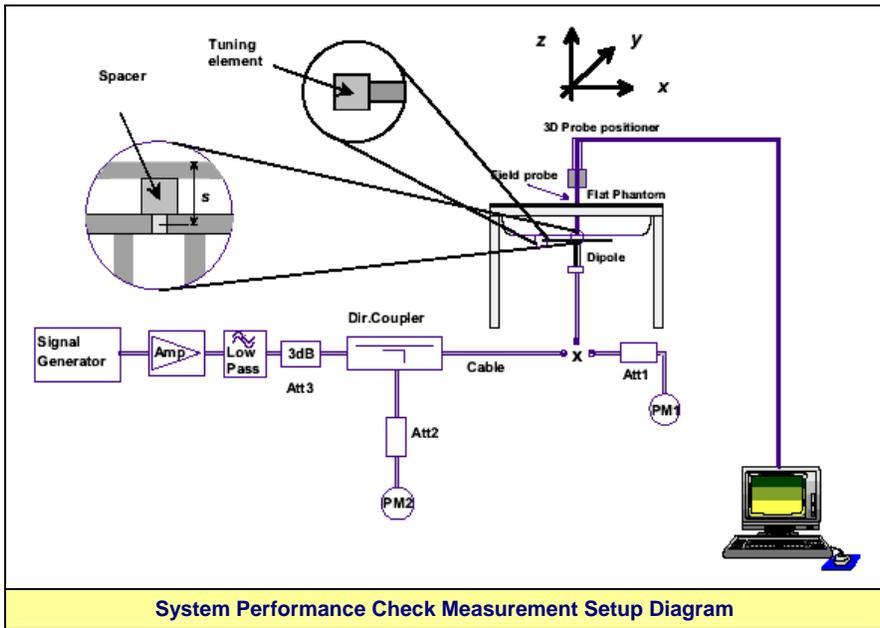

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 12 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

11.0 SIMULATED EQUIVALENT TISSUES

The simulated equivalent tissue recipe listed in the table below is derived from the SAR system manufacturer's suggested recipe in the DASY4 manual (see reference [10]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

2450 MHz SIMULATED TISSUE MIXTURES	
INGREDIENT	2450 MHz Body
Water	69%
Glycol Monobutyl	31%

12.0 SAR LIMITS

SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	(General Population / Uncontrolled Exposure)	(Occupational / Controlled Exposure)
Spatial Average (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 13 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

13.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASYS4, V4.7 Build 80
	Postprocessing Software: SEMCAD, V1.8 Build 186
Connecting Lines	Optical downlink for data and status info.; Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	EX3DV4
Serial No.	3600
Construction	Symmetrical design with triangular core
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Phantom(s)</u>	
Type	SAM V4.0C
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 25 liters

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 14 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

14.0 PROBE SPECIFICATION (EX3DV4)

Construction: Symmetrical design with triangular core
 Built-in shielding against static charges
 PEEK enclosure material (resistant to organic solvents, e.g. DGBE)

Calibration: Basic Broadband Calibration in air: 10-3000 MHz
 Conversion Factors (CF) for HSL 900 and HSL 1750

Frequency: 10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Directivity: ± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in tissue material (rotation normal to probe axis)

Dynamic Range: 10 μ W/g to >100 mW/g; Linearity: ± 0.2 dB
 (noise: typically < 1 μ W/g)

Dimensions: Overall length: 330 mm (Tip: 20 mm)
 Tip diameter: 2.5 mm (Body: 12 mm)
 Typical distance from probe tip to dipole centers: 1.0 mm

Application: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better than 30%.



EX3DV4 E-Field Probe

15.0 SAM TWIN PHANTOM V4.0C

The SAM Twin Phantom V4.0C is a fiberglass shell phantom with a 2.0 mm (+/-0.2 mm) shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections (see Appendix G for specifications of the SAM Twin Phantom V4.0C).



SAM Twin Phantom V4.0C

16.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. For evaluations of larger devices a Plexiglas platform is attached to the device holder.



Device Holder

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 15 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

17.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	9-Apr-14	Biennial
x	-EX3DV4 E-Field Probe	00213	3600	15-Apr-14	Annual
x	-D2450V2 Validation Dipole	00219	825	20-Apr-12	Triennial
	Side Planar Phantom	00156	161	CNR	CNR
	Barski Planar Phantom	00155	03-01	CNR	CNR
x	SPEAG SAM Twin Phantom V4.0C	00154	1033	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	17 June-14	Biennial
x	Gigatronics 80701A Power Sensor	00248	1833687	18 Feb-14	Biennial
x	Gigatronics 80701A Power Sensor	00249	1834473	17 Feb-14	Biennial
x	HP 8753ET Network Analyzer	00134	US39170292	26-Apr-12	Biennial Extended
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	08-May-14	Biennial
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 16 of 51

	Date(s) of Evaluation July 8-15, 2014	Test Report Serial No. 070414IPH-1303-SNA	Test Report Revision No. Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date August 25, 2014	Description of Test(s) Specific Absorption Rate	RF Exposure Category Gen. Pop. / Uncontrolled	

18.0 MEASUREMENT UNCERTAINTY (IEC 62209-2)

UNCERTAINTY BUDGET FOR DEVICE EVALUATION (IEC 62209-2:2010)

Source of Uncertainty	IEC 62209-2 Section	Tolerance / Uncertainty $\pm\%$	Probability Distribution	Divisor	ci 1g	ci 10g	Standard Uncertainty $\pm\%$ (1g)	Standard Uncertainty $\pm\%$ (10g)	V_i or V_{eff}
Measurement System									
Probe Calibration (2450 MHz)	7.2.2.1	6.0	Normal	1	1	1	6.0	6.0	∞
Isotropy	7.2.2.2	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
Boundary Effect	7.2.2.6	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Linearity	7.2.2.3	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
Detection Limits	7.2.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	7.2.2.7	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	7.2.2.8	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	7.2.2.9	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	7.2.4.5	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Restrictions	7.2.3.1	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	7.2.3.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Post-processing	7.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	7.2.3.4.3	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	7.2.3.4.2	3.6	Normal	1	1	1	3.6	3.6	8
Drift of Output Power (meas. SAR drift)	7.2.2.10	0	Rectangular	1.732050808	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	7.2.3.2	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
SAR Correction Algorithm for deviations in permittivity and conductivity	7.2.4.3	1.2	Normal	1	1	0.81	1.2	0.97	∞
Liquid Conductivity (measured)	7.2.4.3	4.59	Normal	1	0.78	0.71	3.6	3.3	∞
Liquid Permittivity (measured)	7.2.4.3	3.21	Normal	1	0.23	0.26	0.7	0.8	∞
Liquid Permittivity - temp. uncertainty	7.2.4.4	1.23	Rectangular	1.732050808	0.78	0.71	0.6	0.5	∞
Liquid Conductivity - temp. uncertainty	7.2.4.4	0.93	Rectangular	1.732050808	0.23	0.26	0.1	0.1	∞
Combined Standard Uncertainty	7.3.1		RSS				10.10	9.97	
Expanded Uncertainty (95% Confidence Interval)	7.3.2		k=2				20.20	19.94	

Measurement Uncertainty Table in accordance with International Standard IEC 62209-2:2010

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 17 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

19.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission, Office of Engineering and Technology - "SAR Measurement Requirements for 100 MHz to 6 GHz"; KDB 865664 D01v01r01: May 2013.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radio Communication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 4: March 2010.
- [5] IEEE Standard 1528-2013 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": June 2013.
- [6] International Standard IEC 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."
- [7] International Standard IEC 62209-2 Edition 1.0 2010-03 - "Human exposure to radio frequency fields from hand-held & body-mounted wireless communication devices - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)".
- [8] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01v05r01: May 2013.
- [9] Federal Communications Commission, Office of Engineering and Technology - "SAR Measurement Procedures for 802.11a/b/g Transmitters"; KDB 248227 D01 v01r02: May 2007.
- [10] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [11] International Standard ISO/IEC 17025:2005 - "General requirements for the competence of testing and calibration laboratories".
- [12] Federal Communications Commission - "Measurements Required: RF Power Output"; Rule Part 47 CFR §2.1046.
- [13] Industry Canada - "General Requirements and Information for the Certification of Radiocommunication Equipment", Radio Standards Specification RSS-Gen Issue 2: June 2007.

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 18 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX A - SAR MEASUREMENT PLOTS

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 19 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Plot B1

Date Tested: 07/08/2014

DUT: Garmin A4AVGL00; Serial: Not Specified

Program Notes: Ambient Temp: 24C; Fluid Temp: 24.1C; Barometric Pressure: 101.9 kPa; Humidity: 33%

Communication System: WiFi

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used (interpolated): $f = 2412 \text{ MHz}$; $\sigma = 1.87 \text{ mho/m}$; $\epsilon_r = 51.1$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.26, 6.26, 6.26); Calibrated: 15/04/2014
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 09/04/2014
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

B1 - 2412 MHz 100% DC Max Tx/Area Scan (13x19x1): Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.050 mW/g


B1 - 2412 MHz 100% DC Max Tx/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.971 V/m; Power Drift = 4.76 dB

Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.021 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.061 mW/g

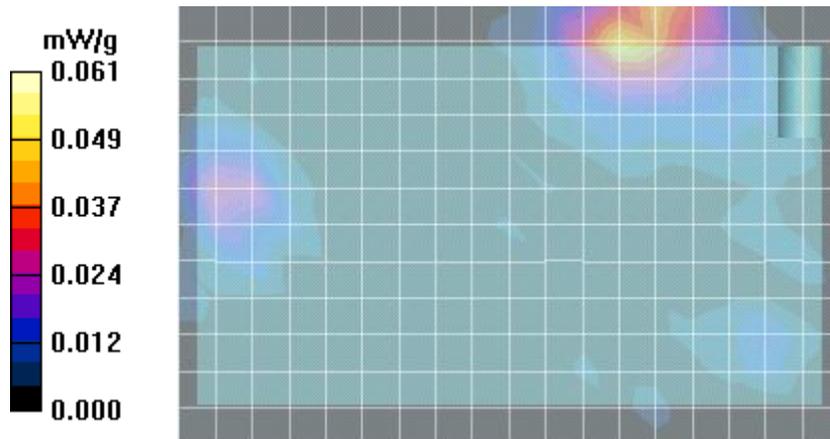

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 20 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Plot B2

Date Tested: 07/08/2014

DUT: Garmin A4AVGL00; Serial: Not Specified

Program Notes: Ambient Temp: 24C; Fluid Temp: 24.1C; Barometric Pressure: 101.9 kPa; Humidity: 33%

Communication System: WiFi

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used (interpolated): $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 51$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.26, 6.26, 6.26); Calibrated: 15/04/2014
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 09/04/2014
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASy4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

B2 - 2462 MHz 100% DC Max Tx/Area Scan (13x19x1): Measurement grid: dx=10mm, dy=10mm


Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.127 mW/g

B2 - 2462 MHz 100% DC Max Tx/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.866 V/m; Power Drift = 2.99 dB

Peak SAR (extrapolated) = 0.229 W/kg


SAR(1 g) = 0.103 mW/g; SAR(10 g) = 0.048 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.135 mW/g

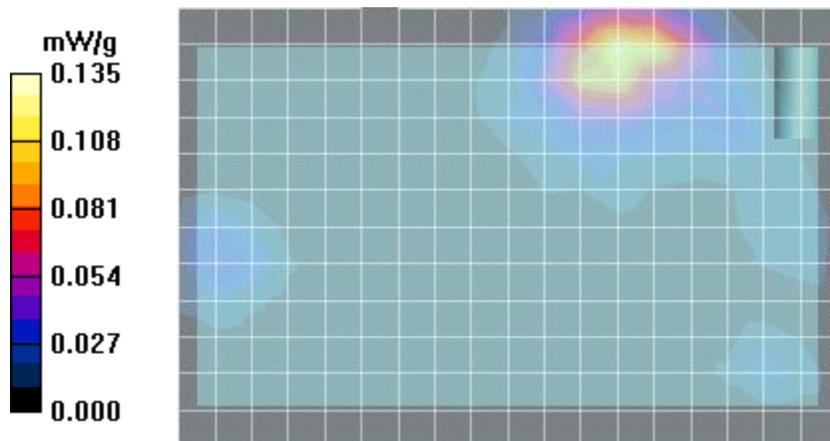

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 21 of 51

Z-Axis Scan

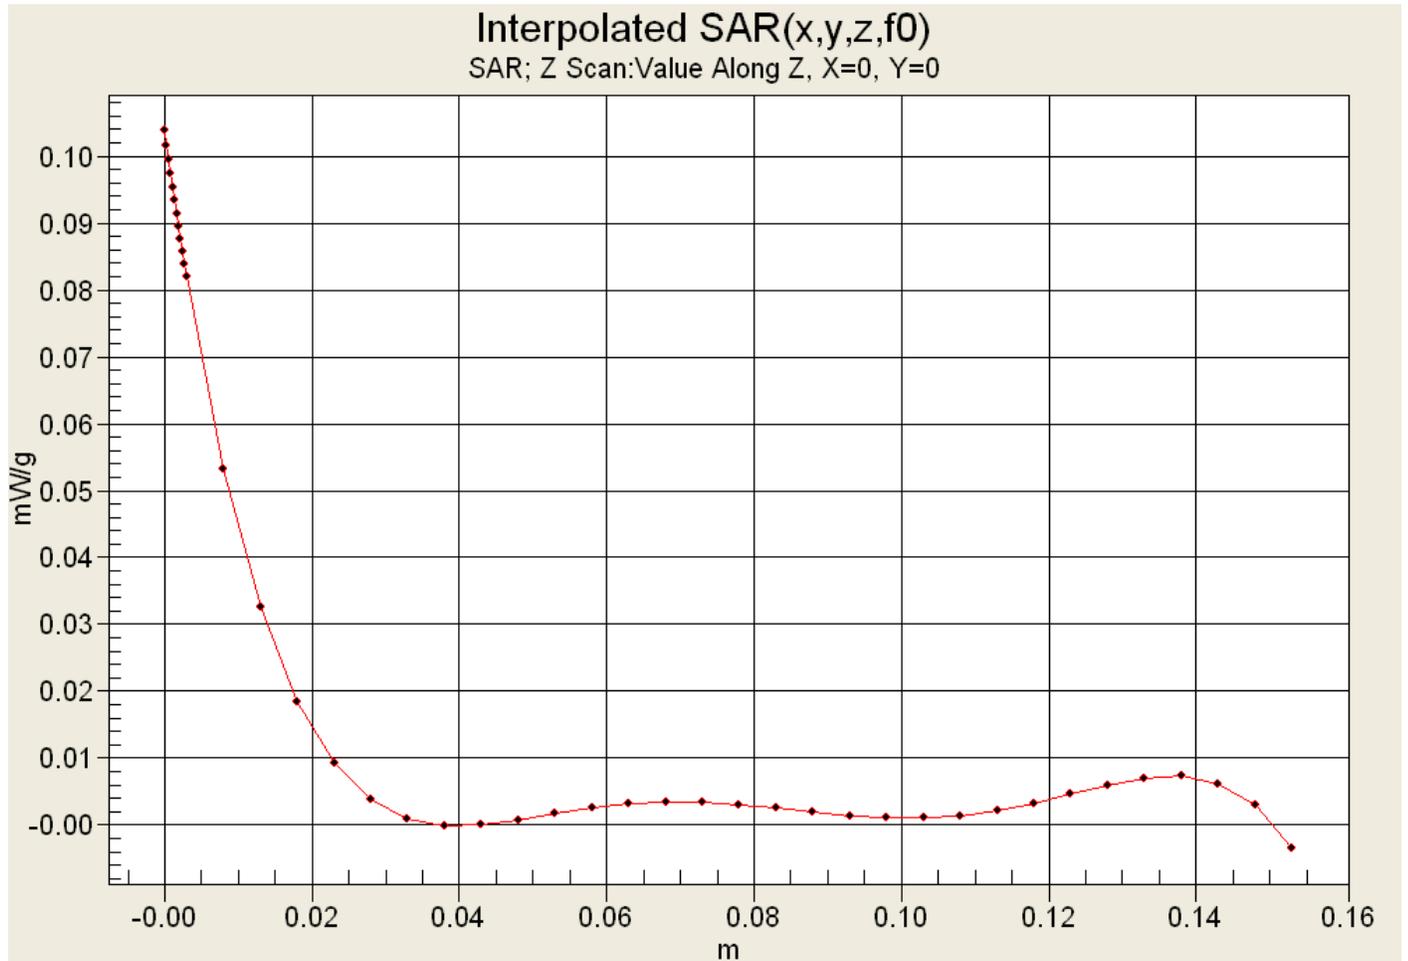

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Plot B3

Date Tested: 07/10/2014

DUT: Garmin A4AVGL00; Serial: Not Specified

Program Notes: Ambient Temp: 24C; Fluid Temp: 24.1C; Barometric Pressure: 101.9 kPa; Humidity: 34%

Communication System: WiFi

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used (interpolated): $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 51$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.26, 6.26, 6.26); Calibrated: 15/04/2014
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 09/04/2014
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

B3 - 2462 MHz 100% DC Max Tx/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.498 mW/g

B3 - 2462 MHz 100% DC Max Tx/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 9.39 V/m; Power Drift = -0.097 dB

Peak SAR (extrapolated) = 0.868 W/kg

SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.161 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.524 mW/g

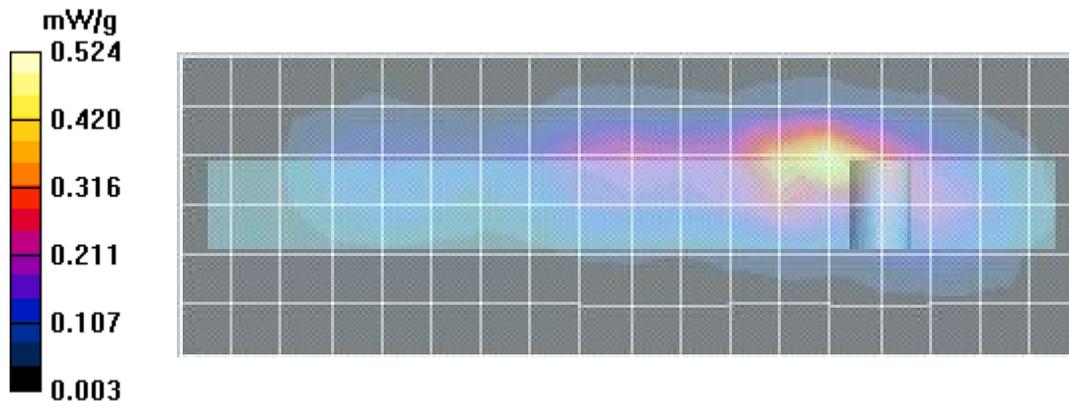

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 23 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Plot B4

Date Tested: 07/10/2014

DUT: Garmin A4AVGL00; Serial: Not Specified

Program Notes: Ambient Temp: 24C; Fluid Temp: 24.1C; Barometric Pressure: 101.9 kPa; Humidity: 34%

Communication System: WiFi

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used (interpolated): $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 51$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.26, 6.26, 6.26); Calibrated: 15/04/2014
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 09/04/2014
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

B4 - 2462 MHz 100% DC Max Tx 5.5Mbps Top/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.436 mW/g

B4 - 2462 MHz 100% DC Max Tx 5.5Mbps Top/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 11.6 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 0.991 W/kg

SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.173 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.577 mW/g

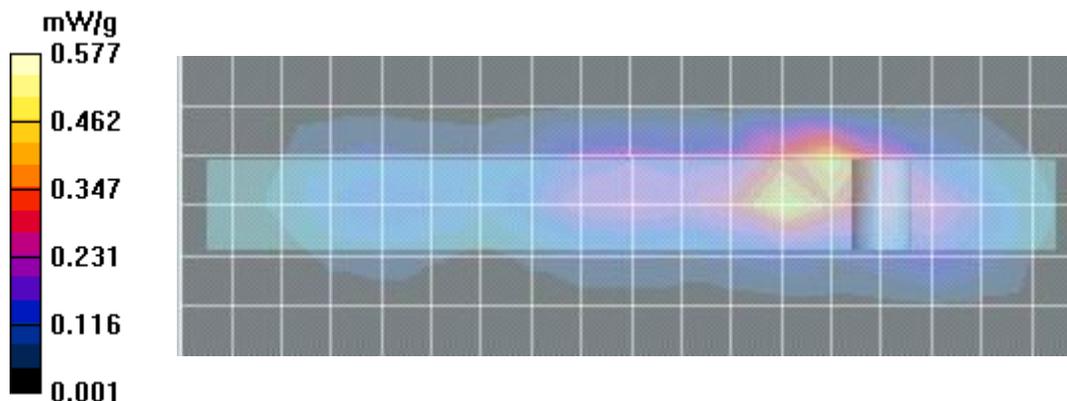

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 24 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Test Lab Certificate No. 2470.01

Plot B5

Date Tested: 07/10/2014

DUT: Garmin A4AVGL00; Serial: Not Specified

Program Notes: Ambient Temp: 24C; Fluid Temp: 24.1C; Barometric Pressure: 101.9 kPa; Humidity: 34%

Communication System: WiFi

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used (interpolated): $f = 2462 \text{ MHz}$; $\sigma = 1.94 \text{ mho/m}$; $\epsilon_r = 51$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.26, 6.26, 6.26); Calibrated: 15/04/2014
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 09/04/2014
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASy4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

B5 - 2462 MHz 100% DC Max Tx 5.5Mbs Back/Area Scan (13x19x1): Measurement grid: dx=10mm, dy=10mm


Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.15 mW/g

B5 - 2462 MHz 100% DC Max Tx 5.5Mbs Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.96 V/m; Power Drift = -0.215 dB
Peak SAR (extrapolated) = 2.70 W/kg
SAR(1 g) = 0.977 mW/g; SAR(10 g) = 0.460 mW/g


Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.49 mW/g

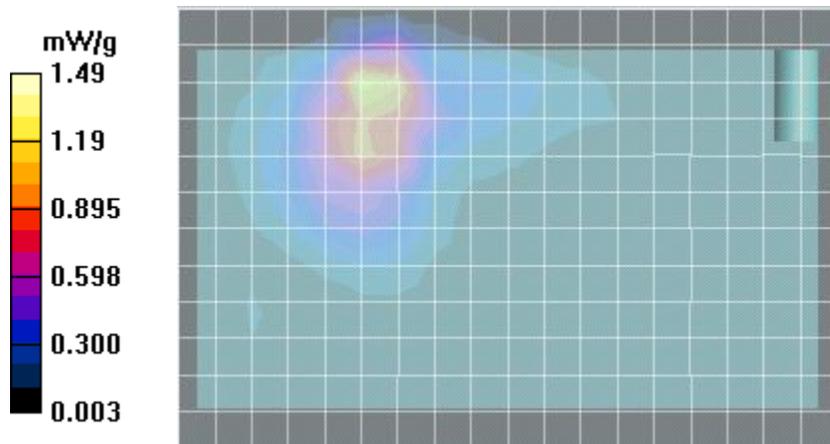

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 25 of 51

Z-Axis Scan

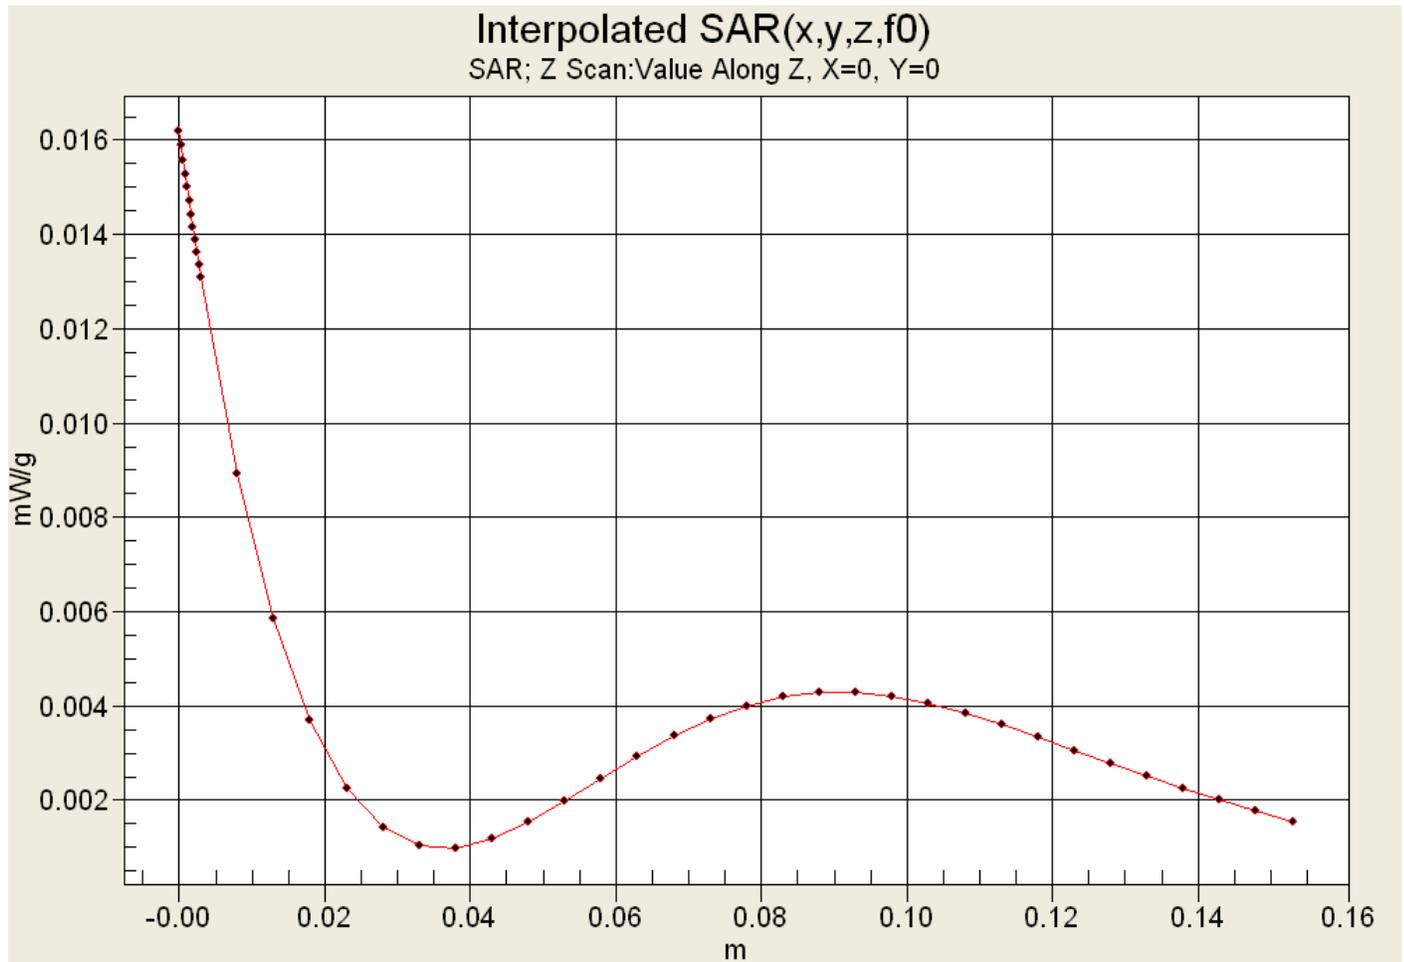

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Plot B11

Date Tested: 07/11/2014

DUT: Garmin A4AVGL00; Serial: Not Specified

Program Notes: Ambient Temp: 23C; Fluid Temp: 23.5; Barometric Pressure: 101.5 kPa; Humidity: 30%

Communication System: WiFi

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.26, 6.26, 6.26); Calibrated: 15/04/2014
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 09/04/2014
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

B11 2462 MHz 100% DC Max Tx Back/Area Scan (13x19x1): Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.03 mW/g

B11 2462 MHz 100% DC Max Tx Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.67 V/m; Power Drift = -0.317 dB

Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.477 mW/g


Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.70 mW/g

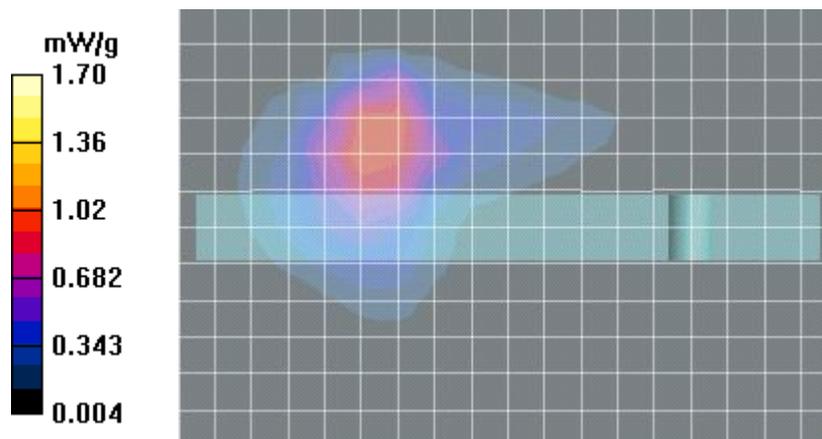

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 27 of 51

Z-Axis Scan

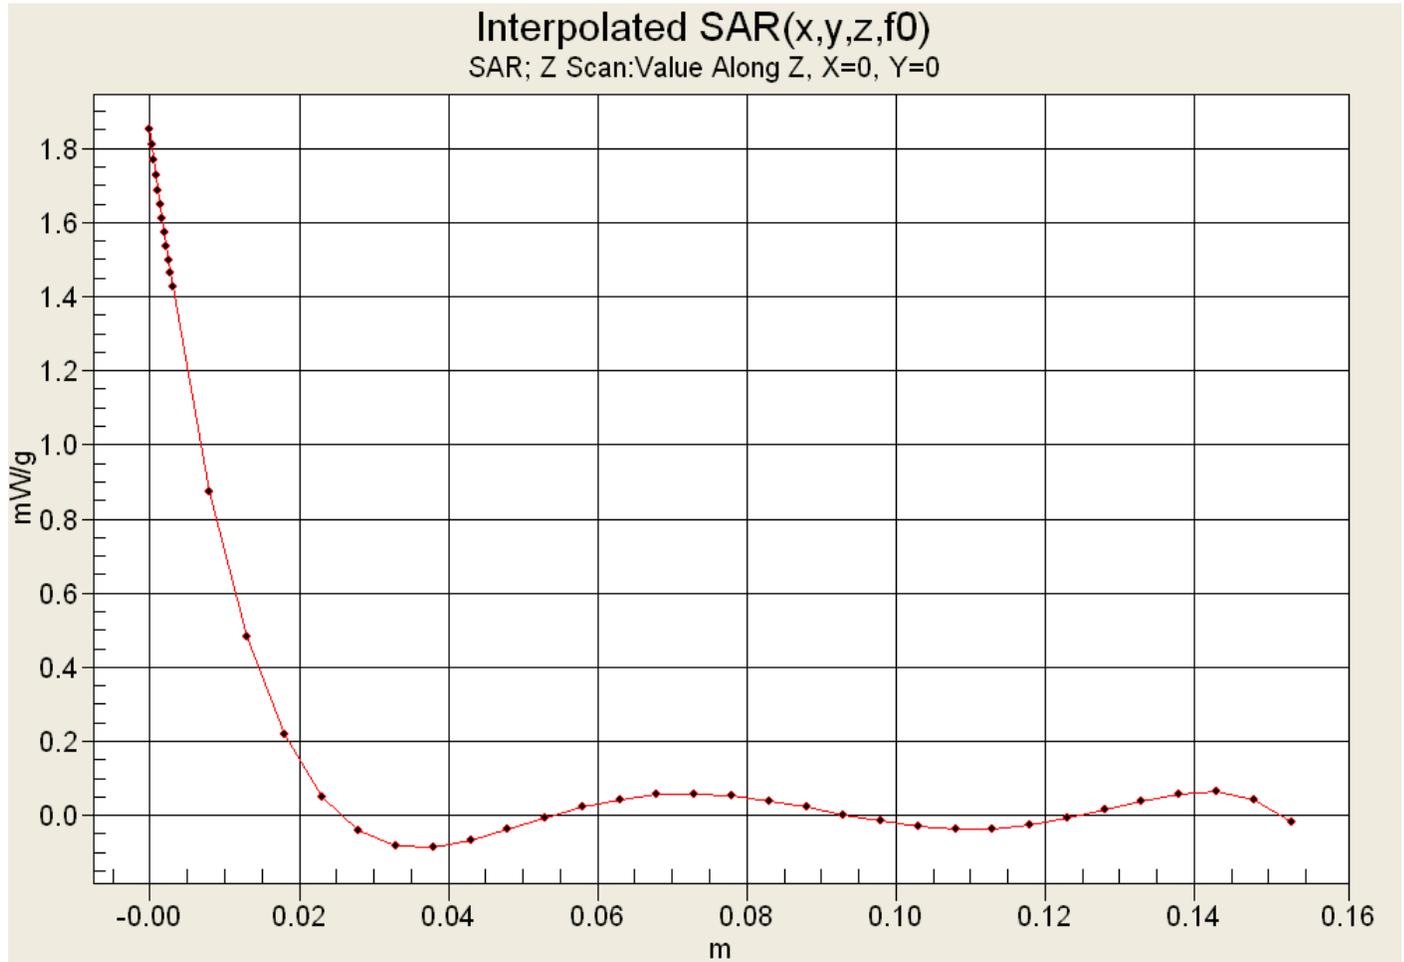

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Plot B14

Date Tested: 07/15/2014

DUT: Garmin A4AVGL00; Serial: Not Specified

Program Notes: Ambient Temp: 24C; Fluid Temp: 22.6C; Barometric Pressure: 101.7 kPa; Humidity: 34%

Communication System: WiFi

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.26, 6.26, 6.26); Calibrated: 15/04/2014
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 09/04/2014
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

B14 2462 MHz 100% DC Max Tx Top/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.441 mW/g

B14 2462 MHz 100% DC Max Tx Top/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 11.0 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.725 W/kg

SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.142 mW/g


Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.443 mW/g

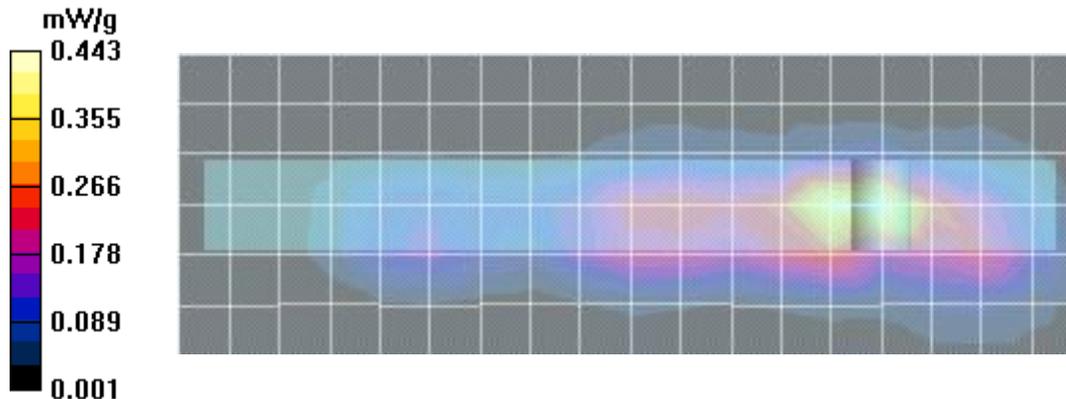

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 29 of 51

Z-Axis Scan

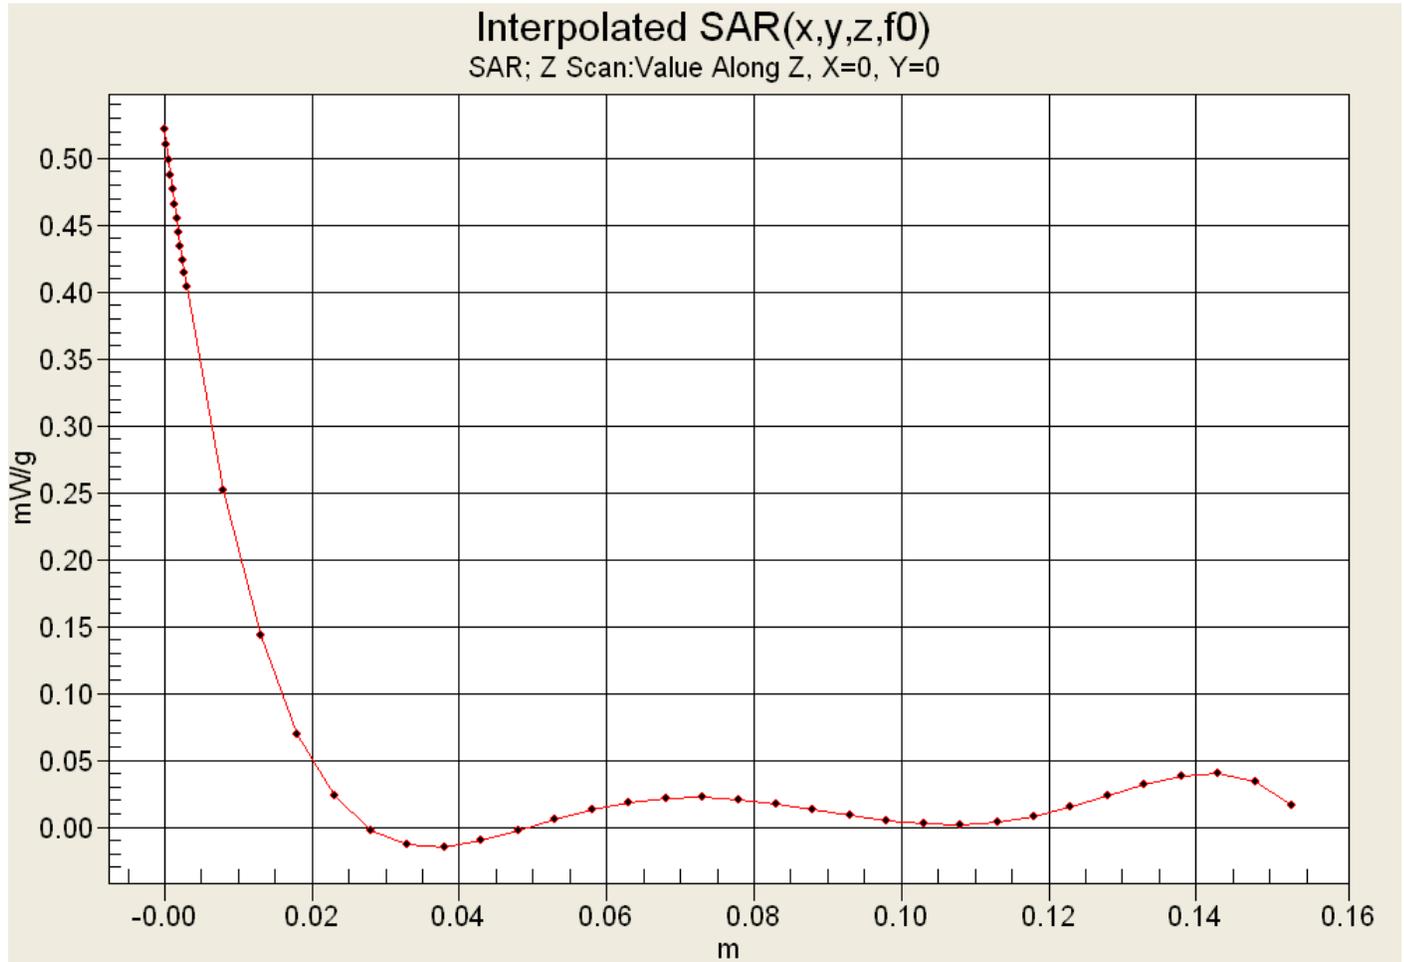

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Plot B15

Date Tested: 07/15/2014

DUT: Garmin A4AVGL00; Serial: Not Specified

Program Notes: Ambient Temp: 24C; Fluid Temp: 22.6C; Barometric Pressure: 101.7 kPa; Humidity: 34%

Communication System: WiFi

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used (interpolated): $f = 2462 \text{ MHz}$; $\sigma = 1.87 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.26, 6.26, 6.26); Calibrated: 15/04/2014
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 09/04/2014
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

B15 2462 MHz 100% DC Max Tx Bottom/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.034 mW/g

B15 2462 MHz 100% DC Max Tx Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.19 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.049 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.011 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.035 mW/g

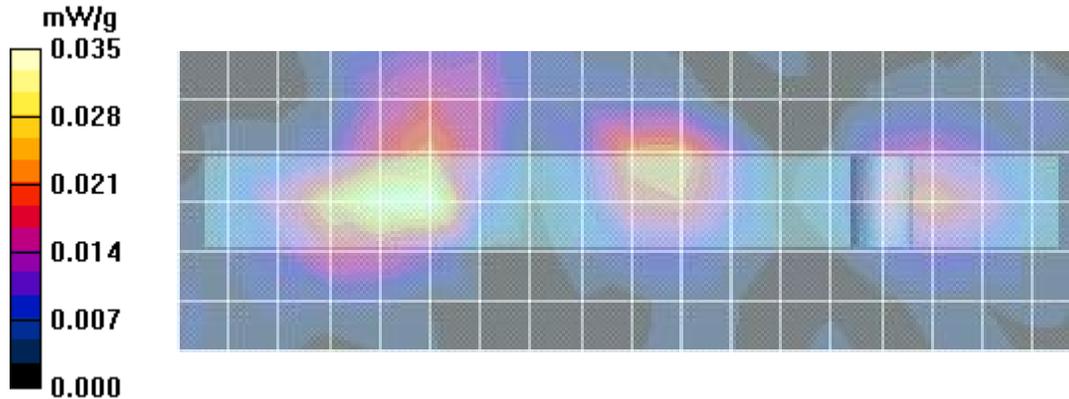

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 31 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Plot B16

Date Tested: 07/15/2014

DUT: Garmin A4AVGL00; Serial: Not Specified

Program Notes: Ambient Temp: 24C; Fluid Temp: 22.6C; Barometric Pressure: 101.7 kPa; Humidity: 34%

Communication System: WiFi

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.26, 6.26, 6.26); Calibrated: 15/04/2014
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 09/04/2014
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

B16 2462 MHz 100% DC Max Tx Left/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.046 mW/g

B16 2462 MHz 100% DC Max Tx Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 2.81 V/m; Power Drift = -0.724 dB

Peak SAR (extrapolated) = 0.084 W/kg

SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.018 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.055 mW/g

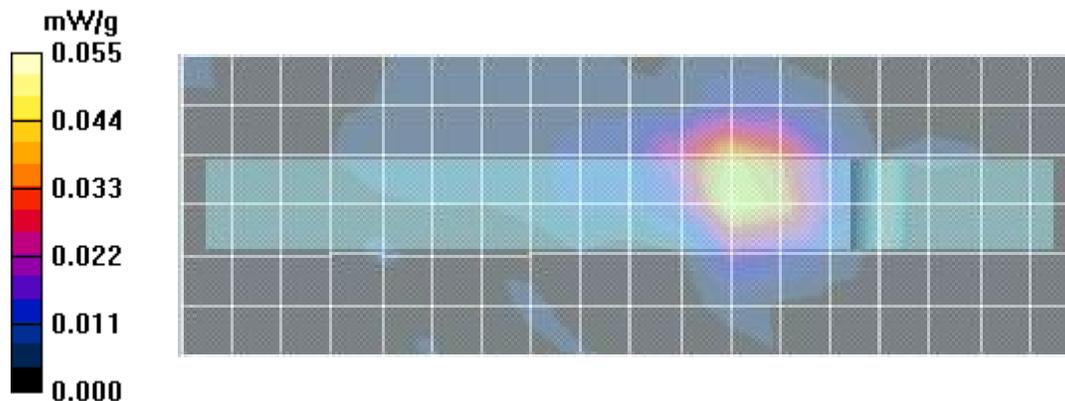

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 32 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Plot B17

Date Tested: 07/15/2014

DUT: Garmin A4AVGL00; Serial: Not Specified

Program Notes: Ambient Temp: 24C; Fluid Temp: 22.6C; Barometric Pressure: 101.7 kPa; Humidity: 34%

Communication System: WiFi

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.26, 6.26, 6.26); Calibrated: 15/04/2014
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 09/04/2014
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

B17 2462 MHz 100% DC Max Tx Right/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.064 mW/g

B17 2462 MHz 100% DC Max Tx Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.48 V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 0.081 W/kg

SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.024 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.058 mW/g

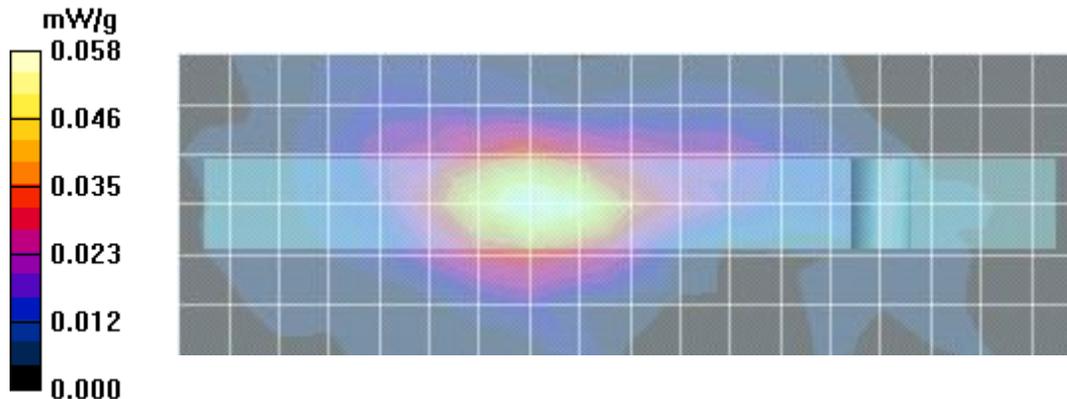

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 33 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 34 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 07/08/2014

System Performance Check - 2450 MHz Dipole - Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 825; Calibrated: 25/04/2012

Program Notes: Ambient Temp: 24C; Fluid Temp: 24.1C; Date: July 8 2014; Humidity: 33%

Communication System: CW


Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 51$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.26, 6.26, 6.26); Calibrated: 15/04/2014
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 09/04/2014
- Phantom: SAM with CRP; Type: SAM; Serial: Not Specified
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


2450 MHz Dipole d=10mm P=250mW 2/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 16.2 mW/g

2450 MHz Dipole d=10mm P=250mW 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 95.4 V/m; Power Drift = 0.046 dB
Peak SAR (extrapolated) = 29.0 W/kg
SAR(1 g) = 13.9 mW/g; SAR(10 g) = 6.4 mW/g
Maximum value of SAR (measured) = 18.3 mW/g

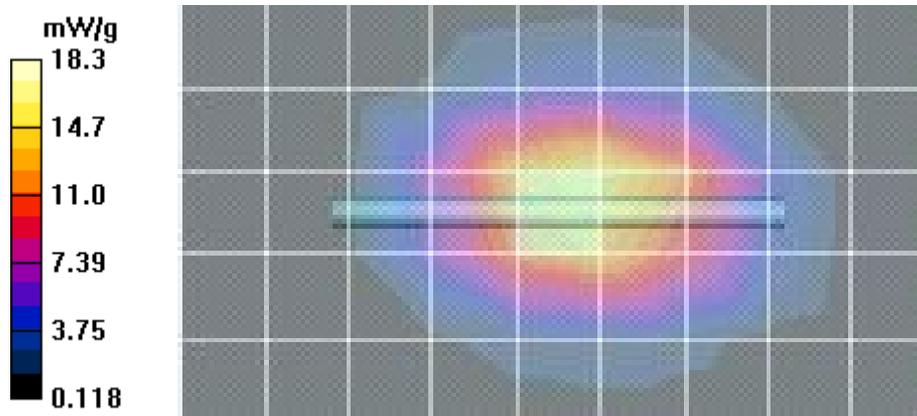

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 35 of 51

Z-Axis Scan

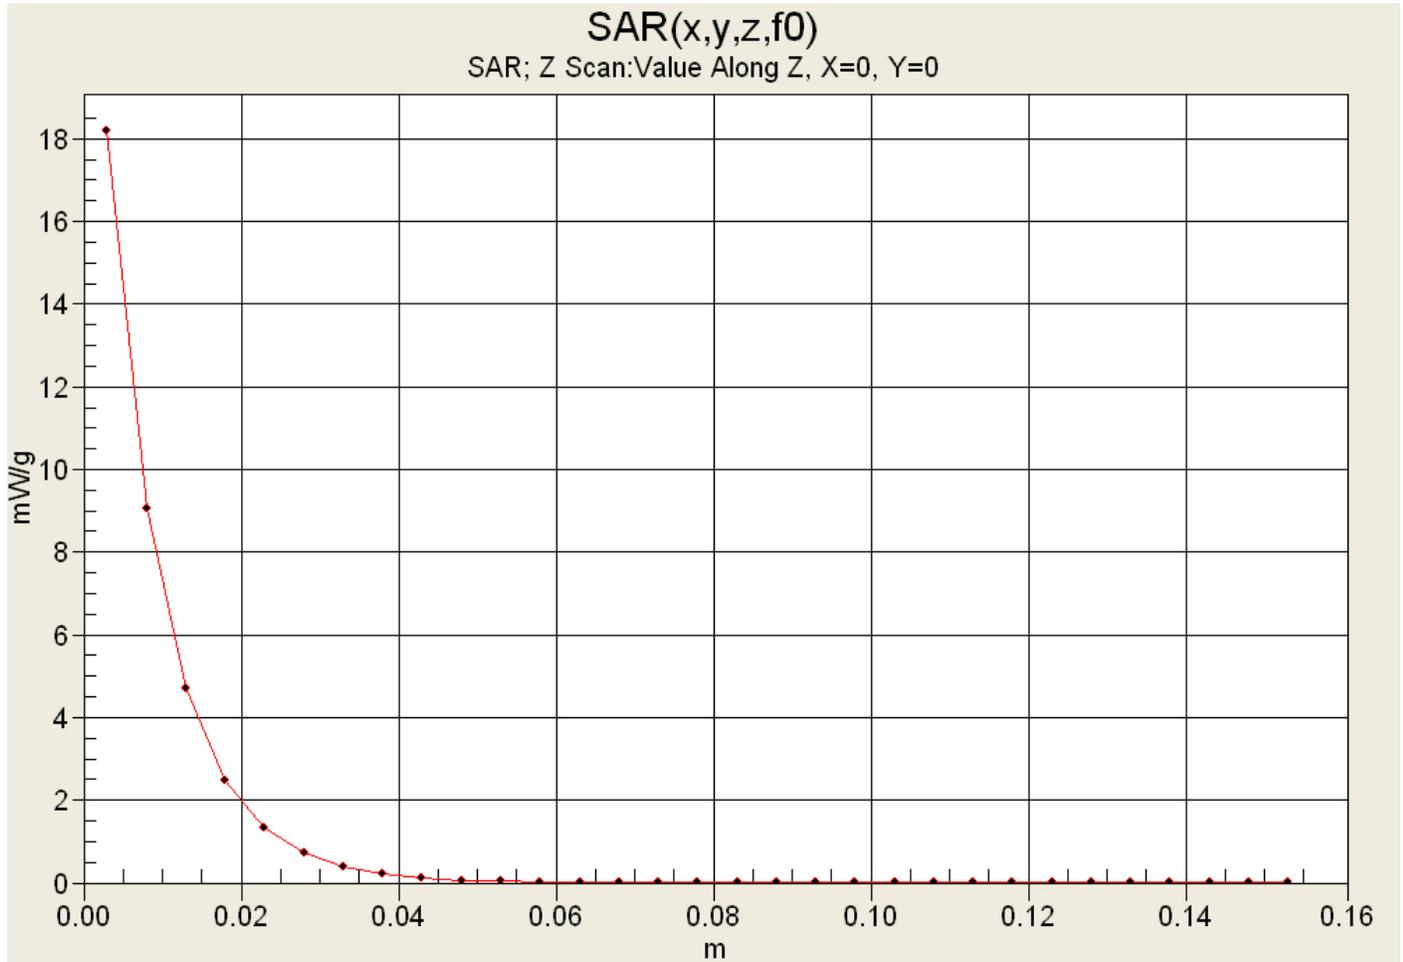

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 07/14/2014

System Performance Check - 2450 MHz Dipole - Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 825; Calibrated: 25/04/2012

Program Notes: Ambient Temp: 27C; Fluid Temp: 23.4C; Date: July 14 2014; Humidity: 32%

Communication System: CW


Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.87 \text{ mho/m}$; $\epsilon_r = 51.7$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.26, 6.26, 6.26); Calibrated: 15/04/2014
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 09/04/2014
- Phantom: SAM with CRP; Type: SAM; Serial: Not Specified
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


2450 MHz Dipole d=10mm P=250mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 15.3 mW/g

2450 MHz Dipole d=10mm P=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 95.8 V/m; Power Drift = -0.067 dB
 Peak SAR (extrapolated) = 27.2 W/kg
SAR(1 g) = 13.2 mW/g; SAR(10 g) = 6.15 mW/g
 Maximum value of SAR (measured) = 17.5 mW/g

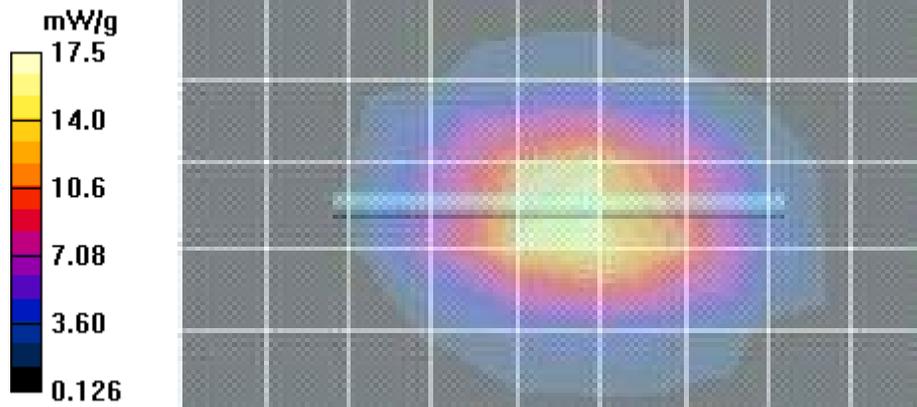

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 37 of 51

Z-Axis Scan

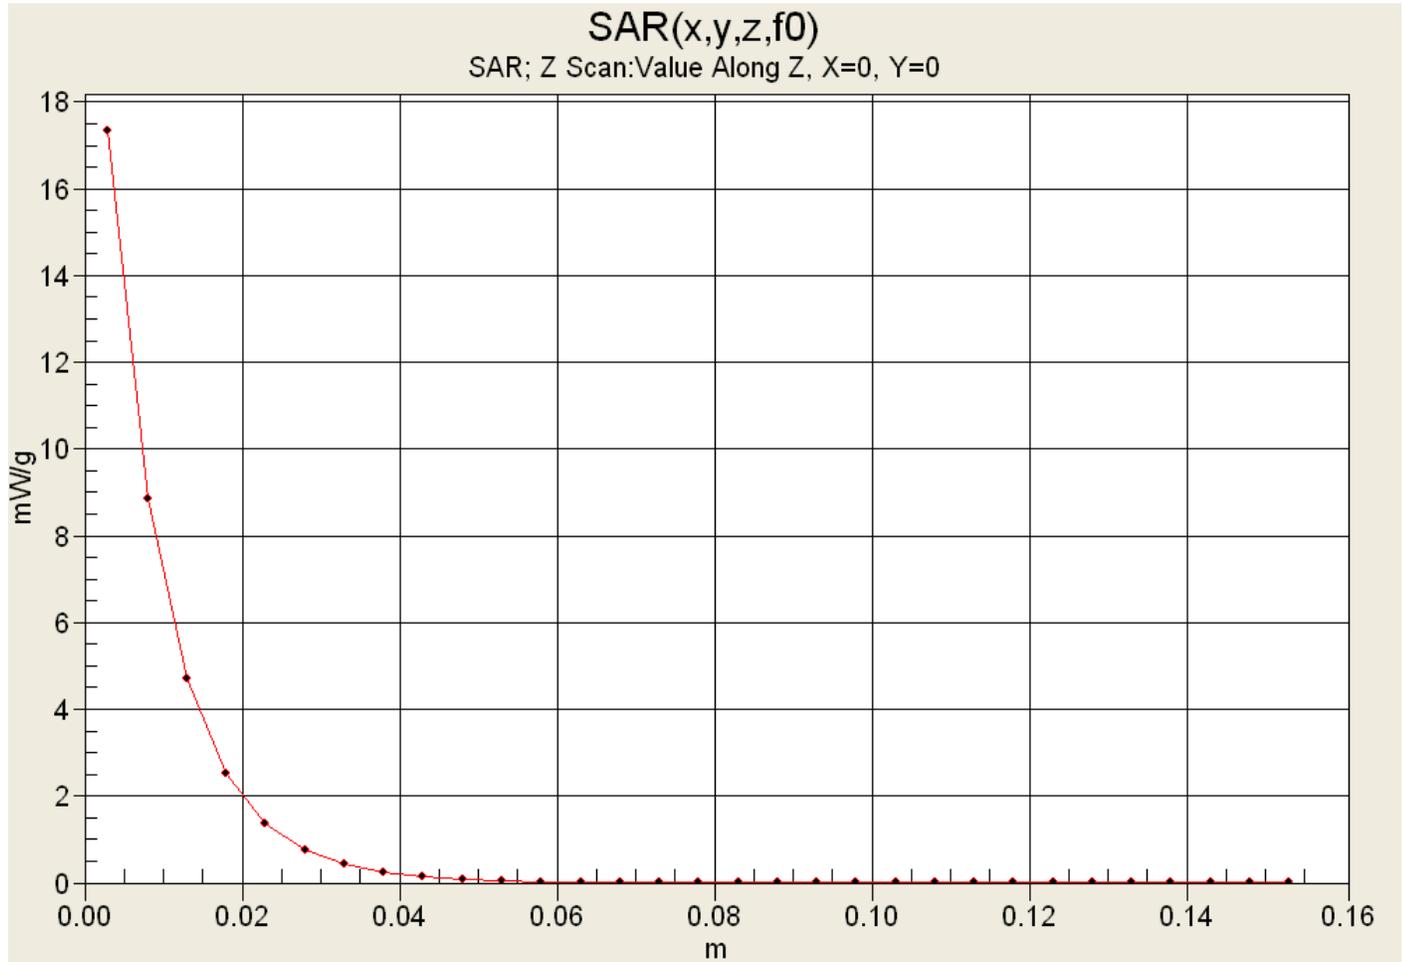

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 39 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

2450 MHz Body

Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 08/Jul/2014
 Frequency(GHz)
 FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	51.12	1.80
2.3600	52.82	1.86	51.12	1.80
2.3700	52.81	1.87	51.25	1.84
2.3800	52.79	1.88	51.15	1.83
2.3900	52.78	1.89	51.35	1.85
2.4000	52.77	1.90	51.04	1.86
2.4100	52.75	1.91	51.04	1.87
2.4200	52.74	1.92	51.14	1.88
2.4300	52.73	1.93	51.03	1.89
2.4400	52.71	1.94	51.01	1.90
2.4500	52.70	1.95	51.01	1.92
2.4600	52.69	1.96	50.97	1.93
2.4700	52.67	1.98	51.01	1.99
2.4800	52.66	1.99	51.06	1.99
2.4900	52.65	2.01	50.90	2.00
2.5000	52.64	2.02	50.96	2.00
2.5100	52.62	2.04	50.89	2.03
2.5200	52.61	2.05	51.04	2.02
2.5300	52.60	2.06	50.75	2.02
2.5400	52.59	2.08	50.83	2.05
2.5500	52.57	2.09	50.90	2.07

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 40 of 51

	<u>Date(s) of Evaluation</u> July 8-15, 2014	<u>Test Report Serial No.</u> 070414IPH-1303-SNA	<u>Test Report Revision No.</u> Rev. 0.1 (Draft Release)	
	<u>Test Report Issue Date</u> August 25, 2014	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

2450 MHz Body

Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 14/Jul/2014
 Frequency(GHz)
 FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	51.95	1.70
2.3600	52.82	1.86	51.96	1.72
2.3700	52.81	1.87	51.90	1.75
2.3800	52.79	1.88	52.10	1.74
2.3900	52.78	1.89	51.83	1.76
2.4000	52.77	1.90	51.96	1.78
2.4100	52.75	1.91	51.83	1.81
2.4200	52.74	1.92	51.82	1.82
2.4300	52.73	1.93	51.97	1.83
2.4400	52.71	1.94	51.76	1.86
2.4500	52.70	1.95	51.72	1.87
2.4600	52.69	1.96	51.74	1.87
2.4700	52.67	1.98	51.85	1.88
2.4800	52.66	1.99	51.54	1.90
2.4900	52.65	2.01	51.61	1.91
2.5000	52.64	2.02	51.52	1.93
2.5100	52.62	2.04	51.51	1.93
2.5200	52.61	2.05	51.54	1.95
2.5300	52.60	2.06	51.61	1.97
2.5400	52.59	2.08	51.50	1.99
2.5500	52.57	2.09	51.56	1.99

Applicant:	Garmin International Inc.	FCC ID:	IPH-02422	IC:	1792A-02422	
Model:	A4AVGL00	DUT Type:	Wireless GPS Device			
2014 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 41 of 51