



Test Report Serial Number:

45461363-R1.4

Test Report Date:

9 December 2016

Project Number:

1358

SAR Test Report - New Certification

Applicant:



Garmin International Inc.
1200 East 151 St.
Olathe, KS, 66062
USA

FCC ID:

IPH-03101

Product Model Number / HVIN

A03101

Maximum Reported 1g SAR

FCC	Hand	1.40	W/kg
IC	Hand	1.47	
General Pop. Limit:		4.00	

IC Registration Number

1792A-03101

Product Name / PMN

A03101

In Accordance With:

FCC 47 CFR §2.1093

Radiofrequency Radiation Exposure Evaluation: Portable Devices

IC RSS-102 Issue 5

Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

Approved By:

Ben Hewson, President

Celltech Labs Inc.
21-364 Lougheed Rd.
Kelowna, BC, V1X 7R8
Canada



Test Lab Certificate: 2470.01

**Industry
Canada**

IC Registration 3874A-1



FCC Registration: 714830

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

Table of Contents

1.0 DOCUMENT CONTROL.....	3
2.0 NORMATIVE REFERENCES.....	3
3.0 CLIENT AND DEVICE INFORMATION.....	4
4.0 STATEMENT OF COMPLIANCE	5
5.0 SAR MEASUREMENT SYSTEM.....	6
6.0 RF CONDUCTED POWER MEASUREMENT.....	7
7.0 NUMBER OF TEST CHANNELS (N_C).....	7
8.0 ACCESSORIES EVALUATED.....	7
9.0 SAR MEASUREMENT SUMMARY	8
10.0 SCALING OF MAXIMUM MEASURE SAR.....	9
11.0 SAR EXPOSURE LIMITS	11
12.0 DETAILS OF SAR EVALUATION.....	12
13.0 MEASUREMENT UNCERTAINTIES.....	13
14.0 FLUID DIELECTRIC PARAMETERS	15
15.0 SYSTEM VERIFICATION TEST RESULTS.....	17
16.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	18
17.0 TEST EQUIPMENT LIST.....	20
18.0 FLUID COMPOSITION	21
APPENDIX A – SYSTEM VERIFICATION PLOTS.....	22
APPENDIX B – MEASUREMENT PLOTS OF MAXIMUMUM MEASURED SAT.....	24
APPENDIX C - SETUP PHOTOS.....	31
APPENDIX D - DUT PHOTOS.....	35
APPENDIX E – PROBE CALIBRATION	36
APPENDIX F – DIPOLE CALIBRATION	37
APPENDIX G - PHANTOM.....	38

1.0 DOCUMENT CONTROL

Tested By:	Art Voss		
Prepared By:	Art Voss		
Reviewed By:	Ben Hewson		
Issue Number	Description	By	Issue Date
1.0	Initial Release	Art Voss	10 October 2016
1.1	Correction to Cover Page	Art Voss	13 October 2016
1.2	Correction to Model Numbers	Art Voss	22 November 2016
1.3	Correction Per TCB	Art Voss	8 November 2016
1.4	Correction Per TCB	Art Voss	9 November 2016

2.0 NORMATIVE REFERENCES

Normative References*	
ANSI / ISO 17025:2005	General Requirements for competence of testing and calibration laboratories
FCC CFR Title 47 Part 2 Title 47: Part 2.1093:	Code of Federal Regulations Telecommunication Radiofrequency Radiation Exposure Evaluation: Portable Devices
Health Canada Safety Code 6 (2015)	Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3kHz to 300GHz
Industry Canada Spectrum Management & Telecommunications Policy RSS-102 Issue 5:	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
IEEE International Committee on Electromagnetic Safety IEEE 1528-2013:	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEC International Standard IEC 62209-2 2010	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 2
FCC KDB KDB 865664 D01v01r04	SAR Measurement Requirements for 100MHz to 6GHz
FCC KDB KDB 865664 D02v01r02	RF Exposure Compliance Reporting and Documentation Considerations
FCC KDB KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
FCC KDB KDB 248227 D01v02r02	SAR Test Guidance for IEEE 802.11 (WiFi) Transmitters
* When the issue number or issue date is omitted, the latest version is assumed.	

3.0 CLIENT AND DEVICE INFORMATION

Client Information					
Applicant Name	Garmin International Inc.				
Applicant Address	1200 East 151 St				
	Olathe, KS, 66062				
	USA				
DUT Information					
Device Identifier(s):	<table border="1"> <tr> <td>FCC ID:</td> <td>IPH-03101</td> </tr> <tr> <td>IC:</td> <td>1792A-03101</td> </tr> </table>	FCC ID:	IPH-03101	IC:	1792A-03101
FCC ID:	IPH-03101				
IC:	1792A-03101				
Type of Equipment:	Mobile GPS				
Device Model(s) / HVIN:	A03101				
Device Marketing Name / PMN:	A03101				
Test Sample Serial No.:	T/A Sample - Identical Prototype				
Transmit Frequency Range:	BLE: 2448MHz				
	WiFi: 2412-2462 MHz				
Number of Channels:	n/a				
Manuf. Max. Rated Output Power:	BLE: 4dBm, WiFi: 20dBm				
Modulation:	DSSS, OFDM, MCS0-7, CW				
Duty Cycle:	100%				
DUT Power Source:	5VDC Li-Ion				
Deviation(s) from standard/procedure:	None				
Modification of DUT:	None				

4.0 STATEMENT OF COMPLIANCE

This measurement report demonstrates that the:

Applicant: Garmin International Inc.	Model / HVIN: A03101
--	--------------------------------

complies with the SAR (Specific Absorption Rate) RF exposure requirements and limits specified in the following:

Standard(s): FCC 47 CFR §2.1093 Health Canada's Safety Code 6	Measurement Procedure(s): FCC KDB 865664 D01v01r04, FCC KDB 447498 D01v06, FCC KDB 248227 D01v02r02 Industry Canada RSS-102 Issue 5 IEEE Standard 1528-2013, IEC 62209-2 2010
---	---

Use Group: ☐ Occupational / Controlled	☒ General Population / Uncontrolled
---	--

Reason for Issue: New Certification

A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used during this evaluation, equipment used and the various provisions of the rules are included within this test report.

Note: This device is intended to be installed as a Mobile GPS device. However in some cases, this device could be hand-held during certain WiFi and/or Bluetooth operations. The manufacturer chose to have this device evaluated for Extremity SAR.

5.0 SAR MEASUREMENT SYSTEM

SAR Measurement System

Celltech Labs Inc. SAR measurement facility employs a Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, a robot controller, a computer, a near-field probe, a probe alignment sensor, an Elliptical Planar Phantom (ELI) phantom and a specific anthropomorphic mannequin (SAM) phantom for Head and/or Body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller and a teach pendant (Joystick) to control the robot's servo motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical form the DAE to digital electronic signal and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, a command decoder and a control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.



DASY 4 SAR System with SAM Phantom



DASY 4 Measurement Controller

6.0 RF CONDUCTED POWER MEASUREMENT

Table 6.0

Conducted Power Measurements						
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Rated Power (W)	Delta (dBm)	SAR Test Channel (Y/N)
1	2412	19.30	20.00	0.10	-0.70	Y
6	2437	19.40	20.00	0.10	-0.60	Y
11	2462	19.20	20.00	0.10	-0.80	Y
Notes:						
The Conducted Power of the DUT was measured at the antenna port, while plugged into a USB charger and transmitting at 100% duty cycle.						

7.0 NUMBER OF TEST CHANNELS (N_c)

As per FCC KDB 248277 D01v02r02, the required 802.11 test channels are Ch1, Ch6 and Ch 11

8.0 ACCESSORIES EVALUATED

There are no handheld accessories.

9.0 SAR MEASUREMENT SUMMARY

Table 9.0

Measured SAR Results (10g) - BODY Configuration (FCC/ISED)															
Date	Plot ID	DUT		Test Frequency (MHz)	Modulation	Accessories				DUT Spacing		Conducted Power (dBm)	Measured SAR (10g)		SAR Drift** (dB)
		M/N	Type			Antenna ID	Battery ID	Body ID	Audio ID	DUT (mm)	Antenna (mm)		100% DC (W/kg)	50% DC (W/kg)	
29 Sep 2016	B5	A03101	n/a	2412	CW	n/a	n/a	n/a	n/a	0	0	19.3	1.160		-0.200
29 Sep 2016	B6	A03101	n/a	2437	CW	n/a	n/a	n/a	n/a	0	0	19.4	1.130		-0.200
29 Sep 2016	B7	A03101	n/a	2462	CW	n/a	n/a	n/a	n/a	0	0	19.2	1.070		-0.200
30 Sep 2016	B9*	A03101	n/a	2412	CW	n/a	n/a	n/a	n/a	0	0	19.3	0.287		-0.200
SAR Limit							Spatial Peak			Head/Body		RF Exposure Category			
FCC 47 CFR 2.1093				Health Canada Safety Code 6			10 Gram Average			4.0 W/kg		General Population/User Unaware			
* This configuration was tested on the edge of the DUT															
** The manufacturer states that this device will be plugged into a USB charger or USB computer port while being used in a hand-held configuration. This device was tested while plugged into a USB charger as a result, the SAR Drift could not be accurately ascertained. A drift assesment was made by measuring the conducted power over a period of time equal to the overall SAR test time as it was determind the SAR Drift was less than 0.2dB. A SAR Drift factor of -0.2dB is used for the purposes of SAR scaling.															

10.0 SCALING OF MAXIMUM MEASURE SAR

Table 10.0

Scaling of Maximum Measured SAR ⁽¹⁾									
Plot ID	Configuration	Freq	Measured Fluid Deviation		Measured Conducted Power	Measured Drift	Measured SAR (10g)		
		(MHz)	Permittivity	Conductivity	(dBm)	(dB)	(W/kg)		
B5	Body	2412	-4.60%	3.66%	19.3	-0.200	1.160		
Step 1									
Fluid Sensitivity Adjustment									
Plot ID	Scale Factor		X	Measured SAR		=	Step 1 Adjusted SAR (10g)		
	(%)			(W/kg)			(W/kg)		
	1.000%		X			=	0.000		
B5	1.000%		X	1.160		=	1.160		
Step 2									
Manufacturer's Tune-Up Tolerance									
Plot ID	Measured Conducted Power		Rated Power		Delta	Step 1 Adjusted SAR	Step 2 Adjusted SAR (10g)		
	(dBm)		(dBm)		(dB)			+	(W/kg)
						+	0.000	=	0.000
B5	19.3		20.0		-0.7	+	1.160	=	1.363
Step 3									
Simultaneous Transmission - Bluetooth and/or WiFi									
Plot ID	Rated Output Power (Pmax)	Freq	Separation Distance		Estimated SAR	Step 2 Adjusted SAR	Step 3 Adjusted SAR (10g)		
	(mW)	(MHz)	(mm)		(W/kg)			+	(W/kg)
					0.000	+	0.000	=	0.000
B5	2.5	2448	5		0.042	+	1.404	=	1.404
Step 4									
Drift Adjustment									
Plot ID	Measured Drift		+	Step 3 Adjusted SAR		=	Step 4 Adjusted SAR (10g)		
	(dB)			(W/kg)				(W/kg)	
			+	0.000		=	0.000		
B5	-0.200		+	1.404		=	1.470		
Step 5									
Reported SAR									
Plot ID	FCC				IC				
	From Steps 1 through 3				From Steps 1 through 4				
	10g SAR (W/kg)				10g SAR (W/kg)				
	0.00				0.00				
B5	1.40				1.47				

NOTES to Table 10.0

(1) Scaling of the Maximum Measured SAR is based on the highest, 100% duty cycle, Face, Body and/or Head SAR measured of ALL test channels, configurations and accessories used during THIS evaluation. The Measured Fluid Deviation parameters apply only to deviation of the tissue equivalent fluids used at the frequencies which produced the highest measured SAR. The Measured Conducted Power applies to the Conducted Power measured at the frequencies producing the highest Face and Body SAR. The Measured Drift is the SAR drift associated with that specific SAR measurement. The Reported SAR is the accumulation of all SAR Adjustments from the applicable Steps 1 through 4. The Plot ID is for identification of the SAR Measurement Plots in Annex A of this report.

NOTE: Some of the scaling factors in Steps 1 through 4 may not apply and are identified by light gray text.

Step 1

Per IEC-62209-1 and FCC KDB 865664. Scaling required only when Measured Fluid Deviation is greater than 5%. If the Measured Fluid Deviation is greater than 5%, Table 10.1 will be shown and will indicate the SAR scaling factor in percent (%). SAR is MULTIPLIED by this scaling factor only when the scaling factor is positive (+).

Step 2

Per KDB 447498. Scaling required only when the difference (Delta) between the Measured Conducted Power and the Manufacturer's Rated Conducted Power is (-) Negative. The absolute value of Delta is ADDED to the SAR.

Step 3

Per KDB 447498 4.3.2. The SAR, either measured or calculated, of ANY and ALL simultaneous transmitters must be added together and includes all contributors.

Step 4

Per IEC 62209-1. Scaling required only when Measured Drift is (-) Negative. The absolute value of Measured Drift is added to Reported or Simultaneous Reported SAR.

Step 5

The Reported SAR is the Maximum Final Adjusted Cumulative SAR from the applicable Steps 1 through 4 and are reported on Page 1 of this report.

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Art Voss, P.Eng.
Technical Manager
Celltech Labs Inc.

10 October 2016
Date



11.0 SAR EXPOSURE LIMITS

Table 11.0

SAR RF EXPOSURE LIMITS			
FCC 47 CFR§2.1093	Health Canada Safety Code 6	General Population / Uncontrolled Exposure⁽⁴⁾	Occupational / Controlled Exposure⁽⁵⁾
Spatial Average⁽¹⁾ (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak⁽²⁾ (Head and Trunk averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak⁽³⁾ (Hands/Wrists/Feet/Ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
(1) The Spatial Average value of the SAR averaged over the whole body.			
(2) The Spatial Peak value of the SAR averaged over any 1 gram of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(4) Uncontrolled environments are defined as locations where there is potential exposure to individuals who have no knowledge or control of their potential exposure.			
(5) Controlled environments are defined as locations where there is potential exposure to individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

12.0 DETAILS OF SAR EVALUATION

EVALUATION DETAILS

1	The DUT was evaluated for SAR in accordance with the procedures described in IEEE 1528, FCC KDB 865646 and RSS-102.
2	The DUT was evaluated for SAR at the maximum conducted output power level, preset by the manufacturer. The device was capable of transmitting in Continuous Wave (CW) and was testing in an unmodulated continuous transmit mode at 100% duty cycle.
3	Each SAR evaluations were performed while plugged into a USB Charger
4	The fluid temperature remained within +/-2°C from the time of the fluid dielectric parameter measurement to the completion of the SAR evaluation.
5	The fluid temperature remained within +/-0.5°C throughout the test day.

SCAN PROCEDURE

Maximum distance from the closest measurement point to phantom surface.	4 ± 1mm
Maximum probe angle normal to phantom surface.	5° ± 1°
Area Scan Spatial Resolution $\Delta X, \Delta Y$	12mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	5mm
Zoom Scan Spatial Resolution ΔZ	5mm
Zoom Scan Volume X, Y, Z	30mm x 30mm x 30mm
Phantom	SAM
Fluid Depth	150mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1 gram and 10 gram peak spatial-average SAR	

13.0 MEASUREMENT UNCERTAINTIES

Table 13.0

UNCERTAINTY BUDGET FOR DEVICE EVALUATION (IEEE 1528-2013 Table 9)

Uncertainty Component	IEEE 1528 Section	Uncertainty Value $\pm\%$	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value $\pm\%$ (1g)	Uncertainty Value $\pm\%$ (10g)	V_i or V_{eff}
Measurement System									
Probe Calibration*	E.2.1	6.6	Normal	1	1	1	6.60	6.60	∞
Axial Isotropy*	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy*	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect*	E.2.3	8.3	Rectangular	1.732050808	1	1	4.8	4.8	∞
Linearity*	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits*	E.2.4	1.0	Rectangular	1.732050808	1	1	0.6	0.6	∞
Modulation Response	E.2.5	4.0	Rectangular	1.732050808	1	1	2.3	2.3	∞
Readout Electronics*	E.2.6	1.0	Normal	1	1	1	1.0	1.0	∞
Response Time*	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time*	E.2.8	1.4	Rectangular	1.732050808	1	1	0.8	0.8	∞
RF Ambient Conditions - Noise	E.6.1	0.0	Rectangular	1.732050808	1	1	0.0	0.0	∞
RF Ambient Conditions - Reflection	E.6.1	0.0	Rectangular	1.732050808	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance*	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell*	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation*	E.5	3.9	Rectangular	1.732050808	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E.4.2	0.3	Normal	1	1	1	0.3	0.3	5
Device Holder Uncertainty*	E.4.1	3.6	Normal	1	1	1	3.6	3.6	∞
SAR Drift Measurement**	E.2.9	0.0	Rectangular	1.732050808	1	1	0.0	0.0	∞
SAR Scaling***	E.6.5	2.0	Rectangular	1.732050808	1	1	1.2	1.2	∞
Phantom and Tissue Parameters									
Phantom Uncertainty*	E.3.1	4.0	Rectangular	1.732050808	1	1	2.3	2.3	∞
SAR Correction Uncertainty	E.3.2	1.2	Normal	1	1	0.84	1.2	1.0	∞
Liquid Conductivity (measurement)	E.3.3	6.8	Normal	1	0.78	0.71	5.3	4.8	10
Liquid Permittivity (measurement)	E.3.3	5.3	Normal	1	0.23	0.26	1.2	1.4	10
Liquid Conductivity (Temperature)	E.3.2	0.1	Rectangular	1.732050808	0.78	0.71	0.1	0.0	∞
Liquid Permittivity Temperature)	E.3.2	0.0	Rectangular	1.732050808	0.23	0.26	0.0	0.0	∞
Effective Degrees of Freedom⁽¹⁾								$V_{eff} =$	873.2
Combined Standard Uncertainty			RSS				12.59	12.40	
Expanded Uncertainty (95% Confidence Interval)			k=2				25.18	24.80	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003

(1) The Effective Degrees of Freedom is > 30 therefore a coverage factor of k=2 represents an approximate confidence level of 95%.

* Provided by SPEAG

Table 13.1

Calculation of the Degrees and Effective Degrees of Freedom

$$v_i = n - 1$$

$$v_{\text{eff}} = \frac{u_c^4}{\sum_{i=1}^m \frac{c_i^4 u_i^4}{v_i}}$$

14.0 FLUID DIELECTRIC PARAMETERS

Aprel Laboratory
 Test Result for UIM Dielectric Parameter
 Mon 26/Sep/2016 12:14:50
 Freq Frequency(GHz)
 FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	50.48	1.89
2.3600	52.82	1.86	50.46	1.90
2.3700	52.81	1.87	50.43	1.92
2.3800	52.79	1.88	50.40	1.93
2.3900	52.78	1.89	50.38	1.95
2.4000	52.77	1.90	50.35	1.96
2.4100	52.75	1.91	50.33	1.98
2.4200	52.74	1.92	50.30	1.99
2.4300	52.73	1.93	50.28	2.00
2.4400	52.71	1.94	50.25	2.02
2.4500	52.70	1.95	50.23	2.03
2.4600	52.69	1.96	50.20	2.05
2.4700	52.67	1.98	50.18	2.06
2.4800	52.66	1.99	50.15	2.08
2.4900	52.65	2.01	50.13	2.09
2.5000	52.64	2.02	50.10	2.11
2.5100	52.62	2.04	50.08	2.12
2.5200	52.61	2.05	50.05	2.13
2.5300	52.60	2.06	50.02	2.15
2.5400	52.59	2.08	50.00	2.16
2.5500	52.57	2.09	49.97	2.18

Table 14.0

FLUID DIELECTRIC PARAMETERS							
Date:	26 Sep 2016	Fluid Temp:	22.2	Frequency:	2450MHz	Tissue:	Body
Freq (MHz)		Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
2350.0000		50.4800	1.8900	52.8300	1.85	-4.45%	2.16%
2360.0000		50.4600	1.9000	52.8200	1.86	-4.47%	2.15%
2370.0000		50.4300	1.9200	52.8100	1.87	-4.51%	2.67%
2380.0000		50.4000	1.9300	52.7900	1.88	-4.53%	2.66%
2390.0000		50.3800	1.9500	52.7800	1.89	-4.55%	3.17%
2400.0000		50.3500	1.9600	52.7700	1.90	-4.59%	3.16%
2410.0000		50.3300	1.9800	52.7500	1.91	-4.59%	3.66%
2412.0000	*	50.3240	1.9820	52.7480	1.91	-4.60%	3.66%
2420.0000		50.3000	1.9900	52.7400	1.92	-4.63%	3.65%
2430.0000		50.2800	2.0000	52.7300	1.93	-4.65%	3.63%
2437.0000	*	50.2590	2.0140	52.7160	1.94	-4.66%	3.98%
2440.0000		50.2500	2.0200	52.7100	1.94	-4.67%	4.12%
2450.0000		50.2300	2.0300	52.7000	1.95	-4.69%	4.10%
2460.0000		50.2000	2.0500	52.6900	1.96	-4.73%	4.59%
2462.0000	*	50.1960	2.0520	52.6860	1.96	-4.73%	4.48%
2470.0000		50.1800	2.0600	52.6700	1.98	-4.73%	4.04%
2472.0000	*	50.1740	2.0640	52.6680	1.98	-4.74%	4.14%
2480.0000		50.1500	2.0800	52.6600	1.99	-4.77%	4.52%
2490.0000		50.1300	2.0900	52.6500	2.01	-4.79%	3.98%
2500.0000		50.1000	2.1100	52.6400	2.02	-4.83%	4.46%
2510.0000		50.0800	2.1200	52.6200	2.04	-4.83%	3.92%
2520.0000		50.0500	2.1300	52.6100	2.05	-4.87%	3.90%
2530.0000		50.0200	2.1500	52.6000	2.06	-4.90%	4.37%
2540.0000		50.0000	2.1600	52.5900	2.08	-4.92%	3.85%
2550.0000		49.9700	2.1800	52.5700	2.09	-4.95%	4.31%

*Channel Frequency Tested

15.0 SYSTEM VERIFICATION TEST RESULTS

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N	S/N	
26 Sep 2016		2450	D2450V2	825	
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Body	22.2	22	24%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
50.23	52.70	-4.69%	2.03	1.95	4.10%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
13.80	13.00	6.15%	6.23	6.05	2.98%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
55.20	50.70	8.88%	24.92	23.80	4.71%
Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1. The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer. The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value. The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.					

16.0 MEASUREMENT SYSTEM SPECIFICATIONS

Table 16.0

Measurement System Specification

Specifications

Positioner	Stäubli Unimation Corp. Robot Model: RX60L
-------------------	--

Repeatability	0.02 mm
----------------------	---------

No. of axis	6
--------------------	---

Data Acquisition Electronic (DAE) System

Cell Controller

Processor	AMD Athlon XP 2400+
------------------	---------------------

Clock Speed	2.0 GHz
--------------------	---------

Operating System	Windows XP Professional
-------------------------	-------------------------

Data Converter

Features	Signal Amplifier, multiplexer, A/D converter, and control logic
-----------------	---

Software	Measurement Software: DASY4, V4.7 Build 80
	Postprocessing Software: SEMCAD, V1.8 Build 186

Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
-------------------------	---

DASY4 Measurement Server

Function	Real-time data evaluation for field measurements and surface detection
-----------------	--

Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
-----------------	--

Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
--------------------	---

E-Field Probe

Model	EX3DV4
--------------	--------

Serial No.	3600
-------------------	------

Construction	Triangular core fiber optic detection system
---------------------	--

Frequency	10 MHz to 6 GHz
------------------	-----------------

Linearity	±0.2 dB (30 MHz to 3 GHz)
------------------	---------------------------

Phantom

Type	SAM
-------------	-----

Shell Material	Fiberglass
-----------------------	------------

Thickness	2mm +/- .2mm
------------------	--------------

Volume	> 30 Liter
---------------	------------

Table 16.1

Measurement System Specification (Continued)		
Probe Specification		
Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)	
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)	
Directivity:	± 0.2 dB in head tissue (rotation around probe axis) ± 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Surface Detect:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surface	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	EX3DV4 E-Field Probe
Phantom Specification		
The SAM V5.0 phantom is an elliptical planar fiberglass shell phantom with a shell thickness of 2.0mm $\pm$.2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEEE 1528-2013, IEC 62209-1 and IEC 62209-2.		 SAM Phantom
Device Positioner Specification		
The DASY4 device positioner has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.		 Device Positioner

17.0 TEST EQUIPMENT LIST

Table 17.0

Test Equipment List				
DESCRIPTION	ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
Schmid & Partner DASY4 System	-	-	-	-
-DASY4 Measurement Server	158	1078	CNR	CNR
-Robot	46	599396-01	CNR	CNR
-DAE4	19	353	20-Apr-16	Annual
-DAE3	18	370	22-Apr-16	Annual
-EX3DV6 E-Field Probe	213	3600	27-Apr-16	Annual
-CLA150 Validation Source	251	4007	24-Jan-16	Triennial
-D835V2 Validation Dipole	217	4D075	23-Apr-15	Triennial
-D450V3 Validation Dipole	221	1068	21-Apr-15	Triennial
SAM Phantom	154	-	CNR	CNR
HP 85070C Dielectric Probe Kit	33	none	CNR	CNR
Gigatronics 8652A Power Meter	110	1835801	29-Feb-16	Triennial
Sensor	248	1833687	29-Feb-16	Triennial
HP 8753ET Network Analyzer	134	US39170292	22-Oct-14	Triennial
Generator	6	100104	08-May-14	Triennial
Amplifier	106	26235	CNR	CNR

CNR = Calibration Not Required

18.0 FLUID COMPOSITION

Table 18.0			2450MHz Body	
Tissue Simulating Liquid (TSL) Composition				
Component by Percent Weight				
Water	Glycol	Salt ⁽¹⁾	HEC ⁽²⁾	Bacteriacide ⁽³⁾
69.98	30.0	0.02	0.0	0.0

(1) Non-Iodized

(2) HydroxyEthyl-Cellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical DOWICIL 75 Antimicrobial Preservative

APPENDIX A – SYSTEM VERIFICATION PLOTS

Date/Time: 26/09/2016 12:41:50 PM Date/Time: 26/09/2016 12:45:01 PM

Test Laboratory: Celltech Labs

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 825; Calibrated: 25/04/2012
Program Name: 2450MHz Body SPC

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.55, 6.55, 6.55); Calibrated: 27/04/2016
- Sensor-Surface: 5mm (Mechanical Surface Detection) Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: SAM with CRP; Type: SAM; Serial: **Not Specified**
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

2450MHz Body Dipole d=10mm P=250mW TS=[11.7][13.0][14.3]/Area Scan (5x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 13.1 mW/g


2450MHz Body Dipole d=10mm P=250mW TS=[11.7][13.0][14.3]/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 94.5 V/m; Power Drift = -0.097 dB

Peak SAR (extrapolated) = 29.5 W/kg

SAR(1 g) = 13.8 mW/g; SAR(10 g) = 6.23 mW/g


Maximum value of SAR (measured) = 18.2 mW/g

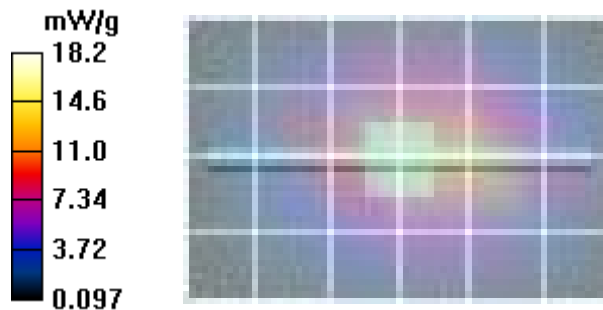

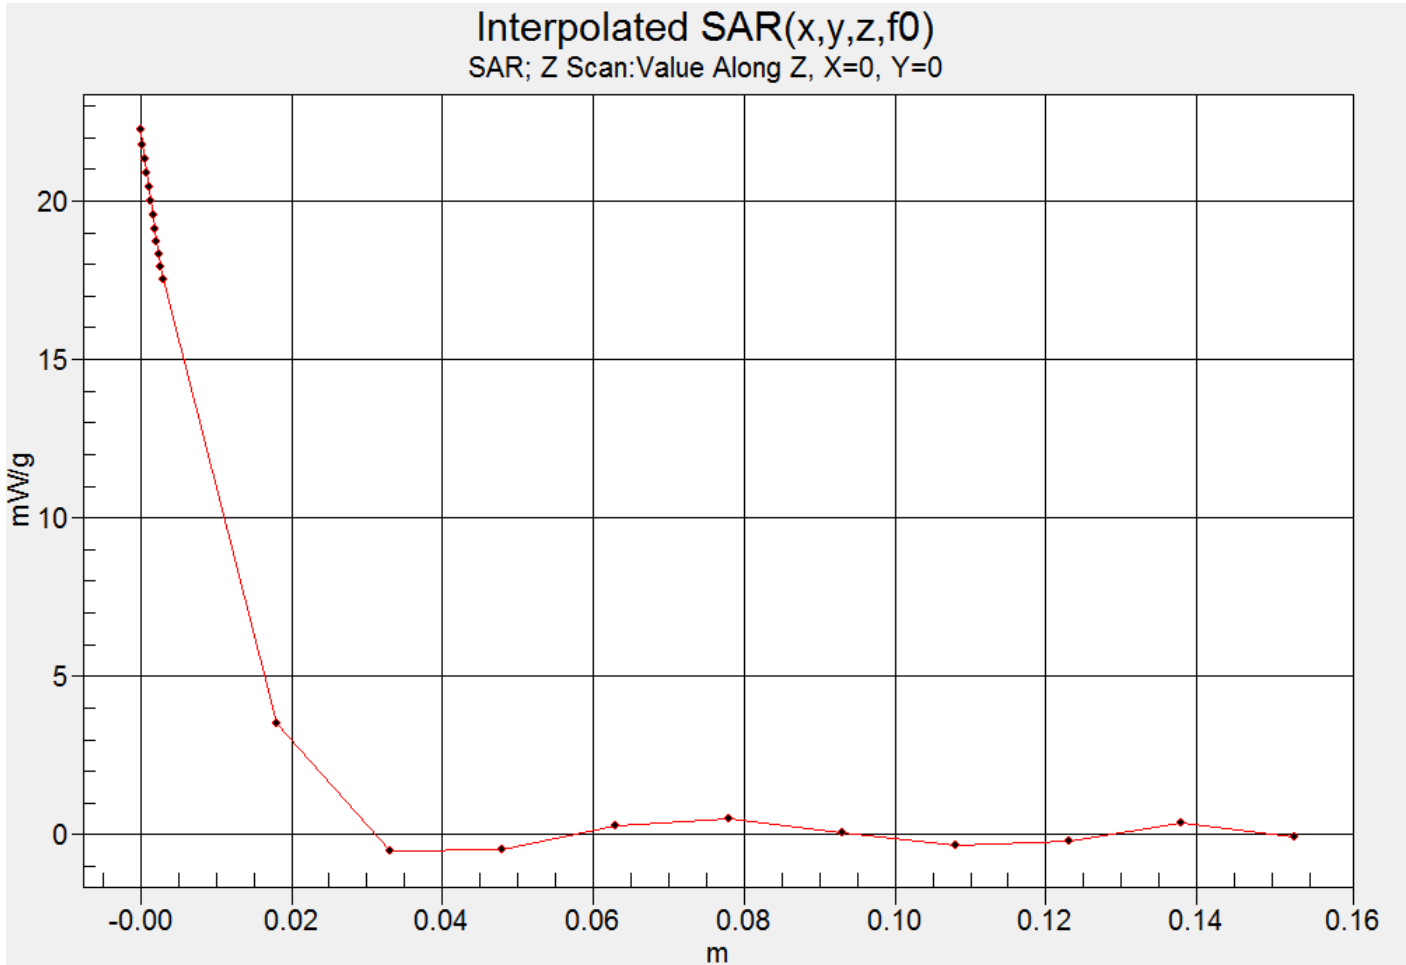

APPENDIX B – MEASUREMENT PLOTS OF MAXIMUMUM MEASURED SAT

Antenna Search

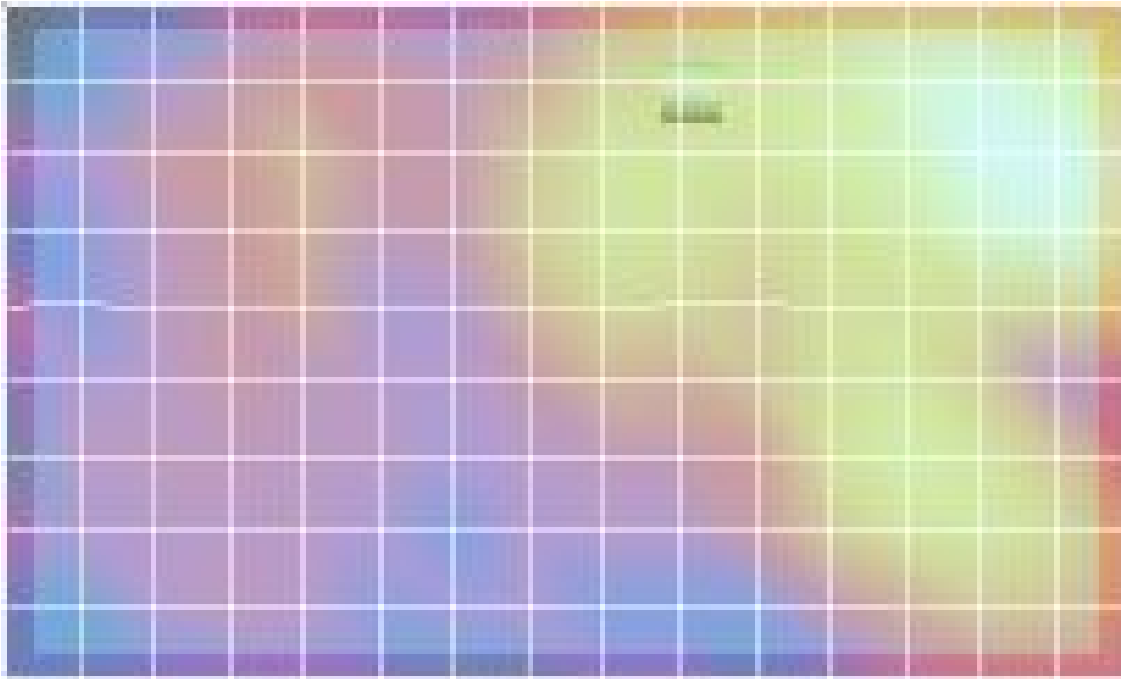

Plot B5

Date/Time: 29/09/2016 1:53:31 PM Date/Time: 29/09/2016 1:59:38 PM

Test Laboratory: Celltech Labs

DUT: Garmin; Type: Dash Mount GPS; Serial: **Not Specified**
Program Name: 2450 MHz Body

Communication System: CW; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.55, 6.55, 6.55); Calibrated: 27/04/2016
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

B5 Body Back A03101, 2412MHz Tilt/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 3.71 mW/g

B5 Body Back A03101, 2412MHz Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 4.97 V/m; Power Drift = -0.397 dB


Peak SAR (extrapolated) = 8.91 W/kg

SAR(1 g) = 3.24 mW/g; SAR(10 g) = 1.16 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 4.02 mW/g

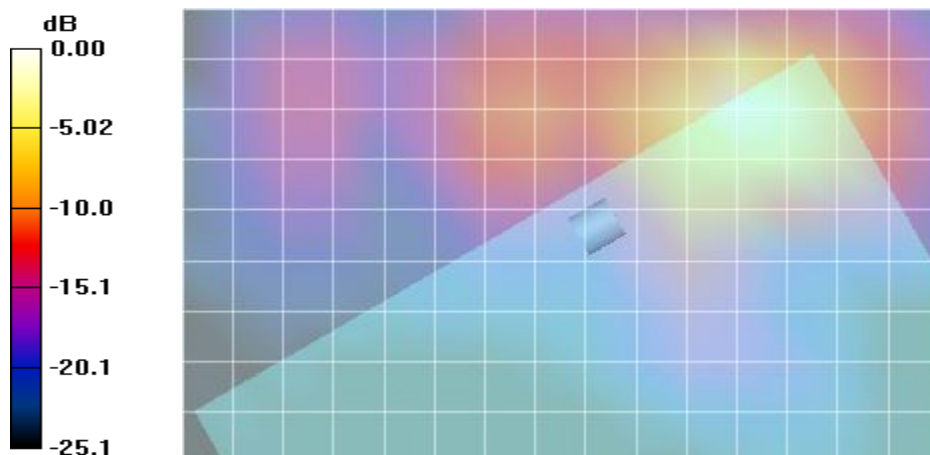

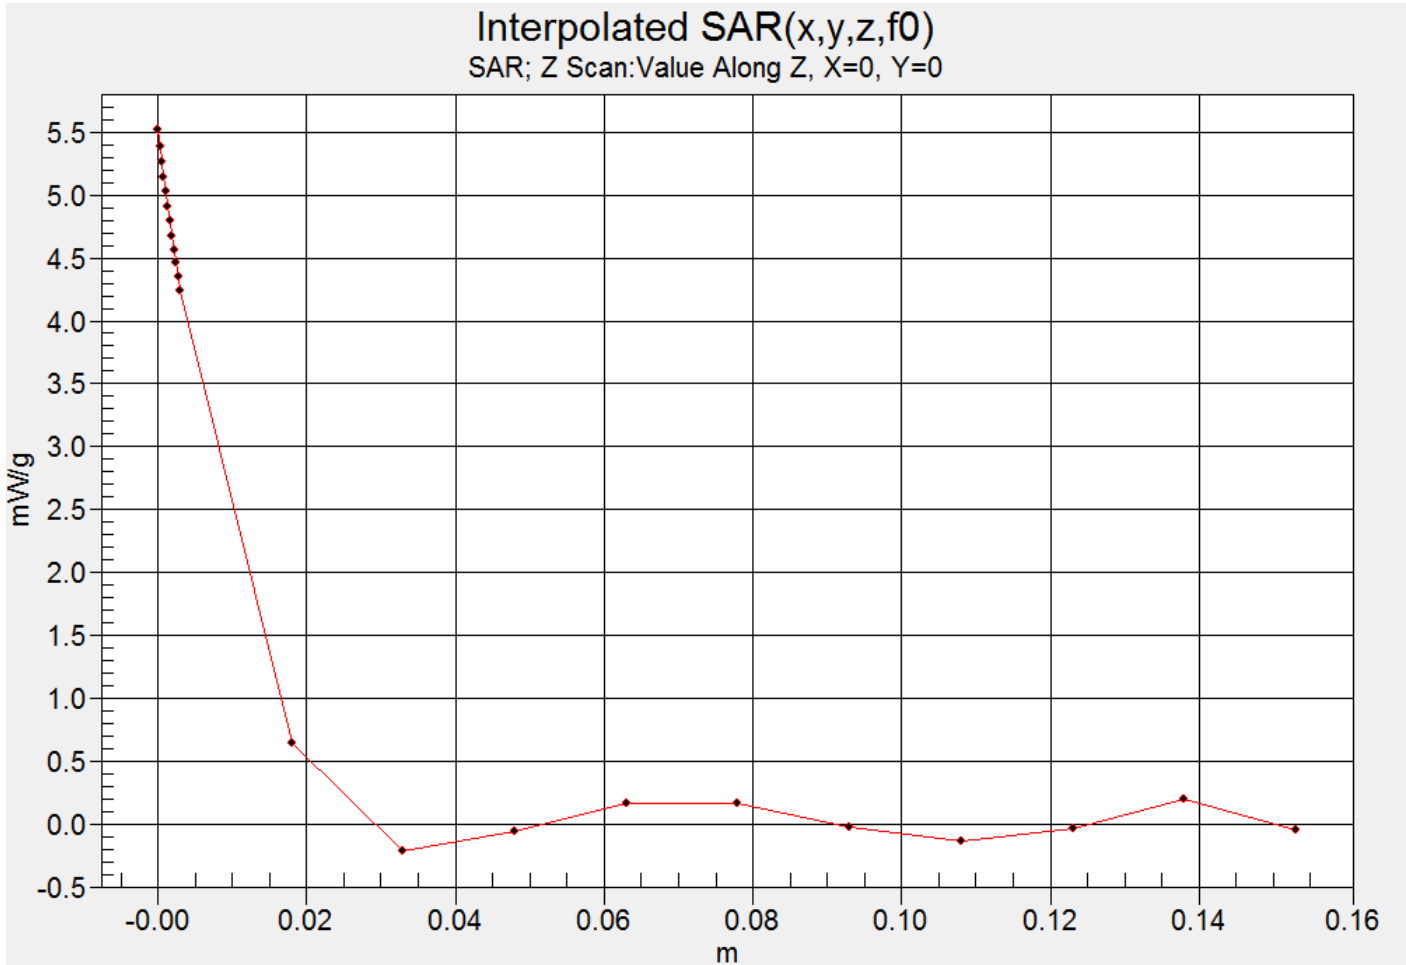

Plot B6

Date/Time: 29/09/2016 12:42:01 PM Date/Time: 29/09/2016 12:48:13 PM

Test Laboratory: Celltech Labs

DUT: Garmin; Type: Dash Mount GPS; Serial: **Not Specified**
Program Name: 2450 MHz Body

Communication System: CW; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.55, 6.55, 6.55); Calibrated: 27/04/2016
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

B6 Body Back A03101, 2437MHz Tilt/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 2.84 mW/g

B6 Body Back A03101, 2437MHz Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 5.61 V/m; Power Drift = -1.01 dB

Peak SAR (extrapolated) = 9.28 W/kg

SAR(1 g) = 3.16 mW/g; SAR(10 g) = 1.13 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 4.07 mW/g

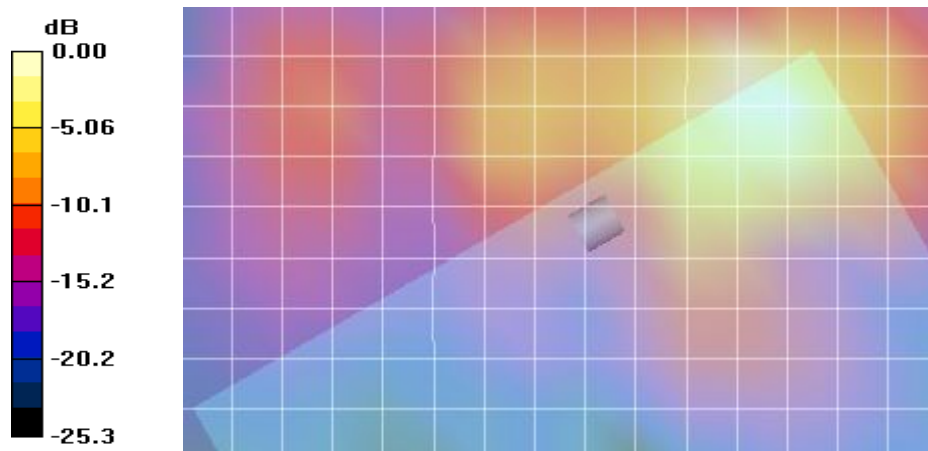

Plot B7

Date/Time: 29/09/2016 2:38:10 PM Date/Time: 29/09/2016 2:44:19 PM

Test Laboratory: Celltech Labs

DUT: Garmin; Type: Dash Mount GPS; Serial: **Not Specified**
Program Name: 2450 MHz Body

Communication System: CW; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.55, 6.55, 6.55); Calibrated: 27/04/2016
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

B7 Body Back A03101, 2462MHz Tilt/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 2.36 mW/g

B7 Body Back A03101, 2462MHz Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 4.45 V/m; Power Drift = -0.232 dB

Peak SAR (extrapolated) = 7.38 W/kg

SAR(1 g) = 2.8 mW/g; SAR(10 g) = 1.07 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 4.43 mW/g

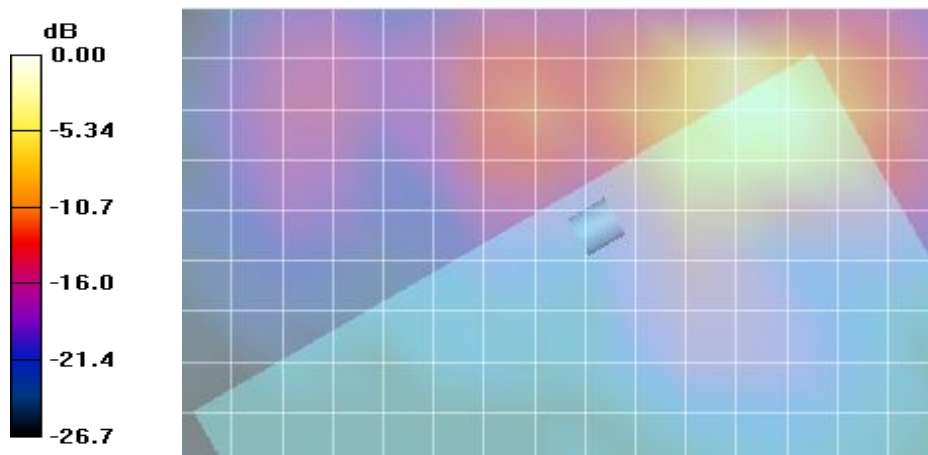

Plot B8EU

Date/Time: 29/09/2016 3:38:49 PM Date/Time: 29/09/2016 3:45:00 PM

Test Laboratory: Celltech Labs

DUT: Garmin; Type: Dash Mount GPS; Serial: **Not Specified**
Program Name: 2450 MHz Body

Communication System: CW; Frequency: 2472 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2472$ MHz; $\sigma = 2.06$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.55, 6.55, 6.55); Calibrated: 27/04/2016
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

B8 Body Back A03101, 2472MHz Tilt/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 3.06 mW/g

B8 Body Back A03101, 2472MHz Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 3.70 V/m; Power Drift = 0.464 dB

Peak SAR (extrapolated) = 7.37 W/kg

SAR(1 g) = 2.81 mW/g; SAR(10 g) = 1.04 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 3.30 mW/g

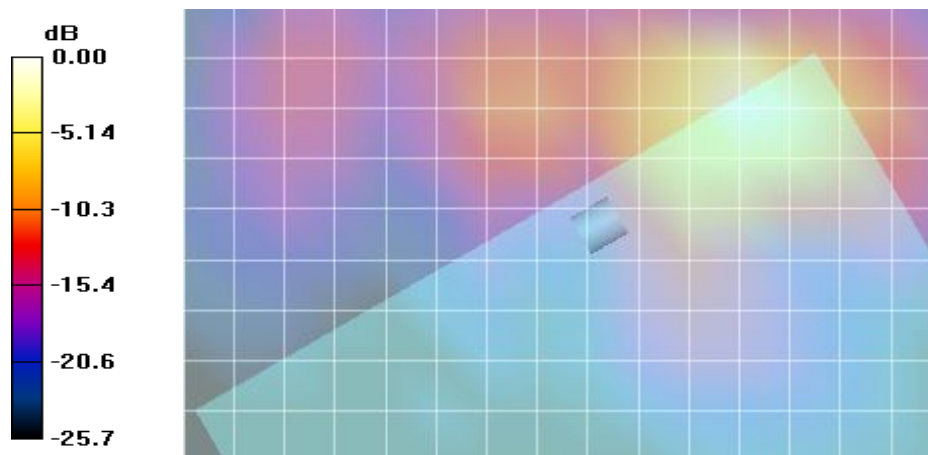

Plot B9

Date/Time: 30/09/2016 9:00:18 AM Date/Time: 30/09/2016 9:06:23 AM

Test Laboratory: Celltech Labs

DUT: Garmin; Type: Dash Mount GPS; Serial: **Not Specified**
Program Name: 2450 MHz Body

Communication System: CW; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.55, 6.55, 6.55); Calibrated: 27/04/2016
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: SAM with CRP; Type: SAM;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

B9 Body Edge A03101, 2412MHz Tilt/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.925 mW/g

B9 Body Edge A03101, 2412MHz Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.651 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.631 mW/g; SAR(10 g) = 0.287 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.812 mW/g

