

Application For Grant of Certification

FOR

Model: A03341
2412-2462 MHz (DTS)
Broadband Digital Transmission System
FCC ID: IPH-03341
IC: 1792A-03341

FOR


Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062

FCC Designation: US5305, Registration number: 315994
IC Test Site Registration: 3041A-1

Test Report Number: 171026

Authorized Signatory: *Scot D. Rogers*
Scot D. Rogers



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Engineering Test Report For Grant of Certification Application

CFR 47, PART 15C - Intentional Radiators
CFR 47 Paragraph 15.247 and
Industry Canada RSS-GEN and RSS-247
License Exempt Intentional Radiator

For

Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062

Digital Transmission System
Model: A03341

Frequency Range 2412-2462 MHz
FCC ID: IPH-03341
IC: 1792A-03341

Test Date: October 26, 2017

Certifying Engineer: *Scot D. Rogers*
Scot D. Rogers
Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 2

Garmin International, Inc.
Model: A03341
Test #: 171026
Test to: CFR47 15C, RSS-Gen RSS-247
File: A03341 DTS TstRpt 171026 r2

SN's: FCC#1, FCC#3
FCC ID: IPH-03341
IC: 1792A-03341
Date: June 13, 2018
Page 2 of 39

Table Of Contents

| | |
|---|-----------|
| TABLE OF CONTENTS..... | 3 |
| REVISIONS..... | 5 |
| FOREWORD..... | 6 |
| OPINION / INTERPRETATION OF RESULTS | 6 |
| EQUIPMENT TESTED..... | 6 |
| Equipment Function | 7 |
| Equipment Configuration..... | 8 |
| APPLICATION FOR CERTIFICATION..... | 9 |
| APPLICABLE STANDARDS & TEST PROCEDURES | 10 |
| TESTING PROCEDURES | 10 |
| AC Line Conducted Emission Test Procedure | 10 |
| Radiated Emission Test Procedure..... | 10 |
| Diagram 1 Test arrangement for Conducted emissions | 11 |
| Diagram 2 Test arrangement for radiated emissions of tabletop equipment..... | 12 |
| Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)..... | 13 |
| TEST SITE LOCATIONS | 13 |
| LIST OF TEST EQUIPMENT | 14 |
| UNITS OF MEASUREMENTS | 15 |
| ENVIRONMENTAL CONDITIONS..... | 15 |
| STATEMENT OF MODIFICATIONS AND DEVIATIONS | 15 |
| INTENTIONAL RADIATORS..... | 15 |
| Antenna Requirements | 15 |

Restricted Bands of Operation.....16

Table 1 Harmonic Radiated Emissions in Restricted Bands Data (Worst-case).....16

Summary of Results for Radiated Emissions in Restricted Bands17

AC Line Conducted Emissions Procedure17

Figure 1 AC Line Conducted emissions of EUT line 1 (#2, EUT – AC Adapter).....18

Figure 2 AC Line Conducted emissions of EUT line 2 (#2, EUT – AC Adapter).....18

Figure 3 AC Line Conducted emissions of EUT line 1 (#3, EUT – Computer).....19

Figure 4 AC Line Conducted emissions of EUT line 2 (#3, EUT – Computer).....19

Table 2 AC Line Conducted Emissions Data L1 (#2, EUT – AC Adapter)20

Table 3 AC Line Conducted Emissions Data L2 (#2, EUT – AC Adapter)20

Table 4 AC Line Conducted Emissions Data L1 (#3, EUT – Computer).....21

Table 5 AC Line Conducted Emissions Data L2 (#3, EUT – Computer).....21

Summary of Results for AC Line Conducted Emissions Results.....21

General Radiated Emissions Procedure.....22

Table 6 General Radiated Emissions Data22

Summary of Results for General Radiated Emissions23

Operation in the Band 2400 – 2483.5 MHz23

Figure 5 Plot of Transmitter Emissions in Operational Frequency (802.11 b-Mode)24

Figure 6 Plot of Transmitter Emissions in Operational Frequency (802.11 g-Mode)24

Figure 7 Plot of Transmitter Emissions in Operational Frequency (802.11 n-Mode)25

Figure 8 Plot of Lower Band Edge (802.11 b-mode)25

Figure 9 Plot of Lower Band Edge (802.11 g-mode)26

Figure 10 Plot of Lower Band Edge (802.11 n-mode)26

Figure 11 Plot of Upper Band Edge (802.11 b-mode).....27

Figure 12 Plot of Upper Band Edge (802.11 g-mode).....27

| | |
|---|-----------|
| Figure 13 Plot of Upper Band Edge (802.11 n-mode)..... | 28 |
| Figure 14 Plot of Transmitter 6-dB Occupied Bandwidth (802.11 b-mode)..... | 28 |
| Figure 15 Plot of Transmitter 99% Occupied Bandwidth (802.11 b-mode)..... | 29 |
| Figure 16 Plot of Transmitter 6-dB Occupied Bandwidth (802.11 g-mode)..... | 29 |
| Figure 17 Plot of Transmitter 99% Occupied Bandwidth (802.11 g-mode)..... | 30 |
| Figure 18 Plot of Transmitter 6-dB Occupied Bandwidth (802.11 n-mode)..... | 30 |
| Figure 19 Plot of Transmitter 99% Occupied Bandwidth (802.11 n-mode)..... | 31 |
| Figure 20 Plot of Transmitter Power Spectral Density (802.11 b-mode)..... | 31 |
| Figure 21 Plot of Transmitter Power Spectral Density (802.11 g-mode)..... | 32 |
| Figure 22 Plot of Transmitter Power Spectral Density (802.11 n-mode)..... | 32 |
| Transmitter Emissions Data..... | 33 |
| Table 7 Transmitter Radiated Emission Worst-case Data..... | 33 |
| Table 8 Transmitter Antenna Port Data..... | 34 |
| Summary of Results for Transmitter Radiated Emissions of Intentional Radiator..... | 34 |
| ANNEX..... | 35 |
| Annex A Measurement Uncertainty Calculations..... | 36 |
| Annex B Rogers Labs Test Equipment List..... | 37 |
| Annex C Rogers Qualifications..... | 38 |
| Annex D Rogers Labs Certificate of Accreditation..... | 39 |

Revisions

Revision 2 Issued June 13, 2018 – updated Equipment Lists with correct calibration references

Revision 1 Issued May 9, 2018

Foreword

The following information is submitted for consideration in obtaining Grant of Certification for License Exempt Digital Transmission System Intentional Radiator operating under Code of Federal Regulations Title 47 (CFR 47) Paragraph 15.247 and Industry Canada RSS-GEN, Issue 4 and RSS-247 Issue 2, operation in the 2400 – 2483.5 MHz band.

Name of Applicant: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062

M/N: A03341

FCC ID: IPH-03341 Industry Canada ID: 1792A-03341

Frequency Range: 2412-2462 MHz (20 MHz channels), Average output power 0.022 W,
Peak Power 0.097 Watts, (99% Occupied bandwidth 802.11b -
15870, 802.11g – 16680, 802.11n - 17520 kHz)

Opinion / Interpretation of Results

| Tests Performed | Margin (dB) | Results |
|---|-------------|----------|
| Emissions 15.205, RSS-GEN | -16.9 | Complies |
| Emissions as per CFR 47 paragraphs 2 and 15.207 | -11.1 | Complies |
| Emissions as per CFR 47 paragraphs 2 and 15.209 | -24.8 | Complies |
| Harmonic Emissions per CFR 47 15.247 | -12.7 | Complies |
| Peak Power Spectral Density per CFR 47 15.247 | -21.0 | Complies |

Equipment Tested

| <u>Equipment</u> | <u>Model / PN</u> | <u>Serial Number</u> |
|---------------------|-------------------|----------------------|
| EUT #1 | A03341 | FCC#1 |
| EUT #2 | A03341 | FCC#3 |
| USB interface cable | 320-00559-00 | N/A |
| AC/DC Adapter | 362-00087-xx | N/A |
| Laptop Computer | Latitude E6320 | FCN03Q1 |
| USB Printer | Dell 0N5819 | 5D1SL61 |

Test results in this report relate only to the items tested.

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 2

Garmin International, Inc.
Model: A03341
Test #: 171026
Test to: CFR47 15C, RSS-Gen RSS-247
File: A03341 DTS TstRpt 171026 r2

SN's: FCC#1, FCC#3
FCC ID: IPH-03341
IC: 1792A-03341
Date: June 13, 2018
Page 6 of 39

Equipment Function

The EUT is a portable digital recording device incorporating wireless data transfer. The device incorporates camera sensor to record images within the lens view angle. The design incorporates low power transmitters for communication with compatible equipment. The design offers no other interface options as described by the manufacture and presented below in the configuration diagrams below. The design provides wireless communications in one of three modes (mode 1 ANT, mode 2 BT, and mode 3 802.11b, g, n) providing wireless interface capabilities with compatible equipment. The low power transmitters provide operation capability in the 2402-2480 MHz frequency band and the 802.11 transmitter operates in the 2412-2462 MHz band. The product operates from internal rechargeable battery or external power as documented in this report. The test samples provided required interfacing with a development interface board for testing purposes. The interface board provided testing personnel the ability to select channel and operation mode. The development board was connected to the test sample during emissions testing. The test system provided operation of the equipment at 100% duty cycle which greatly exceeds typical end user operation. The design offers no other provision for interface than those documented below. The design utilizes internal fixed antenna system and offers no provision for antenna replacement or modification. Two samples were provided for testing, one representative of production design, and the other modified for testing purposes replacing the integral antennas with RF connection ports. The test samples were provided with development boards and test software enabling testing personnel ability to enable transmitter function on defined channels and modulations. The antenna modification offered testing facility the ability to connect test equipment to the temporary antenna port for antenna port conducted emission testing. The EUT was arranged as described by the manufacturer emulating typical user configurations for testing purposes. For testing purposes, the EUT received power from freshly charged internal battery and/or external power and configured to operate in available modes. As requested by the manufacturer and required by regulations, the equipment was tested for emissions compliance using the available configurations with the worst-case data presented. This report documents compliance testing and results for applicable product modes of operation. Test results in this report relate only to the products described in this report.

Equipment Configuration

- 1) Unit operating off internal battery



- 2) Unit connected to (and powered by) AC adapter through USB cable (GPN: 320-00559-00)



- 3) Unit connected to Computer USB port through cable assembly (GPN: 320-00559-00)



- 4) Unit connected to 12 VDC through cradle and cable assembly (GPN: 320-01167-01)



Application for Certification

- (1) Manufacturer: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062
- (2) Identification: M/N: A03341
FCC ID: IPH-03341 IC: 1792A-03341
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from direct current power provided from internal rechargeable battery or external power as documented in this report. The design provides interface with cradle and USB compliant equipment as presented in this filing. The EUT offers no other connection ports than those presented in this filing.
- (9) Transition Provisions of CFR47 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. This requirement is not applicable to his DTS device.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

Applicable Standards & Test Procedures

The following information is submitted in accordance with the eCFR Federal Communications Code of Federal Regulations, dated October 26, 2017, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.247, and Industry Canada RSS-GEN Issue 4, and RSS-247 Issue 2. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013.


Testing Procedures

AC Line Conducted Emission Test Procedure

Testing for the AC line-conducted emissions was performed as required in 47CFR 15C, RSS-247 and specified in ANSI C63.10-2013. The test setup, including the EUT, was arranged in the test configurations as presented during testing. The test configuration was placed on a 1 x 1.5-meter bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50- μ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table. Refer to diagram one showing typical test arrangement and photographs in exhibits for EUT placement used during testing.


Radiated Emission Test Procedure

Radiated emissions testing was performed as required in CFR47 15, RSS-247 and specified in ANSI C63.10-2013. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. The frequency spectrum from 9 kHz to 25,000 MHz was searched for during preliminary investigation. Refer to diagrams two and three showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

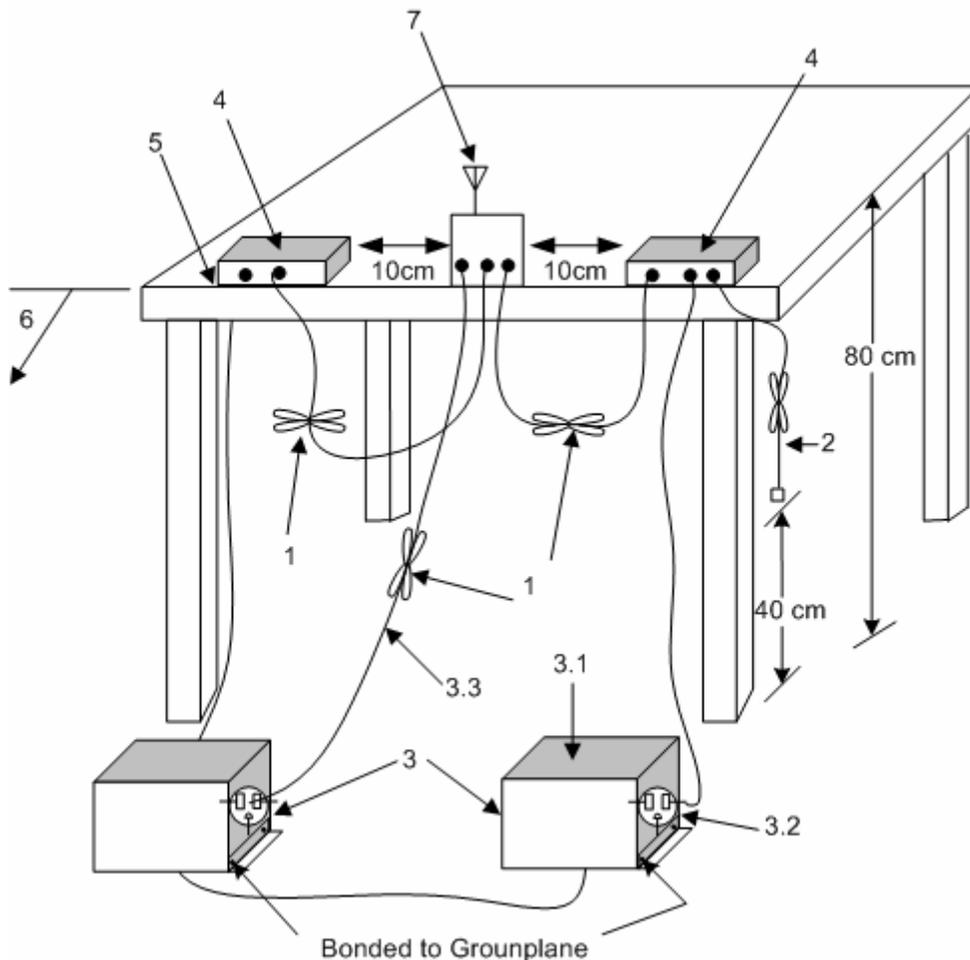


1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long see (see 6.2.3.1).
2. I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.2).
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN can be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3).
 - 3.1 All other equipment powered from additional LISN(s).
 - 3.2 Multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3 LISN at least 80 cm from nearest part of EUT chassis.
4. Non-EUT components of EUT system being tested.
5. Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.2.3.1).
6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 6.2.2 for options).
7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test.

Diagram 1 Test arrangement for Conducted emissions

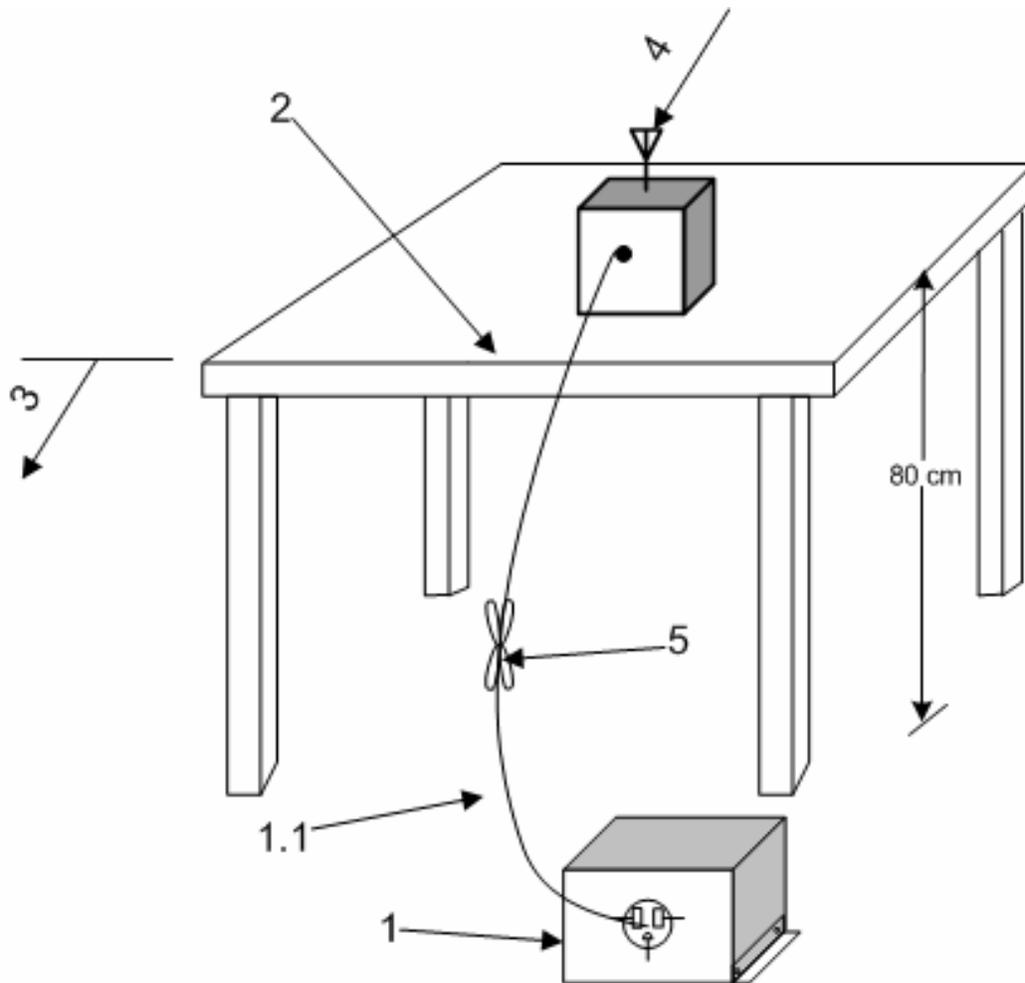

1. A LISN is optional for radiated measurements between 30 MHz to 1000 MHz, but not allowed for measurements below 30 MHz and above 1000 MHz. (See 6.4.3, 6.5.1, and 6.6.3.) If used, connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω. LISN can be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3.1).
 - 1.1 LISN spaced at least 80 cm from nearest part of EUT chassis.
2. The EUT shall be placed in the center of the table to the extent possible. (See 6.2.3.1 and 6.3.4).
3. A vertical conducting plane, if used for conducted tests per 6.2.2, shall be removed for radiated emission tests.
4. Antenna may be integral or detachable, depending on the EUT.
5. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.

Diagram 2 Test arrangement for radiated emissions of tabletop equipment

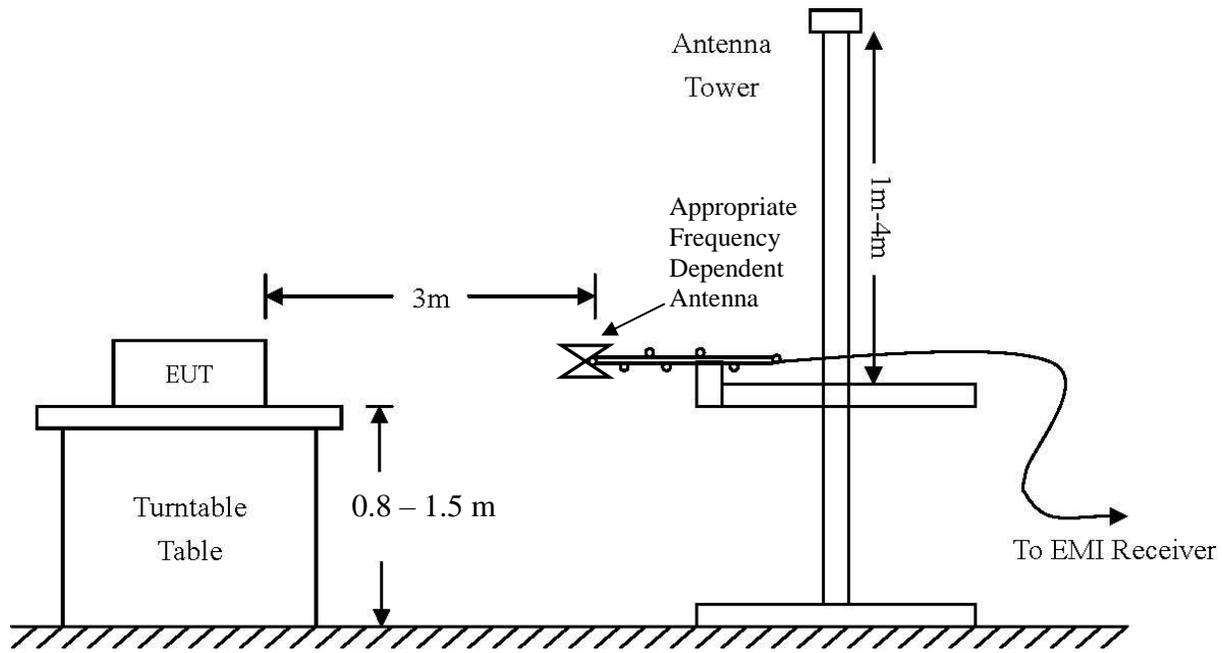

| AC Line Conducted Emissions (0.150 -30 MHz) | | |
|---|----------|-------------------|
| RBW | AVG. BW | Detector Function |
| 9 kHz | 30 kHz | Peak / Quasi Peak |
| Emissions (30-1000 MHz) | | |
| RBW | AVG. BW | Detector Function |
| 120 kHz | 300 kHz | Peak / Quasi Peak |
| Emissions (Above 1000 MHz) | | |
| RBW | Video BW | Detector Function |
| 100 kHz | 100 kHz | Peak |
| 1 MHz | 1 MHz | Peak / Average |

Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)

Test Site Locations

Conducted EMI: The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 West 259th Terrace, Louisburg, KS

Radiated EMI: The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 West 259th Terrace, Louisburg, KS

Site Registration: Refer to Annex for Site Registration Letters

NVLAP Accreditation: Lab code 200087-0

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 2

Garmin International, Inc.
Model: A03341
Test #: 171026
Test to: CFR47 15C, RSS-Gen RSS-247
File: A03341 DTS TstRpt 171026 r2

SN's: FCC#1, FCC#3
FCC ID: IPH-03341
IC: 1792A-03341
Date: June 13, 2018
Page 13 of 39

List of Test Equipment

| <u>Equipment</u> | <u>Manufacturer</u> | <u>Model (SN)</u> | <u>Band</u> | <u>Cal Date(m/d/y)</u> | <u>Due</u> |
|---|---------------------|--------------------------------|--------------|------------------------|------------|
| <input checked="" type="checkbox"/> LISN | FCC | FCC-LISN-50-2-10(1PA) (160611) | .15-30MHz | 5/15/17 | 5/15/18 |
| <input checked="" type="checkbox"/> LISN | Compliance Design | FCC-LISN-2.Mod.cd, | .15-30MHz | 10/24/17 | 24/10/18 |
| <input checked="" type="checkbox"/> Cable | Huber & Suhner Inc. | Sucoflex102ea(L10M)(303073) | 9kHz-40 GHz | 10/24/17 | 10/24/18 |
| <input checked="" type="checkbox"/> Cable | Huber & Suhner Inc. | Sucoflex102ea(1.5M)(303069) | 9kHz-40 GHz | 10/24/17 | 10/24/18 |
| <input type="checkbox"/> Cable | Huber & Suhner Inc. | Sucoflex102ea(1.5M)(303071) | 9kHz-40 GHz | 10/24/17 | 10/24/18 |
| <input checked="" type="checkbox"/> Cable | Belden | RG-58 (L1-CAT3-11509) | 9kHz-30 MHz | 10/24/17 | 10/24/18 |
| <input checked="" type="checkbox"/> Cable | Belden | RG-58 (L2-CAT3-11509) | 9kHz-30 MHz | 10/24/17 | 10/24/18 |
| <input type="checkbox"/> Antenna | ARA | BCD-235-B (169) | 20-350MHz | 10/24/17 | 10/24/18 |
| <input type="checkbox"/> Antenna | EMCO | 3147 (40582) | 200-1000MHz | 10/24/17 | 10/24/18 |
| <input checked="" type="checkbox"/> Antenna | ETS-Lindgren | 3117 (200389) | 1-18 GHz | 5/15/17 | 5/15/19 |
| <input type="checkbox"/> Antenna | Com Power | AH-118 (10110) | 1-18 GHz | 10/24/17 | 10/24/19 |
| <input checked="" type="checkbox"/> Antenna | Com Power | AH-840 (101046) | 18-40 GHz | 5/15/17 | 5/15/19 |
| <input checked="" type="checkbox"/> Antenna | Com Power | AL-130 (121055) | .001-30 MHz | 10/24/17 | 10/24/18 |
| <input checked="" type="checkbox"/> Antenna | Sunol | JB-6 (A100709) | 30-1000 MHz | 10/24/17 | 10/24/18 |
| <input checked="" type="checkbox"/> Analyzer | Rohde & Schwarz | ESU40 (100108) | 20Hz-40GHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> Analyzer | HP | 8591EM (3628A00871) | 9kHz-1.8GHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> Analyzer | HP | 8562A (3051A05950) | 9kHz-125GHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> Analyzer | HP External Mixers | 11571, 11970 | 25GHz-110GHz | 5/15/17 | 5/15/18 |
| <input checked="" type="checkbox"/> Amplifier | Com-Power | PA-010 (171003) | 100Hz-30MHz | 10/24/17 | 10/24/18 |
| <input checked="" type="checkbox"/> Amplifier | Com-Power | CPPA-102 (01254) | 1-1000 MHz | 10/24/17 | 10/24/18 |
| <input checked="" type="checkbox"/> Amplifier | Com-Power | PAM-118A (551014) | 0.5-18 GHz | 10/24/17 | 10/24/18 |
| <input type="checkbox"/> Power Meter | Agilent | N1911A with N1921A | 0.05-40 GHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> Generator | Rohde & Schwarz | SMB100A6 (100150) | 20Hz-6 GHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> Generator | Rohde & Schwarz | SMBV100A6 (260771) | 20Hz-6 GHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> RF Filter | Micro-Tronics | BRC50722 (009).9G notch | 30-1800 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> RF Filter | Micro-Tronics | HPM50114 (017)1.5G HPF | 30-18000 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> RF Filter | Micro-Tronics | HPM50117 (063) 3G HPF | 30-18000 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> RF Filter | Micro-Tronics | HPM50105 (059) 6G HPF | 30-18000 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> RF Filter | Micro-Tronics | BRM50702 (172) 2G notch | 30-1800 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> RF Filter | Micro-Tronics | BRC50703 (G102) 5G notch | 30-1800 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> RF Filter | Micro-Tronics | BRC50705 (024) 5G notch | 30-1800 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> RF Filter | Micro-Tronics | BRC17663 (001) 9G notch | 30-1800 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> Attenuator | Fairview | SA6NFNF100W-14 (1625) | 30-1800 MHz | 2/5/17 | 2/5/18 |
| <input type="checkbox"/> Attenuator | Mini-Circuits | VAT-3W2+ (1735) | 30-6000 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> Attenuator | Mini-Circuits | VAT-3W2+ (1436) | 30-6000 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> Attenuator | Mini-Circuits | VAT-3W2+ (14362) | 30-6000 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> Attenuator | Mini-Circuits | VAT-3W2+ (1445) | 30-6000 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> Attenuator | Mini-Circuits | VAT-3W2+ (14452) | 30-6000 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> Attenuator | Mini-Circuits | VAT-6W2+ (1438) | 30-6000 MHz | 5/15/17 | 5/15/18 |
| <input type="checkbox"/> Attenuator | Mini-Circuits | VAT-6W2+ (1736) | 30-6000 MHz | 5/15/17 | 5/15/18 |
| <input checked="" type="checkbox"/> Weather station | Davis | 6312 (A70927D44N) | | 10/24/2017 | 10/24/2018 |

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 2

Garmin International, Inc.
Model: A03341
Test #: 171026
Test to: CFR47 15C, RSS-Gen RSS-247
File: A03341 DTS TstRpt 171026 r2

SN's: FCC#1, FCC#3
FCC ID: IPH-03341
IC: 1792A-03341
Date: June 13, 2018
Page 14 of 39

Units of Measurements

Conducted EMI Data is in dB μ V; dB referenced to one microvolt

Radiated EMI Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses

RFS (dB μ V/m @ 3m) = FSM (dB μ V) + A.F. (dB) - Gain (dB)

Environmental Conditions

Ambient Temperature 19.2° C

Relative Humidity 38%

Atmospheric Pressure 1002.4 mb

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with the CFR47 Part 15C, RSS-Gen, and RSS-247 emission requirements. There were no deviations to the specifications.

Intentional Radiators

The following information is submitted in support demonstration of compliance with the requirements of CFR47, Subpart C, paragraph 15.247 and Industry Canada RSS-247 and RSS-Gen the following information is submitted.

Antenna Requirements

The EUT incorporates integral antenna system and offers no provision for connection to alternate antenna system. The antenna connection point complies with the unique antenna connection requirements. There are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 paragraph 6 and KDB 558074 paragraph 10.2 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values consider the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Harmonic Radiated Emissions in Restricted Bands Data (Worst-case)

| Frequency in MHz | Horizontal Peak (dB μ V/m) | Horizontal Quasi-Peak (dB μ V/m) | Horizontal Average (dB μ V/m) | Vertical Peak (dB μ V/m) | Vertical Quasi-Peak (dB μ V/m) | Vertical Average (dB μ V/m) | Limit @ 3m (dB μ V/m) |
|------------------|--------------------------------|--------------------------------------|-----------------------------------|------------------------------|------------------------------------|---------------------------------|---------------------------|
| 2390.0 | 61.5 | N/A | 30.2 | 64.6 | N/A | 30.4 | 54.0 |
| 2483.5 | 60.7 | N/A | 29.4 | 63.3 | N/A | 33.1 | 54.0 |
| 4824.0 | 45.6 | N/A | 32.8 | 48.6 | N/A | 37.1 | 54.0 |
| 4884.0 | 45.2 | N/A | 33.2 | 46.4 | N/A | 36.3 | 54.0 |
| 4924.0 | 44.1 | N/A | 31.4 | 44.5 | N/A | 31.8 | 54.0 |
| 7236.0 | 45.6 | N/A | 32.8 | 46.2 | N/A | 33.5 | 54.0 |
| 7326.0 | 45.7 | N/A | 32.9 | 45.2 | N/A | 32.3 | 54.0 |
| 7386.0 | 46.4 | N/A | 33.4 | 45.4 | N/A | 33.0 | 54.0 |
| 12060.0 | 49.8 | N/A | 36.8 | 49.7 | N/A | 37.1 | 54.0 |
| 12210.0 | 50.2 | N/A | 36.7 | 49.8 | N/A | 36.8 | 54.0 |
| 12310.0 | 48.4 | N/A | 36.1 | 49.1 | N/A | 36.1 | 54.0 |

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements of CFR 47 Part 15C RSS-Gen, and RSS-247 Intentional Radiators. The EUT demonstrated a worst-case minimum harmonic margin of -16.9 dB below the radiated emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

AC Line Conducted Emissions Procedure

The EUT was arranged in typical equipment configurations operating from AC power adapter. Testing was performed with the EUT placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. Testing for the line-conducted emissions were the procedures of ANSI C63.10-2013 paragraph 6. The AC adapter for the EUT was connected to the LISN for line-conducted emissions testing. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1 µF capacitor, internal to the LISN. Power line conducted emissions testing was carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequencies of each of the emissions, which demonstrated the highest amplitudes. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then data was recorded with maximum conducted emissions levels.

Refer to figures one through two showing plots of the AC Adapter configuration line conducted emissions and figures three and four for plots of the Computer USB configuration AC Line conducted emissions.

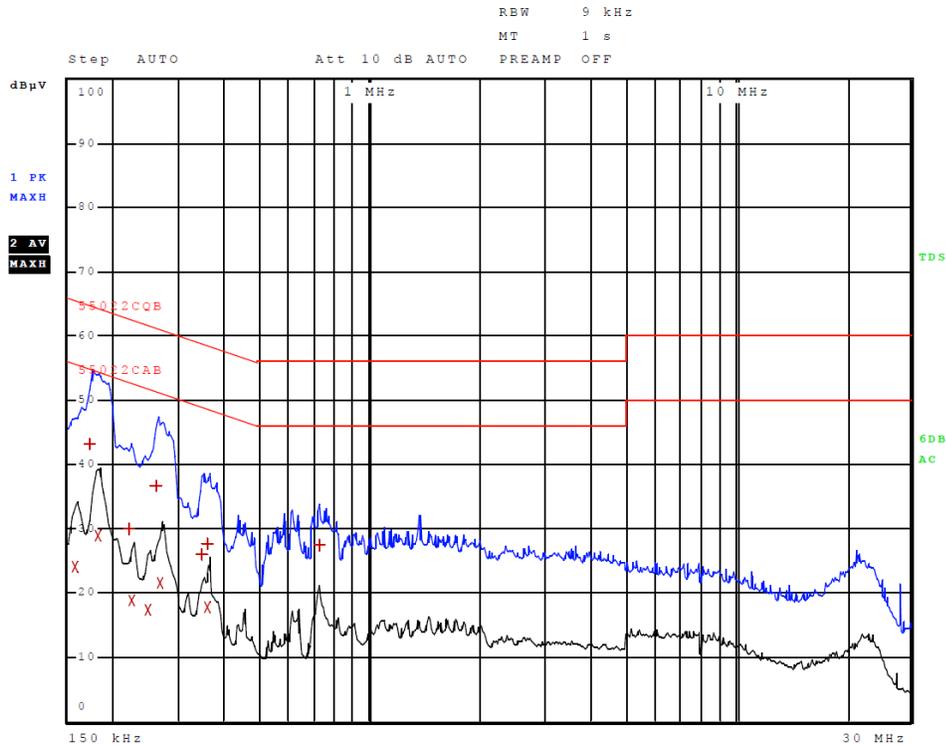


Figure 1 AC Line Conducted emissions of EUT line 1 (#2, EUT – AC Adapter)

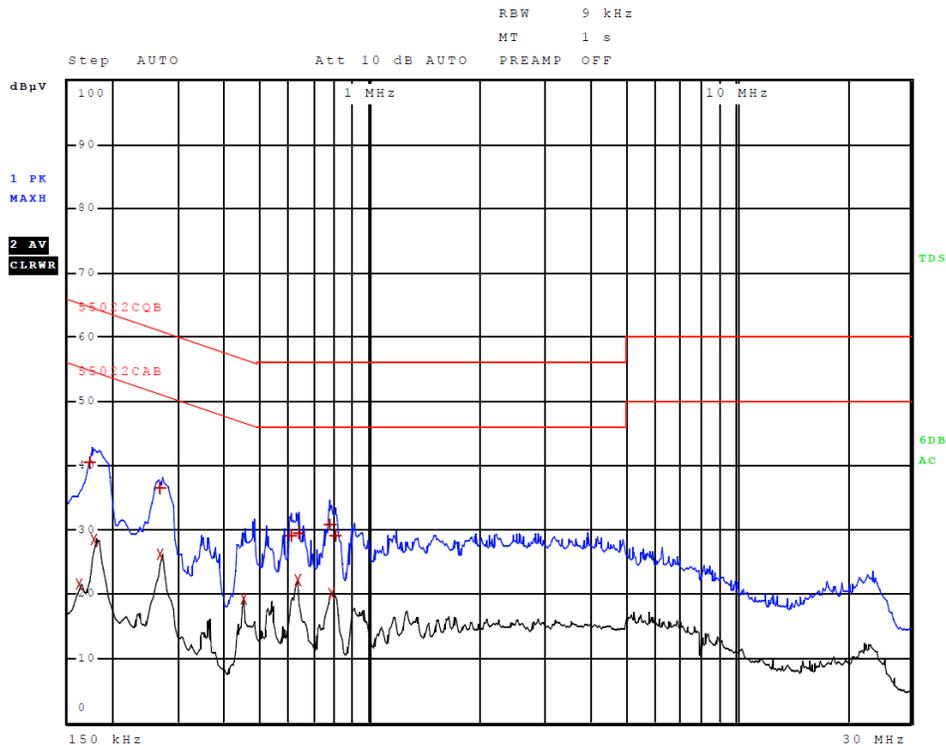


Figure 2 AC Line Conducted emissions of EUT line 2 (#2, EUT – AC Adapter)

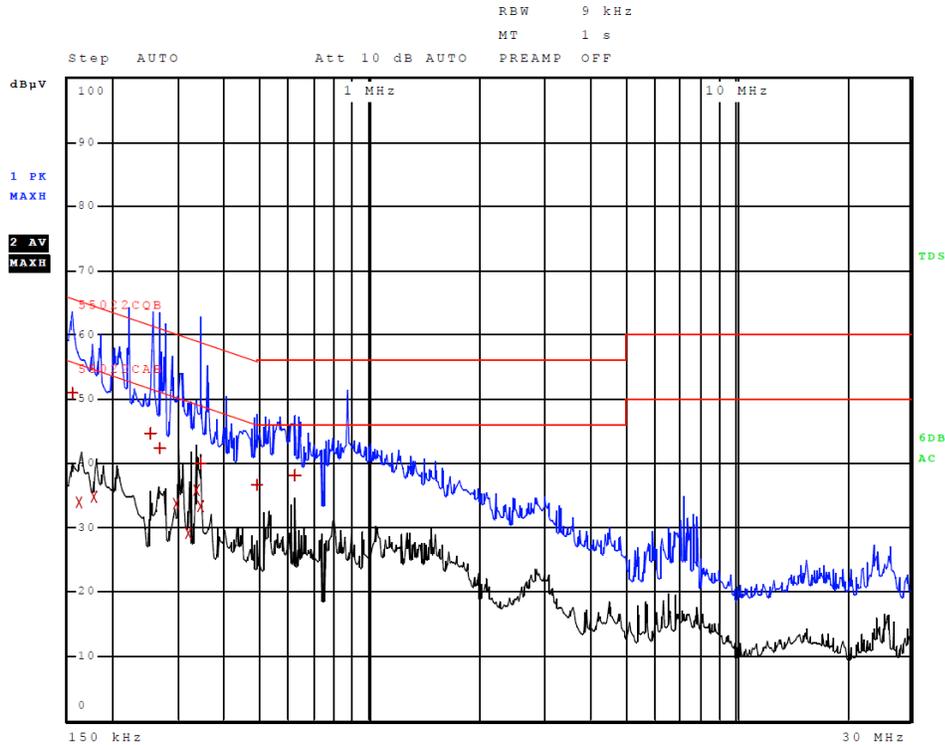


Figure 3 AC Line Conducted emissions of EUT line 1 (#3, EUT – Computer)

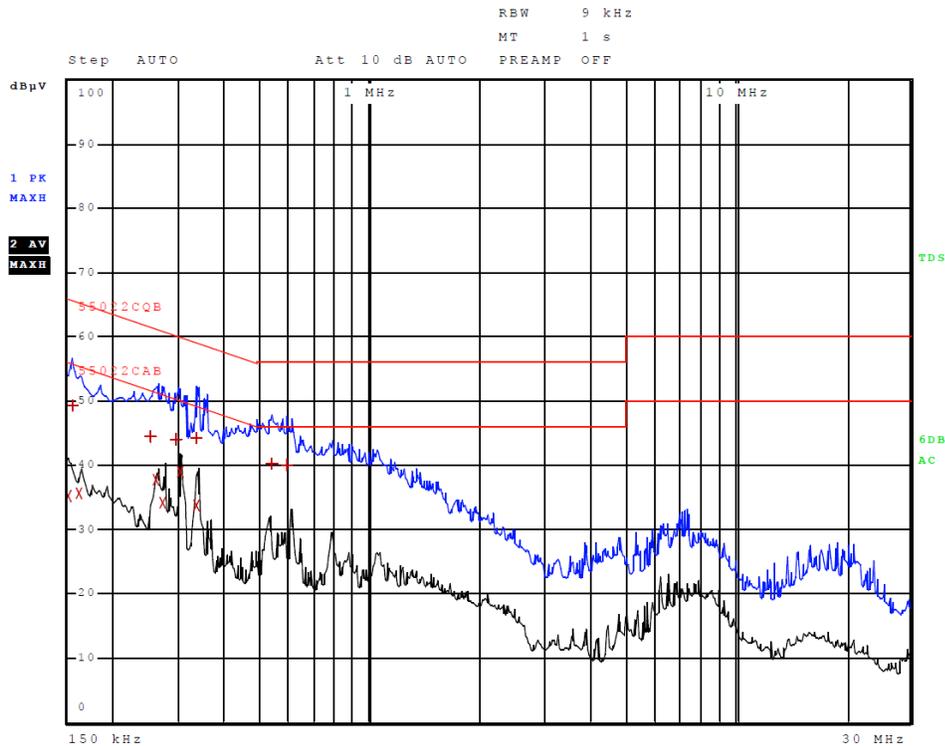


Figure 4 AC Line Conducted emissions of EUT line 2 (#3, EUT – Computer)

Table 2 AC Line Conducted Emissions Data L1 (#2, EUT – AC Adapter)

| Trace | Frequency | Level (dBµV) | Detector | Delta Limit/dB |
|-------|-------------------|--------------|------------|----------------|
| 2 | 158.000000000 kHz | 23.98 | Average | -31.59 |
| 1 | 174.000000000 kHz | 43.21 | Quasi Peak | -21.55 |
| 2 | 182.000000000 kHz | 28.85 | Average | -25.54 |
| 1 | 222.000000000 kHz | 30.01 | Quasi Peak | -32.73 |
| 2 | 226.000000000 kHz | 18.72 | Average | -33.88 |
| 2 | 250.000000000 kHz | 17.41 | Average | -34.35 |
| 1 | 262.000000000 kHz | 36.70 | Quasi Peak | -24.66 |
| 2 | 270.000000000 kHz | 21.54 | Average | -29.58 |
| 1 | 350.000000000 kHz | 25.96 | Quasi Peak | -33.00 |
| 2 | 362.000000000 kHz | 17.82 | Average | -30.86 |
| 1 | 362.000000000 kHz | 27.65 | Quasi Peak | -31.03 |
| 1 | 726.000000000 kHz | 27.39 | Quasi Peak | -28.61 |

Other emissions present had amplitudes at least 20 dB below the limit.

Table 3 AC Line Conducted Emissions Data L2 (#2, EUT – AC Adapter)

| Trace | Frequency | Level (dBµV) | Detector | Delta Limit/dB |
|-------|-------------------|--------------|------------|----------------|
| 2 | 162.000000000 kHz | 21.56 | Average | -33.80 |
| 1 | 174.000000000 kHz | 40.37 | Quasi Peak | -24.40 |
| 2 | 178.000000000 kHz | 28.48 | Average | -26.10 |
| 2 | 270.000000000 kHz | 26.09 | Average | -25.03 |
| 1 | 270.000000000 kHz | 36.53 | Quasi Peak | -24.58 |
| 2 | 450.000000000 kHz | 19.28 | Average | -27.59 |
| 1 | 606.000000000 kHz | 29.06 | Quasi Peak | -26.94 |
| 2 | 630.000000000 kHz | 22.24 | Average | -23.76 |
| 1 | 634.000000000 kHz | 29.50 | Quasi Peak | -26.50 |
| 1 | 778.000000000 kHz | 30.72 | Quasi Peak | -25.28 |
| 2 | 782.000000000 kHz | 20.16 | Average | -25.84 |
| 1 | 802.000000000 kHz | 29.10 | Quasi Peak | -26.90 |

Other emissions present had amplitudes at least 20 dB below the limit.

Table 4 AC Line Conducted Emissions Data L1 (#3, EUT – Computer)

| Trace | Frequency | Level (dBµV) | Detector | Delta Limit/dB |
|-------|-------------------|--------------|------------|----------------|
| 1 | 154.000000000 kHz | 50.85 | Quasi Peak | -14.93 |
| 2 | 162.000000000 kHz | 34.00 | Average | -21.36 |
| 2 | 178.000000000 kHz | 34.72 | Average | -19.86 |
| 1 | 254.000000000 kHz | 44.58 | Quasi Peak | -17.05 |
| 1 | 266.000000000 kHz | 42.36 | Quasi Peak | -18.88 |
| 2 | 298.000000000 kHz | 33.64 | Average | -16.66 |
| 2 | 322.000000000 kHz | 29.17 | Average | -20.48 |
| 2 | 334.000000000 kHz | 35.80 | Average | -13.55 |
| 2 | 342.000000000 kHz | 33.29 | Average | -15.86 |
| 1 | 342.000000000 kHz | 40.02 | Quasi Peak | -19.13 |
| 1 | 490.000000000 kHz | 36.74 | Quasi Peak | -19.43 |
| 1 | 618.000000000 kHz | 38.11 | Quasi Peak | -17.89 |

Other emissions present had amplitudes at least 20 dB below the limit.

Table 5 AC Line Conducted Emissions Data L2 (#3, EUT – Computer)

| Trace | Frequency | Level (dBµV) | Detector | Delta Limit/dB |
|-------|-------------------|--------------|------------|----------------|
| 2 | 150.000000000 kHz | 35.24 | Average | -20.76 |
| 1 | 154.000000000 kHz | 49.30 | Quasi Peak | -16.48 |
| 2 | 162.000000000 kHz | 35.66 | Average | -19.70 |
| 1 | 254.000000000 kHz | 44.40 | Quasi Peak | -17.22 |
| 2 | 262.000000000 kHz | 37.78 | Average | -13.59 |
| 2 | 274.000000000 kHz | 34.09 | Average | -16.90 |
| 1 | 298.000000000 kHz | 43.95 | Quasi Peak | -16.35 |
| 2 | 302.000000000 kHz | 39.07 | Average | -11.12 |
| 2 | 338.000000000 kHz | 33.79 | Average | -15.46 |
| 1 | 338.000000000 kHz | 44.14 | Quasi Peak | -15.11 |
| 1 | 538.000000000 kHz | 40.20 | Quasi Peak | -15.80 |
| 1 | 590.000000000 kHz | 40.10 | Quasi Peak | -15.90 |

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for AC Line Conducted Emissions Results

The EUT demonstrated compliance with the AC Line Conducted Emissions requirements of 47CFR Part 15B and other applicable emissions requirements. The worst-case EUT AC adapter configuration #2 demonstrated a minimum margin of -21.5 dB below the FCC/IC requirements. The worst-case EUT CPU configuration #3 demonstrated a minimum margin of -11.1 dB below the FCC/IC requirements. Other emissions were present with amplitudes at least 20 dB below the limit and worst-case amplitudes recorded.

General Radiated Emissions Procedure

The EUT was arranged in a typical equipment configuration and operated through all available mode during testing. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS location before final radiated measurements were performed. Final data was taken with the EUT located on the OATS at 3 meters distance between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 25,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or double Ridge or pyramidal horns and mixers above 1 GHz, notch filters and appropriate amplifiers and external mixers were utilized.

Table 6 General Radiated Emissions Data

| Frequency in MHz | Horizontal Peak (dBµV/m) | Horizontal Quasi-Peak (dBµV/m) | Horizontal Average (dBµV/m) | Vertical Peak (dBµV/m) | Vertical Quasi-Peak (dBµV/m) | Vertical Average (dBµV/m) | Limit @ 3m (dBµV/m) |
|------------------|--------------------------|--------------------------------|-----------------------------|------------------------|------------------------------|---------------------------|---------------------|
| 164.0 | 22.2 | 15.2 | N/A | 26.0 | 14.1 | N/A | 40.0 |
| 232.5 | 20.7 | 11.4 | N/A | 17.5 | 12.0 | N/A | 40.0 |
| 263.9 | 27.1 | 21.4 | N/A | 22.7 | 18.8 | N/A | 47.0 |
| 300.0 | 21.1 | 15.9 | N/A | 20.8 | 16.0 | N/A | 47.0 |
| 720.0 | 25.6 | 20.1 | N/A | 25.2 | 20.4 | N/A | 47.0 |
| 3100.0 | 25.3 | N/A | 21.7 | 21.0 | N/A | 15.9 | 54.0 |

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15C paragraph 15.209, RSS-247 and RSS-GEN Intentional Radiators. The EUT demonstrated a minimum margin of -24.8 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the Band 2400 – 2483.5 MHz

Test procedures of ANSI C63.10-2013 paragraph 6, and KDB 558074 v04 were used during transmitter testing. The transmitter peak power was measured at the antenna port using a wide band peak RF power meter. The Peak Power Spectral Density (PKPSD) was measured as defined in KDB 558074 (10.2). Emission bandwidth was measured as described in C63.10-2013. The amplitude of each harmonic and general radiated emission was measured on the OATS at distance of 3 meters from the FSM antenna (testing was performed on sample 1 representative of production equipment with integral antenna). The EUT was positioned on supporting turntable elevated as required above the ground plane, at a distance of 3 meters from the FSM antenna. Radiated emission investigations were performed from 9 kHz to 25,000 MHz. Each radiated emission was maximized by varying the FSM antenna height and polarization, and by rotating the turntable. The worst-case amplitude of each emission was then recorded from the analyzer display. The peak and quasi-peak amplitude of frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of frequencies above 1000 MHz were measured using a spectrum analyzer. A Loop antenna was used for measuring emissions from 0.009 to 30 MHz, Biconilog Antenna for 30 to 1000 MHz, Double-Ridge, and/or Pyramidal Horn Antennas from 1 GHz to 25 GHz. Radiated Emissions were measured in dB μ V/m @ 3 meters. Test sample #2 was provided for testing antenna port conducted emissions. This sample was modified by replacing the internal antenna with a 50-ohm antenna port connector for testing purposes. Plots were taken of transmitter performance (using sample #2) for reference in this and other documentation.

Refer to figures five through twenty-two showing plots taken of the transmitter performance displaying compliance with the specifications.

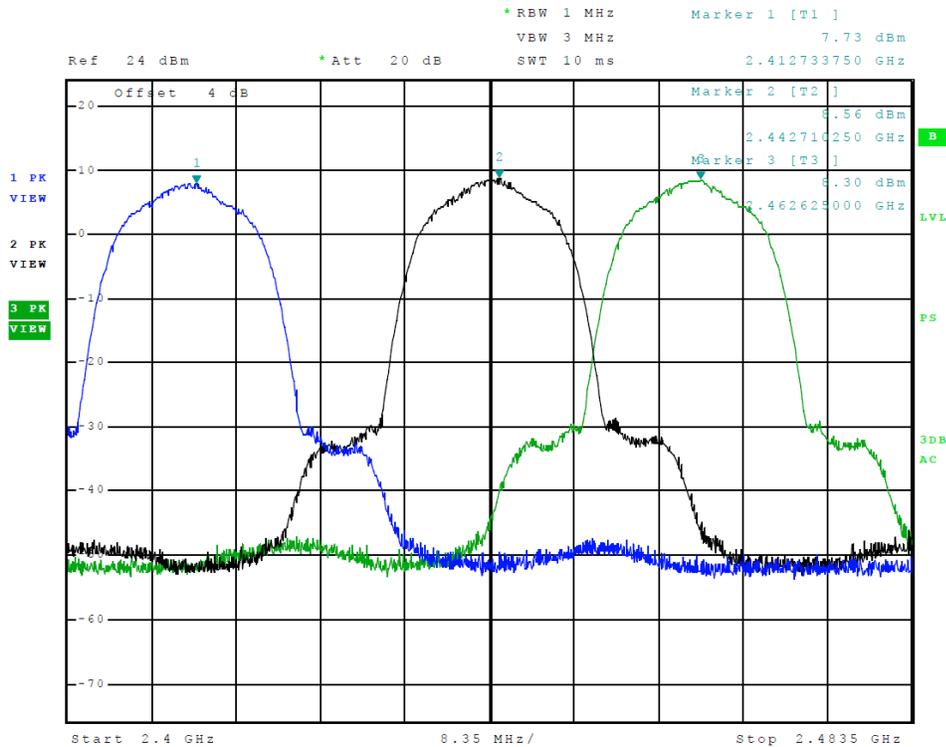


Figure 5 Plot of Transmitter Emissions in Operational Frequency (802.11 b-Mode)

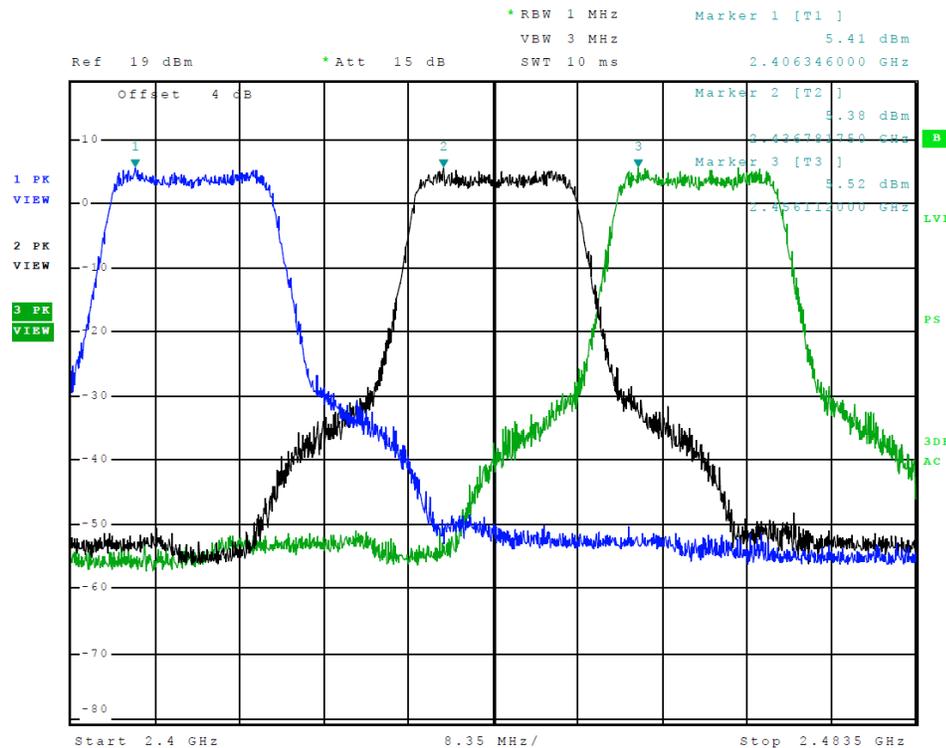


Figure 6 Plot of Transmitter Emissions in Operational Frequency (802.11 g-Mode)

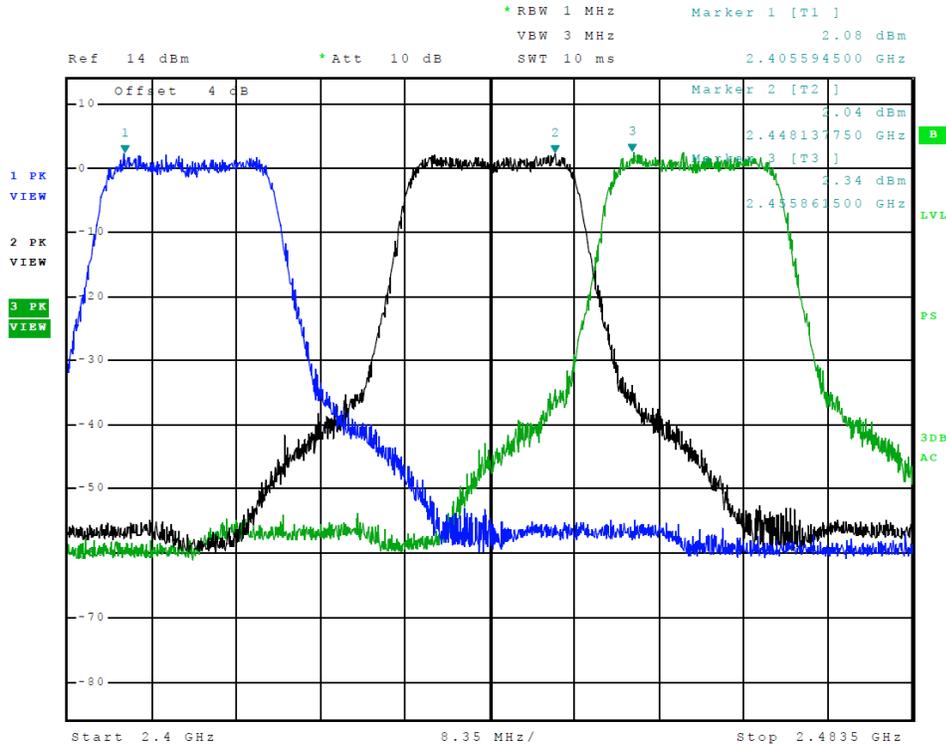


Figure 7 Plot of Transmitter Emissions in Operational Frequency (802.11 n-Mode)

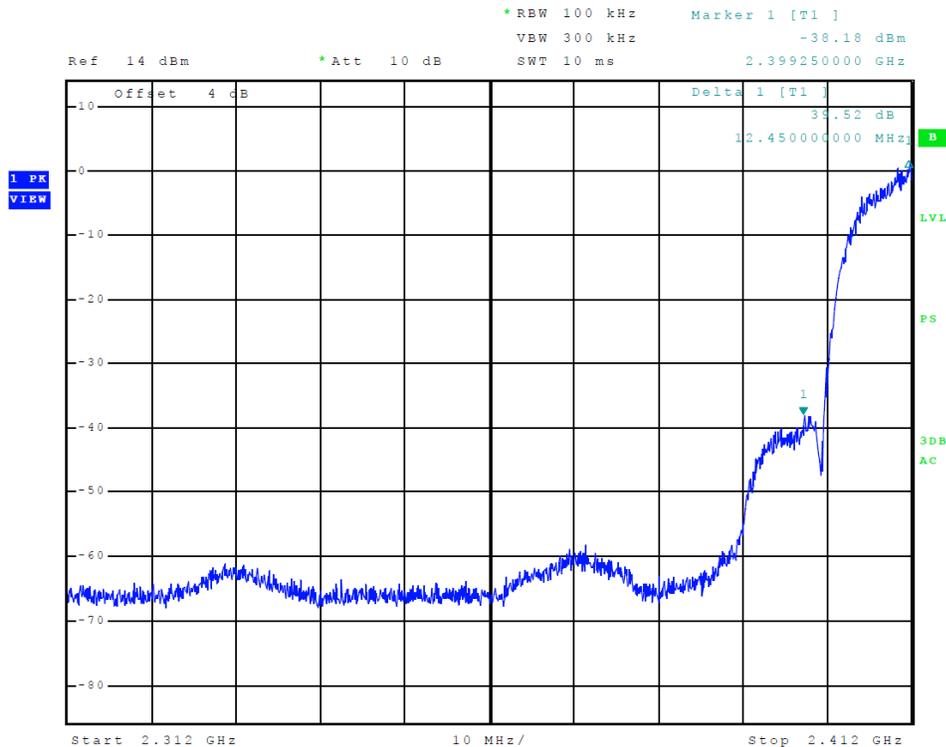


Figure 8 Plot of Lower Band Edge (802.11 b-mode)

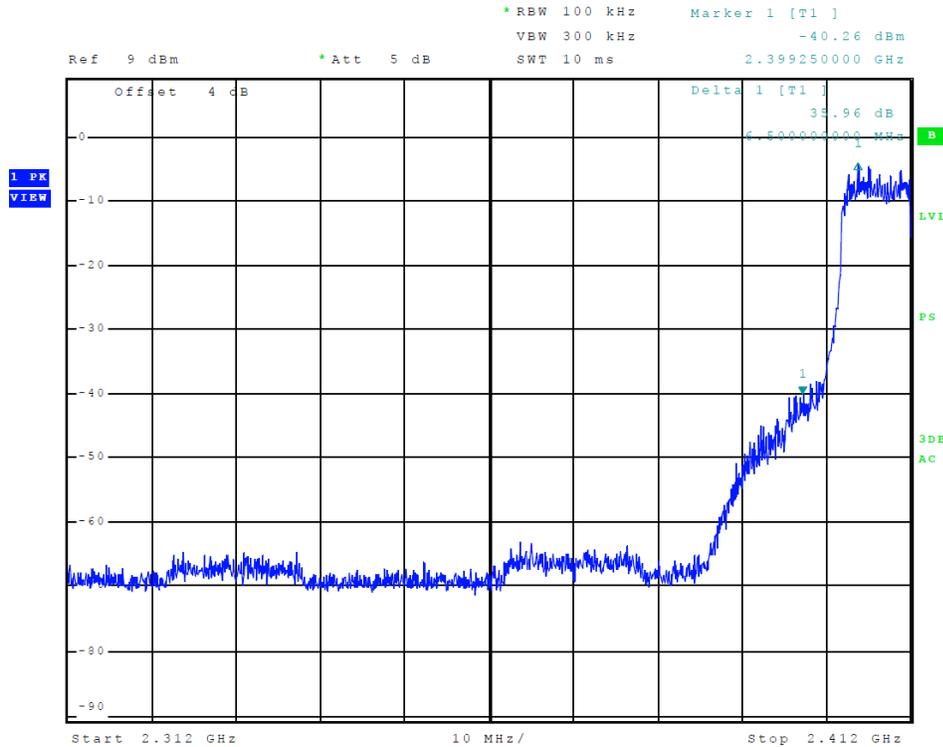


Figure 9 Plot of Lower Band Edge (802.11 g-mode)

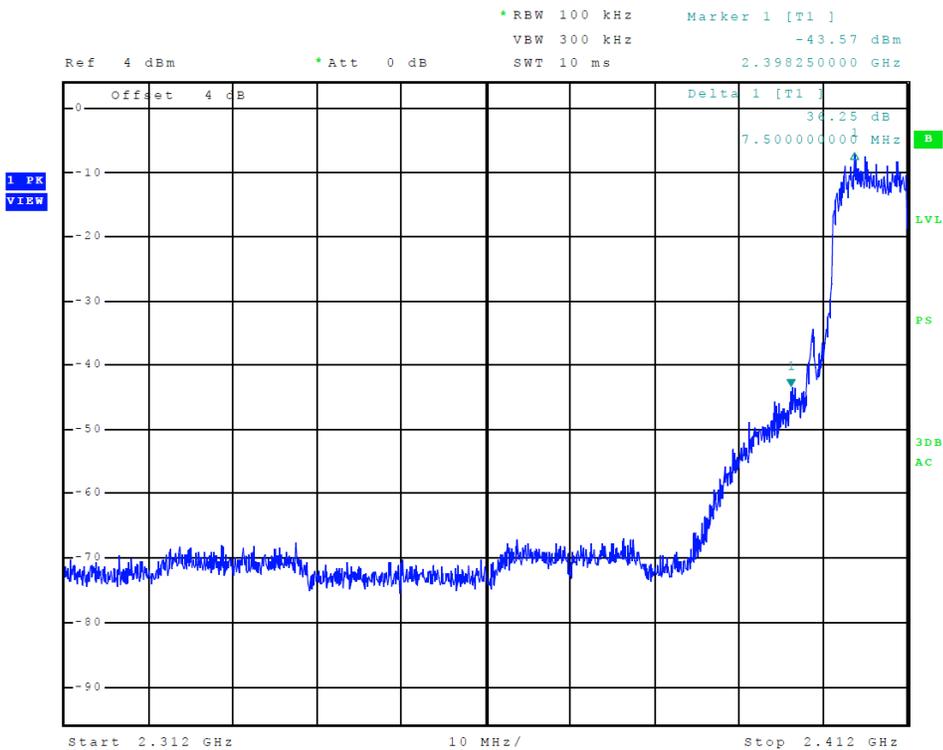


Figure 10 Plot of Lower Band Edge (802.11 n-mode)

Rogers Labs, Inc.
 4405 West 259th Terrace
 Louisburg, KS 66053
 Phone/Fax: (913) 837-3214
 Revision 2

Garmin International, Inc.
 Model: A03341
 Test #: 171026
 Test to: CFR47 15C, RSS-Gen RSS-247
 File: A03341 DTS TstRpt 171026 r2

SN's: FCC#1, FCC#3
 FCC ID: IPH-03341
 IC: 1792A-03341
 Date: June 13, 2018
 Page 26 of 39

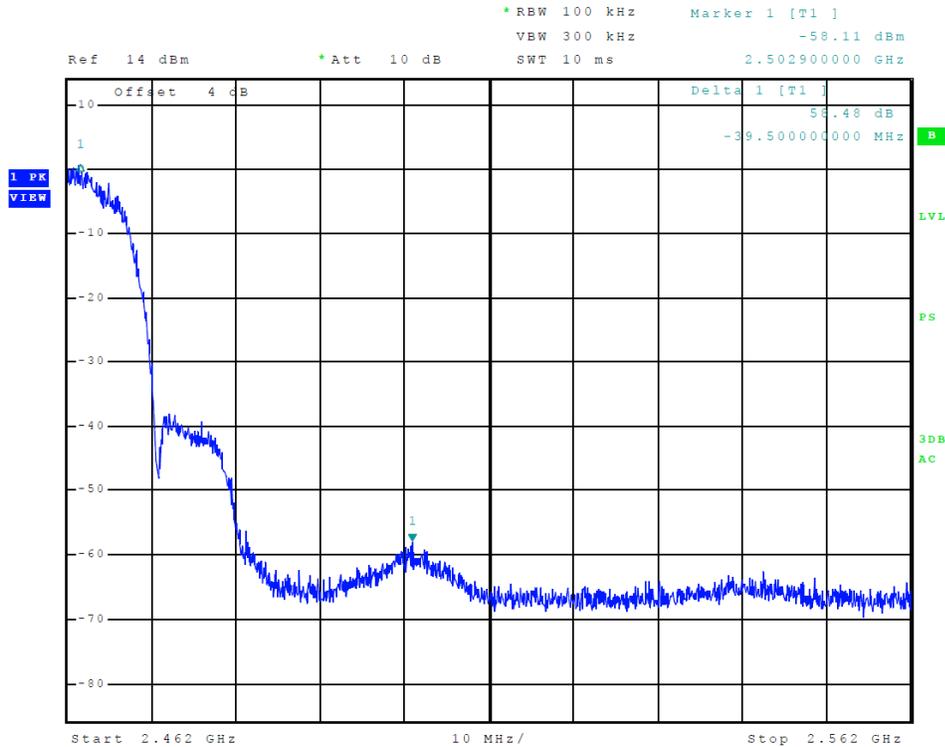


Figure 11 Plot of Upper Band Edge (802.11 b-mode)

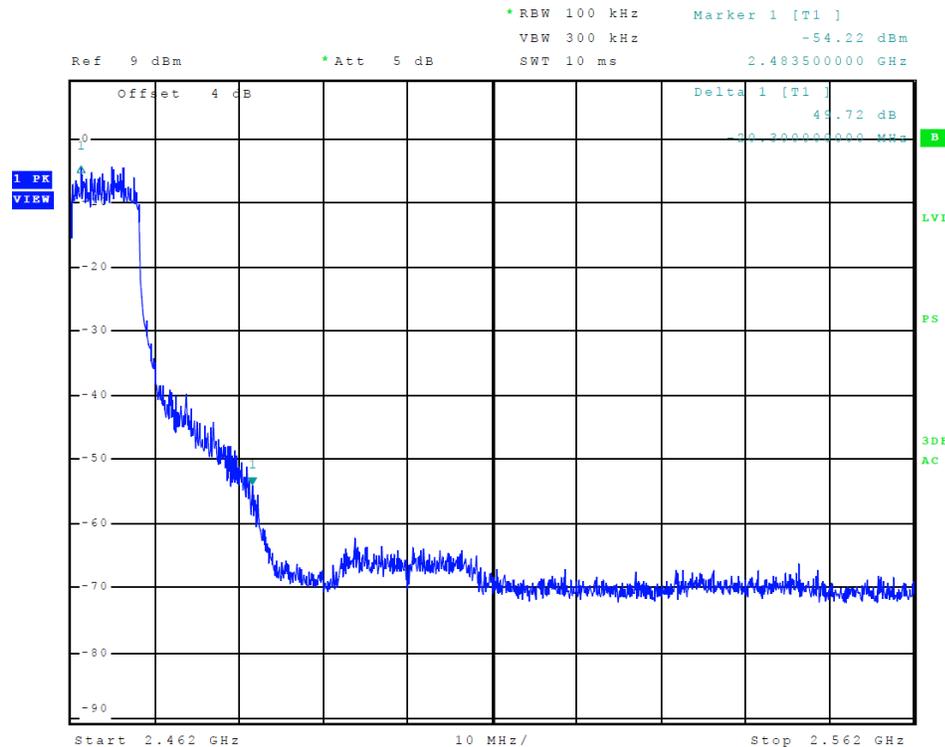


Figure 12 Plot of Upper Band Edge (802.11 g-mode)

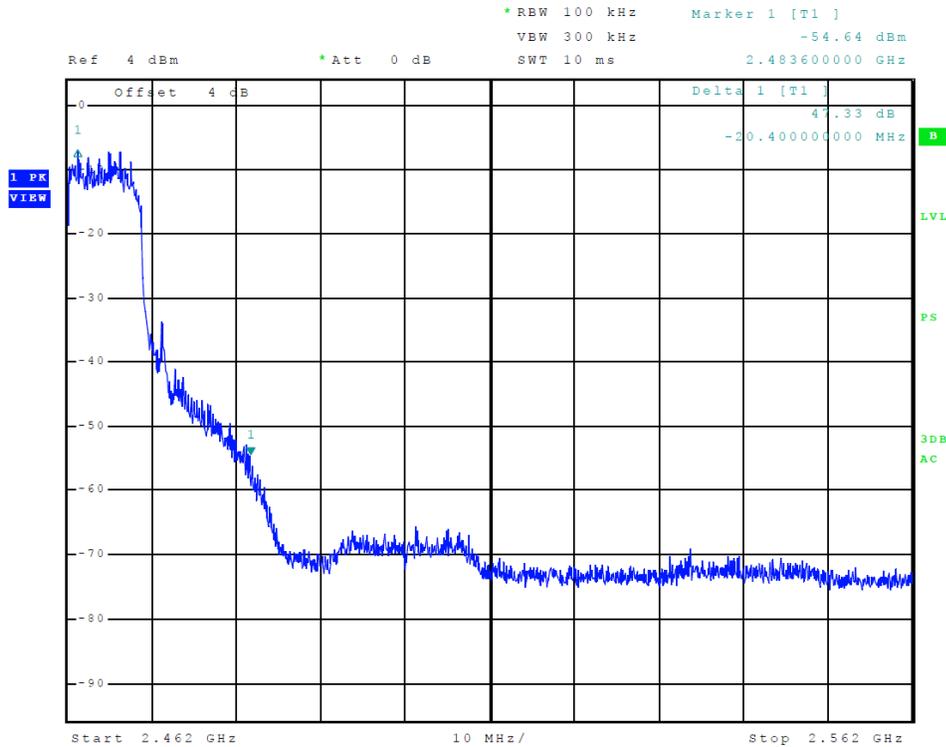


Figure 13 Plot of Upper Band Edge (802.11 n-mode)

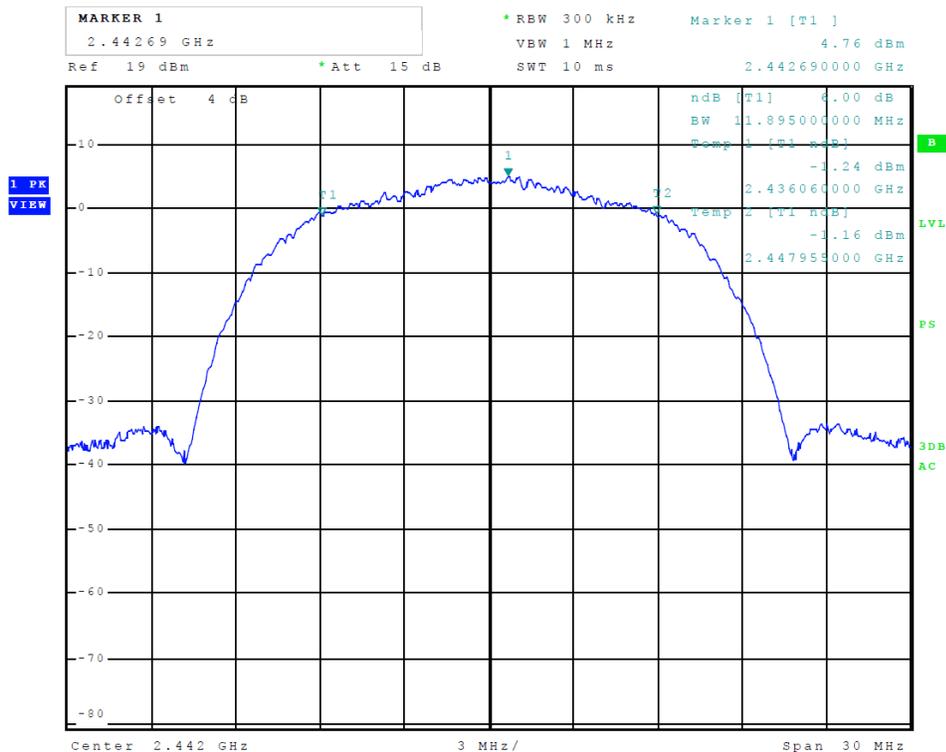


Figure 14 Plot of Transmitter 6-dB Occupied Bandwidth (802.11 b-mode)

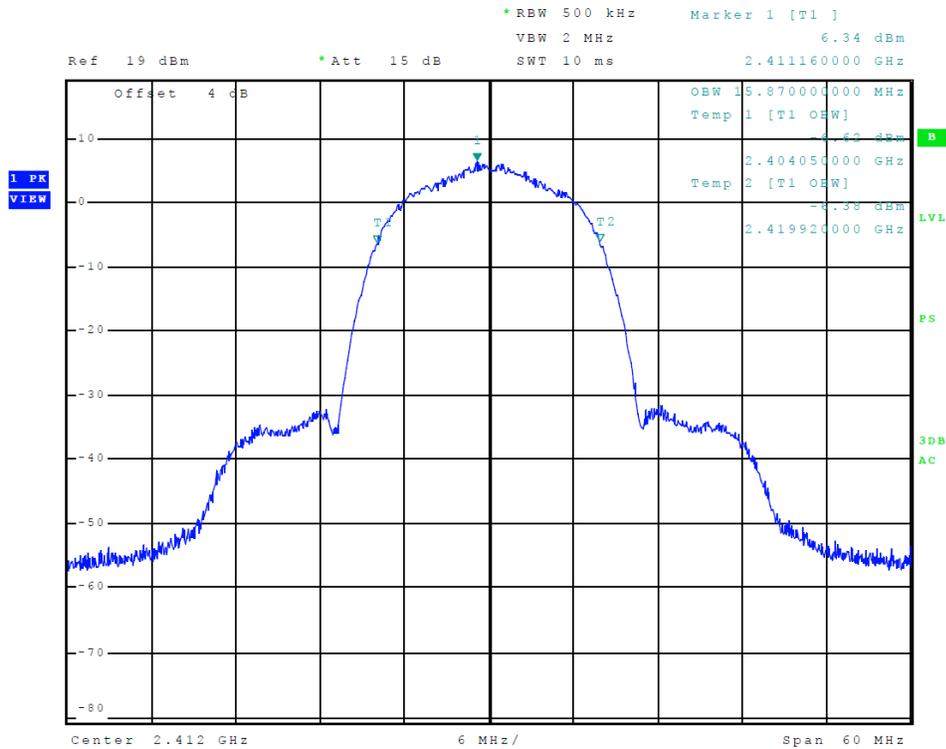


Figure 15 Plot of Transmitter 99% Occupied Bandwidth (802.11 b-mode)

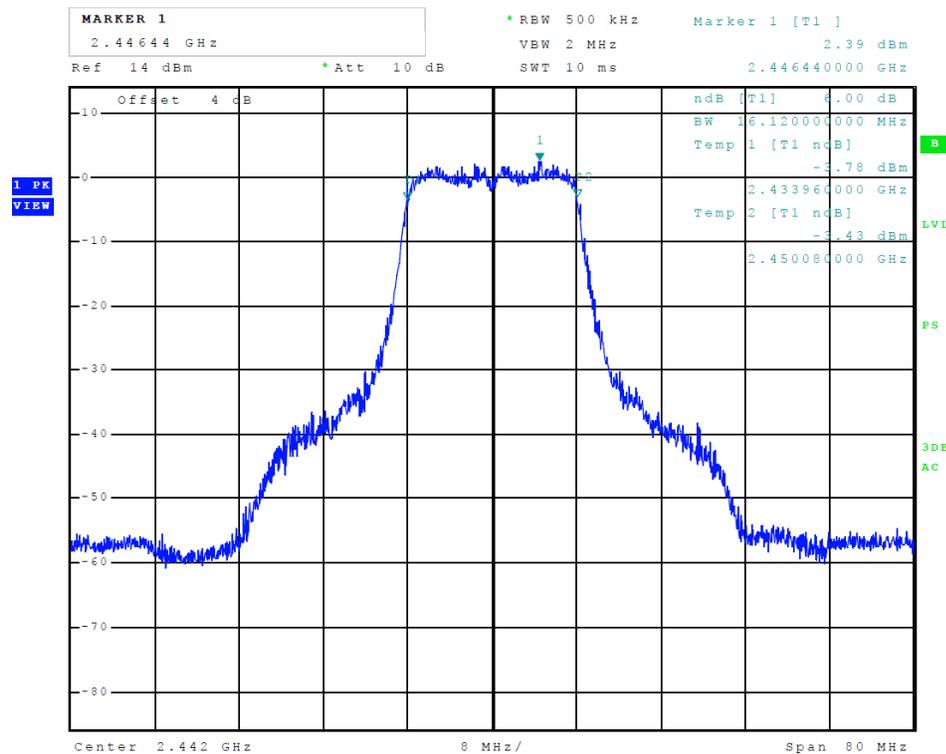


Figure 16 Plot of Transmitter 6-dB Occupied Bandwidth (802.11 g-mode)

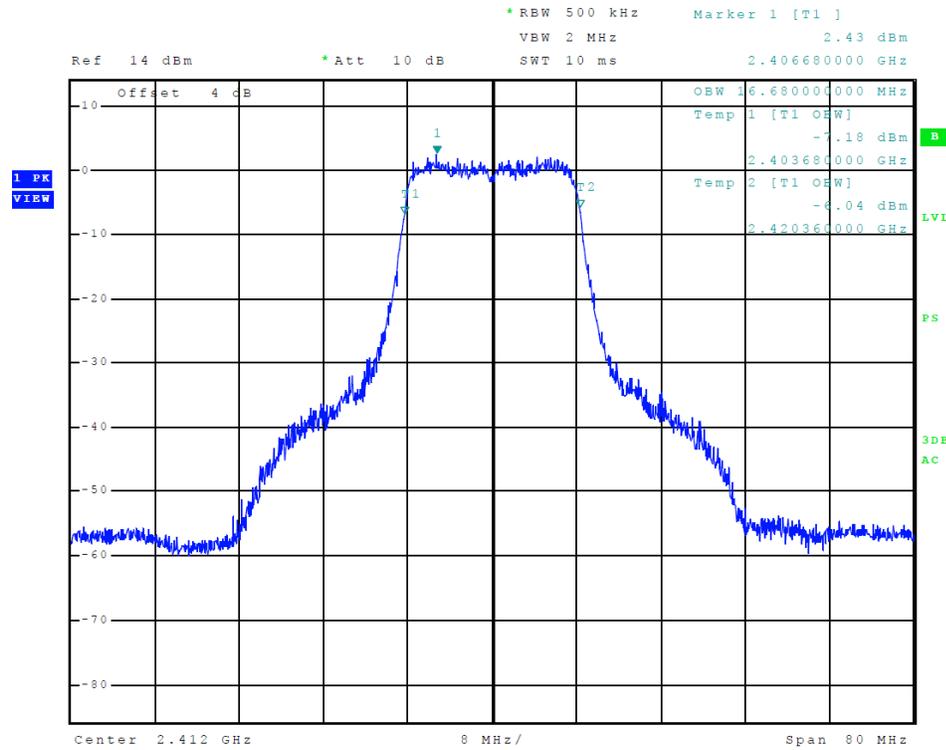


Figure 17 Plot of Transmitter 99% Occupied Bandwidth (802.11 g-mode)

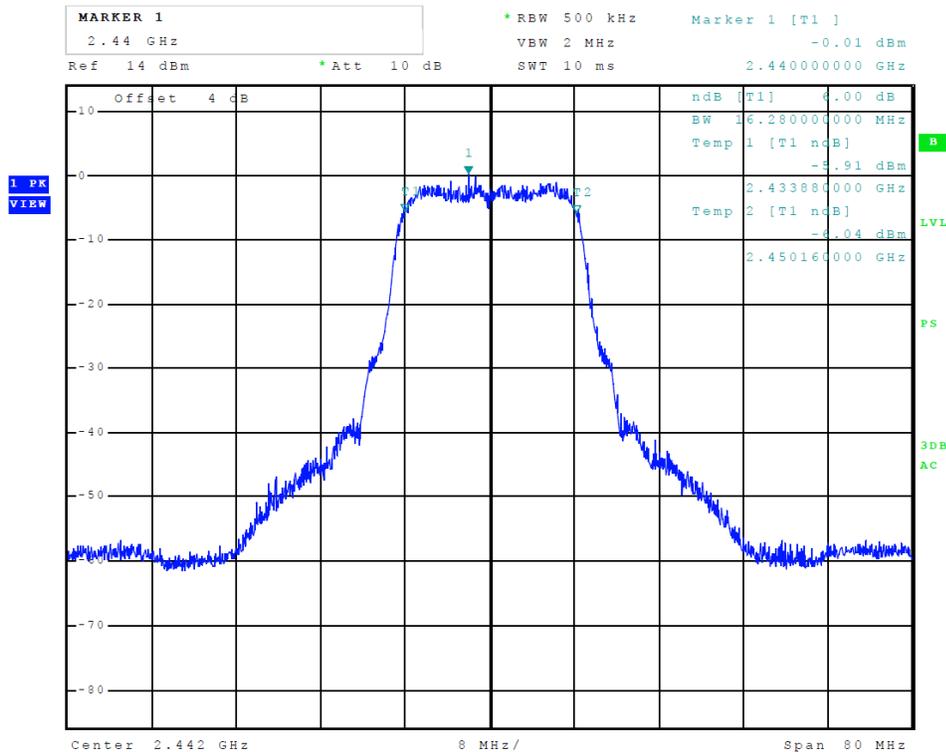


Figure 18 Plot of Transmitter 6-dB Occupied Bandwidth (802.11 n-mode)

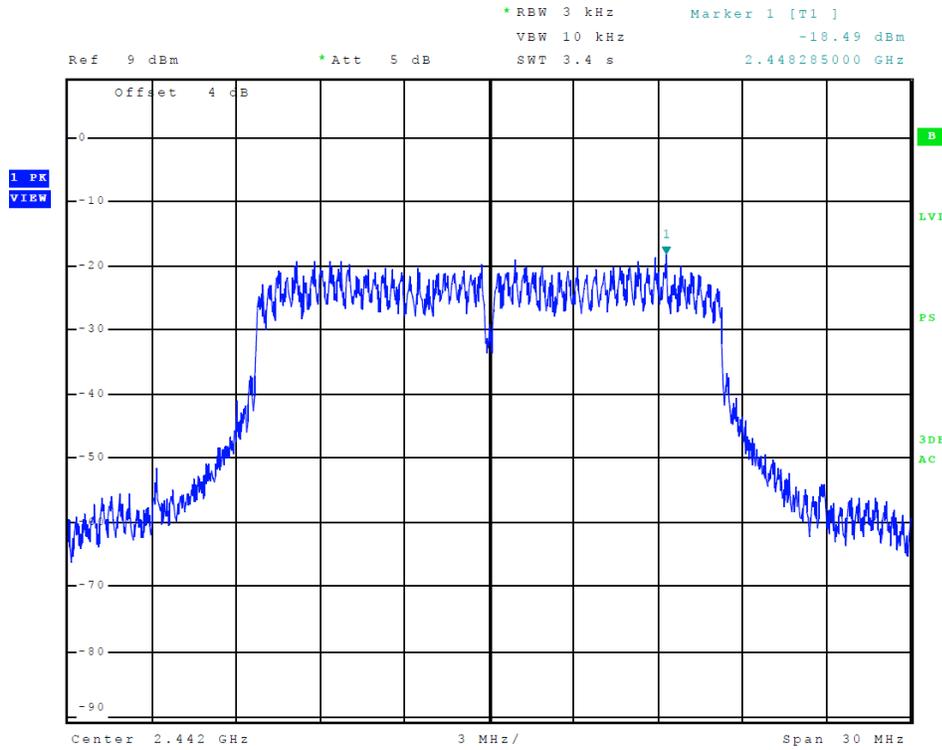


Figure 21 Plot of Transmitter Power Spectral Density (802.11 g-mode)

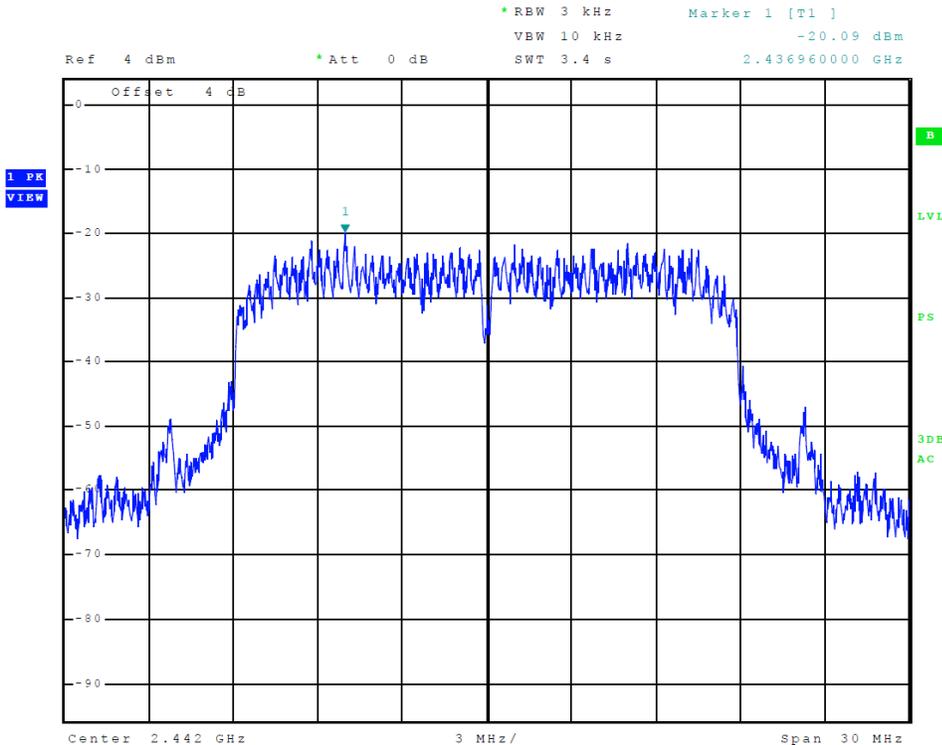


Figure 22 Plot of Transmitter Power Spectral Density (802.11 n-mode)

Transmitter Emissions Data

Table 7 Transmitter Radiated Emission Worst-case Data

| Frequency in MHz | Horizontal Peak (dBµV/m) | Horizontal Average (dBµV/m) | Vertical Peak (dBµV/m) | Vertical Average (dBµV/m) | Limit @ 3m (dBµV/m) |
|------------------|--------------------------|-----------------------------|------------------------|---------------------------|---------------------|
| 2412.0 | -- | -- | -- | -- | -- |
| 4824.0 | 45.6 | 32.8 | 48.6 | 37.1 | 54.0 |
| 7236.0 | 45.6 | 32.8 | 46.2 | 33.5 | 54.0 |
| 9648.0 | 46.8 | 33.9 | 46.6 | 33.9 | 54.0 |
| 12060.0 | 49.8 | 36.8 | 49.7 | 37.1 | 54.0 |
| 14472.0 | 49.5 | 36.5 | 49.5 | 36.5 | 54.0 |
| 16884.0 | 52.9 | 39.8 | 52.7 | 40.1 | 54.0 |
| 2442.0 | -- | -- | -- | -- | -- |
| 4884.0 | 45.2 | 33.2 | 46.4 | 36.3 | 54.0 |
| 7326.0 | 45.7 | 32.9 | 45.2 | 32.3 | 54.0 |
| 9768.0 | 46.2 | 33.9 | 47.3 | 33.9 | 54.0 |
| 12210.0 | 50.2 | 36.7 | 49.8 | 36.8 | 54.0 |
| 14652.0 | 49.7 | 36.7 | 50.4 | 36.8 | 54.0 |
| 17094.0 | 54.2 | 41.3 | 54.4 | 41.3 | 54.0 |
| 2462.0 | -- | -- | -- | -- | -- |
| 4924.0 | 44.1 | 31.4 | 44.5 | 31.8 | 54.0 |
| 7386.0 | 46.4 | 33.4 | 45.4 | 33.0 | 54.0 |
| 9848.0 | 47.1 | 34.2 | 47.1 | 34.4 | 54.0 |
| 12310.0 | 48.4 | 36.1 | 49.1 | 36.1 | 54.0 |
| 14772.0 | 50.5 | 37.6 | 50.2 | 37.7 | 54.0 |
| 17234.0 | 52.9 | 39.6 | 50.3 | 37.3 | 54.0 |

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 8 Transmitter Antenna Port Data

| Frequency MHz | Antenna Port Output Power Peak / Ave. (Watts) | 99% Occupied Bandwidth (kHz) | 6-dB Occupied Bandwidth (kHz) | Peak Power Spectral Density (dBm/3kHz) |
|---------------|---|------------------------------|-------------------------------|--|
| 802.11b | | | | |
| 2412 | 0.037 / 0.021 | 15870 | 11880 | -13.3 |
| 2442 | 0.040 / 0.021 | 15840 | 11895 | -13.0 |
| 2462 | 0.041 / 0.022 | 15870 | 12105 | -13.2 |
| 802.11g | | | | |
| 2412 | 0.082 / 0.015 | 16680 | 16240 | -18.9 |
| 2442 | 0.091 / 0.016 | 16640 | 16120 | -18.4 |
| 2462 | 0.086 / 0.015 | 16640 | 16160 | -18.6 |
| 802.11n | | | | |
| 2412 | 0.086 / 0.015 | 17520 | 16440 | -21.0 |
| 2442 | 0.093 / 0.015 | 17480 | 16280 | -21.4 |
| 2462 | 0.097 / 0.016 | 17520 | 16400 | -20.7 |

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15.247, RSS-GEN, and RSS-247 Digital Transmission Systems. Antenna port conducted peak output power of 0.097 Watts average and 0.022 Watts peak was measured at the temporary antenna port of the EUT. The peak power spectral density measured at the antenna port presented a minimum margin of -21.0 dB below the requirements. The EUT demonstrated a minimum margin of -12.7 dB below the harmonic emissions requirements. There were no other significantly measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. There were no other deviations or exceptions to the requirements.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D Rogers Labs Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

Measurement uncertainty calculations were made for the laboratory. Result of measurement uncertainty calculations are recorded below for AC line conducted and radiated emission measurements.

| Measurement Uncertainty | $U_{(E)}$ | $U_{(lab)}$ |
|---|-----------|-------------|
| 3 Meter Horizontal 30-200 MHz Measurements | 2.08 | 4.16 |
| 3 Meter Vertical 30-200 MHz Measurements | 2.16 | 4.33 |
| 3 Meter Vertical Measurements 200-1000 MHz | 2.99 | 5.97 |
| 10 Meter Horizontal Measurements 30-200 MHz | 2.07 | 4.15 |
| 10 Meter Vertical Measurements 30-200 MHz | 2.06 | 4.13 |
| 10 Meter Horizontal Measurements 200-1000 MHz | 2.32 | 4.64 |
| 10 Meter Vertical Measurements 200-1000 MHz | 2.33 | 4.66 |
| 3 Meter Measurements 1-6 GHz | 2.57 | 5.14 |
| 3 Meter Measurements 6-18 GHz | 2.58 | 5.16 |
| AC Line Conducted | 1.72 | 3.43 |

Annex B Rogers Labs Test Equipment List

| List of Test Equipment | Calibration | Date | Due |
|---|-------------|----------|----------|
| Antenna: Schwarzbeck Model: BBA 9106/VHBB 9124 (9124-627) | | 5/15/17 | 5/15/18 |
| Antenna: Schwarzbeck Model: VULP 9118 A (VULP 9118 A-534) | | 5/15/17 | 5/15/18 |
| Antenna: EMCO 6509 | | 10/24/17 | 10/24/19 |
| Antenna: EMCO 3143 (9607-1277) 20-1200 MHz | | 5/15/17 | 5/15/18 |
| Antenna: EMCO Dipole Set 3121C | | 2/23/17 | 2/23/18 |
| Antenna: C.D. B-101 | | 2/23/17 | 2/23/18 |
| Antenna: Solar 9229-1 & 9230-1 | | 2/23/17 | 2/23/18 |
| Cable: Belden 8268 (L3) | | 10/24/17 | 10/24/18 |
| Cable: Time Microwave: 4M-750HF290-750 | | 10/24/17 | 10/24/18 |
| Frequency Counter: Leader LDC-825 (8060153) | | 2/5/17 | 2/5/18 |
| Oscilloscope Scope: Tektronix 2230 | | 2/23/17 | 2/23/18 |
| Wattmeter: Bird 43 with Load Bird 8085 | | 2/23/17 | 2/23/18 |
| Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140 | | 2/23/17 | 2/23/18 |
| R.F. Generators: HP 606A, HP 8614A, HP 8640B | | 2/23/17 | 2/23/18 |
| R.F. Power Amp 65W Model: 470-A-1010 | | 2/23/17 | 2/23/18 |
| R.F. Power Amp 50W M185- 10-501 | | 2/23/17 | 2/23/18 |
| R.F. Power Amp A.R. Model: 10W 1010M7 | | 2/23/17 | 2/23/18 |
| R.F. Power Amp EIN Model: A301 | | 2/23/17 | 2/23/18 |
| LISN: Compliance Eng. Model 240/20 | | 5/15/17 | 5/15/19 |
| LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08 | | 5/15/17 | 5/15/18 |
| Audio Oscillator: H.P. 201CD | | 2/23/17 | 2/23/18 |
| ESD Test Set 2010i | | 2/23/17 | 2/23/18 |
| Fast Transient Burst Generator Model: EFT/B-101 | | 2/23/17 | 2/23/18 |
| Field Intensity Meter: EFM-018 | | 2/23/17 | 2/23/18 |
| KEYTEK Ecat Surge Generator | | 2/23/17 | 2/23/18 |
| Shielded Room not required | | | |

Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years' experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held


Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current




Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



Scot D. Rogers

Annex D Rogers Labs Certificate of Accreditation
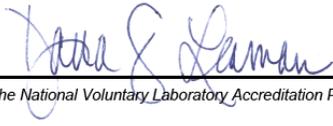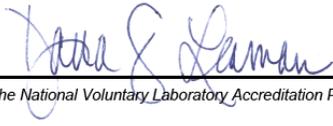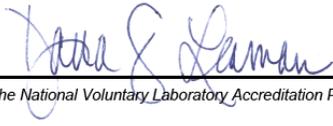
| | | | | | |
|---|---|---|---|---|---|
| <p>United States Department of Commerce National Institute of Standards and Technology</p>  <hr/> <p>Certificate of Accreditation to ISO/IEC 17025:2005</p> <hr/> <p>NVLAP LAB CODE: 200087-0</p> <p>Rogers Labs, Inc. Louisburg, KS</p> <p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p> <p>Electromagnetic Compatibility & Telecommunications</p> <p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p> <hr/> <table border="0" style="width: 100%;"><tr><td style="width: 33%; text-align: center;"><p>2017-03-01 through 2018-03-31 <i>Effective Dates</i></p></td><td style="width: 33%; text-align: center;"></td><td style="width: 33%; text-align: center;"> <i>For the National Voluntary Laboratory Accreditation Program</i></td></tr></table> | | | <p>2017-03-01 through 2018-03-31 <i>Effective Dates</i></p> |  |  <i>For the National Voluntary Laboratory Accreditation Program</i> |
| <p>2017-03-01 through 2018-03-31 <i>Effective Dates</i></p> |  |  <i>For the National Voluntary Laboratory Accreditation Program</i> | | | |

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 2

Garmin International, Inc.
Model: A03341
Test #: 171026
Test to: CFR47 15C, RSS-Gen RSS-247
File: A03341 DTS TstRpt 171026 r2

SN's: FCC#1, FCC#3
FCC ID: IPH-03341
IC: 1792A-03341
Date: June 13, 2018
Page 39 of 39