


# FCC Test Report

**FCC ID** : IPH-03384  
**Equipment** : Marine Stereo  
**Model No.** : MS-AV755  
(Please refer to section 1.1.1 for more details)  
**Brand Name** : FUSION  
**Applicant** : Garmin International, Inc.  
**Address** : 1200 E. 151st Street Olathe, KS 66062 United States  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Mar. 13, 2017  
**Tested Date** : Apr. 12 ~ Apr. 17, 2017

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

  
\_\_\_\_\_  
Along Chen / Assistant Manager

Approved by:

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	8
1.3	Test Setup Chart .....	8
1.4	The Equipment List .....	10
1.5	Test Standards .....	11
1.6	Measurement Uncertainty .....	11
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>12</b>
2.1	Testing Condition .....	12
2.2	The Worst Test Modes and Channel Details .....	12
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>13</b>
3.1	Unwanted Emissions into Restricted Frequency Bands .....	13
3.2	Unwanted Emissions into Non-Restricted Frequency Bands .....	32
3.3	Conducted Output Power .....	37
3.4	Number of Hopping Frequency .....	39
3.5	20dB and Occupied Bandwidth .....	41
3.6	Channel Separation.....	43
3.7	Number of Dwell Time.....	45
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>48</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR731301AD	Rev. 01	Initial issue	Jun. 16, 2017

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	Note <sup>1</sup>	N/A
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 60.21MHz 37.24 (Margin -2.76dB) - QP	Pass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 4.61	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass
<p>N/A means Not Applicable.            Note<sup>1</sup>: The EUT consumes DC power, so the test is not required.</p>			

# 1 General Description

## 1.1 Information

### 1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
FUSION	MS-AV755	Marine Stereo	DVD player function
	MS-UD755		USB player function

### 1.1.2 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.  
 Note 2: Bluetooth BR uses a GFSK.  
 Note 3: Bluetooth EDR uses a combination of  $\pi/4$ -DQPSK and 8DPSK.

### 1.1.3 Antenna Details

Ant. No.	Type	Connector	Gain (dBi)	Remarks
1	PIFA	No	3.92	---

### 1.1.4 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	DC 12Vdc from battery
--------------------------	-----------------------

### 1.1.5 Accessories

Accessories		
<b>Model: MS-AV755</b>		
No.	Equipment	Description
1	Power cable	0.22m non-shielded without core
2	Speaker cable	0.22m non-shielded without core
3	IR remote	---
<b>Model: MS-UD755</b>		
1	Power cable	0.22m non-shielded without core
2	Speaker cable	0.22m non-shielded without core
3	IR remote	---
4	USB Cable (x3)	0.1m shielded without core

### 1.1.6 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

### 1.1.7 Test Tool and Duty Cycle

Test Tool	CBT
-----------	-----

### 1.1.8 Power Setting


Modulation Mode	Test Frequency (MHz)		
	2402	2441	2480
GFSK/1Mbps	Default	Default	Default
$\pi/4$ -DQPSK /2Mbps	Default	Default	Default
8DPSK/3Mbps	Default	Default	Default

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	USB Flash	Kingston	DTSE9	---	USB, 1m shielded
2	Notebook	DELL	Latitude E6440	Doc	RJ45, 10m non-shielded
3	Battery	YUASA	36B20R(S)	---	Power, 0.22m non-shielded DC, 5m non-shielded
4	LCD Monitor	DELL	3008WFTP	---	HDMI, 1.8m shielded
5	Wired Remote	Fusion	MS-NRX300	---	NMEA 2000, 6m shielded
6	Satellite radio	Siriusxm	SXV300	---	SXM, 0.3m shielded
7	Speaker load	---	---	---	Speaker (x4), 5m non-shielded
8	Radio ANT	---	---	---	RF, 6m non-shielded


Note: No. 5~ No. 8 were supplied by applicant.

## 1.3 Test Setup Chart

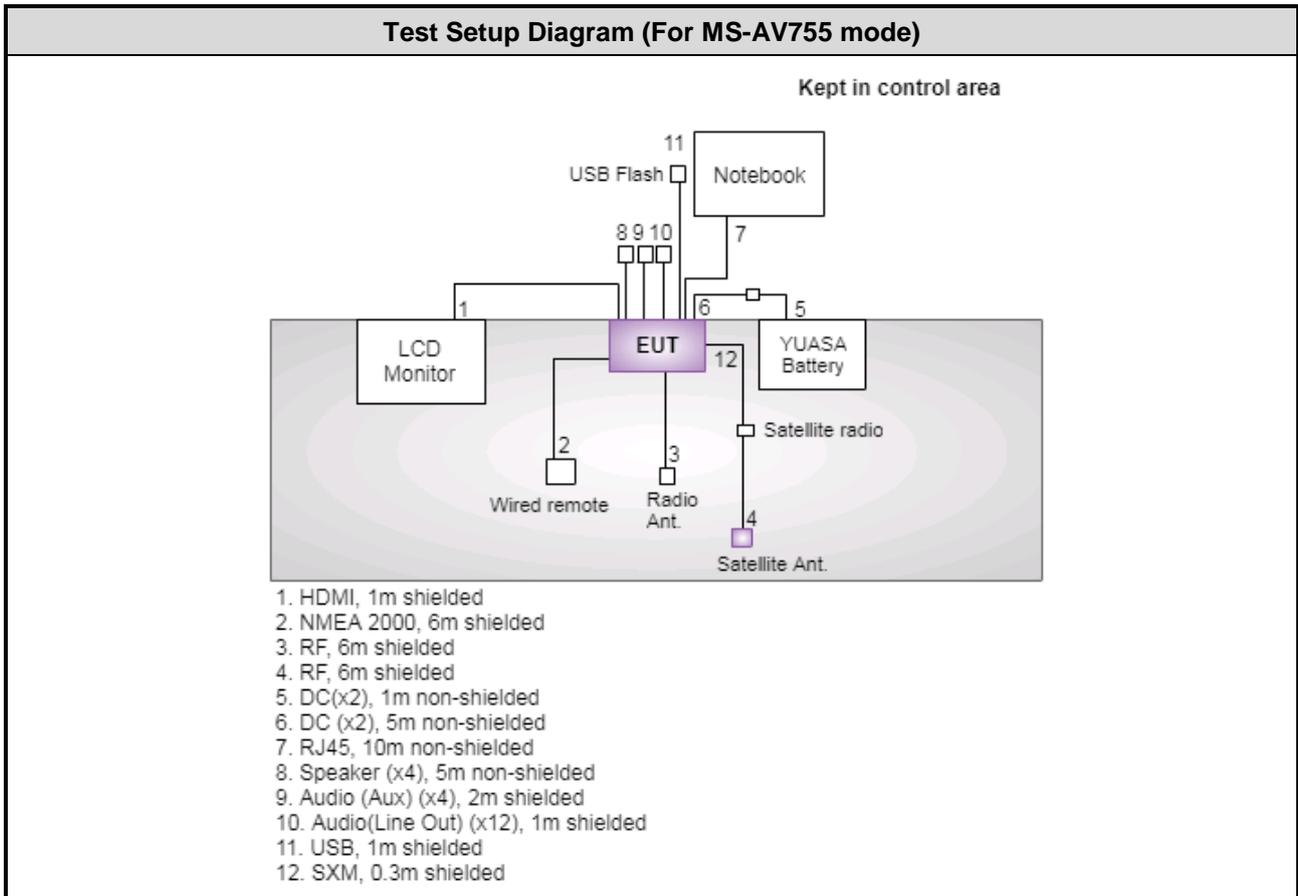

**Test Setup Diagram (For MS-UD755 mode)**

Kept in control area

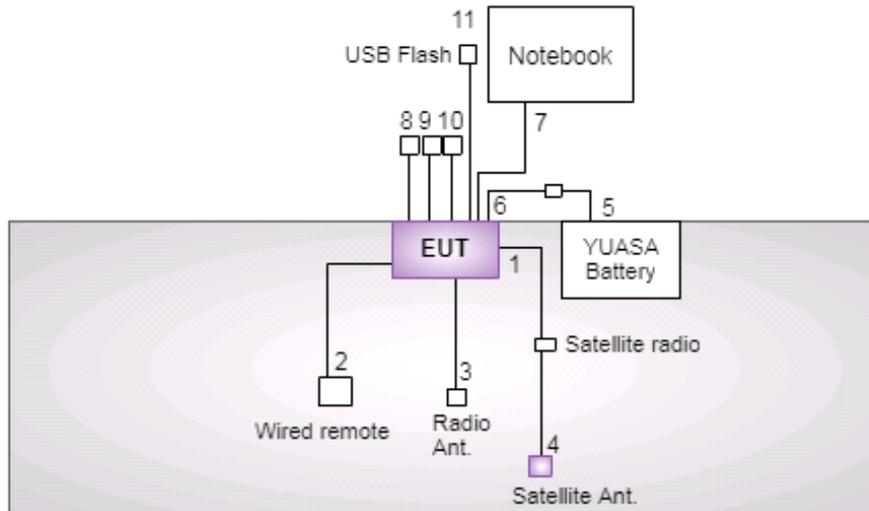

1. SXM, 0.3m shielded
2. NMEA 2000, 6m shielded
3. RF, 6m shielded
4. RF, 6m shielded
5. DC(x2), 1m non-shielded
6. DC (x2), 5m non-shielded
7. RJ45, 10m non-shielded
8. Speaker (x4), 5m non-shielded
9. Audio (Aux) (x4), 2m shielded
10. Audio(Line Out) (x12), 1m shielded
11. USB, 1m shielded

## 1.4 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Nov. 25, 2016	Nov. 24, 2017
Receiver	R&S	ESR3	101658	Nov. 24, 2016	Nov. 23, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 04, 2016	Aug. 03, 2017
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 21, 2016	Dec. 20, 2017
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 09, 2016	Dec. 08, 2017
Preamplifier	EMC	EMC02325	980225	Aug. 05, 2016	Aug. 04, 2017
Preamplifier	Agilent	83017A	MY39501308	Oct. 06, 2016	Oct. 05, 2017
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 09, 2016	Dec. 08, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 09, 2016	Dec. 08, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 09, 2016	Dec. 08, 2017
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	16052	Dec. 09, 2016	Dec. 08, 2017
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 09, 2016	Dec. 08, 2017
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 09, 2016	Dec. 08, 2017
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Mar. 15, 2017	Mar. 14, 2018
Power Meter	Anritsu	ML2495A	1241002	Oct. 06, 2016	Oct. 05, 2017
Power Sensor	Anritsu	MA2411B	1207366	Oct. 06, 2016	Oct. 05, 2017
DC POWER SOURCE	GW INSTEK	GPC-6030D	EM892433	Oct. 20, 2016	Oct. 19, 2017
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

## 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ ))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	$\pm 34.134$ Hz
Conducted power	$\pm 0.808$ dB
Power density	$\pm 0.463$ dB
Conducted emission	$\pm 2.670$ dB
AC conducted emission	$\pm 2.90$ dB
Radiated emission $\leq 1$ GHz	$\pm 3.66$ dB
Radiated emission $> 1$ GHz	$\pm 5.63$ dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH01-WS	24°C / 64%	Vincent Yeh
RF Conducted	TH01-WS	23°C / 65%	Brad Wu

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- IC site registration No.: 10807A-1

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Radiated Emissions ≤ 1GHz	8DPSK	2402	1Mbps	1, 2
Radiated Emissions > 1GHz	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	2
Conducted Output Power	GFSK π/4 QDPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	2
Number of Hopping Channels	GFSK 8DPSK	2402~2480 2402~2480	1Mbps 3Mbps	2
Hopping Channel Separation 20dB and Occupied bandwidth	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	2
Dwell Time	GFSK 8DPSK	2402 2402	1Mbps 3Mbps	2

**NOTE:**  
The EUT had been tested by following test configurations for radiated emission below 1GHz.

- 1) Configuration 1 : MS-AV755 mode
- 2) Configuration 2 : MS-UD755 mode

### 3 Transmitter Test Results

#### 3.1 Unwanted Emissions into Restricted Frequency Bands

##### 3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.1.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.

2. Radiated emission above 1GHz / Peak value  
RBW=1MHz, VBW=3MHz and Peak detector

Radiated emission above 1GHz / Average value for harmonics


The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:

3. 
$$20\log(\text{Duty cycle}) = 20\log \frac{1\text{s} / 1600 * 5}{100\text{ ms}} = -30.1\text{dB}$$


4. Radiated emission above 1GHz / Average value for other emissions  
RBW=1MHz, VBW=1/T and Peak detector

### 3.1.3 Test Setup

#### Radiated Emissions below 1 GHz

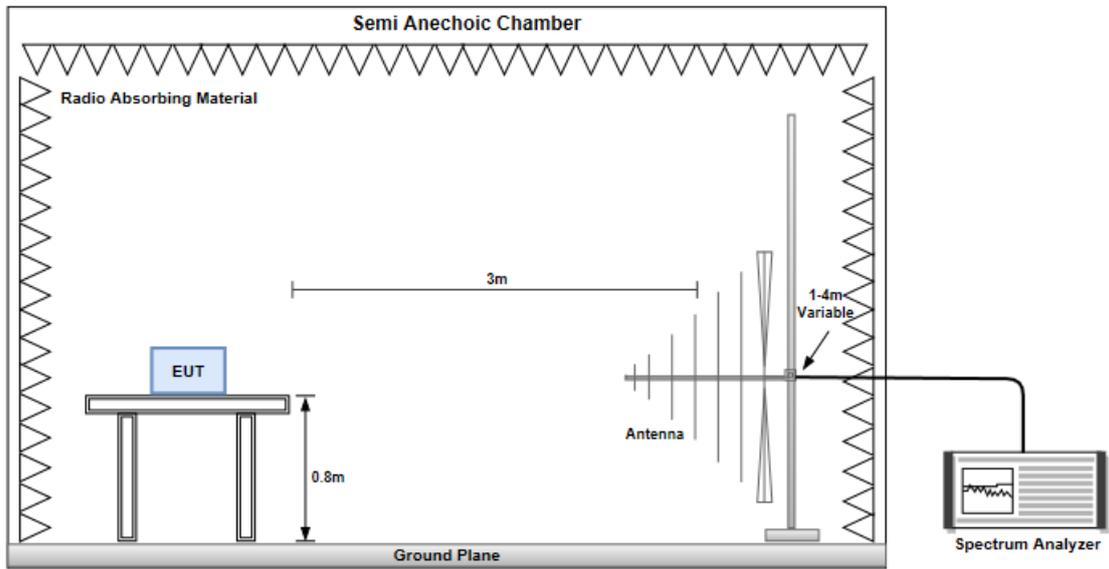


#### Radiated Emissions above 1 GHz

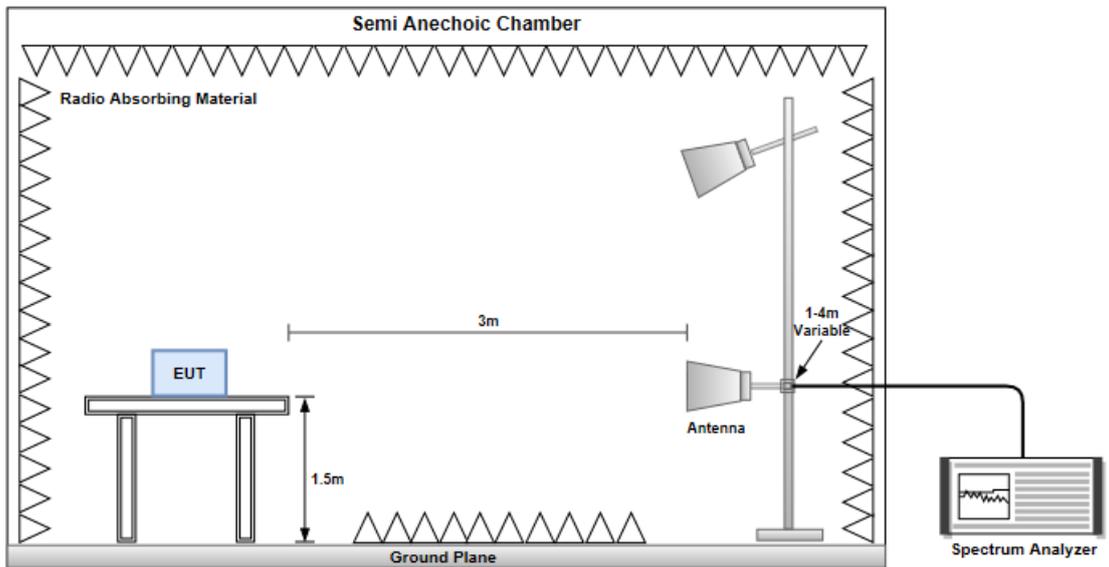


### Configuration 1 : MS-AV755 mode

#### 3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

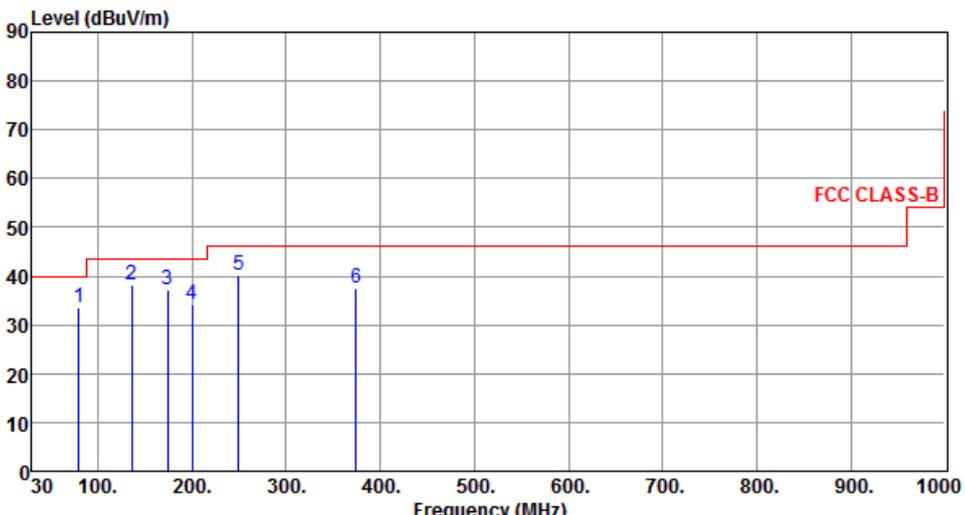Modulation	8DPSK	Test Freq. (MHz)	2402																																																																						
Polarization	Horizontal																																																																								
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the FCC CLASS-B limit, starting at 40 dBuV/m from 30 MHz to 100 MHz, rising to 45 dBuV/m at 100 MHz, and rising to 55 dBuV/m at 1000 MHz. Six blue vertical lines represent measured peaks, labeled 1 through 6, with their frequencies and levels indicated in the table below.</p>																																																																									
<table border="1"> <thead> <tr> <th></th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>79.47</td> <td>33.49</td> <td>40.00</td> <td>-6.51</td> <td>45.95</td> <td>-12.46</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>135.73</td> <td>38.29</td> <td>43.50</td> <td>-5.21</td> <td>46.90</td> <td>-8.61</td> <td>QP</td> <td>187</td> <td>262</td> </tr> <tr> <td>3</td> <td>174.53</td> <td>37.11</td> <td>43.50</td> <td>-6.39</td> <td>46.20</td> <td>-9.09</td> <td>QP</td> <td>187</td> <td>255</td> </tr> <tr> <td>4</td> <td>199.75</td> <td>34.07</td> <td>43.50</td> <td>-9.43</td> <td>45.20</td> <td>-11.13</td> <td>QP</td> <td>100</td> <td>284</td> </tr> <tr> <td>5</td> <td>249.22</td> <td>40.24</td> <td>46.00</td> <td>-5.76</td> <td>49.47</td> <td>-9.23</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>374.35</td> <td>37.45</td> <td>46.00</td> <td>-8.55</td> <td>43.08</td> <td>-5.63</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	79.47	33.49	40.00	-6.51	45.95	-12.46	Peak	---	---	2	135.73	38.29	43.50	-5.21	46.90	-8.61	QP	187	262	3	174.53	37.11	43.50	-6.39	46.20	-9.09	QP	187	255	4	199.75	34.07	43.50	-9.43	45.20	-11.13	QP	100	284	5	249.22	40.24	46.00	-5.76	49.47	-9.23	Peak	---	---	6	374.35	37.45	46.00	-8.55	43.08	-5.63	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																
1	79.47	33.49	40.00	-6.51	45.95	-12.46	Peak	---	---																																																																
2	135.73	38.29	43.50	-5.21	46.90	-8.61	QP	187	262																																																																
3	174.53	37.11	43.50	-6.39	46.20	-9.09	QP	187	255																																																																
4	199.75	34.07	43.50	-9.43	45.20	-11.13	QP	100	284																																																																
5	249.22	40.24	46.00	-5.76	49.47	-9.23	Peak	---	---																																																																
6	374.35	37.45	46.00	-8.55	43.08	-5.63	Peak	---	---																																																																
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																									

<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

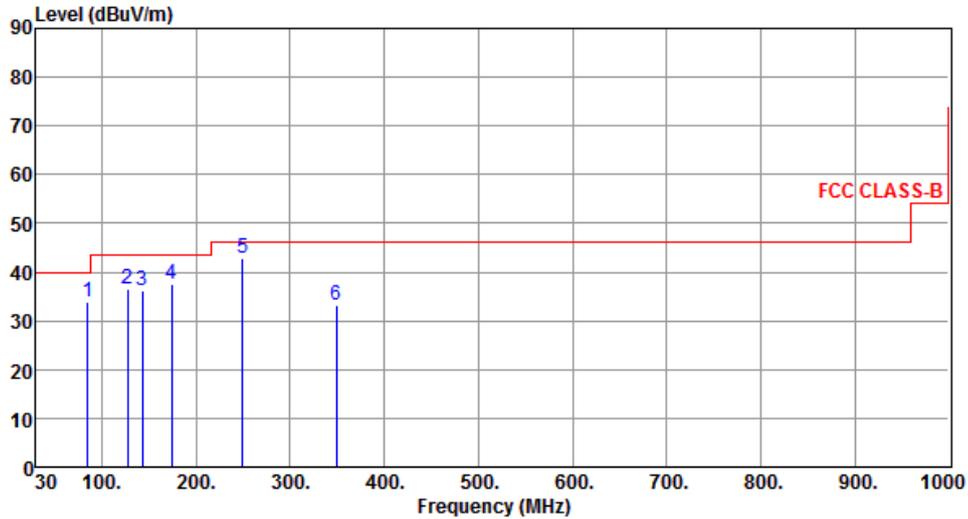

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	85.29	33.93	40.00	-6.07	47.47	-13.54	Peak	---	---
2	127.00	36.55	43.50	-6.95	45.91	-9.36	Peak	---	---
3	142.52	36.19	43.50	-7.31	44.46	-8.27	Peak	---	---
4	174.53	37.57	43.50	-5.93	46.66	-9.09	Peak	---	---
5	249.22	42.73	46.00	-3.27	51.96	-9.23	Peak	---	---
6	349.13	33.07	46.00	-12.93	39.34	-6.27	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

**Configuration 2 : MS-UD755 mode**

**3.1.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)**

<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Horizontal		

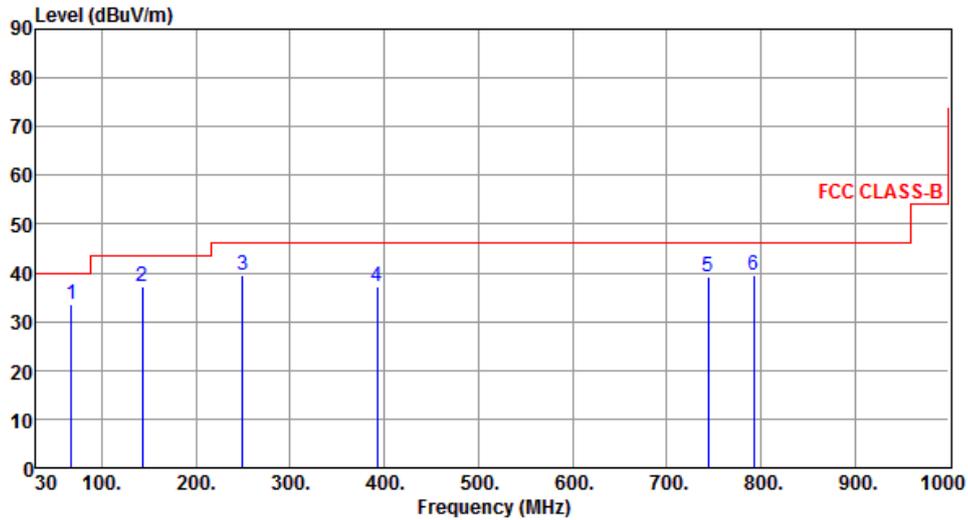

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	67.83	33.61	40.00	-6.39	43.93	-10.32	Peak	---	---
2	142.78	37.13	43.50	-6.37	45.40	-8.27	Peak	---	---
3	249.22	39.59	46.00	-6.41	48.82	-9.23	Peak	---	---
4	392.78	37.31	46.00	-8.69	42.48	-5.17	Peak	---	---
5	743.92	39.11	46.00	-6.89	37.41	1.70	Peak	---	---
6	792.42	39.42	46.00	-6.58	37.11	2.31	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

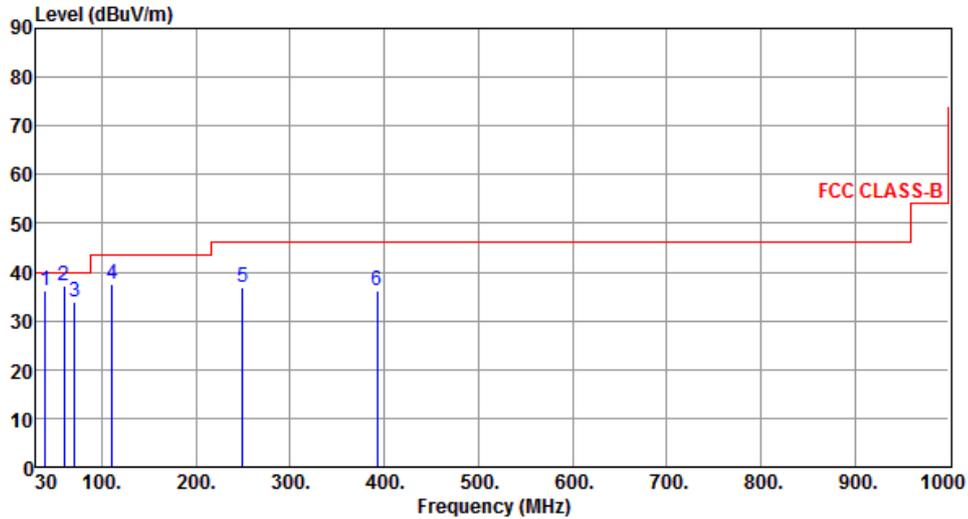

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	39.47	36.21	40.00	-3.79	44.10	-7.89	QP	100	281
2	60.21	37.24	40.00	-2.76	46.20	-8.96	QP	100	168
3	71.42	33.96	40.00	-6.04	44.92	-10.96	QP	100	256
4	110.51	37.39	43.50	-6.11	48.50	-11.11	Peak	---	---
5	249.22	36.93	46.00	-9.07	46.16	-9.23	Peak	---	---
6	392.78	36.29	46.00	-9.71	41.46	-5.17	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.1.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

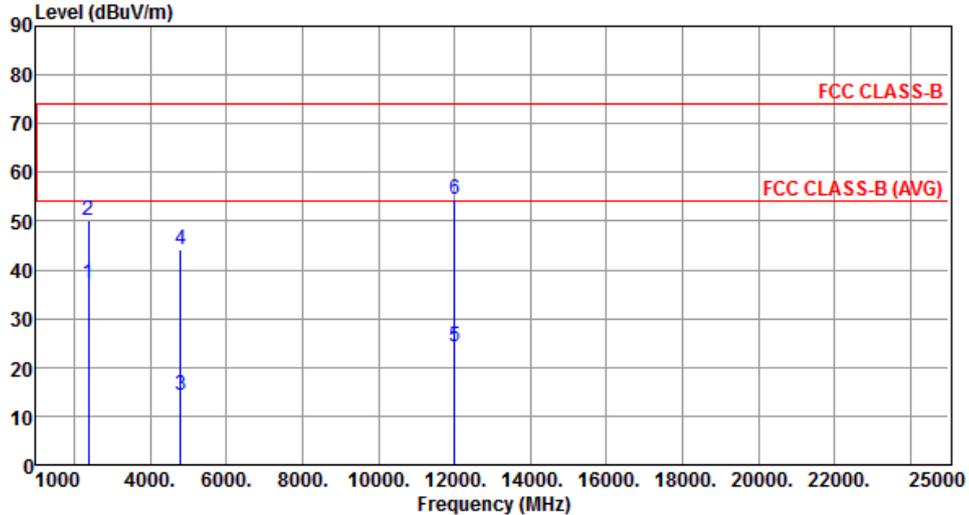Modulation	GFSK	Test Freq. (MHz)	2402						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	37.33	54.00	-16.67	40.51	-3.18	Average	126	128
2	2390.00	50.11	74.00	-23.89	53.29	-3.18	Peak	126	128
3	4804.00	14.23	54.00	-39.77	10.49	3.74	Average	100	218
4	4804.00	44.33	74.00	-29.67	40.59	3.74	Peak	100	218
5	12010.00	24.37	54.00	-29.63	10.82	13.55	Average	100	164
6	12010.00	54.47	74.00	-19.53	40.92	13.55	Peak	100	164
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

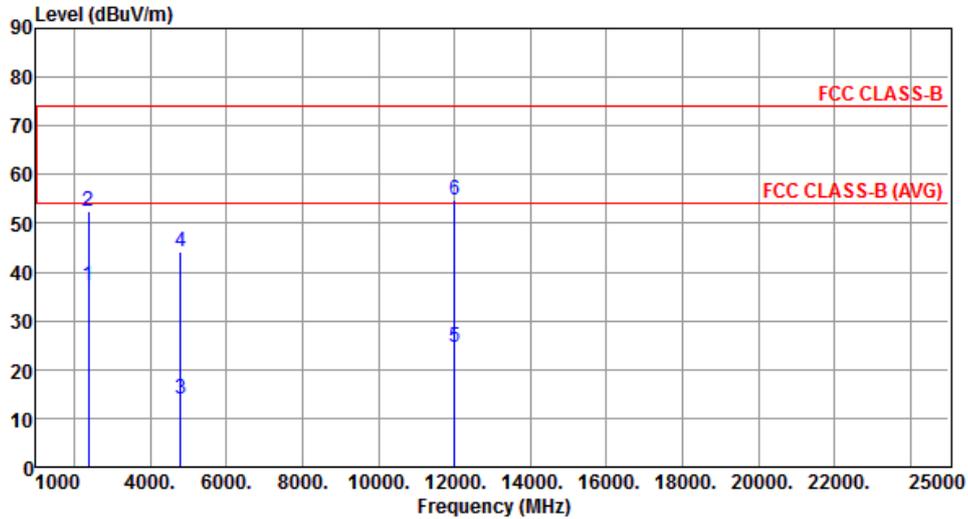


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.32	54.00	-16.68	40.50	-3.18	Average	100	316
2	2390.00	52.52	74.00	-21.48	55.70	-3.18	Peak	100	316
3	4804.00	14.01	54.00	-39.99	10.27	3.74	Average	100	325
4	4804.00	44.11	74.00	-29.89	40.37	3.74	Peak	100	325
5	12010.00	24.74	54.00	-29.26	11.19	13.55	Average	100	282
6	12010.00	54.84	74.00	-19.16	41.29	13.55	Peak	100	282

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2441
<b>Polarization</b>	Horizontal		

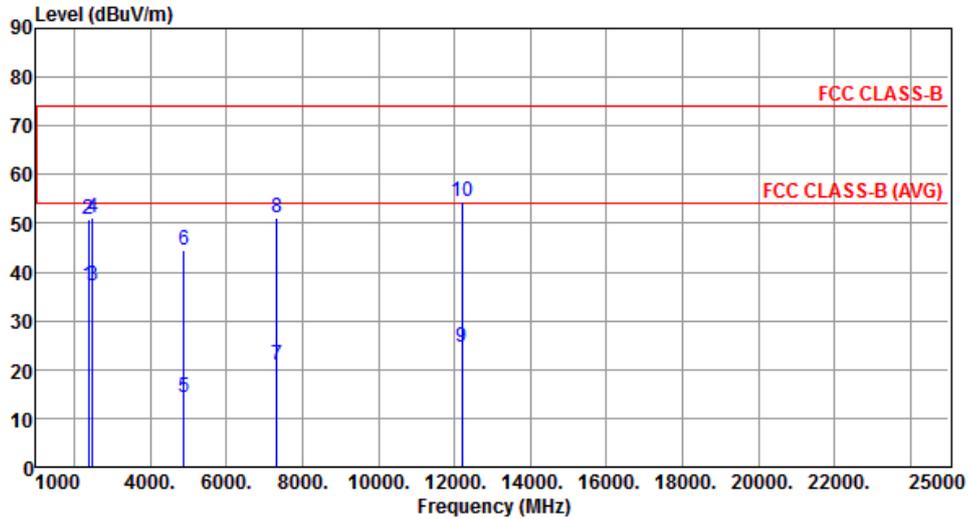


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.11	54.00	-16.89	40.29	-3.18	Average	129	117
2	2390.00	50.68	74.00	-23.32	53.86	-3.18	Peak	129	117
3	2483.50	37.28	54.00	-16.72	40.08	-2.80	Average	129	117
4	2483.50	51.12	74.00	-22.88	53.92	-2.80	Peak	129	117
5	4882.00	14.32	54.00	-39.68	10.36	3.96	Average	100	223
6	4882.00	44.42	74.00	-29.58	40.46	3.96	Peak	100	223
7	7323.00	20.97	54.00	-33.03	12.55	8.42	Average	252	312
8	7323.00	51.07	74.00	-22.93	42.65	8.42	Peak	252	312
9	12205.00	24.50	54.00	-29.50	10.81	13.69	Average	100	153
10	12205.00	54.60	74.00	-19.40	40.91	13.69	Peak	100	153

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2441
<b>Polarization</b>	Vertical		

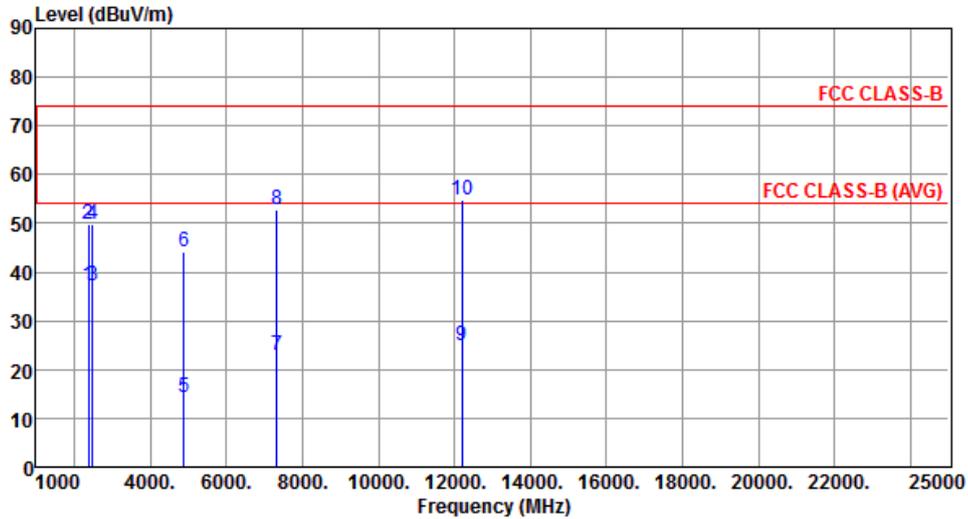


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.14	54.00	-16.86	40.32	-3.18	Average	100	140
2	2390.00	49.70	74.00	-24.30	52.88	-3.18	Peak	100	140
3	2483.50	37.28	54.00	-16.72	40.08	-2.80	Average	100	140
4	2483.50	49.70	74.00	-24.30	52.50	-2.80	Peak	100	140
5	4882.00	14.21	54.00	-39.79	10.25	3.96	Average	100	311
6	4882.00	44.31	74.00	-29.69	40.35	3.96	Peak	100	311
7	7323.00	22.77	54.00	-31.23	14.35	8.42	Average	117	261
8	7323.00	52.87	74.00	-21.13	44.45	8.42	Peak	117	261
9	12205.00	24.86	54.00	-29.14	11.17	13.69	Average	100	298
10	12205.00	54.96	74.00	-19.04	41.27	13.69	Peak	100	298

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Horizontal		

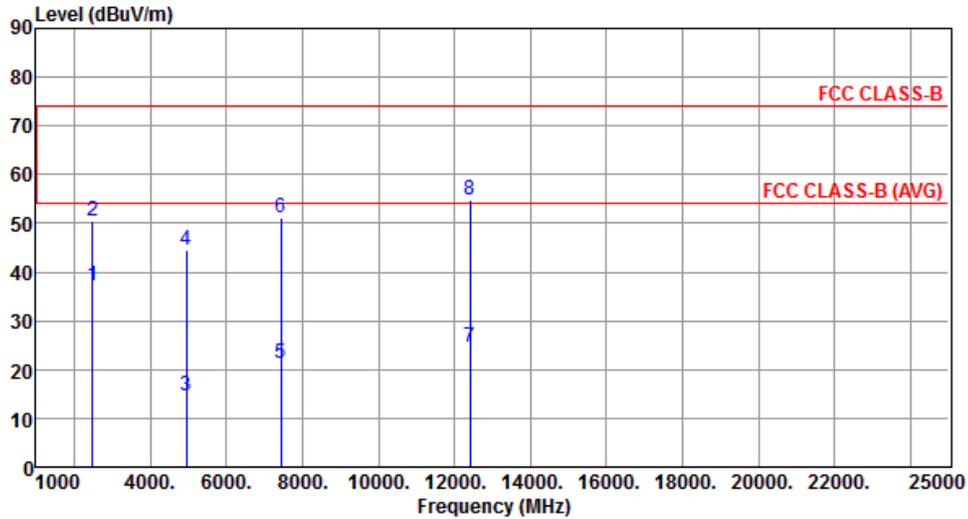


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	37.31	54.00	-16.69	40.11	-2.80	Average	125	118
2	2483.50	50.63	74.00	-23.37	53.43	-2.80	Peak	125	118
3	4960.00	14.46	54.00	-39.54	10.25	4.21	Average	100	246
4	4960.00	44.56	74.00	-29.44	40.35	4.21	Peak	100	246
5	7440.00	21.12	54.00	-32.88	12.59	8.53	Average	250	308
6	7440.00	51.22	74.00	-22.78	42.69	8.53	Peak	250	308
7	12400.00	24.59	54.00	-29.41	10.76	13.83	Average	100	164
8	12400.00	54.69	74.00	-19.31	40.86	13.83	Peak	100	164

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	GFSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Vertical		

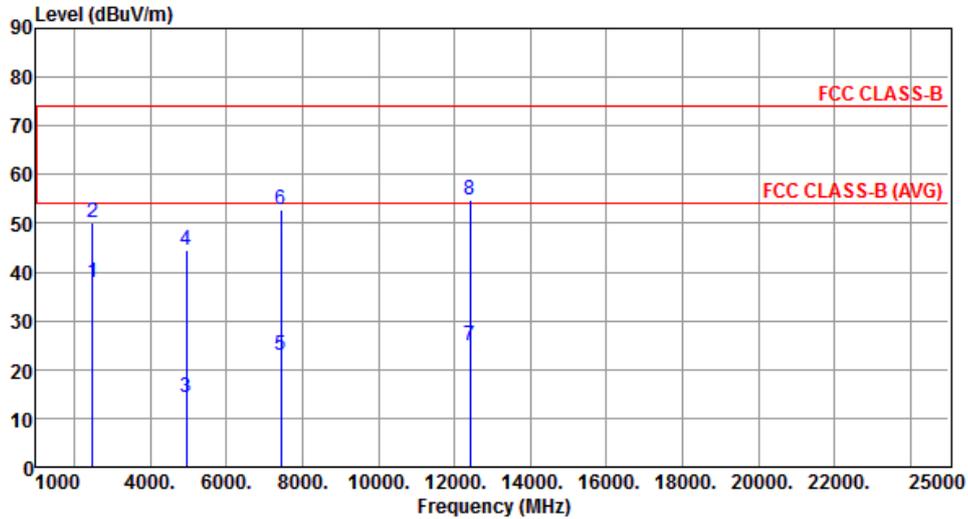


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	37.73	54.00	-16.27	40.53	-2.80	Average	100	137
2	2483.50	50.01	74.00	-23.99	52.81	-2.80	Peak	100	137
3	4960.00	14.35	54.00	-39.65	10.14	4.21	Average	100	322
4	4960.00	44.45	74.00	-29.55	40.24	4.21	Peak	100	322
5	7440.00	22.81	54.00	-31.19	14.28	8.53	Average	100	258
6	7440.00	52.91	74.00	-21.09	44.38	8.53	Peak	100	258
7	12400.00	24.82	54.00	-29.18	10.99	13.83	Average	100	305
8	12400.00	54.92	74.00	-19.08	41.09	13.83	Peak	100	305

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.1.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK

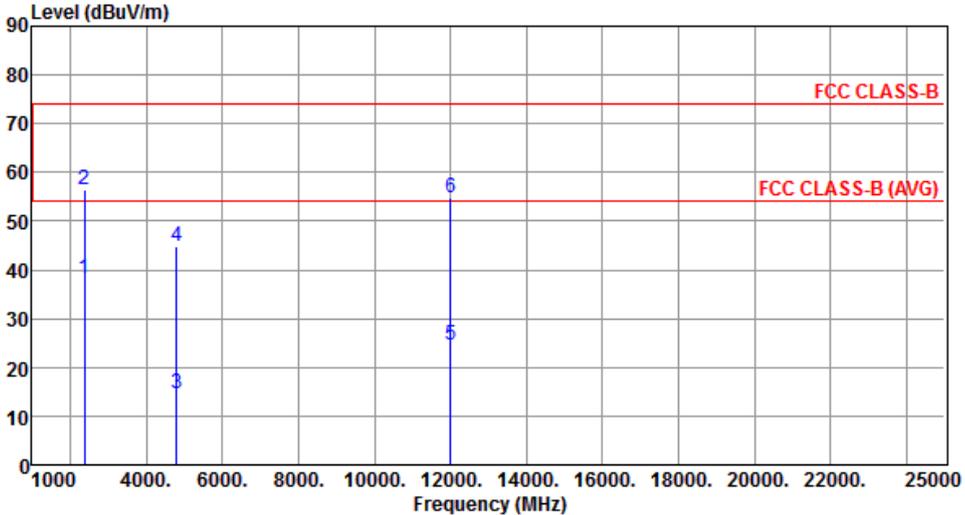Modulation	8DPSK	Test Freq. (MHz)	2402						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	38.08	54.00	-15.92	41.26	-3.18	Average	130	128
2	2390.00	56.52	74.00	-17.48	59.70	-3.18	Peak	130	128
3	4804.00	14.77	54.00	-39.23	11.03	3.74	Average	100	206
4	4804.00	44.87	74.00	-29.13	41.13	3.74	Peak	100	206
5	12010.00	24.62	54.00	-29.38	11.07	13.55	Average	100	153
6	12010.00	54.72	74.00	-19.28	41.17	13.55	Peak	100	153
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

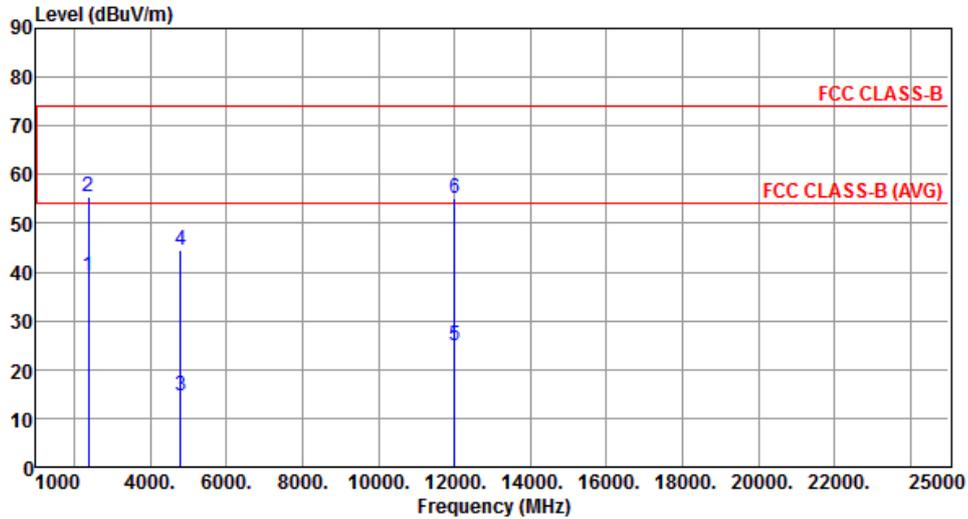


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.06	54.00	-14.94	42.24	-3.18	Average	100	314
2	2390.00	55.60	74.00	-18.40	58.78	-3.18	Peak	100	314
3	4804.00	14.48	54.00	-39.52	10.74	3.74	Average	100	323
4	4804.00	44.58	74.00	-29.42	40.84	3.74	Peak	100	323
5	12010.00	24.92	54.00	-29.08	11.37	13.55	Average	100	295
6	12010.00	55.02	74.00	-18.98	41.47	13.55	Peak	100	295

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2441
<b>Polarization</b>	Horizontal		

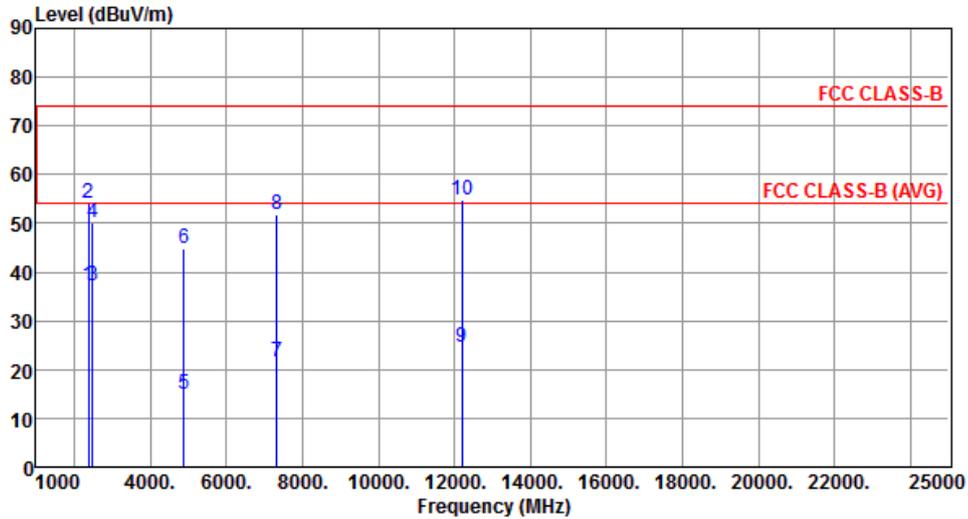


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.06	54.00	-16.94	40.24	-3.18	Average	120	117
2	2390.00	54.02	74.00	-19.98	57.20	-3.18	Peak	120	117
3	2483.50	37.15	54.00	-16.85	39.95	-2.80	Average	120	117
4	2483.50	50.16	74.00	-23.84	52.96	-2.80	Peak	120	117
5	4882.00	14.83	54.00	-39.17	10.87	3.96	Average	100	216
6	4882.00	44.93	74.00	-29.07	40.97	3.96	Peak	100	216
7	7323.00	21.72	54.00	-32.28	13.30	8.42	Average	252	308
8	7323.00	51.82	74.00	-22.18	43.40	8.42	Peak	252	308
9	12205.00	24.72	54.00	-29.28	11.03	13.69	Average	100	161
10	12205.00	54.82	74.00	-19.18	41.13	13.69	Peak	100	161

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2441
<b>Polarization</b>	Vertical		

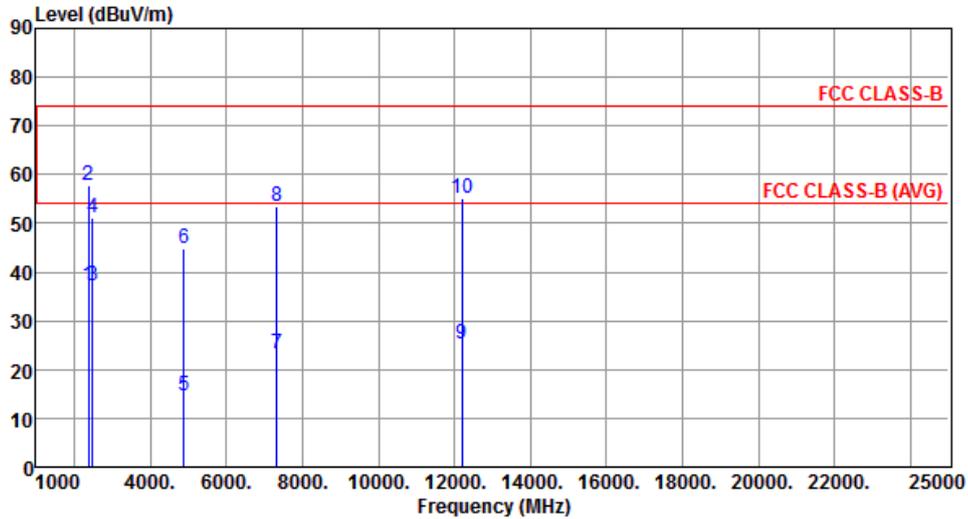


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.27	54.00	-16.73	40.45	-3.18	Average	100	137
2	2390.00	57.92	74.00	-16.08	61.10	-3.18	Peak	100	137
3	2483.50	37.36	54.00	-16.64	40.16	-2.80	Average	100	137
4	2483.50	51.31	74.00	-22.69	54.11	-2.80	Peak	100	137
5	4882.00	14.76	54.00	-39.24	10.80	3.96	Average	100	302
6	4882.00	44.86	74.00	-29.14	40.90	3.96	Peak	100	302
7	7323.00	23.31	54.00	-30.69	14.89	8.42	Average	114	258
8	7323.00	53.41	74.00	-20.59	44.99	8.42	Peak	114	258
9	12205.00	25.11	54.00	-28.89	11.42	13.69	Average	100	286
10	12205.00	55.21	74.00	-18.79	41.52	13.69	Peak	100	286

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Horizontal		

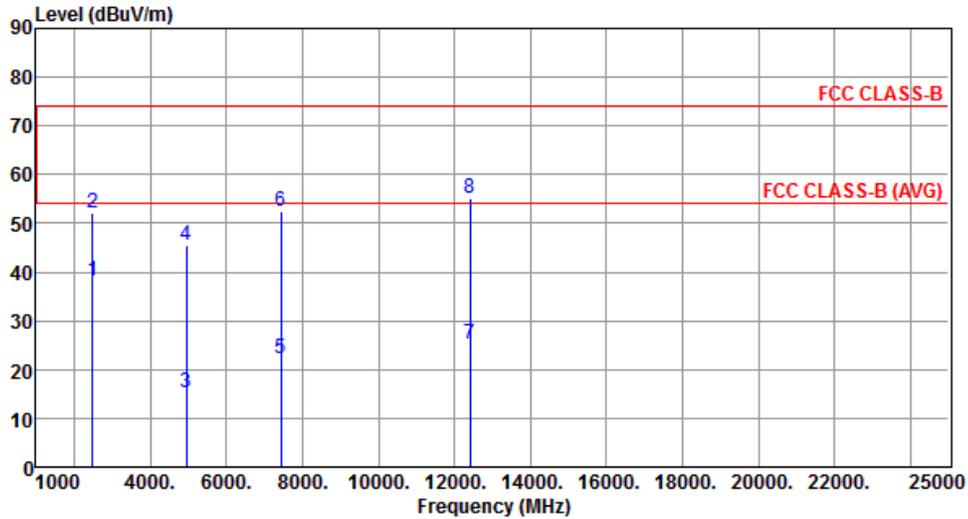


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.25	54.00	-15.75	41.05	-2.80	Average	118	116
2	2483.50	52.04	74.00	-21.96	54.84	-2.80	Peak	118	116
3	4960.00	15.38	54.00	-38.62	11.17	4.21	Average	100	238
4	4960.00	45.48	74.00	-28.52	41.27	4.21	Peak	100	238
5	7440.00	22.28	54.00	-31.72	13.75	8.53	Average	338	317
6	7440.00	52.38	74.00	-21.62	43.85	8.53	Peak	338	317
7	12400.00	25.19	54.00	-28.81	11.36	13.83	Average	100	170
8	12400.00	55.29	74.00	-18.71	41.46	13.83	Peak	100	170

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	8DPSK	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Vertical		

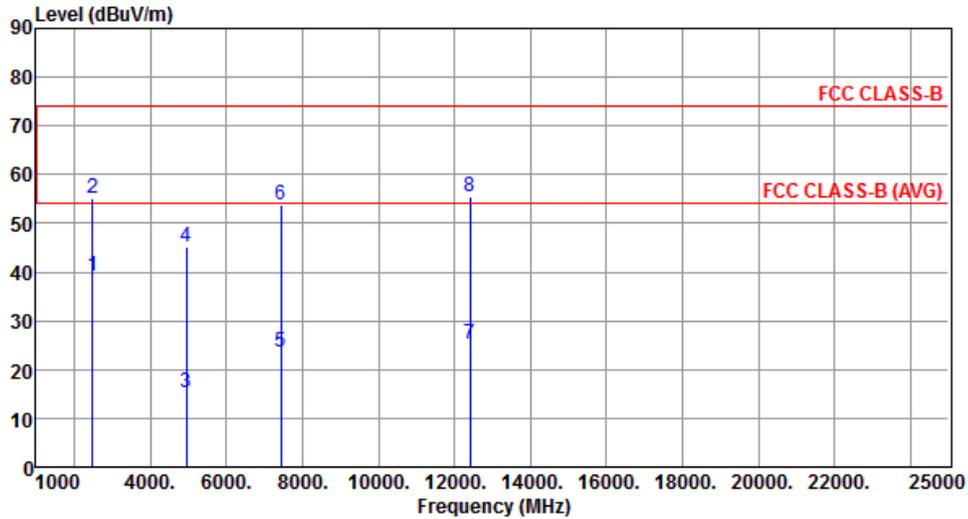

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.25	54.00	-14.75	42.05	-2.80	Average	100	138
2	2483.50	55.18	74.00	-18.82	57.98	-2.80	Peak	100	138
3	4960.00	15.22	54.00	-38.78	11.01	4.21	Average	100	318
4	4960.00	45.32	74.00	-28.68	41.11	4.21	Peak	100	318
5	7440.00	23.62	54.00	-30.38	15.09	8.53	Average	100	249
6	7440.00	53.72	74.00	-20.28	45.19	8.53	Peak	100	249
7	12400.00	25.29	54.00	-28.71	11.46	13.83	Average	100	301
8	12400.00	55.39	74.00	-18.61	41.56	13.83	Peak	100	301

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 3.2 Unwanted Emissions into Non-Restricted Frequency Bands

### 3.2.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.2.2 Test Procedures


#### Reference Level Measurement

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Set Sweep time = auto couple, Trace mode = max hold.
3. Allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

#### Unwanted Emissions Level Measurement


1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Trace Mode = max hold, Sweep = auto couple.
3. Allow the trace to stabilize.
4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


### 3.2.3 Test Setup

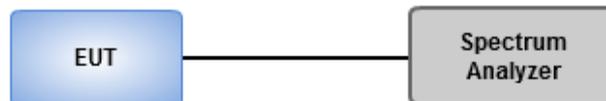


### 3.2.4 Unwanted Emissions into Non-Restricted Frequency Bands


#### GFSK

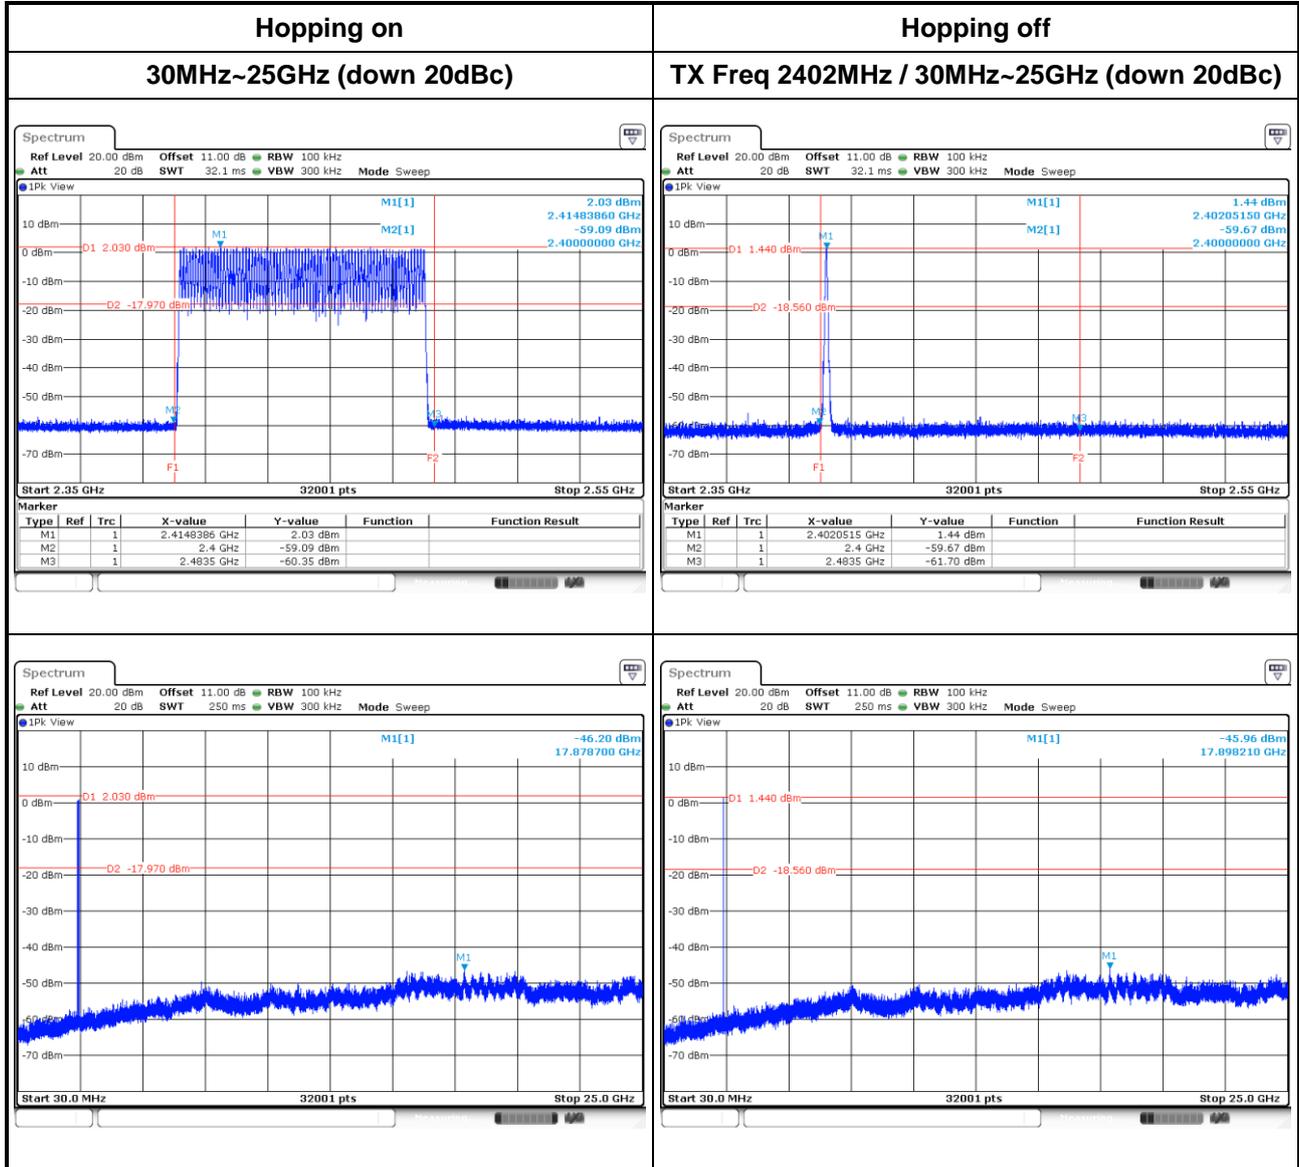

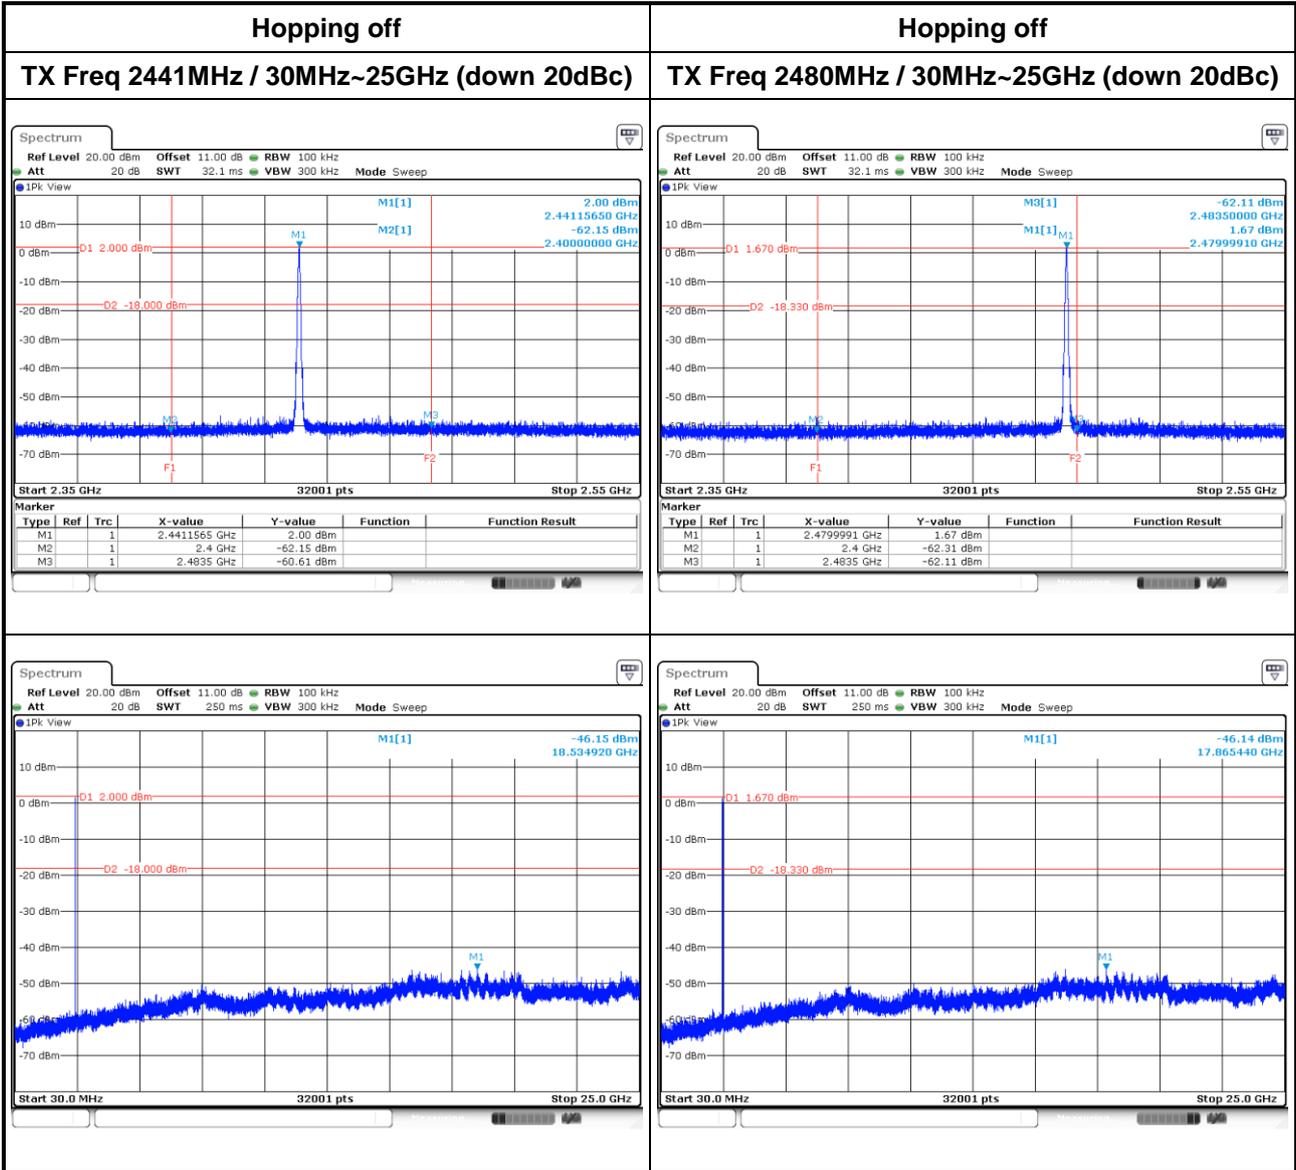

### 8DPSK

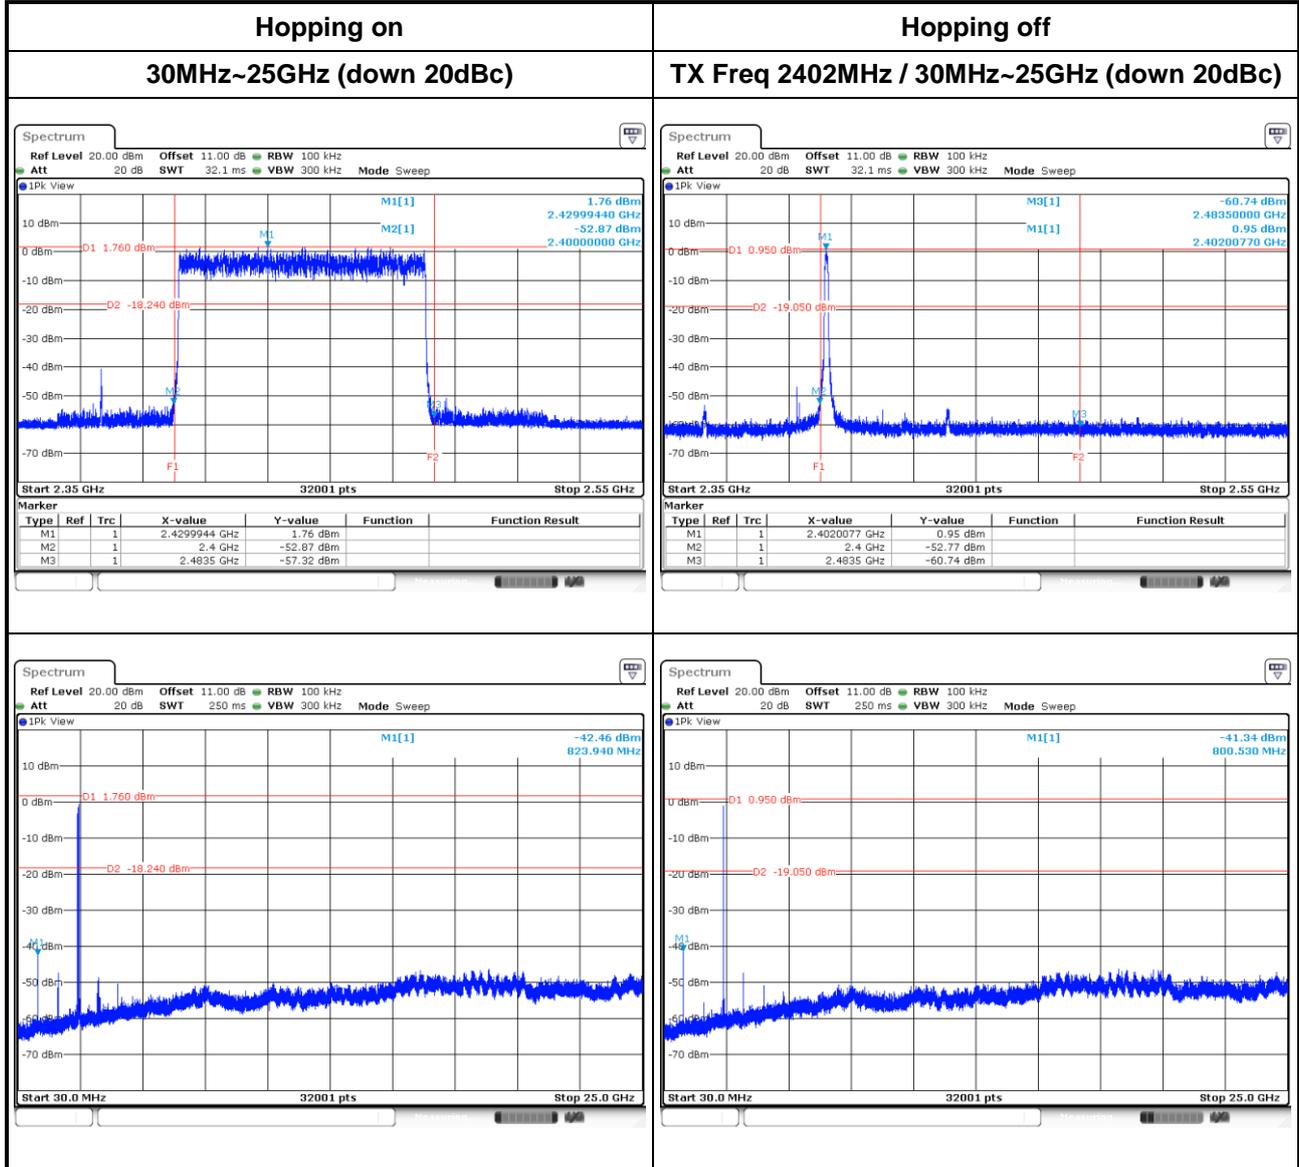

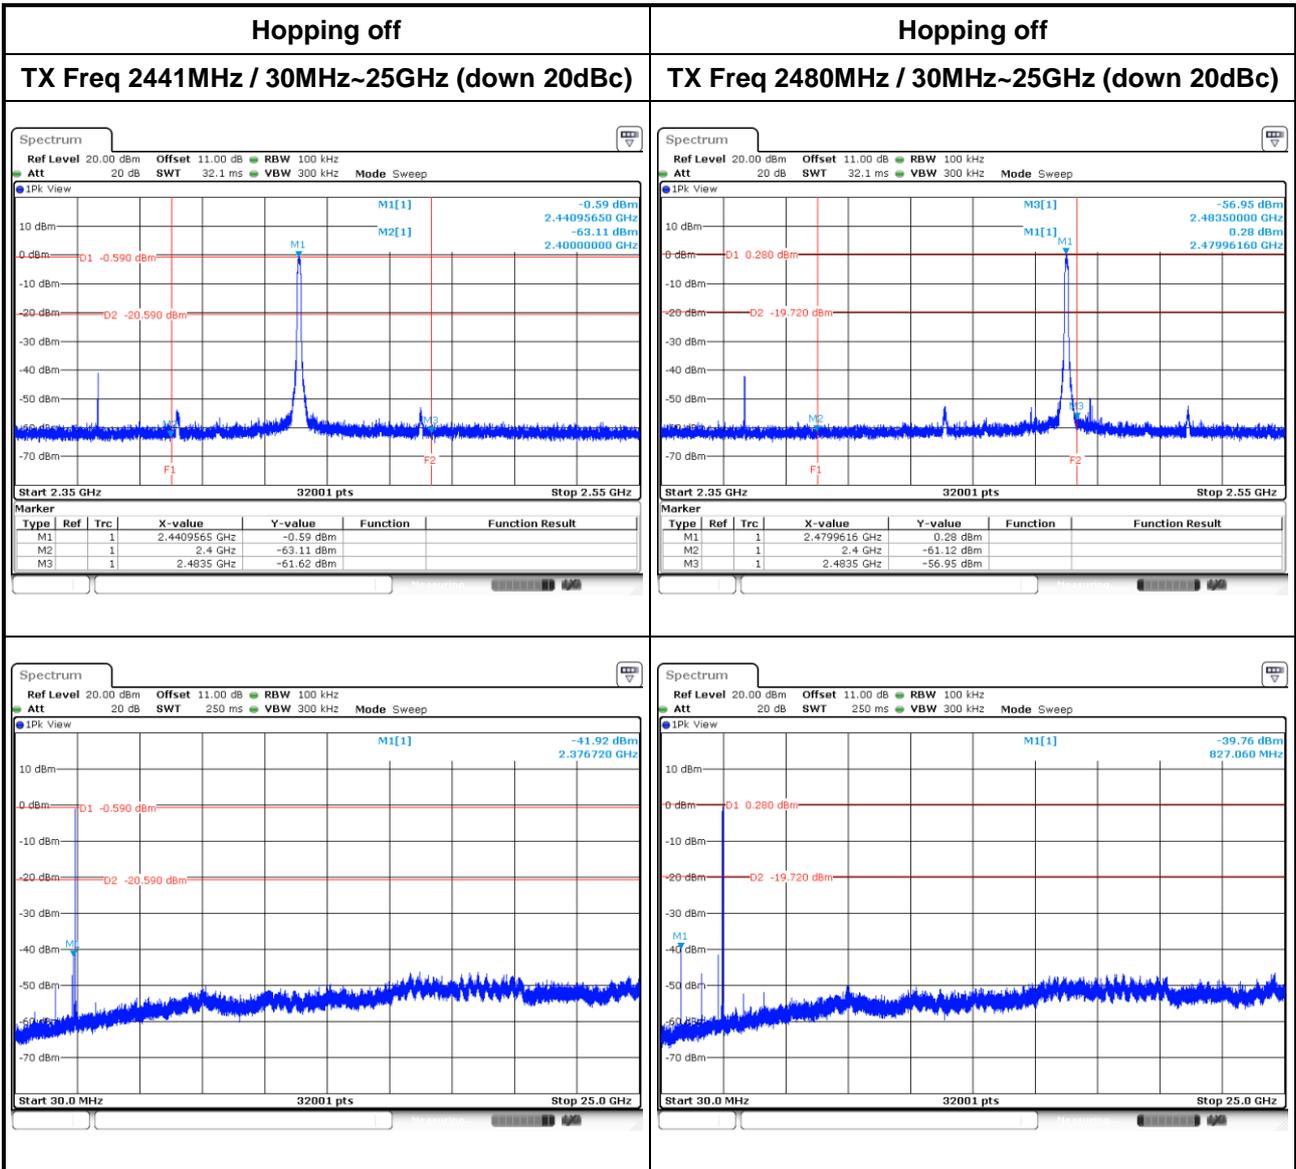

### 3.3 Conducted Output Power

#### 3.3.1 Limit of Conducted Output Power

- 1 Watt  
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
- 0.125 Watt  
For all other frequency hopping systems in the 2400–2483.5 MHz band.
- 0.125 Watt  
For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

#### 3.3.2 Test Procedures

1. A wideband power meter is used for power measurement. Bandwidth of power sensor and meter is 50MHz
2. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

#### 3.3.3 Test Setup



### 3.3.4 Test Result of Conducted Output Power

Modulation Mode	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (mW)
GFSK	2402	1.51	1.80	125
GFSK	2441	1.47	1.67	125
GFSK	2480	1.40	1.45	125
π/4 DQPSK	2402	2.61	4.16	125
π/4 DQPSK	2441	2.54	4.04	125
π/4 DQPSK	2480	2.41	3.82	125
8DPSK	2402	2.89	<b>4.61</b>	125
8DPSK	2441	2.77	4.42	125
8DPSK	2480	2.66	4.25	125

Modulation Mode	Freq. (MHz)	AV Output Power (mW)	AV Output Power (dBm)
GFSK	2402	1.41	1.50
GFSK	2441	1.37	1.37
GFSK	2480	1.29	1.11
π/4 DQPSK	2402	1.43	1.55
π/4 DQPSK	2441	1.39	1.43
π/4 DQPSK	2480	1.32	1.20
8DPSK	2402	1.44	1.58
8DPSK	2441	1.39	1.44
8DPSK	2480	1.32	1.21

Note: Average power is for reference only.

### 3.4 Number of Hopping Frequency


#### 3.4.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.


#### 3.4.2 Test Procedures

1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2. Allow trace to stabilize.

#### 3.4.3 Test Setup

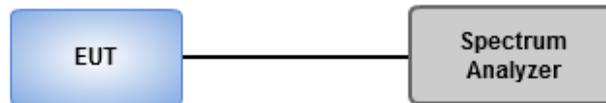

### 3.4.4 Test Result of Number of Hopping Frequency

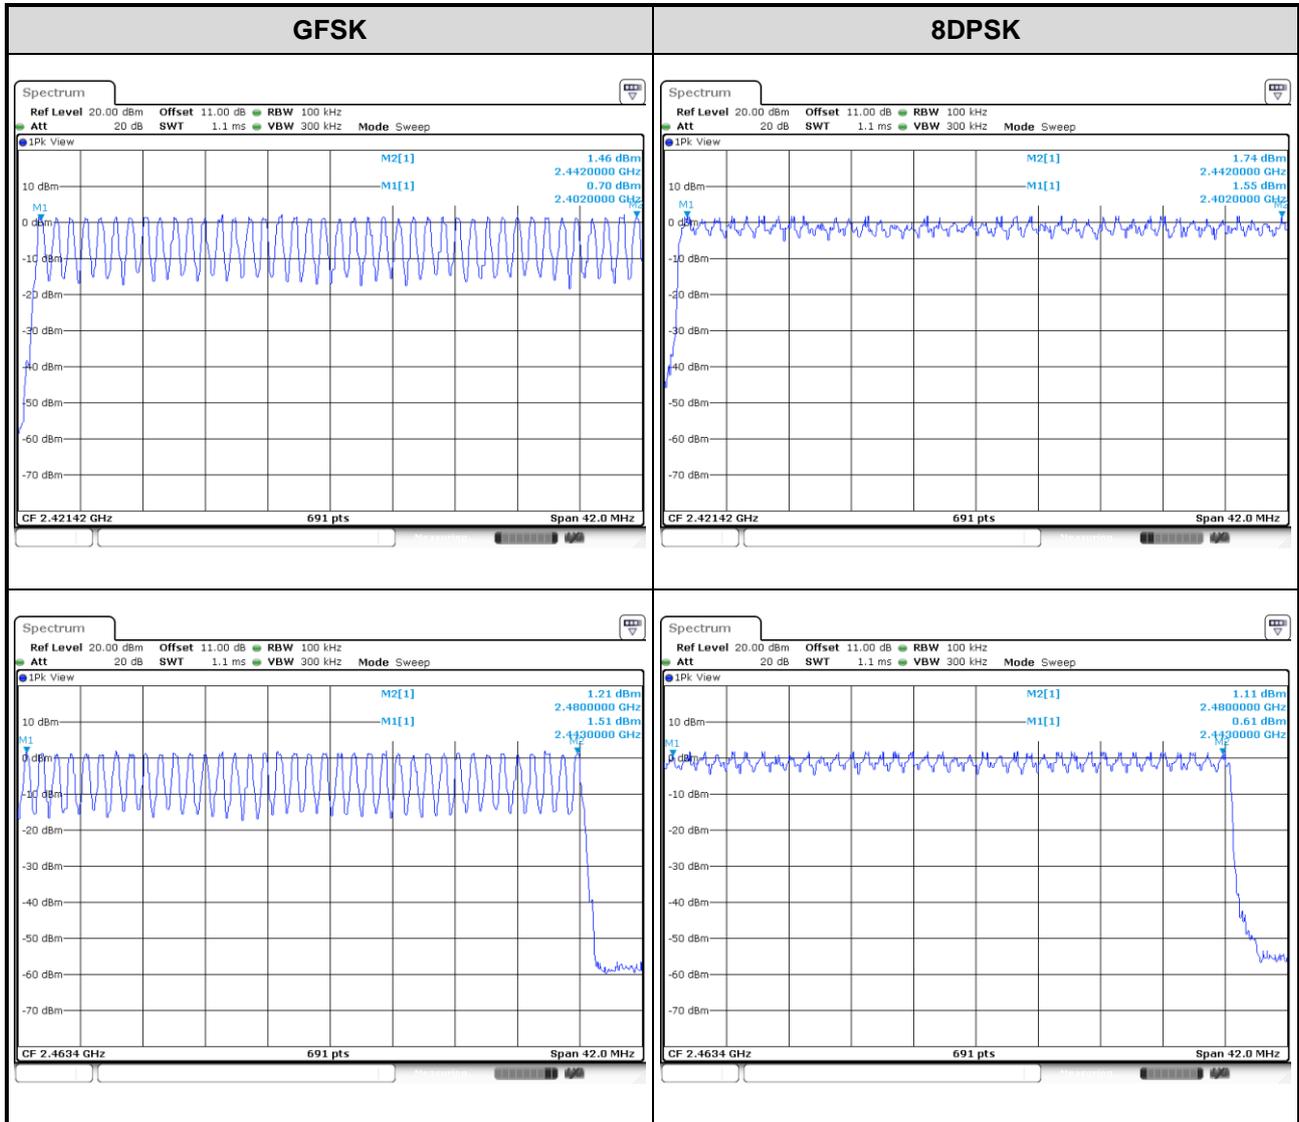

## 3.5 20dB and Occupied Bandwidth

### 3.5.1 Test Procedures


#### 20dB Bandwidth

1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak, Trace max hold
2. Allow trace to stabilize
3. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth


1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Sample, Trace max hold
2. Allow trace to stabilize
3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

### 3.5.2 Test Setup



### 3.5.3 Test result of 20dB and Occupied Bandwidth

Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
GFSK	2402	0.930	0.857
GFSK	2441	0.952	0.858
GFSK	2480	0.952	0.859
8DPSK	2402	1.296	1.186
8DPSK	2441	1.326	1.198
8DPSK	2480	1.326	1.197

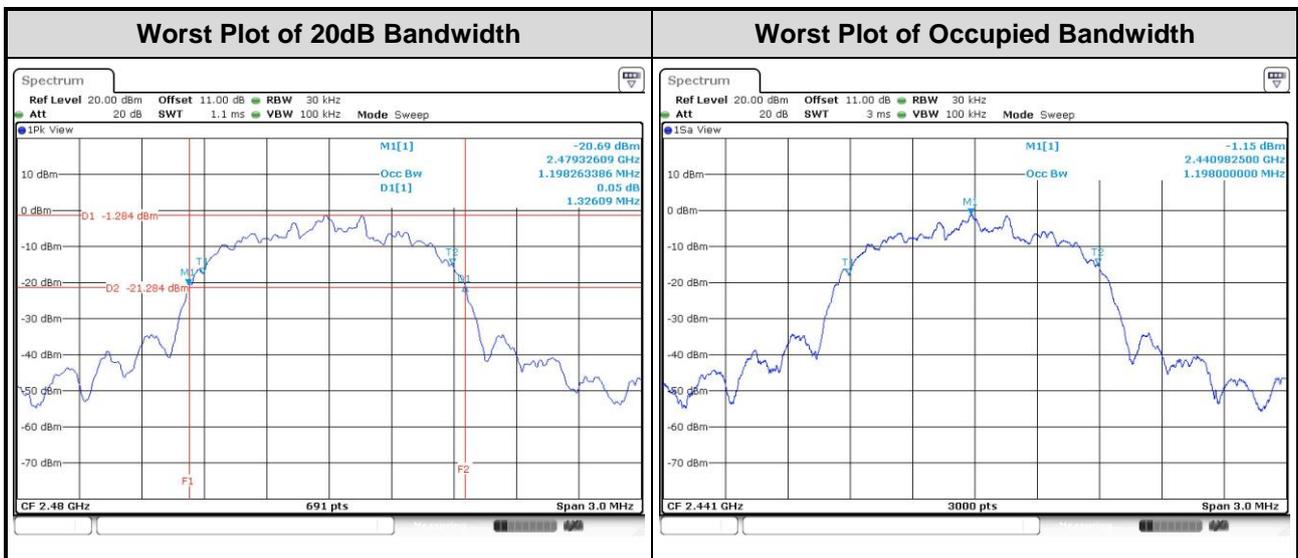

## 3.6 Channel Separation


### 3.6.1 Limit of Channel Separation

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 3.6.2 Test Procedures


1. Set RBW=100kHz, VBW=300kHz, Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

### 3.6.3 Test Setup



### 3.6.4 Test result of Channel Separation

Modulation Mode	Freq. (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Minimum Limit (MHz)
GFSK	2402	1.003	0.930	0.620
GFSK	2441	1.003	0.952	0.635
GFSK	2480	1.003	0.952	0.635
8DPSK	2402	1.003	1.296	0.864
8DPSK	2441	1.003	1.326	0.884
8DPSK	2480	1.003	1.326	0.884

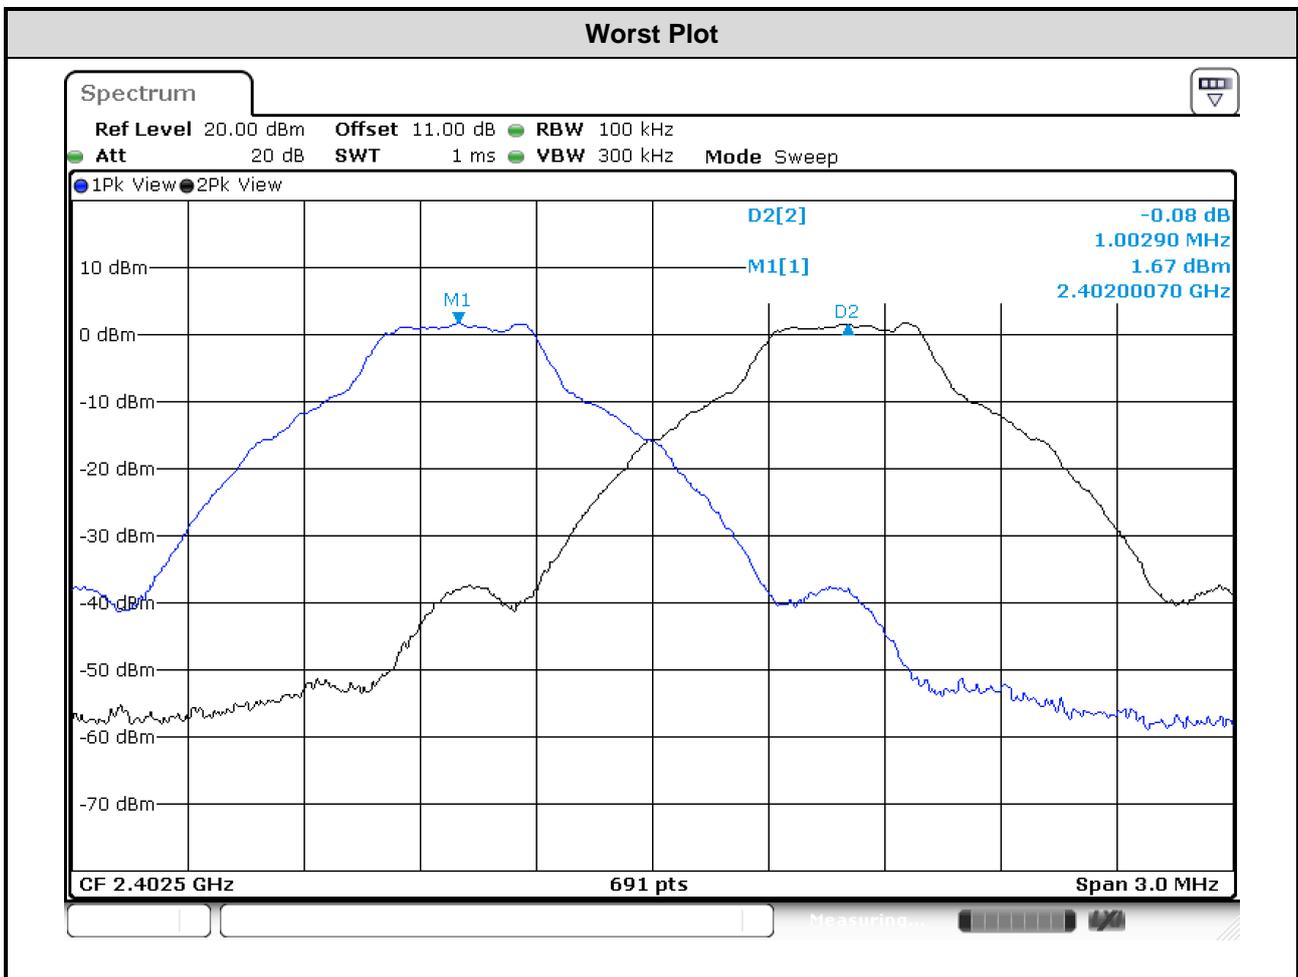

## 3.7 Number of Dwell Time


### 3.7.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 3.7.2 Test Procedures


1. Set RBW=100kHz,VBW=300kHz,Sweep time = 500us(DH1),2ms(DH3),4ms(DH5), Detector=Peak, Span=0Hz,Trace max hold
2. Enable gating and trigger function of spectrum analyzer to measure burst on time.
3. The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds, or 0.625ms. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.
4. The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 3/1600 seconds, or 1.875ms. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
5. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds


### 3.7.3 Test Setup



### 3.7.4 Test Result of Dwell Time

Modulation Mode	Freq. (MHz)	Length of Transmission Time (msec)	Number of Transmission in a 31.6 (79 Hopping*0.4)	Result (s)	Limit (s)
GFSK-DH1	2402	0.45217	320	0.145	0.4
GFSK-DH3	2402	1.68768	160	0.270	0.4
GFSK-DH5	2402	2.93116	106.6	0.312	0.4
8DPSK-DH1	2402	0.44130	320	0.141	0.4
8DPSK-DH3	2402	1.69638	160	0.271	0.4
8DPSK-DH5	2402	2.94855	106.6	0.314	0.4

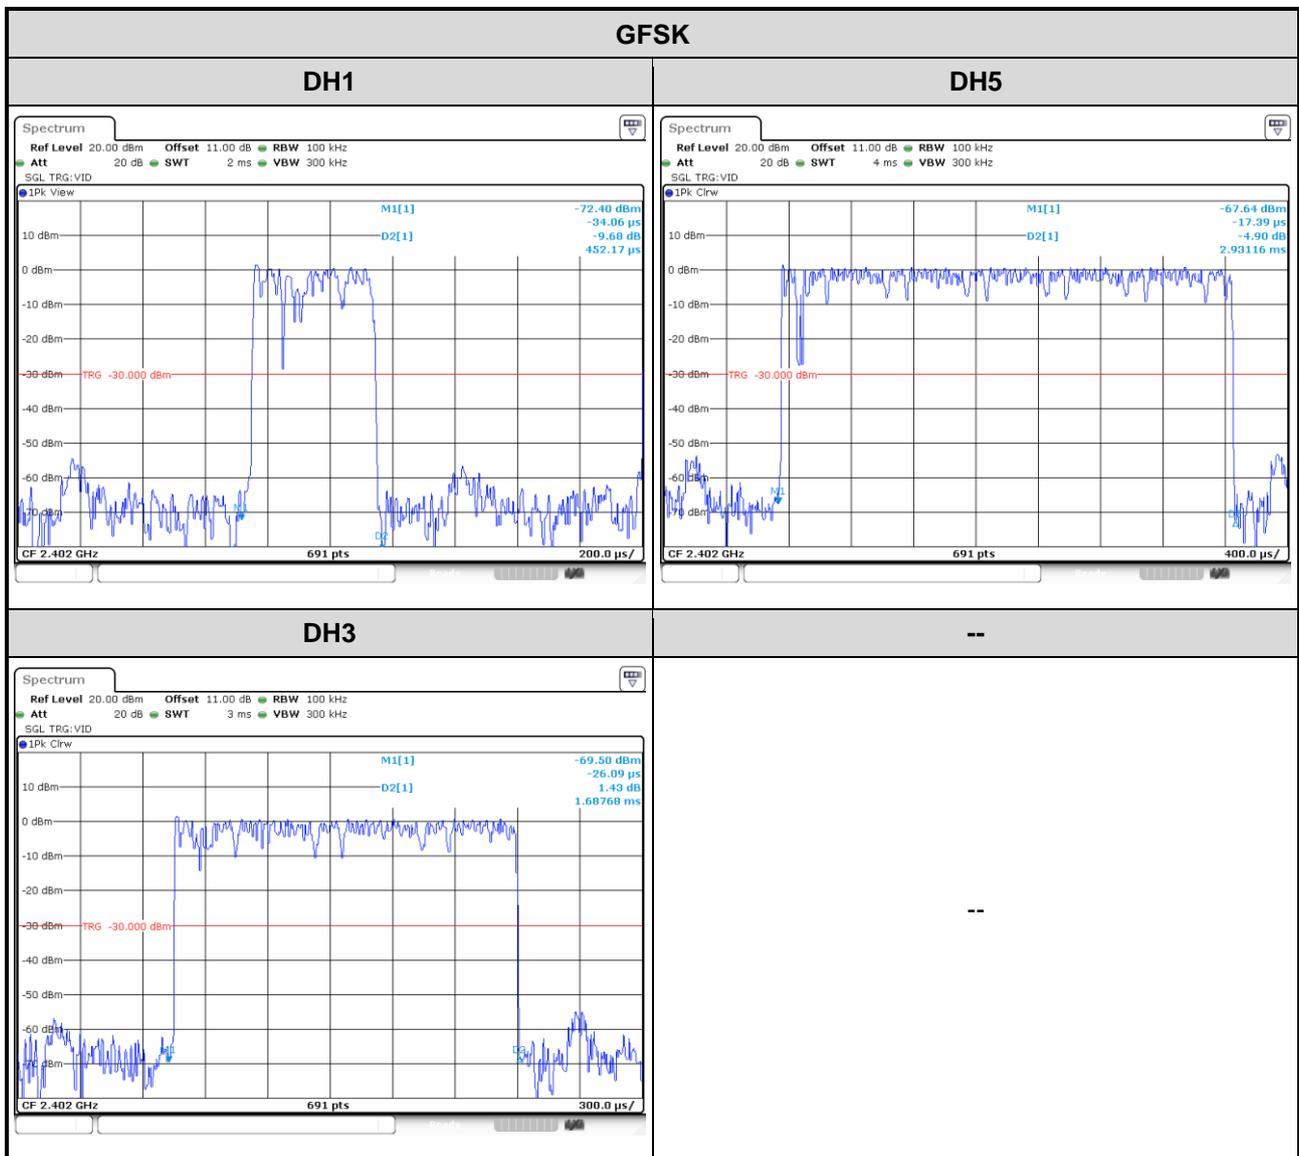

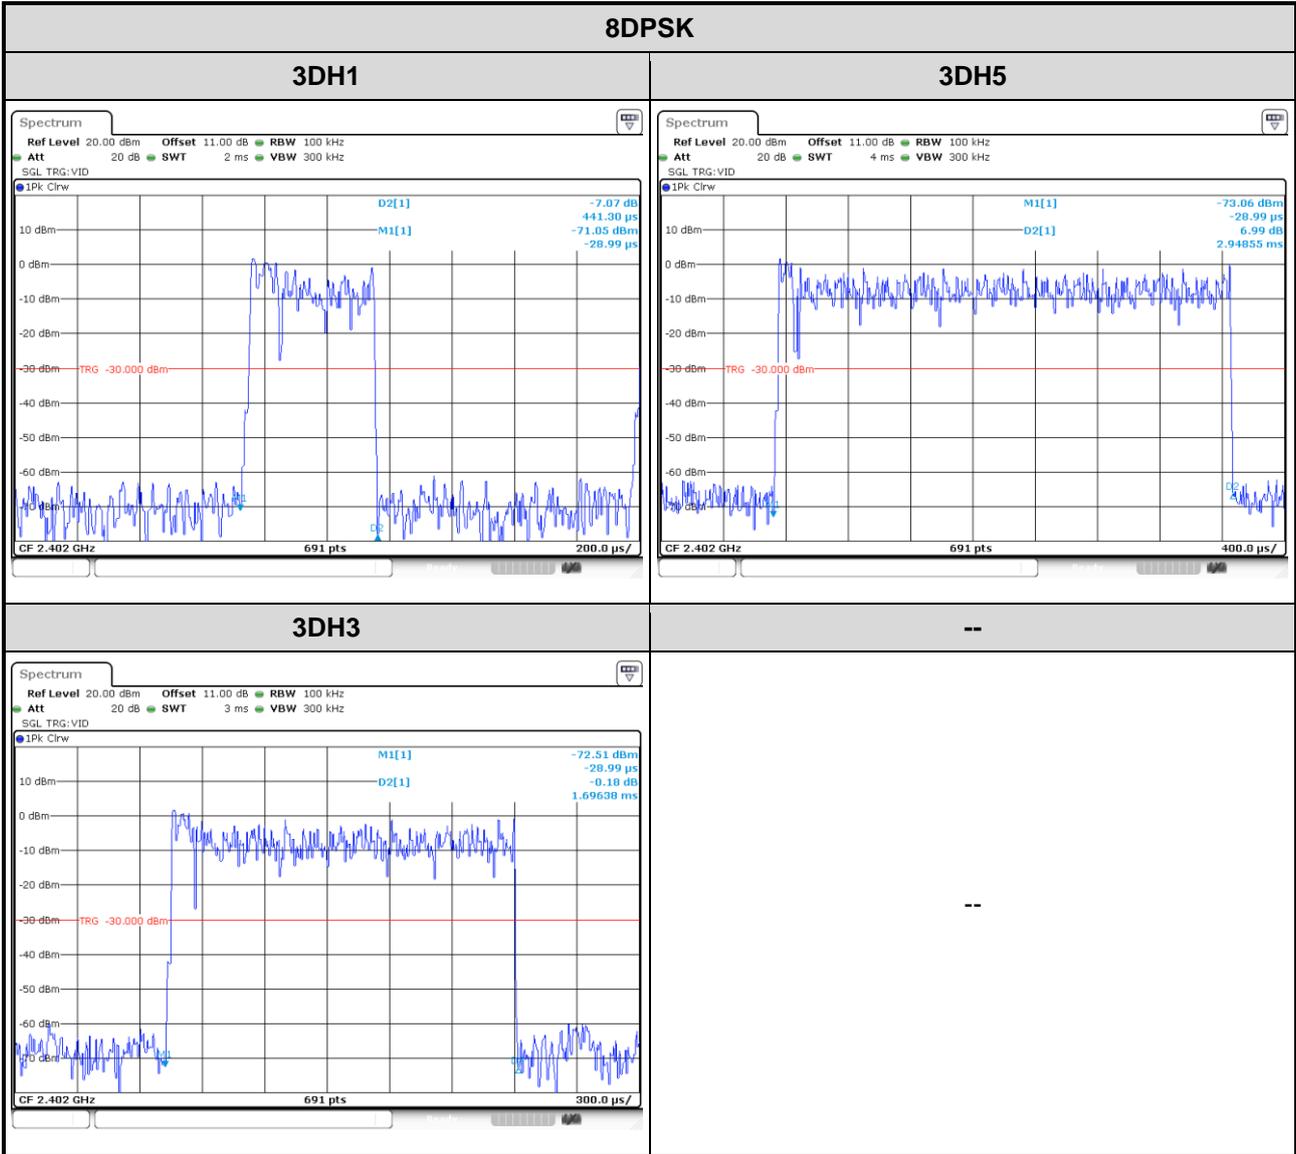

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin  
Kou District, New Taipei City,  
Taiwan, R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,  
Kwei Shan District, Tao Yuan City  
333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan District, Tao Yuan  
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==