

Test report

373052 - 1TRFWL

Date of issue: October 21, 2019

Applicant: Garmin International

Product: Black Box Remote

Model: CL0 remote – M/N 03708

Specifications:

FCC 47 CFR Part 15.249

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

RSS-210 Issue 9, August 2016 Annex B.10

License-Exempt Radio Apparatus: Category 1 Equipment

| | |
|--------------|-----------------------------|
| Company name | Nemko USA, Inc. |
| Address | 2210 Faraday Ave, Suite 150 |
| City | Carlsbad |
| Province | California |
| Postal code | 92008 |
| Country | USA |
| Telephone | +1 760 444 3500 |
| Website | www.nemko.com |

| | |
|-------------|---|
| Tested by | Andre Martinez, Test Engineer. |
| Reviewed by | Chip Fleury |
| Date | October 21, 2019 |
| Signature |  |

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of contents

| | |
|---|-----------|
| Table of contents | 3 |
| Section 1. Report summary | 4 |
| 1.1 Applicant and manufacturer | 4 |
| 1.2 Test specifications | 4 |
| 1.3 Statement of compliance | 4 |
| 1.4 Exclusions | 4 |
| 1.5 Test report revision history | 4 |
| Section 2. Summary of test results | 5 |
| 2.1 FCC Part 15 Subpart C, general requirements test results | 5 |
| 2.2 FCC Part 15 Subpart C, intentional radiators test results | 5 |
| 2.3 IC RSS-GEN, Issue 5, test results | 5 |
| 2.4 IC RSS-210, Issue 9, test results | 5 |
| Section 3. Equipment under test (EUT) details | 6 |
| 3.1 Sample information | 6 |
| 3.2 EUT information | 6 |
| 3.3 Technical information | 6 |
| 3.4 Product description and theory of operation | 6 |
| 3.5 EUT exercise details | 6 |
| 3.6 EUT setup diagram | 7 |
| 3.7 EUT Support Equipment | 7 |
| Section 4. Engineering considerations | 8 |
| 4.1 Modifications incorporated in the EUT | 8 |
| 4.2 Technical judgment | 8 |
| 4.3 Deviations from laboratory tests procedures | 8 |
| Section 5. Test conditions | 9 |
| 5.1 Atmospheric conditions | 9 |
| 5.2 Power supply range | 9 |
| Section 6. Measurement uncertainty | 10 |
| 6.1 Uncertainty of measurement | 10 |
| Section 7. Test equipment | 11 |
| 7.1 Test equipment list | 11 |
| Section 8. Testing data | 12 |
| 8.1 FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits | 12 |
| 8.2 FCC 15.215(c) and RSS-Gen 6.7 Occupied (Emission) bandwidth | 13 |
| 8.3 FCC 15.249(a) RSS 210 B.10(a) and (b) Field strength of Fundamental, harmonics and spurious emissions | 15 |
| 8.4 FCC 15.249(d) and RSS-210 B10 (b) Emissions at the Band Edges | 24 |
| Section 9. Block diagrams of test set-ups | 28 |
| 9.1 Radiated emissions set-up for frequencies below 1 GHz | 28 |
| 9.2 Radiated emissions set-up for frequencies above 1 GHz | 29 |
| 9.3 Conducted emissions set-up | 29 |

Section 1. Report summary

1.1 Applicant and manufacturer

| | |
|-----------------|------------------------|
| Company name | Garmin International |
| Address | 1200 East 151st Street |
| City | Olathe |
| Province/State | KS |
| Postal/Zip code | 66062 |
| Country | United States |

1.2 Test specifications

| | |
|--|---|
| FCC 47 CFR Part 15, Subpart C, Clause 15.249 | Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz. |
| RSS-210 Issue 9, August 2016, Annex B.10 | Devices operating in 902–928, 2400–2483.5 and 5725–5875 MHz |

1.3 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

1.4 Exclusions

None

1.5 Test report revision history

| Revision # | Details of changes made to test report |
|------------|--|
| TRF | Original report issued |

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, general requirements test results

| Part | Test description | Verdict |
|------------|---------------------------|-----------------------------|
| §15.207(a) | Conducted limits | Not applicable |
| §15.31(e) | Variation of power source | Pass ¹ |
| §15.203 | Antenna requirement | Not applicable ² |
| §15.215(c) | 20 dB bandwidth | Pass |

Notes: ¹ Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with the supply voltage varied between 85 % and 115 % of the nominal rated supply voltage. No noticeable output power variation was observed

² The Antennas are located within the enclosure of EUT and not user accessible.

2.2 FCC Part 15 Subpart C, intentional radiators test results

| Part | Test description | Verdict |
|------------|---|----------------|
| §15.249(a) | Radiated emissions not in restricted bands | Pass |
| §15.249(b) | Fixed Point-to-Point operation in the 24.0–24.25 GHz band | Not applicable |
| §15.249(d) | Spurious emissions (except harmonics) | Pass |

Notes: None

2.3 IC RSS-GEN, Issue 5, test results

| Part | Test description | Verdict |
|------|--|----------------|
| 6.7 | Occupied bandwidth | Pass |
| 7.3 | Receiver radiated emission limits | Pass |
| 7.4 | Receiver conducted emission limits | Not applicable |
| 8.8 | Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus | Not applicable |

Notes: None

2.4 IC RSS-210, Issue 9, test results

| Part | Test description | Verdict |
|----------|--|---------|
| §B.10(a) | Field strength: Fundamental and Harmonics | Pass |
| §B.10(b) | Radiated emissions except Harmonic emissions | Pass |

Notes: None

Section 3. Equipment under test (EUT) details

3.1 Sample information

| | |
|------------------------|---------------|
| Receipt date | April 7, 2019 |
| Nemko sample ID number | 373052 |

3.2 EUT information

| | |
|---------------|------------------|
| Product name | Black Box Remote |
| Model | CL0 remote |
| Model Number | 03708 |
| Serial number | N/A |

Two CL0 remotes were provided for testing. A conducted port sample and a sample to be used for Radiated emissions testing. The conducted port sample was used in Occupied Bandwidth testing. All other testing was performed with the radiated sample.

3.3 Technical information

| | |
|---------------------------|---|
| Operating band | Radio ANT TX/RX |
| Operating frequencies | 2.4-GHz ISM band. |
| Occupied bandwidth (99 %) | 927.5 kHz on low channel. |
| Power requirements | 3 VDC (Batteries) |
| Antenna information | The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator. |

3.4 Product description and theory of operation

CL0 interfaces Yamaha engine data to the Garmin network without a display. CL0 remote interfaces with the CL0 unit to remotely change parameters on the CL0.

Garmin Declaration of Duty Cycle

These designs use Gaussian Frequency Shift Keying (GFSK) modulation scheme to transmit data using ANT protocols at a maximum data rate of 2Mbps and a maximum message rate of approximately 300Hz for ANT. The maximum transmit duty cycle is ~13.3%.

The duty cycle reduction is added to the measurements as a -17.52dB reduction in dB μ V/m reported levels. This is calculated from: $DC = 20 \log (.133)$

3.5 EUT exercise details

Garmin Black Box Remote, Model: CL0 remote run with 2 AA batteries while the ANT radio was transmitting at its highest power. 3 frequencies were measured: 2402MHz (Low Channel), 2441MHz (Mid Channel) and 2480MHz (High Channel).

Operating conditions: The EUT is a remote control and Garmin provided a sample which when turned on would allow testing at maximum output power and can change the channels to test High, mid and low transmitter frequencies.

Software and Firmware: The software used to configure for testing is called ANTware II

Input/Output signal levels – not applicable the device is a remote control with no input/output ports. The EUT for testing was simply set in transmit mode.

3.6 EUT setup diagram



Figure 3.6-1: Setup diagram

3.7 EUT Support Equipment

Table 3.7-1: EUT Support Equipment

| Description | Brand name | Model/Part number | Serial number |
|-------------|------------|-------------------|---------------|
| N/A | N/A | N/A | N/A |

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

None

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

| | |
|-------------------|---------------|
| Temperature | 15–30 °C |
| Relative humidity | 20–75 % |
| Air pressure | 860–1060 mbar |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

| Test name | Measurement uncertainty, dB |
|-----------------------------------|-----------------------------|
| All antenna port measurements | 0.55 |
| Conducted spurious emissions | 1.13 |
| Radiated spurious emissions | 3.78 |
| AC power line conducted emissions | 1.38 |

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

| Equipment | Manufacturer | Model no. | Asset no. | Cal cycle | Next cal. |
|------------------------------|--------------------------------|--|-----------|-----------|------------------------|
| EMC Test Receiver | Rohde & Schwarz | ESU 40 | E1121 | 1 yr. | 5/25/2020 |
| Antenna, Bilog | Schaffner-Chase | CBL6111C | 1480 | 1 yr. | 4/18/2020 |
| Antenna, Horn | EMCO | 3115 | 1033 | 1 yr. | 7/27/2019 |
| Spectrum Analyzer | Rohde & Schwarz | FSV40 | E1120 | 1 yr. | 8/24/2019 |
| Signal Generator | Rohde & Schwarz | SMB 100A | E1128 | 1 yr. | 12/20/2019 |
| High-pass filter | Wainwright Instruments GMBH | WHKX12-2493-2770- 18000-60SS | N/A | N/A | Verified with FSV40 |
| Band reject filter | Wainwright Instruments GMBH | WRCGV10-2363.5- 2400-2483.5-2520- 60SS | N/A | N/A | Verified with FSV40 |
| RF Power Sensor | ETS Lindgren | 7002-006 | E1061 | 1 yr. | 05/31/2020 |
| Temperature/humidity chamber | CSZ Inc. | ZPH-32-2-2-H/AC | S1179 | 1 yr. | 04/20/2020 |

Note: NCR - no calibration required, VOU - verify on use

Section 8. Testing data

8.1 FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits

8.1.1 Definitions and limits

FCC:

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

IC:

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in table below.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in table below. The more stringent limit applies at the frequency range boundaries.

Table 8.1-1: Conducted emissions limit

| Frequency of emission, MHz | Conducted limit, dB μ V | |
|-------------------------------|-----------------------------|-----------|
| | Quasi-peak | Average** |
| 0.15–0.5 | 66 to 56* | 56 to 46* |
| 0.5–5 | 56 | 46 |
| 5–30 | 60 | 50 |

Note: * - The level decreases linearly with the logarithm of the frequency.
 ** - A linear average detector is required.

8.1.2 Test summary

| | | | |
|---------------|---|-------------------|-----------|
| Test date | Not applicable. | Temperature | 24 °C |
| Test engineer | Andres Martinez, Wireless Test Engineer | Air pressure | 1001 mbar |
| Verdict | Not applicable | Relative humidity | 51 % |

8.1.3 Observations, settings and special notes

EUT only receives power from 2 AA batteries.

Test receiver settings:

| | |
|----------------------|--|
| Frequency span | 150 kHz to 30 MHz |
| Detector mode | Peak and Average (preview mode); Quasi-Peak and Average (final measurements) |
| Resolution bandwidth | 9 kHz |
| Video bandwidth | 30 kHz |
| Trace mode | Max Hold |
| Measurement time | 1000 ms |

8.2 FCC 15.215(c) and RSS-Gen 6.7 Occupied (Emission) bandwidth

8.2.1 Definitions and limits

FCC

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80 % of the permitted band in order to minimize the possibility of out-of-band operation.

IC

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

8.2.2 Test summary

| | | | |
|---------------|---|-------------------|-----------|
| Test date | July 31, 2019 | Temperature | 28 °C |
| Test engineer | Andres Martinez, Wireless Test Engineer | Air pressure | 1003 mbar |
| Verdict | Pass | Relative humidity | 45 % |

8.2.3 Observations, settings and special notes


Measurements were made as conducted port measurements with the EUT supplied by Garmin

| | |
|----------------------|-------------------------------|
| Detector mode | Peak |
| Resolution bandwidth | 1 to 5% of Occupied Bandwidth |
| Video bandwidth | RBW × 3 |
| Trace mode | Max Hold |

8.2.4 Test data

Table 8.2-1: 99% dB and 20 dB bandwidth results.

| Fundamental frequency, MHz | 99% bandwidth | 20 dB bandwidth |
|----------------------------|---------------|-----------------|
| 2402 | 943.56 kHz | 907.05 kHz |
| 2441 | 944.47 kHz | 912.46 kHz |
| 2480 | 944.65 kHz | 912.46 kHz |

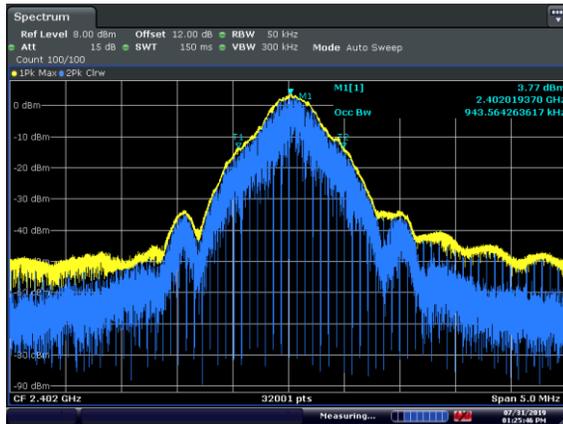

Date: 31.JUL.2019 13:25:45

Figure 8.2-1: 99% bandwidth CLO Remote-ANT - Low Channel


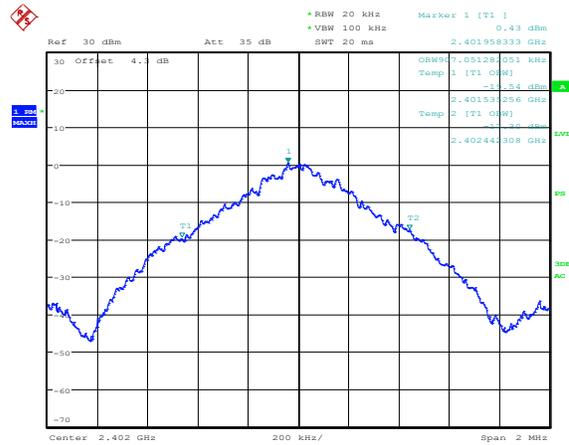


Figure 8.2-2: 20 dB bandwidth CLO Remote ANT - Low Channel

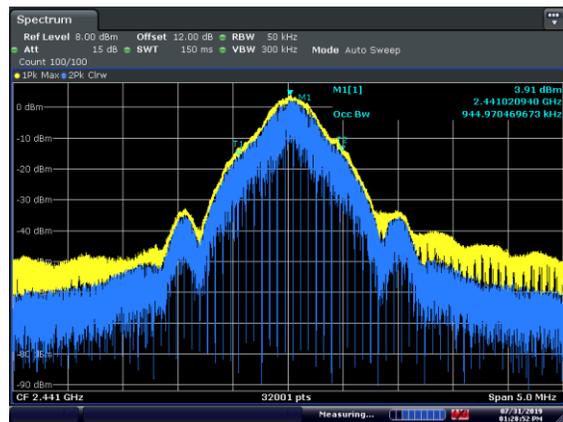

Date: 31.JUL.2019 13:28:52

Figure 8.2-3: 99% bandwidth CLO Remote-ANT - Mid Channel


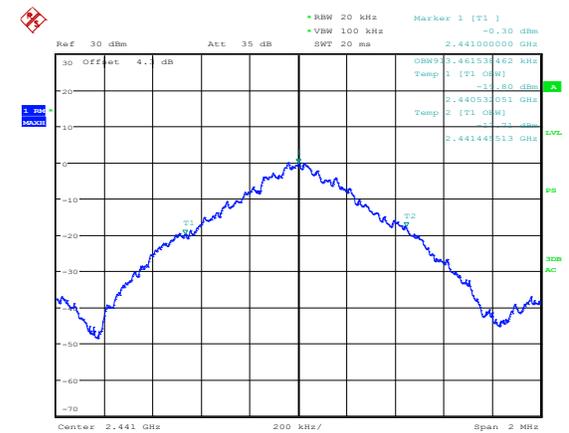


Figure 8.2-4: 20 dB bandwidth CLO Remote ANT - Mid Channel

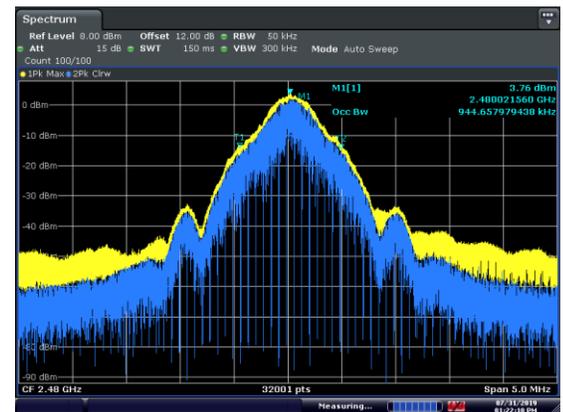

Date: 31.JUL.2019 13:22:10

Figure 8.2-5: 99% bandwidth CLO Remote-ANT - High Channel

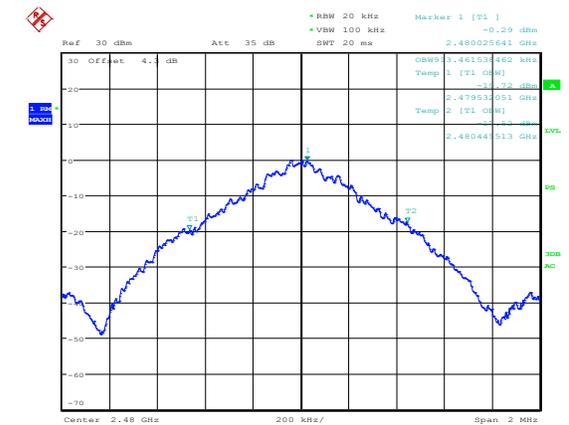


Figure 8.2-6: 20 dB bandwidth CLO Remote ANT - High Channel

8.3 FCC 15.249(a) RSS 210 B.10(a) and (b) Field strength of Fundamental, harmonics and spurious emissions

8.3.1 Definitions and limits

FCC:

The field strength of emissions from intentional radiators shall comply with the following table. Field strength limits are specified at 3 meters.

IC:

The field strength measured at 3 meters shall not exceed the limits in the following table.

Table 8.3-1: Field strength limits

| Fundamental frequencies, MHz | Field strength of fundamental | | Field strength of harmonics | |
|------------------------------|-------------------------------|--------|-----------------------------|--------|
| | mV/m | dBµV/m | µV/m | dBµV/m |
| 902–928 | 50 | 94 | 500 | 54 |
| 2400–2483.5 | 50 | 94 | 500 | 54 |
| 5725–5875 | 50 | 94 | 500 | 54 |
| 24000–24250 | 250 | 108 | 2500 | 68 |

Notes: In the emission table above, the tighter limit applies at the band edges. For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

8.3.2 Test summary

| | | | |
|---------------|--------------------------------|-------------------|-----------|
| Test date | July 7, 2019 | Temperature | 28 °C |
| Test engineer | Andres Martinez, Test Engineer | Air pressure | 1003 mbar |
| Verdict | Pass | Relative humidity | 45 % |

8.3.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to 18GHz. Radiated measurements were performed at 3m. Three orthogonal positions were evaluated during pre-scans and only the worst-case position was used for final and formal testing. The Garmin Remote Control has a duty cycle of -17.52dB. This value will be adjusted in the Fundamental and Spurious table measurements.

For justification of Duty Cycle reductions see Section 3.4

Spectrum analyzer settings for frequencies below 1000 MHz:

| | |
|----------------------|------------|
| Detector mode | Quasi-Peak |
| Resolution bandwidth | 120 kHz |
| Video bandwidth | 300 kHz |
| Trace mode | Max Hold |

Spectrum analyzer settings for peak measurements at the frequencies above 1000 MHz:

| | |
|----------------------|----------|
| Detector mode | Peak |
| Resolution bandwidth | 1 MHz |
| Video bandwidth | 3 MHz |
| Trace mode | Max Hold |

Spectrum analyzer settings for average measurements at the frequencies above 1000 MHz:

| | |
|----------------------|---------|
| Detector mode | Average |
| Resolution bandwidth | 1 MHz |
| Video bandwidth | 3 MHz |

Trace mode Max Hold

8.3.4 Test data

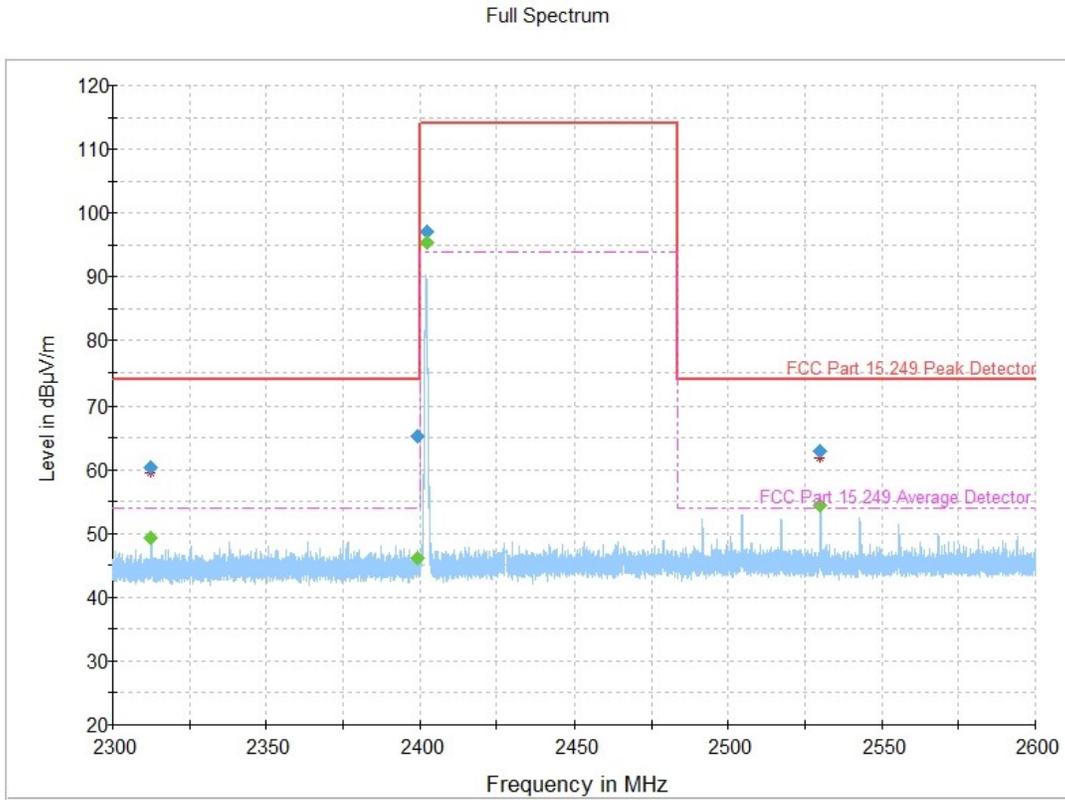


Figure 8.3-1: Field strength of Fundamental output power – Garmin CL0 Remote Control-ANT - Low Channel.

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Duty Cycle (dB) | Av Meas with Duty Cycle (dB) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|-----------------|------------------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2402.200000 | 97.16 | --- | --- | --- | 114.00 | 16.84 | 5000.0 | 1000.000 | 290.0 | V | 209.0 | 9.0 |
| 2402.200000 | --- | 95.44 | 17.52 | 77.92 | 93.97 | 16.05* | 5000.0 | 1000.000 | 290.0 | V | 209.0 | 9.0 |

Table 8.3-2: Field strength of Fundamental output power – Garmin CL0 Remote Control ANT - Low Channel

Note: (*) Adjusted value with 17.52dB duty cycle See table below.

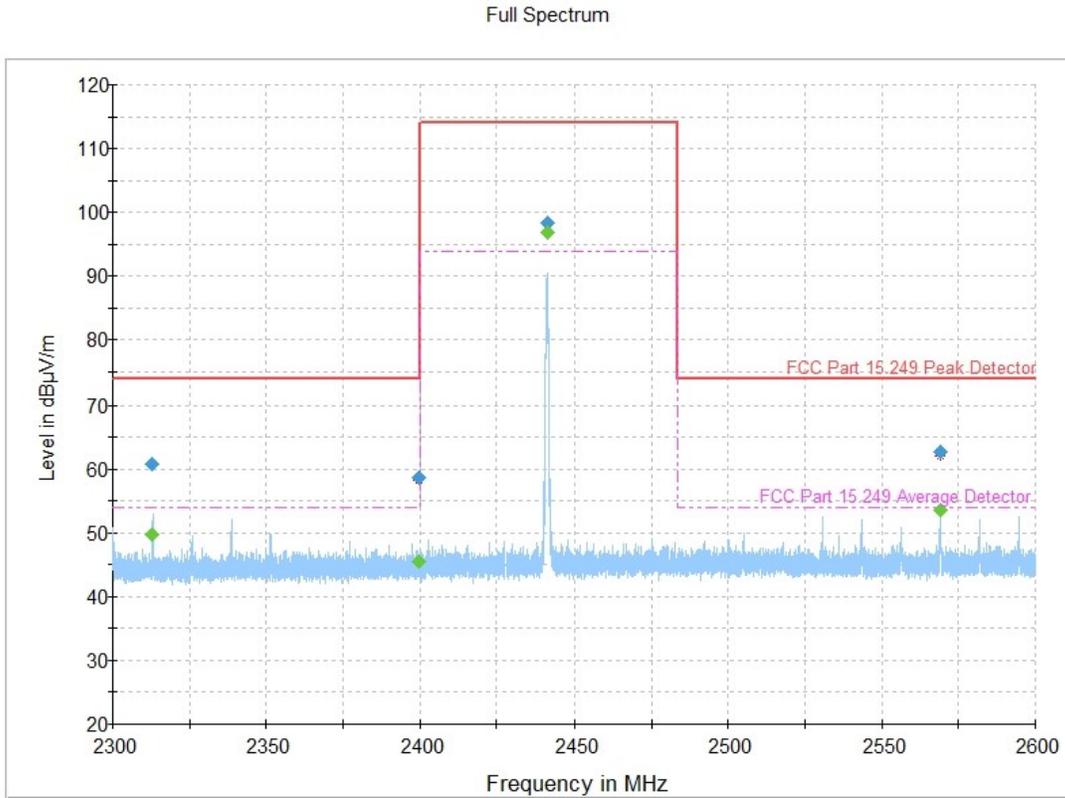


Figure 8.3-3: Field strength of Fundamental output power – Garmin CLO Remote Control-ANT - Mid Channel.

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Duty Cycle (dB) | Av Meas with Duty Cycle (dB) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|-----------------|------------------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2441.19000 | --- | 96.87 | 17.52 | 79.35 | 93.97 | 14.62* | 5000.0 | 1000.000 | 144.0 | V | 175.0 | 9.4 |
| 2441.19000 | 98.43 | --- | | | 114.00 | 15.57 | 5000.0 | 1000.000 | 144.0 | V | 175.0 | 9.4 |

Table 8.3-4: Field strength of Fundamental output power – Garmin CLO Remote Control ANT - Mid Channel

Note: (*) Adjusted value with 17.52dB duty cycle. See table below.

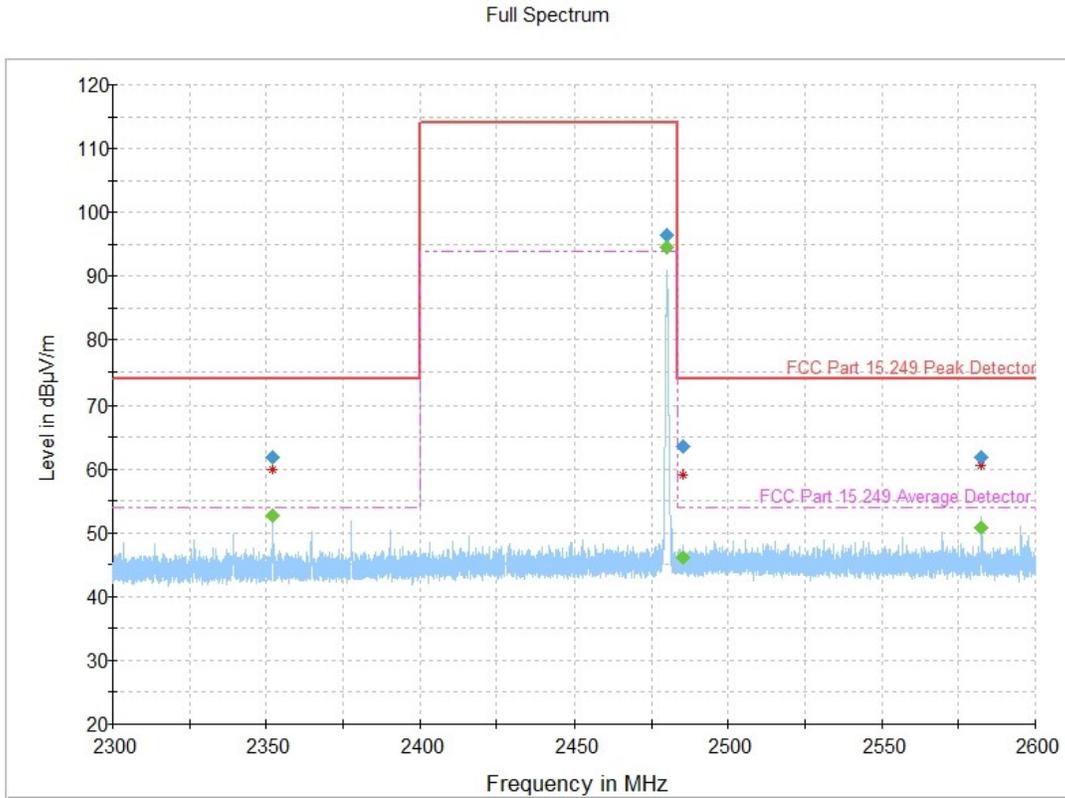


Figure 8.3-5: Field strength of Fundamental output power – Garmin CL0 Remote Control-ANT - High Channel.

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Duty Cycle (dB) | Av Meas with Duty Cycle (dB) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|-----------------|------------------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2480.22000 | --- | 94.57 | 17.52 | 77.05 | 93.97 | 16.92* | 5000.0 | 1000.000 | 146.0 | V | 180.0 | 9.5 |
| 2480.22000 | 96.34 | --- | | | 114.00 | 17.66 | 5000.0 | 1000.000 | 146.0 | V | 180.0 | 9.5 |

Table 8.3-6: Field strength of Fundamental output power – Garmin CL0 Remote Control ANT - High Channel

Note: (*) Adjusted value with 17.52dB duty cycle. See table below.

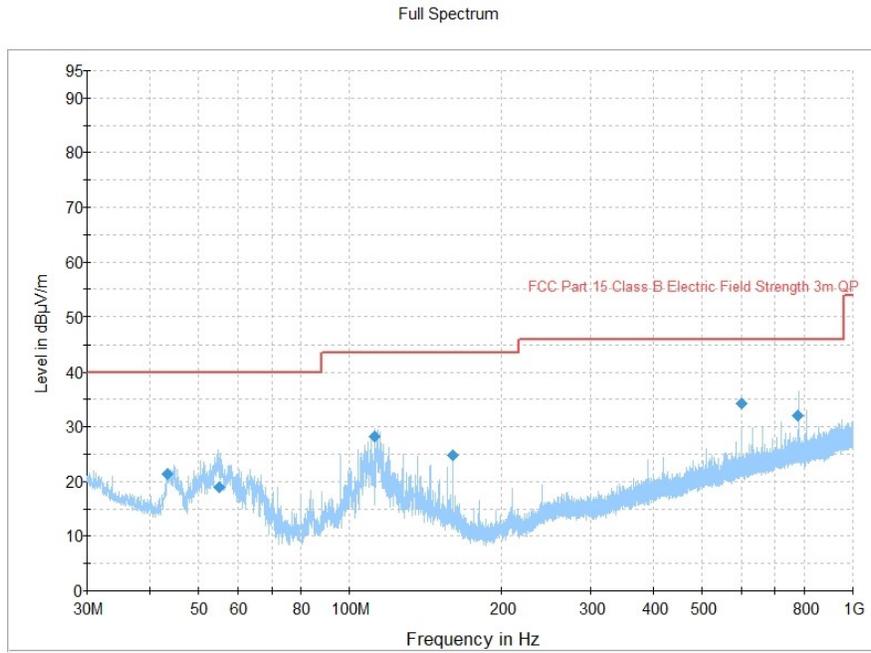


Figure 8.3-7: Field strength of spurious emissions 30MHz to 1GHz – Garmin CLO Remote Control ANT

Note: See table below for duty cycle.

Full Spectrum

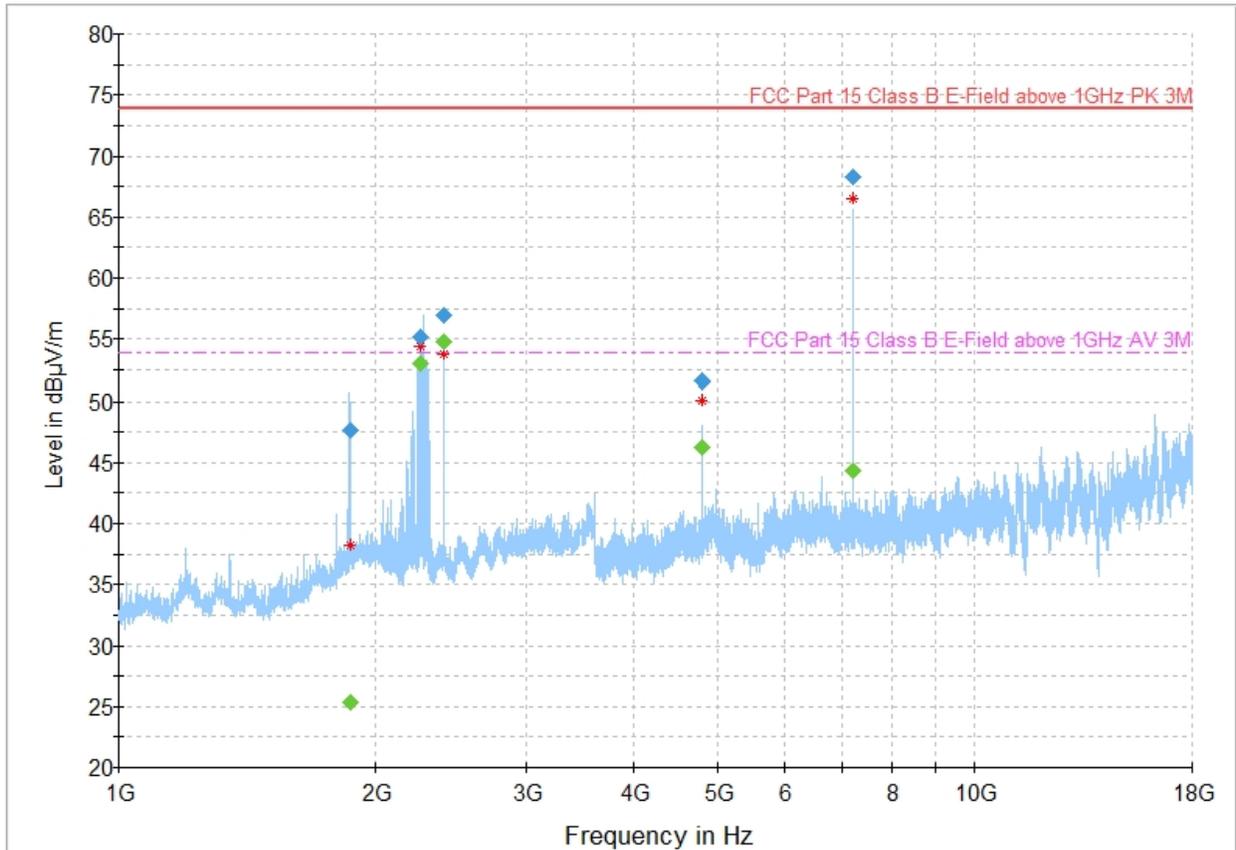


Figure 8.3-8: Field strength of spurious emissions 1GHz to 18GHz – Garmin CLO Remote Control ANT – Low Channel

Note: See table below for duty cycle.

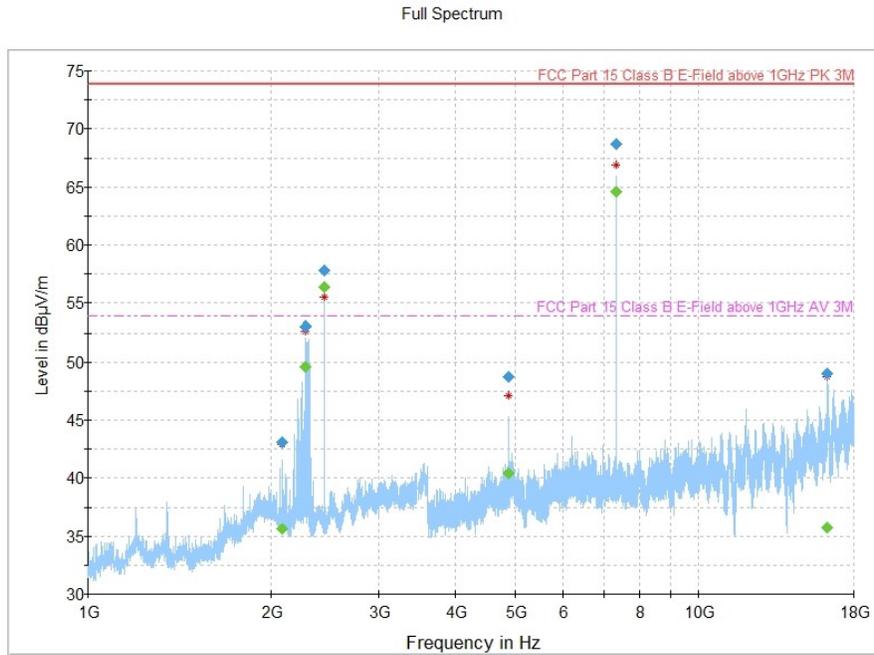


Figure 8.3-9: Field strength of spurious emissions 1GHz to 18GHz – Garmin CLO Remote Control ANT – Mid Channel

Note: See table below for duty cycle.

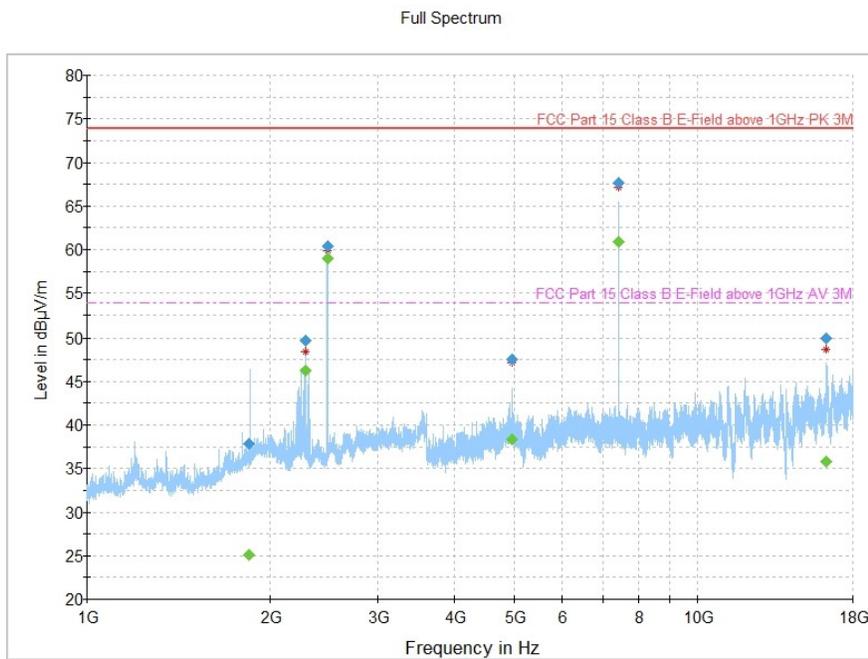


Figure 8.3-10: Field strength of spurious emissions 1GHz to 18GHz – Garmin CLO Remote Control ANT – High Channel

Note: See table below for duty cycle.



| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 43.471667 | 21.32 | 40.00 | 18.68 | 1000.0 | 120.000 | 103.0 | V | 157.0 | 13.3 |
| 55.079667 | 18.90 | 40.00 | 21.10 | 1000.0 | 120.000 | 309.0 | V | 6.0 | 8.0 |
| 112.037333 | 28.25 | 43.50 | 15.25 | 1000.0 | 120.000 | 368.0 | V | 13.0 | 13.0 |
| 160.012333 | 24.73 | 43.50 | 18.77 | 1000.0 | 120.000 | 400.0 | V | 221.0 | 12.8 |
| 600.004333 | 34.21 | 46.00 | 11.79 | 1000.0 | 120.000 | 260.0 | H | 153.0 | 23.4 |
| 777.554000 | 32.02 | 46.00 | 13.98 | 1000.0 | 120.000 | 250.0 | H | 281.0 | 25.6 |

Table 8.3-11: Field strength of spurious emissions 30MHz to 1GHz – Garmin CLO Remote Control ANT

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Comment |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|----------------------|
| 1867.366667 | --- | 25.41 | 53.90 | 28.49 | 5000.0 | 1000.000 | 133.0 | V | 92.0 | -12.0 | |
| 1867.366667 | 47.70 | --- | 73.90 | 26.20 | 5000.0 | 1000.000 | 133.0 | V | 92.0 | -12.0 | |
| 2261.233333 | 55.22 | --- | 73.90 | 18.68 | 5000.0 | 1000.000 | 139.0 | H | 325.0 | -11.5 | |
| 2261.233333 | --- | 52.94 | 53.90 | 0.96 | 5000.0 | 1000.000 | 139.0 | H | 325.0 | -11.5 | |
| 2402.166667 | FUNDAMENTAL | | | | | | | | | | |
| 2402.166667 | | | | | | | | | | | |
| 4804.266667 | 51.59 | --- | 73.90 | 22.31 | 5000.0 | 1000.000 | 114.0 | V | 222.0 | -3.1 | |
| 4804.266667 | --- | 46.25 | 53.90 | 7.65 | 5000.0 | 1000.000 | 114.0 | V | 222.0 | -3.1 | |
| 7205.566667 | 68.34 | | 73.90 | 5.56 | 5000.0 | 1000.000 | 132.0 | V | -2.0 | -1.1 | |
| 7205.566667 | --- | 44.27* | 53.90 | 9.63 | 5000.0 | 1000.000 | 132.0 | V | -2.0 | -1.1 | Duty Cycle Corrected |

Table 8.3-12: Field strength of spurious emissions 1GHz to 18GHz – Garmin CLO Remote Control ANT – Low Channel

Note: (*) Adjusted value with 17.52dB duty cycle.

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Duty Cycle (dB) | Av Meas with Duty Cycle (dB) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|-----------------|------------------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2082.56666 | --- | 35.68 | | | 53.90 | 18.22 | 5000.0 | 1000.000 | 131.0 | H | 316.0 | -12.2 |
| 2082.56666 | 43.11 | --- | | | 73.90 | 30.79 | 5000.0 | 1000.000 | 131.0 | H | 316.0 | -12.2 |
| 2274.83333 | --- | 49.56 | | | 53.90 | 4.34 | 5000.0 | 1000.000 | 107.0 | H | 316.0 | -11.4 |
| 2274.83333 | 53.03 | --- | | | 73.90 | 20.87 | 5000.0 | 1000.000 | 107.0 | H | 316.0 | -11.4 |
| 2441.03333 | FUNDAMENTAL | | | | | | | | | | | |
| 2441.03333 | | | | | | | | | | | | |
| 4882.46666 | 48.69 | --- | | | 73.90 | 25.21 | 5000.0 | 1000.000 | 132.0 | V | 240.0 | -3.3 |
| 4882.46666 | --- | 40.39 | | | 53.90 | 13.51 | 5000.0 | 1000.000 | 132.0 | V | 240.0 | -3.3 |
| 7323.10000 | 68.72 | --- | | | 73.90 | 5.18 | 5000.0 | 1000.000 | 224.0 | H | 5.0 | -1.0 |
| 7323.10000 | --- | 64.61 | 17.52 | 47.09 | 53.90 | 6.81* | 5000.0 | 1000.000 | 224.0 | H | 5.0 | -1.0 |
| 16301.0000 | --- | 35.74 | 17.52 | 18.22 | 53.90 | 35.70* | 5000.0 | 1000.000 | 219.0 | V | 268.0 | 10.3 |
| 16301.0000 | 49.06 | --- | | | 73.90 | 24.84 | 5000.0 | 1000.000 | 219.0 | V | 268.0 | 10.3 |

Table 8.3-13: Field strength of spurious emissions 1GHz to 18GHz – Garmin CLO Remote Control ANT – Mid Channel

Note: (*) Adjusted value with 17.52dB duty cycle.



| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Duty Cycle (dB) | Av Meas with Duty Cycle (dB) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|-------------------|-----------------|------------------------------|----------------|---------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 1846.73333 | --- | 25.13 | | | 53.90 | 28.77 | 5000.0 | 1000.000 | 221.0 | H | 310.0 | -12.2 |
| 1846.73333 | 37.85 | --- | | | 73.90 | 36.06 | 5000.0 | 1000.000 | 221.0 | H | 310.0 | -12.2 |
| 2288.03333 | --- | 46.29 | | | 53.90 | 7.61 | 5000.0 | 1000.000 | 153.0 | H | 311.0 | -11.5 |
| 2288.03333 | 49.66 | --- | | | 73.90 | 24.24 | 5000.0 | 1000.000 | 153.0 | H | 311.0 | -11.5 |
| 2479.96666 | FUNDAMENTAL | | | | | | | | | | | |
| 2479.96666 | | | | | | | | | | | | |
| 4959.86666 | 47.54 | --- | | | 73.90 | 26.36 | 5000.0 | 1000.000 | 116.0 | V | 220.0 | -3.5 |
| 4959.86666 | --- | 38.34 | | | 53.90 | 15.56 | 5000.0 | 1000.000 | 116.0 | V | 220.0 | -3.5 |
| 7439.60000 | 67.59 | --- | | | 73.90 | 6.31 | 5000.0 | 1000.000 | 209.0 | H | 4.0 | -0.5 |
| 7439.60000 | --- | 60.95 | 17.52 | 43.43 | 53.90 | 10.47* | 5000.0 | 1000.000 | 209.0 | H | 4.0 | -0.5 |
| 16304.2333 | 49.99 | --- | | | 73.90 | 23.91 | 5000.0 | 1000.000 | 103.0 | H | 9.0 | 10.3 |
| 16304.2333 | --- | 35.75 | 17.52 | 18.23 | 53.90 | 35.67 | 5000.0 | 1000.000 | 103.0 | H | 9.0 | 10.3 |

Table 8.3-14: Field strength of spurious emissions 1GHz to 18GHz – Garmin CLO Remote Control ANT – High Channel

Note: (*) Adjusted value with 17.52dB duty cycle.

8.4 FCC 15.249(d) and RSS-210 B10 (b) Emissions at the Band Edges

8.4.1 Definitions and limits

FCC

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

IC

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general field strength limits listed in RSS-Gen, whichever is less stringent.

Table 8.4-1: 15.209 and RSS-Gen emissions field strength limits

| Frequency, MHz | Field strength of emissions | | Measurement distance, m |
|-------------------|-----------------------------|---------------------------------|-------------------------|
| | $\mu\text{V/m}$ | $\text{dB}\mu\text{V/m}$ | |
| 0.009–0.490 | 2400/F | $67.6 - 20 \times \log_{10}(F)$ | 300 |
| 0.490–1.705 | 24000/F | $87.6 - 20 \times \log_{10}(F)$ | 30 |
| 1.705–30.0 | 30 | 29.5 | 30 |
| 30–88 | 100 | 40.0 | 3 |
| 88–216 | 150 | 43.5 | 3 |
| 216–960 | 200 | 46.0 | 3 |
| above 960 | 500 | 54.0 | 3 |

Notes: In the emission table above, the tighter limit applies at the band edges. For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.4-2: IC restricted frequency bands

| MHz | MHz | MHz | GHz |
|-----------------|---------------------|---------------|-------------|
| 0.090–0.110 | 12.51975–12.52025 | 399.9–410 | 5.35–5.46 |
| 2.1735–2.1905 | 12.57675–12.57725 | 608–614 | 7.25–7.75 |
| 3.020–3.026 | 13.36–13.41 | 960–1427 | 8.025–8.5 |
| 4.125–4.128 | 16.42–16.423 | 1435–1626.5 | 9.0–9.2 |
| 4.17725–4.17775 | 16.69475–16.69525 | 1645.5–1646.5 | 9.3–9.5 |
| 4.20725–4.20775 | 16.80425–16.80475 | 1660–1710 | 10.6–12.7 |
| 5.677–5.683 | 25.5–25.67 | 1718.8–1722.2 | 13.25–13.4 |
| 6.215–6.218 | 37.5–38.25 | 2200–2300 | 14.47–14.5 |
| 6.26775–6.26825 | 73–74.6 | 2310–2390 | 15.35–16.2 |
| 6.31175–6.31225 | 74.8–75.2 | 2655–2900 | 17.7–21.4 |
| 8.291–8.294 | 108–138 | 3260–3267 | 22.01–23.12 |
| 8.362–8.366 | 156.52475–156.52525 | 3332–3339 | 23.6–24.0 |
| 8.37625–8.38675 | 156.7–156.9 | 3345.8–3358 | 31.2–31.8 |
| 8.41425–8.41475 | 240–285 | 3500–4400 | 36.43–36.5 |
| 12.29–12.293 | 322–335.4 | 4500–5150 | Above 38.6 |

Note: Certain frequency bands listed in table above and above 38.6 GHz are designated for low-power license-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

Table 8.4-3: FCC restricted frequency bands

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110 | 16.42–16.423 | 399.9–410 | 4.5–5.15 |
| 0.495–0.505 | 16.69475–16.69525 | 608–614 | 5.35–5.46 |
| 2.1735–2.1905 | 16.80425–16.80475 | 960–1240 | 7.25–7.75 |
| 4.125–4.128 | 25.5–25.67 | 1300–1427 | 8.025–8.5 |
| 4.17725–4.17775 | 37.5–38.25 | 1435–1626.5 | 9.0–9.2 |
| 4.20725–4.20775 | 73–74.6 | 1645.5–1646.5 | 9.3–9.5 |
| 6.215–6.218 | 74.8–75.2 | 1660–1710 | 10.6–12.7 |
| 6.26775–6.26825 | 108–121.94 | 1718.8–1722.2 | 13.25–13.4 |
| 6.31175–6.31225 | 123–138 | 2200–2300 | 14.47–14.5 |
| 8.291–8.294 | 149.9–150.05 | 2310–2390 | 15.35–16.2 |
| 8.362–8.366 | 156.52475–156.52525 | 2483.5–2500 | 17.7–21.4 |
| 8.37625–8.38675 | 156.7–156.9 | 2690–2900 | 22.01–23.12 |
| 8.41425–8.41475 | 162.0125–167.17 | 3260–3267 | 23.6–24.0 |
| 12.29–12.293 | 167.72–173.2 | 3332–3339 | 31.2–31.8 |
| 12.51975–12.52025 | 240–285 | 3345.8–3358 | 36.43–36.5 |
| 12.57675–12.57725 | 322–335.4 | 3600–4400 | Above 38.6 |
| 13.36–13.41 | | | |

8.4.2 Test summary

| | | | |
|---------------|--------------------------------|-------------------|-----------|
| Test date | July 10, 2019 | Temperature | 25 °C |
| Test engineer | Andres Martinez, Test Engineer | Air pressure | 1004 mbar |
| Verdict | Pass | Relative humidity | 45 % |

8.4.3 Observations, settings and special notes

The Garmin Remote Control has a duty cycle of -17.52dB. This value will be adjusted in the table measurements.

For justification of Duty Cycle reductions see Section 3.4

Spectrum analyzer settings for frequencies below 1000 MHz:

| | |
|----------------------|--------------------|
| Detector mode | Peak or Quasi-Peak |
| Resolution bandwidth | 100 kHz |
| Video bandwidth | 300 kHz |
| Trace mode | Max Hold |

Spectrum analyzer settings for peak measurements at the frequencies above 1000 MHz:

| | |
|----------------------|----------|
| Detector mode | Peak |
| Resolution bandwidth | 1 MHz |
| Video bandwidth | 3 MHz |
| Trace mode | Max Hold |

Spectrum analyzer settings for average measurements at the frequencies above 1000 MHz:

| | |
|----------------------|----------|
| Detector mode | Average |
| Resolution bandwidth | 1 MHz |
| Video bandwidth | 3 MHz |
| Trace mode | Max Hold |

8.4.4 Test data

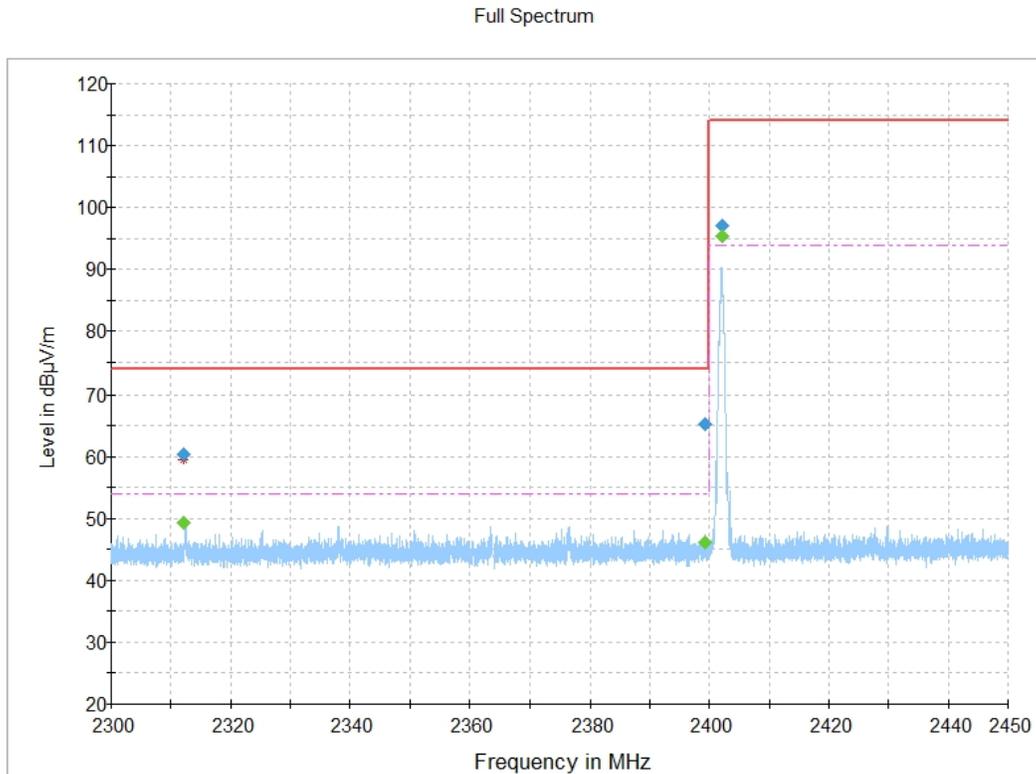


Figure 8.4-1: Field strength of emissions near band edges and restricted bands – Low Channel

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2312.230000 | 60.39 | --- | 73.90 | 13.51 | 5000.0 | 1000.000 | 203.0 | V | 5.0 | 8.5 |
| 2312.230000 | --- | 49.26 | 53.90 | 4.64 | 5000.0 | 1000.000 | 203.0 | V | 5.0 | 8.5 |
| 2399.290000 | 65.28 | --- | 73.90 | 8.62 | 5000.0 | 1000.000 | 141.0 | V | 87.0 | 9.0 |
| 2399.290000 | --- | 46.12 | 53.90 | 7.78 | 5000.0 | 1000.000 | 141.0 | V | 87.0 | 9.0 |

Figure 8.4-2: Field strength of emissions near band edges and restricted bands – Low Channel

Note: (*) Adjusted value with 17.52dB duty cycle.

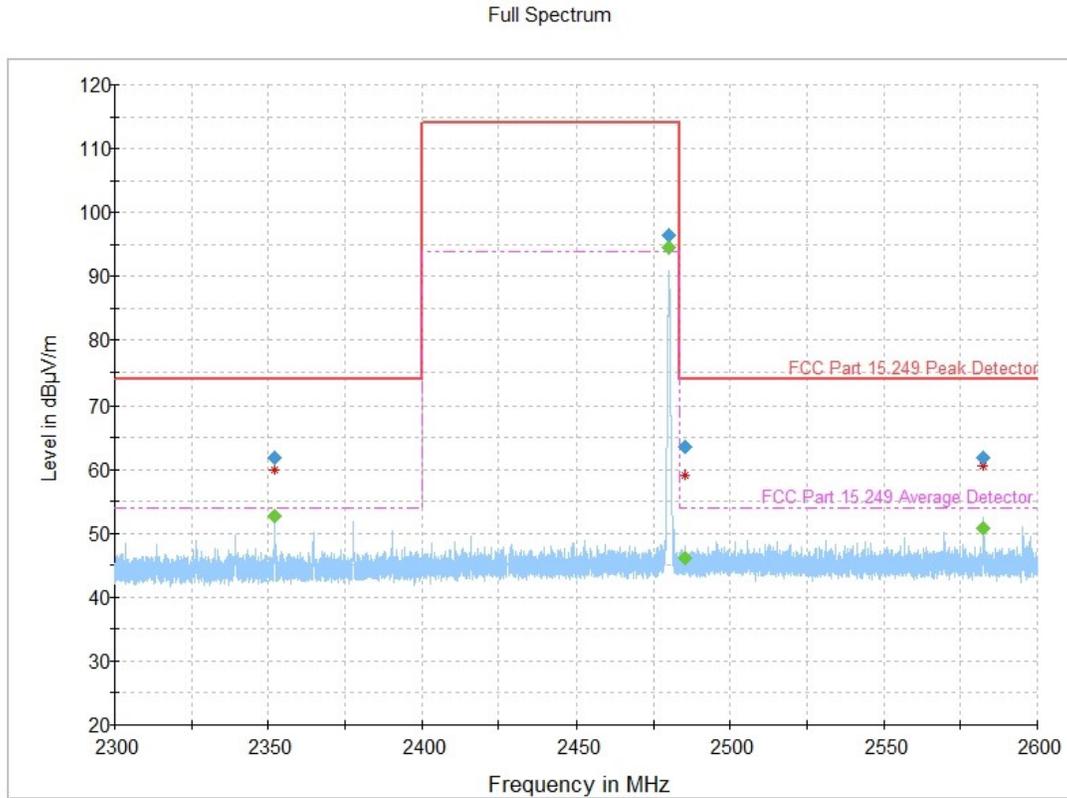


Figure 8.4-3: Field strength of emissions near band edges and restricted bands – High Channel


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 2351.900000 | 61.92 | --- | 73.90 | 11.99 | 5000.0 | 1000.000 | 128.0 | V | 188.0 | 8.7 |
| 2351.900000 | --- | 52.74 | 53.90 | 1.16 | 5000.0 | 1000.000 | 128.0 | V | 188.0 | 8.7 |
| 2485.270000 | 63.45 | --- | 73.90 | 10.45 | 5000.0 | 1000.000 | 210.0 | V | 279.0 | 9.5 |
| 2485.270000 | --- | 46.10 | 53.90 | 7.80 | 5000.0 | 1000.000 | 210.0 | V | 279.0 | 9.5 |
| 2582.280000 | --- | 50.75 | 53.90 | 3.15 | 5000.0 | 1000.000 | 114.0 | V | 148.0 | 9.6 |
| 2582.280000 | 61.91 | --- | 73.90 | 11.99 | 5000.0 | 1000.000 | 114.0 | V | 148.0 | 9.6 |

Figure 8.4-4: Field strength of emissions near band edges and restricted bands – High Channel


Note: (*) Adjusted value with 17.52dB duty cycle.

Section 9. Block diagrams of test set-ups

9.1 Radiated emissions set-up for frequencies below 1 GHz

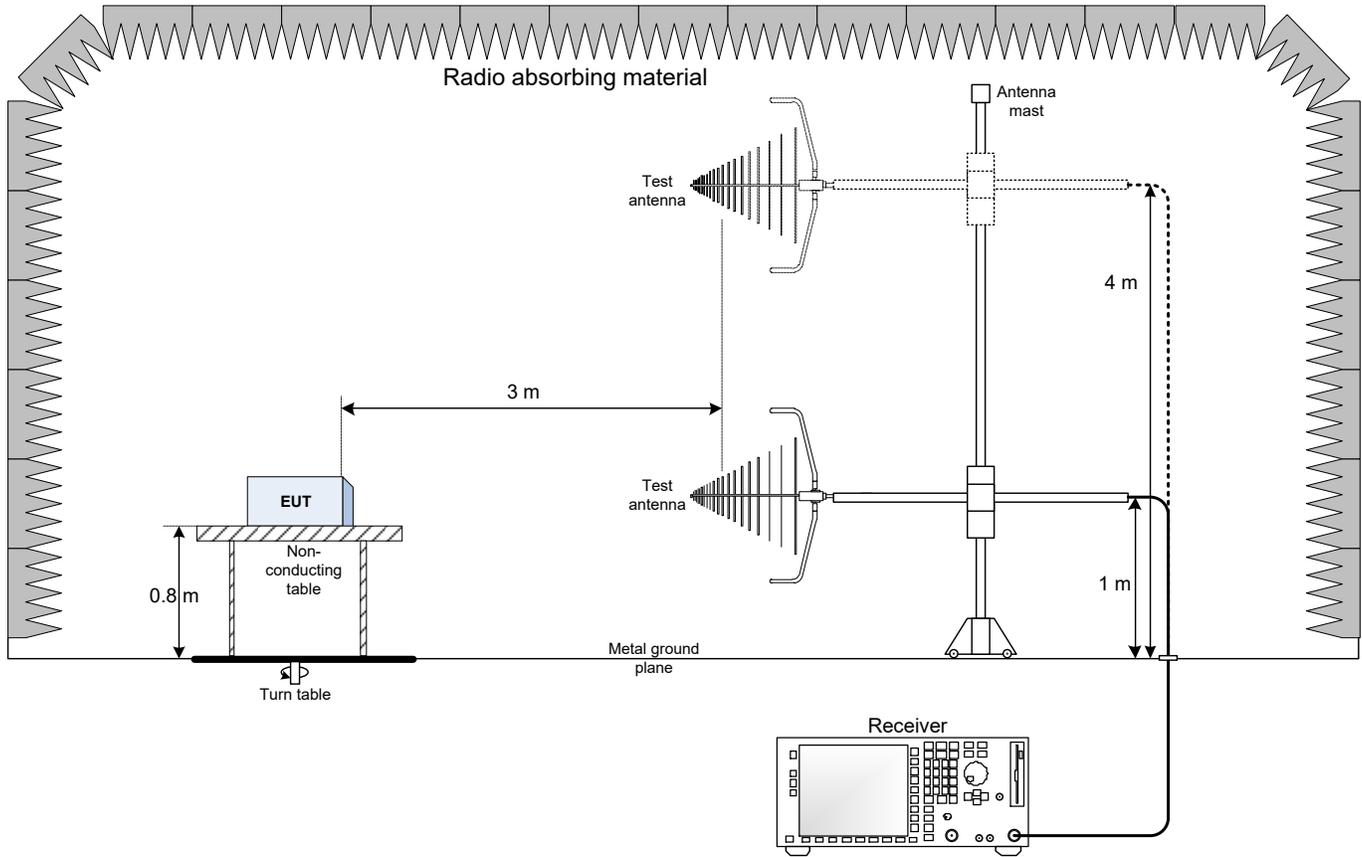

9.2 Radiated emissions set-up for frequencies above 1 GHz

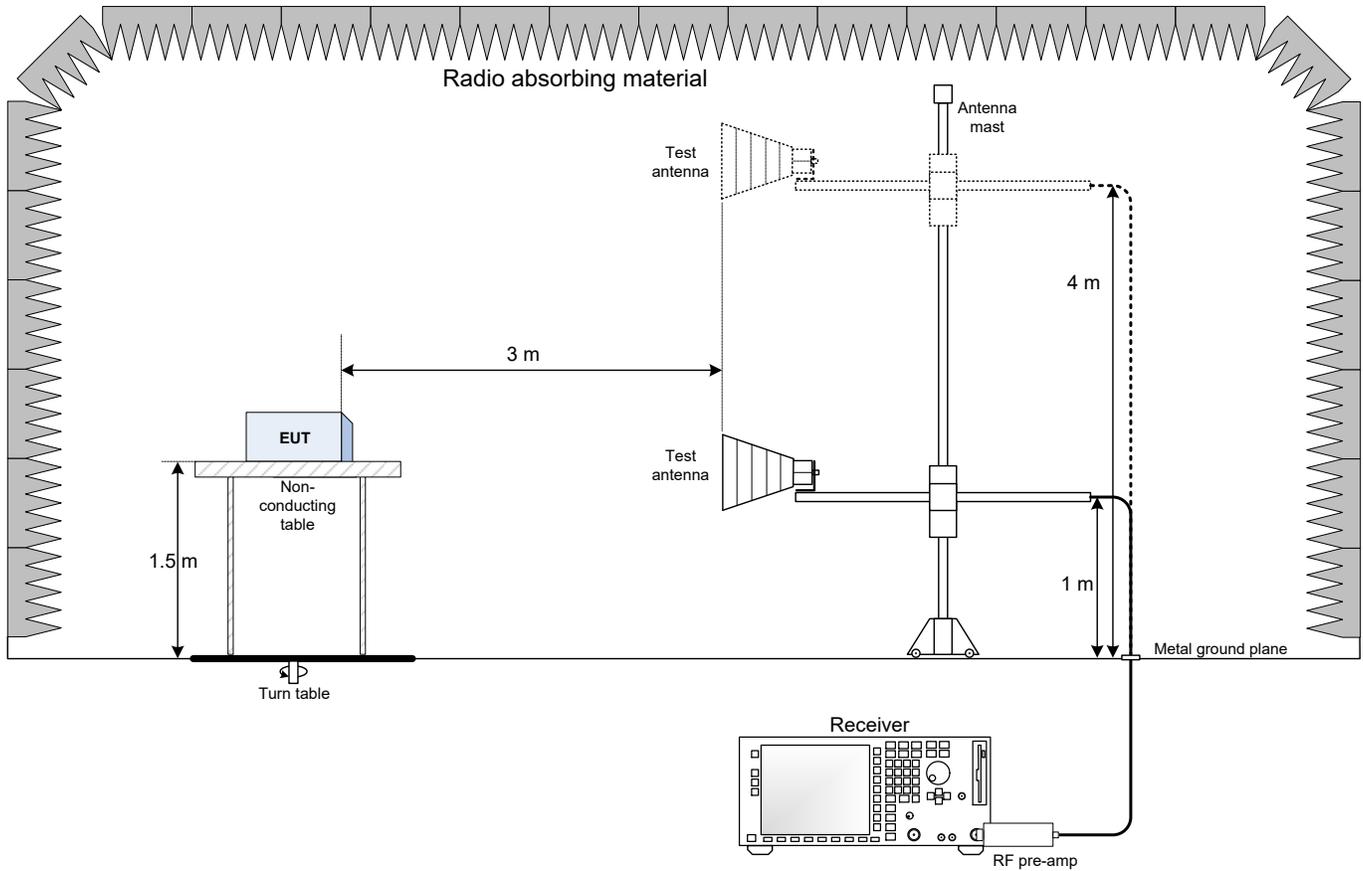

9.3 Conducted emissions set-up

