

ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Unlicensed National Information Infrastructure (U-NII) and License-Exempt Local Area Network (LE-LAN) Devices, 47CFR, Part 15E (15.407) Industry Canada RSS-247 Issue 2 Application For Grant of Certification

Model: A04159

Frequency Range: 5180-5240, and 5745-5825 MHz
License-Exempt U-NII, Local Area Network equipment, U-NII-1, and U-NII-3 operation

FCC ID: IPH-04159

IC: 1792A-04159

Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062

FCC Designation: US5305
ISED Registration: 3041A-1

Test Report Number: 210308

Test Date: March 8, 2021

Authorized Signatory: 
Scot D. Rogers

This report shall not be reproduced except in full, without the written approval of the laboratory.
This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: A04159
Test: 210308
Test to: 47CFR 15E, RSS-Gen RSS-247
File: A04159 NII TstRpt 210308

SN's: 3354564095 / 3354564120
FCC ID: IPH-04159
IC: 1792A-04159
Date: July 22, 2021
Page 1 of 100

Table of Contents

TABLE OF CONTENTS.....	2
REVISIONS.....	5
EXECUTIVE SUMMARY	6
OPINION / INTERPRETATION OF RESULTS	7
EQUIPMENT TESTED.....	8
Equipment Operational Modes.....	9
Equipment Function	10
Equipment Configuration.....	11
APPLICANT COMPANY INFORMATION	12
EQUIPMENT INFORMATION.....	12
Product Details	13
Antenna and Bandwidth.....	13
APPLICATION FOR CERTIFICATION.....	14
APPLICABLE STANDARDS & TEST PROCEDURES	15
TESTING PROCEDURES	15
Radiated Emission Test Procedure.....	15
Antenna Port Conducted Emission Test Procedure.....	16
Diagram 1 Test arrangement for Conducted emissions	17
Diagram 2 Test arrangement for radiated emissions of tabletop equipment.....	18
Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS).....	19
Diagram 4 Test arrangement for Antenna Port Conducted emissions	20
TEST SITE LOCATIONS	20
UNITS OF MEASUREMENTS	21

ENVIRONMENTAL CONDITIONS..... 21

STATEMENT OF MODIFICATIONS AND DEVIATIONS 21

INTENTIONAL RADIATORS..... 22

Antenna Requirements22

Restricted Bands of Operation.....22

 Table 1 Harmonic Radiated Emissions in Restricted Bands Data Mode 8 (802.11a).....23

 Table 2 Harmonic Radiated Emissions in Restricted Bands Data Mode 9 (802.11n)24

 Table 3 Harmonic Radiated Emissions in Restricted Bands Data Mode 10 (802.11n40)25

 Table 4 Harmonic Radiated Emissions in Restricted Bands Data Mode 11 (802.11ac80).....25

 Table 5 Harmonic Radiated Emissions in Restricted Bands Data Mode 12 (802.11a).....26

 Table 6 Harmonic Radiated Emissions in Restricted Bands Data Mode 13 (802.11n)26

 Table 7 Harmonic Radiated Emissions in Restricted Bands Data Mode 14 (802.11n40)27

 Table 8 Harmonic Radiated Emissions in Restricted Bands Data Mode 15 (802.11ac80).....27

Summary of Results for Radiated Emissions in Restricted Bands27

AC Line Conducted EMI Procedure28

 Figure 1 AC Line Conducted emissions of EUT line 1 (EUT – AC Adapter)29

 Figure 2 AC Line Conducted emissions of EUT line 2 (EUT – AC Adapter)30

 Figure 3 AC Line Conducted emissions of EUT line 1 (EUT – Computer).....31

 Figure 4 AC Line Conducted emissions of EUT line 2 (EUT – Computer).....32

 Table 9 AC Line Conducted Emissions Data L1 (EUT – AC Adapter)33

 Table 10 AC Line Conducted Emissions Data L2 (EUT – AC Adapter)33

 Table 11 AC Line Conducted Emissions Data L1 (EUT – Computer).....34

 Table 12 AC Line Conducted Emissions Data L2 (EUT – Computer).....34

Summary of Results for AC Line Conducted Emissions35

General Radiated Emissions Procedure.....35

 Table 13 General Radiated Emissions Data.....36

Summary of Results for General Radiated Emissions37

Operation in the 5150-5250 and 5725-5850 MHz Frequency U-NII-1 and U-NII-3 Bands37

 Figure 5 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 8 (802.11a)41

 Figure 6 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 9 (802.11n)42

Figure 7 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 10 (802.11n40)43

Figure 8 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 11 (802.11ac80).....44

Figure 9 Plot of Lower Band Edge Across 5150-5250 MHz Mode 8 (802.11a)45

Figure 10 Plot of Lower Band Edge Across 5150-5250 MHz Mode 9 (802.11n)46

Figure 11 Plot of Lower Band Edge Across 5150-5250 MHz Mode 10 (802.11n40)47

Figure 12 Plot of Lower Band Edge Across 5150-5250 MHz Mode 11 (802.11ac80).....48

Figure 13 Plot of Upper Band Edge Across 5150-5250 MHz Mode 8 (802.11a).....49

Figure 14 Plot of Upper Band Edge Across 5150-5250 MHz Mode 9 (802.11n)50

Figure 15 Plot of Upper Band Edge Across 5150-5250 MHz Mode 10 (802.11n40)51

Figure 16 Plot of Upper Band Edge Across 5150-5250 MHz Mode 11 (802.11ac80).....52

Figure 17 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 8 (802.11a).....53

Figure 18 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 9 (802.11n)54

Figure 19 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 10 (802.11n40)55

Figure 20 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 11 (802.11ac80).....56

Figure 21 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 8 (802.11a)57

Figure 22 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 9 (802.11n)58

Figure 23 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 10 (802.11n40)59

Figure 24 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 11 (802.11ac80).....60

Figure 25 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 12 (802.11a)61

Figure 26 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 13 (802.11n).....62

Figure 27 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 14 (802.11n40)63

Figure 28 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 15 (802.11ac80)64

Figure 29 Plot of Lower Band Edge Across 5725-5850 MHz Mode 12 (802.11a)65

Figure 30 Plot of Lower Band Edge Across 5725-5850 MHz Mode 13 (802.11n).....66

Figure 31 Plot of Lower Band Edge Across 5725-5850 MHz Mode 14 (802.11n40)67

Figure 32 Plot of Lower Band Edge Across 5725-5850 MHz Mode 15 (802.11ac80).....68

Figure 33 Plot of Upper Band Edge Across 5725-5850 MHz Mode 12 (802.11a).....69

Figure 34 Plot of Upper Band Edge Across 5725-5850 MHz Mode 13 (802.11n)70

Figure 35 Plot of Upper Band Edge Across 5725-5850 MHz Mode 14 (802.11n40)71

Figure 36 Plot of Upper Band Edge Across 5725-5850 MHz Mode 15 (802.11ac80)72

Figure 37 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 12 (802.11a)73

Figure 38 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 13 (802.11n)74

Figure 39 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 14 (802.11n40)75

Figure 40 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 15 (802.11ac80).....76

Figure 41 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 12 (802.11a).....77

Figure 42 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 13 (802.11n)78

Figure 43 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 14 (802.11n40)79

Figure 44 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 15 (802.11ac80)..... 80

Figure 45 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 12 (802.11a)..... 81

Figure 46 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 13 (802.11n) 82

Figure 47 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 14 (802.11n40) 83

Figure 48 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 15 (802.11ac80)..... 84

Transmitter Emissions Data..... 85

Table 14 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 8 (802.11a) 85

Table 15 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 9 (802.11n) 86

Table 16 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 10 (802.11n40) 87

Table 17 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 11 (802.11ac80)..... 88

Table 18 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 12 (802.11a) 89

Table 19 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 13 (802.11n) 90

Table 20 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 14 (802.11n40) 91

Table 21 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 15 (802.11ac80)..... 92

Table 22 Transmitter Antenna Port Data (U-NII-1) 93

Table 23 Transmitter Antenna Port Data (U-NII-3) 94

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator..... 94

ANNEX..... 95

Annex A Measurement Uncertainty Calculations..... 96

Annex B Test Equipment..... 97

Annex C Rogers Qualifications 99

Annex D Laboratory Certificate of Accreditation..... 100

Revisions

Revision 1 Issued July 22, 2021

Executive Summary

The following information is submitted for consideration in obtaining Equipment Grants of Certification for License Exempt, Unlicensed National Information Infrastructure (U-NII) Intentional Radiator operating under 47 CFR Paragraph 15E (15.407), U-NII-1 and U-NII-3 new rules, 5180-5240, and 5745-5825 MHz bands, and Industry Canada RSS-GEN Issue 5, and RSS-247 Issue 2, LE-LAN transmitter.

Name of Applicant: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062

M/N: A04159

FCC ID: IPH-04159

Industry Canada ID: 1792A-04159

Frequency Range: 5180-5240 MHz and 5745-5825 MHz (U-NII-1 and U-NII-3 under new rules 15.407, 802.11a/n (20 MHz) and limited transmitter operations per regulations for operation in Canada

Mode	Channel width	Average Conducted Power (W)	Average e.r.i.p. Power (W)	99% OBW (kHz)
Mode 8, U-NII-1a	20 MHz mode	0.028	0.087	17,347.8
Mode 9, U-NII-1n	20 MHz mode	0.027	0.084	18,168.6
Mode 10, U-NII-1n40	40 MHz mode	0.023	0.072	36,440.6
Mode 11, U-NII-1ac	80 MHz mode	0.016	0.051	75,154.3
Mode 12, U-NII-3a	20 MHz mode	0.030	0.096	18,268.7
Mode 13, U-NII-3n	20 MHz mode	0.029	0.092	18,908.0
Mode 14, U-NII-3n40	40 MHz mode	0.023	0.071	38,323.4
Mode 15, U-NII-3ac	80 MHz mode	0.025	0.080	76,747.4

This report addresses EUT Operations as U-NII transmitter using modulations defined above in modes 8 through 15. Note, the production device utilizes integral antenna system with 5 dBi Gain

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Frequency Bands 15.205, RSS-GEN 8.10	-1.2	Complies
AC Line Conducted 15.207, RSS-GEN 7.2.4	-4.9	Complies
Radiated Emissions 15.209, RSS-GEN 7.2.5	-4.6	Complies
Harmonic Emissions per 15.407, RSS-247	-12.5	Complies

Equipment Tested

Model: A04159

Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062

<u>Equipment</u>	<u>Model / PN</u>	<u>Serial Number</u>
EUT	A04159	3354564095
EUT2	A04159	3354564120
USB cable	320-01461-0x	N/A
USB cable	320-01462-0x	N/A
USB cable	320-01545-00	N/A
AC Adapter	320-00096-0x	N/A
DC Power Cable (CLA)	013-00970-00	N/A
DC Power Cable (CLA)	013-00971-00	N/A
Pass-thru Cable	320-01487-00	N/A
DC Power Cable (GTM-xx)	320-00683-xx	N/A
DC Power Cable (FMI-75)	010-12375-00	N/A
DC Power Cable (BC-30)	320-00092-xx	N/A
DC Power Supply	BK 1745	209C13
Laptop Computer	Latitude 7480	EFSPSN2
USB Printer	Dell 0N5819	5D1SL61

Test results in this report relate only to the items tested. Worst-case configuration data recorded in this report.

Software: 1.15, Antennas: 2.4 GHz PIFA (2 dBi), 5 GHz PIFA (5 dBi)

The software does not provide ability to change power as the manufacturer has it hard-coded in the device firmware. The manufacturer reported the following power level settings in the design.

- Modes 1-4 (BT and BLE) are +4dBm power setting
- Modes 5-7 (802.11 b/g/n) are all +18dBm power setting
- Modes 9-15 (U-N11) are +15dBm power setting

The design incorporates integral Inverted F antenna design antennas which are not user replaceable or serviceable. The manufacturer reported the antenna characteristics were 50 ohms impedance and antenna gains providing 2.0 dBi for 2.4 GHz and 5 dBi for 5 GHz transmitter. The design may operate one transmitter chain at a time and is not capable of simultaneous transmission on more than one port.

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: A04159
Test: 210308
Test to: 47CFR 15E, RSS-Gen RSS-247
File: A04159 NII TstRpt 210308

SN's: 3354564095 / 3354564120
FCC ID: IPH-04159
IC: 1792A-04159
Date: July 22, 2021
Page 8 of 100

The design offers wireless communication with compatible BT, BLE, 802.11b/g/n/a/ac devices. The modulation characteristics for these standards are defined in each related standard including the available bit and symbol rates.

The following 802.11 modulations are supported and were investigated during testing with worst-case documented in report.

- DSSS modulation at 1, 2, 5.5, or 11 Mbps
- OFDM modulation at 6, 9, 12, 18, 24, 36, 48, or 54 Mbps
- MCS indexes 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, and 32

Equipment Operational Modes

Mode	Transmitter Operation
1	BT BR (GFSK)
2	BT 2EDR ($\pi/4$ -DQPSK)
3	BT 3EDR (8DPSK)
4	BT BLE (GMSK)
5	802.11b
6	802.11g
7	802.11n
8	U-NII-1 802.11a
9	U-NII-1 802.11n
10	U-NII-1 802.11n40
11	U-NII-1 802.11ac80
12	U-NII-3 802.11a
13	U-NII-3 802.11n
14	U-NII-3 802.11n40
15	U-NII-3 802.11ac80

Equipment Function


The EUT is a GPS receiver and display unit providing GPS reception and graphical display of location, navigation, and other information for the user. The GPS design offers use as a hand-held, transportation mounted or portable configuration for use in navigational applications. The design incorporates transmitter circuitry operating in the 2402-2480, 5150-5250, and 5725-5850 MHz frequency bands. The design provides cabled interface capabilities as presented below and wireless communications with compatible equipment. The EUT operates from direct current power provided from internal battery system or external power. External power may be supplied from installation vehicle via DC power adapter, AC/DC power adapter, or compliant USB interface as documented in this and other relevant reports. The EUT was arranged as described by the manufacturer emulating typical user configurations for testing purposes. The EUT offers no other interface connections than those presented in configuration options below as described by the manufacturer. For testing purposes, the EUT received power from both internal and external power options and configurations. During testing, the test system was configured to operate in a manufacturer defined mode. As requested by the manufacturer the equipment was tested for emissions compliance using the available configurations with the worse-case data presented. Test results in this report relate only to the products described in this report.

Equipment Configuration

- 1) EUT operating on internal battery




- 2) EUT connected to (and powered by) AC adapter through USB cable

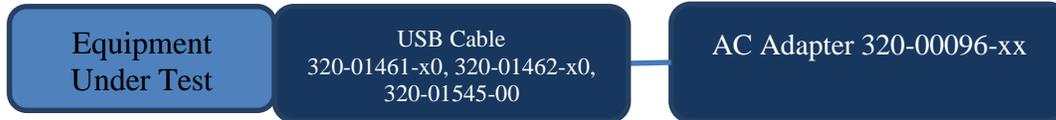


- 3) EUT connected to Computer USB port through cable assembly (GPN: 320-01545-00)



- 4) EUT connected to DC Through USB cable (320-01461-x0, 320-01462-x0) powered from CLA (013-00970-00)



- 5) EUT connected to DC through USB cable (320-01461-x0, 320-01462-x0) powered from CLA (013-00971-00)



- 6) EUT connected to DC through (320-01487-00) to (GTM-70; 320-00683-20, GTM-60; 320-00683-00)



- 7) EUT connected to DC through (320-01487-00) to FMI cable assembly (GPN: 010-12375-00)



- 8) EUT connected to DC through (320-01487-00) to BC30 cable assembly (GPN: 320-00092-xx)



Applicant Company information

Applicants Company	Garmin International, Inc.
Applicants Address	1200 East 151st Street, Olathe, KS 66062
FCC Identifier	IPH-04159
Industry Canada Identifier	1792A-04159
Manufacturer Company	Garmin International, Inc.
Manufacturer Address	1200 East 151st Street, Olathe, KS 66062

Equipment information

Hardware Version Identification Number (HVIN): The HVIN identifies hardware specifications of a product version. The HVIN replaces the ISED Model Number in the legacy E-filing System. An HVIN is required for all products for certification applications.	A04159
Host Marketing Name (HMN) (if applicable): The HMN is the name or model number of a final product, which contains a certified radio module.	
Brand Name	
Model Number	A04159
Test Rule Part(s)	47 CFR 15E, 15.407, RSS-247
Test Frequency Range	5.15-5.25 and 5.725-5.85 GHz
Project Number	210308
Submission Type	FCC: Certification, IC: Certification

Product Details

Items	Description
Product Type	Single chain 5 GHz U-NII-1, and U-NII-3
Radio Type	Transceiver
Power Type	Internal Rechargeable Battery or External AC or DC Supply
Frequency Range	5150-5250 MHz / 5725-5850 MHz
Channel Number	Channels 36, 38, 40, 42, 44, 48, 149, 151, 153, 155, 159, 165
Carrier Frequencies	Please refer to 802.11 Standard for Carrier Frequencies
Antenna	Integrated 5 dBi antenna PIFA
Communication Mode	Device provides 5 GHz, U-NII 1 and U-NII-3 operation
Beamforming Function	Without beamforming
Operating Mode	5150-5250 MHz (U-NII-1) and 5725-5825 MHz (U-NII-3)

Antenna and Bandwidth

Antenna	Number of TX chains		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	Single Chain	N/A	N/A
IEEE 802.11n	Single Chain	Single Chain	N/A
IEEE 802.11ac	N/A	N/A	Single Chain

Application for Certification

- (1) Manufacturer: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062
- (2) Identification: M/N: A04159
FCC ID: IPH-04159 IC: 1792A-04159
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from internal battery power or external direct current power provided from authorized sources. The EUT provides USB-C interface port for power and communications as presented in this filing.
- (9) Transition Provisions of 47 CFR 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. The required information has been provided in Operational Description Exhibit filed with the application.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

Applicable Standards & Test Procedures

The following information is submitted in accordance with e-CFR dated March 8, 2021, Part 2, Subpart J, Part 15, Subpart 15E, Industry Canada RSS-GEN Issue 5, and RSS-247 Issue 2. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013, KDB 789033 D02 General UNII Test Procedures New Rules v02r01, KDB 926956 v02, RSS-247 Issue 2, and RSS-GEN Issue 5.

Testing Procedures

Testing for the AC line-conducted emissions was performed as required in 47 CFR 15C, RSS-247 Issue 2 and specified in ANSI C63.10-2013. The test setup, including the EUT, was arranged in the test configurations as presented during testing. The test configuration was placed on a 1 x 1.5-meter bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50- μ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table. Refer to diagram one showing typical test arrangement and photographs in the test setup exhibit for EUT placement used during testing.

Radiated Emission Test Procedure

Radiated emissions testing was performed as required in 47 CFR 15C, RSS-247 Issue 2 and specified in ANSI C63.10-2013. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising, and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. The frequency spectrum from 9 kHz to 40,000 MHz was searched for emissions during preliminary investigation. Refer to diagrams two and three showing typical test setup. Refer to photographs in the test setup exhibit for specific EUT placement during testing.



NVLAP Lab Code 200087-0

Antenna Port Conducted Emission Test Procedure


The EUT was assembled as required for operation placed on a benchtop. This configuration provided the ability to connect test equipment to the provided test antenna port. Antenna Port conducted emissions testing was performed presented in the regulations and specified in ANSI C63.10-2013. Testing was completed on a laboratory bench in a shielded room. The active antenna port of the device was connected to appropriate attenuation and the spectrum analyzer. Refer to diagram three showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: A04159
Test: 210308
Test to: 47CFR 15E, RSS-Gen RSS-247
File: A04159 NII TstRpt 210308


SN's: 3354564095 / 3354564120
FCC ID: IPH-04159
IC: 1792A-04159
Date: July 22, 2021
Page 16 of 100

Diagram 1 Test arrangement for Conducted emissions

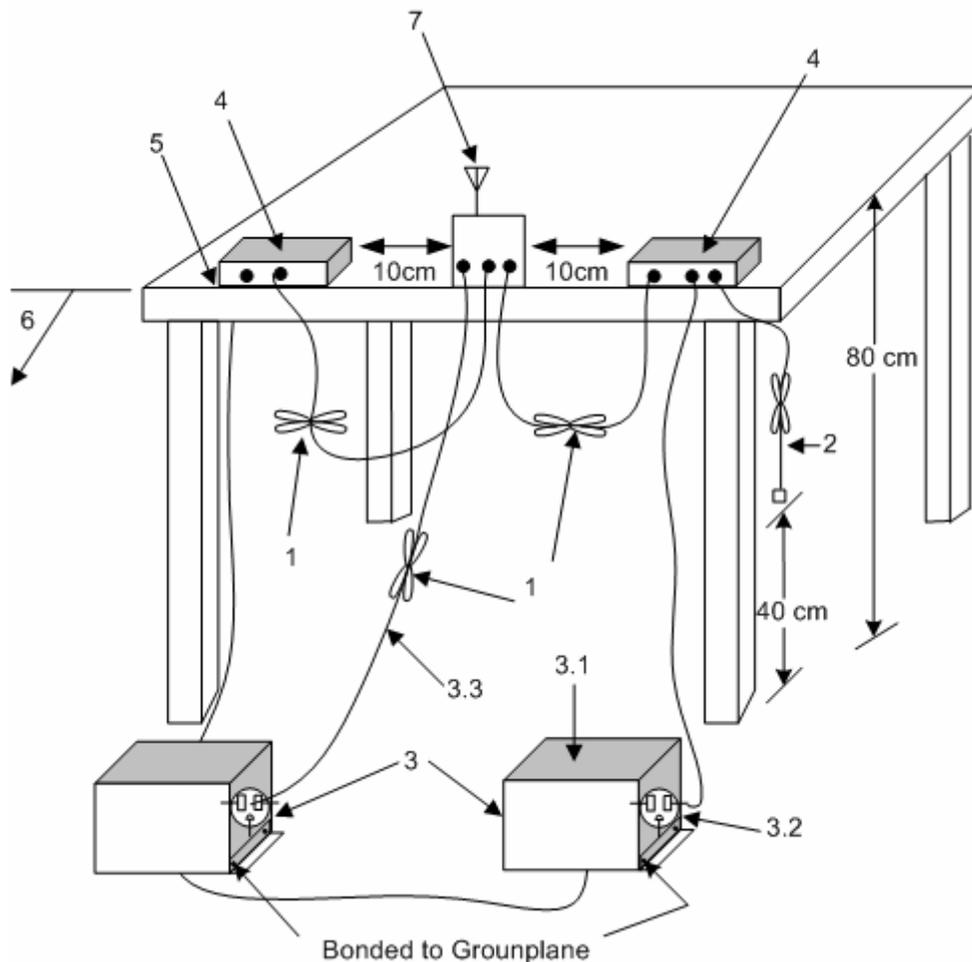

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long see (see 6.2.3.1).
2. I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.2).
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN can be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3).
 - 3.1 All other equipment powered from additional LISN(s).
 - 3.2 Multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3 LISN at least 80 cm from nearest part of EUT chassis.
4. Non-EUT components of EUT system being tested.
5. Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.2.3.1).
6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 6.2.2 for options).
7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test.

Diagram 2 Test arrangement for radiated emissions of tabletop equipment

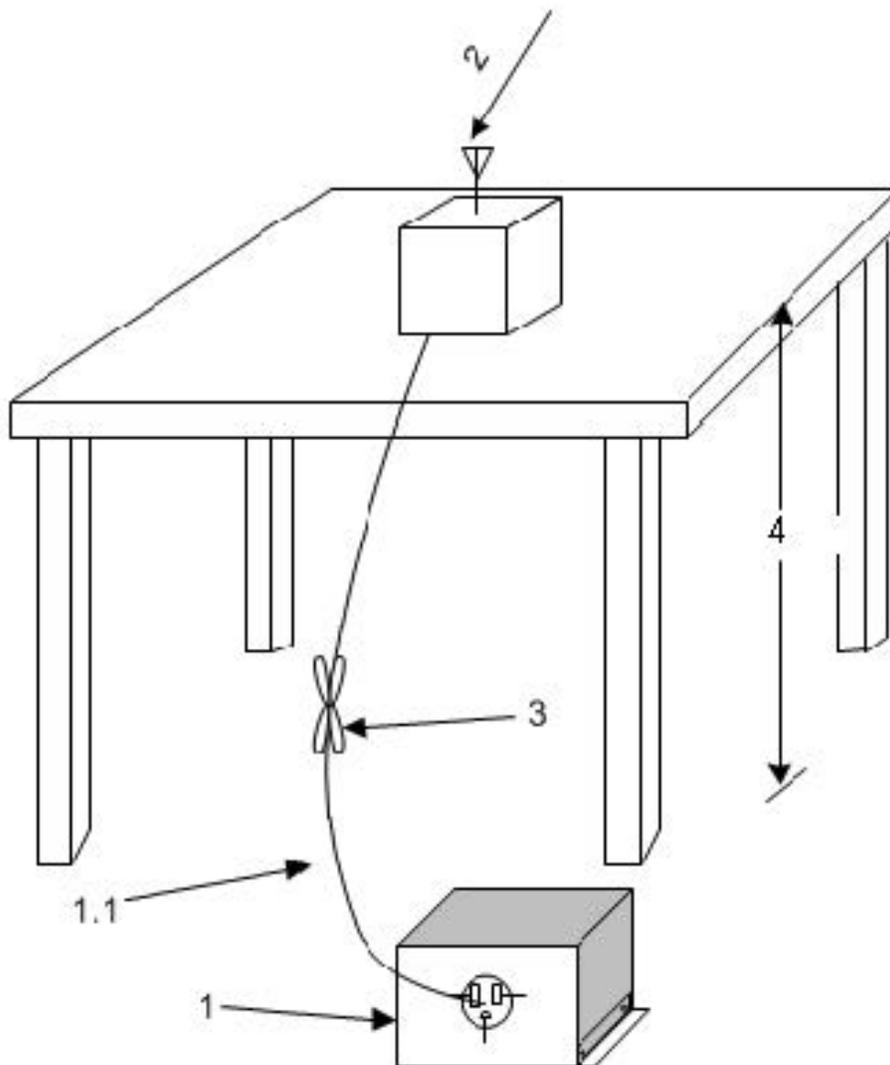

1—A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).


1.1—LISN spaced at least 80 cm from the nearest part of the EUT chassis.

2—Antenna can be integral or detachable, depending on the EUT (see 6.3.1).

3—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).


4—For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)

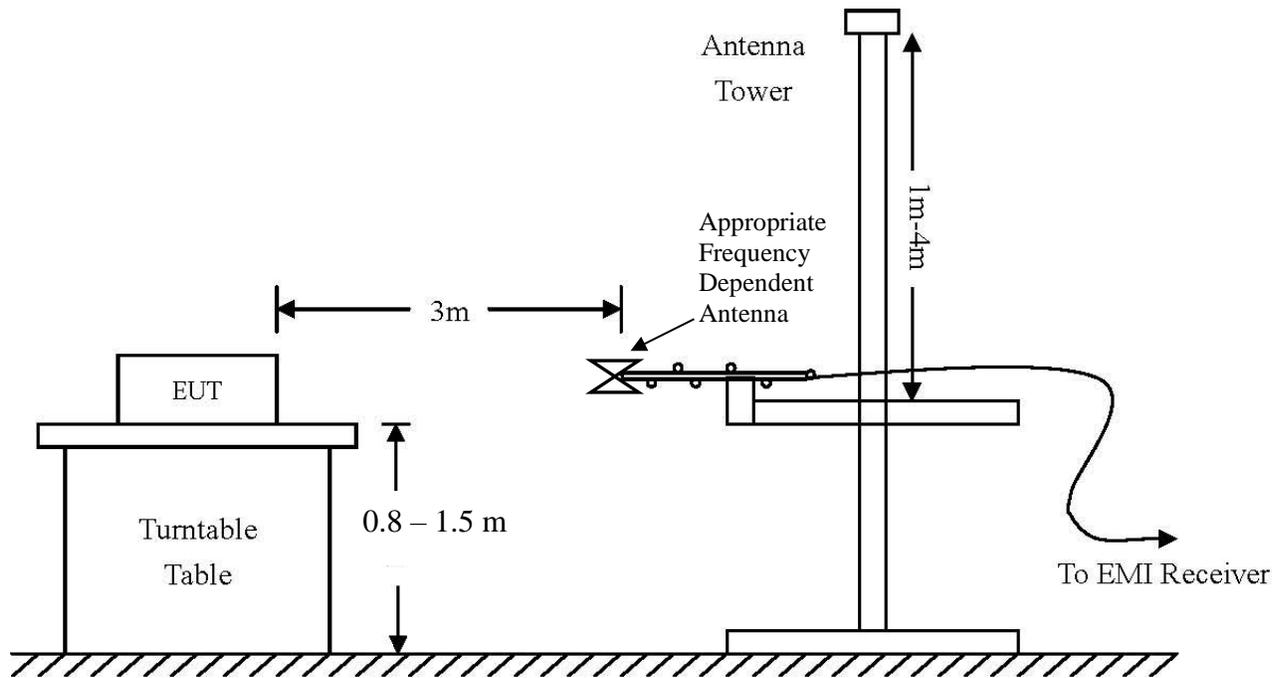

AC Line Conducted Emissions (0.150 -30 MHz)		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Emissions (30-1000 MHz)		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Emissions (Above 1000 MHz)		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

Diagram 4 Test arrangement for Antenna Port Conducted emissions

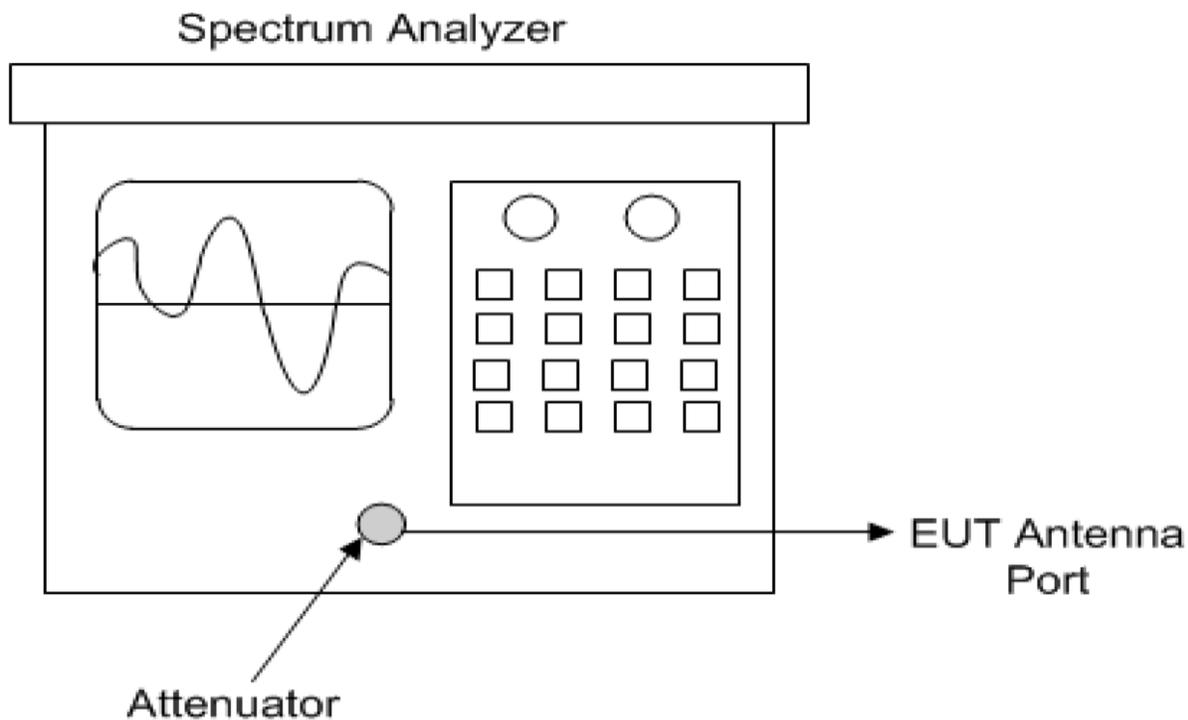

Test Site Locations

Conducted EMI AC line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 West 259th Terrace, Louisburg, KS

Antenna port Antenna port conducted emissions testing was performed in a shielded screen room located at Rogers Labs, Inc., 4405 West 259th Terrace, Louisburg, KS

Radiated EMI The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 West 259th Terrace, Louisburg, KS

Registered Site information: FCC Site: US5305, ISED: 3041A, CAB Identifier: US0096

NVLAP Accreditation Lab code 200087-0

Units of Measurements

Conducted EMI Data presented in dB μ V; dB referenced to one microvolt

Antenna port Conducted Data is in dBm; dB referenced to one milliwatt

Radiated EMI Data presented in dB μ V/m; dB referenced to one microvolt per meter

Note: Radiated limit may be expressed for measurement in dB μ V/m when the measurement is taken at a distance of 3 or 10 meters. Data taken for this report was taken at distance of 3 meters.

Sample calculation demonstrates corrected field strength reading for Open Area Test Site using the measurement reading and correcting for receive antenna factor, cable losses, and amplifier gains.

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Losses = attenuators/cable losses, Gain = amplification gains

RFS (dB μ V/m @ 3m) = FSM (dB μ V) + A.F. (dB/m) + Losses (dB) - Gain (dB)

Environmental Conditions

Ambient Temperature 22.8° C

Relative Humidity 38 %

Atmospheric Pressure 1030.2 mb

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with the 47 CFR Part 15C, RSS-Gen, and RSS-247 Issue 2, and RSS-GEN Issue 5 emission requirements.

There were no deviations to the specifications.

Intentional Radiators

The following information is submitted in support demonstration of compliance with the requirements of 47 CFR, Subpart C, paragraph 15.247 and Industry Canada RSS-247 and RSS-Gen the following information is submitted.

Antenna Requirements

The EUT incorporates integral antenna system and offers no provision for connection to alternate antenna system. The antenna connection point complies with the unique antenna connection requirements. There are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values consider the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Harmonic Radiated Emissions in Restricted Bands Data Mode 8 (802.11a)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
U-NII-1 Operation Worst-case							
5150.0	69.7	42.6	71.7	43.7	54.0	-11.4	-10.3
5350.0	54.7	41.0	54.0	40.1	54.0	-13.0	-13.9
15540.0	63.1	49.7	63.1	50.2	54.0	-4.3	-3.8
15600.0	62.5	49.3	62.9	49.9	54.0	-4.7	-4.1
15720.0	63.6	50.6	64.2	51.2	54.0	-3.4	-2.8
20720.0	65.9	52.1	65.2	52.5	54.0	-1.9	-1.5
20800.0	65.6	52.5	65.4	52.4	54.0	-1.5	-1.6
20960.0	65.4	52.8	66.0	52.7	54.0	-1.2	-1.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 2 Harmonic Radiated Emissions in Restricted Bands Data Mode 9 (802.11n)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
U-NII-1 Operation Worst-case							
5150.0	73.1	45.4	68.4	43.6	54.0	-8.6	-10.4
5350.0	55.7	41.6	53.8	40.1	54.0	-12.4	-13.9
15540.0	63.4	50.3	63.9	50.9	54.0	-3.7	-3.1
15600.0	63.0	49.8	63.3	50.3	54.0	-4.2	-3.7
15720.0	63.2	50.4	63.4	50.6	54.0	-3.6	-3.4
20720.0	66.3	52.6	65.3	52.5	54.0	-1.4	-1.5
20800.0	65.3	52.3	65.3	52.2	54.0	-1.7	-1.8
20960.0	66.0	52.7	65.4	52.6	54.0	-1.3	-1.4

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 3 Harmonic Radiated Emissions in Restricted Bands Data Mode 10 (802.11n40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
U-NII-1 Operation Worst-case							
5150.0	72.1	44.9	70.2	44.6	54.0	-9.1	-9.4
5350.0	54.2	39.4	54.0	39.7	54.0	-14.6	-14.3
15570.0	62.6	49.9	63.3	50.0	54.0	-4.1	-4.0
15690.0	62.7	49.5	63.6	49.6	54.0	-4.5	-4.4
20760.0	65.2	52.4	65.1	52.2	54.0	-1.6	-1.8
20920.0	65.2	52.2	65.4	52.1	54.0	-1.8	-1.9

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 4 Harmonic Radiated Emissions in Restricted Bands Data Mode 11 (802.11ac80)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
U-NII-1 Operation Worst-case							
5150.0	72.1	47.4	70.5	46.2	54.0	-6.6	-7.8
5350.0	53.1	39.0	52.4	38.9	54.0	-15.0	-15.1
15630.0	60.7	47.9	61.4	47.9	54.0	-6.1	-6.1
20840.0	65.4	52.0	65.9	51.9	54.0	-2.0	-2.1

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 5 Harmonic Radiated Emissions in Restricted Bands Data Mode 12 (802.11a)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
U-NII-3 Operation Worst-case							
11490.0	57.9	45.0	58.0	44.9	54.0	-9.0	-9.1
11570.0	58.2	44.9	57.8	44.9	54.0	-9.1	-9.1
11650.0	59.0	45.5	58.8	45.4	54.0	-8.5	-8.6
22980.0	65.5	52.8	65.5	52.8	54.0	-1.2	-1.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 6 Harmonic Radiated Emissions in Restricted Bands Data Mode 13 (802.11n)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
U-NII-3 Operation Worst-case							
11490.0	58.8	45.2	57.8	45.1	54.0	-8.8	-8.9
11570.0	59.1	45.3	58.6	45.1	54.0	-8.7	-8.9
11650.0	58.1	45.4	58.6	45.8	54.0	-8.6	-8.2
22980.0	66.1	52.7	65.2	52.6	54.0	-1.3	-1.4

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 7 Harmonic Radiated Emissions in Restricted Bands Data Mode 14 (802.11n40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
U-NII-3 Operation Worst-case							
11510.0	58.1	44.9	58.7	45.2	54.0	-9.1	-8.8
11590.0	58.4	45.6	58.3	45.2	54.0	-8.4	-8.8
23020.0	65.2	52.7	65.4	52.7	54.0	-1.3	-1.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 8 Harmonic Radiated Emissions in Restricted Bands Data Mode 15 (802.11ac80)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
U-NII-3 Operation Worst-case							
11550.0	57.6	45.1	58.9	45.4	54.0	-8.9	-8.6
23100.0	65.7	52.7	65.8	52.7	54.0	-1.3	-1.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the emissions requirements of 47 CFR 15.205, RSS-GEN Issue 5, and RSS-247 Issue 2. The EUT provided a worst-case minimum margin of -1.2 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

AC Line Conducted EMI Procedure

The EUT was arranged in typical equipment configurations as offered by manufacturer and presented above in equipment configuration. AC Line Conducted emission testing was performed with the EUT placed on a 1 x 1.5-meter bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. Testing for the AC line-conducted emissions followed the procedures of ANSI C63.10-2013. The EUT was configured as presented in the AC Line conducted configurations as directed by the manufacture and presented above in equipment configuration. The AC adapter for the EUT was connected to the LISN for AC line-conducted emissions testing. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the test configuration. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor, internal to the LISN. Power line conducted emissions testing was carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequencies of each of the emissions, which demonstrated the highest amplitudes. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz and data recorded.

Refer to figures 1 and 2 for plots of the EUT – AC Power Adapter configuration #2 AC Line conducted emissions. Refer to figures 3 and 4 for plots of the EUT – USB Computer interface configuration #3 AC Line conducted emissions.

Trace 1 - QUASI PEAK

Trace 2 - AVERAGE

Figure 1 AC Line Conducted emissions of EUT line 1 (EUT – AC Adapter)

Meas BW: 9 kHz	Filter Type: CISPR(6dB)	Meas Time: 1 s	Center Freq: 25.87 MHz
Attenuation: 10 dB	Preamp: On	Preselector: On	Filter Split: Off
Notch Filter 1: Off	Notch Filter 2: Off	Input: 2 DC	

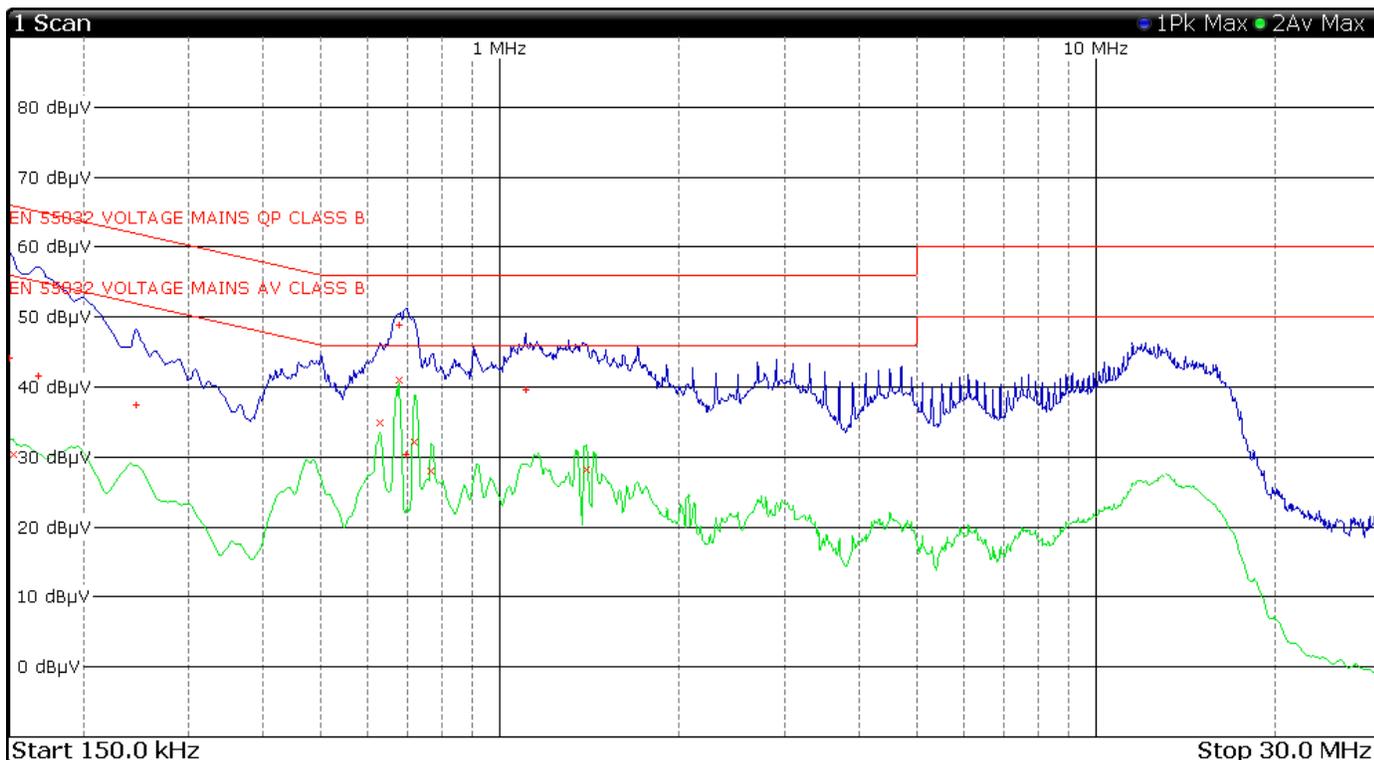


Figure 2 AC Line Conducted emissions of EUT line 2 (EUT – AC Adapter)

Meas BW: 9 kHz	Filter Type: CISPR(6dB)	Meas Time: 1 s	Center Freq: 25.87 MHz
Attenuation: 10 dB	Preamp: On	Preselector: On	Filter Split: Off
Notch Filter 1: Off	Notch Filter 2: Off	Input: 2 DC	

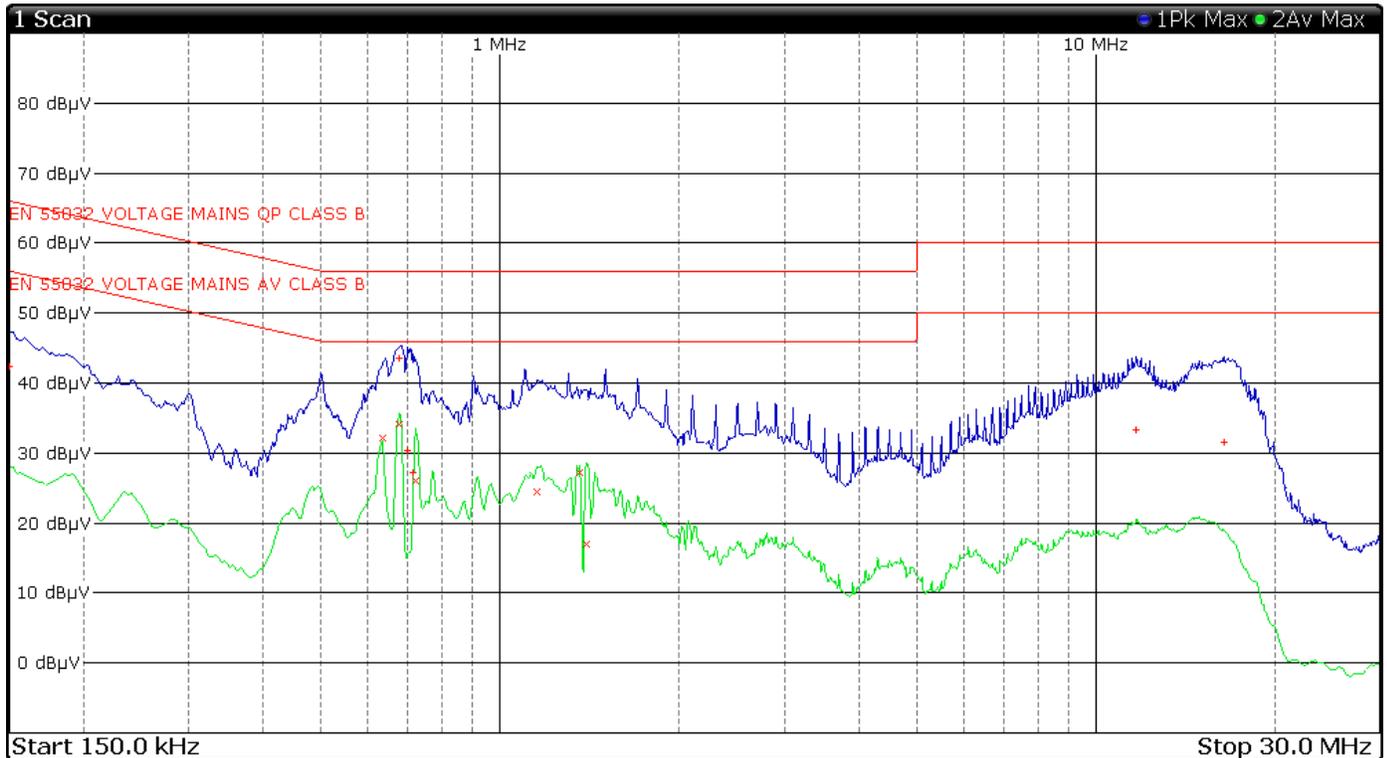


Figure 3 AC Line Conducted emissions of EUT line 1 (EUT – Computer)

Meas BW: 9 kHz	Filter Type: CISPR(6dB)	Meas Time: 1 s	Center Freq: 25.87 MHz
Attenuation: 10 dB	Preamplifier: On	Preselector: On	Filter Split: Off
Notch Filter 1: Off	Notch Filter 2: Off	Input: 2 DC	

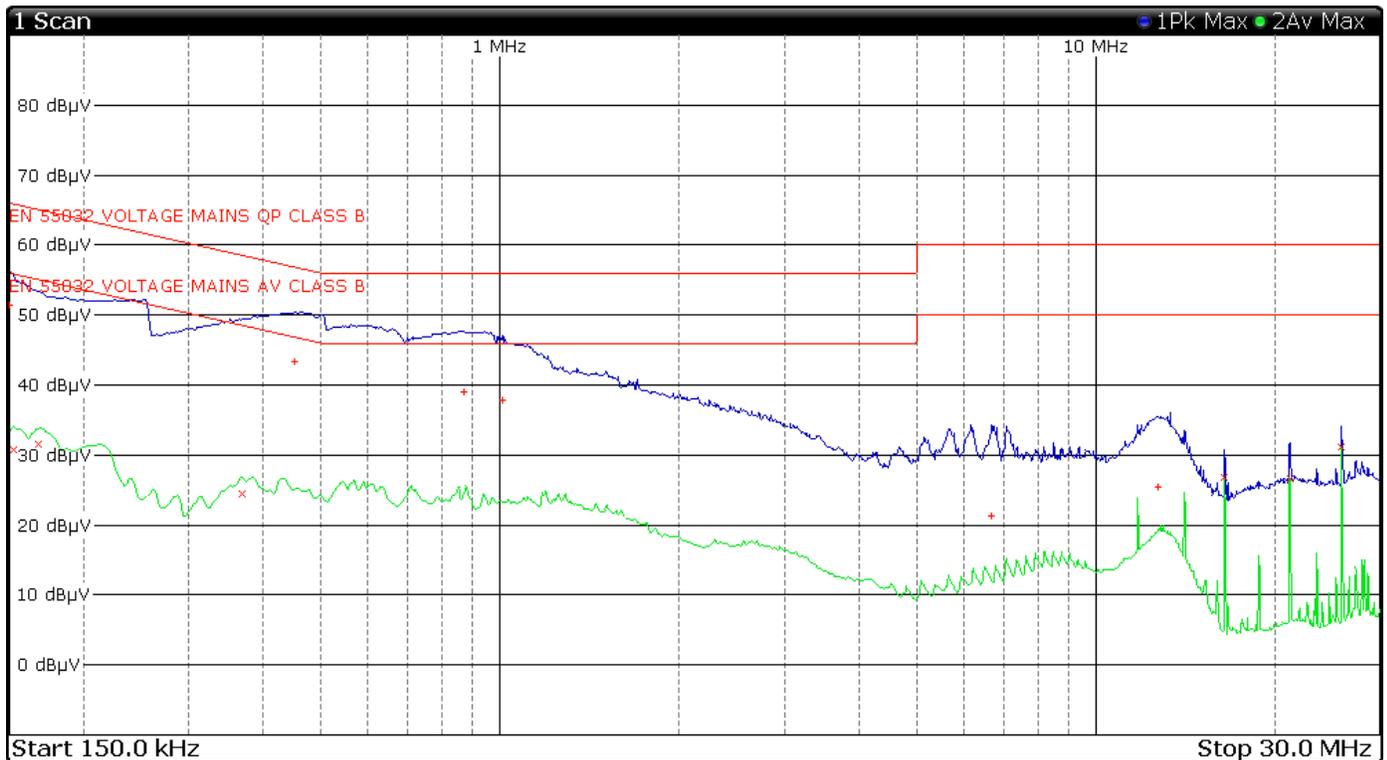


Figure 4 AC Line Conducted emissions of EUT line 2 (EUT – Computer)

Meas BW: 9 kHz	Filter Type: CISPR(6dB)	Meas Time: 1 s	Center Freq: 25.87 MHz
Attenuation: 10 dB	Preamp: On	Preselector: On	Filter Split: Off
Notch Filter 1: Off	Notch Filter 2: Off	Input: 2 DC	

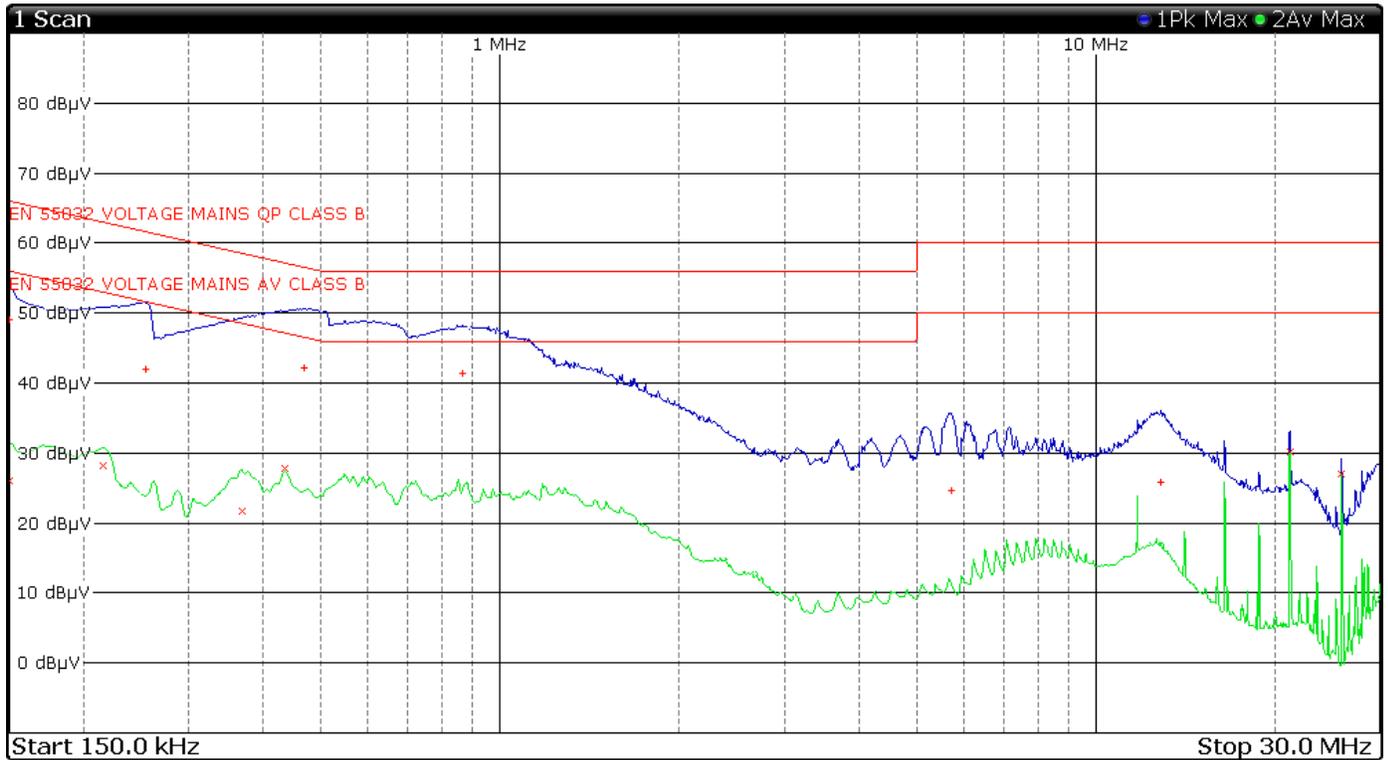


Table 9 AC Line Conducted Emissions Data L1 (EUT – AC Adapter)

Trace	Frequency	Level	Delta Limit
2	676.5 kHz	41.06 dBμV	-4.94 dBμV
1	678.8 kHz	48.89 dBμV	-7.11 dBμV
2	629.3 kHz	34.85 dBμV	-11.15 dBμV
2	719.3 kHz	32.21 dBμV	-13.79 dBμV
1	1.104 MHz	39.54 dBμV	-16.46 dBμV
2	1.397 MHz	28.2 dBμV	-17.8 dBμV
2	766.5 kHz	28.01 dBμV	-17.99 dBμV
1	150 kHz	44.18 dBμV	-21.82 dBμV
1	168 kHz	41.62 dBμV	-23.44 dBμV
1	244.5 kHz	37.38 dBμV	-24.56 dBμV
2	152.3 kHz	30.4 dBμV	-25.48 dBμV
1	696.8 kHz	30.36 dBμV	-25.64 dBμV

Other emissions present had amplitudes at least 20 dB below the limit.

Table 10 AC Line Conducted Emissions Data L2 (EUT – AC Adapter)

Trace	Frequency	Level	Delta Limit
2	678.8 kHz	34.14 dBμV	-11.86 dBμV
1	678.8 kHz	43.51 dBμV	-12.49 dBμV
2	633.8 kHz	32.1 dBμV	-13.9 dBμV
2	1.358 MHz	27.28 dBμV	-18.72 dBμV
2	721.5 kHz	26 dBμV	-20 dBμV
2	1.153 MHz	24.46 dBμV	-21.54 dBμV
1	150 kHz	42.39 dBμV	-23.61 dBμV
1	699 kHz	30.27 dBμV	-25.73 dBμV
1	11.71 MHz	33.21 dBμV	-26.79 dBμV
1	16.4 MHz	31.61 dBμV	-28.39 dBμV
1	714.8 kHz	27.27 dBμV	-28.73 dBμV
2	1.394 MHz	16.9 dBμV	-29.1 dBμV

Other emissions present had amplitudes at least 20 dB below the limit.

Table 11 AC Line Conducted Emissions Data L1 (EUT – Computer)

Trace	Frequency	Level	Delta Limit
1	451.5 kHz	43.43 dB μ V	-13.42 dB μ V
1	150 kHz	51.33 dB μ V	-14.67 dB μ V
1	867.8 kHz	38.97 dB μ V	-17.03 dB μ V
1	1.007 MHz	37.79 dB μ V	-18.21 dB μ V
2	25.87 MHz	31.1 dB μ V	-18.9 dB μ V
2	16.46 MHz	26.77 dB μ V	-23.23 dB μ V
2	21.17 MHz	26.67 dB μ V	-23.33 dB μ V
2	168 kHz	31.49 dB μ V	-23.57 dB μ V
2	368.3 kHz	24.43 dB μ V	-24.11 dB μ V
2	152.3 kHz	30.84 dB μ V	-25.04 dB μ V
1	12.75 MHz	25.53 dB μ V	-34.47 dB μ V
1	6.695 MHz	21.21 dB μ V	-38.79 dB μ V

Other emissions present had amplitudes at least 20 dB below the limit.

Table 12 AC Line Conducted Emissions Data L2 (EUT – Computer)

Trace	Frequency	Level	Delta Limit
1	469.5 kHz	42.14 dB μ V	-14.38 dB μ V
1	863.3 kHz	41.39 dB μ V	-14.61 dB μ V
1	150 kHz	49.05 dB μ V	-16.95 dB μ V
2	435.8 kHz	27.75 dB μ V	-19.39 dB μ V
1	253.5 kHz	41.98 dB μ V	-19.66 dB μ V
2	21.17 MHz	30.12 dB μ V	-19.88 dB μ V
2	25.87 MHz	26.93 dB μ V	-23.07 dB μ V
2	215.3 kHz	28.19 dB μ V	-24.81 dB μ V
2	368.3 kHz	21.67 dB μ V	-26.87 dB μ V
2	150 kHz	26.12 dB μ V	-29.88 dB μ V
1	12.88 MHz	25.84 dB μ V	-34.16 dB μ V
1	5.732 MHz	24.66 dB μ V	-35.34 dB μ V

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for AC Line Conducted Emissions

The EUT demonstrated compliance with the AC Line Conducted Emissions requirements of 47 CFR Part 15C, RSS-247 and RSS-Gen. The EUT – AC Adapter worst-case configuration demonstrated a minimum margin of -4.9 dB below the requirement. The EUT – computer worst-case configuration demonstrated a minimum margin of -13.4 dB below the requirement. Other emissions were present with amplitudes at least 20 dB below the limit and worst-case amplitudes recorded.

General Radiated Emissions Procedure

The EUT was arranged in a typical equipment configuration and operated through all available mode during testing. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS location before final radiated measurements were performed. Final data was taken with the EUT located on the OATS at 3 meters distance between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 60,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or double Ridge or pyramidal horns and mixers above 1 GHz, notch filters and appropriate amplifiers and external mixers were utilized.

Table 13 General Radiated Emissions Data

Frequency (MHz)	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
48.0	32.0	25.0	38.3	34.7	40.0	-15.0	-5.3
51.9	37.2	28.5	36.8	31.0	40.0	-11.5	-9.0
54.0	37.8	30.1	36.8	32.2	40.0	-9.9	-7.8
55.8	32.5	26.5	40.0	35.4	40.0	-13.5	-4.6
57.0	34.7	25.9	32.1	26.8	40.0	-14.1	-13.2
60.2	35.2	28.2	36.8	34.0	40.0	-11.8	-6.0
62.5	36.1	29.8	37.2	33.5	40.0	-10.2	-6.5
64.7	35.7	27.8	38.5	33.3	40.0	-12.2	-6.7
70.2	40.4	30.0	38.9	33.1	40.0	-10.0	-6.9
72.5	38.5	28.7	38.8	33.6	40.0	-11.3	-6.4
77.2	33.4	27.1	37.7	32.2	40.0	-12.9	-7.8
78.0	36.2	27.3	34.3	28.3	40.0	-12.7	-11.7
96.0	38.3	32.9	43.0	34.4	40.0	-7.1	-5.6
108.0	35.2	28.9	36.1	32.3	40.0	-11.1	-7.7
120.0	35.4	24.6	32.9	26.5	40.0	-15.4	-13.5
125.0	37.5	25.5	34.5	27.8	40.0	-14.5	-12.2
138.4	41.3	28.4	32.0	26.5	40.0	-11.6	-13.6
210.0	45.7	34.9	41.1	30.0	40.0	-5.1	-10.0
225.0	42.2	32.6	31.8	21.5	40.0	-7.4	-18.5
240.0	40.7	35.2	33.8	31.3	47.0	-11.8	-15.7
243.0	38.1	31.4	33.8	27.8	47.0	-15.6	-19.2
480.0	32.7	29.9	28.9	24.8	47.0	-17.1	-22.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of 47 CFR part 15 and Industry Canada RSS-247 Issue 2 Intentional Radiators. The EUT demonstrated a minimum margin of -4.6 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the 5150-5250 and 5725-5850 MHz Frequency U-NII-1 and U-NII-3 Bands

Testing followed FCC 789033 D02 General U-NII Test Procedures New Rules v02r01.

The manufacturer provided a second test sample which provided direct connection to the antenna port. A power meter was used to measure fundamental transmitter output power. A spectrum analyzer / receiver was used to produce plots and make other antenna port conducted measurements for compliance testing. Test software was provided to operate the transmitter. This software provided the ability to set test channel, operational mode, and modulation scheme. The antenna port was connected to coaxial cable with 50-ohm attenuator and receiver, spectrum analyzer, or power meter during testing. The design was also tested for radiated emissions using sample #1 representative of production equipment. Radiated emissions testing was performed on the Open Area Test Site (OATS) with the transmitter operating. The test sample was placed on a turntable elevated as required above the ground plane as required at a 3 meters distance from the FSM antenna located on the OATS for testing radiated emissions. The peak and quasi-peak amplitude of the frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of emissions above 1000 MHz were measured using a spectrum analyzer. Emissions data was recorded from the measurement results. Data presented reflects measurement result corrected to account for measurement system gains and losses. Plots were made of transmitter performance for reference and demonstration of compliance. In addition, all Manufacturers of U-NII devices are responsible for ensuring frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual. The manufacturer has attested the equipment operates within the required frequency spectrum under normal operational conditions. This report documents emissions governed under the U-NII-1 and U-NII-3 bands operating in the 5180-5240 and 5745-5825 MHz frequency bands.

47CFR 15.407 General Technical Requirements

(a) power limitations

(1) For the Band 5.15-5.25 GHz

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(11) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

(12) Power spectral density measurement. The maximum power spectral density is measured as either a conducted emission by direct connection of a calibrated test instrument to the equipment under test or a radiated measurement. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in all other bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (7) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (8) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (9) The provisions of §15.205 apply to intentional radiators operating under this section.
- (10) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.
- (e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.
- (f) Radio frequency devices operating under the provisions of this part are subject to the radio frequency radiation exposure requirements specified in §§1.1307(b), 1.1310, 2.1091, and 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment. Applications for equipment authorization of mobile or portable devices operating under this section must contain a statement

confirming compliance with these requirements. Technical information showing the basis for this statement must be submitted to the Commission upon request.

- (g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user’s manual.

RSS-247 Issue 2

6. Technical requirements for license-exempt local area network devices and digital transmission systems operating in the 5 GHz band


This section provides standards for License-Exempt Local Area Network (LE-LAN) devices operating in the bands 5150-5250 MHz, 5250-5350 MHz, 5470-5600 MHz, 5650-5725 MHz and 5725-5850 MHz and for DTS’s operating in the band 5725-5850 MHz that employ digital modulation technology but are not designed for LE-LAN operation.

Devices with occupied bandwidths which overlap different bands shall comply with all operational requirements for each band.

6.2.1 Frequency band 5150-5250 MHz

LE-LAN devices are restricted to indoor operation only in the band 5150-5250 MHz. However, original equipment manufacturer (OEM) devices, which are installed in vehicles by vehicles manufacturers, are permitted.


Figure 5 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 8 (802.11a)

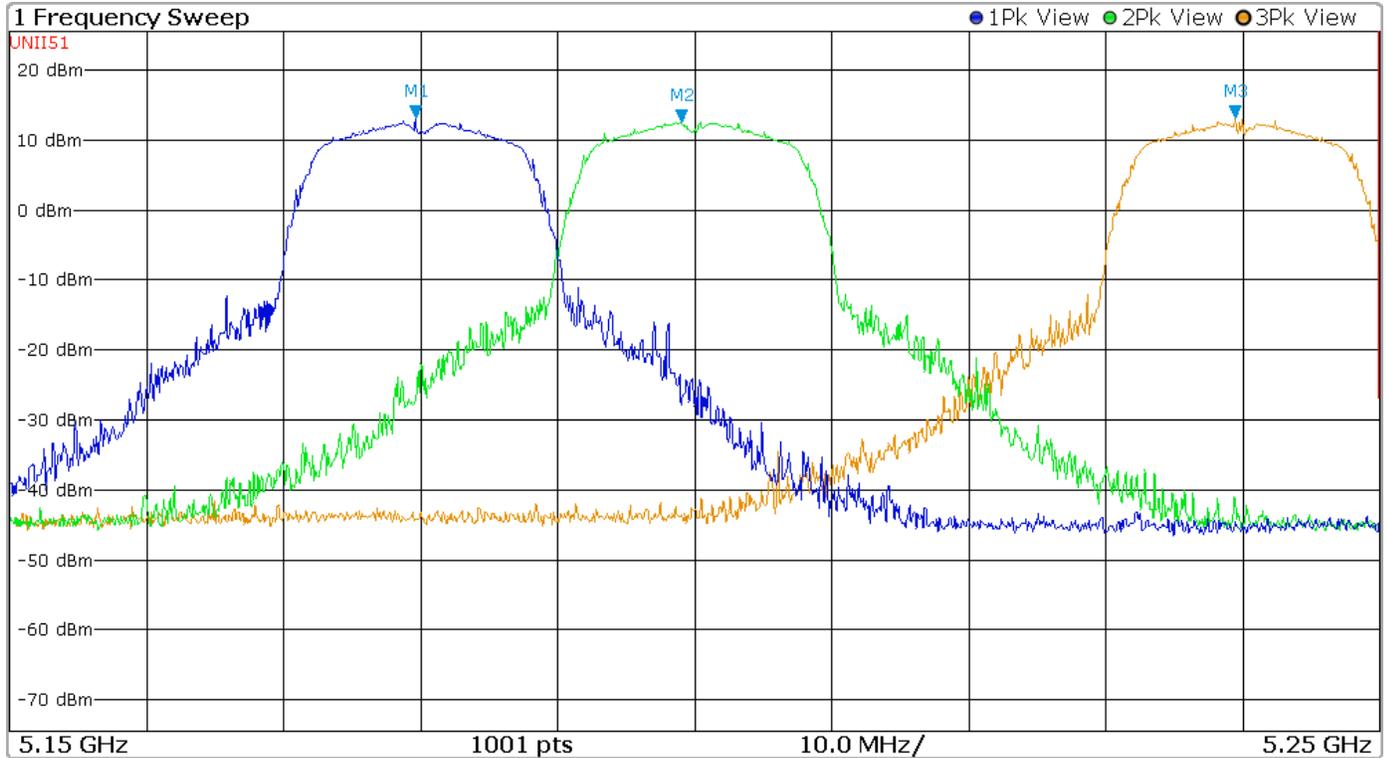

Center Freq: 5.2 GHz	Freq Offset: 0 Hz	Start: 5.15 GHz	Stop: 5.25 GHz
Span: 100 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 25 dBm	Level Offset: 0 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.18 GHz	13.1 dBm
M2		2	5.199 GHz	12.5 dBm
M3		3	5.239 GHz	13.1 dBm


Figure 6 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 9 (802.11n)

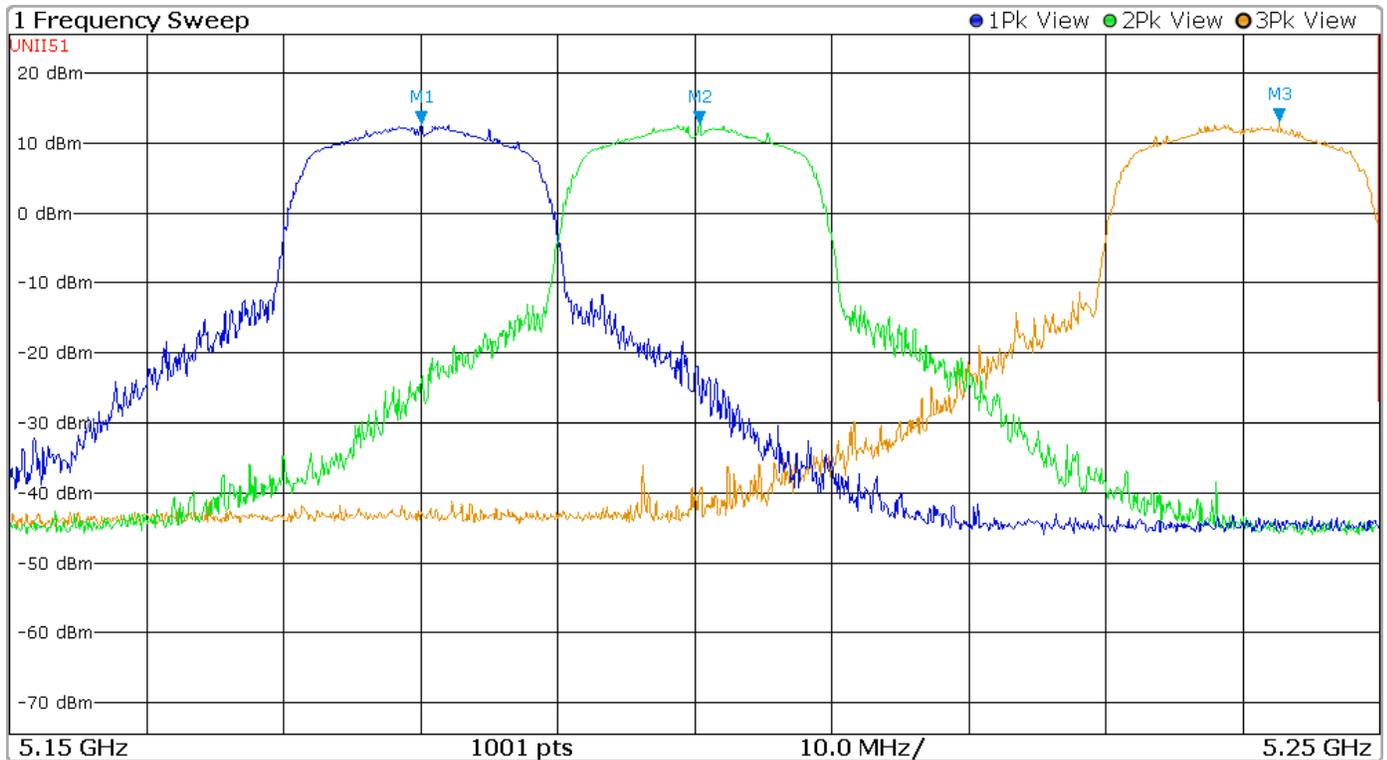

Center Freq: 5.2 GHz	Freq Offset: 0 Hz	Start: 5.15 GHz	Stop: 5.25 GHz
Span: 100 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 25 dBm	Level Offset: 0 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1	1		5.18 GHz	12.7 dBm
M2	2		5.2 GHz	12.7 dBm
M3	3		5.243 GHz	13.1 dBm


Figure 7 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 10 (802.11n40)

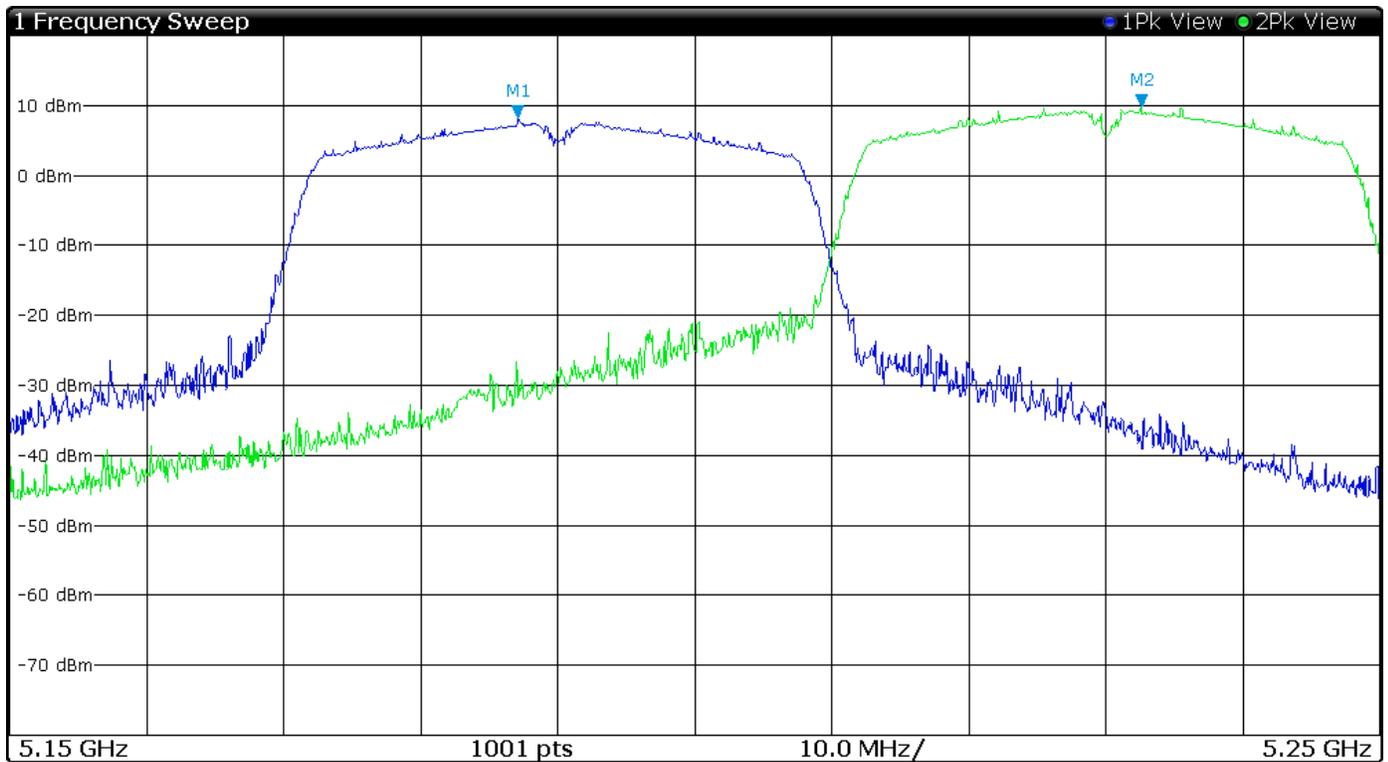

Center Freq: 5.2 GHz	Freq Offset: 0 Hz	Start: 5.15 GHz	Stop: 5.25 GHz
Span: 100 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.187 GHz	8.2 dBm
M2		2	5.233 GHz	9.7 dBm


Figure 8 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 11 (802.11ac80)

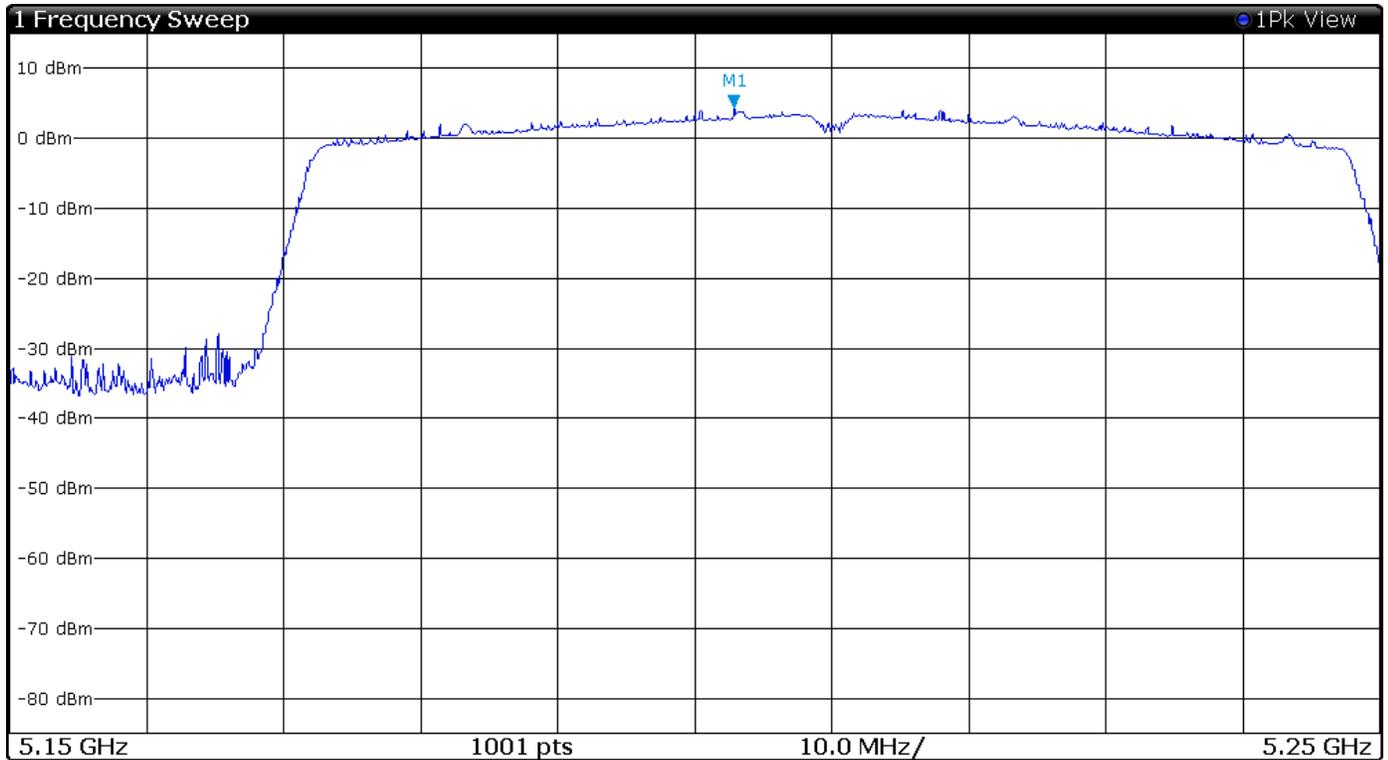

Center Freq: 5.2 GHz	Freq Offset: 0 Hz	Start: 5.15 GHz	Stop: 5.25 GHz
Span: 100 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 15 dBm	Level Offset: 0 dB	Rf Att: 15 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.203 GHz	4.4 dBm


Figure 9 Plot of Lower Band Edge Across 5150-5250 MHz Mode 8 (802.11a)

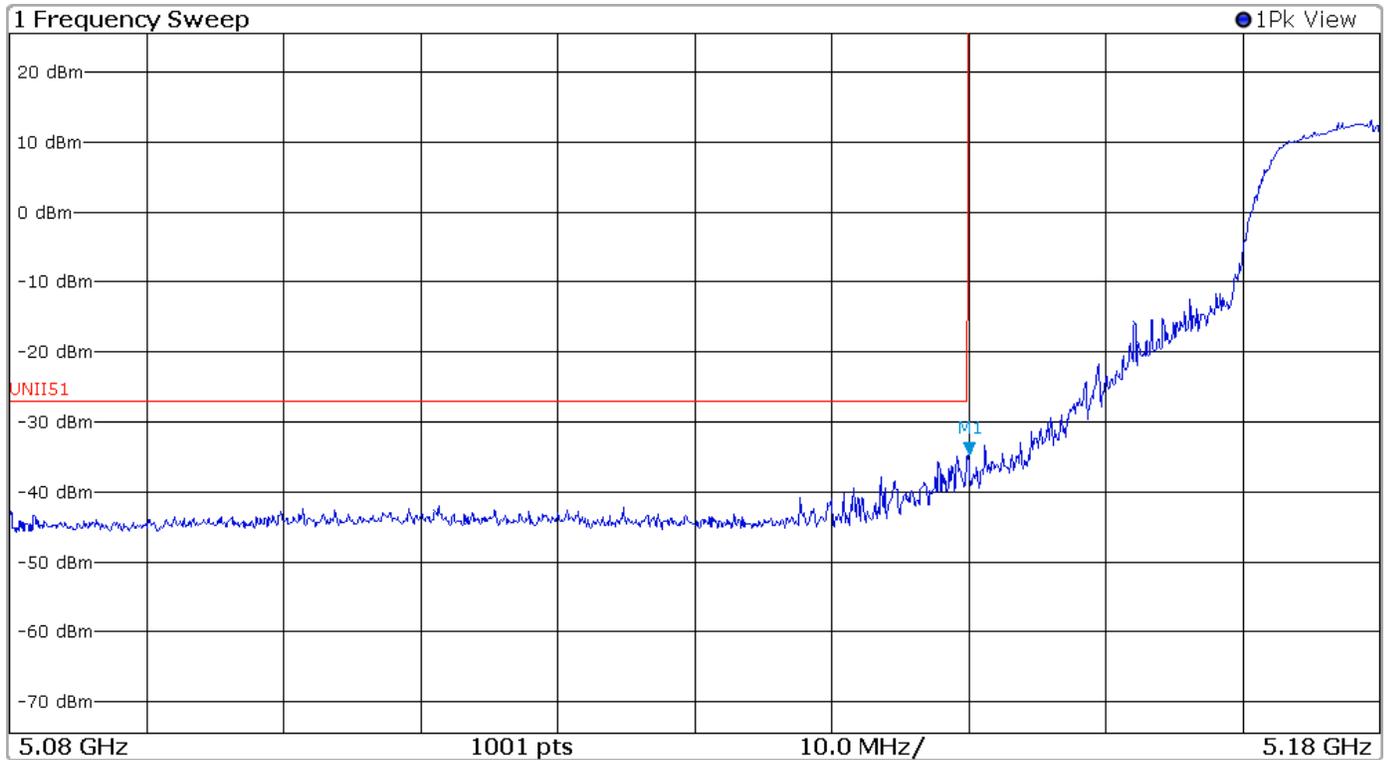

Center Freq: 5.13 GHz	Freq Offset: 0 Hz	Start: 5.08 GHz	Stop: 5.18 GHz
Span: 100 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 25.5 dBm	Level Offset: 0.5 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.15 GHz	-34.7 dBm


Figure 10 Plot of Lower Band Edge Across 5150-5250 MHz Mode 9 (802.11n)

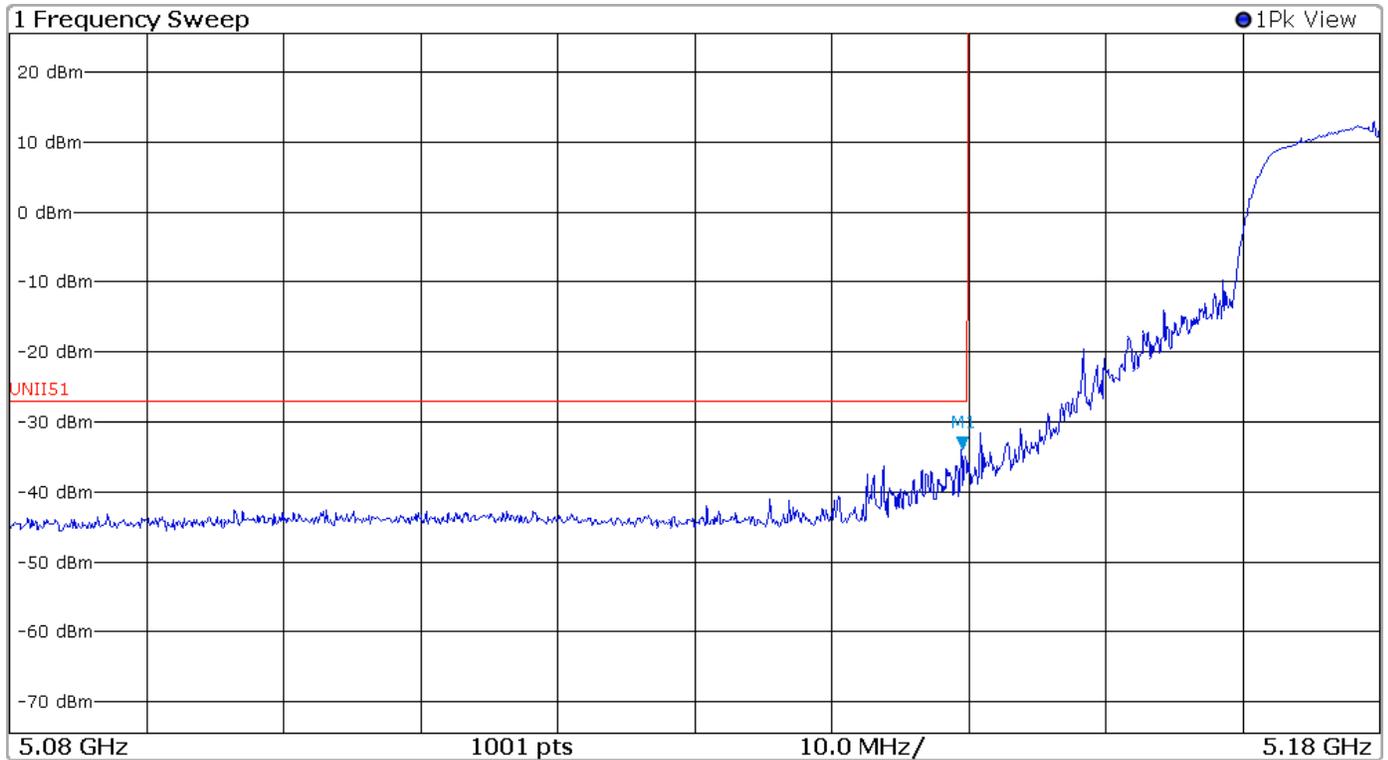

Center Freq: 5.13 GHz	Freq Offset: 0 Hz	Start: 5.08 GHz	Stop: 5.18 GHz
Span: 100 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 25.5 dBm	Level Offset: 0.5 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.149 GHz	-34 dBm


Figure 11 Plot of Lower Band Edge Across 5150-5250 MHz Mode 10 (802.11n40)

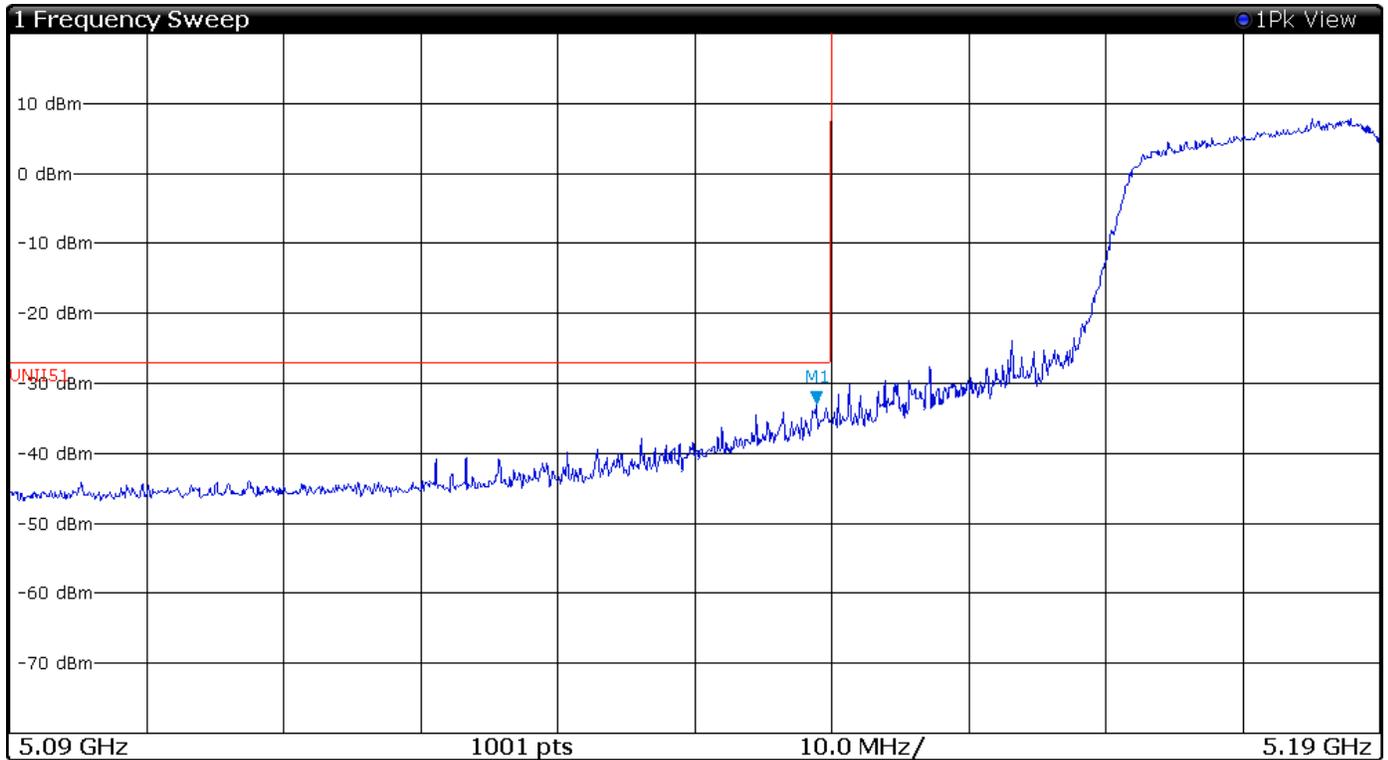

Center Freq: 5.14 GHz	Freq Offset: 0 Hz	Start: 5.09 GHz	Stop: 5.19 GHz
Span: 100 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.149 GHz	-33 dBm


Figure 12 Plot of Lower Band Edge Across 5150-5250 MHz Mode 11 (802.11ac80)

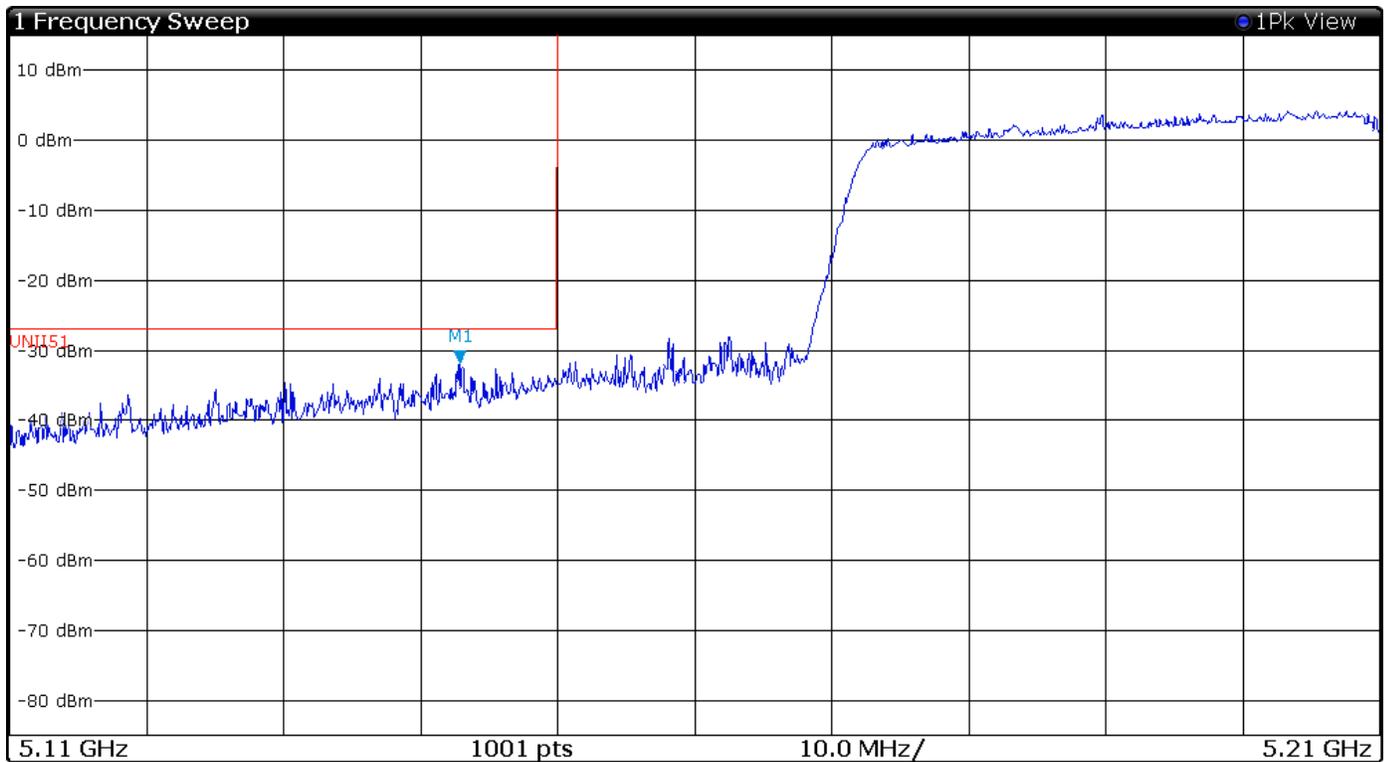

Center Freq: 5.16 GHz	Freq Offset: 0 Hz	Start: 5.11 GHz	Stop: 5.21 GHz
Span: 100 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 15 dBm	Level Offset: 0 dB	Rf Att: 15 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.143 GHz	-31.8 dBm


Figure 13 Plot of Upper Band Edge Across 5150-5250 MHz Mode 8 (802.11a)

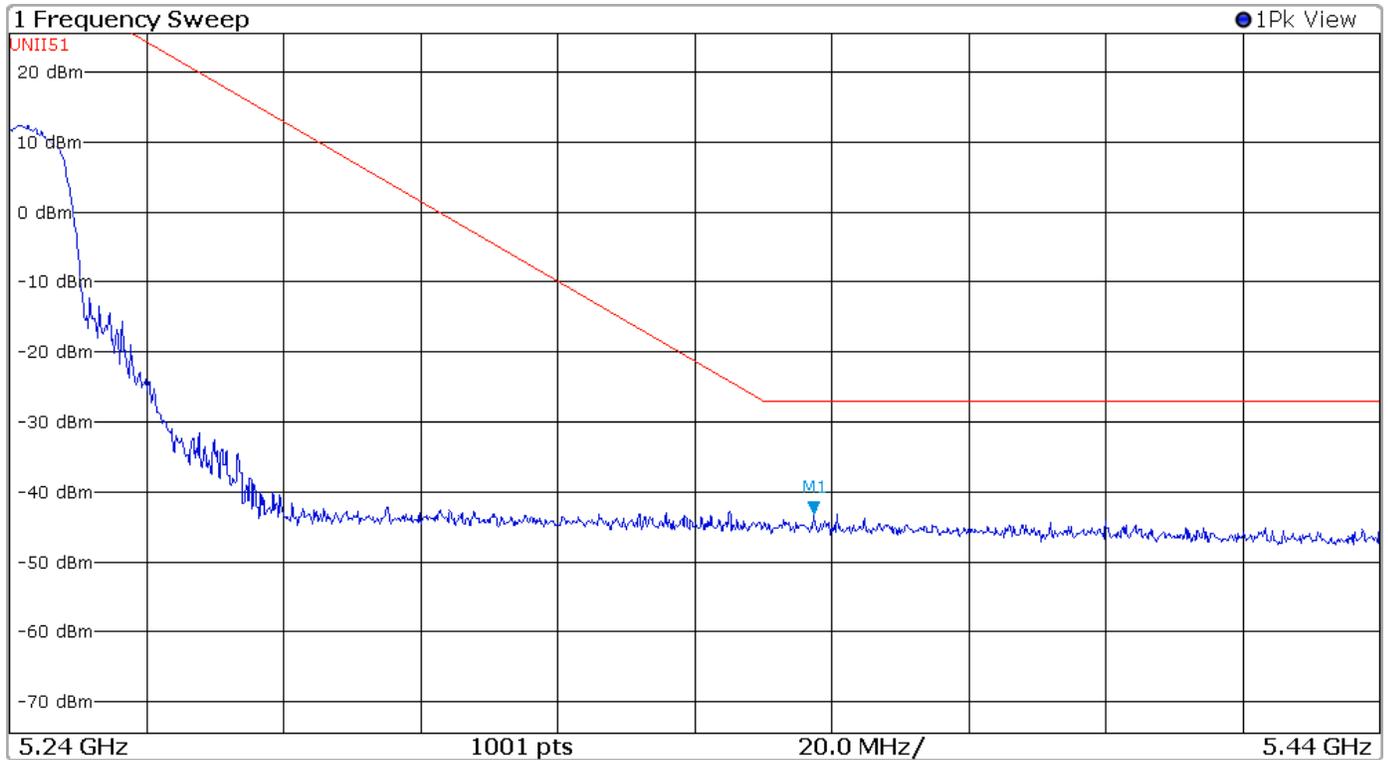

Center Freq: 5.34 GHz	Freq Offset: 0 Hz	Start: 5.24 GHz	Stop: 5.44 GHz
Span: 200 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 25.5 dBm	Level Offset: 0.5 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.357 GHz	-43.3 dBm


Figure 14 Plot of Upper Band Edge Across 5150-5250 MHz Mode 9 (802.11n)

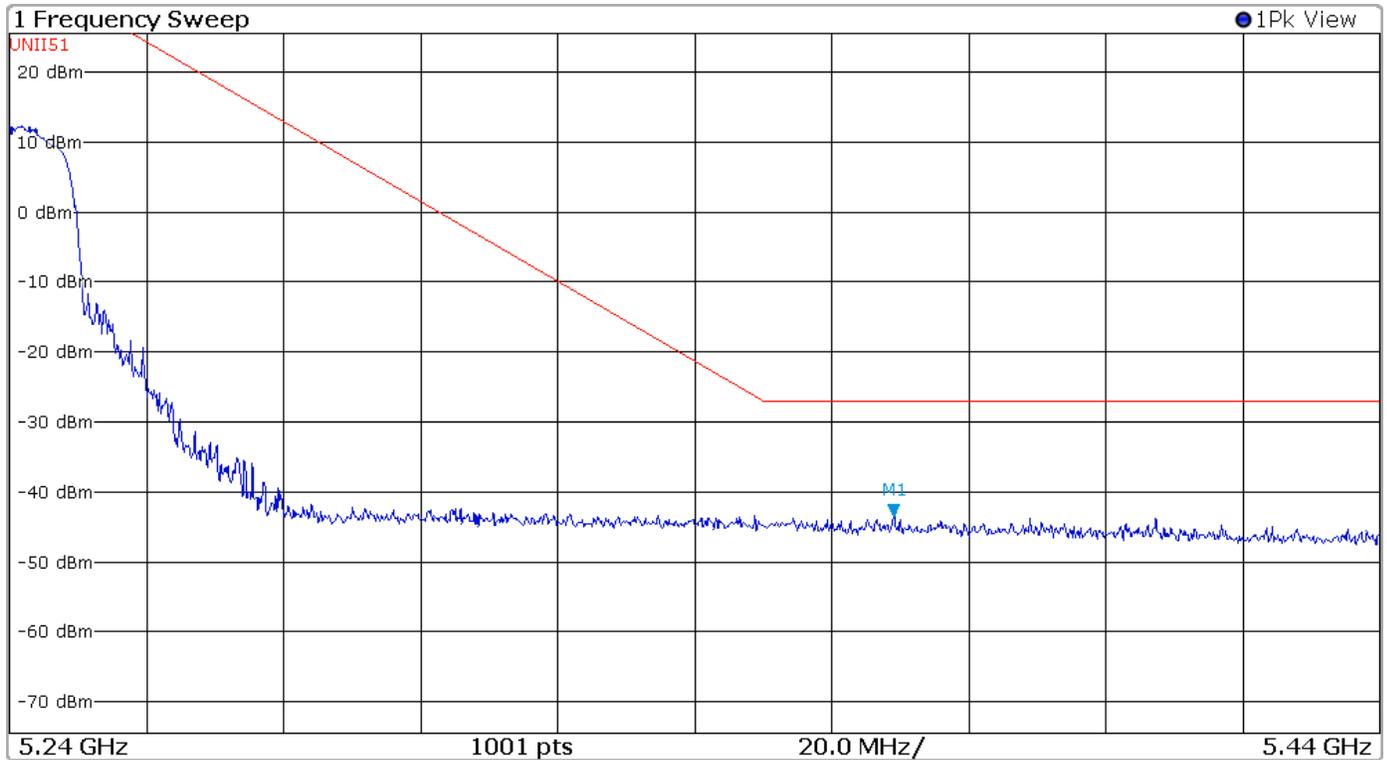

Center Freq: 5.34 GHz	Freq Offset: 0 Hz	Start: 5.24 GHz	Stop: 5.44 GHz
Span: 200 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 25.5 dBm	Level Offset: 0.5 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.369 GHz	-43.7 dBm


Figure 15 Plot of Upper Band Edge Across 5150-5250 MHz Mode 10 (802.11n40)

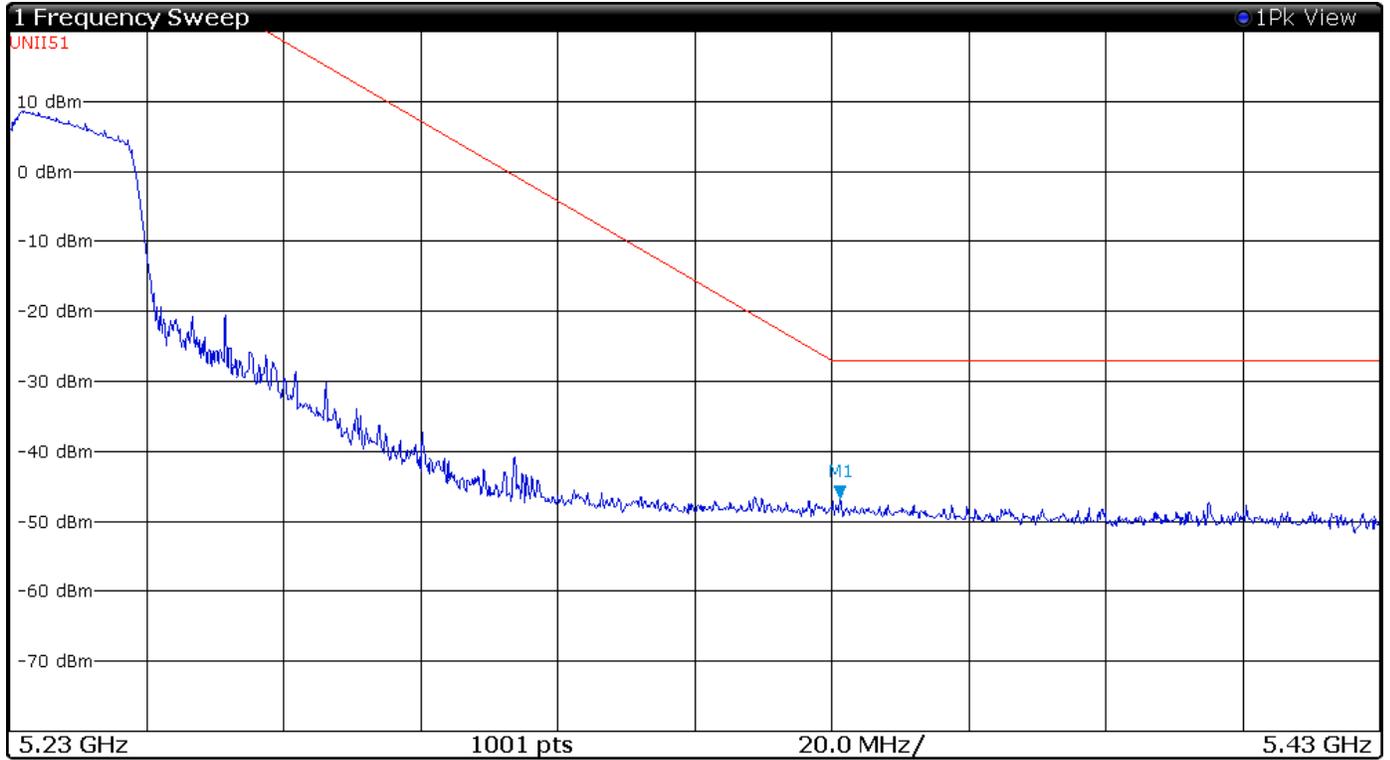

Center Freq: 5.33 GHz	Freq Offset: 0 Hz	Start: 5.23 GHz	Stop: 5.43 GHz
Span: 200 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.351 GHz	-46.7 dBm


Figure 16 Plot of Upper Band Edge Across 5150-5250 MHz Mode 11 (802.11ac80)

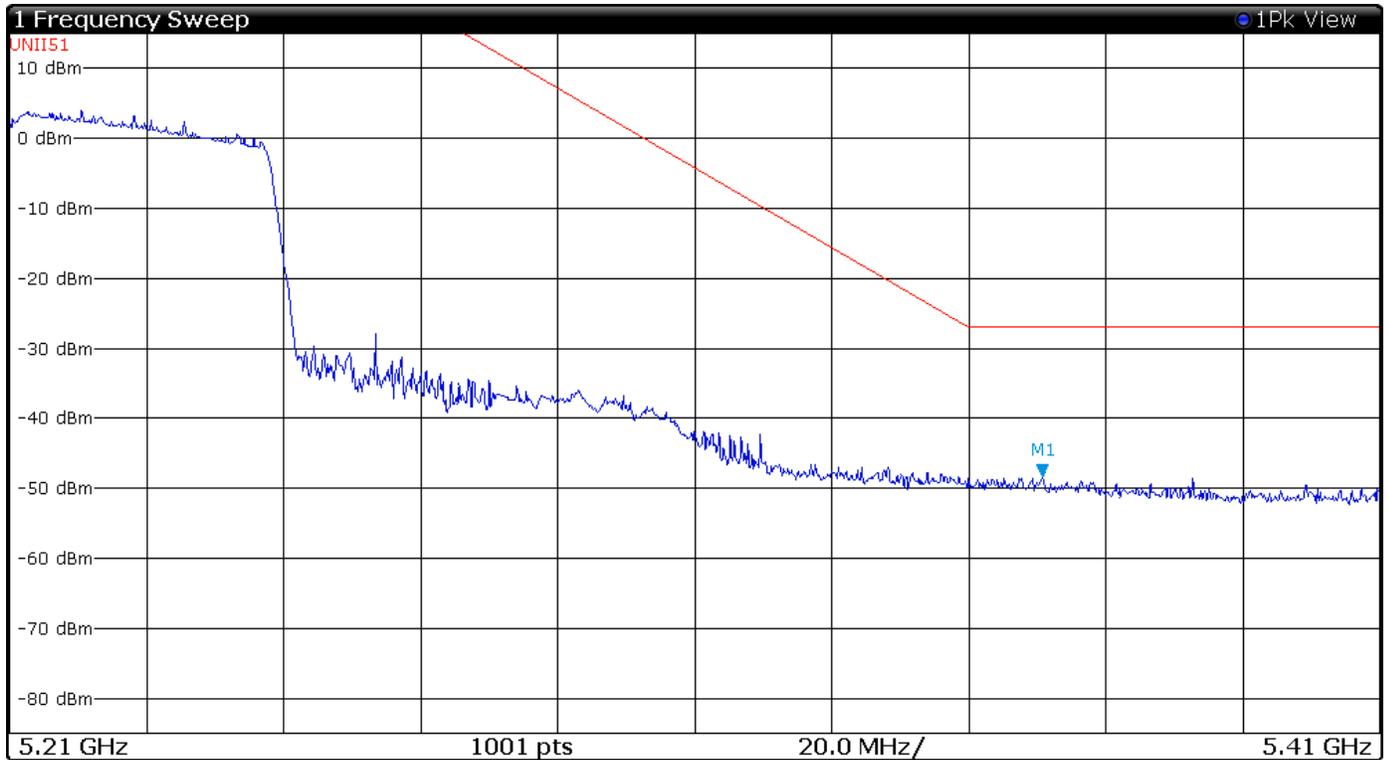

Center Freq: 5.31 GHz	Freq Offset: 0 Hz	Start: 5.21 GHz	Stop: 5.41 GHz
Span: 200 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 15 dBm	Level Offset: 0 dB	Rf Att: 15 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.361 GHz	-48.4 dBm


Figure 17 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 8 (802.11a)

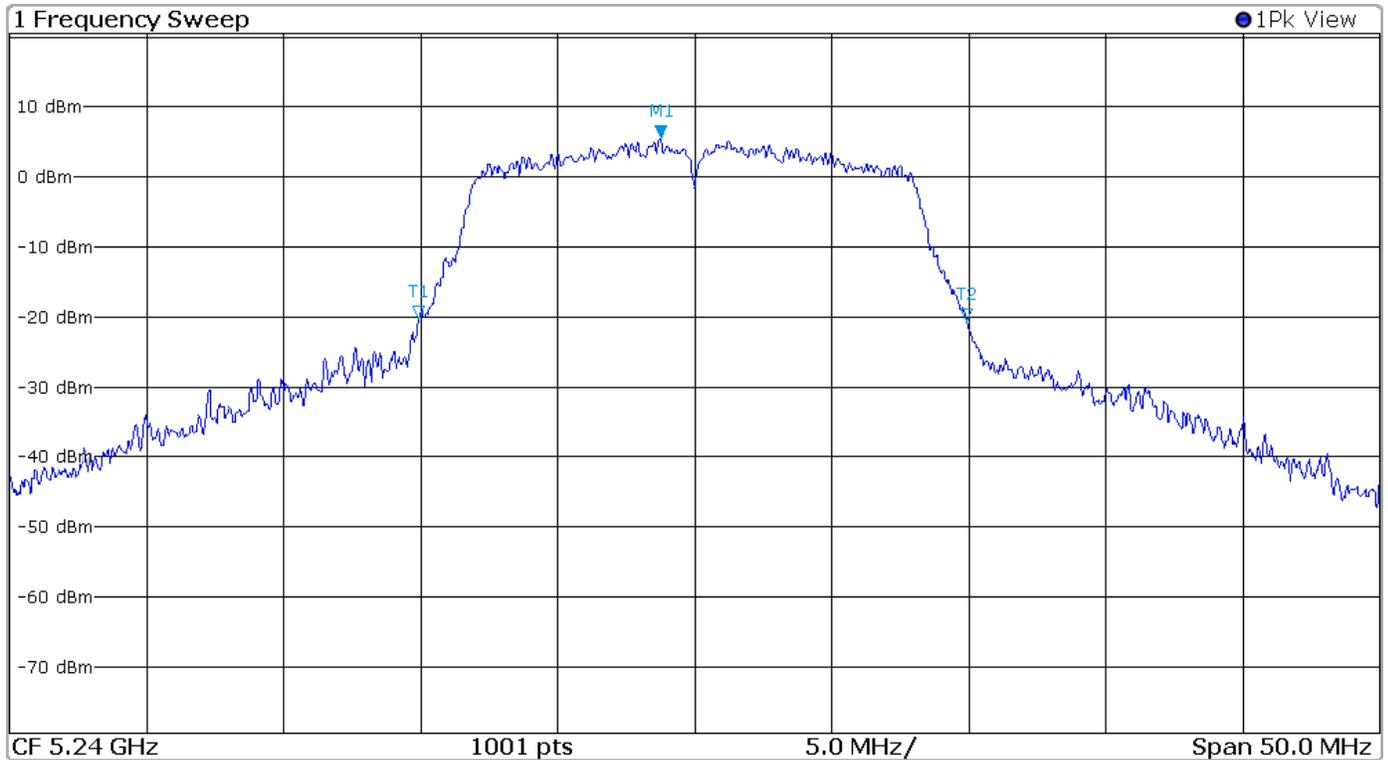

Center Freq: 5.24 GHz	Freq Offset: 0 Hz	Start: 5.215 GHz	Stop: 5.265 GHz
Span: 50 MHz	RBW: 200 kHz	Filter Type: Normal(3dB)	VBW: 1 MHz
SWT: 1.02 ms	Ref Level: 20.5 dBm	Level Offset: 0.5 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1		5.239 GHz	5.5 dBm	ndB	26 dB
T1	1		5.23 GHz	-20.3 dBm	ndB down BW	20.03 MHz
T2	1		5.25 GHz	-20.7 dBm	Q Factor	261.5


Figure 18 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 9 (802.11n)

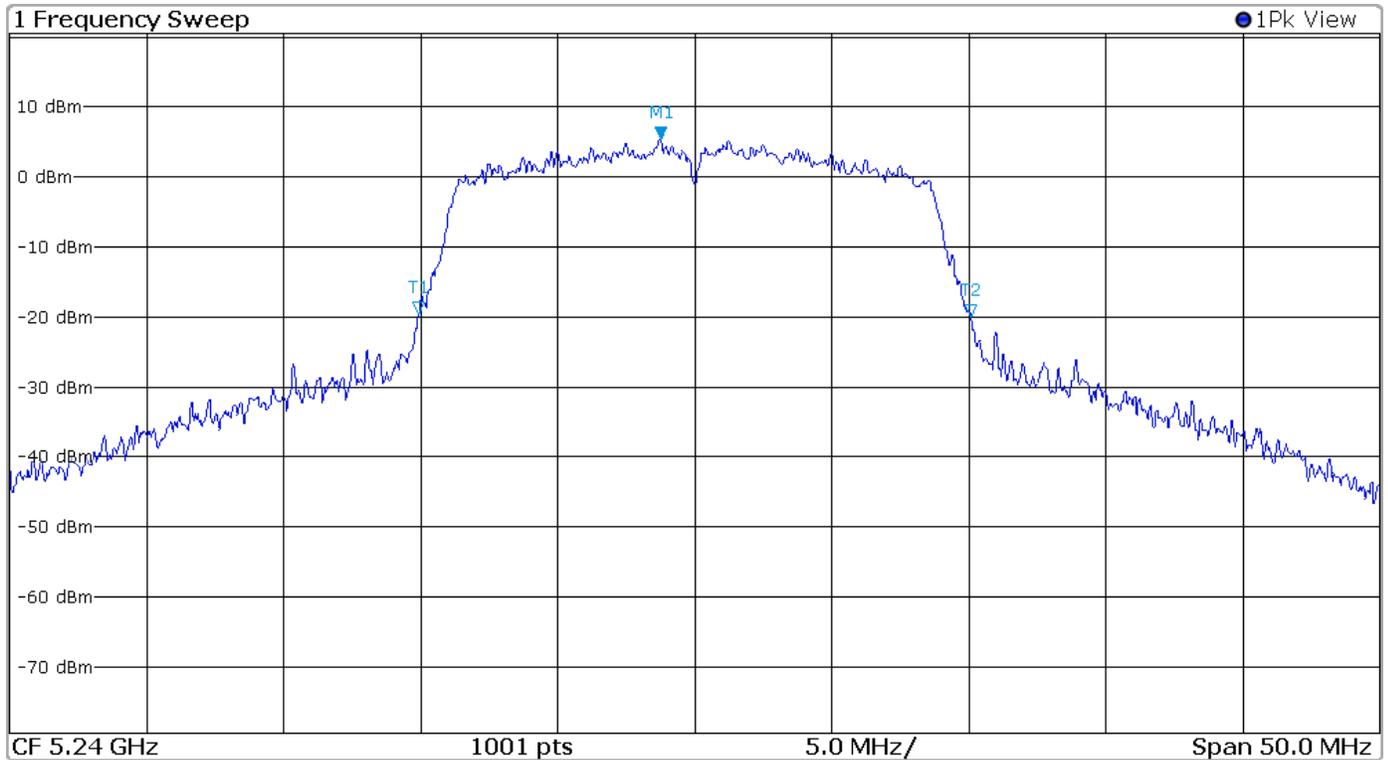

Center Freq: 5.24 GHz	Freq Offset: 0 Hz	Start: 5.215 GHz	Stop: 5.265 GHz
Span: 50 MHz	RBW: 200 kHz	Filter Type: Normal(3dB)	VBW: 1 MHz
SWT: 1.02 ms	Ref Level: 20.5 dBm	Level Offset: 0.5 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1		5.239 GHz	5.4 dBm	ndB	26 dB
T1	1		5.23 GHz	-19.6 dBm	ndB down BW	20.18 MHz
T2	1		5.25 GHz	-20.1 dBm	Q Factor	259.6


Figure 19 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 10 (802.11n40)

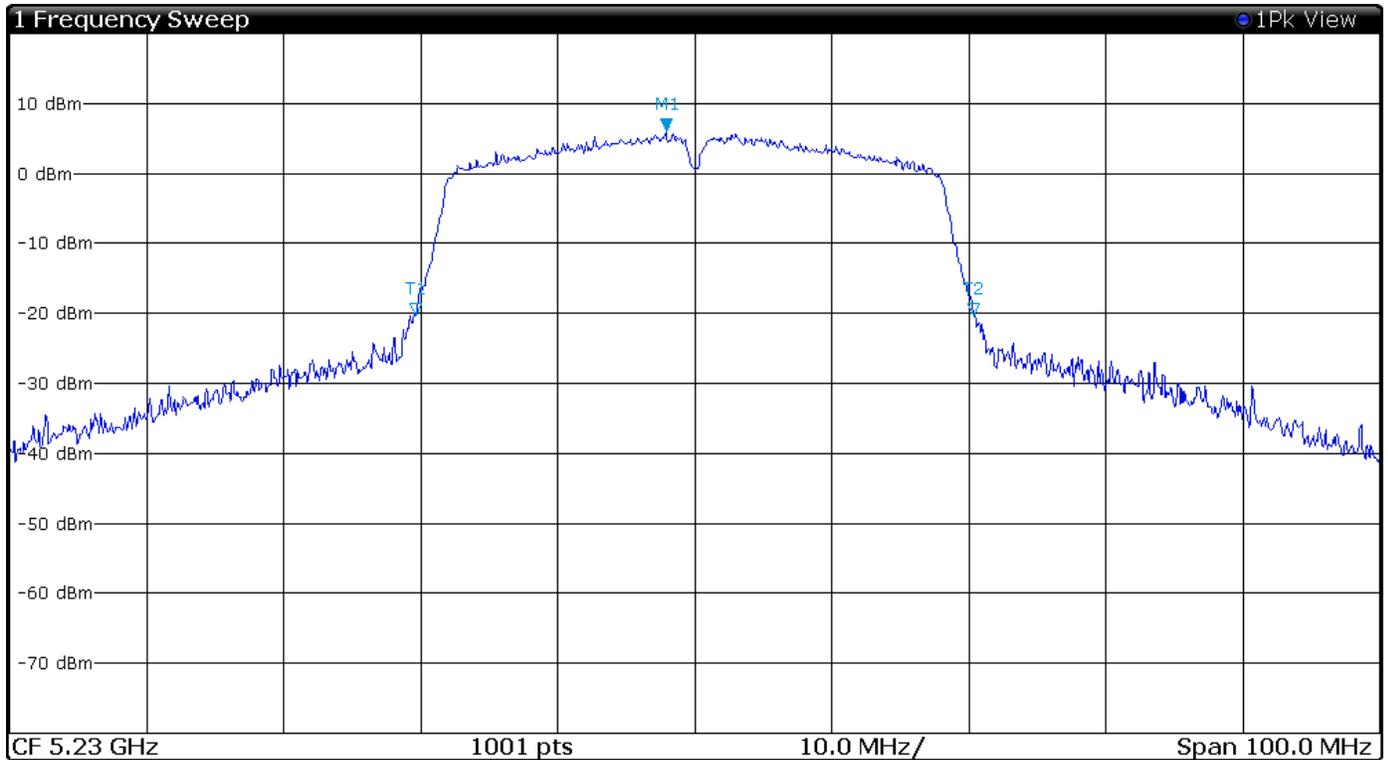

Center Freq: 5.23 GHz	Freq Offset: 0 Hz	Start: 5.18 GHz	Stop: 5.28 GHz
Span: 100 MHz	RBW: 500 kHz	Filter Type: Normal(3dB)	VBW: 2 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1		5.228 GHz	6 dBm	ndB	26 dB
T1	1		5.21 GHz	-20.3 dBm	ndB down BW	40.76 MHz
T2	1		5.25 GHz	-20.3 dBm	Q Factor	128.3


Figure 20 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 11 (802.11ac80)

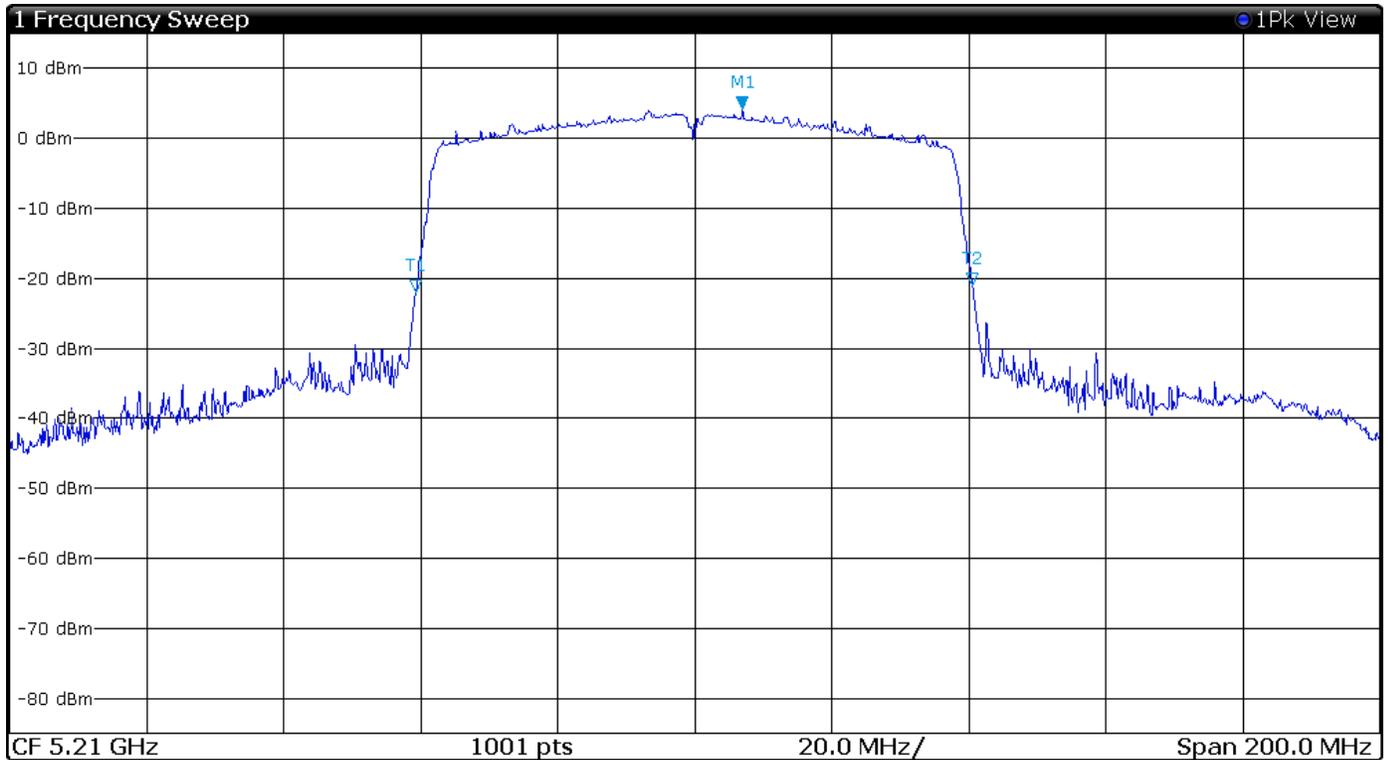

Center Freq: 5.21 GHz	Freq Offset: 0 Hz	Start: 5.11 GHz	Stop: 5.31 GHz
Span: 200 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 15 dBm	Level Offset: 0 dB	Rf Att: 15 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1		5.217 GHz	4.2 dBm	ndB	26 dB
T1	1		5.169 GHz	-22 dBm	ndB down BW	81.32 MHz
T2	1		5.251 GHz	-21 dBm	Q Factor	64.2


Figure 21 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 8 (802.11a)

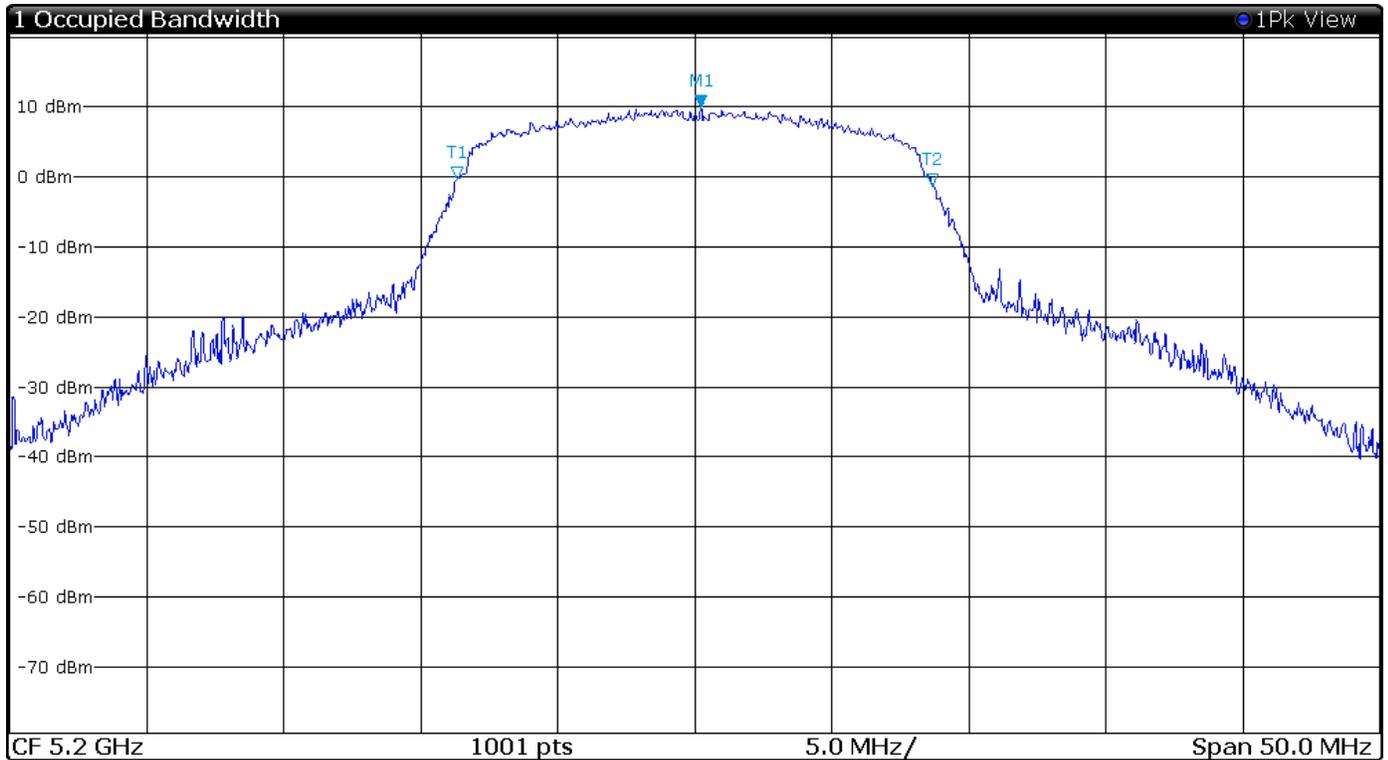

Center Freq: 5.2 GHz	Freq Offset: 0 Hz	Start: 5.175 GHz	Stop: 5.225 GHz
Span: 50 MHz	RBW: 500 kHz	Filter Type: Normal(3dB)	VBW: 2 MHz
SWT: 1.01 ms	Ref Level: 20.5 dBm	Level Offset: 0.5 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1		5.2 GHz	9.8 dBm	Occ Bw	17.35 MHz
T1	1		5.191 GHz	-0.4 dBm	Occ Bw Centroid	5.2 GHz
T2	1		5.209 GHz	-1.4 dBm	Occ Bw Freq Offset	-5.692 kHz


Figure 22 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 9 (802.11n)

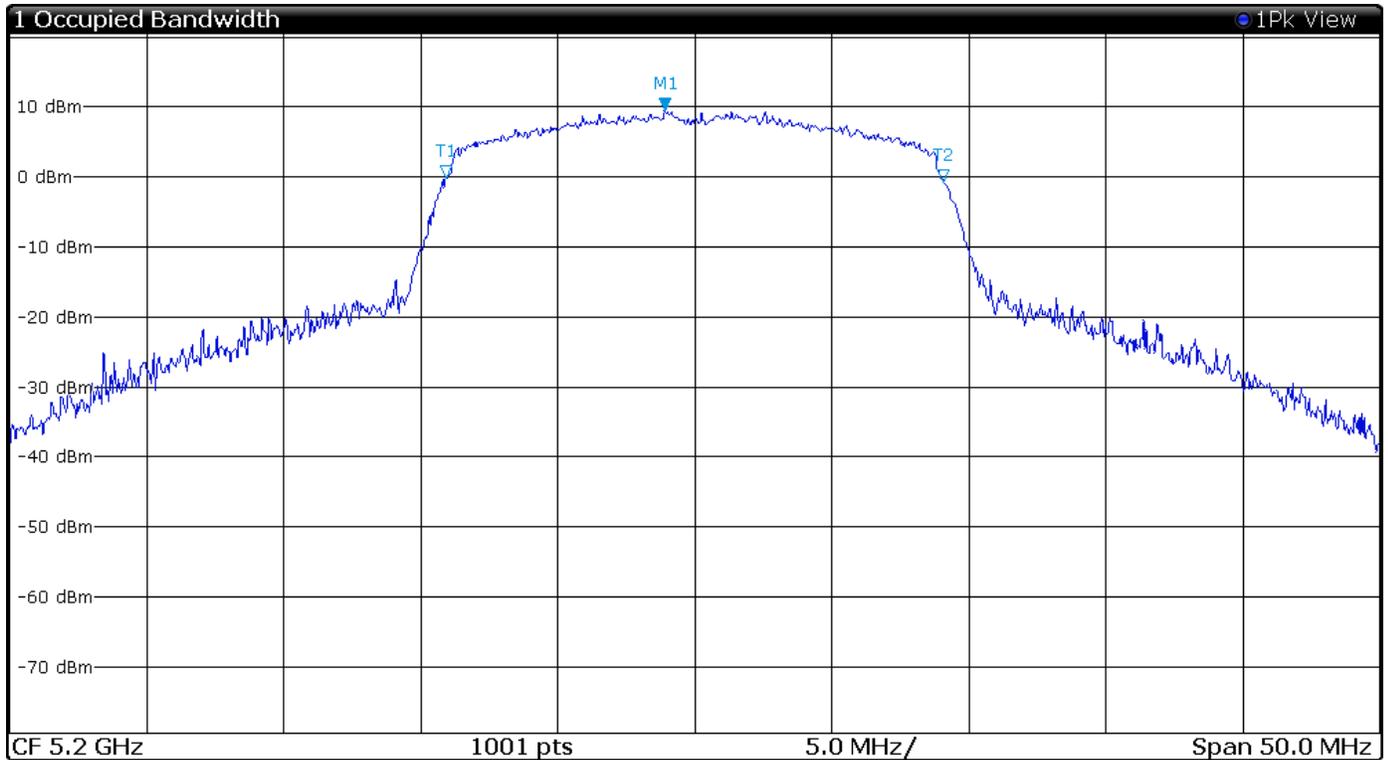

Center Freq: 5.2 GHz	Freq Offset: 0 Hz	Start: 5.175 GHz	Stop: 5.225 GHz
Span: 50 MHz	RBW: 500 kHz	Filter Type: Normal(3dB)	VBW: 2 MHz
SWT: 1.01 ms	Ref Level: 20.5 dBm	Level Offset: 0.5 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1		5.199 GHz	9.4 dBm	Occ Bw	18.17 MHz
T1	1		5.191 GHz	-0.2 dBm	Occ Bw Centroid	5.2 GHz
T2	1		5.209 GHz	-0.8 dBm	Occ Bw Freq Offset	-4.066 kHz


Figure 23 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 10 (802.11n40)

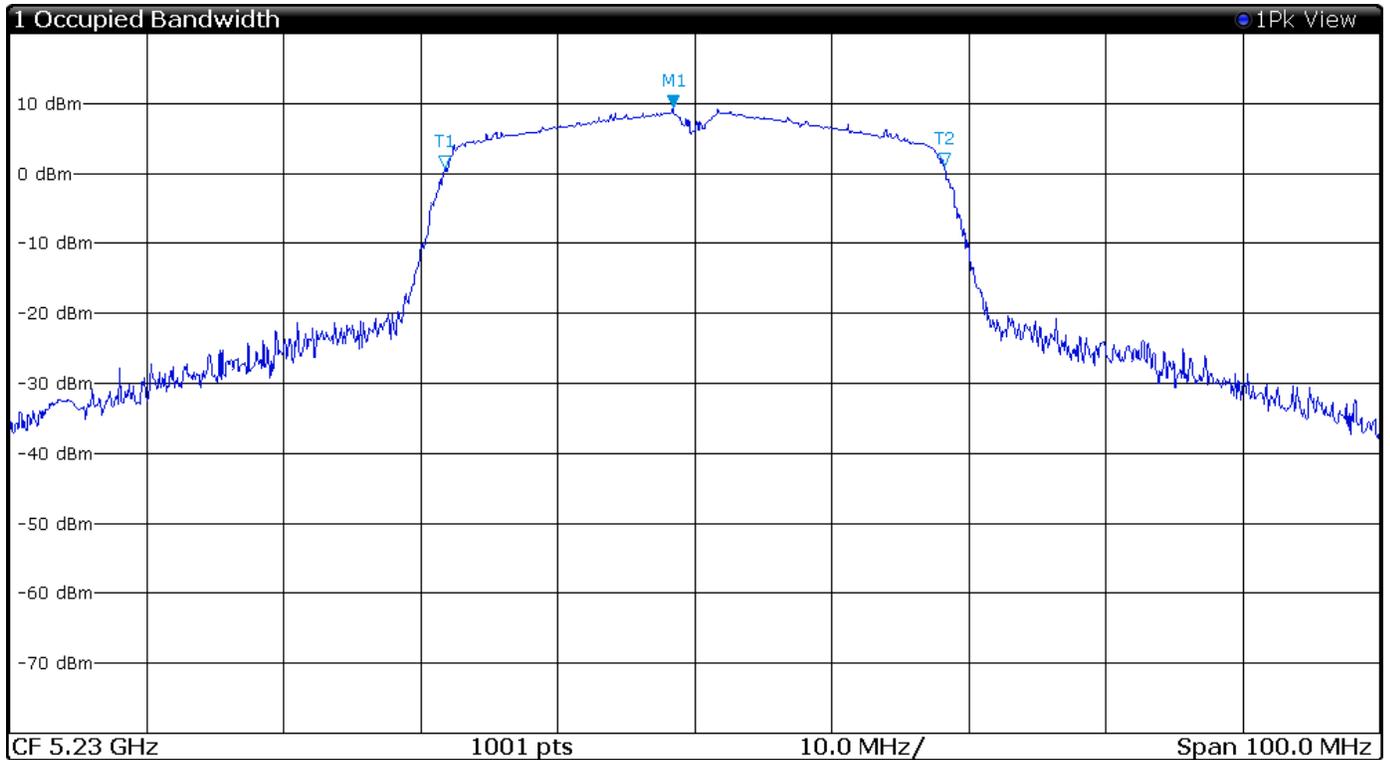

Center Freq: 5.23 GHz	Freq Offset: 0 Hz	Start: 5.18 GHz	Stop: 5.28 GHz
Span: 100 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1		5.228 GHz	9.5 dBm	Occ Bw	36.44 MHz
T1	1		5.212 GHz	0.7 dBm	Occ Bw Centroid	5.23 GHz
T2	1		5.248 GHz	1.2 dBm	Occ Bw Freq Offset	2.474 kHz


Figure 24 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 11 (802.11ac80)

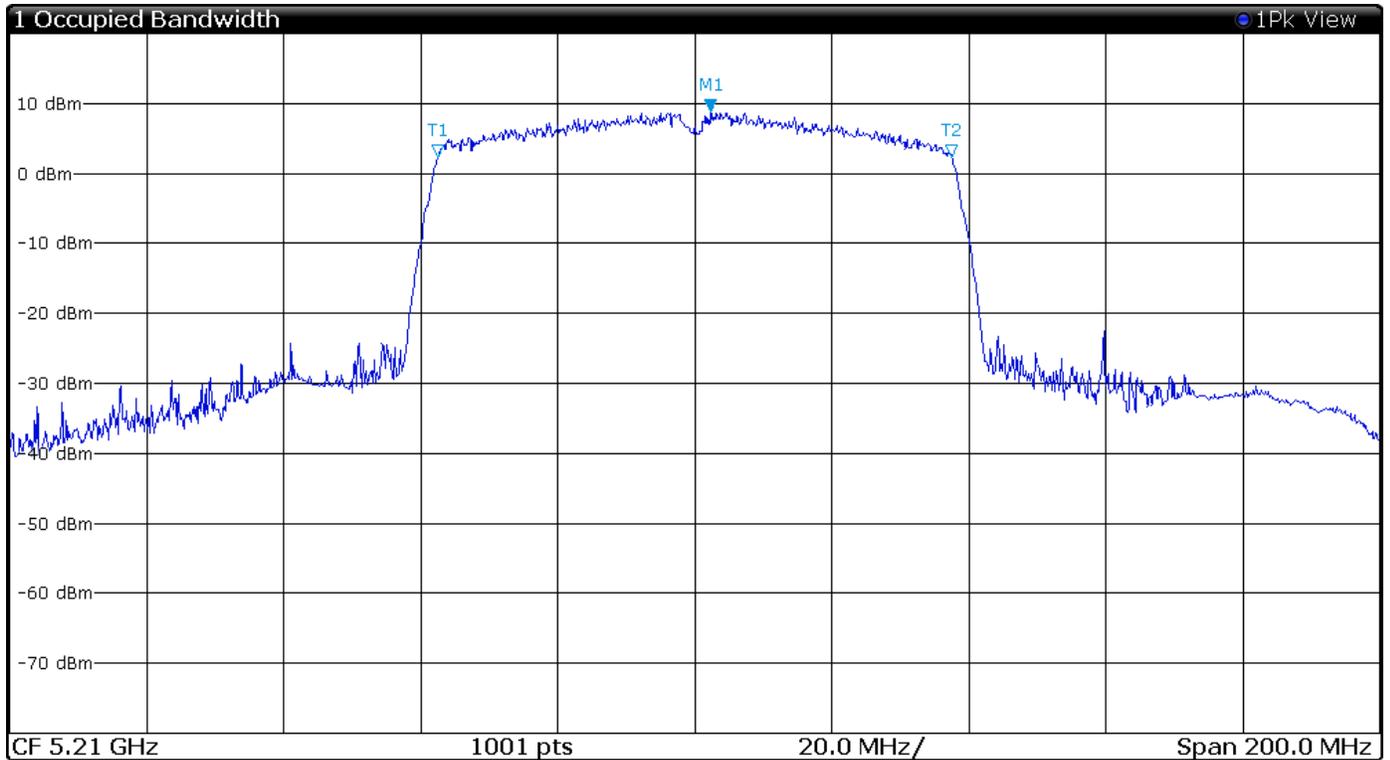

Center Freq: 5.21 GHz	Freq Offset: 0 Hz	Start: 5.11 GHz	Stop: 5.31 GHz
Span: 200 MHz	RBW: 2 MHz	Filter Type: Normal(3dB)	VBW: 10 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1		5.212 GHz	8.7 dBm	Occ Bw	75.15 MHz
T1	1		5.172 GHz	2.2 dBm	Occ Bw Centroid	5.21 GHz
T2	1		5.248 GHz	2.3 dBm	Occ Bw Freq Offset	5.093 kHz


Figure 25 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 12 (802.11a)

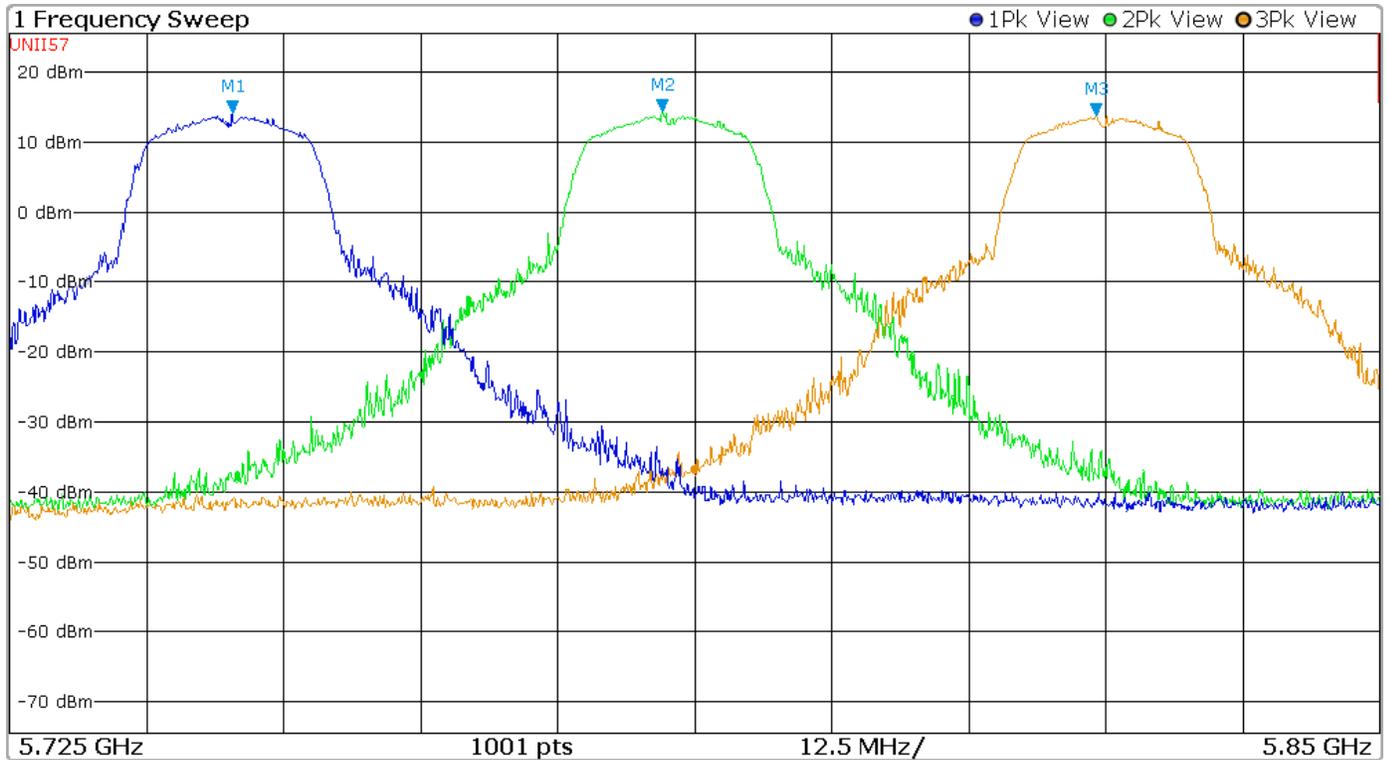

Center Freq: 5.787 GHz	Freq Offset: 0 Hz	Start: 5.725 GHz	Stop: 5.85 GHz
Span: 125 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 25.5 dBm	Level Offset: 0.5 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1	1		5.745 GHz	14.1 dBm
M2	2		5.785 GHz	14.3 dBm
M3	3		5.824 GHz	13.8 dBm


Figure 26 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 13 (802.11n)

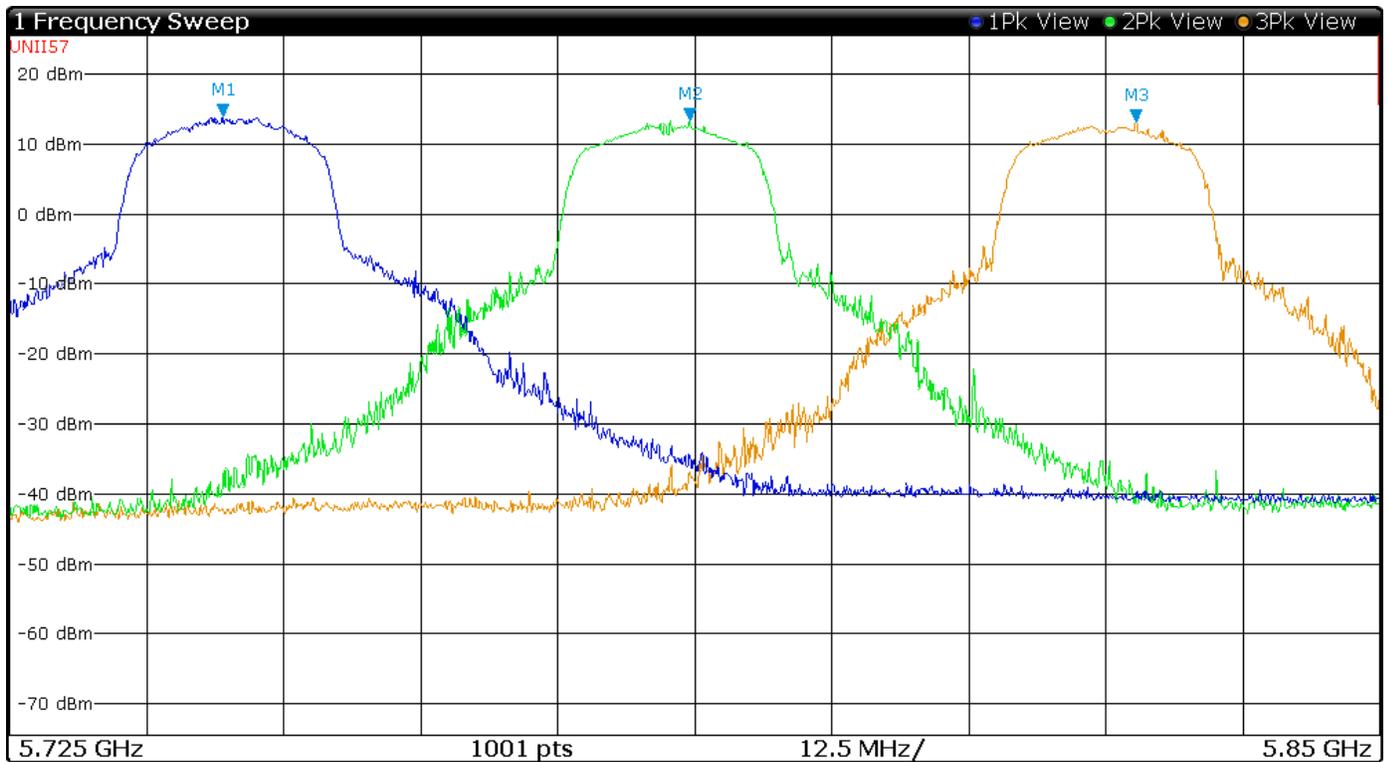

Center Freq: 5.787 GHz	Freq Offset: 0 Hz	Start: 5.725 GHz	Stop: 5.85 GHz
Span: 125 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 25.5 dBm	Level Offset: 0.5 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1	1		5.744 GHz	13.9 dBm
M2	2		5.787 GHz	13.3 dBm
M3	3		5.828 GHz	13.2 dBm


Figure 27 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 14 (802.11n40)

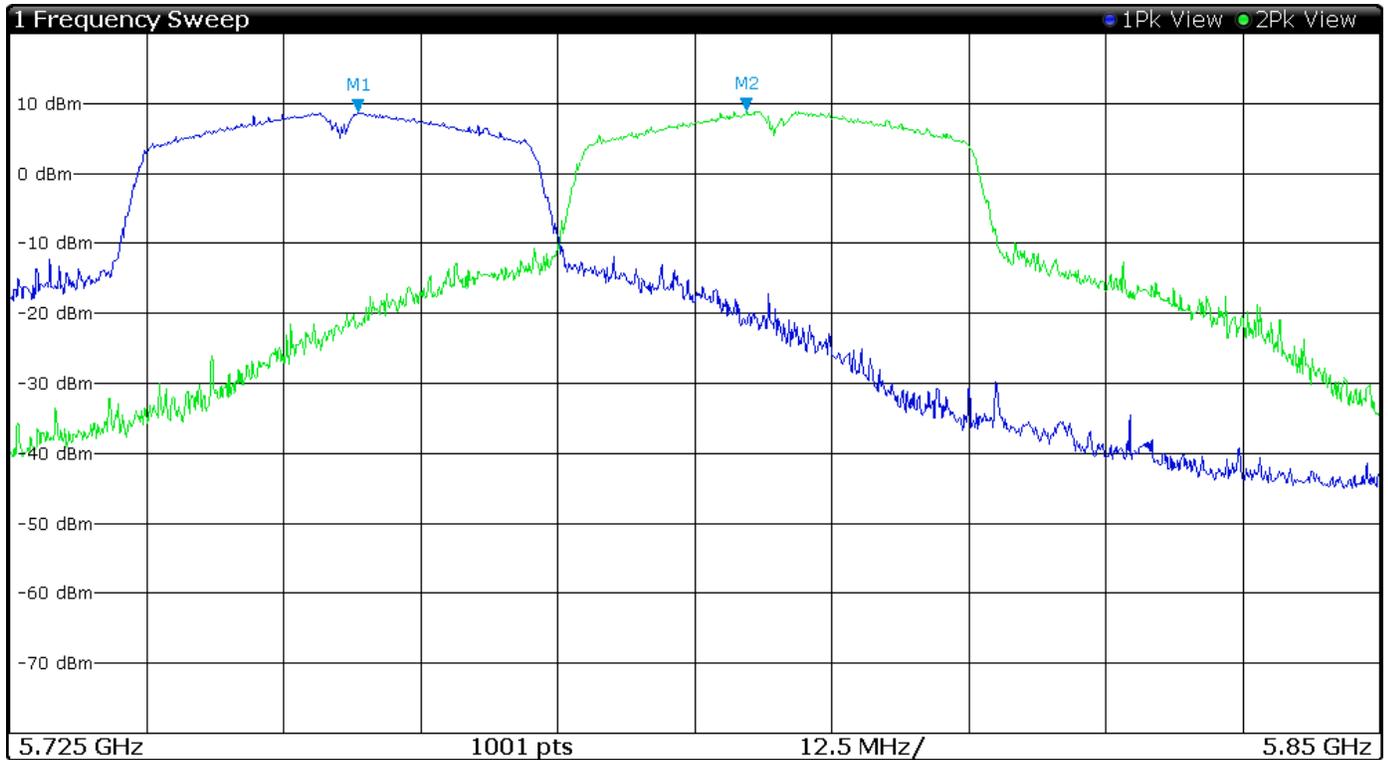

Center Freq: 5.787 GHz	Freq Offset: 0 Hz	Start: 5.725 GHz	Stop: 5.85 GHz
Span: 125 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.757 GHz	8.8 dBm
M2		2	5.792 GHz	9 dBm


Figure 28 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 15 (802.11ac80)

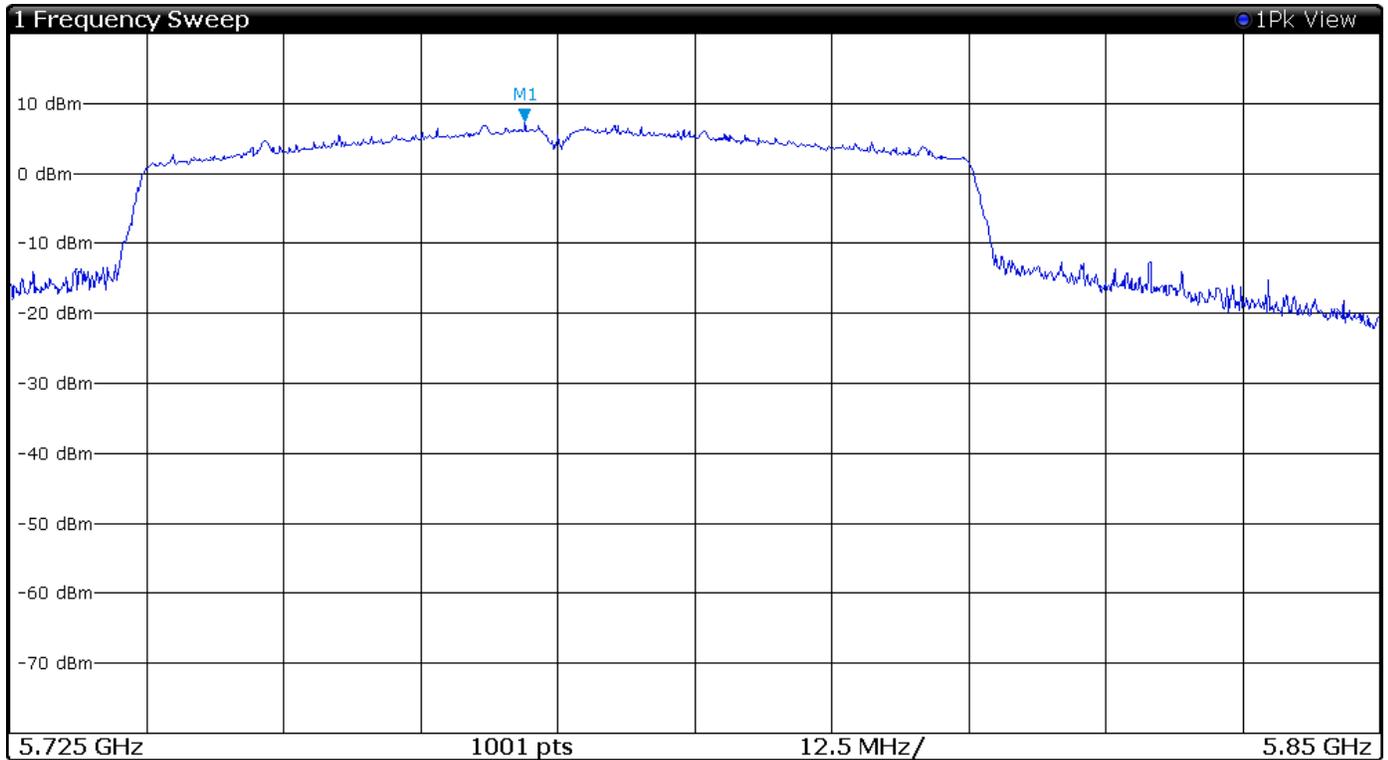

Center Freq: 5.787 GHz	Freq Offset: 0 Hz	Start: 5.725 GHz	Stop: 5.85 GHz
Span: 125 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.772 GHz	7.3 dBm


Figure 29 Plot of Lower Band Edge Across 5725-5850 MHz Mode 12 (802.11a)

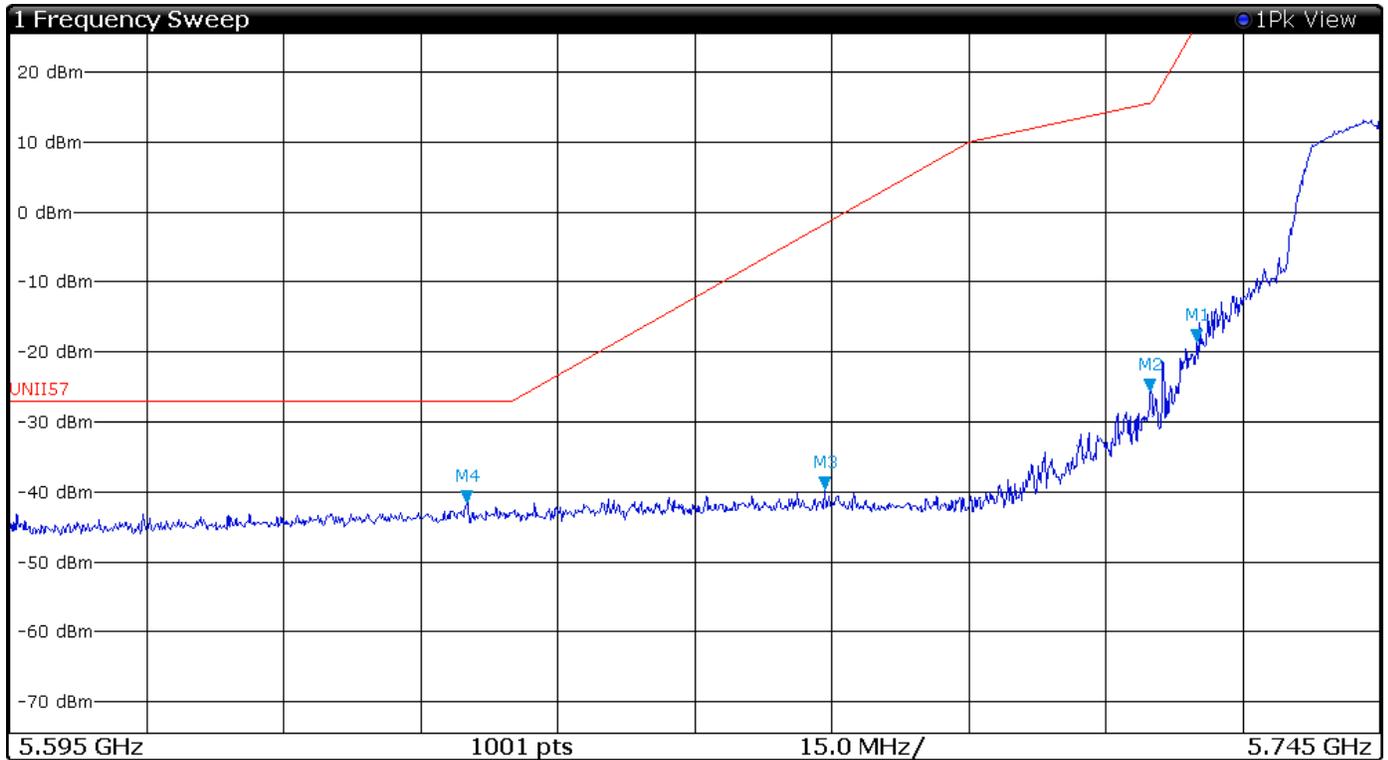

Center Freq: 5.67 GHz	Freq Offset: 0 Hz	Start: 5.595 GHz	Stop: 5.745 GHz
Span: 150 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 25.5 dBm	Level Offset: 0.5 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1	1	1	5.725 GHz	-18.6 dBm
M2	1	1	5.72 GHz	-25.7 dBm
M3	1	1	5.684 GHz	-39.6 dBm
M4	1	1	5.645 GHz	-41.6 dBm


Figure 30 Plot of Lower Band Edge Across 5725-5850 MHz Mode 13 (802.11n)

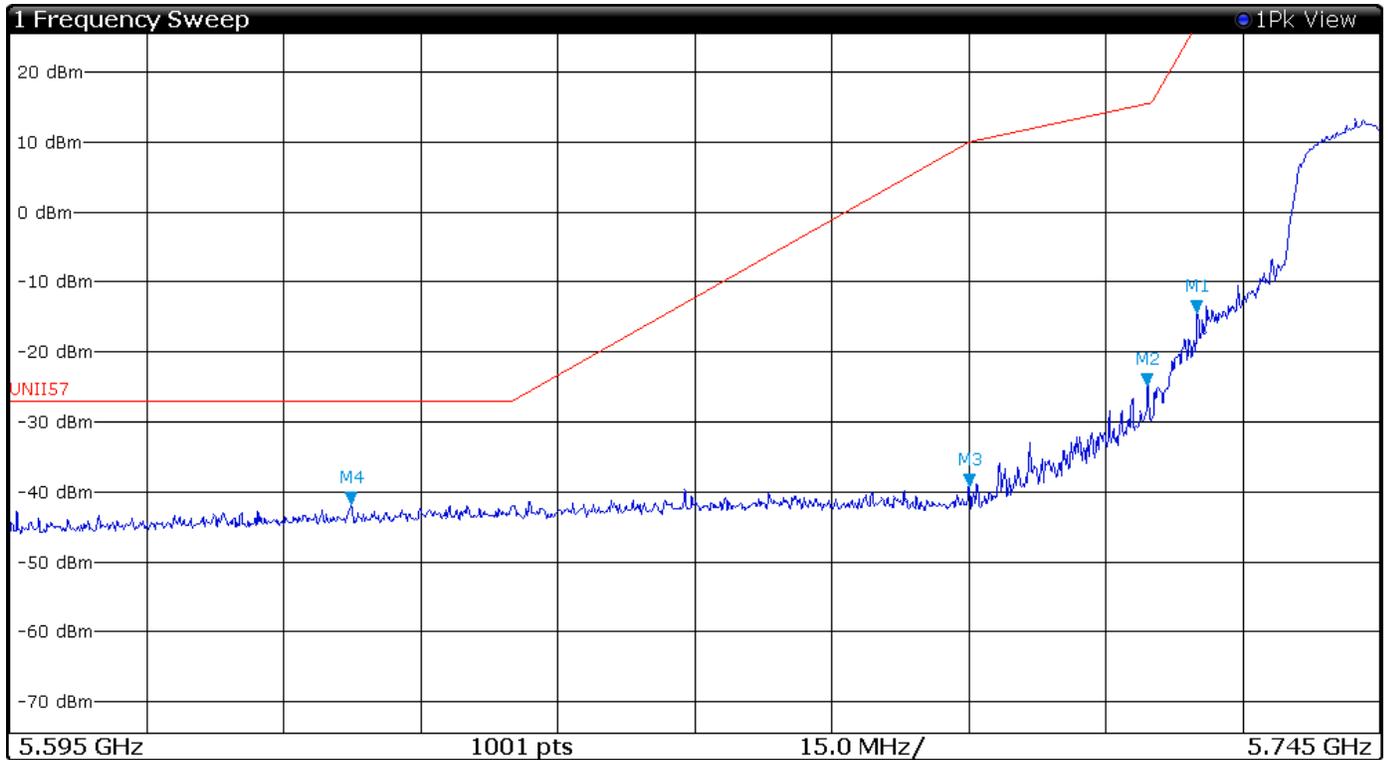

Center Freq: 5.67 GHz	Freq Offset: 0 Hz	Start: 5.595 GHz	Stop: 5.745 GHz
Span: 150 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 25.5 dBm	Level Offset: 0.5 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.725 GHz	-14.5 dBm
M2		1	5.72 GHz	-24.8 dBm
M3		1	5.7 GHz	-39.3 dBm
M4		1	5.632 GHz	-41.9 dBm


Figure 31 Plot of Lower Band Edge Across 5725-5850 MHz Mode 14 (802.11n40)

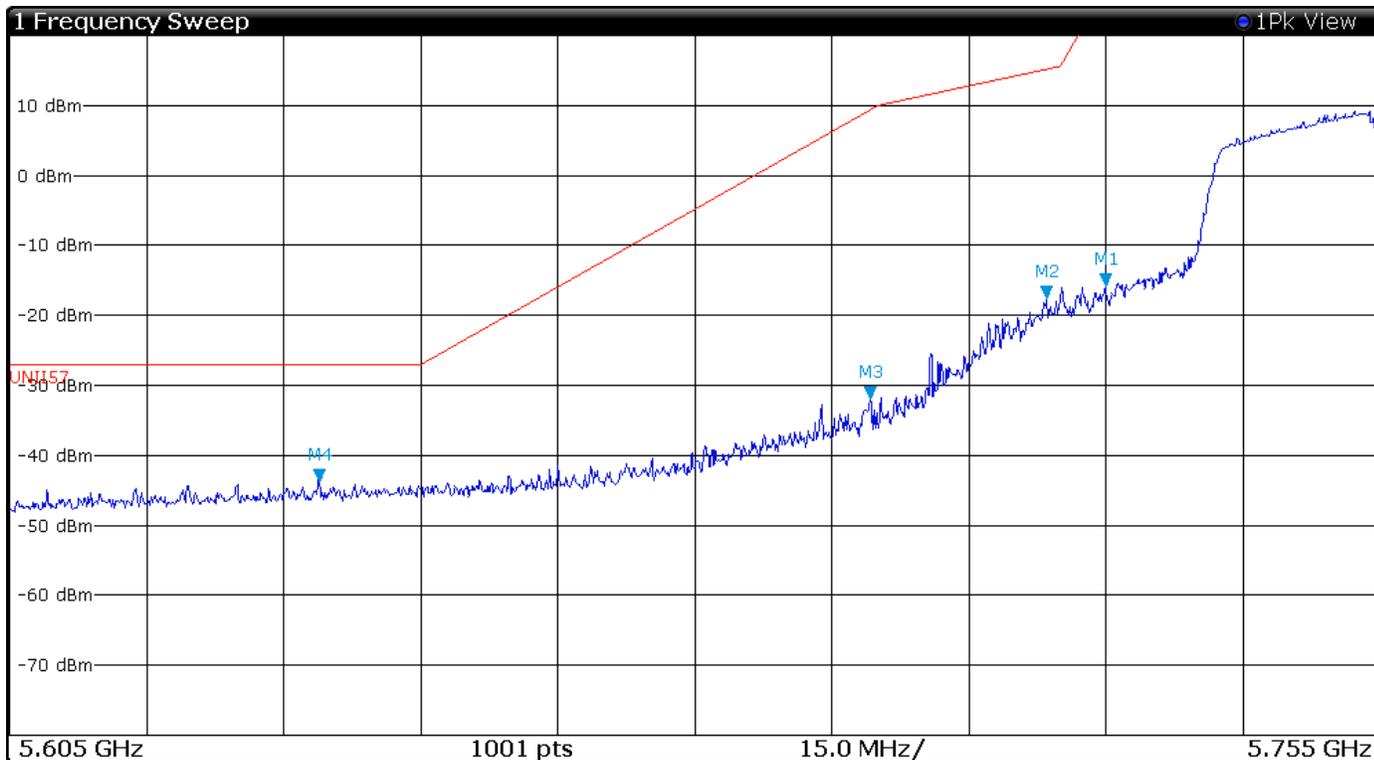

Center Freq: 5.68 GHz	Freq Offset: 0 Hz	Start: 5.605 GHz	Stop: 5.755 GHz
Span: 150 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.725 GHz	-15.8 dBm
M2		1	5.718 GHz	-17.6 dBm
M3		1	5.699 GHz	-31.9 dBm
M4		1	5.639 GHz	-43.7 dBm


Figure 32 Plot of Lower Band Edge Across 5725-5850 MHz Mode 15 (802.11ac80)

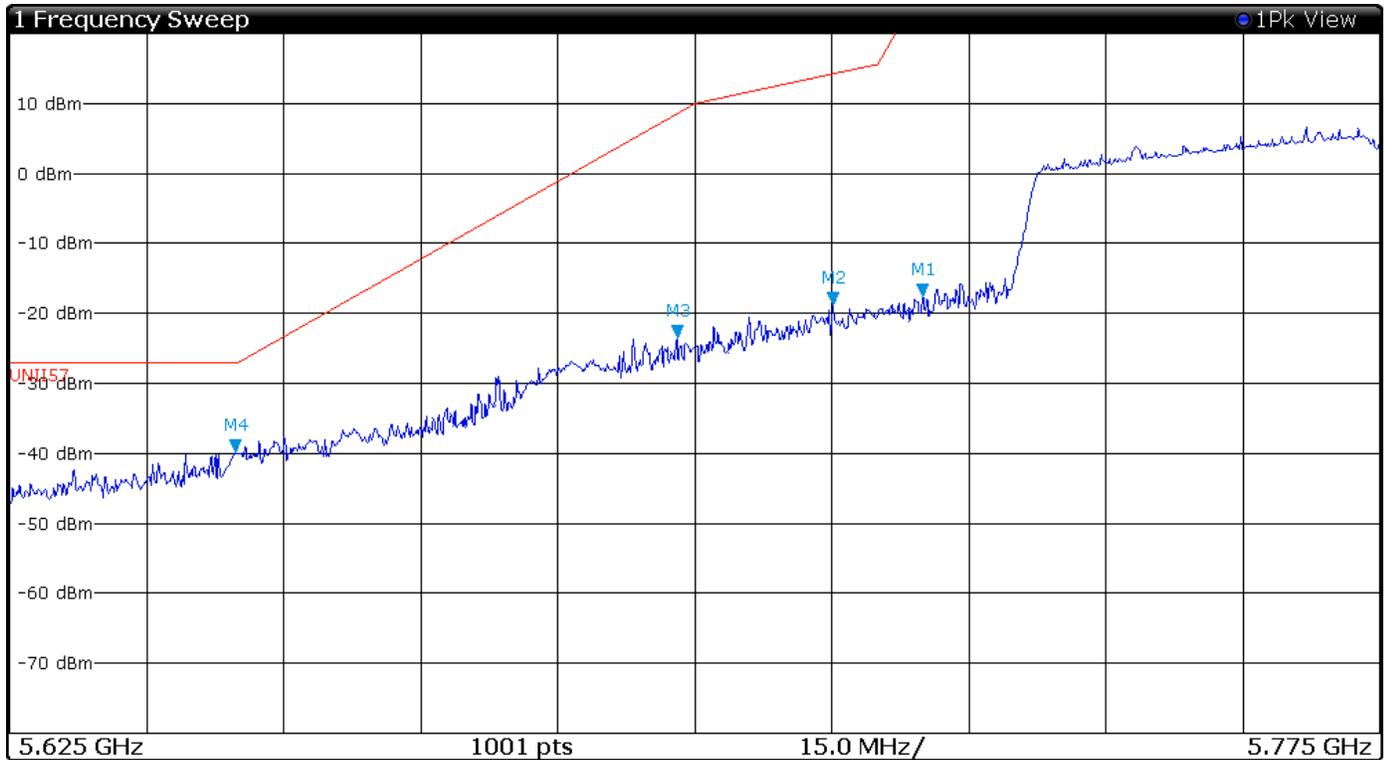

Center Freq: 5.7 GHz	Freq Offset: 0 Hz	Start: 5.625 GHz	Stop: 5.775 GHz
Span: 150 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.725 GHz	-17.7 dBm
M2		1	5.715 GHz	-18.8 dBm
M3		1	5.698 GHz	-23.6 dBm
M4		1	5.65 GHz	-39.8 dBm


Figure 33 Plot of Upper Band Edge Across 5725-5850 MHz Mode 12 (802.11a)

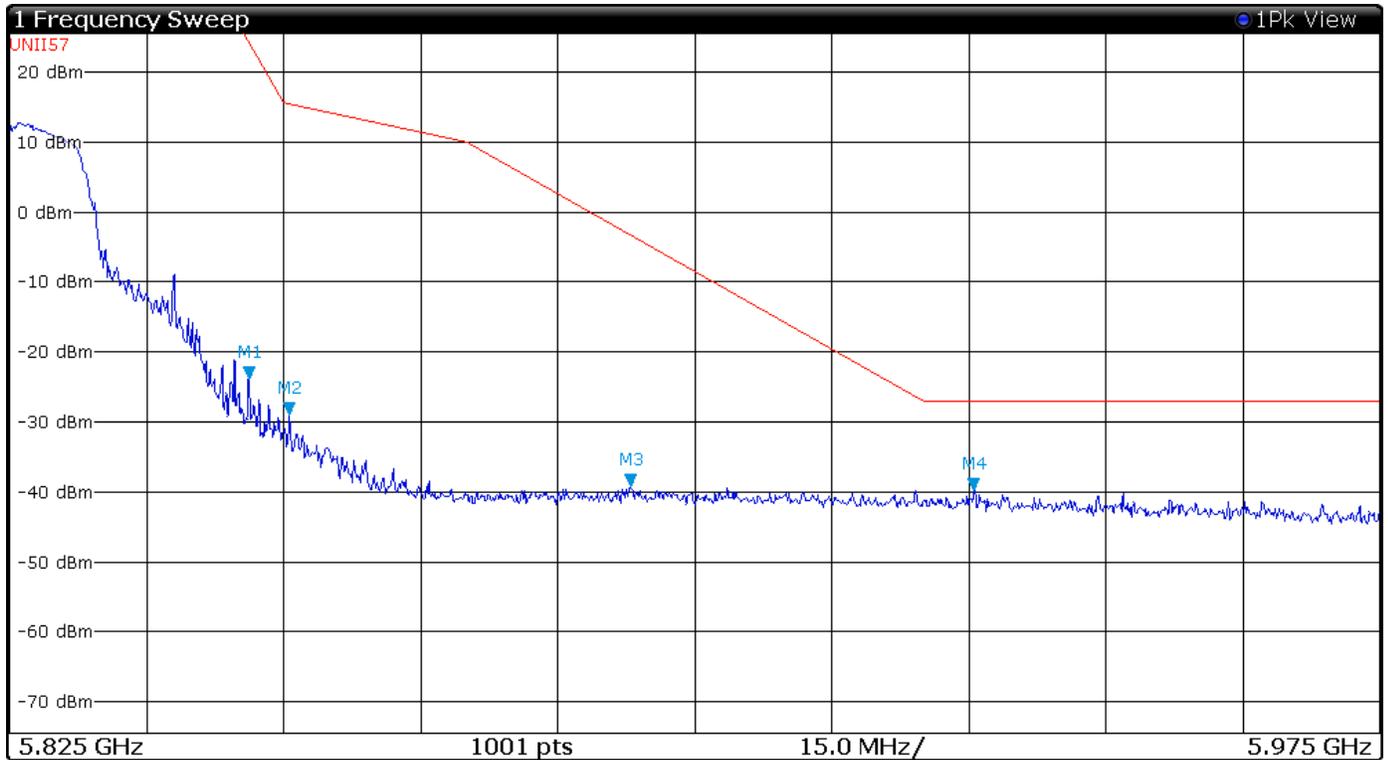

Center Freq: 5.9 GHz	Freq Offset: 0 Hz	Start: 5.825 GHz	Stop: 5.975 GHz
Span: 150 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 25.5 dBm	Level Offset: 0.5 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1	1	1	5.851 GHz	-23.8 dBm
M2	1	1	5.856 GHz	-29.1 dBm
M3	1	1	5.893 GHz	-39.3 dBm
M4	1	1	5.931 GHz	-39.8 dBm


Figure 34 Plot of Upper Band Edge Across 5725-5850 MHz Mode 13 (802.11n)

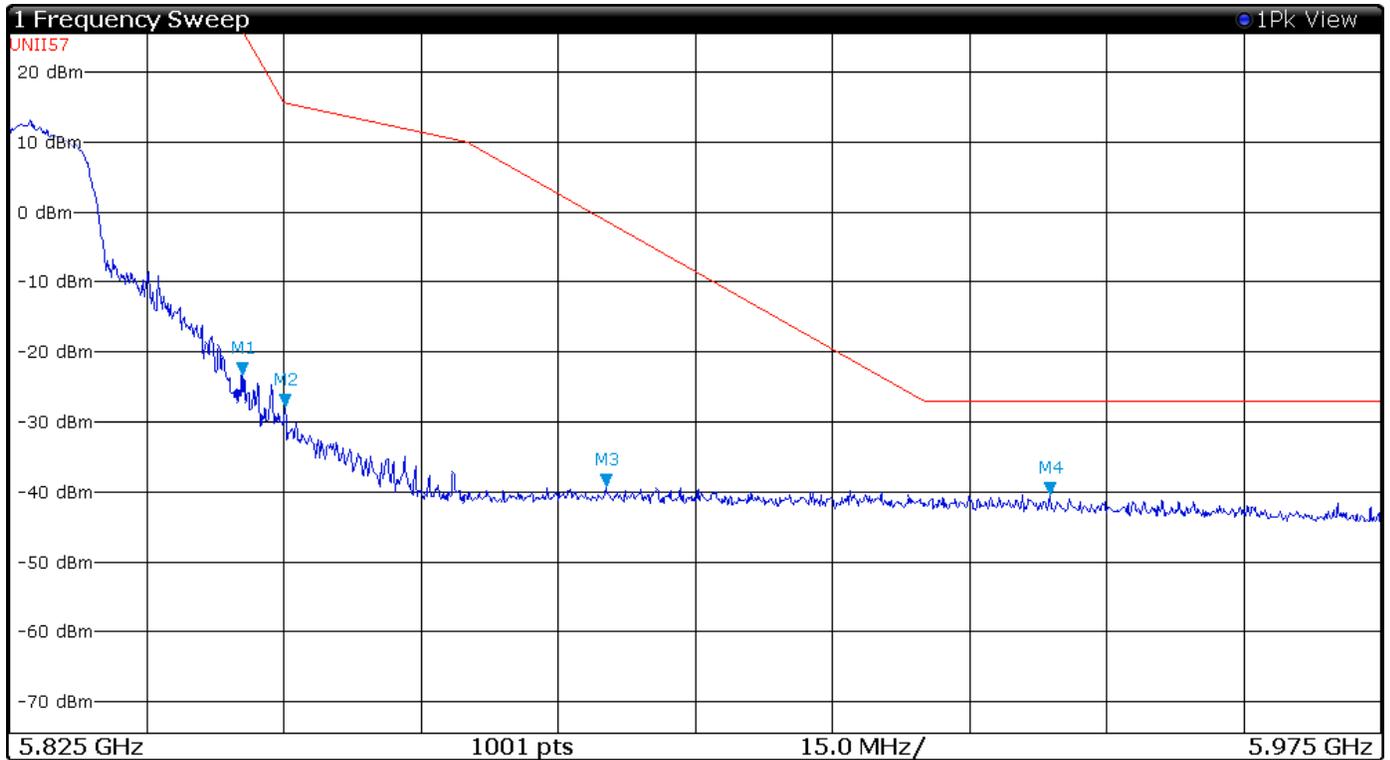

Center Freq: 5.9 GHz	Freq Offset: 0 Hz	Start: 5.825 GHz	Stop: 5.975 GHz
Span: 150 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 25.5 dBm	Level Offset: 0.5 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.85 GHz	-23.4 dBm
M2		1	5.855 GHz	-27.9 dBm
M3		1	5.89 GHz	-39.3 dBm
M4		1	5.939 GHz	-40.4 dBm


Figure 35 Plot of Upper Band Edge Across 5725-5850 MHz Mode 14 (802.11n40)

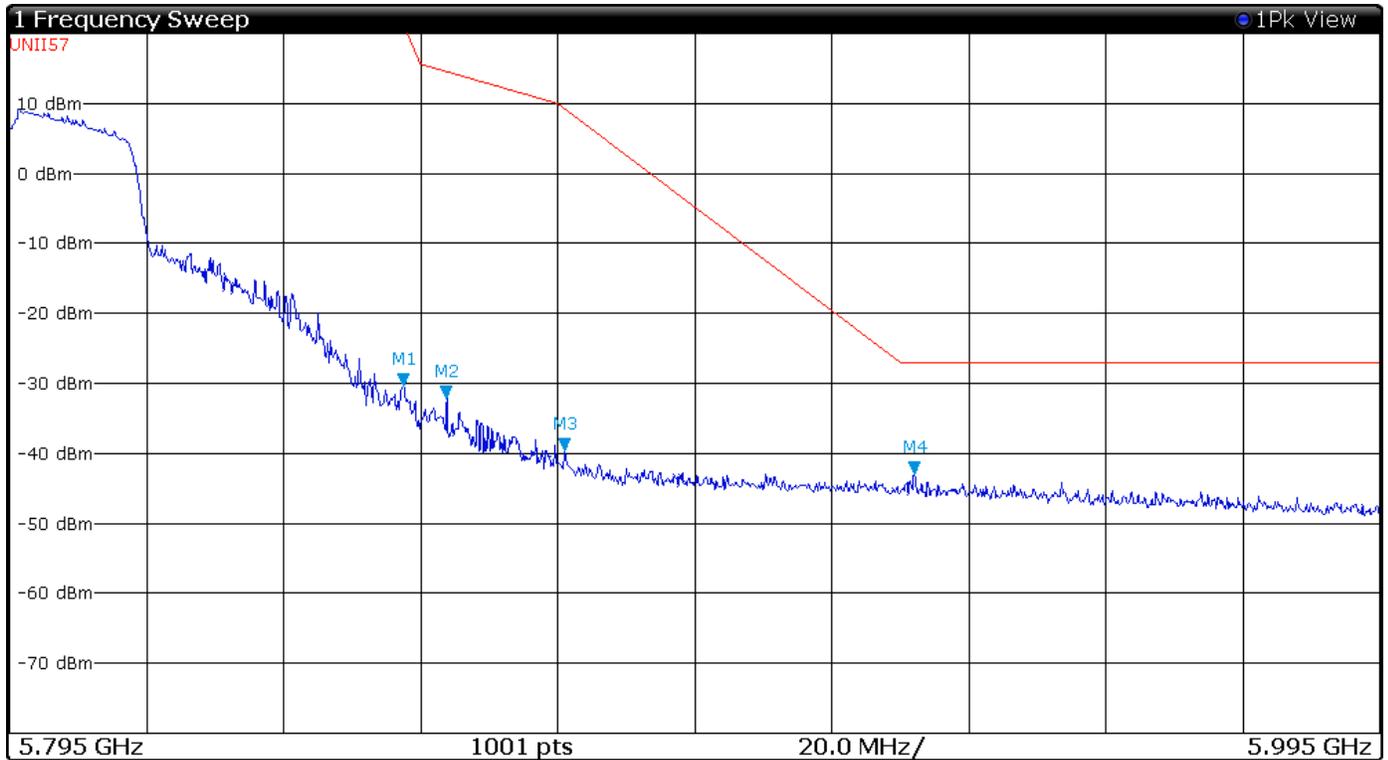

Center Freq: 5.895 GHz	Freq Offset: 0 Hz	Start: 5.795 GHz	Stop: 5.995 GHz
Span: 200 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.852 GHz	-30.4 dBm
M2		1	5.859 GHz	-32.2 dBm
M3		1	5.876 GHz	-39.7 dBm
M4		1	5.927 GHz	-42.9 dBm


Figure 36 Plot of Upper Band Edge Across 5725-5850 MHz Mode 15 (802.11ac80)

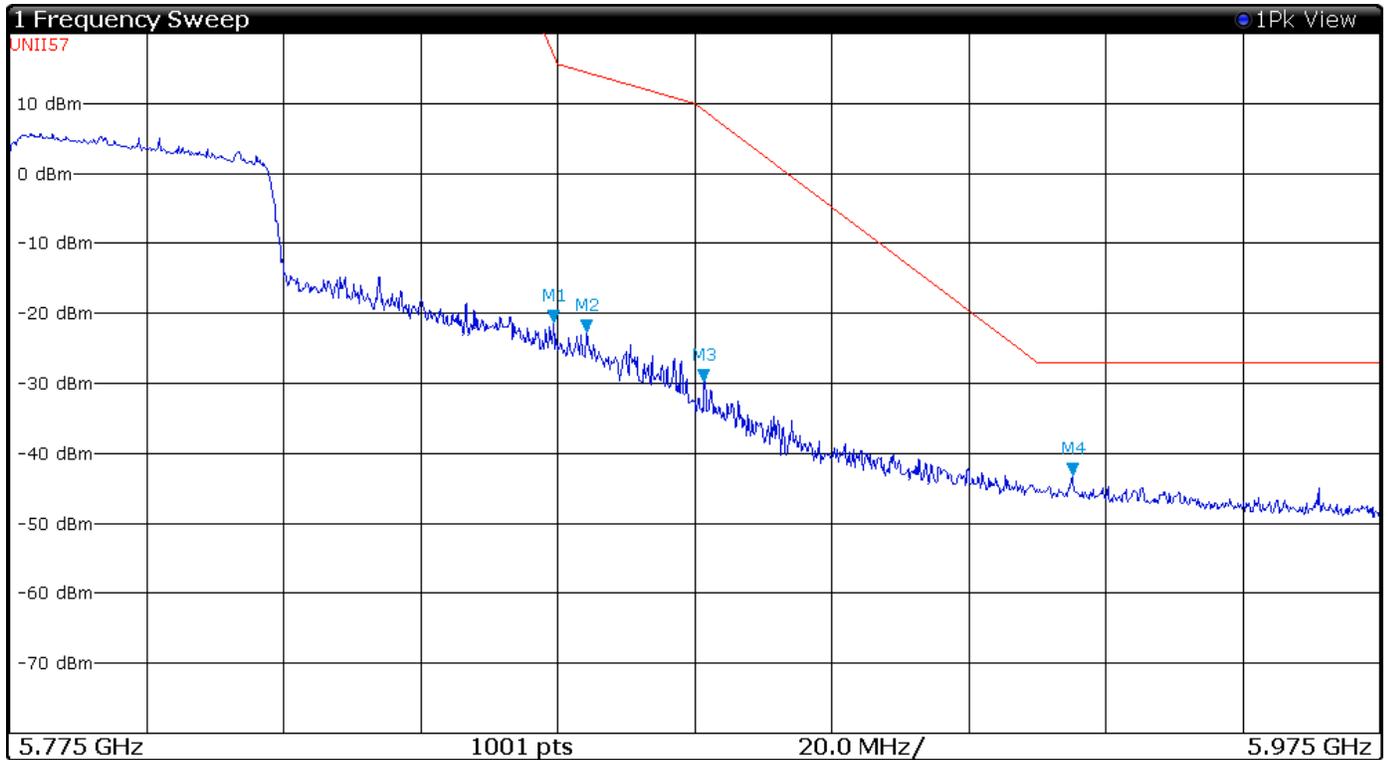

Center Freq: 5.787 GHz	Freq Offset: 0 Hz	Start: 5.725 GHz	Stop: 5.85 GHz
Span: 125 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1	1	1	5.854 GHz	-21.4 dBm
M2	1	1	5.859 GHz	-22.7 dBm
M3	1	1	5.876 GHz	-29.7 dBm
M4	1	1	5.93 GHz	-43.1 dBm


Figure 37 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 12 (802.11a)

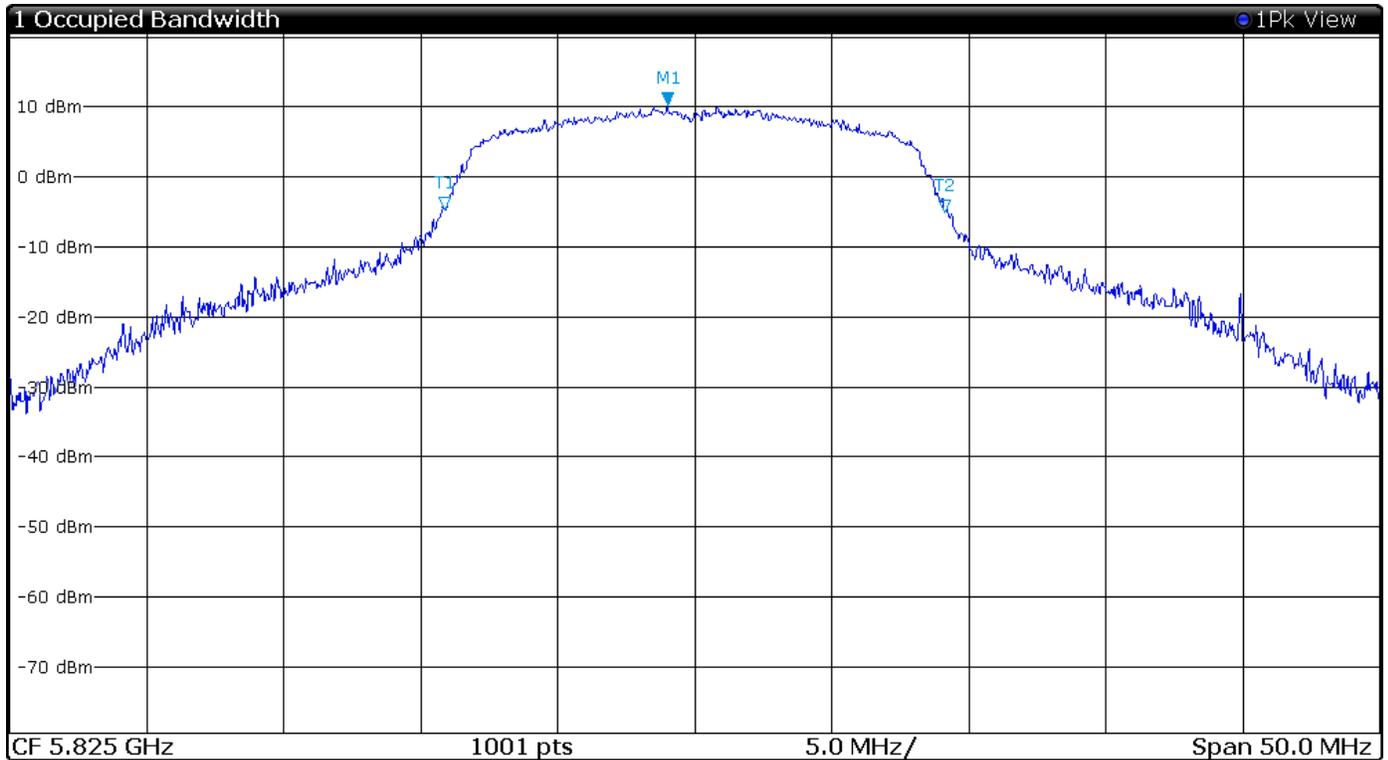

Center Freq: 5.825 GHz	Freq Offset: 0 Hz	Start: 5.8 GHz	Stop: 5.85 GHz
Span: 50 MHz	RBW: 500 kHz	Filter Type: Normal(3dB)	VBW: 2 MHz
SWT: 1.01 ms	Ref Level: 20.5 dBm	Level Offset: 0.5 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1	1	5.824 GHz	10.3 dBm	Occ Bw	18.27 MHz
T1	1	1	5.816 GHz	-4.7 dBm	Occ Bw Centroid	5.825 GHz
T2	1	1	5.834 GHz	-5 dBm	Occ Bw Freq Offset	-6.933 kHz


Figure 38 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 13 (802.11n)

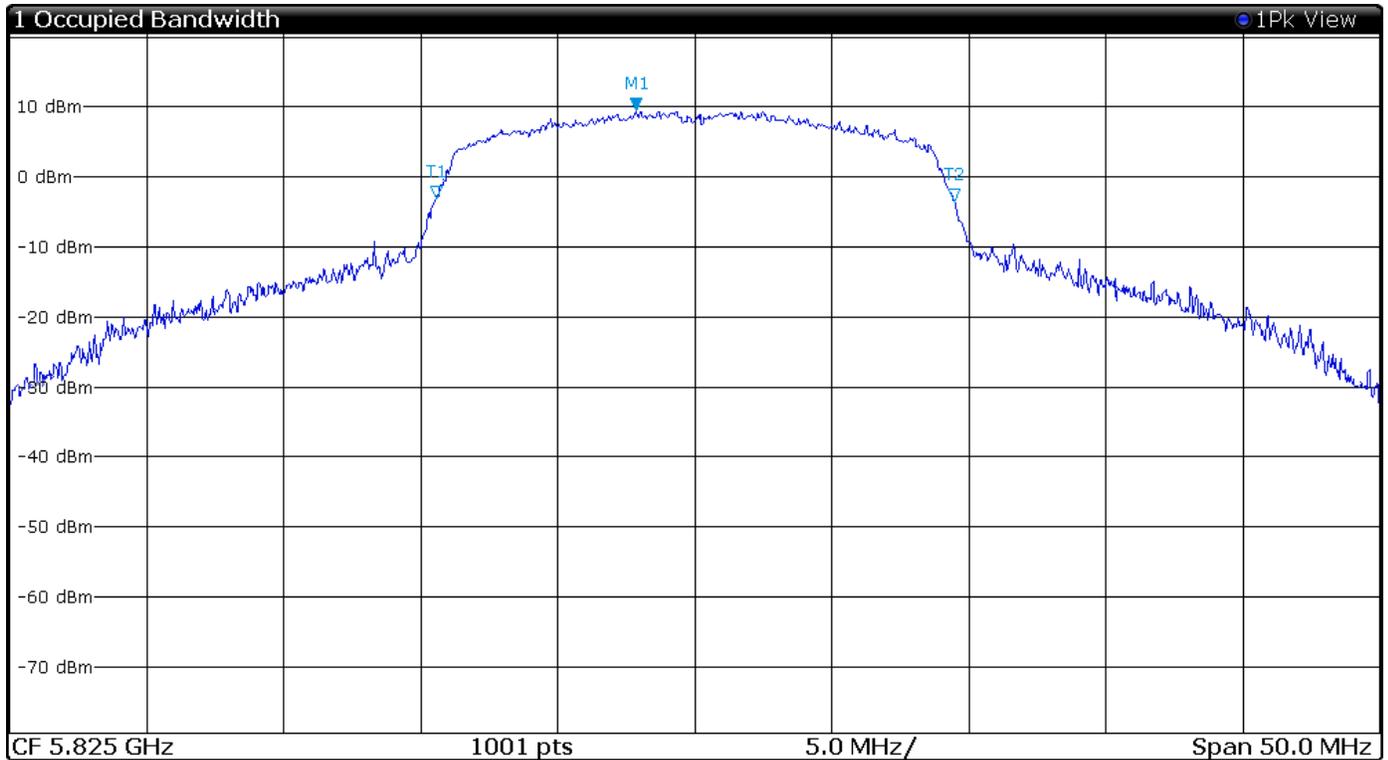

Center Freq: 5.825 GHz	Freq Offset: 0 Hz	Start: 5.8 GHz	Stop: 5.85 GHz
Span: 50 MHz	RBW: 500 kHz	Filter Type: Normal(3dB)	VBW: 2 MHz
SWT: 1.01 ms	Ref Level: 20.5 dBm	Level Offset: 0.5 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1	1	5.823 GHz	9.4 dBm	Occ Bw	18.91 MHz
T1	1	1	5.816 GHz	-3.2 dBm	Occ Bw Centroid	5.825 GHz
T2	1	1	5.834 GHz	-3.6 dBm	Occ Bw Freq Offset	18.47 kHz


Figure 39 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 14 (802.11n40)

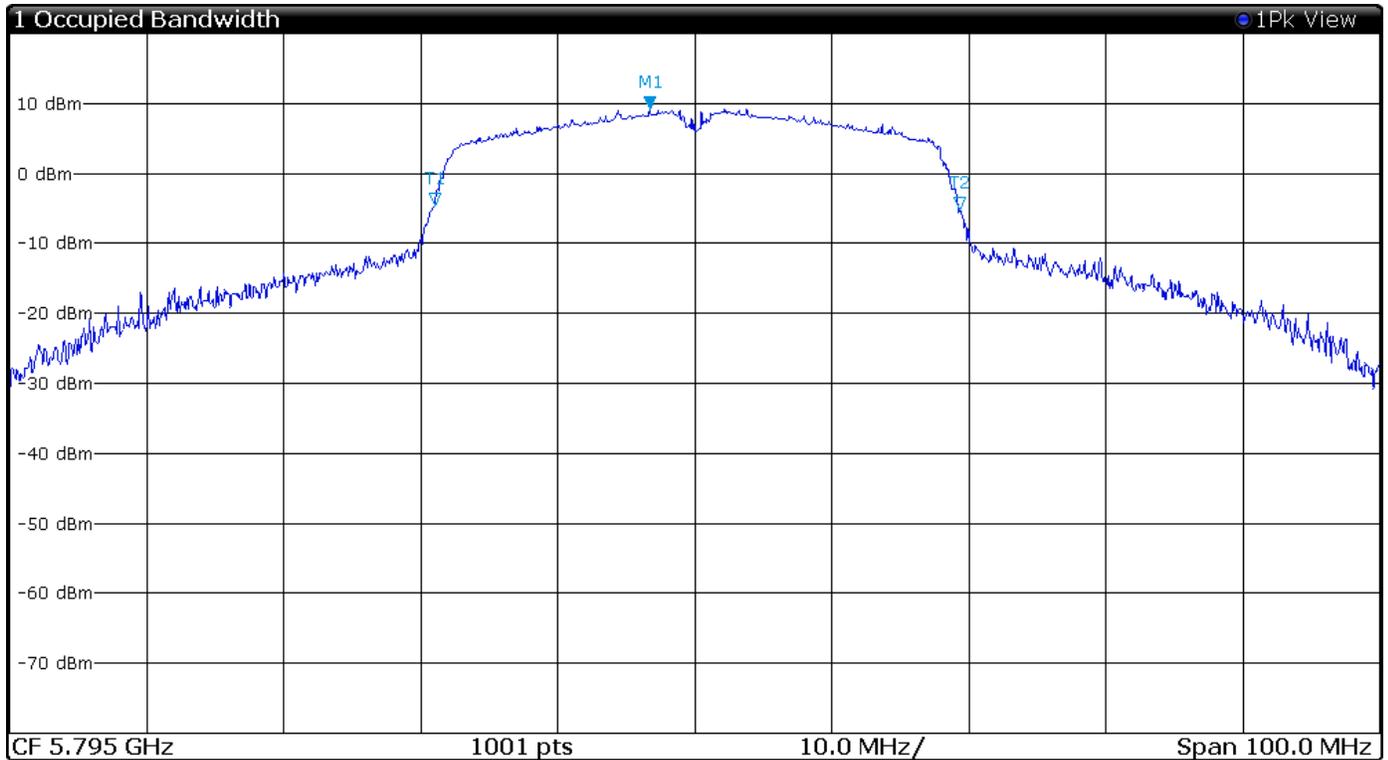

Center Freq: 5.795 GHz	Freq Offset: 0 Hz	Start: 5.745 GHz	Stop: 5.845 GHz
Span: 100 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1		5.792 GHz	9.2 dBm	Occ Bw	38.32 MHz
T1	1		5.776 GHz	-4.6 dBm	Occ Bw Centroid	5.795 GHz
T2	1		5.814 GHz	-5.3 dBm	Occ Bw Freq Offset	228.6 kHz


Figure 40 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 15 (802.11ac80)

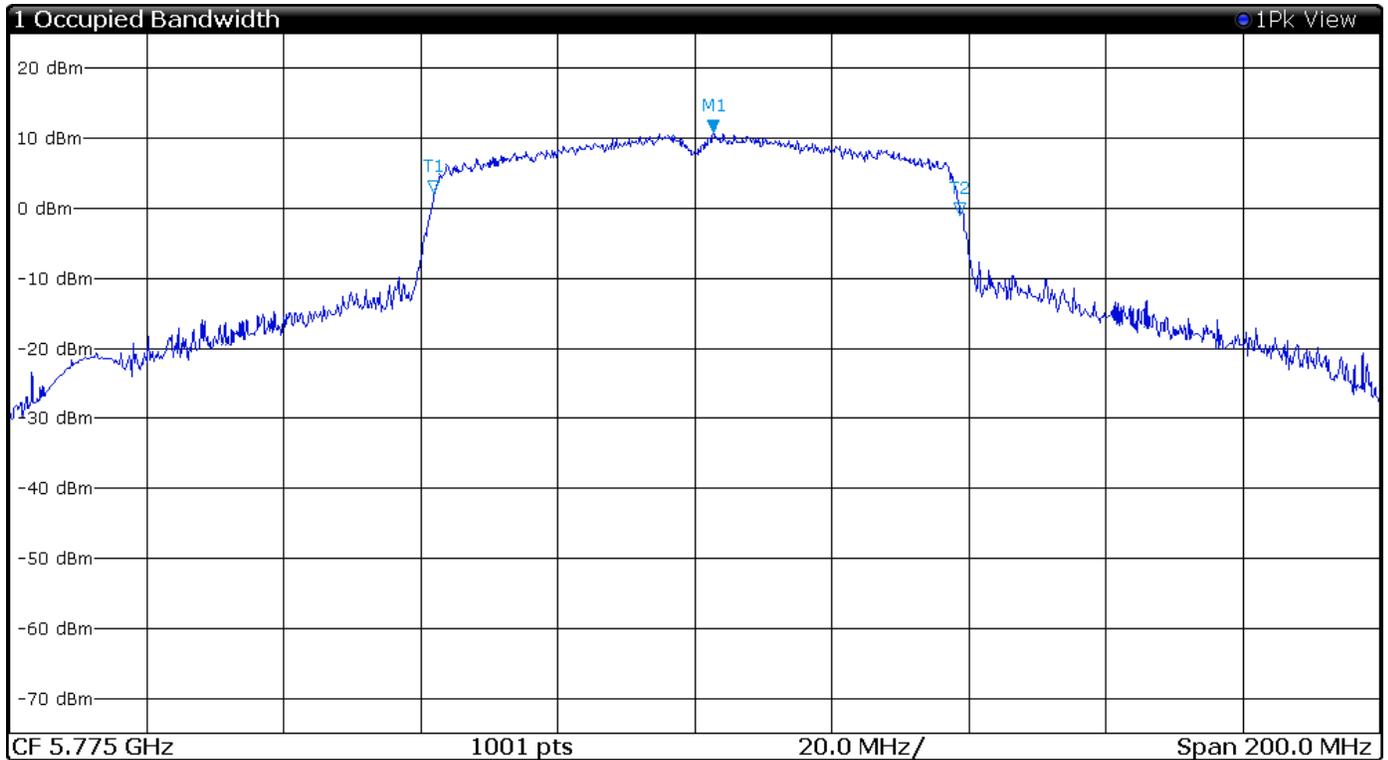

Center Freq: 5.775 GHz	Freq Offset: 0 Hz	Start: 5.675 GHz	Stop: 5.875 GHz
Span: 200 MHz	RBW: 2 MHz	Filter Type: Normal(3dB)	VBW: 10 MHz
SWT: 1.01 ms	Ref Level: 25 dBm	Level Offset: 0 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1	1	5.778 GHz	10.8 dBm	Occ Bw	76.75 MHz
T1	1	1	5.737 GHz	2.3 dBm	Occ Bw Centroid	5.775 GHz
T2	1	1	5.814 GHz	-1 dBm	Occ Bw Freq Offset	356.5 kHz


Figure 41 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 12 (802.11a)

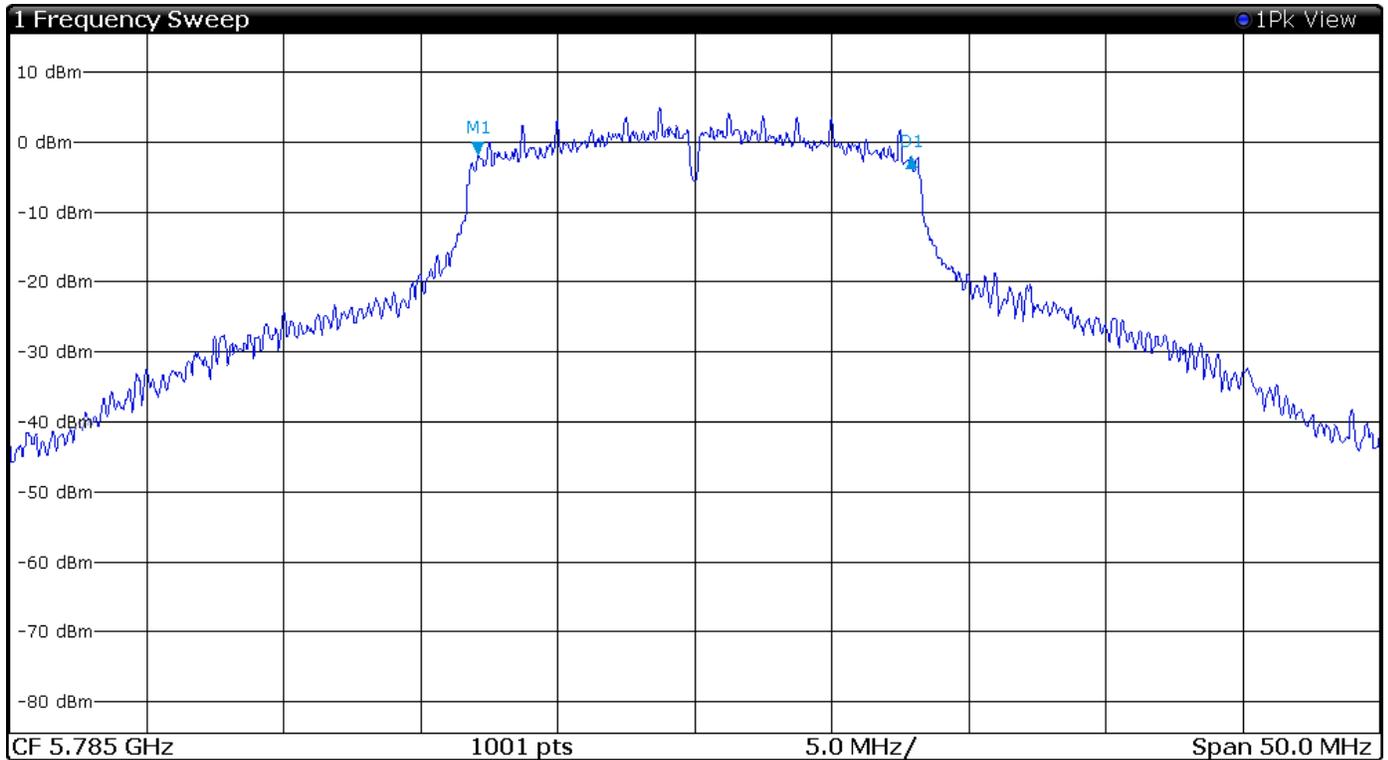

Center Freq: 5.785 GHz	Freq Offset: 0 Hz	Start: 5.76 GHz	Stop: 5.81 GHz
Span: 50 MHz	RBW: 100 kHz	Filter Type: Normal(3dB)	VBW: 300 kHz
SWT: 1.08 ms	Ref Level: 15.5 dBm	Level Offset: 0.5 dB	Rf Att: 15 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.777 GHz	-1.9 dBm
D1	M1	1	15.78 MHz	0 dB


Figure 42 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 13 (802.11n)

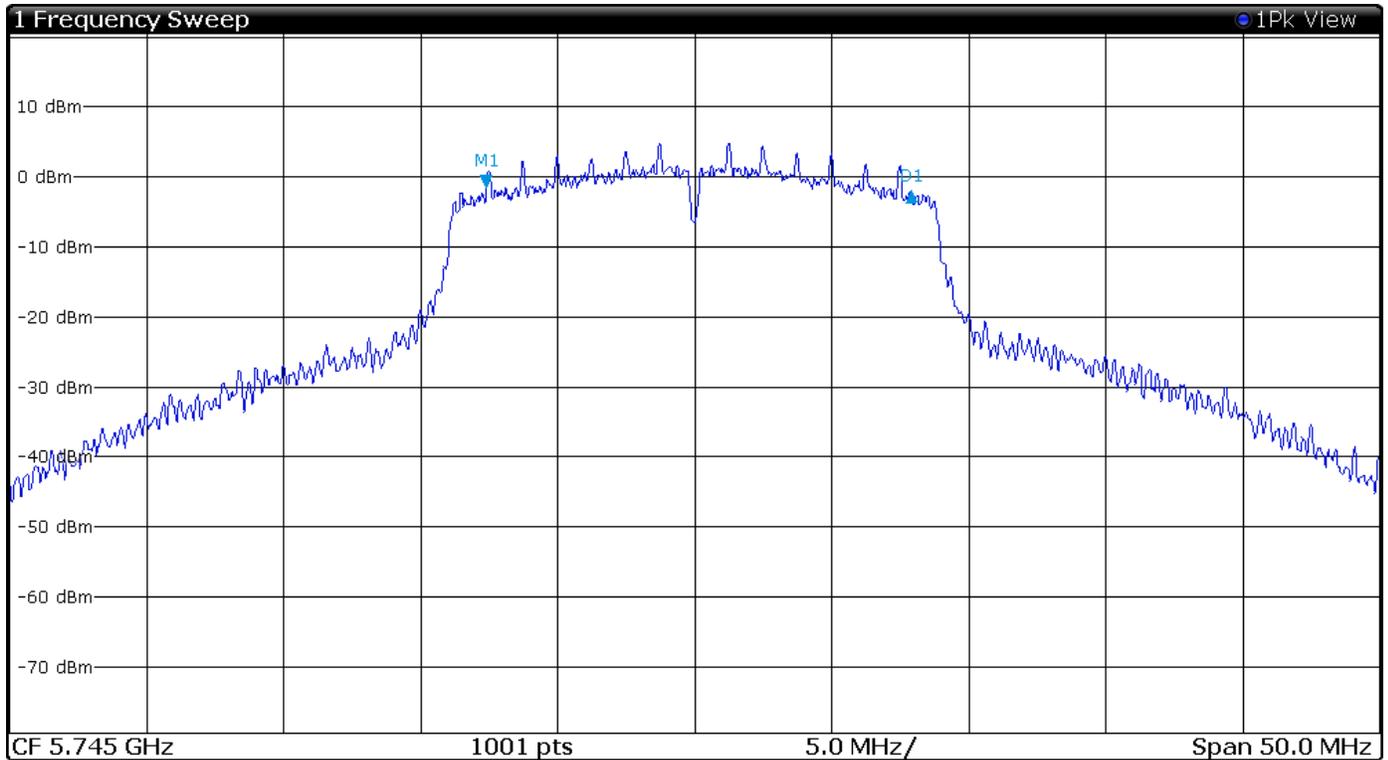

Center Freq: 5.745 GHz	Freq Offset: 0 Hz	Start: 5.72 GHz	Stop: 5.77 GHz
Span: 50 MHz	RBW: 100 kHz	Filter Type: Normal(3dB)	VBW: 300 kHz
SWT: 1.08 ms	Ref Level: 20.5 dBm	Level Offset: 0.5 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.737 GHz	-1.5 dBm
D1	M1	1	15.48 MHz	-0.4 dB


Figure 43 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 14 (802.11n40)

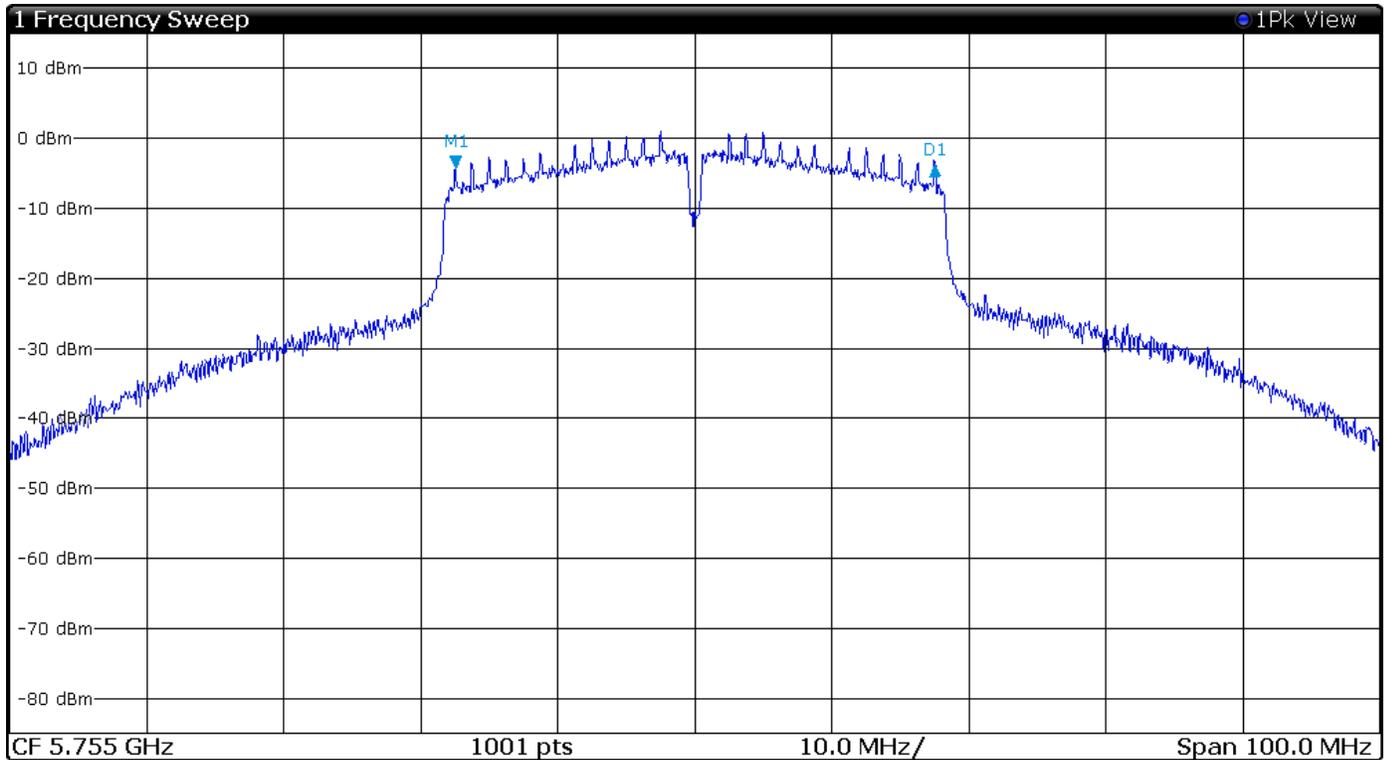

Center Freq: 5.755 GHz	Freq Offset: 0 Hz	Start: 5.705 GHz	Stop: 5.805 GHz
Span: 100 MHz	RBW: 100 kHz	Filter Type: Normal(3dB)	VBW: 300 kHz
SWT: 1.01 ms	Ref Level: 15 dBm	Level Offset: 0 dB	Rf Att: 15 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.738 GHz	-4.2 dBm
D1	M1	1	35.03 MHz	0.6 dB


Figure 44 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 15 (802.11ac80)

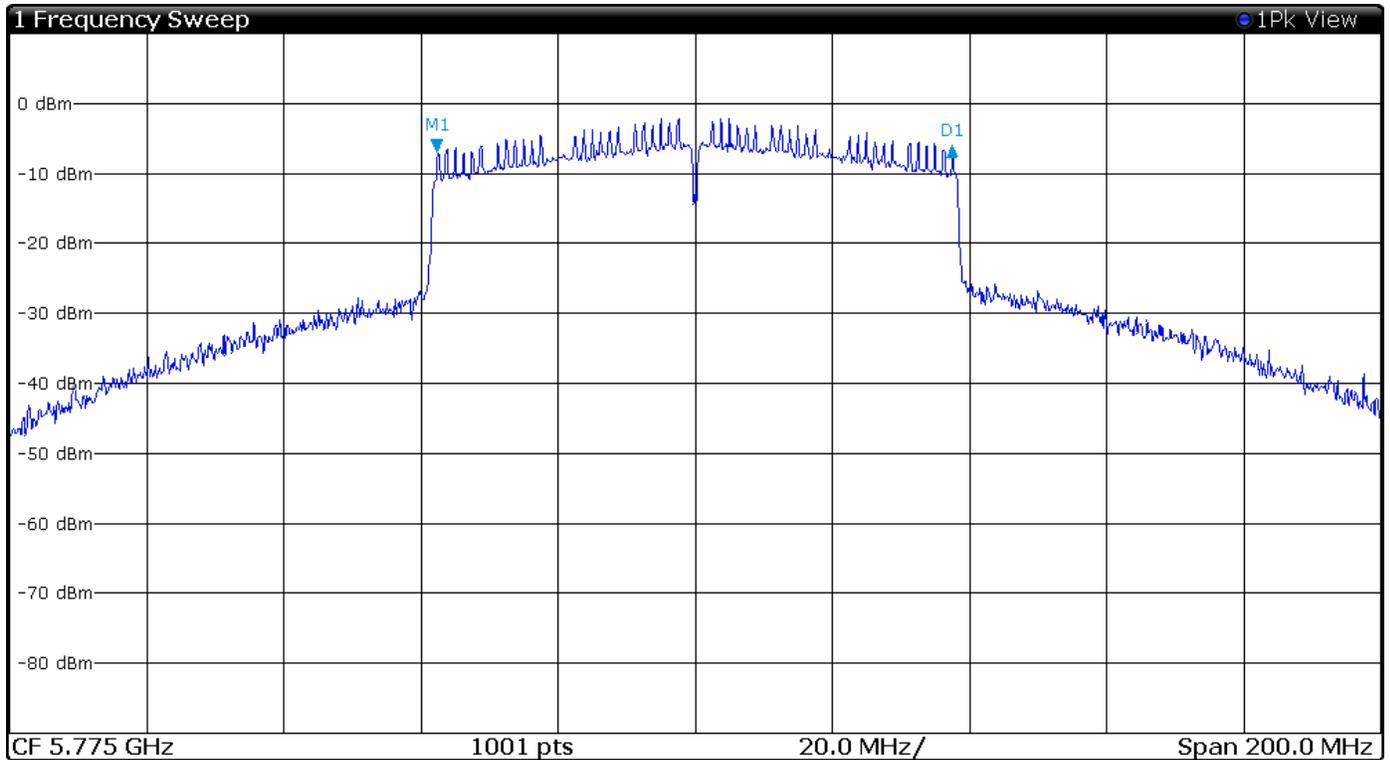

Center Freq: 5.775 GHz	Freq Offset: 0 Hz	Start: 5.675 GHz	Stop: 5.875 GHz
Span: 200 MHz	RBW: 100 kHz	Filter Type: Normal(3dB)	VBW: 300 kHz
SWT: 2 ms	Ref Level: 10 dBm	Level Offset: 0 dB	Rf Att: 10 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1		1	5.737 GHz	-7 dBm
D1	M1	1	75.16 MHz	1 dB


Figure 45 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 12 (802.11a)

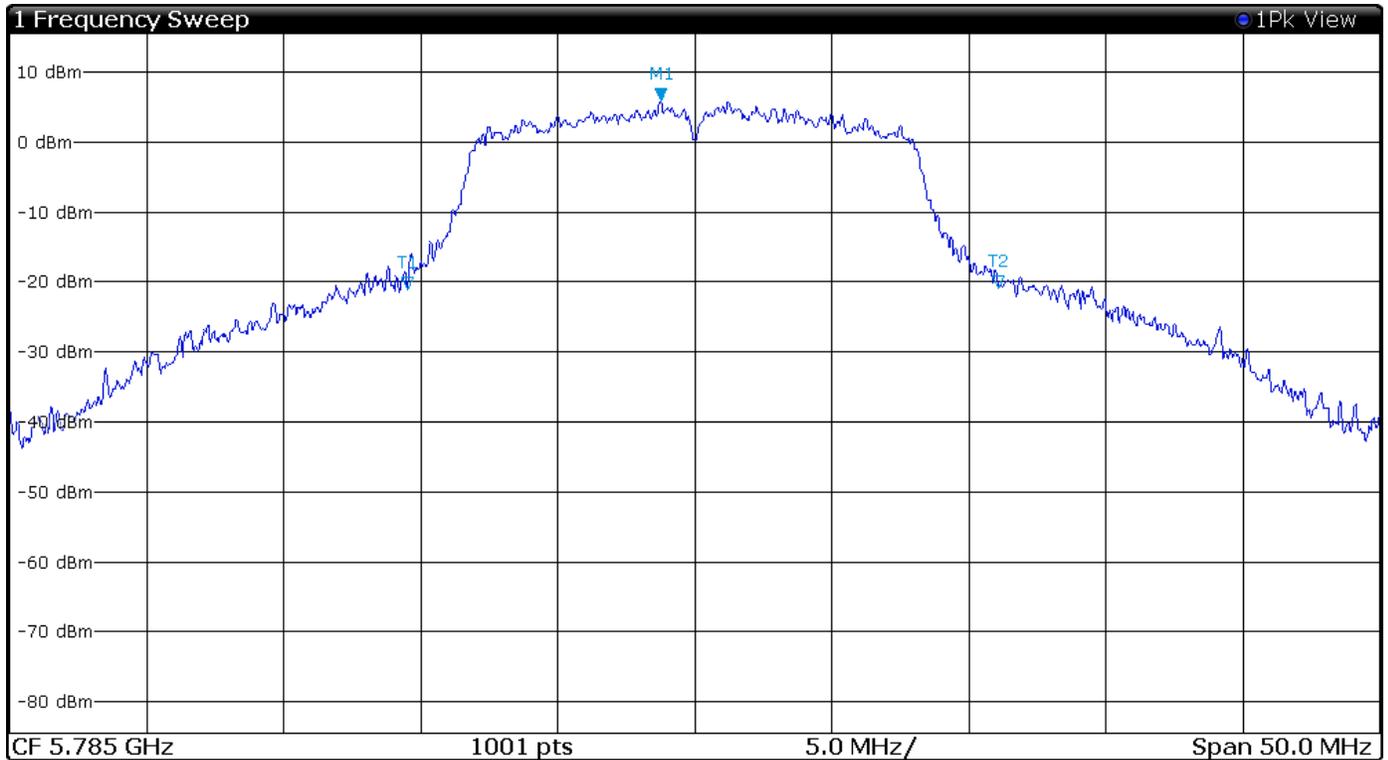

Center Freq: 5.785 GHz	Freq Offset: 0 Hz	Start: 5.76 GHz	Stop: 5.81 GHz
Span: 50 MHz	RBW: 200 kHz	Filter Type: Normal(3dB)	VBW: 1 MHz
SWT: 1.02 ms	Ref Level: 15.5 dBm	Level Offset: 0.5 dB	Rf Att: 15 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1	1	5.784 GHz	5.8 dBm	ndB	26 dB
T1	1	1	5.775 GHz	-21 dBm	ndB down BW	21.58 MHz
T2	1	1	5.796 GHz	-20.9 dBm	Q Factor	268


Figure 46 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 13 (802.11n)

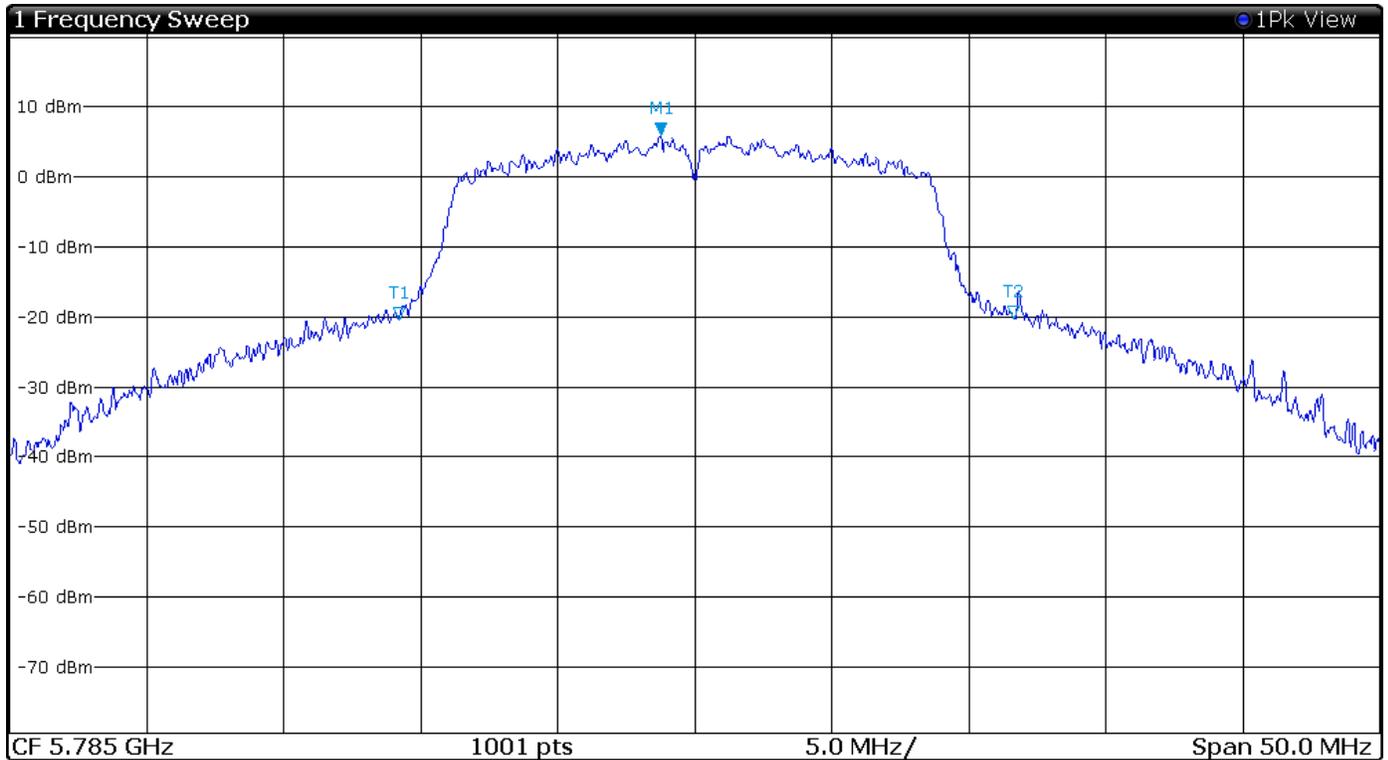

Center Freq: 5.785 GHz	Freq Offset: 0 Hz	Start: 5.76 GHz	Stop: 5.81 GHz
Span: 50 MHz	RBW: 200 kHz	Filter Type: Normal(3dB)	VBW: 1 MHz
SWT: 1.02 ms	Ref Level: 20.5 dBm	Level Offset: 0.5 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value	Function	Func Result
M1	1		5.784 GHz	5.9 dBm	ndB	26 dB
T1	1		5.774 GHz	-20.4 dBm	ndB down BW	22.43 MHz
T2	1		5.797 GHz	-20.3 dBm	Q Factor	257.9


Figure 47 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 14 (802.11n40)

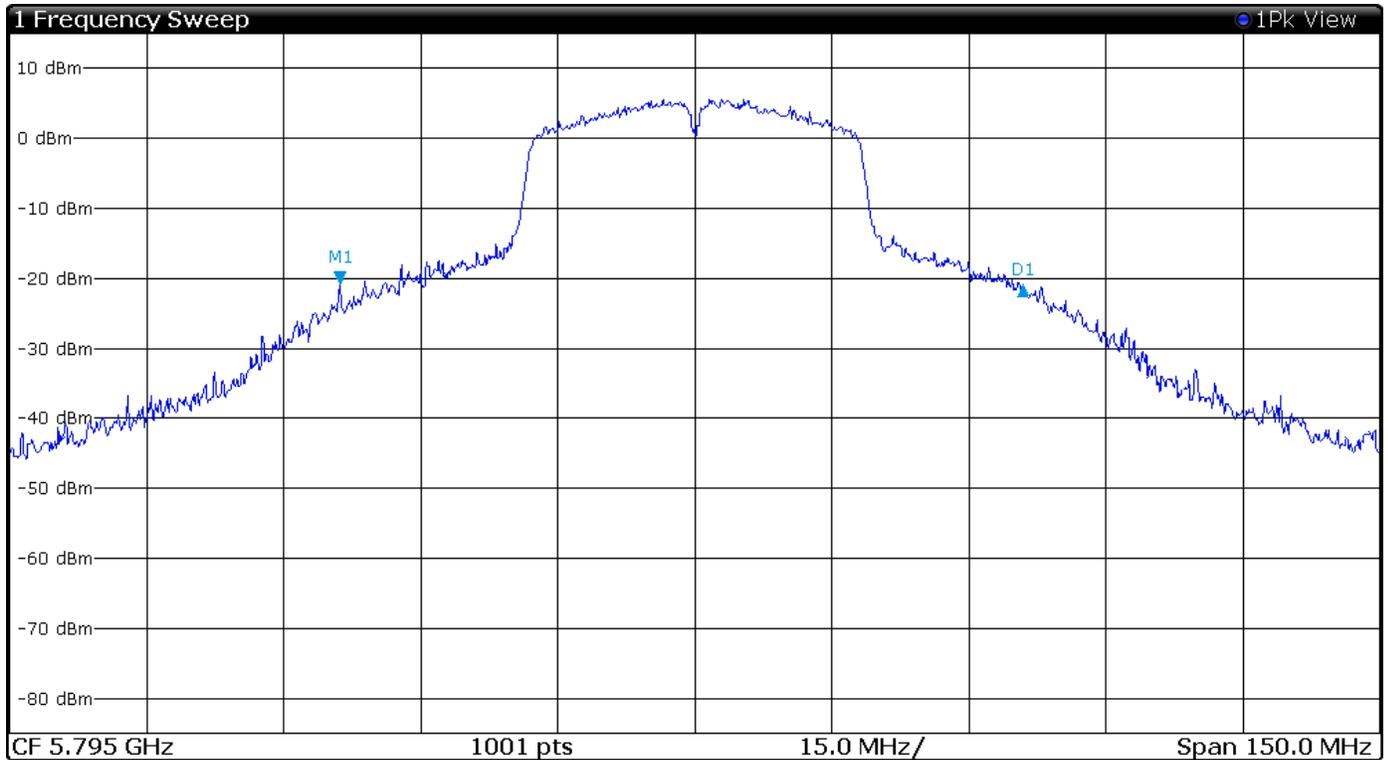

Center Freq: 5.795 GHz	Freq Offset: 0 Hz	Start: 5.695 GHz	Stop: 5.895 GHz
Span: 200 MHz	RBW: 2 MHz	Filter Type: Normal(3dB)	VBW: 10 MHz
SWT: 1.01 ms	Ref Level: 25 dBm	Level Offset: 0 dB	Rf Att: 25 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1	1		5.756 GHz	-20.9 dBm
T1	1		74.77 MHz	0.1 dB

Figure 48 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 15 (802.11ac80)

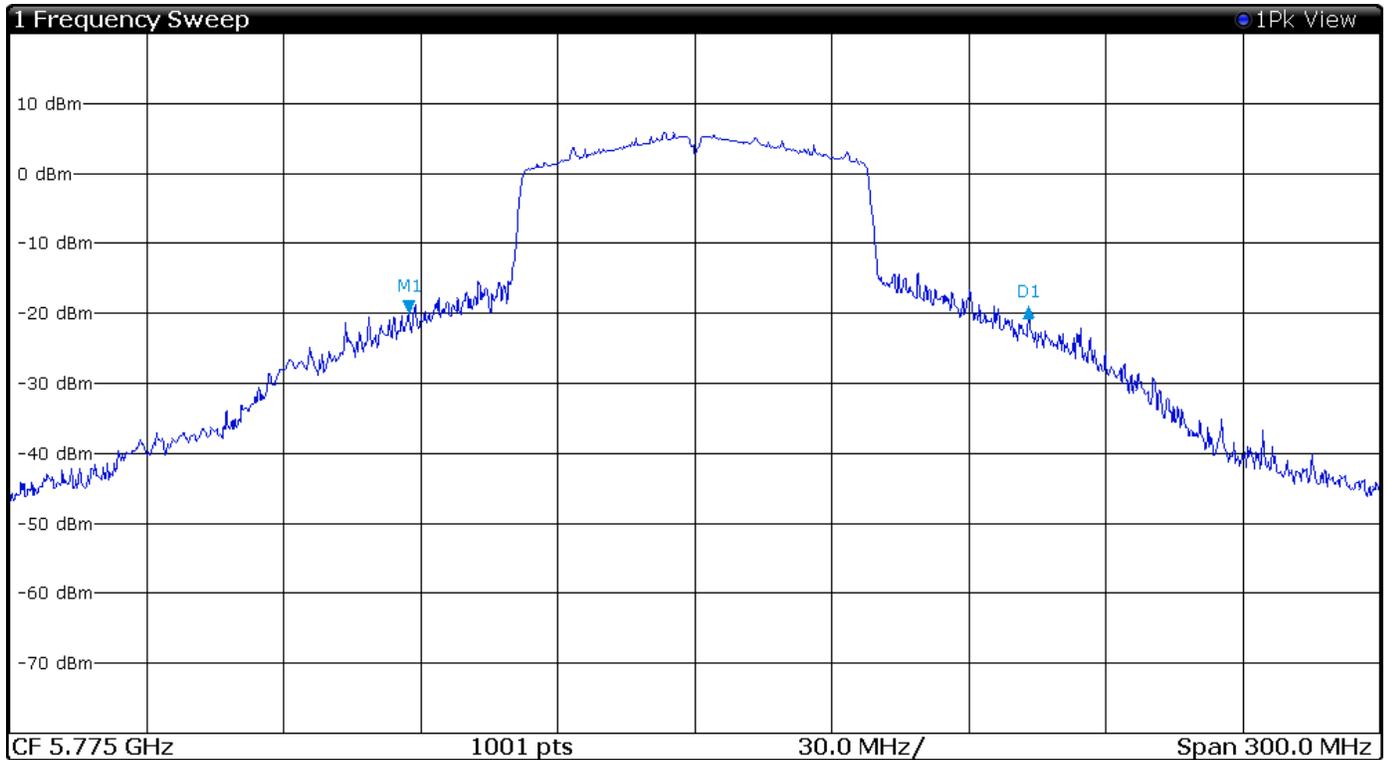

Center Freq: 5.775 GHz	Freq Offset: 0 Hz	Start: 5.625 GHz	Stop: 5.925 GHz
Span: 300 MHz	RBW: 1 MHz	Filter Type: Normal(3dB)	VBW: 3 MHz
SWT: 1.01 ms	Ref Level: 20 dBm	Level Offset: 0 dB	Rf Att: 20 dB
Input: 1 AC	Preamplifier: OFF	Preselector: Off	

Type	Ref	Trace	X-Value	Y-Value
M1	1	1	5.712 GHz	-19.9 dBm
T1	1	1	135.7 MHz	0.9 dB

Transmitter Emissions Data

Table 14 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 8 (802.11a)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5180.0	--	--	--	--	--	--	--
10360.0	57.7	43.8	57.0	43.9	68.3	-24.5	-24.4
15540.0	63.1	49.7	63.1	50.2	68.3	-18.6	-18.1
20720.0	65.9	52.1	65.2	52.5	68.3	-16.2	-15.8
25900.0	65.8	53.3	66.9	53.4	68.3	-15.0	-14.9
5200.0	--	--	--	--	--	--	--
10400.0	57.0	44.1	57.2	44.3	68.3	-24.2	-24.0
15600.0	62.5	49.3	62.9	49.9	68.3	-19.0	-18.4
20800.0	65.6	52.5	65.4	52.4	68.3	-15.8	-15.9
26000.0	67.4	53.8	66.7	53.7	68.3	-14.5	-14.6
5240.0	--	--	--	--	--	--	--
10480.0	58.1	44.8	58.5	44.8	68.3	-23.5	-23.5
15720.0	63.6	50.6	64.2	51.2	68.3	-17.7	-17.1
20960.0	65.4	52.8	66.0	52.7	68.3	-15.5	-15.6
26200.0	67.0	53.9	67.4	53.7	68.3	-14.4	-14.6
Band Edges							
5150.0	69.7	42.6	71.7	43.7	54.0	-11.4	-10.3
5350.0	54.7	41.0	54.0	40.1	54.0	-13.0	-13.9

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 15 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 9 (802.11n)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5180.0	--	--	--	--	--	--	--
10360.0	57.3	44.1	57.1	44.1	68.3	-24.2	-24.2
15540.0	63.4	50.3	63.9	50.9	68.3	-18.0	-17.4
20720.0	66.3	52.6	65.3	52.5	68.3	-15.7	-15.8
25900.0	66.4	53.5	66.2	53.4	68.3	-14.8	-14.9
5200.0	--	--	--	--	--	--	--
10400.0	57.0	44.1	57.4	44.0	68.3	-24.2	-24.3
15600.0	63.0	49.8	63.3	50.3	68.3	-18.5	-18.0
20800.0	65.3	52.3	65.3	52.2	68.3	-16.0	-16.1
26000.0	66.8	53.7	66.6	53.7	68.3	-14.6	-14.6
5240.0	--	--	--	--	--	--	--
10480.0	58.0	44.8	57.3	44.7	68.3	-23.5	-23.6
15720.0	63.2	50.4	63.4	50.6	68.3	-17.9	-17.7
20960.0	66.0	52.7	65.4	52.6	68.3	-15.6	-15.7
26200.0	67.3	53.7	67.2	53.7	68.3	-14.6	-14.6
Band Edges							
5150.0	73.1	45.4	68.4	43.6	54.0	-8.6	-10.4
5350.0	55.7	41.6	53.8	40.1	54.0	-12.4	-13.9

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 16 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 10 (802.11n40)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5190.0	--	--	--	--	--	--	--
10380.0	57.2	43.9	57.1	43.9	68.3	-24.4	-24.4
15570.0	62.6	49.9	63.3	50.0	68.3	-18.4	-18.3
20760.0	65.2	52.4	65.1	52.2	68.3	-15.9	-16.1
25950.0	66.4	53.1	66.3	53.2	68.3	-15.2	-15.1
5230.0	--	--	--	--	--	--	--
10460.0	57.8	44.8	57.7	44.9	68.3	-23.5	-23.4
15690.0	62.7	49.5	63.6	49.6	68.3	-18.8	-18.7
20920.0	65.2	52.2	65.4	52.1	68.3	-16.1	-16.2
26150.0	66.4	53.4	66.8	53.3	68.3	-14.9	-15.0
Band Edges							
5150.0	72.1	44.9	70.2	44.6	54.0	-9.1	-9.4
5350.0	54.2	39.4	54.0	39.7	54.0	-14.6	-14.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 17 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 11 (802.11ac80)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5210.0	--	--	--	--	--	--	--
10420.0	57.4	44.3	57.6	44.3	68.3	-24.0	-24.0
15630.0	60.7	47.9	61.4	47.9	68.3	-20.4	-20.4
20840.0	65.4	52.0	65.9	51.9	68.3	-16.3	-16.4
26050.0	67.2	54.1	67.6	54.2	68.3	-14.2	-14.1
Band Edges							
5150.0	72.1	47.4	70.5	46.2	54.0	-6.6	-7.8
5350.0	53.1	39.0	52.4	38.9	54.0	-15.0	-15.1

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 18 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 12 (802.11a)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5745.0	--	--	--	--	--	--	--
11490.0	57.9	45.0	58.0	44.9	68.3	-23.3	-23.4
17235.0	62.4	49.7	63.4	50.7	68.3	-18.6	-17.6
22980.0	65.5	52.8	65.5	52.8	68.3	-15.5	-15.5
28725.0	69.1	55.8	70.2	55.8	68.3	-12.5	-12.5
5785.0	--	--	--	--	--	--	--
11570.0	58.2	44.9	57.8	44.9	68.3	-23.4	-23.4
17355.0	63.8	51.1	63.9	50.9	68.3	-17.2	-17.4
23140.0	65.4	52.7	65.8	52.7	68.3	-15.6	-15.6
28925.0	68.9	55.5	69.3	55.5	68.3	-12.8	-12.8
5825.0	--	--	--	--	--	--	--
11650.0	59.0	45.5	58.8	45.4	68.3	-22.8	-22.9
17475.0	64.7	51.8	65.0	51.5	68.3	-16.5	-16.8
23300.0	65.3	52.7	65.7	52.7	68.3	-15.6	-15.6
29125.0	68.0	55.2	68.4	55.2	68.3	-13.1	-13.1
Band Edges							
5725.0	79.7	55.5	77.4	53.1	78.2	-22.7	-25.1
5850.0	74.1	48.6	72.2	47.5	78.2	-29.6	-30.7

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 19 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 13 (802.11n)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5745.0	--	--	--	--	--	--	--
11490.0	58.8	45.2	57.8	45.1	68.3	-23.1	-23.2
17235.0	63.1	49.7	62.7	49.6	68.3	-18.6	-18.7
22980.0	66.1	52.7	65.2	52.6	68.3	-15.6	-15.7
28725.0	68.7	55.8	69.2	55.8	68.3	-12.5	-12.5
5785.0	--	--	--	--	--	--	--
11570.0	59.1	45.3	58.6	45.1	68.3	-23.0	-23.2
17355.0	63.9	51.0	64.1	50.8	68.3	-17.3	-17.5
23140.0	65.5	52.6	65.9	52.6	68.3	-15.7	-15.7
28925.0	68.6	55.5	68.2	55.5	68.3	-12.8	-12.8
5825.0	--	--	--	--	--	--	--
11650.0	58.1	45.4	58.6	45.8	68.3	-22.9	-22.5
17475.0	65.0	51.9	64.4	51.8	68.3	-16.4	-16.5
23300.0	65.3	52.7	65.3	52.7	68.3	-15.6	-15.6
29125.0	68.3	55.2	68.6	55.1	68.3	-13.1	-13.2
Band Edges							
5725.0	79.9	55.7	74.0	49.9	78.2	-22.5	-28.3
5850.0	68.0	44.8	62.9	41.9	78.2	-33.4	-36.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 20 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 14 (802.11n40)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5755.0	--	--	--	--	--	--	--
11510.0	58.1	44.9	58.7	45.2	68.3	-23.4	-23.1
17265.0	62.5	49.5	62.8	49.6	68.3	-18.8	-18.7
23020.0	65.2	52.7	65.4	52.7	68.3	-15.6	-15.6
28775.0	68.4	55.1	68.1	55.1	68.3	-13.2	-13.2
5795.0	--	--	--	--	--	--	--
11590.0	58.4	45.6	58.3	45.2	68.3	-22.7	-23.1
17385.0	64.5	51.1	64.6	51.1	68.3	-17.2	-17.2
23180.0	65.5	52.6	65.5	52.6	68.3	-15.7	-15.7
28975.0	67.8	54.9	68.6	54.9	68.3	-13.4	-13.4
Band Edges							
5725.0	75.8	55.8	79.6	59.2	78.2	-22.4	-19.0
5850.0	57.3	39.5	61.1	41.4	78.2	-38.7	-36.8

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 21 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 15 (802.11ac80)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5775.0	--	--	--	--	--	--	--
11550.0	57.6	45.1	58.9	45.4	68.3	-23.2	-22.9
17325.0	64.4	51.3	64.6	51.4	68.3	-17.0	-16.9
23100.0	65.7	52.7	65.8	52.7	68.3	-15.6	-15.6
28875.0	67.6	54.5	67.4	54.5	68.3	-13.8	-13.8
Band Edges							
5725.0	73.1	52.2	78.4	56.7	78.2	-26.0	-21.5
5850.0	66.8	45.8	71.0	50.0	78.2	-32.4	-28.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 22 Transmitter Antenna Port Data (U-NII-1)

Frequency MHz	Antenna Port Conducted Output Power (Watts)	99% Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm/MHz)
20 MHz Mode 8 (802.11a)			
5180	0.026	17,334.4	13.7
5200	0.026	17,347.8	13.2
5240	0.028	17,330.4	13.3
20 MHz Mode 9 (802.11n)			
5180	0.026	18,108.3	13.2
5200	0.026	18,168.6	13.2
5240	0.027	18,127.9	13.0
40 MHz Mode 10 (802.11n40)			
5190	0.014	36,379.6	7.7
5230	0.023	36,440.6	9.7
80 MHz Mode 11 (802.11ac80)			
5210	0.016	75,154.3	4.1

Table 23 Transmitter Antenna Port Data (U-NII-3)

Frequency MHz	Antenna Port Conducted Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	6-dB Occupied Bandwidth (kHz)	26-dB Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm/500kHz)
20 MHz Mode 12 (802.11a)					
5745	0.029	17,893.9	15,634.0	20,730.0	10.2
5785	0.030	17,933.1	15,784.0	21,580.0	10.1
5825	0.029	18,268.7	15,634.0	21,430.0	10.2
20 MHz Mode 13 (802.11n)					
5745	0.029	18,550.0	15,485.0	21,480.0	10.3
5785	0.029	18,678.6	15,435.0	22,430.0	10.3
5825	0.029	18,908.0	15,435.0	21,230.0	10.1
40 MHz Mode 14 (802.11n40)					
5755	0.023	37,628.5	35,030.0	60,310.0	6.4
5795	0.022	38,323.4	35,000.0	74,770.0	6.2
80 MHz Mode 15 (802.11ac80)					
5775	0.025	76,747.4	75,160.0	135,700.0	3.0

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of 47 CFR Part 15.407 and Industry Canada RSS-247 Issue 2. The maximum average conducted power delivered to antenna was 0.028-Watts in the U-NII-1 Band and 0.030-Watts in the U-NII-3 Band. The radiated harmonic emissions provided a minimum margin of -12.5 dB below requirements. There were no other significantly measurable emissions in the restricted bands other than those presented in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. There were no other deviations or exceptions to the requirements.



NVLAP Lab Code 200087-0

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Additional Test Equipment
- Annex C Rogers Qualifications
- Annex D Rogers Labs Certificate of Accreditation

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: A04159
Test: 210308
Test to: 47CFR 15E, RSS-Gen RSS-247
File: A04159 NII TstRpt 210308

SN's: 3354564095 / 3354564120
FCC ID: IPH-04159
IC: 1792A-04159
Date: July 22, 2021
Page 95 of 100

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16–4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.14
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Test Equipment

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
<input checked="" type="checkbox"/> LISN	FCC	FCC-LISN-50-25-10(1PA) (160611)	.15-30MHz	4/21/2020	4/21/2021
<input checked="" type="checkbox"/> LISN	Compliance Design	FCC-LISN-2.Mod.cd,(126)	.15-30MHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)	9kHz-40 GHz	10/14/2020	10/14/2021
<input type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)	9kHz-40 GHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303070)	9kHz-40 GHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Antenna	Com Power	AL-130 (121055)	.001-30 MHz	10/14/2020	10/14/2021
<input type="checkbox"/> Antenna:	EMCO	6509	.001-30 MHz	10/14/2020	10/14/2022
<input type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	10/14/2020	10/14/2021
<input type="checkbox"/> Antenna:	Schwarzbeck Model	VHBB 9124 (9124-627)		4/21/2020	4/21/2021
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	10/14/2020	10/14/2021
<input type="checkbox"/> Antenna	ETS-Lindgren	3147 (40582)	200-1000MHz	10/14/2020	10/14/2022
<input type="checkbox"/> Antenna:	Schwarzbeck Model:	VULP 9118 A (VULP 9118 A-534)		4/21/2020	4/21/2021
<input checked="" type="checkbox"/> Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	4/21/2020	4/21/2022
<input type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	10/14/2020	10/14/2022
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	4/21/2020	4/21/2021
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	3/2/2021	3/2/2022
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	1/12/2021	1/12/2022
<input type="checkbox"/> Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2027
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-840A (461328)	18-40 GHz	10/14/2020	10/14/2021
<input type="checkbox"/> Power Meter	Agilent	N1911A with N1921A	0.05-40 GHz	4/21/2020	4/21/2021
<input type="checkbox"/> Generator	Rohde & Schwarz	SMB100A6 (100150)	20Hz-6 GHz	4/21/2020	4/21/2021
<input type="checkbox"/> Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	4/21/2020	4/21/2021
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50722 (009).9G notch	30-18000 MHz	4/21/2020	4/21/2021
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50114 (017)1.5G HPF	30-18000 MHz	4/21/2020	4/21/2021
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	4/21/2020	4/21/2021
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50105 (059) 6G HPF	30-18000 MHz	4/21/2020	4/21/2021
<input type="checkbox"/> RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-18000 MHz	4/21/2020	4/21/2021
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-18000 MHz	4/21/2020	4/21/2021
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-18000 MHz	4/21/2020	4/21/2021
<input type="checkbox"/> Attenuator	Fairview	SA6NFNF100W-40 (1625)	30-18000 MHz	4/21/2020	4/18/2021
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1436)	30-6000 MHz	4/21/2020	4/21/2021
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	4/21/2020	4/21/2021
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	4/21/2020	4/21/2021
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	4/21/2020	4/21/2021
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-6W2+ (1736)	30-6000 MHz	4/21/2020	4/21/2021
<input checked="" type="checkbox"/> Weather station	Davis	6312 (A81120N075)		11/4/2020	11/4/2021

Rogers Labs, Inc.
 4405 West 259th Terrace
 Louisburg, KS 66053
 Phone/Fax: (913) 837-3214
 Revision 1

Garmin International, Inc.
 Model: A04159
 Test: 210308
 Test to: 47CFR 15E, RSS-Gen RSS-247
 File: A04159 NII TstRpt 210308

SN's: 3354564095 / 3354564120
 FCC ID: IPH-04159
 IC: 1792A-04159
 Date: July 22, 2021
 Page 97 of 100

List of Test Equipment

	Calibration	Date (m/d/y)	Due
<input type="checkbox"/> Frequency Counter: Leader LDC-825 (8060153)		4/21/2020	4/21/2021
<input type="checkbox"/> LISN: Com-Power Model LI-220A		10/14/2020	10/14/2021
<input type="checkbox"/> LISN: Com-Power Model LI-550C		10/14/2020	10/14/2021
<input type="checkbox"/> ISN: Com-Power Model ISN T-8		4/21/2020	4/21/2021
<input type="checkbox"/> LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08		4/21/2020	4/21/2021
<input type="checkbox"/> Cable Huber & Suhner Inc. Sucoflex102ea(1.5M)(303072) 9kHz-40 GHz		10/14/2020	10/14/2021
<input type="checkbox"/> Cable Huber & Suhner Inc. Sucoflex102ea(L1M)(281183) 9kHz-40 GHz		10/14/2020	10/14/2021
<input type="checkbox"/> Cable Huber & Suhner Inc. Sucoflex102ea(L4M)(281184) 9kHz-40 GHz		10/14/2020	10/14/2021
<input type="checkbox"/> Cable Huber & Suhner Inc. Sucoflex102ea(L10M)(317546)9kHz-40 GHz		10/14/2020	10/14/2021
<input type="checkbox"/> Cable Time Microwave 4M-750HF290-750 (4M) 9kHz-24 GHz		10/14/2020	10/14/2021
<input type="checkbox"/> RF Filter Micro-Tronics BRC17663 (001) 9.3-9.5 notch 30-1800 MHz		4/21/2020	4/21/2021
<input type="checkbox"/> RF Filter Micro-Tronics BRC19565 (001) 9.2-9.6 notch 30-1800 MHz		10/16/2018	4/21/2021
<input type="checkbox"/> Analyzer HP 8562A (3051A05950) 9kHz-125GHz		4/21/2020	4/21/2021
<input type="checkbox"/> Analyzer HP External Mixers11571, 11970 25GHz-110GHz		4/18/2015	4/18/2025
<input type="checkbox"/> Analyzer HP 8591EM (3628A00871)		4/21/2020	4/21/2021
<input type="checkbox"/> Wave Form Generator Keysight 33512B (MY57400128)		4/21/2020	4/21/2021
<input type="checkbox"/> Antenna: Solar 9229-1 & 9230-1		2/22/2021	2/22/2022
<input type="checkbox"/> CDN: Com-Power Model CDN325E		10/14/2020	10/14/2021
<input type="checkbox"/> Injection Clamp Luthi Model EM101		10/14/2020	10/14/2021
<input type="checkbox"/> Oscilloscope Scope: Tektronix MDO 4104		2/22/2021	2/22/2022
<input type="checkbox"/> EMC Transient Generator HVT TR 3000		2/22/2021	2/22/2022
<input type="checkbox"/> AC Power Source (Ametech, California Instruments)		2/22/2021	2/22/2022
<input type="checkbox"/> Field Intensity Meter: EFM-018		2/22/2021	2/22/2022
<input type="checkbox"/> ESD Simulator: MZ-15		2/22/2021	2/22/2022
<input type="checkbox"/> R.F. Power Amp ACS 230-50W			not required
<input type="checkbox"/> R.F. Power Amp EIN Model: A301			not required
<input type="checkbox"/> R.F. Power Amp A.R. Model: 10W 1010M7			not required
<input type="checkbox"/> R.F. Power Amp A.R. Model: 50U1000			not required
<input checked="" type="checkbox"/> Shielded Room			not required

Rogers Labs, Inc.
 4405 West 259th Terrace
 Louisburg, KS 66053
 Phone/Fax: (913) 837-3214
 Revision 1

Garmin International, Inc.
 Model: A04159
 Test: 210308
 Test to: 47CFR 15E, RSS-Gen RSS-247
 File: A04159 NII TstRpt 210308

SN's: 3354564095 / 3354564120
 FCC ID: IPH-04159
 IC: 1792A-04159
 Date: July 22, 2021
 Page 98 of 100



NVLAP Lab Code 200087-0

Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 35 years’ experience in the field of electronics. Working experience includes six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

Positions Held:

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background:

Bachelor of Science Degree in Electrical Engineering from Kansas State University

Bachelor of Science Degree in Business Administration Kansas State University

Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: A04159
Test: 210308
Test to: 47CFR 15E, RSS-Gen RSS-247
File: A04159 NII TstRpt 210308

SN’s: 3354564095 / 3354564120
FCC ID: IPH-04159
IC: 1792A-04159
Date: July 22, 2021
Page 99 of 100

Annex D Laboratory Certificate of Accreditation

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 200087-0

Rogers Labs, Inc.
Louisburg, KS

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2021-02-19 through 2022-03-31
Effective Dates




For the National Voluntary Laboratory Accreditation Program

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: A04159
Test: 210308
Test to: 47CFR 15E, RSS-Gen RSS-247
File: A04159 NII TstRpt 210308

SN's: 3354564095 / 3354564120
FCC ID: IPH-04159
IC: 1792A-04159
Date: July 22, 2021
Page 100 of 100