


Helm Master EX 6X9 MOB Tag and Wireless Controller Rigging Guide and Operation Manual

Wireless Controller Optional harness (Triple engine/Quad engine/Quint engine)

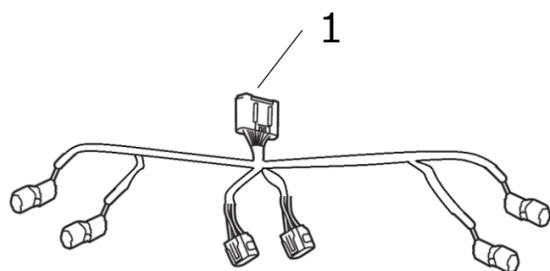

No.	Parts name	Q'ty	Part No.	Remarks
1	Extension harness	1	6X9-87226-00	

Installing the wireless hub unit assembly


1. Determine the wireless hub unit assembly installation position.
2. Make holes in the console using the template.

NOTICE


- Do not cover the wireless hub unit with metal, or you may not receive signals.
- Make sure the wireless joystick screen to ensure that level 3 reception is met at all locations on the boat.




6X9 single system

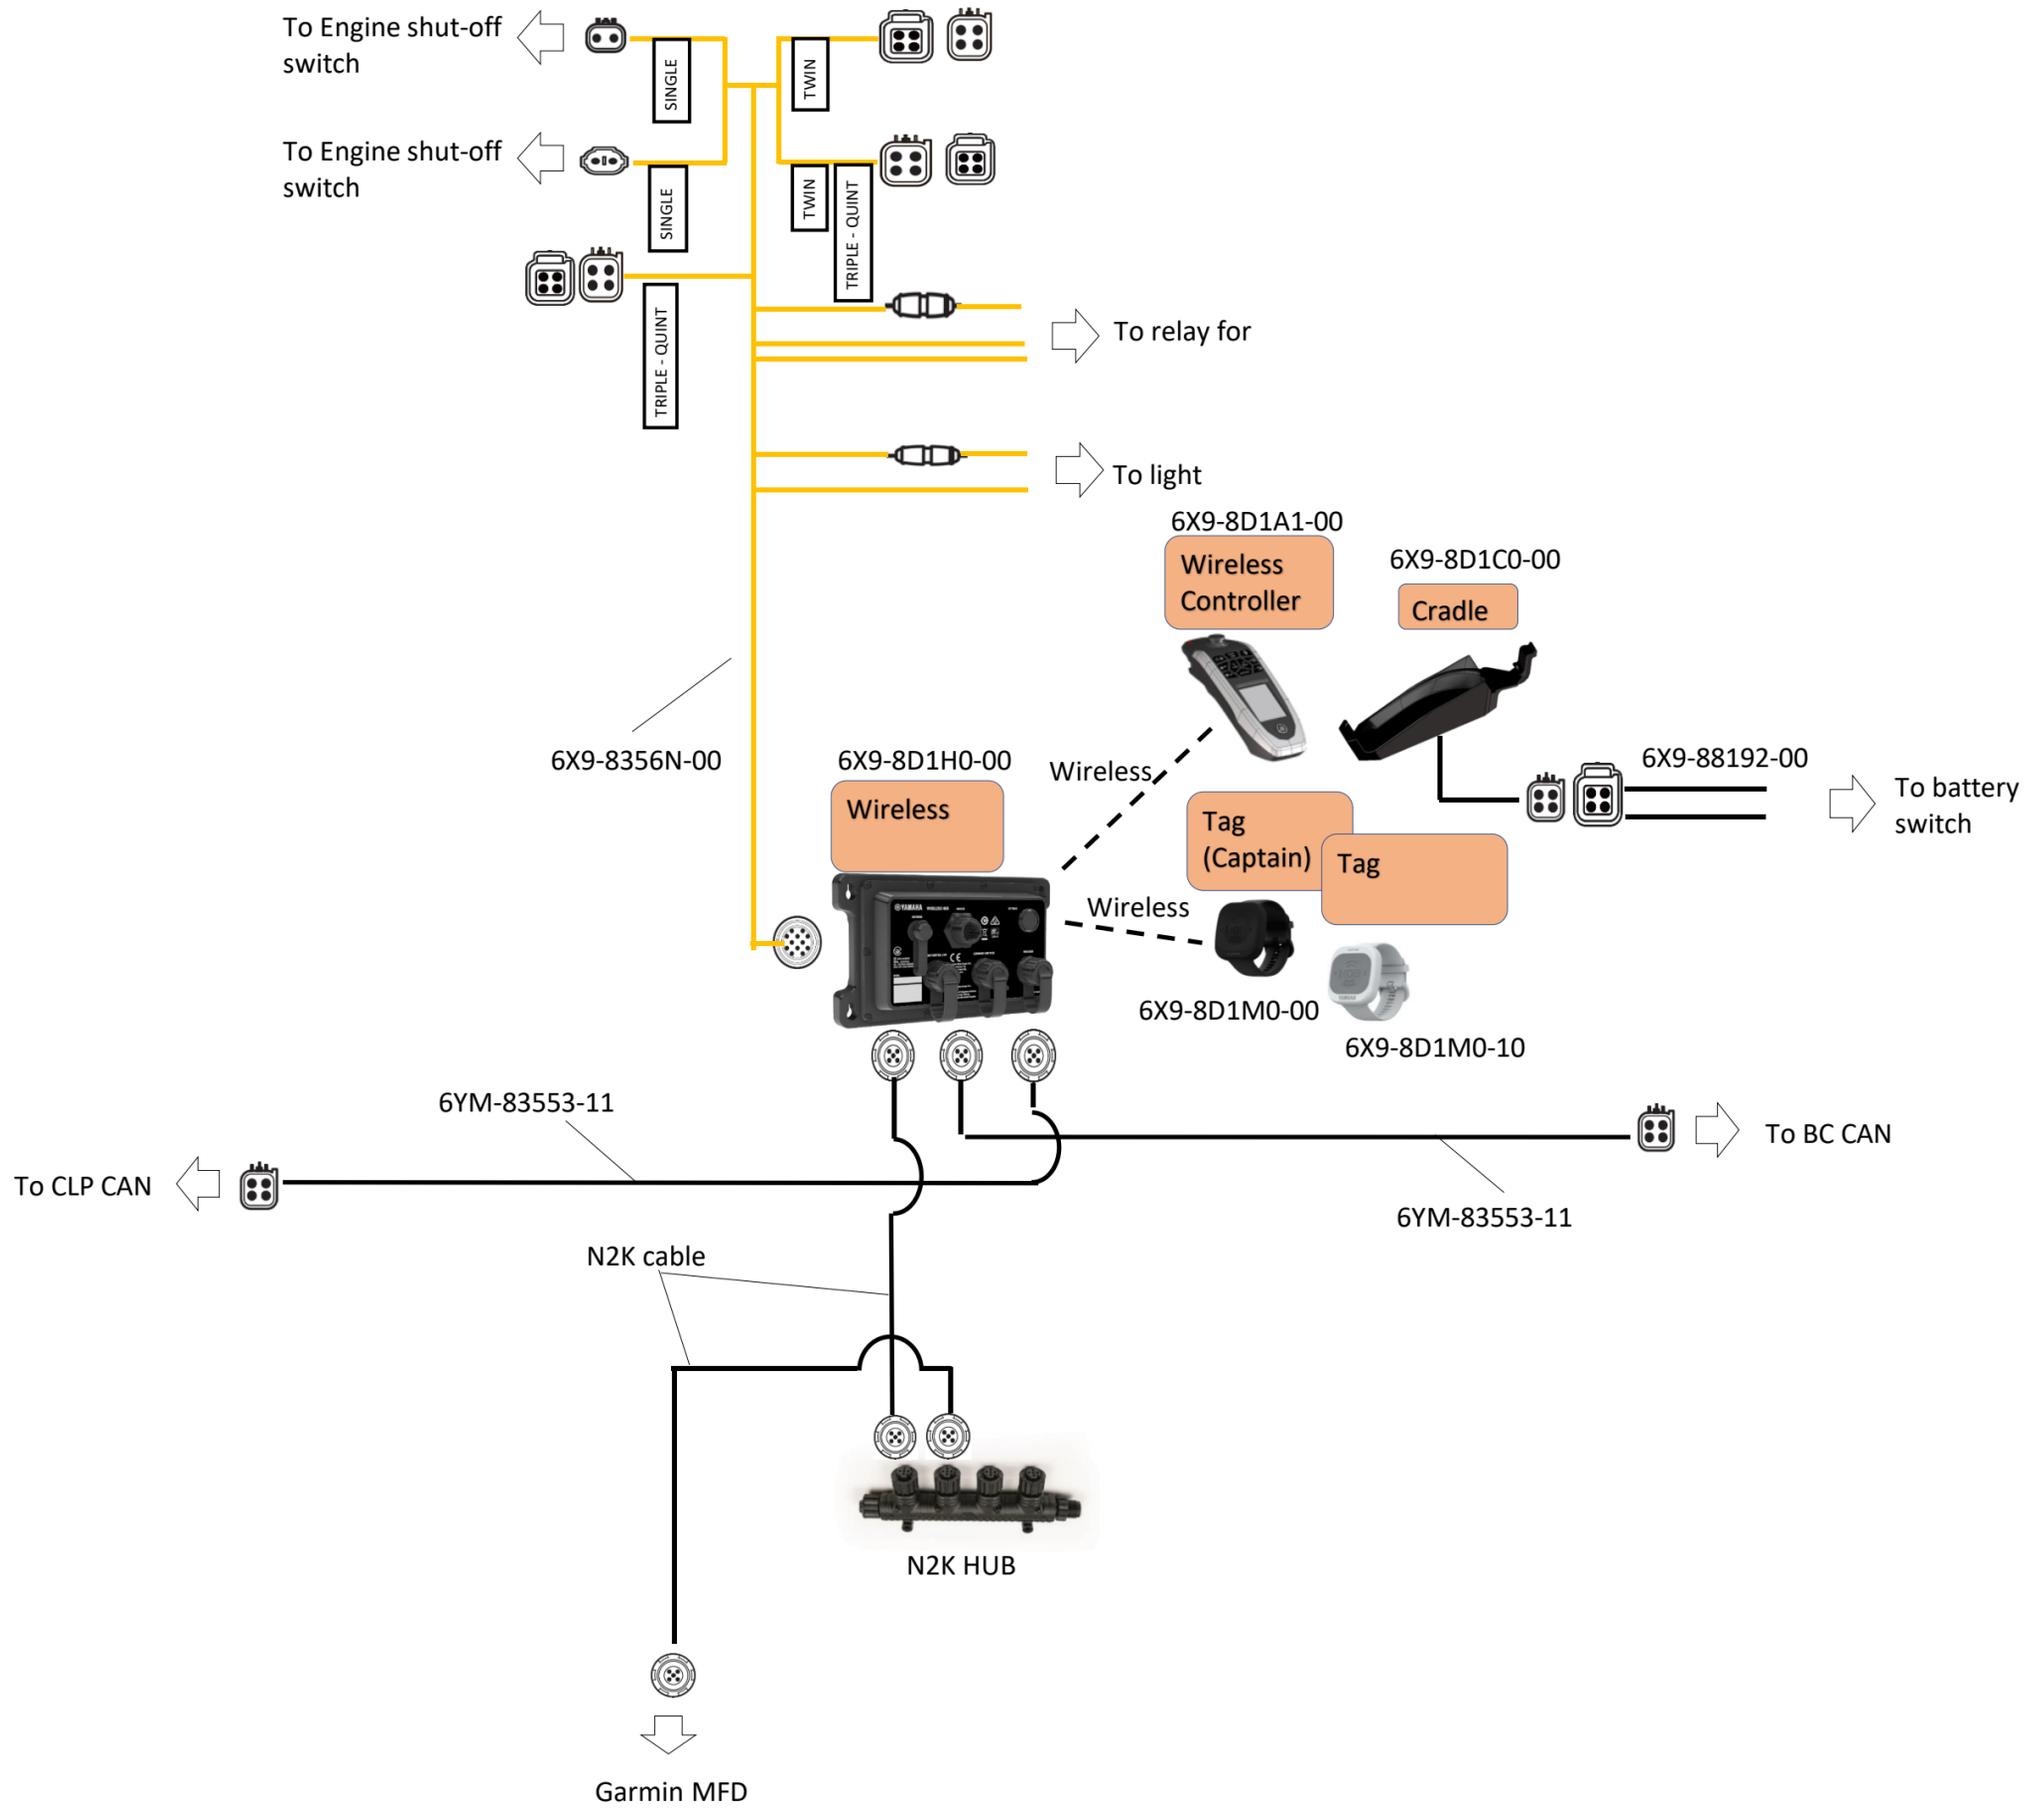


6X9 twin system

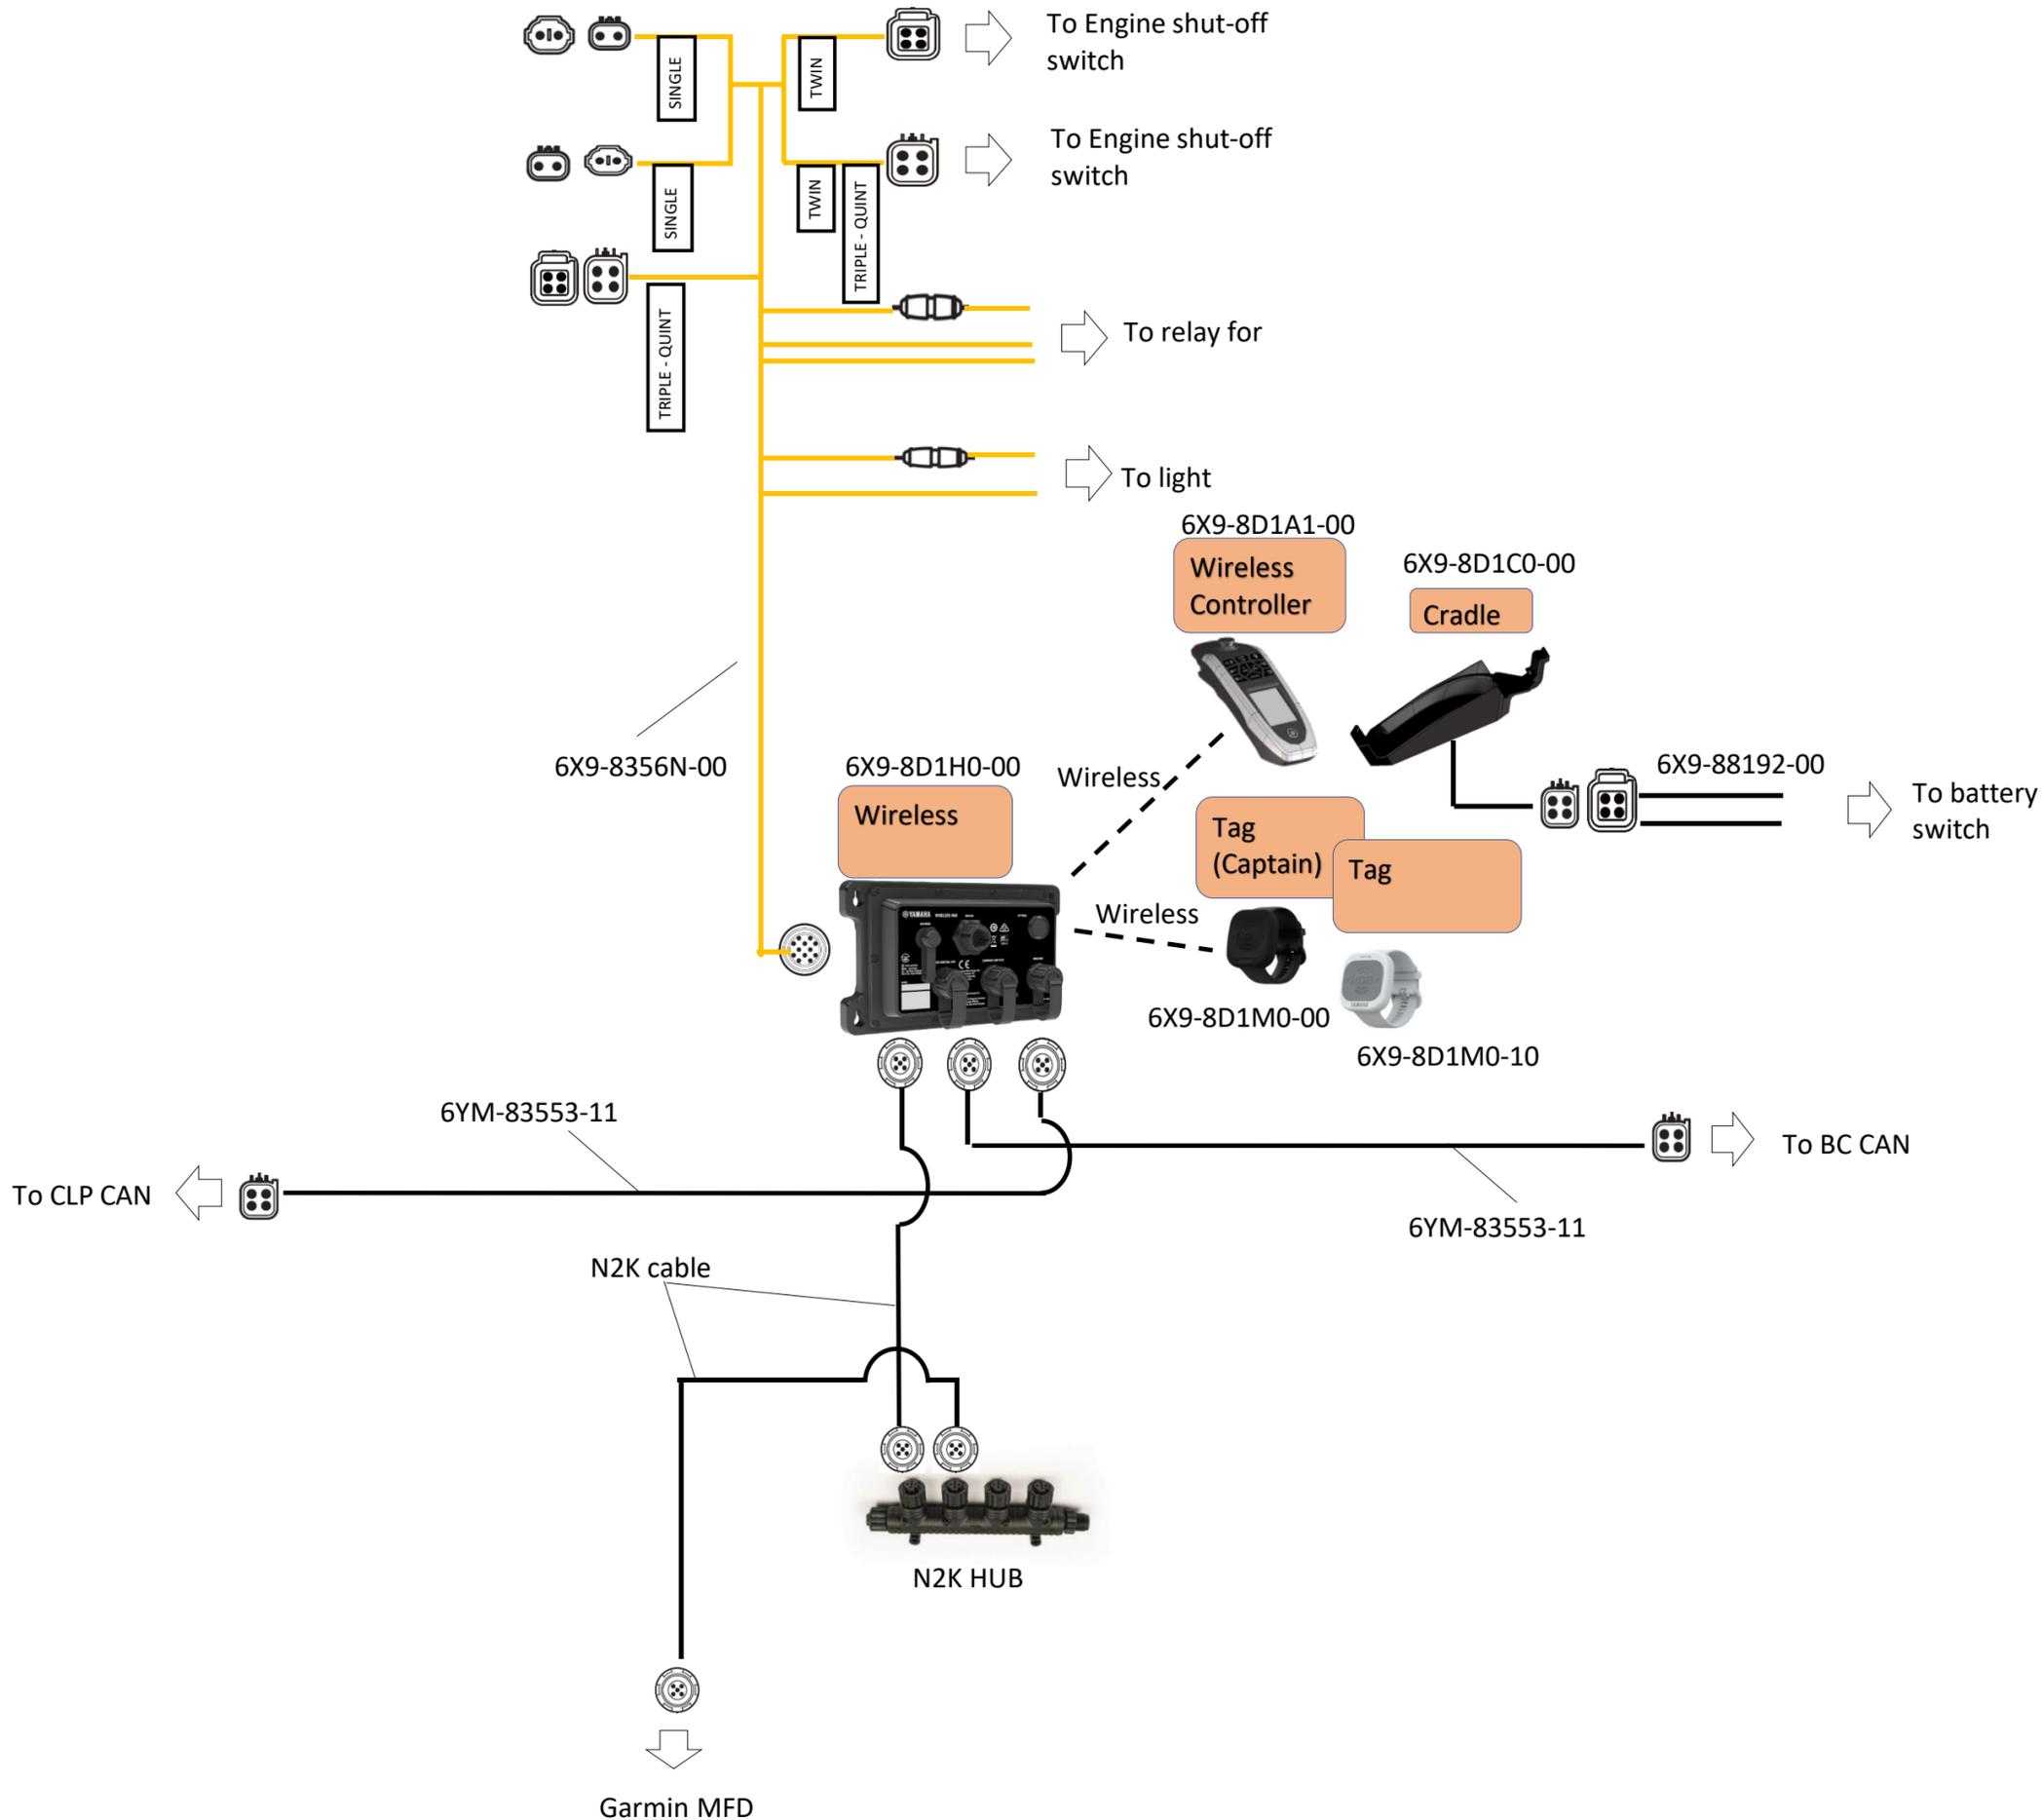

6X9 triple system

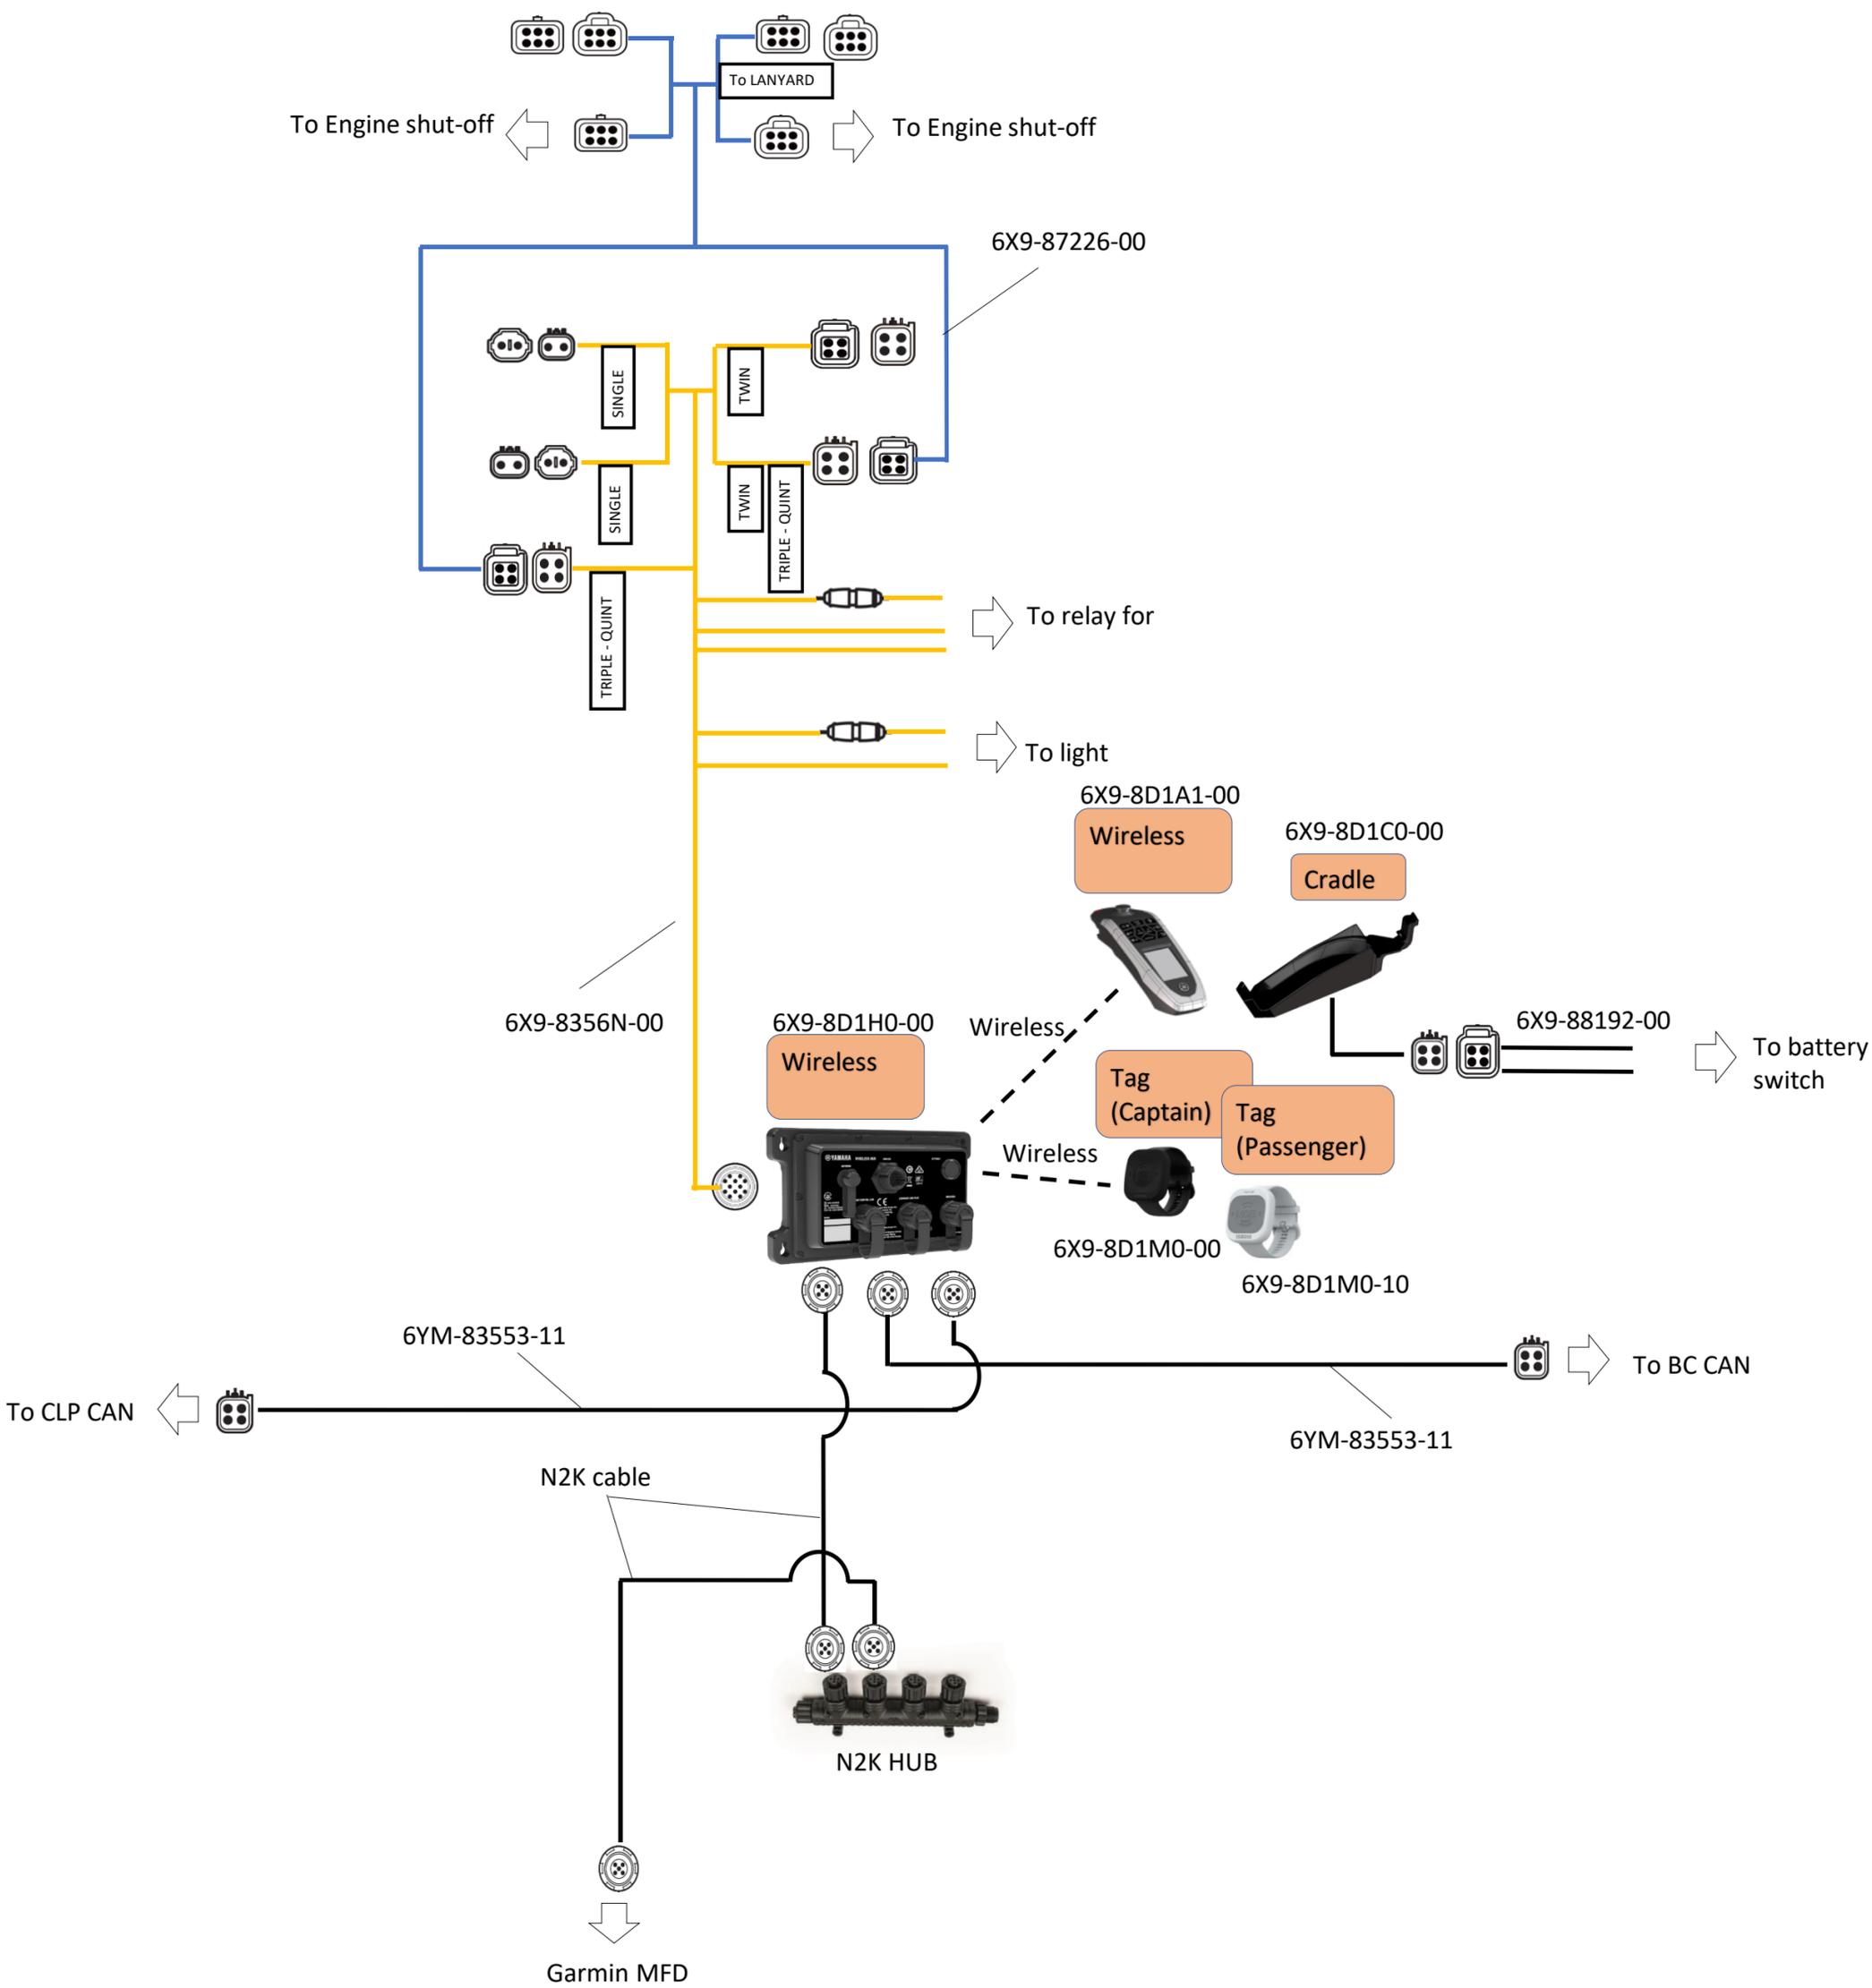

6X9 Quad/Quint system

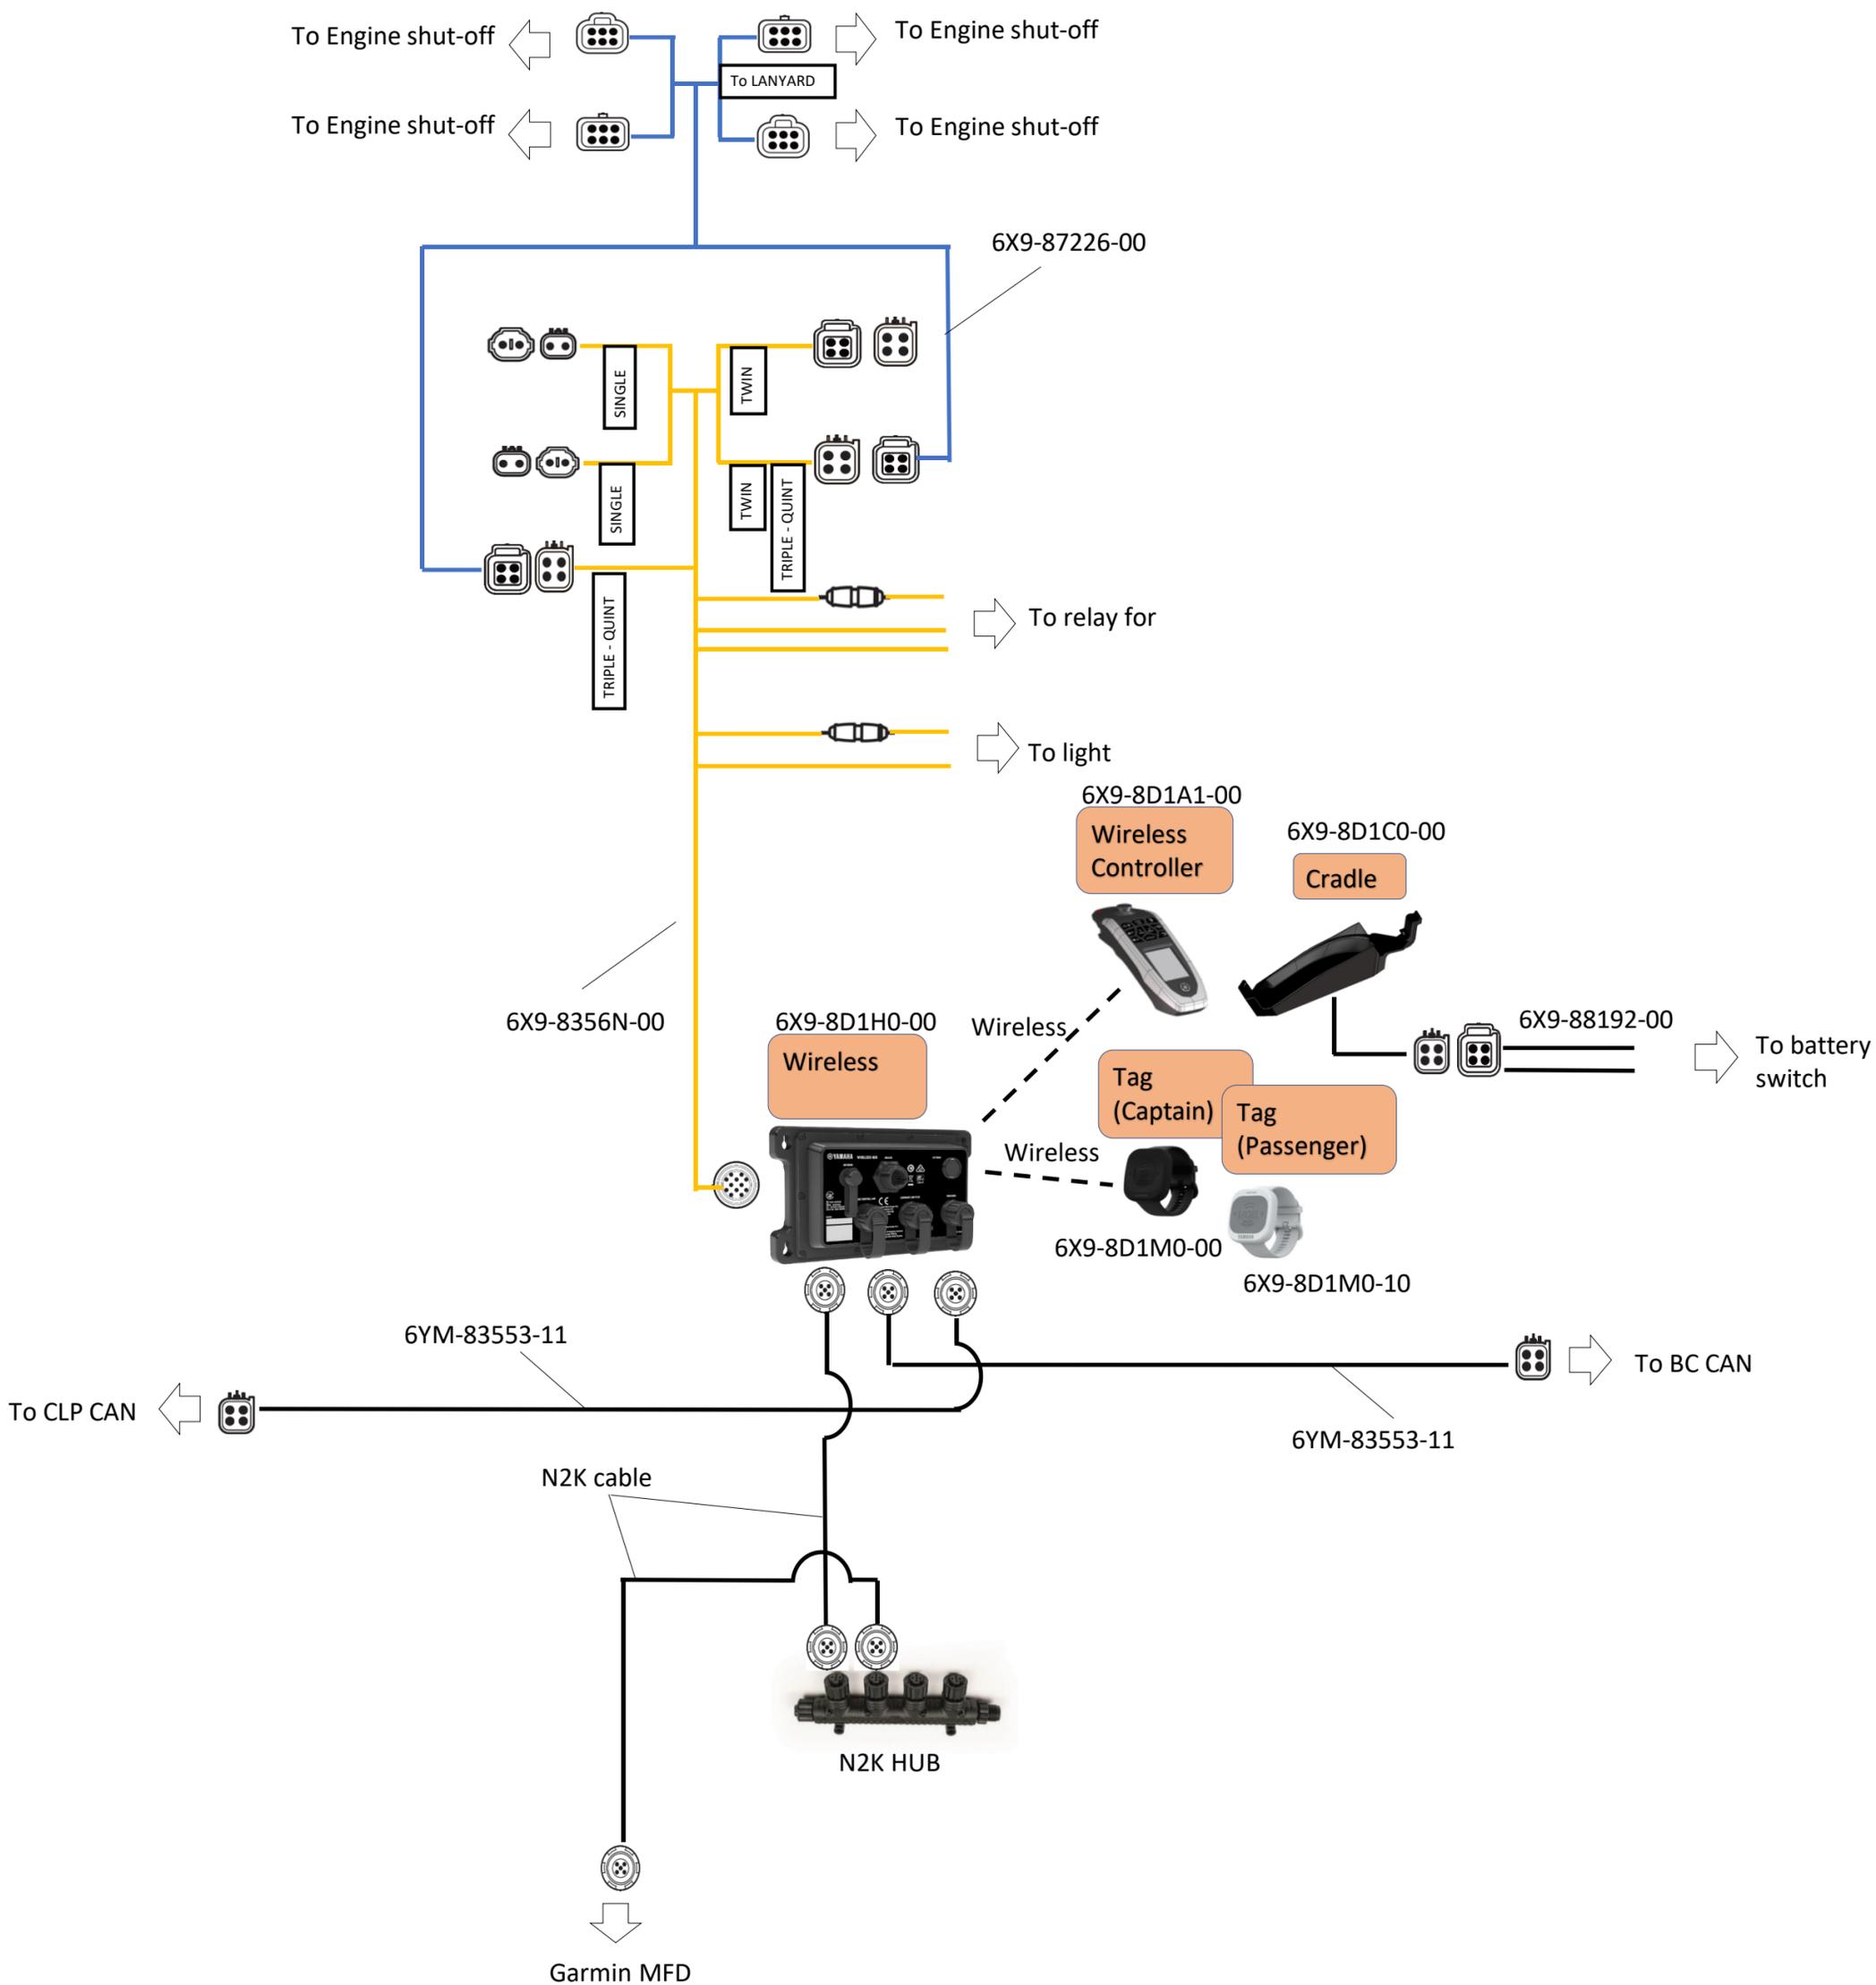

MOB tag


MOB tag settings

Pairing

TIP:

- Up to one the captain Tag and up to the seven passenger tags can be paired.

1. Select “New connection” from “Wireless Device”.

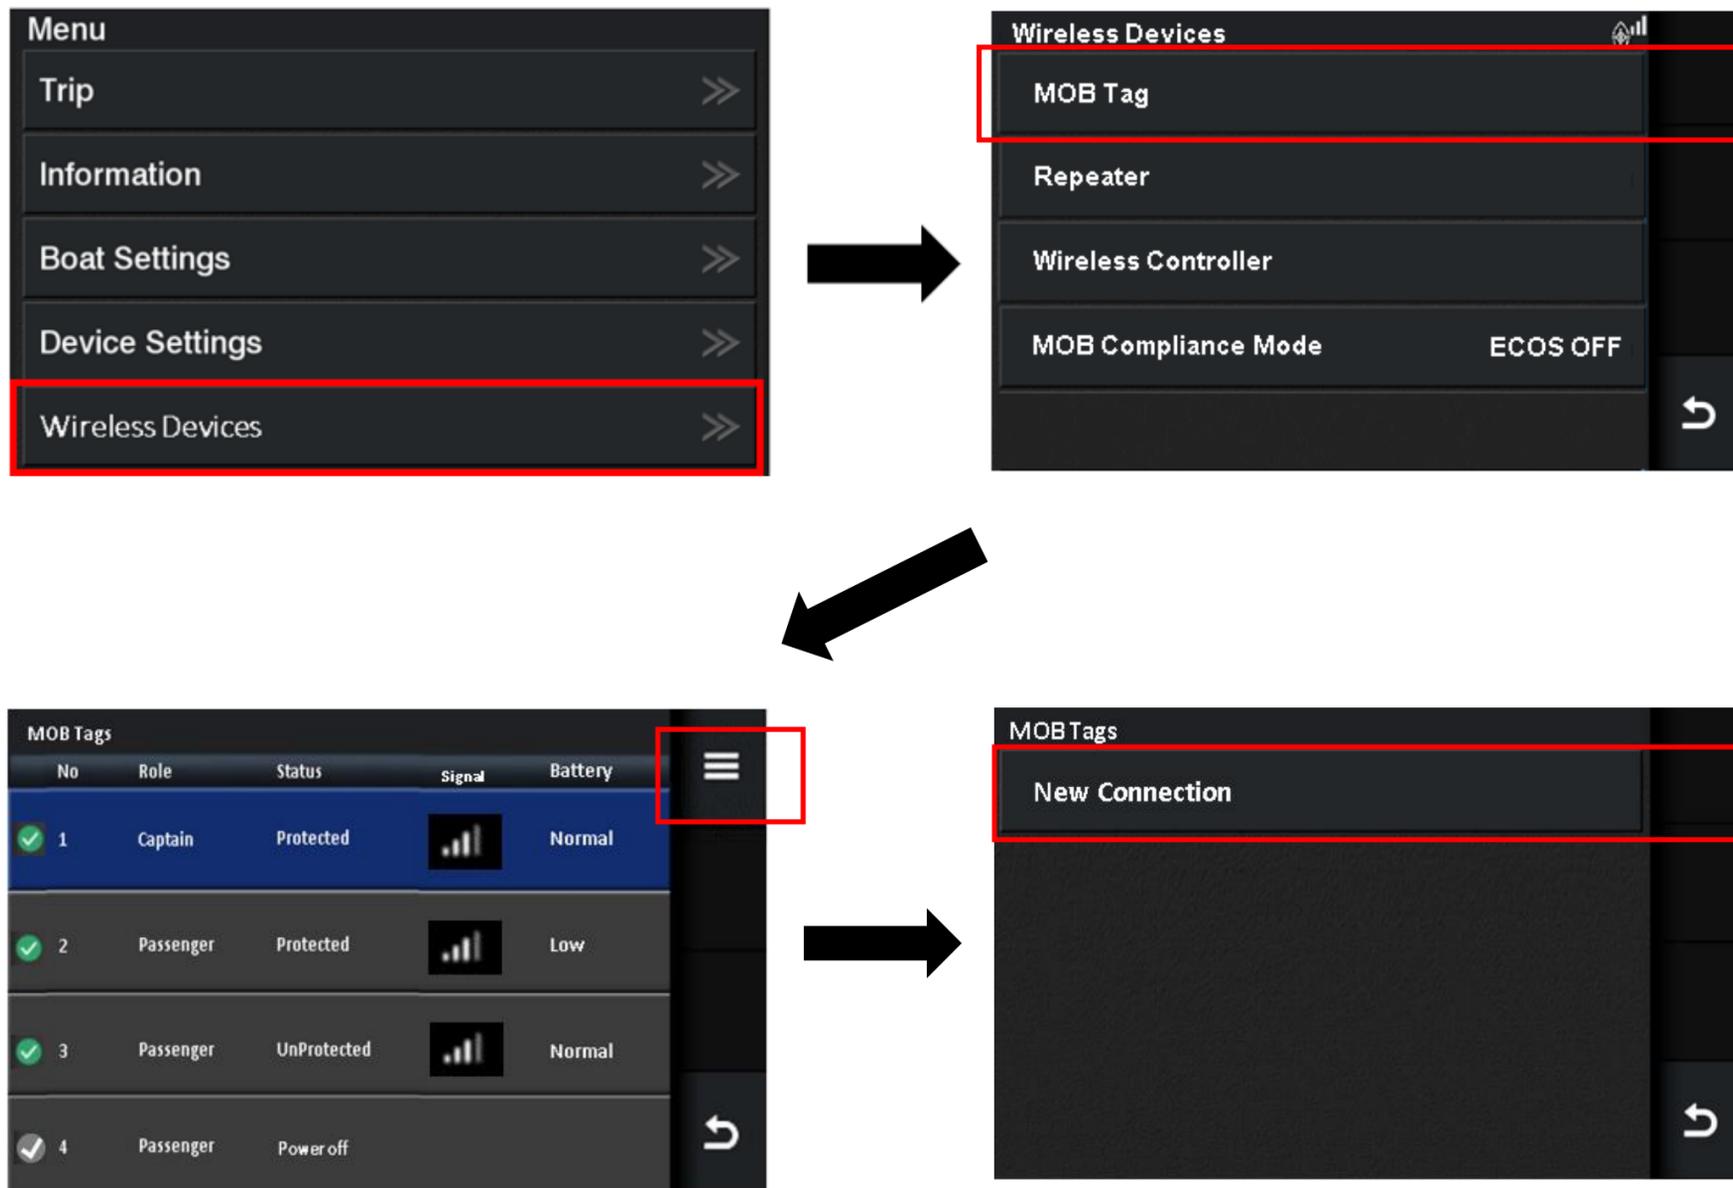

2. Turn on the tag and press the power button three times in succession.



Wireless controller



Wireless controller settings

Pairing

TIP:

- Only one wireless controller can be paired.
- If you want to re-pair the wireless controller to the another wireless hub, select "Default" on the wireless controller screen , and then select "New Connect".

1. Select "New connection" from "Wireless Device".

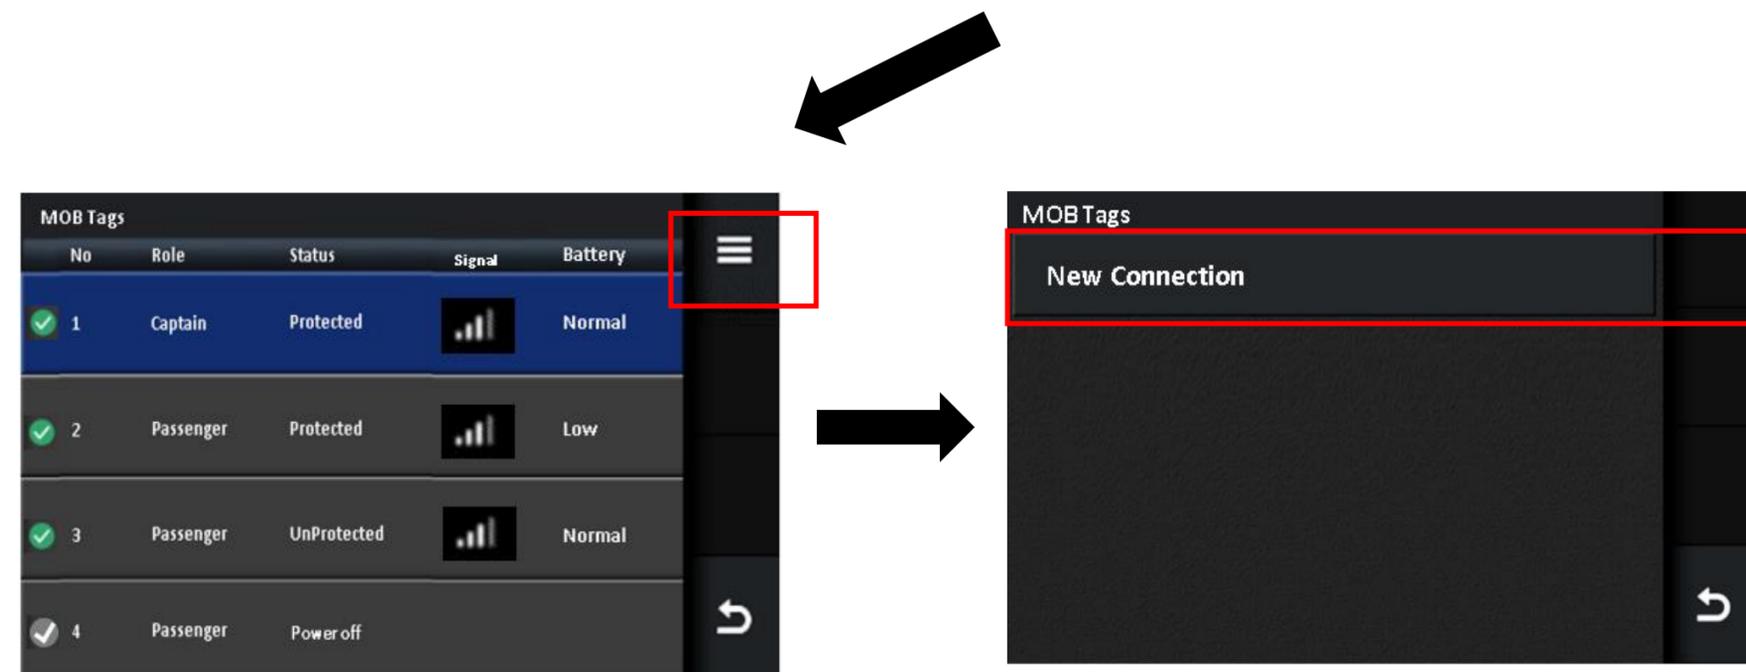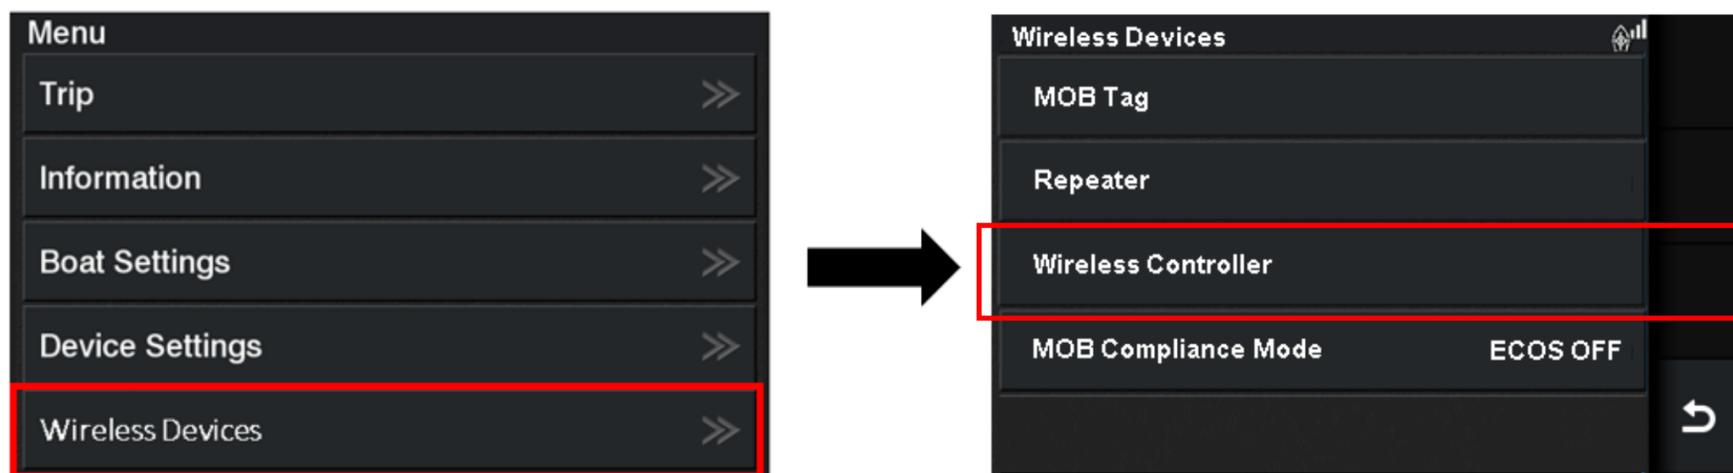

2. Select "New connect" from "Setting".

