

Appendix C: System Check Plots

RF SAFETY LABORATORY

System Verification

Verification Conditions

Verification Source	Power [dBm]	Phantom Section	Test Distance [mm]	Signal, UID	Frequency [MHz]	ConvF (x, y, z)
D2450V2 – SN1112	17.0	Flat	10	CW, 0	2450.000	7.02, 6.86, 7.36

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	TSL Type	Cond. [S/m]	Perm.	Probe, Cal. Date	DAE, Cal. Date
2024-12-27	22.7	21.1	16.4.0.5005	Twin-SAM V8.0 – 2165	Head Simulating Liquid	1.83	38.5	EX3DV4 – SN7836, 2024-09-12	DAE4ip Sn1839, 2024-09-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5

Measurement Results

	SAR [W/kg]	Deviation [%]
psSAR1g	2.51	-1.03
psSAR10g	1.18	-0.66
Peak SAR (Extrapolated)	4.91	-5.98

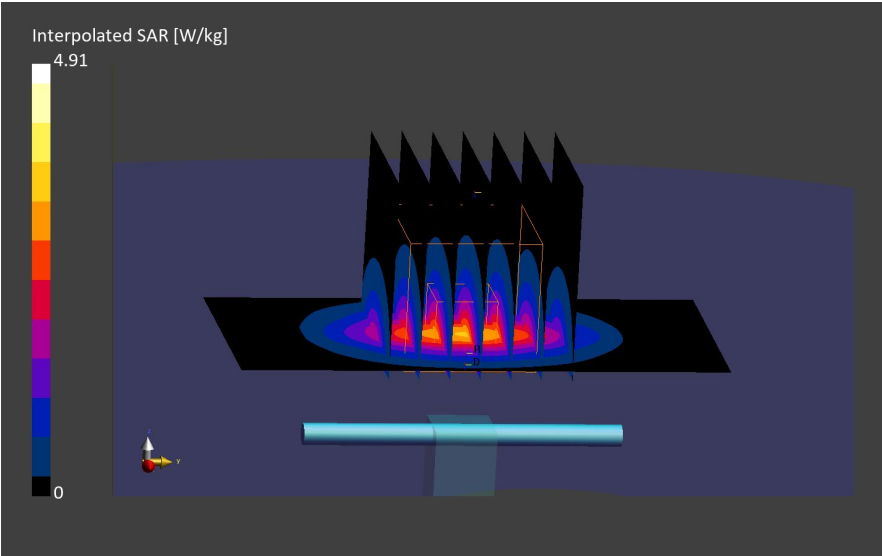

RF SAFETY LABORATORY

System Verification

Verification Conditions

Verification Source	Power [dBm]	Phantom Section	Test Distance [mm]	Signal, UID	Frequency [MHz]	ConvF (x, y, z)
D2450V2 – SN1112	17.0	Flat	10	CW, 0	2450.000	7.02, 6.86, 7.36

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	TSL Type	Cond. [S/m]	Perm.	Probe, Cal. Date	DAE, Cal. Date
2025-01-08	21.6	20.8	16.4.0.5005	Twin-SAM V8.0 – 2165	Head Simulating Liquid	1.85	38.2	EX3DV4 – SN7836, 2024-09-12	DAE4ip Sn1839, 2024-09-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5

Measurement Results

	SAR [W/kg]	Deviation [%]
psSAR1g	2.65	4.49
psSAR10g	1.24	4.39
Peak SAR (Extrapolated)	5.22	-0.05

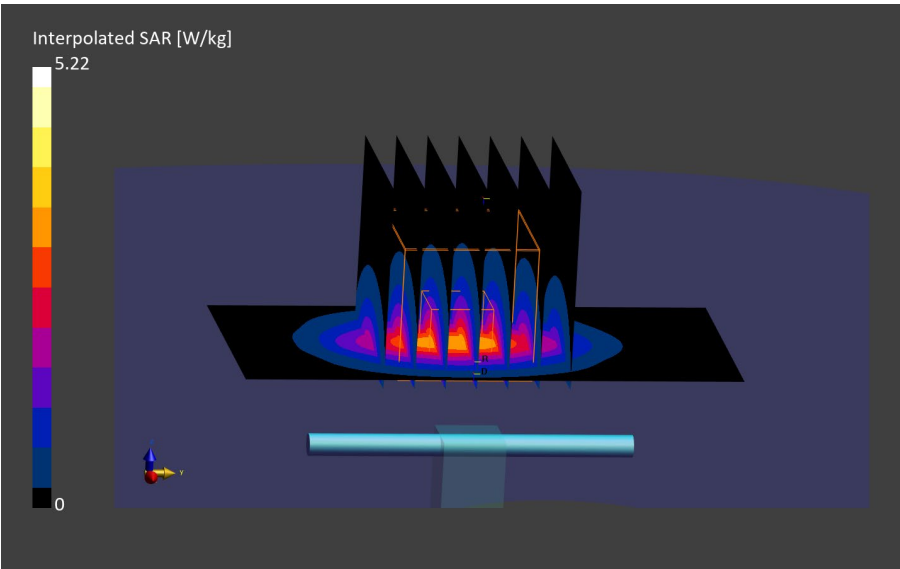

RF SAFETY LABORATORY

System Verification

Verification Conditions

Verification Source	Power [dBm]	Phantom Section	Test Distance [mm]	Signal, UID	Frequency [MHz]	ConvF (x, y, z)
D5GHzV2 – SN1396	17.0	Flat	10	CW, 0	5250.000	5.28, 5.16, 5.54

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	TSL Type	Cond. [S/m]	Perm.	Probe, Cal. Date	DAE, Cal. Date
2025-01-08	21.6	20.8	16.4.0.5005	Twin-SAM V8.0 – 2165	Head Simulating Liquid	4.49	33.1	EX3DV4 – SN7836, 2024-09-12	DAE4ip Sn1839, 2024-09-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	32.0 x 32.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4

Measurement Results

	SAR [W/kg]	Deviation [%]
psSAR1g	3.75	-3.95
psSAR10g	1.07	-4.69
Peak SAR (Extrapolated)	14.8	-4.8

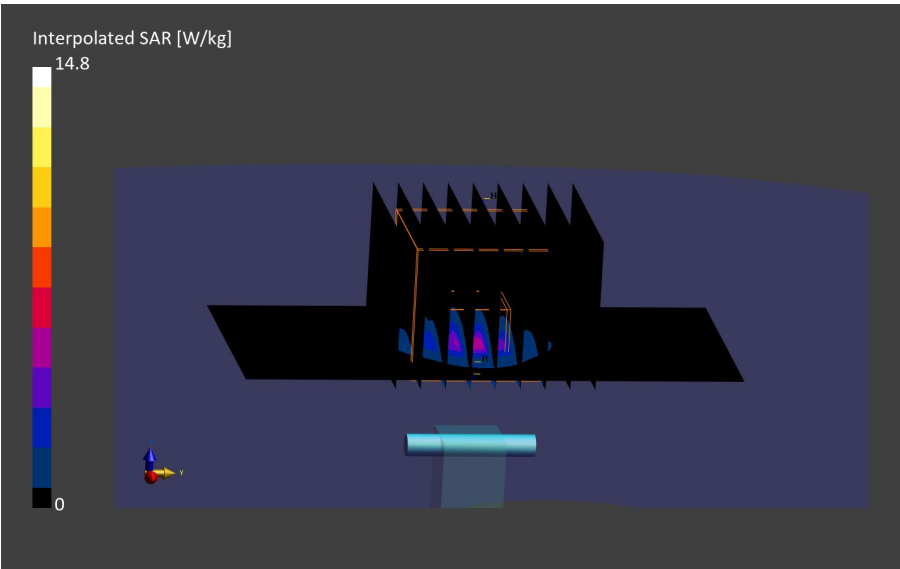

RF SAFETY LABORATORY

System Verification

Verification Conditions

Verification Source	Power [dBm]	Phantom Section	Test Distance [mm]	Signal, UID	Frequency [MHz]	ConvF (x, y, z)
D5GHzV2 – SN1396	17.0	Flat	10	CW, 0	5750.000	4.98, 4.87, 5.22

Test Setup

Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	TSL Type	Cond. [S/m]	Perm.	Probe, Cal. Date	DAE, Cal. Date
2025-01-08	21.6	20.8	16.4.0.5005	Twin-SAM V8.0 – 2165	Head Simulating Liquid	5.01	32.3	EX3DV4 – SN7836, 2024-09-12	DAE4ip Sn1839, 2024-09-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 28.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4

Measurement Results

	SAR [W/kg]	Deviation [%]
psSAR1g	3.69	-8.08
psSAR10g	1.06	-7.24
Peak SAR (Extrapolated)	16.3	-2.36

