

Class 2 Permissive Change Engineering Test Report

FOR

Model: AA3110

2402-2480 MHz

47CFR 15.247, RSS-GEN, and RSS-247

Digital Transmission System

FCC ID: IPH-A03110

IC: 1792A-A03110

FOR

Garmin International, Inc.

1200 East 151st Street

Olathe, KS 66062


Test Report Number: 180611AA

FCC Designation: US5305

IC Test Site Registration: 3041A-1

Authorized Signatory: *Scot D. Rogers*

Scot D. Rogers



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Class 2 Permissive Change Engineering Test Report For

FOR
47 CFR, PART 15C - Intentional Radiators Paragraph 15.247 and
Industry Canada RSS-247 Issue 2, RSS-GEN Issue 5
License Exempt Intentional Radiator

For
Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062

Model: AA3110

Digital Transmission System

Frequency Range 2402-2480 MHz
FCC ID: IPH-A03110
IC: 1792A-A03110

Test Date: June 11, 2018

Certifying Engineer: *Scot D. Rogers*
Scot D. Rogers
Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.
This report must not be used by the client to claim product certification, approval, or
endorsement by NVLAP, NIST, or any agency of the Federal Government.

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: AA3110
Test #: 180611AA
Test to: CFR47 15C, RSS-247, RSS-Gen
File: AA3110 C2PC TstRpt 180611AA

SN's: 3971501491, 51J002657
FCC ID: IPH-A03110
IC: 1792A-A03110
Date: July 3, 2018
Page 2 of 28

Table Of Contents

TABLE OF CONTENTS.....	3
REVISIONS.....	4
FORWARD	5
OPINION / INTERPRETATION OF RESULTS	5
CHANGE TO EQUIPMENT FROM ORIGINAL DESIGN.....	5
EQUIPMENT TESTED.....	5
Equipment Function	6
Equipment Configuration.....	6
APPLICATION FOR CERTIFICATION.....	7
APPLICABLE STANDARDS & TEST PROCEDURES	8
EQUIPMENT TESTING PROCEDURES	8
Antenna Port Conducted Emission Test Procedure.....	8
Diagram 1 Test arrangement for Antenna Port Conducted emissions	8
Radiated Emission Test Procedure.....	9
Diagram 2 Test arrangement for radiated emissions	10
Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS).....	11
TEST SITE LOCATIONS	11
LIST OF TEST EQUIPMENT	12
UNITS OF MEASUREMENTS	13
ENVIRONMENTAL CONDITIONS.....	13
STATEMENT OF MODIFICATIONS AND DEVIATIONS	13
INTENTIONAL RADIATORS.....	13
Antenna Requirements	13

Restricted Bands of Operation.....14

 Table 1 Radiated Emissions in Restricted Frequency Bands Data (Worst-case)..... 15

Summary of Results for Radiated Emissions in Restricted Bands15

General Radiated Emissions Procedure.....16

 Table 2 General Radiated Emissions Data 17

Summary of Results for General Radiated Emissions17

Operation in the Band 2400 – 2483.5 MHz18

 Figure 1 Plot of Transmitter Emissions (Operation in 2402-2480 MHz) 19

 Figure 2 Plot of Transmitter Emissions (6-dB Occupied Bandwidth)..... 19

 Figure 3 Plot of Transmitter Emissions (99% Occupied Bandwidth)..... 20

 Figure 4 Plot of Transmitter Emissions (Low Band Edge)..... 20

 Figure 5 Plot of Transmitter Emissions (High Band Edge)..... 21

 Figure 6 Plot of Transmitter Emissions (Peak Power Spectral Density) 21

Transmitter Emissions Data.....22

 Table 3 Transmitter Radiated Emissions (Worst-case)..... 22

 Table 4 Transmitter Antenna Port Data 23

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator23

ANNEX..... 24

Annex A Measurement Uncertainty Calculations.....25

Annex B Rogers Labs Test Equipment List.....26

Annex C Rogers Qualifications27

Annex D Rogers Labs Certificate of Accreditation28

Revisions

Revision 1 Issued July 3, 2018

Rogers Labs, Inc.
 4405 West 259th Terrace
 Louisburg, KS 66053
 Phone/Fax: (913) 837-3214
 Revision 1

Garmin International, Inc.
 Model: AA3110
 Test #: 180611AA
 Test to: CFR47 15C, RSS-247, RSS-Gen
 File: AA3110 C2PC TstRpt 180611AA

SN's: 3971501491, 51J002657
 FCC ID: IPH-A03110
 IC: 1792A-A03110
 Date: July 3, 2018
 Page 4 of 28

Forward

The following information is submitted as documentation of compliance with regulations supporting Class 2 Permissible Change of Authorized Equipment. This product was authorized under Digital Transmissions system equipment per 47 CFR Paragraph 15.247, Industry Canada RSS-247 Issue 2 and RSS-GEN, operating in the 2400 – 2483.5 MHz frequency band. This report documents the addition of a modulation and increased operational frequency band.

Name of Applicant: Garmin International, Inc.
 1200 East 151st Street
 Olathe, KS 66062

Model: AA3110

FCC ID: IPH-A03110 IC: 1792A-A03110

Opinion / Interpretation of Results

Tests Performed	Results
Radiated Emissions	Complies
Antenna Port Conducted Emissions	Complies

Change to Equipment from Original Design

The information contained in this report address the software modification to enable operation of additional BT modulation (BLE) and increased frequency band. No modifications in the transmitter circuitry were required. The transmitter remains electrically identical and functionally equivalent to the original equipment authorization.

Equipment Tested


<u>Equipment</u>	<u>Model / PN</u>	<u>Serial Number</u>
EUT” #1	AA3110	3971501491
EUT” #2	AA3110	51J002657
DC Adapter	320-00239-47	N/A
Bench DC Supply	BK1745	209C13

Test results in this report relate only to the items tested.

Equipment Function

The EUT is a mobile mounted video recording system incorporating transmitter with operation capability in the 2402-2480 MHz frequency band. The design provides ability to record video and audio as well as wireless communications with compatible equipment. The product operates from external direct current only supplied by installation vehicle or supporting equipment. Power to the EUT may be provided using the interface cables documented in original filing. This filing utilized only the CLA adapter documented. The design utilizes internal fixed antenna system and offers no provision for antenna replacement or modification. Two samples were provided for testing, one representative of production case design and the other modified for testing purposes replacing integral antenna with RF connection port. Test samples were provided with test software enabling testing personnel ability to enable transmitter function on defined channels and operational modes. The EUT was arranged as described by the manufacturer for testing purposes. For testing purposes, the EUT received power from external bench DC power. Test results in this report relate only to the products described in this report.

Equipment Configuration

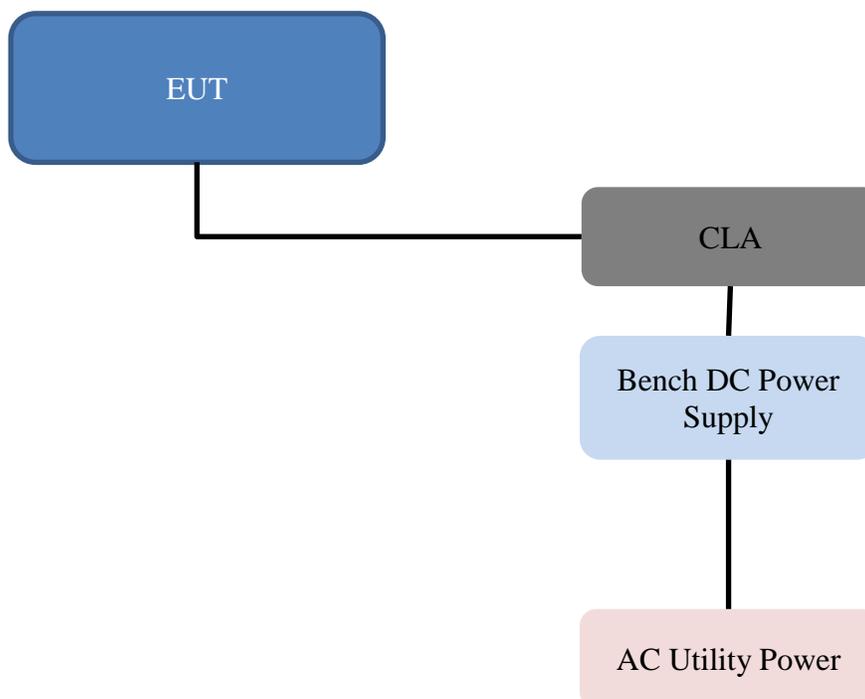

Application for Certification

- (1) Manufacturer: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062
- (2) Identification: Model: AA3110
FCC ID: IPH-A03110 IC: 1792A-A03110
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from external direct current power only provided by supporting system. The EUT offers no other connection ports than those presented in this and the original filing documentation.
- (9) Transition Provisions of CFR47 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. This requirement is not applicable to his DTS device.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

Applicable Standards & Test Procedures

In accordance with the Federal Communications Code of Federal Regulations, dated June 11, 2018: Part 2, Subpart J, Paragraphs 2.1043, applicable parts of paragraph 15C, KDB 178919 D01 Permissive Change Policy v06, Industry Canada RSS-247 Issue 2, and RSS-GEN Issue 5 operation in the 2400 – 2483.5 MHz Frequency band. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013.

Equipment Testing Procedures

Antenna Port Conducted Emission Test Procedure

The EUT was assembled as required for operation placed on a benchtop. This configuration provided the ability to connect test equipment to the provided test antenna port. Antenna Port conducted emissions testing was performed as required in the regulations and specified in ANSI C63.10-2013. Testing was completed on a laboratory bench in a shielded room. The active antenna port of the unlicensed wireless device was connected to appropriate attenuation and the spectrum analyzer.


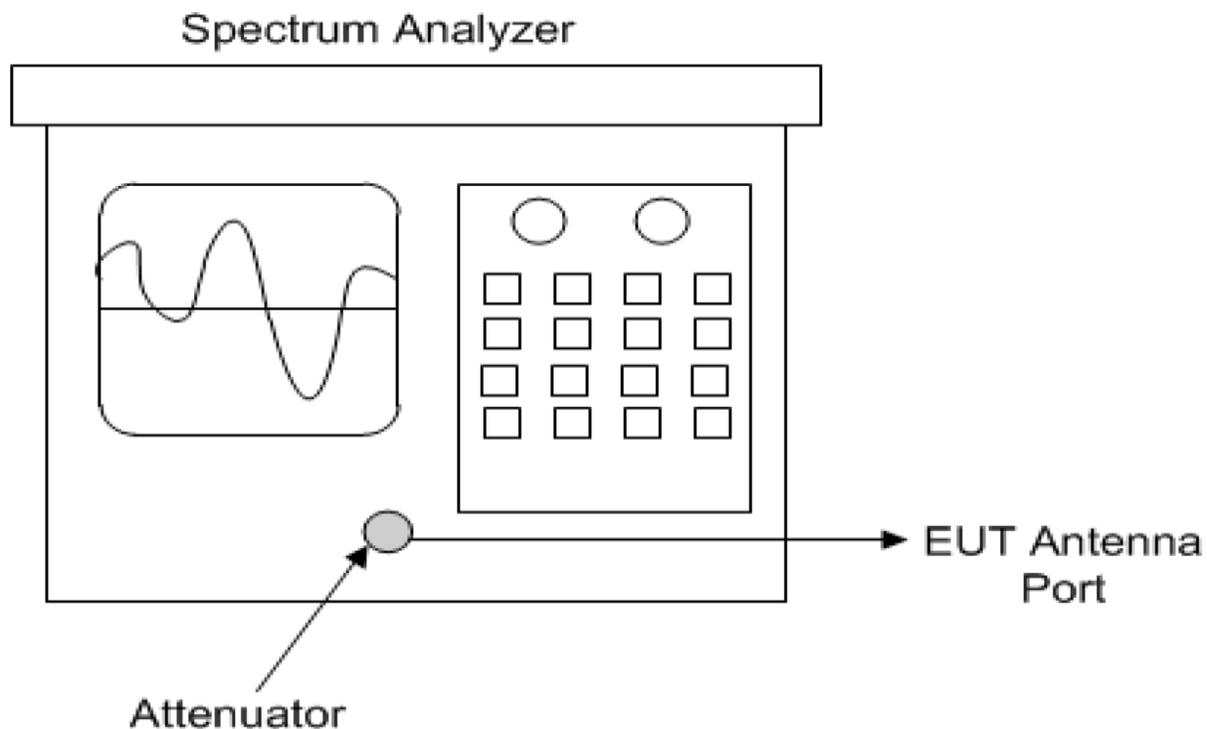


Diagram 1 Test arrangement for Antenna Port Conducted emissions

Radiated Emission Test Procedure

The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. Radiated emissions testing was performed as required in the regulations and specified in ANSI C63.10-2013. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. The frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions during preliminary investigation. Refer to diagrams two and three showing typical test setup. Refer to photographs in the test setup exhibits for specific EUT placement during testing.

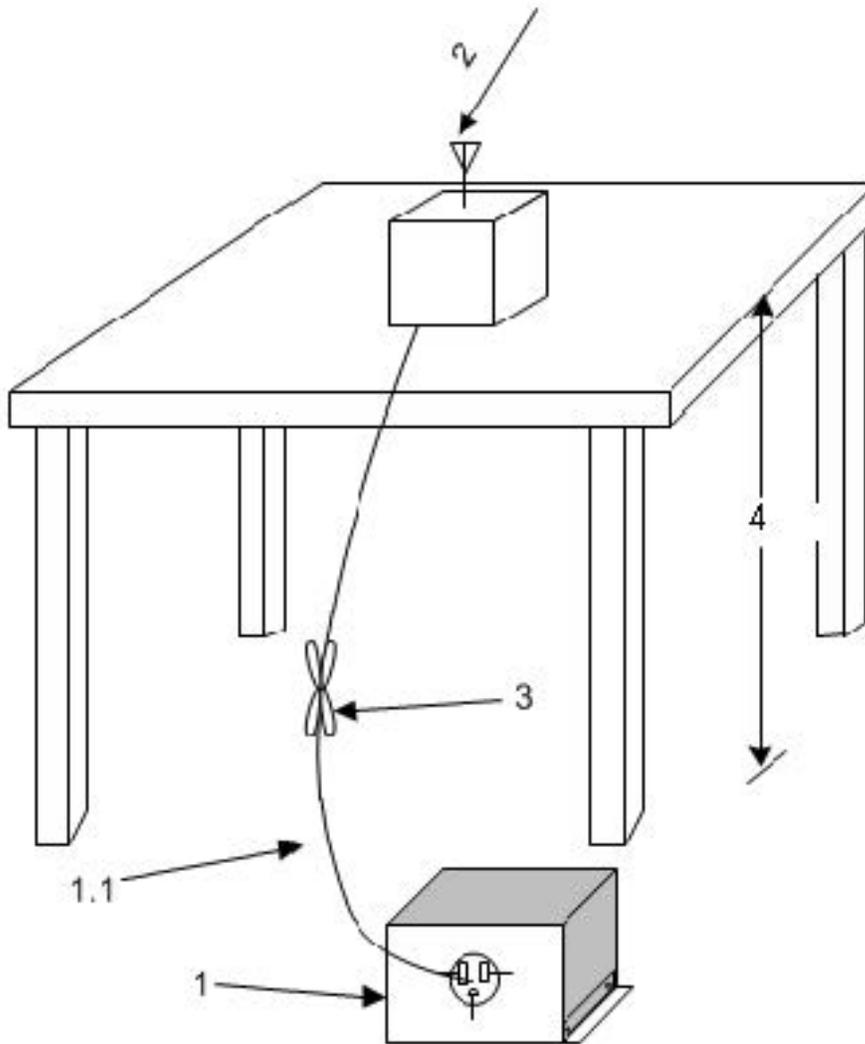

1—A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).


1.1—LISN spaced at least 80 cm from the nearest part of the EUT chassis.

2—Antenna can be integral or detachable, depending on the EUT (see 6.3.1).

3—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).

4—For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

Diagram 2 Test arrangement for radiated emissions

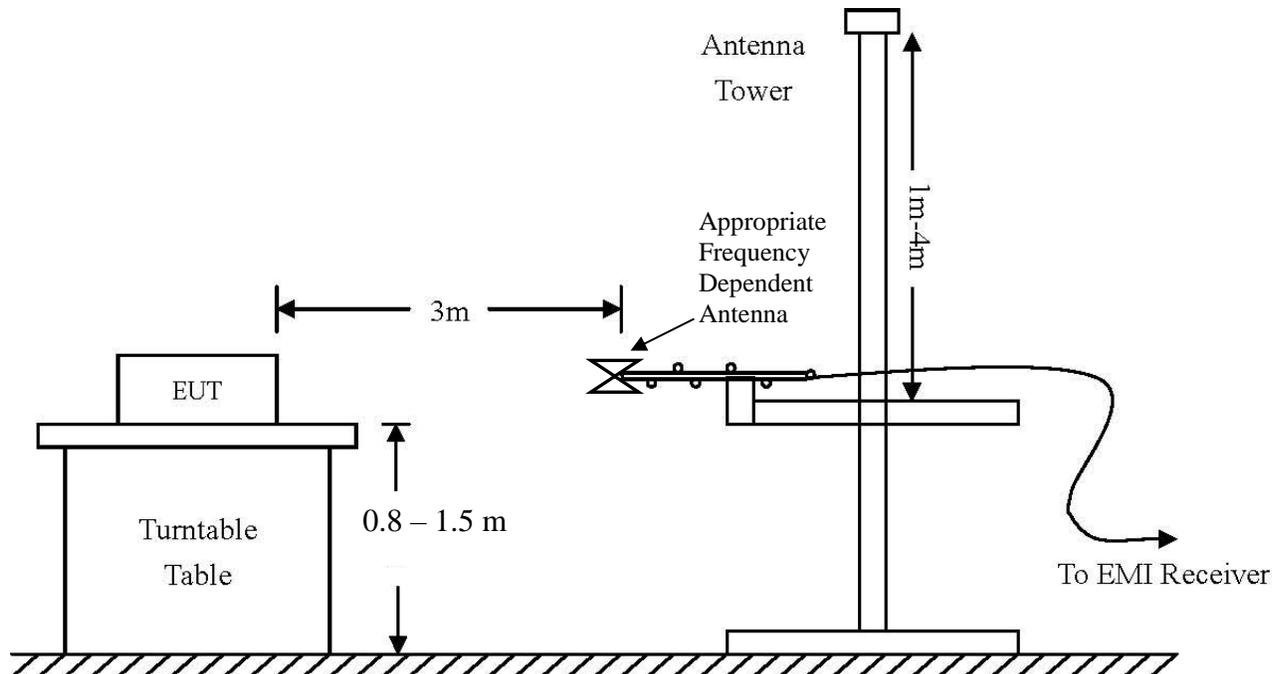

Radiated Emissions (9 kHz-30 MHz)		
RBW	Video. BW	Detector Function
9 kHz	30 kHz	Peak / Average
Radiated Emissions (30-1000 MHz)		
RBW	Video. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Radiated Emissions (Above 1000 MHz)		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)

Test Site Locations

Antenna Port Conducted Antenna Port conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 West 259th Terrace, Louisburg, KS

Radiated EMI The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 West 259th Terrace, Louisburg, KS

Site Registration FCC Site Designation US5305, Industry Canada Registration: 3041A-1

NVLAP Accreditation Lab code 200087-0

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: AA3110
Test #: 180611AA
Test to: CFR47 15C, RSS-247, RSS-Gen
File: AA3110 C2PC TstRpt 180611AA

SN's: 3971501491, 51J002657
FCC ID: IPH-A03110
IC: 1792A-A03110
Date: July 3, 2018
Page 11 of 28

List of Test Equipment

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
<input type="checkbox"/> LISN	FCC	FCC-LISN-50-2-10(1PA) (160611)	.15-30MHz	5/2/2018	5/2/2019
<input type="checkbox"/> LISN	Compliance Design	FCC-LISN-2.Mod.cd,	.15-30MHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)	9kHz-40 GHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)	9kHz-40 GHz	10/24/2017	10/24/2018
<input type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303071)	9kHz-40 GHz	10/24/2017	10/24/2018
<input type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	10/24/2017	10/24/2018
<input type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	10/24/2017	10/24/2018
<input type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	10/24/2017	10/24/2018
<input type="checkbox"/> Antenna	EMCO	3147 (40582)	200-1000MHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	5/2/2018	5/2/2020
<input type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	10/24/2017	10/24/2019
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	5/15/2017	5/15/2019
<input checked="" type="checkbox"/> Antenna	Com Power	AL-130 (121055)	.001-30 MHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	5/2/2018	5/2/2019
<input type="checkbox"/> Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	12/22/2017	12/22/2018
<input type="checkbox"/> Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2019
<input type="checkbox"/> Analyzer	HP	8591EM (3628A00871)	9kHz-1.8GHz	5/2/2018	5/2/2019
<input type="checkbox"/> Analyzer	HP	8562A (3051A05950)	9kHz-125GHz	5/2/2018	5/2/2019
<input type="checkbox"/> Analyzer	HP External Mixers	11571, 11970	25GHz-110GHz	5/2/2018	5/2/2019
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Power Meter	Agilent	N1911A with N1921A	0.05-40 GHz	5/2/2018	5/2/2019
<input type="checkbox"/> Generator	Rohde & Schwarz	SMB100A6 (100150)	20Hz-6 GHz	5/2/2018	5/2/2019
<input type="checkbox"/> Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50722 (009).9G notch	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50114 (017)1.5G HPF	30-18000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50105 (059) 6G HPF	30-18000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1436)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (14362)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (14452)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-6W2+ (1736)	30-6000 MHz	5/2/2018	5/2/2019
<input checked="" type="checkbox"/> Weather station	Davis	6312 (A70927D44N)		10/24/2017	10/24/2018

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: AA3110
Test #: 180611AA
Test to: CFR47 15C, RSS-247, RSS-Gen
File: AA3110 C2PC TstRpt 180611AA

SN's: 3971501491, 51J002657
FCC ID: IPH-A03110
IC: 1792A-A03110
Date: July 3, 2018
Page 12 of 28

Units of Measurements

Conducted EMI Data is in dB μ V; dB referenced to one microvolt

Radiated EMI Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses

RFS (dB μ V/m @ 3m) = FSM (dB μ V) + A.F. (dB) - Gain (dB)

Environmental Conditions

Ambient Temperature 23.5° C

Relative Humidity 40%

Atmospheric Pressure 1006.5 mb

Statement of Modifications and Deviations

No modifications to the EUT were required during investigation for the equipment to demonstrate compliance with the CFR47, Part 2.1043, Part 15C, Industry Canada RSS-247 Issue 2, and RSS-GEN Issue 5 emission requirements. There were no deviations to the specifications.

Intentional Radiators

The following information is submitted in support of demonstration of compliance with the requirements of 47CFR Parts 2 and 15, Industry Canada RSS-247 Issue 2 and RSS-GEN Issue 5, Class 2 permissible change.

Antenna Requirements

The EUT incorporates integral antenna system and production units offer no provision for connection to alternate antenna system. The antenna connection point complies with the unique antenna connection requirements. The unique antenna connection requirements are fulfilled. There are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values consider the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Radiated Emissions in Restricted Frequency Bands Data (Worst-case)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Quasi-Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Quasi-Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
2323.2	49.5	N/A	38.8	46.5	N/A	35.1	54.0
2338.1	49.0	N/A	40.3	48.2	N/A	39.6	54.0
2390.0	42.2	N/A	29.8	42.7	N/A	29.8	54.0
2483.8	46.1	N/A	32.2	44.5	N/A	30.8	54.0
2544.3	43.4	N/A	30.2	43.2	N/A	30.2	54.0
2558.7	43.1	N/A	30.2	43.1	N/A	30.3	54.0
4804.0	47.1	N/A	34.4	47.2	N/A	34.4	54.0
4880.0	47.3	N/A	34.7	47.6	N/A	34.7	54.0
4960.0	47.4	N/A	34.6	47.6	N/A	34.7	54.0
7206.0	51.2	N/A	38.0	50.9	N/A	38.0	54.0
7320.0	51.5	N/A	38.4	51.6	N/A	38.5	54.0
7440.0	51.2	N/A	38.3	51.3	N/A	38.3	54.0
12010.0	56.1	N/A	43.2	55.9	N/A	43.2	54.0
12200.0	57.8	N/A	44.8	57.6	N/A	44.8	54.0
12400.0	57.4	N/A	44.3	57.4	N/A	44.3	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C and RSS-247 Intentional Radiator requirements. The EUT demonstrated a worst-case minimum margin of -9.2 dB below the emissions requirements in restricted frequency bands. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

General Radiated Emissions Procedure

The EUT was arranged in a typical equipment configuration and operated through available modes during testing. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS location before final radiated measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 25,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or double Ridge or pyramidal horns and mixers above 1 GHz, notch filters and appropriate amplifiers and external mixers were utilized.

Table 2 General Radiated Emissions Data

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Quasi-Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Quasi-Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
60.2	28.5	24.2	N/A	37.1	31.3	N/A	40.0
120.0	27.5	18.5	N/A	23.5	15.9	N/A	43.5
143.2	28.9	24.5	N/A	21.9	16.8	N/A	43.5
144.7	29.8	24.4	N/A	23.7	18.0	N/A	43.5
146.7	30.1	25.1	N/A	24.8	18.1	N/A	43.5
225.2	22.2	11.4	N/A	16.1	11.0	N/A	46.0
240.7	21.7	17.2	N/A	20.9	13.9	N/A	46.0
445.1	27.3	24.5	N/A	24.7	20.5	N/A	46.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15C paragraph 15.209, RSS-247 and RSS-GEN Intentional Radiators. The EUT demonstrated a minimum margin of -8.7 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the Band 2400 – 2483.5 MHz

Radiated emissions were measured on the Open Area Test Site (OATS) at a three-meter distance. Production equipment design of the EUT provides no connection to antenna ports. Radiated emissions measurements were performed on the production design test sample and the modified test sample as documented in this report. Testing procedures defined in publications ANSI C63.10-2013 and KDB 558074 D01 DTS Meas Guidance v04 were utilized during compliance testing. The EUT was placed on a turntable elevated as required above the ground plane at a distance of 3 meters from the FSM antenna located on the OATS during radiated emissions testing. The peak and quasi-peak amplitude of the frequencies below 1000 MHz were measured using a spectrum analyzer / EMC receiver. The peak and average amplitude of emissions above 1000 MHz were measured using a spectrum analyzer / EMC receiver. Emissions data was recorded from the measurement results. Data presented reflects measurement result corrected to account for measurement system gains and losses. A second test sample was provided for testing. This sample replaced the integral antenna with 50-ohm connector. Antenna conducted measurements were made on test sample #2 at the antenna port RF connection. Plots were made of transmitter performance for reference purposes. Refer to figures one through six for plots of antenna port conducted performance.

1. The transmitter's peak power was measured as specified in KDB's 558074 9.1.3
2. Emission DTS Bandwidth was measured as specified in KDB 558074 paragraph 8.
3. Peak Power Spectral Density was measured as specified in KDB 558074 10.2.
4. Unwanted Radiated Emissions were measured as specified in KDB 558074 paragraph 11 and specified in ANSI C63-10 at a 3-meters distance located on the OATS.
5. Radiated Emissions Levels in restricted bands were measured as specified in KDB 558074 paragraph 12 and ANSI C63-10 at a 3-meters distance located on the OATS.
6. Band-Edge measurements were performed as specified in KDB 558074 paragraph 13 and ANSI C63-10.

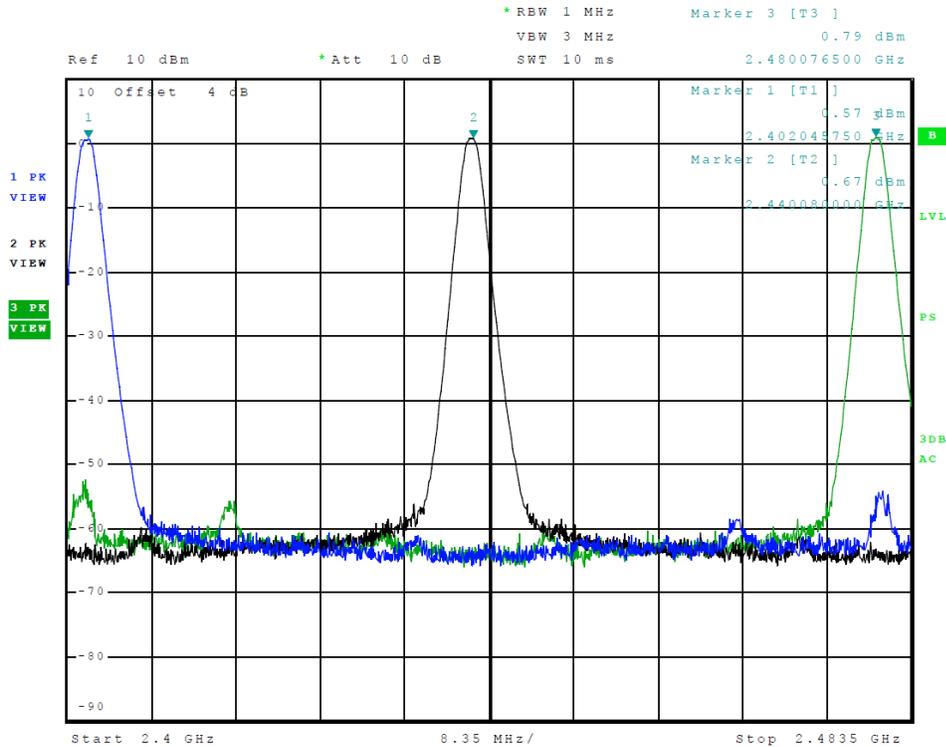


Figure 1 Plot of Transmitter Emissions (Operation in 2402-2480 MHz)

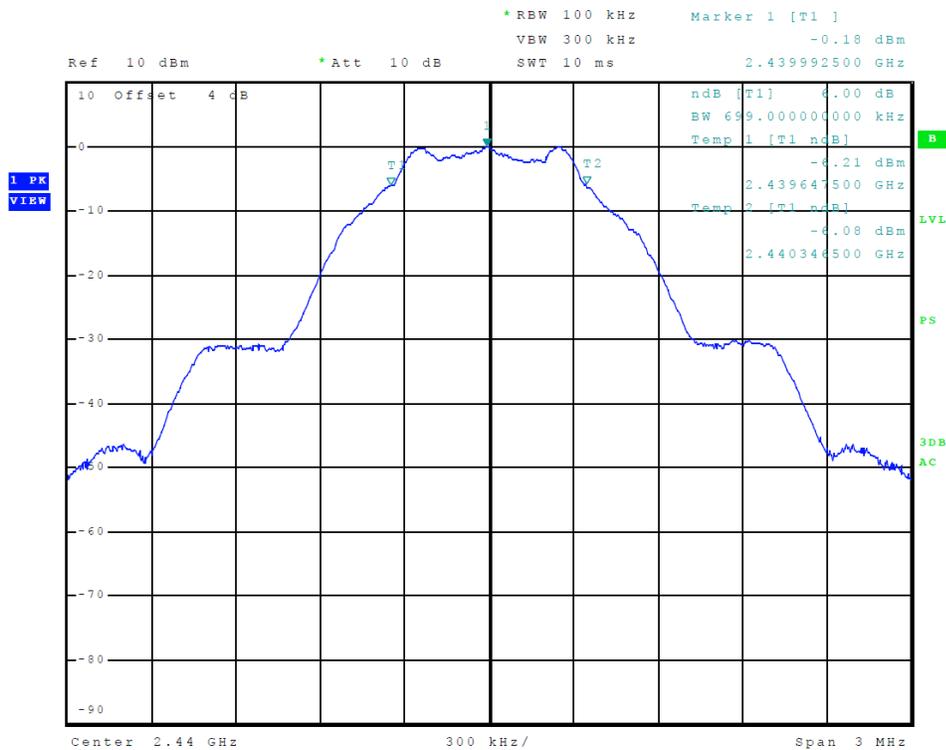


Figure 2 Plot of Transmitter Emissions (6-dB Occupied Bandwidth)

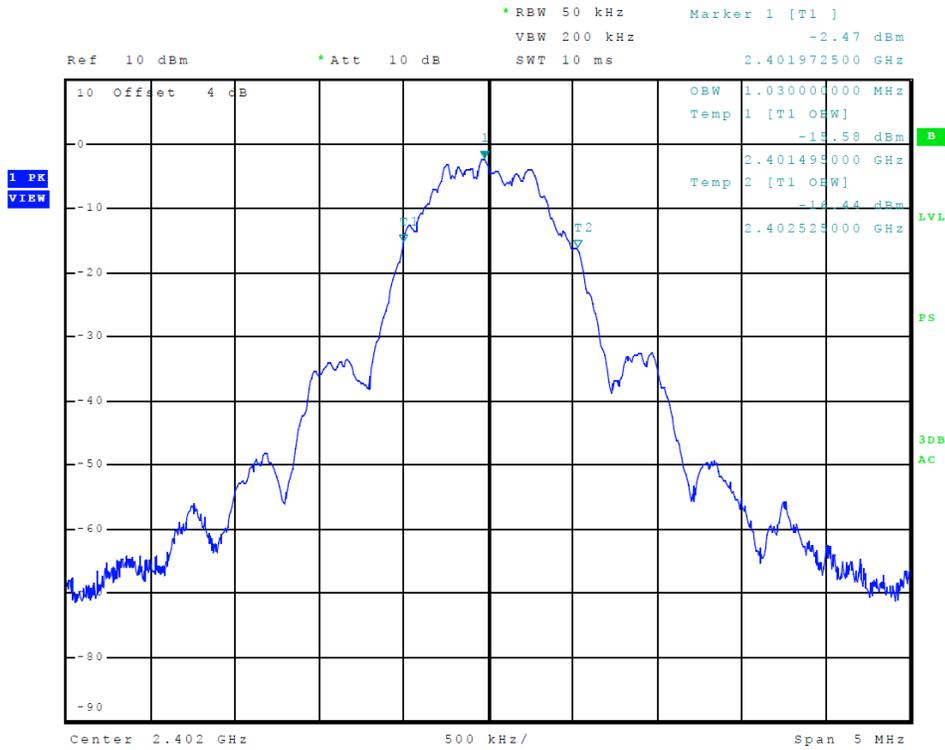


Figure 3 Plot of Transmitter Emissions (99% Occupied Bandwidth)

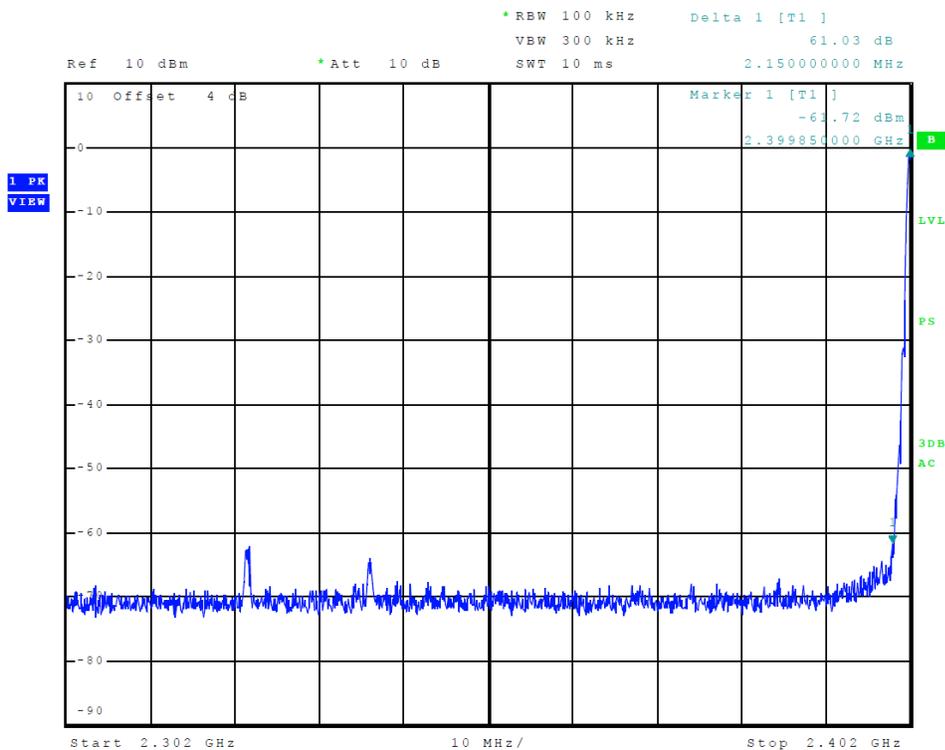


Figure 4 Plot of Transmitter Emissions (Low Band Edge)

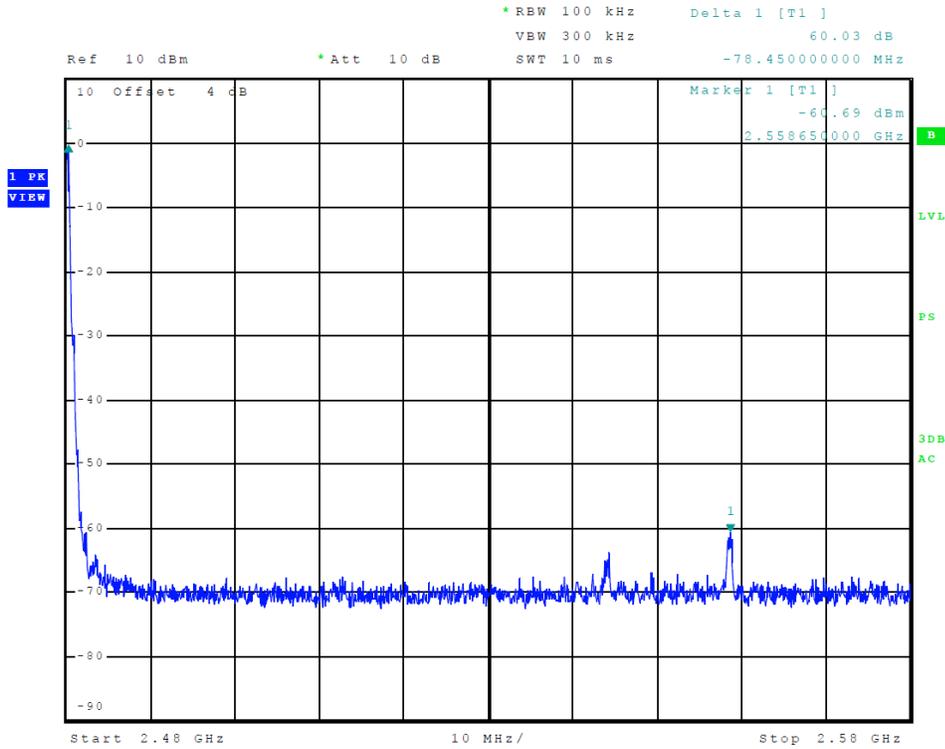


Figure 5 Plot of Transmitter Emissions (High Band Edge)

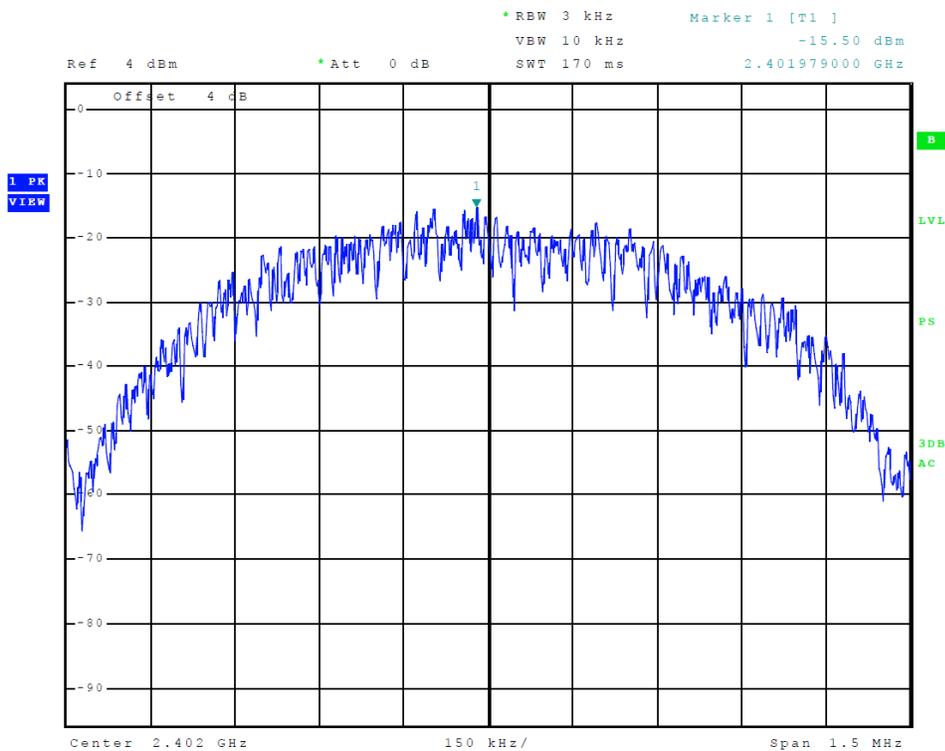


Figure 6 Plot of Transmitter Emissions (Peak Power Spectral Density)

Transmitter Emissions Data

Table 3 Transmitter Radiated Emissions (Worst-case)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Quasi-Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Quasi-Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
2402.0	--	--	--	--	--	--	--
4804.0	47.2	N/A	34.4	47.2	N/A	34.4	54.0
7206.0	50.6	N/A	38.0	50.9	N/A	38.0	54.0
9608.0	53.8	N/A	41.0	54.3	N/A	41.0	54.0
12010.0	56.6	N/A	43.2	55.9	N/A	43.2	54.0
14412.0	58.3	N/A	45.7	58.6	N/A	45.7	54.0
16814.0	61.4	N/A	48.8	61.4	N/A	48.9	54.0
2440.0	--	--	--	--	--	--	--
4880.0	47.3	N/A	34.7	47.6	N/A	34.7	54.0
7320.0	51.5	N/A	38.4	51.6	N/A	38.5	54.0
9760.0	54.1	N/A	40.8	53.9	N/A	40.8	54.0
12200.0	57.8	N/A	44.8	57.6	N/A	44.8	54.0
14640.0	59.1	N/A	46.2	59.3	N/A	46.2	54.0
17080.0	61.7	N/A	48.6	61.7	N/A	48.8	54.0
2480.0	--	--	--	--	--	--	--
4960.0	47.4	N/A	34.6	47.6	N/A	34.7	54.0
7440.0	51.2	N/A	38.3	51.3	N/A	38.3	54.0
9920.0	54.6	N/A	41.1	54.3	N/A	41.2	54.0
12400.0	57.4	N/A	44.3	57.4	N/A	44.3	54.0
14880.0	58.4	N/A	45.9	59.6	N/A	46.0	54.0
17360.0	62.0	N/A	49.0	61.6	N/A	49.1	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 4 Transmitter Antenna Port Data

Frequency MHz	Peak Antenna Port Conducted Output Power (dBm / watts)	6-dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm)
2402	0.8 / 0.001	699.0	1030.0	-15.5
2440	0.7 / 0.001	699.0	1030.0	-15.1
2480	0.7 / 0.001	699.0	1030.0	-15.1

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of FCC 47 CFR Part 15.247, Industry Canada RSS-247 Issue 2 and RSS-GEN Issue 5 Intentional Radiator regulations. The EUT worst-case configuration demonstrated minimum margin of -29.2 dB below the peak emission limit for the fundamental. The EUT worst-case configuration demonstrated minimum radiated harmonic emission margin of -4.9 dB below the limit. No other radiated emissions were found in the restricted bands less than 20 dB below limits than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the limits.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according to CISPR 16-4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.14
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Rogers Labs Test Equipment List

List of Test Equipment	Calibration	Date (m/d/y)	Due
Antenna: Schwarzbeck Model: BBA 9106/VHBB 9124 (9124-627)		5/2/2018	5/2/2019
Antenna: Schwarzbeck Model: VULP 9118 A (VULP 9118 A-534)		5/2/2018	5/2/2019
Antenna: EMCO 6509		10/24/2016	10/24/2018
Antenna: EMCO 3143 (9607-1277) 20-1200 MHz		5/2/2018	5/2/2019
Antenna: EMCO Dipole Set 3121C		2/23/2018	2/23/2019
Antenna: C.D. B-101		2/23/2018	2/23/2019
Antenna: Solar 9229-1 & 9230-1		2/23/2018	2/23/2019
Cable: Belden 8268 (L3)		10/24/2017	10/24/2018
Cable: Time Microwave: 4M-750HF290-750		10/24/2017	10/24/2018
Frequency Counter: Leader LDC-825 (8060153)		5/2/2018	5/2/2019
Oscilloscope Scope: Tektronix 2230		2/23/2018	2/23/2019
Wattmeter: Bird 43 with Load Bird 8085		2/23/2018	2/23/2019
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140		2/23/2018	2/23/2019
R.F. Generator: SMB100A6 s/n 100623		5/2/2018	5/2/2019
R.F. Generator: SBMBV100A s/n: 260771		5/2/2018	5/2/2019
R.F. Generators: HP 606A, HP 8614A, HP 8640B		2/23/2018	2/23/2019
R.F. Power Amp 65W Model: 470-A-1010		2/23/2018	2/23/2019
R.F. Power Amp 50W M185- 10-501		2/23/2018	2/23/2019
R.F. Power Amp A.R. Model: 10W 1010M7		2/23/2018	2/23/2019
R.F. Power Amp EIN Model: A301		2/23/2018	2/23/2019
LISN: Compliance Eng. Model 240/20		5/2/2018	15/50/19
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08		5/2/2018	5/2/2019
Audio Oscillator: H.P. 201CD		2/23/2018	2/23/2019
ESD Test Set 2010i		2/23/2018	2/23/2019
Oscilloscope Scope: Tektronix MDO 4104		2/23/2018	2/23/2019
EMC Transient Generator HVT TR 3000		2/23/2018	2/23/2019
AC Power Source (Ametech, California Instruments)		2/23/2018	2/23/2019
Fast Transient Burst Generator Model: EFT/B-101		2/23/2018	2/23/2019
Field Intensity Meter: EFM-018		2/23/2018	2/23/2019
KEYTEK Ecat Surge Generator		2/23/2018	2/23/2019
ESD Simulator: MZ-15		2/23/2018	2/23/2019
Shielded Room not required			

Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 27 years' experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held


Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



Scot D. Rogers

Annex D Rogers Labs Certificate of Accreditation

United States Department of Commerce
National Institute of Standards and Technology

NVLAP®

Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 200087-0

Rogers Labs, Inc.
Louisburg, KS

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).*

2018-02-21 through 2019-03-31
Effective Dates




For the National Voluntary Laboratory Accreditation Program

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: AA3110
Test #: 180611AA
Test to: CFR47 15C, RSS-247, RSS-Gen
File: AA3110 C2PC TstRpt 180611AA

SN's: 3971501491, 51J002657
FCC ID: IPH-A03110
IC: 1792A-A03110
Date: July 3, 2018
Page 28 of 28