

**COMPLIANCE WORLDWIDE INC.
TEST REPORT 277-17**

In Accordance with the Requirements of
FCC PART 15.247, SUBPART C
Innovation, Science and Economic Development Canada
RSS-247, ISSUE 2

Low Power License-Exempt Radio Communication Devices
Intentional Radiators


Issued to
Garmin International, Inc.
1200 E. 151st St.
Olathe, KS 66062-3426

for the
Model Number AA3095
2.4 GHz Bluetooth Low Energy Radio

FCC ID: IPH-A3095
IC: 1792A-A3095


Report Issued on July 28, 2017

Tested by



Brian F. Breault

Reviewed by



Larry K. Stillings

This test report shall not be reproduced, except in full, without written permission from Compliance Worldwide, Inc.

Table of Contents

1. Scope.....	3
2. Product Details.....	3
2.1 Manufacturer	3
2.2 Model Number	3
2.3 Serial Number.....	3
2.4 Description.....	3
2.5 Power Source	3
2.6 Hardware Revision	3
2.7 Software Revision.....	3
2.8 Modulation Type	3
2.9 Operating Frequency.....	3
2.10 EMC Modifications.....	3
3. Product Configuration	3
3.1 Operational Characteristics & Software.....	3
3.2 EUT Hardware	5
3.3 EUT Cables/Transducers	5
3.4 Miscellaneous EUT Items	5
3.5 Support Equipment.....	6
3.6 Support Equipment Cables.....	6
3.7 Block Diagram	6
4. Measurements Parameters.....	7
4.1 Measurement Equipment Used to Perform Test.....	7
4.2 Measurement Software.....	7
4.3 Measurement & Equipment Setup.....	8
4.4 Measurement Procedures	8
4.5 Measurement Uncertainty.....	9
5. Choice of Equipment for Test Suits.....	9
5.1 Choice of Model.....	9
5.2 Presentation	9
5.3 Choice of Operating Frequencies	9
5.4 Modes of Operation	10
6. Measurement Summary.....	10
7. Measurement Data	12
7.1 Antenna Requirement.....	11
7.2 Minimum DTS Bandwidth	12
7.3 Maximum Peak Conducted Output Power.....	14
7.4 Operation with directional antenna gains greater than 6 dBi	16
7.5 Transmitter Spurious Radiated Emissions.....	17
7.6 Band Edge and Out of Band Measurements	19
7.7 Emissions in Non-restricted Frequency Bands	23
7.8 Peak Power Spectral Density	26
7.9 Conducted Emissions.....	29
7.10 Duty Cycle	32
7.11 Public Exposure to Radio Frequency Energy Levels.....	34
8. Test Setup Photographs	36
9. Test Site Description.....	45
Appendix A - Transmitter Spurious Radiated Emissions Test Data	46

1. Scope

This test report certifies that the Garmin AA3095, as tested, meets the FCC Part 15, Subpart C and ISED Canada RSS-247, Issue 2 requirements. The scope of this test report is limited to the test sample provided by the client, only in as much as that sample represents other production units. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required.

2. Product Details

2.1. Manufacturer:	Garmin International, Inc.
2.2. Model Number:	AA3095
2.3. Serial Number:	Radiated Mode Measurements - 3949088924 Conducted Mode Measurements - 3949088937
2.4. Description:	The Garmin AA3095 is a dive watch with ANT+, BLE, and Wi-Fi communication capabilities
2.5. Power Source:	DC 3.7 Volts lithium rechargeable battery, not user accessible
2.6. Hardware Revision:	V06
2.7. Software Version:	2.0
2.8. Modulation Type:	GFSK
2.9. Operating Frequency:	2.4 GHz to 2.4835 Nominal
2.10. EMC Modifications:	None

3. Product Configuration

3.1. Operational Characteristics & Software

Operating Instructions for Test

Start the unit in test mode by pressing and holding the **DOWN** button (bottom left) while pressing and releasing the **PWR/LIGHT** button (top left). Release the **DOWN** button once the main test mode screen is displayed immediately after the Garmin logo screen.



Scroll through the test mode pages by pressing the **BACK/LAP** (bottom right) button.

3. Product Configuration (continued)

3.1. Operational Characteristics & Software (continued)

Operating Instructions for Test (continued)

The first RF test page is the ANT Test Mode page, which will take seven button presses of the **BACK/LAP** button to get to.



- Use the **MENU/UP** (middle left) button to change the frequency (high/low/mid).
- Use the **PWR/LIGHT** (top left) button to change from Carrier to Beacon.
- Use the **START/STOP** (top right) button to turn the test ON or OFF.
- When the test is complete **STOP** the test, then press the **BACK/LAP** (bottom right) to scroll to the next test page.

The next RF test page will be the BLE test page which will take four button presses of the **BACK/LAP** button.



- Use the **MENU/UP** (middle left) button to change the Channel.
- Use the **PWR/LIGHT** (top left) button to change from the TX mode to the RX mode.
- Hold the **MENU/UP** (middle left) button to change between Carrier Wave and data types.
- Use the **DOWN** (bottom left) button to change the TX LEN within data types.
- Use the **START/STOP** (top right) button to turn the test ON or OFF.

When the test is complete use the **START/STOP** (top right) button to STOP the test, then use the **BACK/LAP** button to scroll to the next test page. The next RF test page will be the WIFI test page.



- Use the **DOWN** (bottom left) button to change CHANNEL for test.
- Use the **PWR/LIGHT** (top left) button to change the Data Rate (CW, B-1 MHz, G-6 MHz, N-MCS 0, etc).
- Use the **START/STOP** (top right) button to turn test ON or OFF

When all testing has been completed, press and hold the **PWR/LIGHT** (top left) to power off the unit.

3. Product Configuration (continued)

3.1. Operational Characteristics & Software (continued)

During all radiated emissions measurement testing, the product was mounted on a polystyrene form to facilitate rotating the device through three orthogonal axes, as required by ANSI C63.10, section 5.10.1, for a hand held or body worn device. The three axes were defined as follows:

- X-Axis Horizontal on the left edge with the Garmin logo on the face of the AA3095 pointing to the left. The front of the device was facing the antenna at 0° turntable azimuth.
- Y-Axis Vertical with Garmin logo on the face of the AA3095 pointing up. The front of the device was facing the antenna at 0° turntable azimuth.
- Z-Axis The front of the AA3095 was facing up. The bottom edge of the device was facing the antenna at 0° turntable azimuth. The Garmin logo on the face of the AA3095 is pointing away from the antenna at 0° azimuth.



3.2. EUT Hardware

Manufacturer	Model/Part # / Options	Serial Number	Input Voltage	Freq (Hz)	Description/Function
Garmin International, Inc.	AA3095	3949088924 ¹ 3949088937 ²	3.7	DC	Dive Watch

¹ Unit used for radiated test measurements.

² Unit used for conducted test measurements.

3.3. EUT Cables/Transducers

Cable Type	Length	Shield	From	To
See 3.6				

3.4. Miscellaneous EUT Items

Manufacturer	Model/Part #	Qty	Description / Function
None			

3. Product Configuration

3.5. Support Equipment


Device	Manufacturer	Model	Serial No.	Comment
AC Adapter	Garmin	ADP-5BW PN 362-00087-00	054W56B018B	5 volts at 1 amp

3.6. Support Equipment Cables


Part #	Shielded Y or N	Length	Description / Function
320-01161-00	Y	1 Meter	Charger cable. USB Type A male to device specific connector.

3.7. Block Diagram


Unit operating off internal battery.

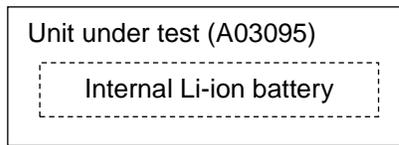

Battery charged via USB cable connected to AC adapter (Part 15.207)

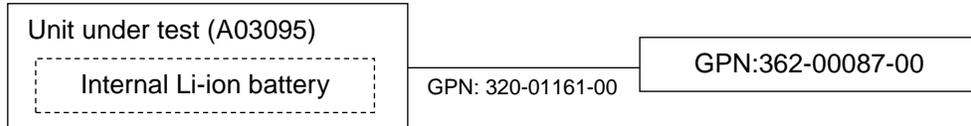

Unit powered by internal battery transmitting ANT+/BLE/Wi-Fi wireless data @ 2.4 GHz

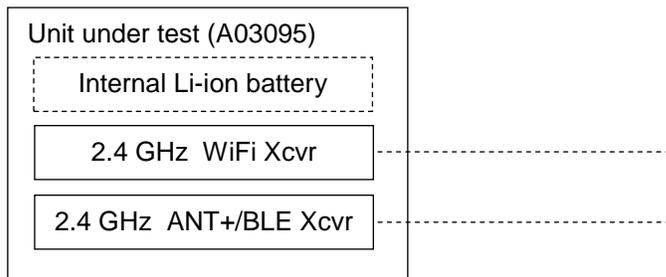

4. Measurements Parameters

4.1. Measurement Equipment Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due	Interval
EMI Test Receiver, 9kHz - 7GHz ¹	Rohde & Schwarz	ESR7	101156	7/23/2018	3 Years
Spectrum Analyzer 20 Hz – 40 GHz ²	Rohde & Schwarz	FSV40	100899	7/23/2018	3 Years
Spectrum Analyzer, 9 kHz - 40 GHz ³	Rohde & Schwarz	FSVR40	100909	5/3/2019	2 Years
Spectrum Analyzer, 2 Hz - 26 GHz ⁴	Rohde & Schwarz	FSW26	102057	12/7/2018	2 Years
EMI Receiver	Hewlett Packard	8546A	3650A00360	12/6/2018	3 Years
Passive Loop Antenna, 9 kHz to 30 MHz	EMCO	6512	9309-1139	10/26/2018	2 Years
Biconilog Antenna, 30 MHz to 2 GHz	Sunol Sciences	JB1	A050913	6/3/2019	2 Years
Horn Antenna, 960 MHz to 18 GHz	Electro-Metrics	EM-6961	6337	5/2/2018	1 Year
Horn Antenna, 18 GHz to 40 GHz	Com-Power	AH-840	101032	2/24/2018	2 Years
Preamplifier, 1 GHz to 26.5 GHz	Hewlett Packard	8449B	3008A00329	7/22/18	3 Years
LISN 50 ohm 50 μH, 9 kHz to 30 MHz	EMCO	3825/2	9109-1860	11/17/2017	1 Year
2.4 GHz Band Reject Filter	Micro-Tronics	BRM50702	150	6/12/2018	1 Year
EMI Receiver, 9 kHz to 6.5 GHz	Hewlett Packard	8546A	3330A00115	12/4/2018	2 Years
Digital Barometer	Control Company	4195	ID236	10/8/2017	2 Years
Digital Multi-meter	Fluke	187	83030167	11/21/2017	1 Year
Temperature Chamber	Associated Research	E-0029	N/A	NR	---

¹ ESR7 Firmware revision: V3.36, Date installed: 05/16/2017 Previous V2.26 SP2, installed 11/15/2016.
² FSV40 Firmware revision: V2.30 SP4, Date installed: 05/04/2016 Previous V2.30 SP1, installed 10/22/2014.
³ FSVR40 Firmware revision: V2.23 SP1, Date installed: 08/19/2016 Previous V2.23, installed 10/20/2014.
⁴ FSW26 Firmware revision: V2.61 SP1, Date installed: 04/04/2017 Previous V2.40, installed 05/04/2016.

4.2. Measurement Software

Manufacturer	Software Description	Title or Model #	Rev.	Report Sections
Compliance Worldwide	Test Report Generation Software	Test Report Generator	1.0	7.9. Conducted Emissions

4. Measurements Parameters

4.3. Measurement & Equipment Setup

Test Dates:	7/14/2017 – 7/28/2017
Test Engineer:	Brian Breault
Normal Site Temperature (15 - 35°C):	21.2
Relative Humidity (20 -75%RH):	35
Frequency Range:	25 MHz to 25 GHz
Measurement Distance:	3 Meters
	200 Hz - 10 kHz to 150 kHz
EMI Receiver IF Bandwidth:	9 kHz - 150 kHz to 30 MHz
	120 kHz - 30 MHz to 1 GHz
	1 MHz - Above 1 GHz
	1 kHz - 10 kHz to 150 kHz
EMI Receiver Average Bandwidth:	30 kHz - 150 kHz to 30 MHz
	300 kHz - 30 MHz to 1 GHz
	3 MHz - Above 1 GHz
	Peak, QP - 10 kHz to 1 GHz
Detector Function:	Peak, Avg - Above 1 GHz
	Unless otherwise specified.

4.4. Measurement Procedures

Test measurements were made in accordance FCC Part 15.247: Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5850 MHz, and 24.0 - 24.25 GHz.

The measurement procedures in this report are in accordance with ANSI C63.10-2013: *American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices*. FCC OET Publication Number KDB 558074 D01 v03r03, *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247*, dated April 5, 2017, was also referenced for the test procedures used to generate the data in this report. All references to FCC OET publication number 558074 refer to this version of the publication.

All conducted mode measurements include a 10.25 dB measurement offset value to account for the following:

- 0.047 diameter semi-rigid type cable < 2 inches (approx. loss) 0.024 dB
- Harbor Industries RG142 0.62 meter cable + 10 dB attenuator 10.226 dB

This measurement offset value represents an average of the three test frequencies and represents an absolute worst case error of -0.024 dB.

All radiated emissions measurements include correction factors for antenna, cables, preamp and attenuators, if used.

4. Measurements Parameters

4.5. Measurement Uncertainty

The following uncertainties are expressed for an expansion/coverage factor of K=2.

RF Frequency	$\pm 1 \times 10^{-8}$
Radiated Emission of Transmitter	± 4.55 dB
Radiated Emission of Receiver	± 4.55 dB
Temperature	$\pm 0.91^{\circ}$ C
Humidity	$\pm 5\%$

5. Choice of Equipment for Test Suits

5.1 Choice of Model

This test report is based on the two test samples supplied by the manufacturer. One sample is unmodified and one has a 0.047 diameter semi-rigid 50Ω cable attached to an SMA male connector in place of the antenna. These units are reported by the manufacturer to be equivalent to the production units.

5.2 Presentation

The test samples were tested complete with all required ancillary equipment. Refer to Section 3 of this report for product equipment configuration.

5.3 Choice of Operating Frequencies

The AA3095, as tested, operates on 40 channels (USA), from channels 0 to 39 in the 2.4 GHz band.

In accordance with ANSI C63.10-2013, section 5.6, and FCC Part 15.31 (m), the choice of operating frequencies selected for the testing detailed in this report are as follows:

Channel	Frequency (MHz)						
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

5. Choice of Equipment for Test Suits (continued)

5.4 Mode of Operation

Modulation type : GFSK
 Payload pattern : PRB29
 Payload Length : 37 bytes

For band edge measurements (section 7.6), the DTS bandwidth measurements were taken into consideration for the worst case examples.

6. Measurement Summary

Test Requirement	FCC Rule Reference	Test Report Section	Result
Antenna Requirement	15.203	7.1	Compliant
Minimum DTS Bandwidth	15.247 (a) (2)	7.2	Compliant
Maximum Peak Conducted Output Power	15.247 (b) (1)	7.3	Compliant
Operation with directional antenna gains greater than 6 dBi	15.247 (b) (4)	7.4	Compliant
Spurious Radiated Emissions	15.247 (d)	7.5	Compliant
Spurious Radiated Emissions (> GHz) - Harmonic Measurements	15.247 (d)		Compliant
Lower and Upper Band Edges	15.247 (d)	7.6	Compliant
Emissions in Non-restricted Frequency Bands	15.247(e)	7.7	Compliant
Peak Power Spectral Density	15.247(e)	7.8	Compliant
Conducted Emissions	15.207	7.9	Compliant
Duty Cycle	15.207	7.10	Compliant
Public Exposure to Radio Frequency Energy Levels	1.1307 (b) (1)	7.11	Compliant

7. Measurement Data

7.1. Antenna Requirement (15.203)

Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

Results: The Garmin AA3095 utilizes an etch antenna which is not user accessible.

7. Measurement Data

7.2. Minimum DTS Bandwidth

Requirement: (15.247 (a) (2))


Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Procedure: This test was performed in accordance with the procedure detailed in FCC OET publication number 558074, Section 8.1 Option 1, DTS (6 dB) Channel Bandwidth.

Results: The device under test meets the minimum 500 kHz DTS (6 dB) bandwidth requirement.

Channel	Frequency (MHz)	-6 dB Bandwidth (kHz)	Minimum -6 dB Bandwidth (kHz)	Result
0	2402	701.43	>500	Compliant
19	2440	694.93	>500	Compliant
39	2480	712.93	>500	Compliant

7.2.1. Low Channel – 0, 2412 MHz

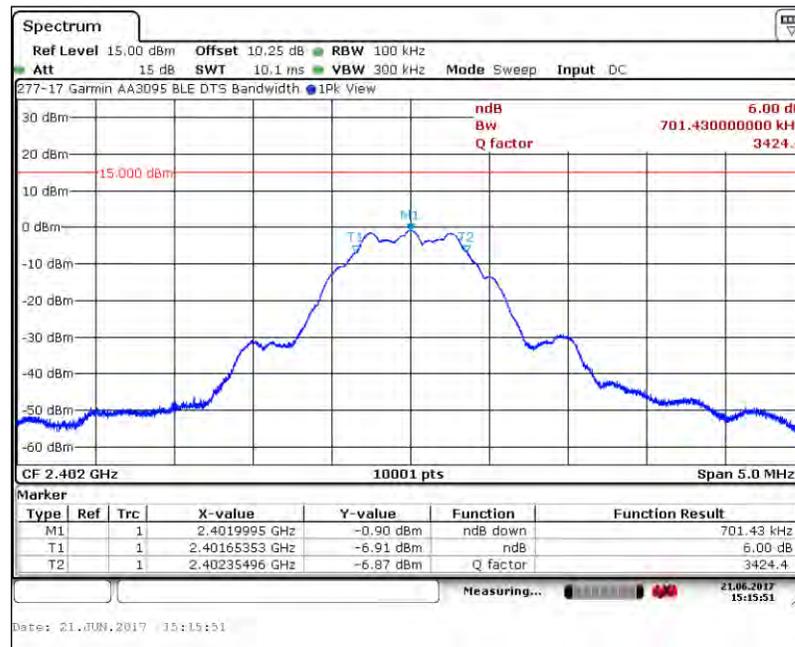


Test Number: 277-17

Issue Date: 7/28/2017


7. Measurement Data

7.2. Minimum DTS Bandwidth (15.247 (a) (2)) (continued)

7.2.2. Middle Channel – 19, 2440 MHz

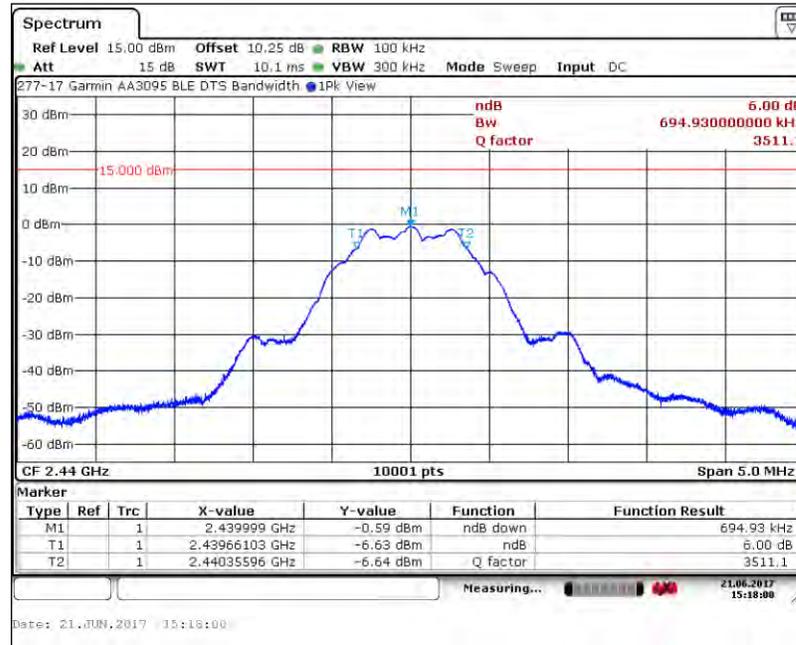

7.2.3. High Channel – 39, 2480 MHz

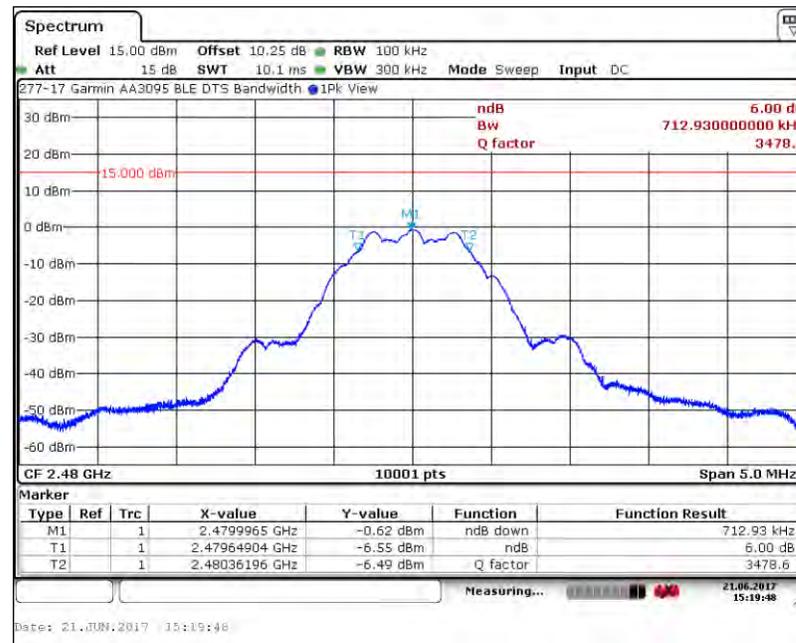

7. Measurement Data (continued)

7.3. Maximum Peak Conducted Output Power

Requirement: (15.247 (b) (3))

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt (+30 dBm).


Procedure: This test was performed in accordance with the procedure detailed in FCC OET publication number KDB 558074, Section 9.1.1.

Test Note: A spectrum analyzer resolution bandwidth of 1 MHz and a video bandwidth of 3 MHz were used to meet the requirements of FCC OET publication number 558074, Section 9.1.1 and the measured product DTS bandwidth.

Results: The device under test meets the required maximum peak conducted output power level of 1 Watt (+30 dBm).

Channel	Frequency	Maximum Peak Conducted Output Power	Peak Limit	Margin	Result
	(MHz)	(dBm)	(dBm)	(dB)	
0	2402	-0.55	30.00	-30.55	Compliant
19	2440	-0.47	30.00	-30.47	Compliant
39	2480	-0.44	30.00	-30.44	Compliant


7.3.1. Low Channel – 0, 2402 MHz

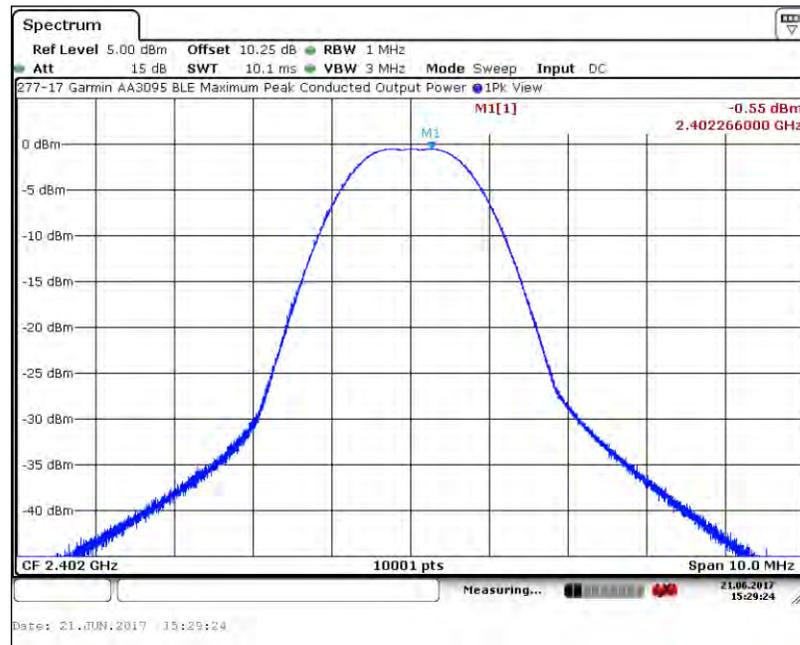


7. Measurement Data

7.3. Maximum Peak Conducted Output Power (continued)

7.3.2. Middle Channel – 19, 2440 MHz

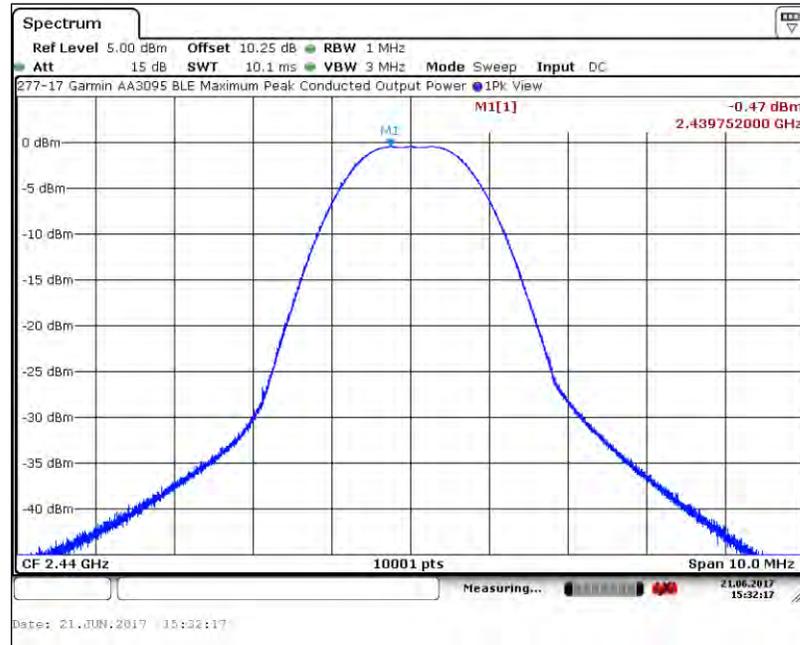

7.3.3. High Channel – 39, 248 MHz

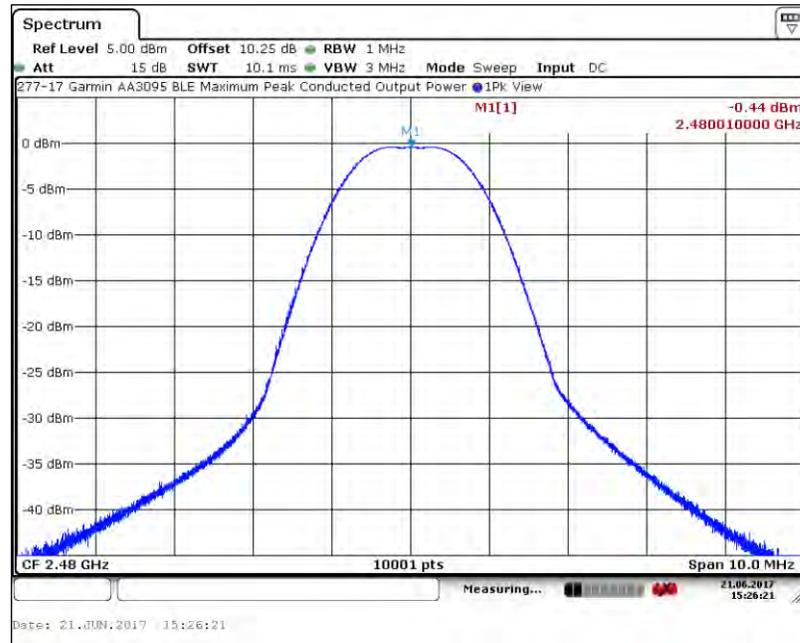

7. Measurement Data**7.4. Operation with directional antenna gains greater than 6 dBi (15.247 (b)(4))**

Requirement: If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of FCC Part 15.247, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Procedure: Not applicable for the device under test.

DUT Status: The DUT utilizes an antenna with a -1.7 dBi gain and therefore is exempt from this requirement.

7. Measurement Data (continued)

7.5. Transmitter Spurious Radiated Emissions (30 kHz to 25 GHz)

7.5.1 Transmitter Spurious Radiated Emissions

Requirement: (15.209) The Emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency Range (MHz)	Distance (Meters)	Limit (dBµV/m) ¹
0.009 to 0.490	3	128.5 to 93.8
0.490 to 1.705	3	73.8 to 63.0
1.705 to 30	3	69.5
30 to 88	3	40.0
88 to 216	3	43.5
216 to 960	3	46.0
>960	3	54.0

¹Measurements in the 9 to 90 kHz, 110 to 490 kHz and above 1000 MHz ranges employ an average detector. Otherwise a quasi-peak detector is used.

Procedure: This test was performed in accordance with the procedure detailed in FCC OET publication number 558074, Section 12.0: Emissions in restricted frequency bands and FCC 47CFR Part 15.209: Radiated Emission Limits; General Requirements.

The test methods used to generate the data in this test report is in accordance with ANSI C63.10:2013, American National Standard for Testing Unlicensed Wireless Devices.

Test Notes: Measurements were made from the lowest oscillator frequency as stated by the manufacturer (32.768 kHz) to the 10th harmonic of the highest transmitter frequency or 40 MHz, whichever is lower.

Reference FCC Part 15.33(a) and FCC Part 15.33(a)(1).

Each of the test modes documented within the test report were evaluated and the worst case of each of the test modes is detailed in this section. A full set of measurement scans are presented in Appendix A of this test report.

Results: The Emissions from the DUT did not exceed the field strength levels specified in the above table.

Frequency Range	Worst-Case Measured Frequency	Field Strength	FCC Part 15.209 Limit	Margin	Reference	Receive Antenna Polarity
	(MHz)	(dBµV/m)	(dBµV/m)	(dB)	Appendix A	(H/V)
10 kHz - 150 kHz	.01218	102.16	125.87	-23.71	A1.1.3.	Parallel
.150 kHz - 30 MHz	0.53266	63.48	73.08	-9.60	A2.2.4.	Perpendicular
30 MHz - 1000 MHz	928.07140	38.83	46.00	-7.17	A3.2.2.	V
1000 MHz - 10000 MHz	9919.90000	48.56	54.00	-5.44	A4.1.4.	V
10000 MHz - 18000 MHz	16762.60000	47.74	54.00	-6.26	A5.3.4.	V
18000 MHz - 25000 MHz	24184.70000	47.10	54.00	-6.90	A6.1.4.	V

7. Measurement Data (continued)

7.5. Transmitter Spurious Radiated Emissions (150 kHz to 40 GHz)

7.5.2. Transmitter Spurious Radiated Emissions (Harmonic Meas.) Test Results

Worst case measurements of Harmonics that fall into the restricted bands.

7.5.2.1. 2.4 GHz, 802.11b

802.11b Freq. (MHz)	Field Strength (dBµV/m) ¹		Limit (dBµV/m)		Margin (dBµV/m)		Antenna Polarity (H/V)	Result
	Peak	Average	Peak	Average	Peak	Average		
4804	49.62	35.78	74.00	54.00	-24.38	-18.22	V	Compliant
4880	49.19	36.21	74.00	54.00	-24.81	-17.79	V	Compliant
4960	50.28	37.01	74.00	54.00	-23.72	-16.99	V	Compliant
7320	53.41	39.61	74.00	54.00	-20.59	-14.39	V	Compliant
7440	52.45	38.60	74.00	54.00	-21.55	-15.40	H	Compliant
12010	58.24	45.24	74.00	54.00	-15.76	-8.76	H	Compliant
12200	59.00	45.10	74.00	54.00	-15.00	-8.90	V	Compliant
12400	60.59	46.28	74.00	54.00	-13.41	-7.72	H	Compliant
19216	61.19	48.01	74.00	54.00	-12.81	-5.99	V	Compliant
19520	60.92	47.37	74.00	54.00	-13.08	-6.63	H	Compliant
19840	60.75	47.12	74.00	54.00	-13.25	-6.88	V	Compliant
22320	63.53	50.00	74.00	54.00	-10.47	-4.00	V	Compliant

¹ All correction factors are stored in the spectrum analyzer and applied to this column entry.

7. Measurement Data (continued)

7.6. Band Edge and Out of Band Measurements

Requirement: 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Procedure: For the lower band edge, this measurement was performed in accordance with the procedure detailed in FCC OET publication number 558074, Section 11: Emissions in non-restricted frequency bands.

For the upper band edge, this measurement was performed as a typical restricted band radiated emissions measurement above 1 GHz. Peak and CISPR average detectors and a 1 MHz resolution and 3 MHz video bandwidth were utilized.

Test Note: The radiated band edge and worst case out of band measurements in this report represent the measurements made with the worst case receive antenna polarity and product orthogonal position. In addition, the DTS bandwidth measurements were taken into consideration for the worst case examples.

Results: The DUT met the 20 dB requirement at the lower band edge and the Part 15.209 requirements at the upper band edge.

7.61 Lower Band Edge

Band Edge Frequency	Lowest Transmitter Frequency	Maximum PSD (100 kHz)	Band Edge Delta to Max PSD (100 kHz)	Minimum Required Delta	Result
(MHz)	(MHz)	(dBm)	(dBm)	(dB)	
2400	2402	0.74	-49.05	-20	Compliant

7. Measurement Data (continued)

7.6. Band Edge and Out of Band Measurements (continued)

Lower Band Edge



7.6.2. Upper Band Edge and Worst Case Out of Band

Upper Band Edge

Band Edge Frequency (MHz)	Field Strength (dBµV/m)		Limit (dBµV/m)		Margin (dB)		Result
	Peak	Average	Peak	Average	Peak	Average	
2483.5	51.59	34.31	74	54	-22.41	-19.69	Compliant


Worst Case Out of Band

Band Edge Frequency (MHz)	Out of Band Frequency (MHz)	Field Strength (dBµV/m)		Limit (dBµV/m)		Margin (dBµV/m)		Result
		Peak	Average	Peak	Average	Peak	Average	
2483.5	2483.6876	51.07	34.28	74	54	-22.93	-19.72	Compliant

7. Measurement Data (continued)

7.6. Band Edge and Out of Band Measurements (continued)

Upper Band Edge and Worst Case Out of Band

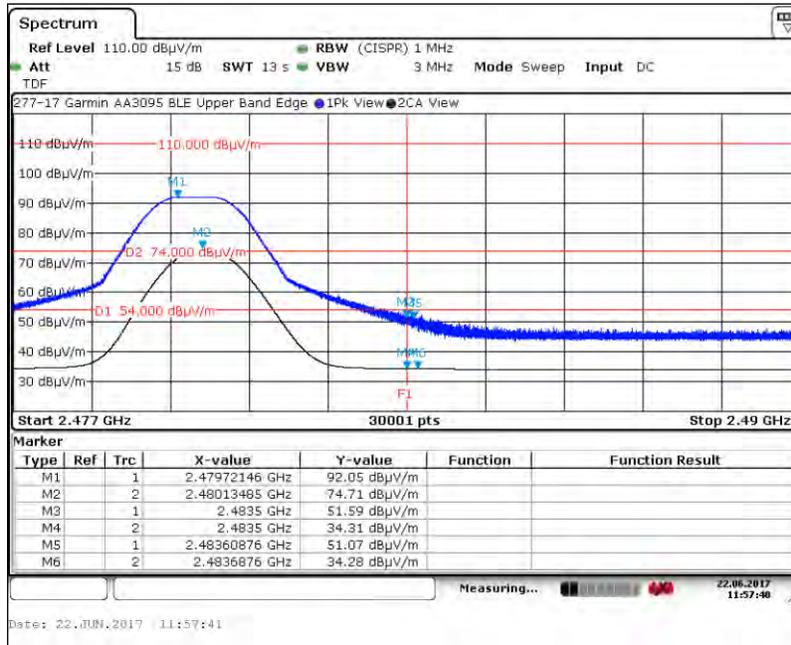

7.6.3. Lower Restricted Band, 2.310 MHz to 2390 MHz

Frequency (MHz)	Field Strength (dBµV/m)		Limit (dBµV/m)		Margin (dB)		Result
	Peak	Average	Peak	Average	Peak	Average	
2333.5934	47.05	35.9	74	54	-26.95	-18.1	Compliant


7.6.4. Upper Restricted Band, 2483.5 MHz, to 2500 MHz

Frequency (MHz)	Field Strength (dBµV/m)		Limit (dBµV/m)		Margin (dB)		Result
	Peak	Average	Peak	Average	Peak	Average	
2483.7159	50.88	34.26	74	54	-23.12	-19.74	Compliant


7. Measurement Data (continued)

7.6. Band Edge and Out of Band Measurements (continued)

Lower Restricted Band, 2.310 MHz, to 2390 MHz

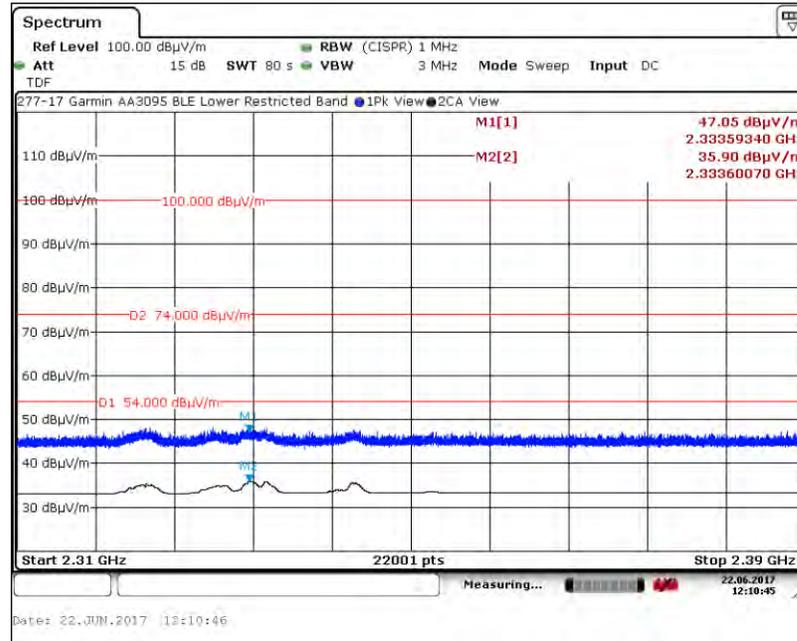

Upper Restricted Band, 2483.5 MHz, to 2500 MHz

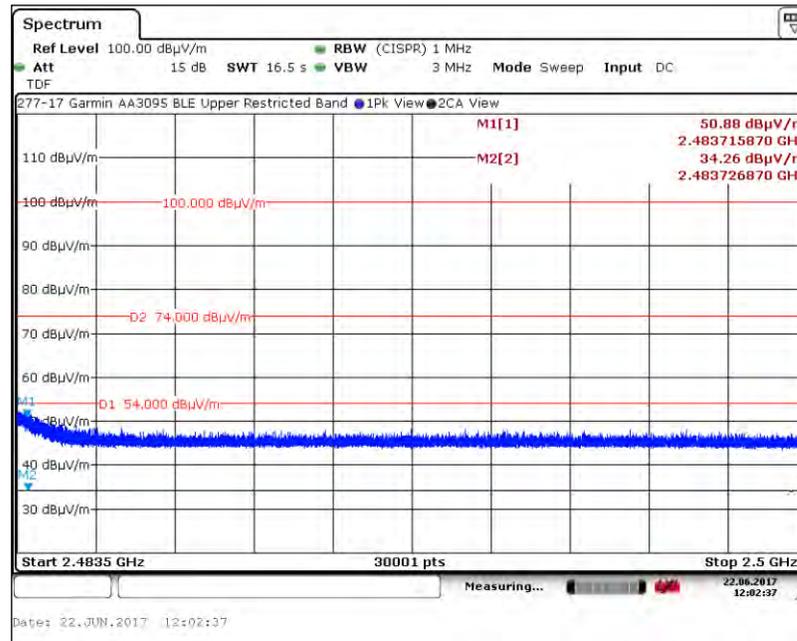

7. Measurement Data (continued)

7.7. Emissions in Non-restricted Frequency Bands

Requirement: 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Notes: Conducted mode measurements were taken for the data detailed in this section.

Peak in-band measurements were taken at the time the DTS (-6 dB) bandwidth measurements were made. These values were used as the reference levels for the following measurements. Refer to section 7.2 of this report for these values.

Results: The DUT met the 20 dB requirement emission level delta requirement in the non restricted frequency bands.

Emissions in Non-restricted Frequency Bands


Maximum PSD (100 kHz) In-Band ¹ (dBm)	Worst Case Out-of-Band Frequency (MHz)	Maximum PSD (100 kHz) Out-of-Band (dBm)	Delta to Maximum PSD (dB)	Minimum Required Delta	Result
-0.59	4803.92	-42.22	-41.63	-20 dB	Compliant

¹Taken from Section 7.2 - DTS Bandwidth


7. Measurement Data (continued)

7.7. Emissions in Non-restricted Frequency Bands (continued)

7.7.1. 30 MHz to 2.4 GHz

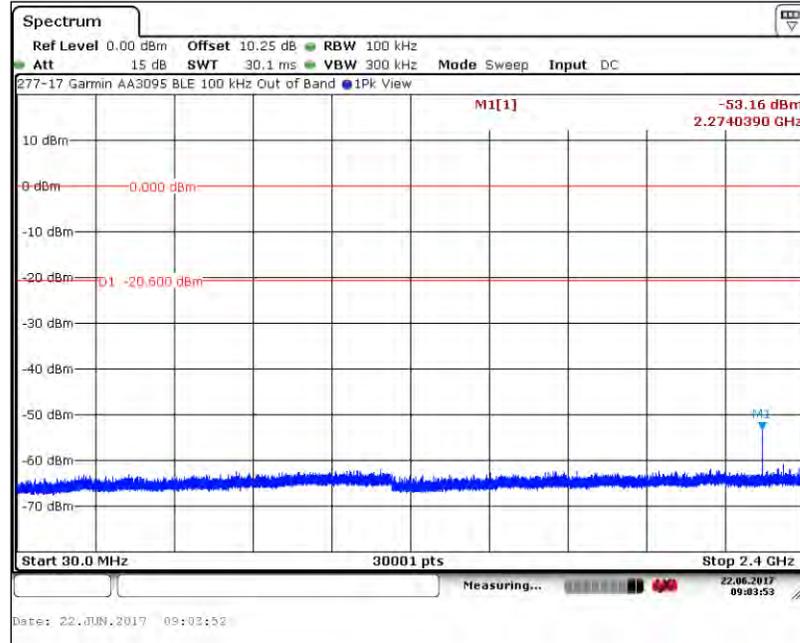

7.7.2. 2.4835 GHz to 18 GHz

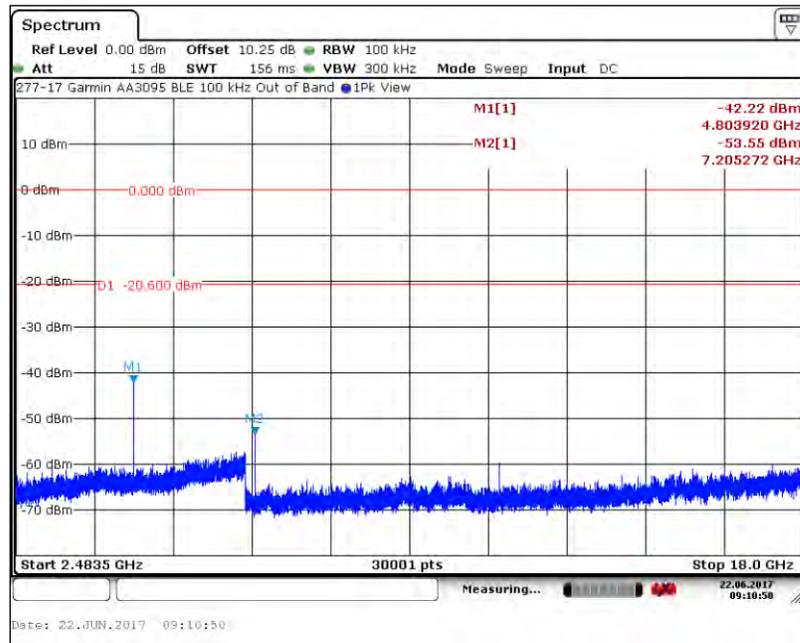


7. Measurement Data (continued)

7.7. Emissions in Non-restricted Frequency Bands (continued)

7.7.1. 802.11b

7.7.3. 18 GHz to 25 GHz

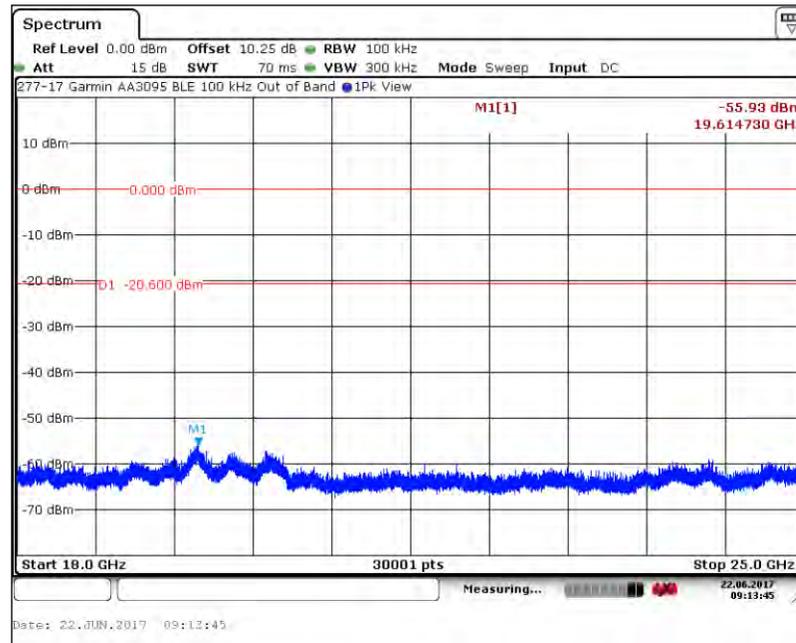

7. Measurement Data (continued)

7.8. Peak Power Spectral Density (15.247(e))

Requirement: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of FCC Part 15.247. The same method of determining the conducted output power shall be used to determine the power spectral density.

Procedure: FCC OET publication number 558074, Section 10.2: Method PKPSD (peak PSD). FCC OET 662911 was referenced to determine the procedure for measuring in-band power spectral density of transmitters with multiple outputs in the same band.

Results: The DUT MEETS the required power spectral density limit at the tested frequencies.


Measurement Results in 2400 MHz to 2483.5 MHz Band

Channel	Frequency	Maximum PSD Frequency	Maximum Power Spectral Density	Limit	Margin	Result
	(MHz)	(MHz)	(dBm)	(dBm)	(dB)	
0	2402	2402.00252	-17.50	8	-25.50	Compliant
19	2440	2440.00294	-17.43	8	-25.43	Compliant
39	2480	2480.00294	-17.49	8	-25.49	Compliant


7. Measurement Data (continued)

7.8. Peak Power Spectral Density (15.247(e)) (continued)

7.8.1. Low Channel – 0, 2402 MHz

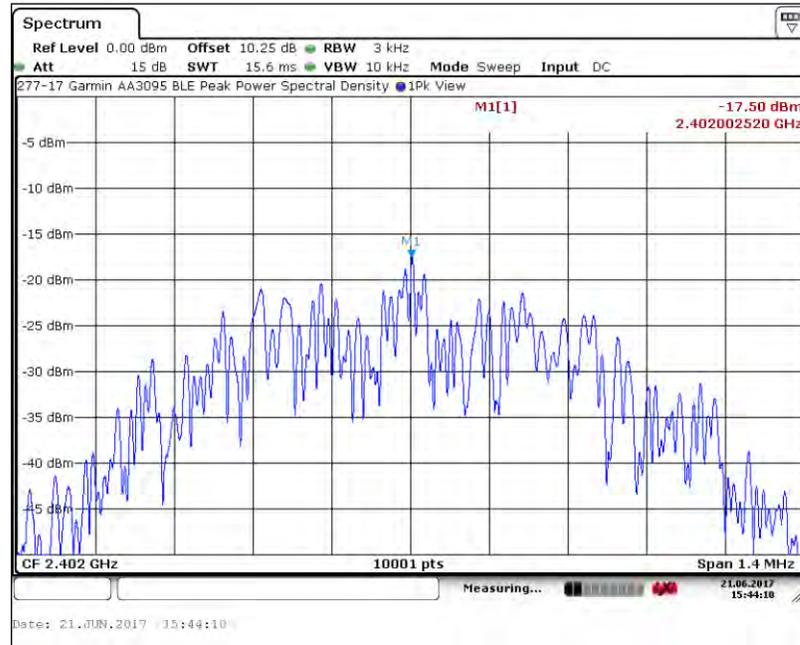


7.8.2. Middle Channel – 19, 2440 MHz

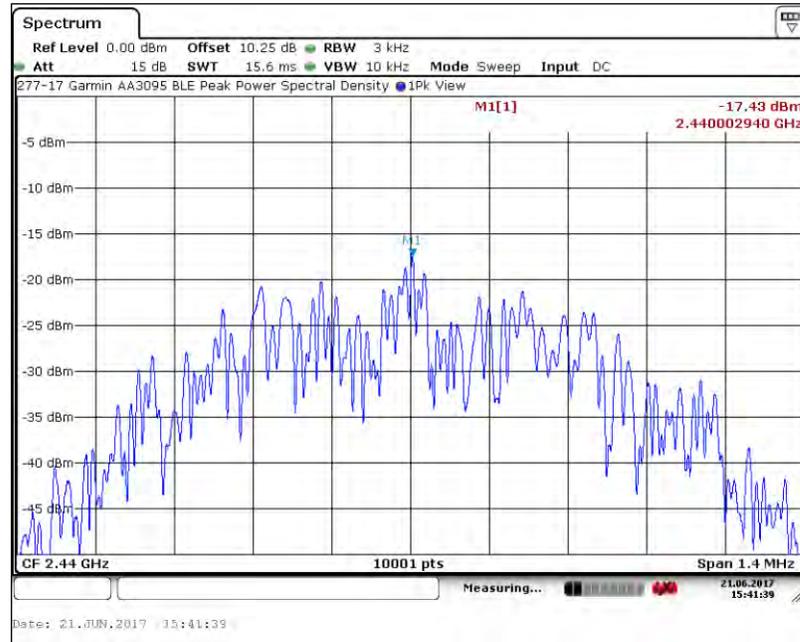

7. Measurement Data

7.8. Peak Power Spectral Density (15.247(e)) (continued)

7.8.3. High Channel – 39, 2480 MHz

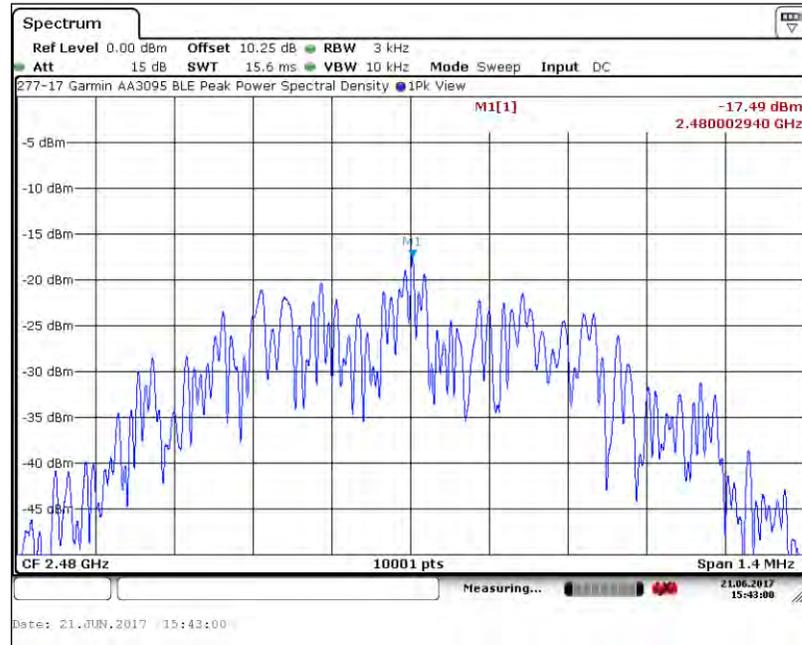

7. Measurement Data (continued)

7.9. Conducted Emissions

Requirement: 15.207 With certain exceptions, an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-Peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

* Decreases with the logarithm of the frequency.

Procedure: This test was performed in accordance with the procedure detailed in ANSI C63.10-2013, Section 6.2: Standard test method for ac power-line conducted emissions from unlicensed wireless devices.

Test Notes: The portable device was fully discharged and then plugged into the supplied charger.

Results: The device under test meets the FCC Part 15.207 test requirements.


Measurement & Equipment Setup

Test Date: 6/27/2017
 Test Engineer: Brian Breault
 Site Temperature (°C): 21
 Relative Humidity (%RH): 37
 Frequency Range: 0.15 MHz to 30 MHz
 EMI Receiver IF Bandwidth: 9 kHz
 EMI Receiver Avg Bandwidth: 30 kHz
 Detector Functions: Peak, Quasi-Peak & Average

7. Measurement Data (continued)
 7.9. Conducted Emissions (FCC Part 15.207)
 7.9.1. 120 Volts, 60 Hz Phase

Test No.: 277-17, 120 Volts, 60 Hz Phase

FCC Part 15.207

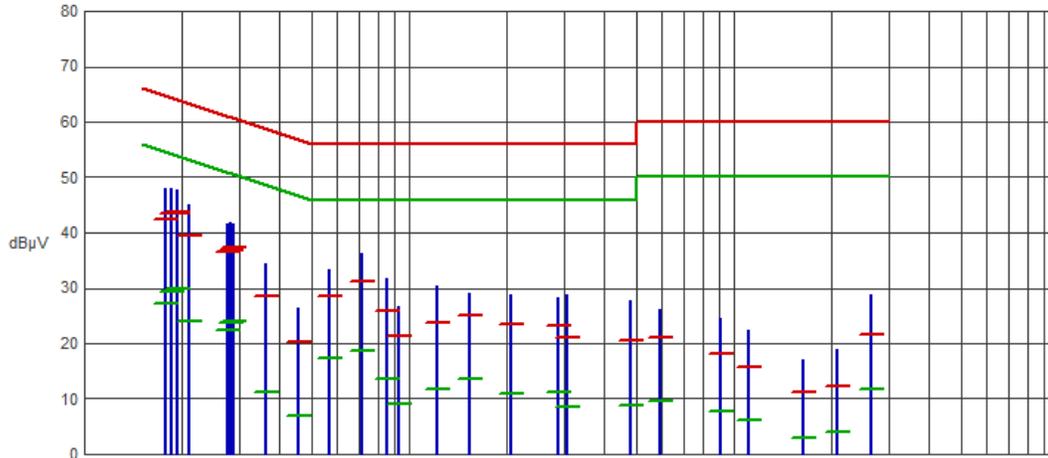


Frequency (MHz)	Pk Amp (dBµV)	QP Amp (dBµV)	QP Limit (dBµV)	QP Margin (dB)	Avg Amp (dBµV)	Avg Limit (dBµV)	Avg Margin (dB)	Comments
.1769	48.00	42.46	64.63	-22.17	27.20	54.63	-27.43	
.1861	47.94	43.43	64.21	-20.78	29.22	54.21	-24.99	
.1925	47.70	43.71	63.93	-20.22	29.96	53.93	-23.97	
.1930	47.53	43.52	63.91	-20.39	29.84	53.91	-24.07	
.2105	45.12	39.35	63.19	-23.84	24.01	53.19	-29.18	
.2771	41.72	36.58	60.90	-24.32	22.44	50.90	-28.46	
.2811	41.96	36.77	60.78	-24.01	23.67	50.78	-27.11	
.2880	41.63	37.27	60.58	-23.31	23.97	50.58	-26.61	
.3625	34.42	28.58	58.67	-30.09	11.17	48.67	-37.50	
.4580	26.42	20.40	56.73	-36.33	6.85	46.73	-39.88	
.5704	33.24	28.59	56.00	-27.41	17.42	46.00	-28.58	
.7144	36.31	31.13	56.00	-24.87	18.75	46.00	-27.25	
.8530	31.75	25.95	56.00	-30.05	13.47	46.00	-32.53	
.9255	26.74	21.39	56.00	-34.61	8.97	46.00	-37.03	
1.2162	30.29	23.61	56.00	-32.39	11.60	46.00	-34.40	
1.5302	29.01	24.96	56.00	-31.04	13.56	46.00	-32.44	
2.0682	28.74	23.35	56.00	-32.65	10.83	46.00	-35.17	
2.8793	28.36	23.14	56.00	-32.86	11.17	46.00	-34.83	
3.0775	28.81	21.09	56.00	-34.91	8.46	46.00	-37.54	
4.8278	27.83	20.52	56.00	-35.48	8.87	46.00	-37.13	
5.9457	26.01	20.97	60.00	-39.03	9.73	50.00	-40.27	
9.0879	24.42	18.15	60.00	-41.85	7.86	50.00	-42.14	
11.0568	22.34	15.75	60.00	-44.25	6.16	50.00	-43.84	
16.2994	17.08	11.32	60.00	-48.68	2.92	50.00	-47.08	
20.8074	18.87	12.19	60.00	-47.81	3.92	50.00	-46.08	
26.3606	28.70	21.60	60.00	-38.40	11.65	50.00	-38.35	

7. Measurement Data (continued)
 7.9. Conducted Emissions (FCC Part 15.207) (continued)
 7.9.2. 120 Volts, 60 Hz Neutral

Test No.: 277-17, 120 Volts, 60 Hz Neutral

FCC Part 15.207

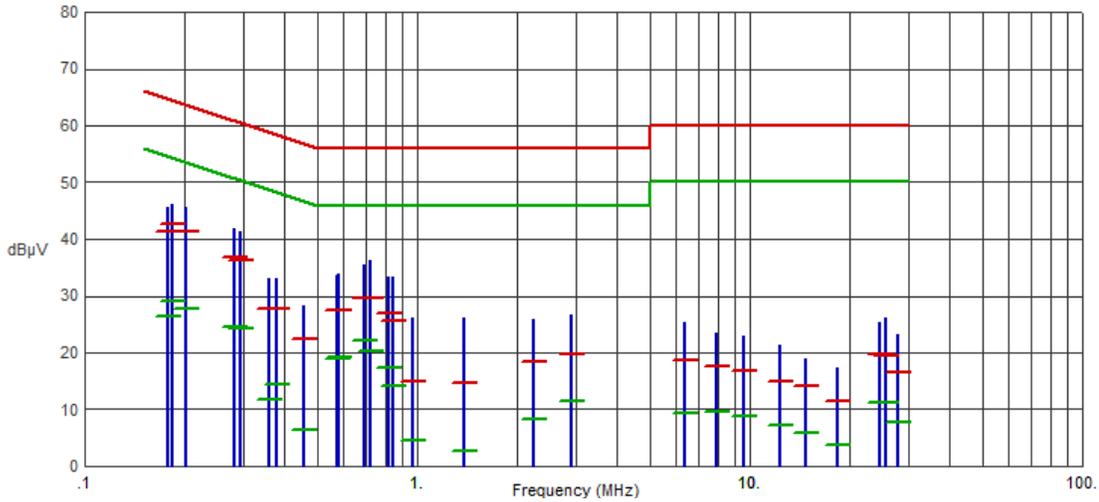


Frequency (MHz)	Pk Amp (dBµV)	QP Amp (dBµV)	QP Limit (dBµV)	QP Margin (dB)	Avg Amp (dBµV)	Avg Limit (dBµV)	Avg Margin (dB)	Comments
.1781	45.48	41.32	64.57	-23.25	26.45	54.57	-28.12	
.1835	46.15	42.58	64.33	-21.75	29.09	54.33	-25.24	
.2014	45.71	41.23	63.55	-22.32	27.68	53.55	-25.87	
.2823	41.86	36.69	60.75	-24.06	24.62	50.75	-26.13	
.2928	41.30	36.30	60.44	-24.14	24.26	50.44	-26.18	
.3578	33.09	27.78	58.78	-31.00	11.84	48.78	-36.94	
.3788	32.99	27.79	58.31	-30.52	14.49	48.31	-33.82	
.4574	28.40	22.47	56.74	-34.27	6.30	46.74	-40.44	
.5724	33.69	27.47	56.00	-28.53	18.95	46.00	-27.05	
.5815	33.76	27.55	56.00	-28.45	19.13	46.00	-26.87	
.6899	35.55	29.71	56.00	-26.29	22.07	46.00	-23.93	
.7260	36.26	29.47	56.00	-26.53	20.26	46.00	-25.74	
.8235	33.35	26.93	56.00	-29.07	17.33	46.00	-28.67	
.8458	33.31	25.53	56.00	-30.47	14.14	46.00	-31.86	
.9663	26.19	14.81	56.00	-41.19	4.50	46.00	-41.50	
1.3819	26.10	14.71	56.00	-41.29	2.69	46.00	-43.31	
2.2342	25.99	18.33	56.00	-37.67	8.31	46.00	-37.69	
2.9139	26.66	19.67	56.00	-36.33	11.38	46.00	-34.62	
6.3616	25.21	18.58	60.00	-41.42	9.41	50.00	-40.59	
7.9233	23.53	17.55	60.00	-42.45	9.68	50.00	-40.32	
9.5540	22.98	16.77	60.00	-43.23	8.73	50.00	-41.27	
12.2987	21.31	14.85	60.00	-45.15	7.20	50.00	-42.80	
14.7607	18.90	14.24	60.00	-45.76	5.97	50.00	-44.03	
18.3520	17.33	11.37	60.00	-48.63	3.64	50.00	-46.36	
24.5718	25.44	19.71	60.00	-40.29	11.13	50.00	-38.87	
25.5532	26.04	19.54	60.00	-40.46	11.12	50.00	-38.88	
27.8537	23.29	16.49	60.00	-43.51	7.84	50.00	-42.16	


7. Measurement Data (continued)

7.10. Duty Cycle (continued)

7.10.2. Middle Channel – 19, 2440 MHz

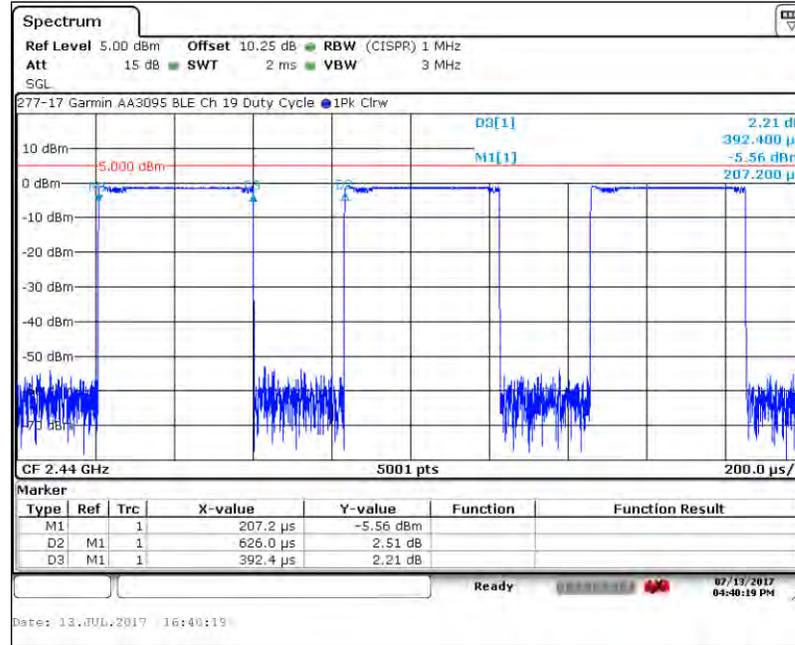

7.10.3. High Channel – 39, 2480 MHz

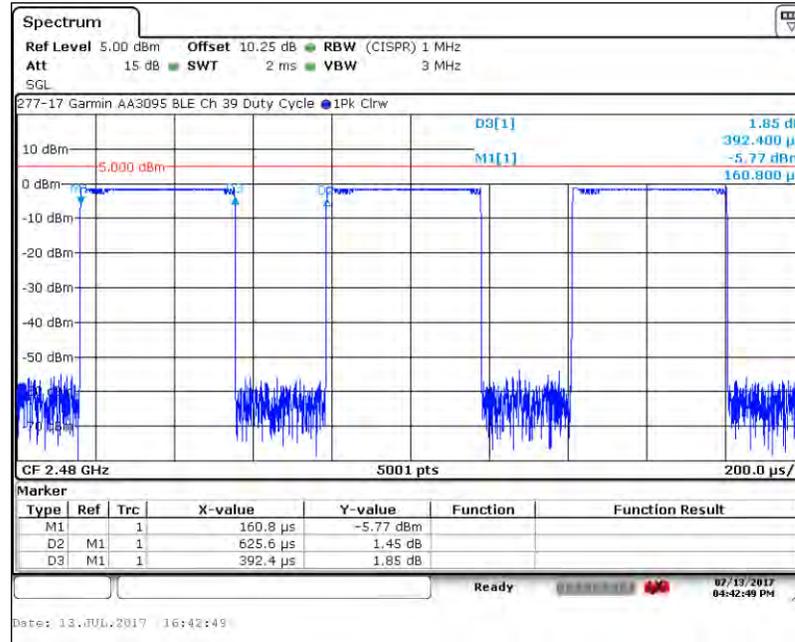

7. Measurement Data (continued)

**7.12. Public Exposure to Radio Frequency Energy Levels (15.247(i) (1.1307 (b)(1))
RSS-GEN, ISSUE 4 5.5, RSS 102)**

7.12.1. 15.247(i) (1.1307 (b)(1)) Requirements

Requirement: Portable devices are subject to radio frequency radiation exposure requirements.

For a 1-g head or body SAR, the test exclusion result must be ≤ 3.0.

For a 10-g extremity SAR, the test exclusion result must be ≤ 7.5.

Test Notes: The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by the following formula:

$$\text{SAR Test Exclusion} = \frac{P_{\text{MAX}}}{d_{\text{MIN}}} \times \sqrt{f_{(\text{GHz})}} \quad (1)$$

P_{MAX} mW Maximum power of channel, including tune-up tolerance

d_{MIN} mm Minimum test separation distance, mm (≤ 50 mm)

$f_{(\text{GHz})}$ GHz $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz (>100 MHz and <6 GHz)

(1) FCC OET 447498 - Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

Results: Passed - The device under test meets the exclusion requirement detailed in FCC OET 447498.

Channel:		0	19	39	
Input¹:	P_{MAX}	0.881	0.897	0.904	mW
	d_{MIN}^2	5.00	5.00	5.00	mm
	$f_{(\text{GHz})}$	2.402	2.440	2.480	GHz
Test Exclusion:		0.27	0.28	0.28	
Limit Exemption:		7.5	7.5	7.5	
Measurement Result:		Compliant	Compliant	Compliant	

¹ Taken from column 3 of the 802.11b table in Section 7.3 of this test report.

² When the minimum test separation distance is < 5 mm, a distance of 5 mm according to KDB 447498, 4.1 f) is applied to determine SAR test exclusion.

7. Measurement Data (continued)

**7.12. Public Exposure to Radio Frequency Energy Levels (15.247(i) (1.1307 (b)(1))
RSS-GEN, ISSUE 4 5.5, RSS 102) (continued)**

7.12.2. RSS-102 Issue 5 Requirements

Requirement: SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1. Portable devices are subject to radio frequency radiation exposure requirements.


Test Notes: The limit was taken from Table 1 of RSS-102 Issue 5. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 2.5.

Results: Failed - The device under test meets the exclusion requirement detailed in FCC OET 447498. The did not meet the RSS-102 Issue 5 requirements and will require testing in accordance with Industry Canada Spectrum Management and Telecommunications: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

Frequency	Separation Distance	Maximum Power	RSS-102 Limit	Result
MHz	mm	mW	mW	
2402	≤5	0.88	10.65	Compliant
2440	≤5	0.90	10.14	Compliant
2480	≤5	0.90	9.86	Compliant

8. Test Setup Photographs

8.1. Conducted Mode Measurements

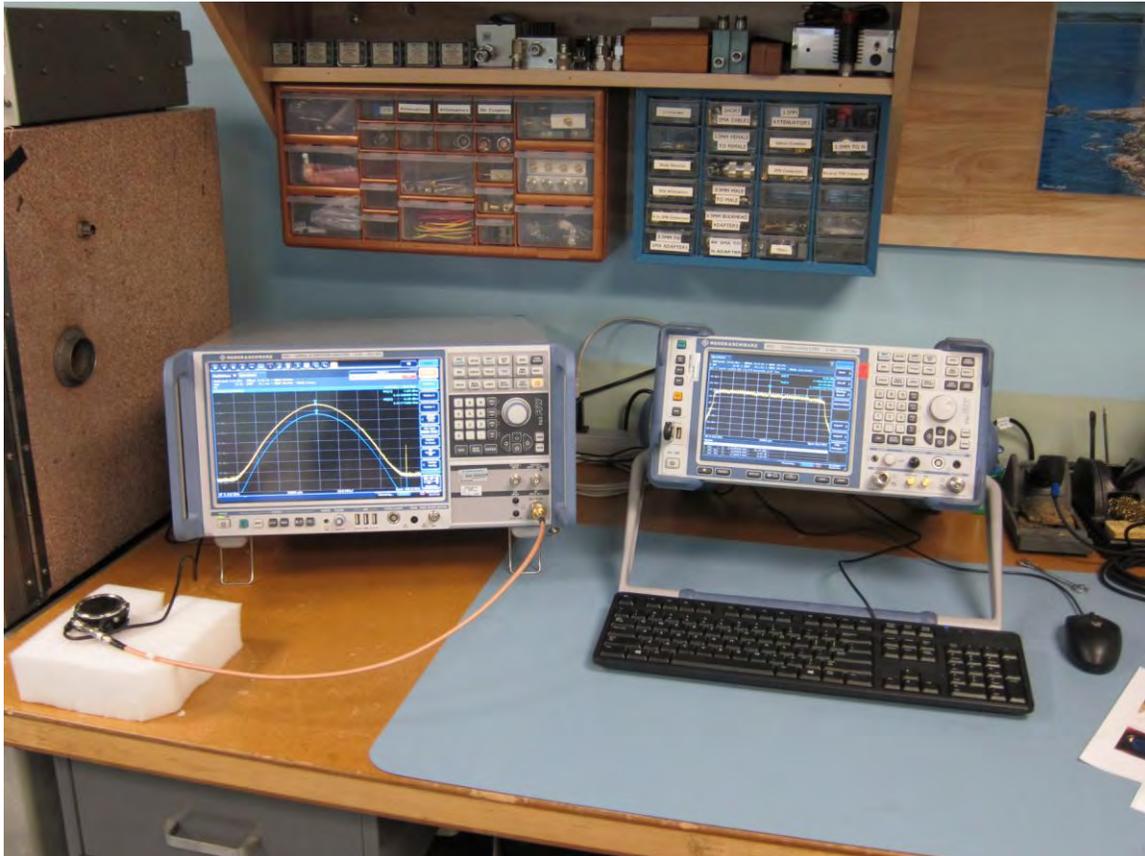

8. Test Setup Photographs

8.2. Spurious Radiated Emissions, 10 kHz to 1 GHz – Front



8. Test Setup Photographs

8.3. Spurious Radiated Emissions, 10 kHz to 30 MHz – Rear



8. Test Setup Photographs

8.4. Spurious Radiated Emissions, 30 MHz to 1 GHz – Rear



8. Test Setup Photographs

8.5. Radiated Emissions above 1 GHz – Front



8. Test Setup Photographs

8.6. Radiated Emissions 1 to 18 GHz – Rear



8. Test Setup Photographs

8.7. Harmonic Radiated Emissions above 18 GHz– Rear




8. Test Setup Photographs

8.8. Power Line Conducted Emissions – Front



8. Test Setup Photographs

8.9. Power Line Conducted Emissions – Rear

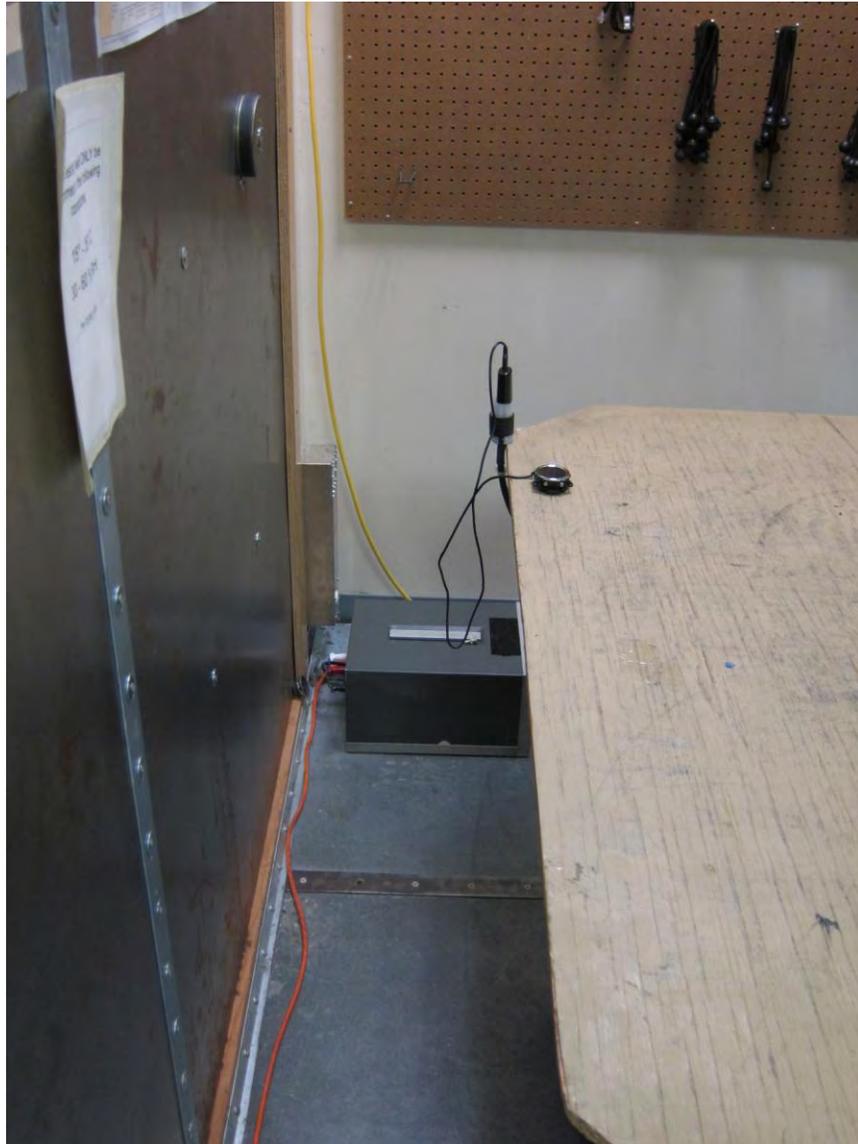

9. Test Site Description

Compliance Worldwide is located at 357 Main Street in Sandown, New Hampshire. The test sites at Compliance Worldwide are used for conducted and radiated emissions testing in accordance with the Federal Communications Commission (FCC) and Industry Canada standards. Through our American Association for Laboratory Accreditation (A2LA) ISO Guide 17025:2005 Accreditation our test sites are designated with the FCC (designation number **US1091**), Industry Canada (file number **IC 3023A-1**) and VCCI (Member number 3168) under registration number A-0208.

Compliance Worldwide is also designated as a Phase 1 CAB under APEC-MRA (US0132) for Australia/New Zealand AS/NZS CISPR 22, Chinese-Taipei (Taiwan) BSMI CNS 13438 and Korea (RRA) KN 11, KN 13, KN 14-1, KN 22, KN 32, KN 61000-6-3, KN 61000-6-4.

The radiated emissions test site is a 3 and 10 meter enclosed open area test site (OATS). Personnel, support equipment and test equipment are located in the basement beneath the OATS ground plane.

The conducted emissions site is part of a 16' x 20' x 12' ferrite tile chamber and uses one of the walls for the vertical ground plane required by EN 55022. A second conducted emissions site is also located in the basement of the OATS site with a 2.3 x 2.5 meter ground plane and a 2.4 x 2.4 meter vertical wall.

Both sites are designed to test products or systems 1.5 meters W x 1.5 meters L x 2.0 meters H, floor standing or table top.

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.1. Channel 0, 2402 MHz

A1.1.1. Measurement Results: X-Axis, Parallel Antenna

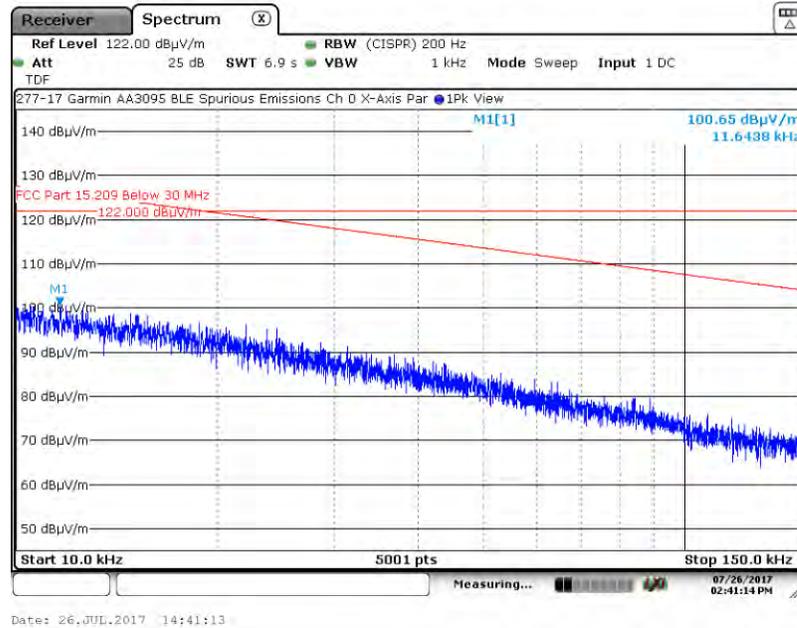

A1.1.2. Measurement Results: X-Axis, Perpendicular Antenna

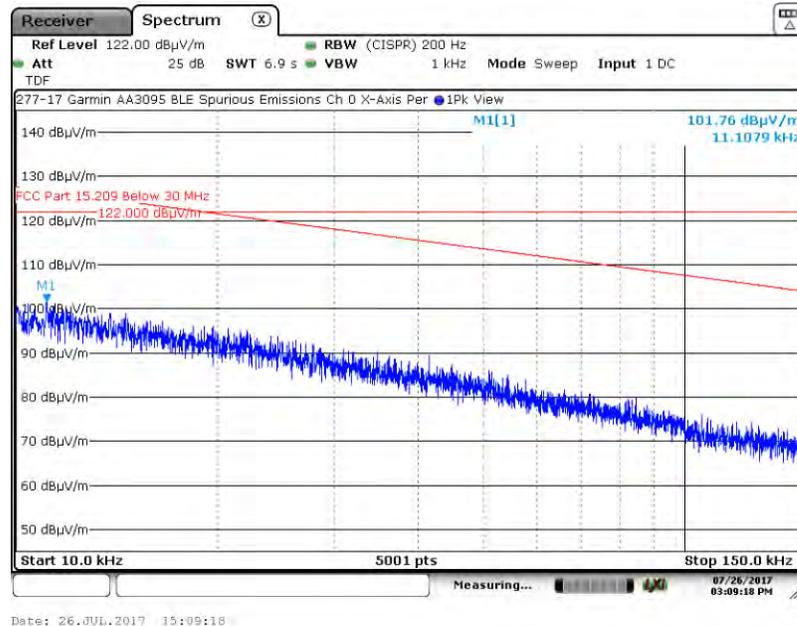

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.1. Channel 0, 2402 MHz

A1.1.3. Measurement Results: X-Axis, Ground-Parallel Antenna

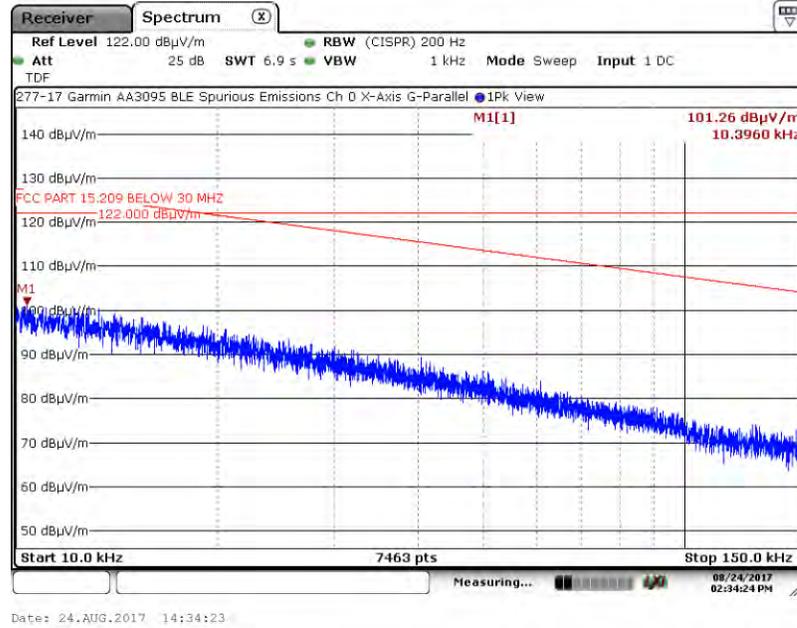

A1.1.4. Measurement Results: Y-Axis, Parallel Antenna

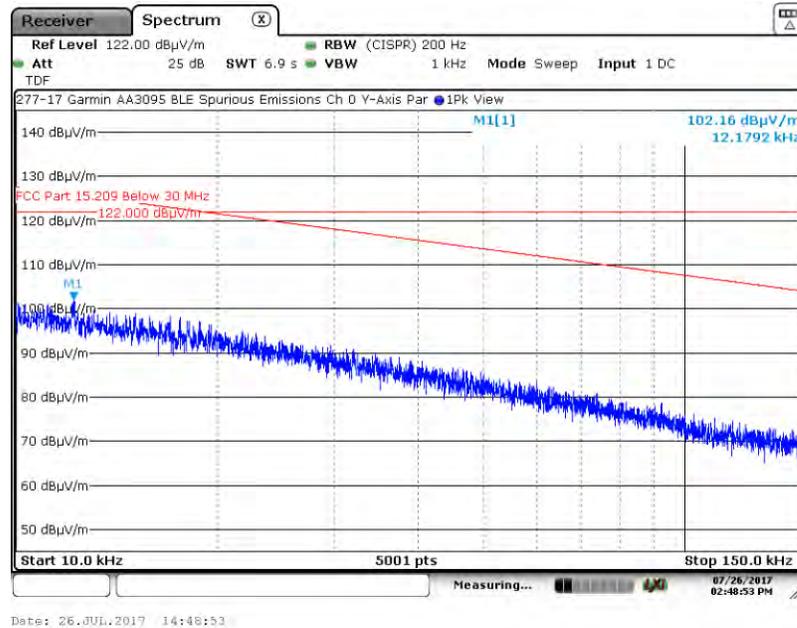

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.1. Channel 0, 2402 MHz

A1.1.5. Measurement Results: Y-Axis, Perpendicular Antenna

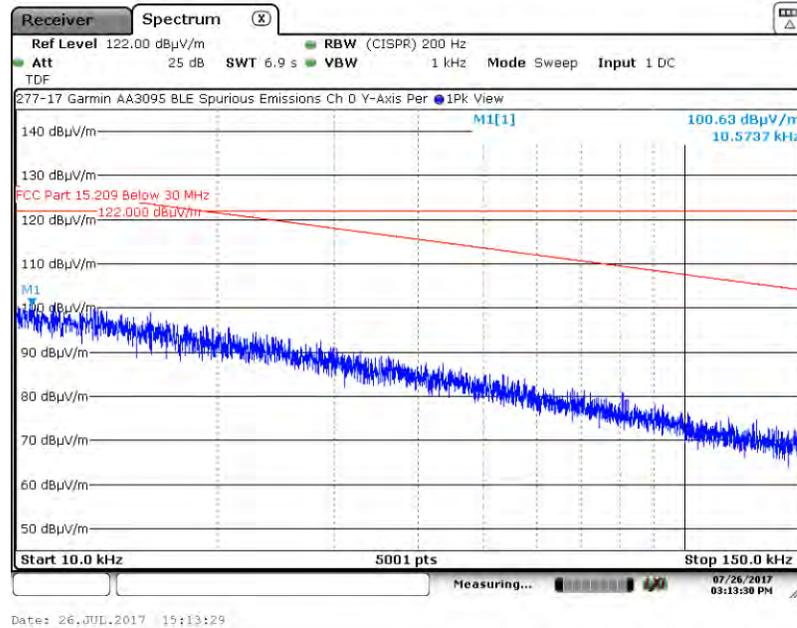

A1.1.6. Measurement Results: Y-Axis, Ground-Parallel Antenna

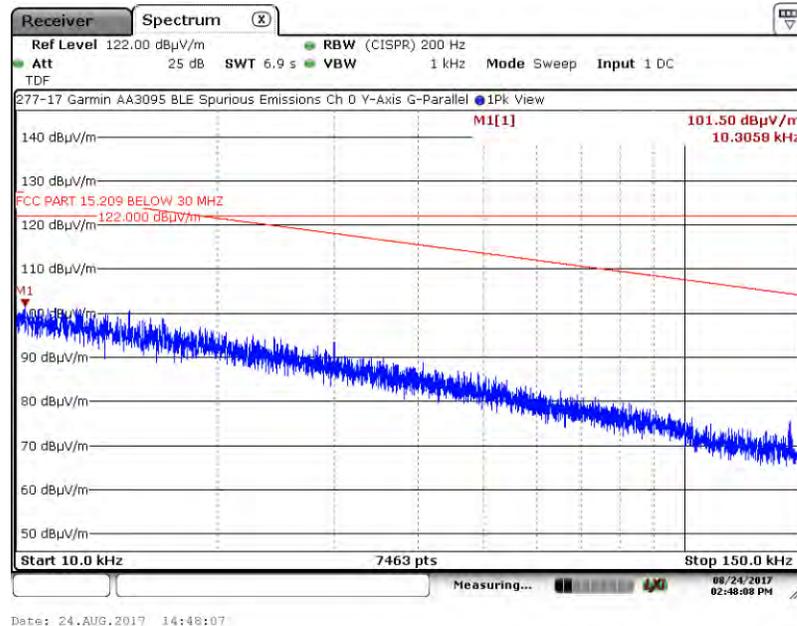

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.1. Channel 0, 2402 MHz

A1.1.7. Measurement Results: Z-Axis, Parallel Antenna

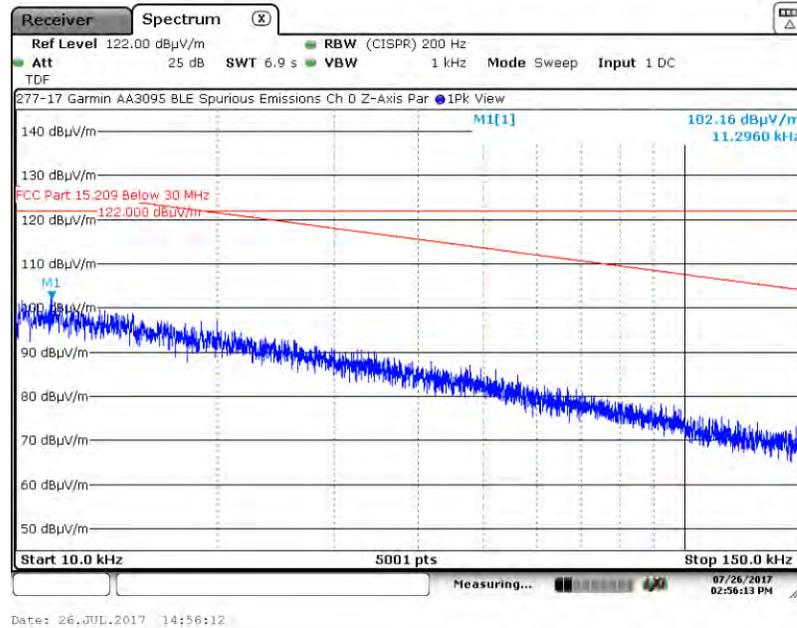

A1.1.8. Measurement Results: Z-Axis, Perpendicular Antenna

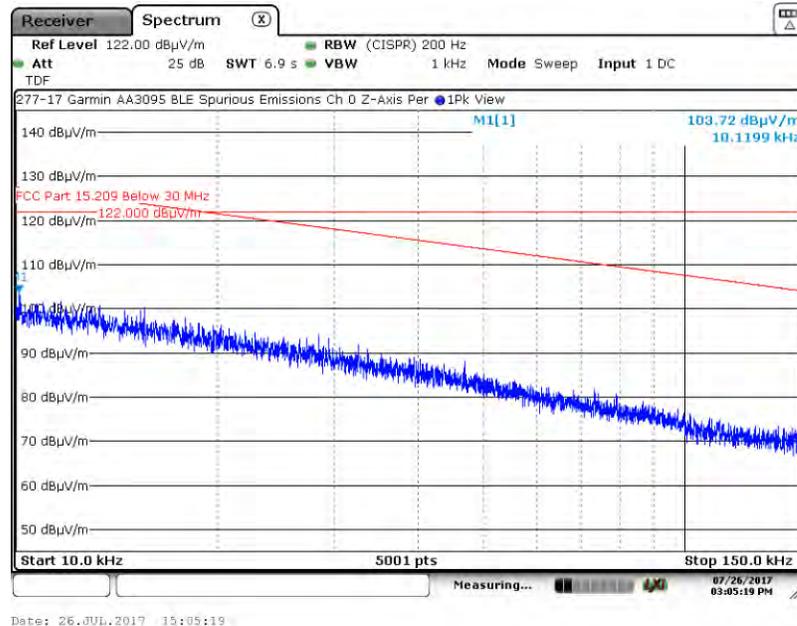

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)

A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.1. Channel 0, 2402 MHz

A1.1.9. Measurement Results: Z-Axis, Ground-Parallel Antenna

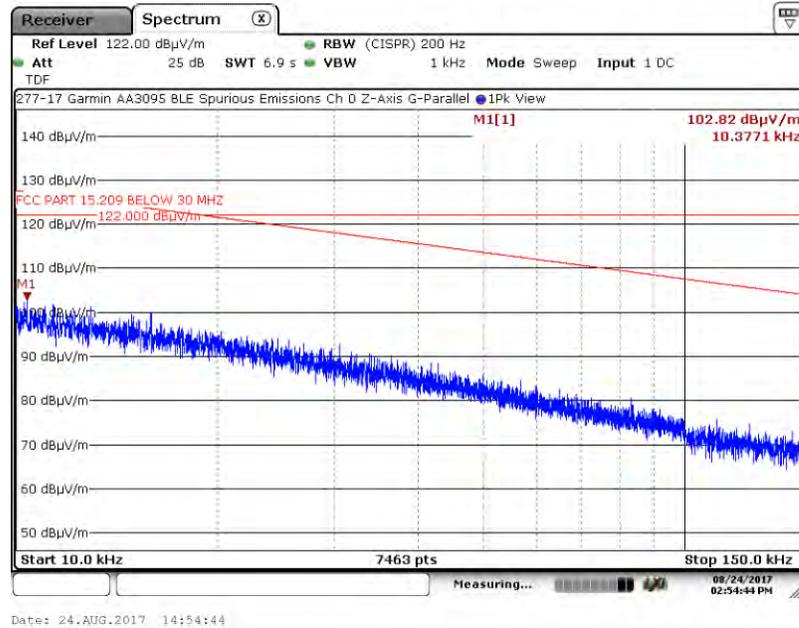

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.2. Channel 19, 2440 MHz

A1.2.1. Measurement Results: X-Axis, Parallel Antenna

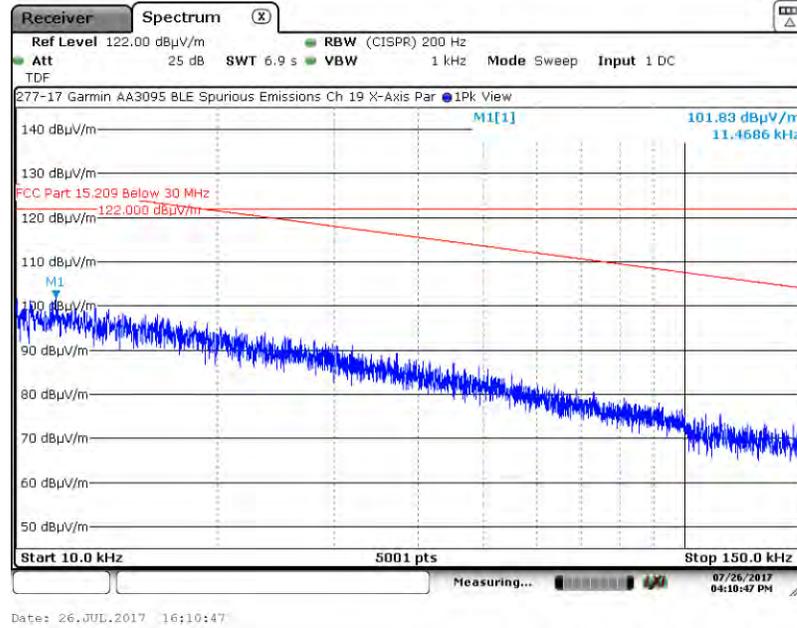

A1.2.2. Measurement Results: X-Axis, Perpendicular Antenna

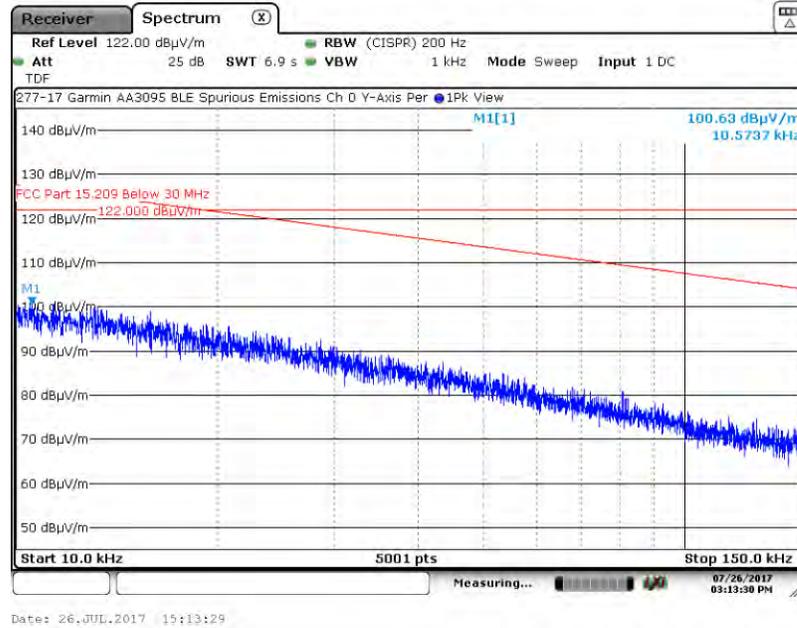

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.2. Channel 19, 2440 MHz

A1.2.3. Measurement Results: X-Axis, Ground-Parallel Antenna

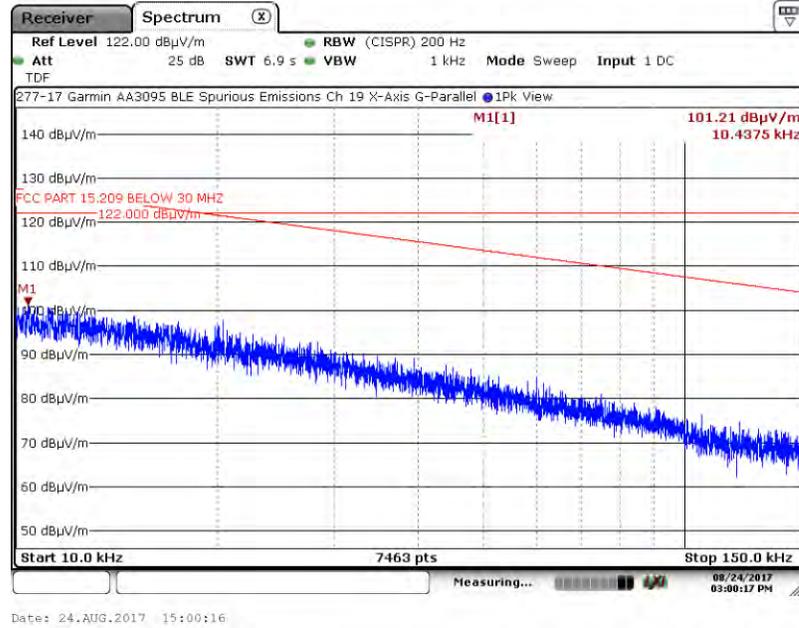

A1.2.4. Measurement Results: Y-Axis, Parallel Antenna

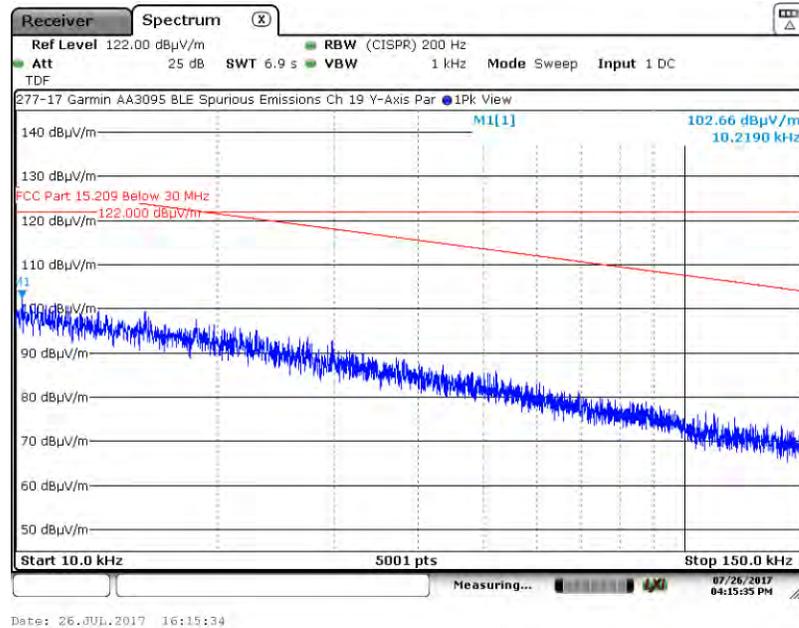

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.2. Channel 19, 2440 MHz

A1.2.5. Measurement Results: Y-Axis, Perpendicular Antenna

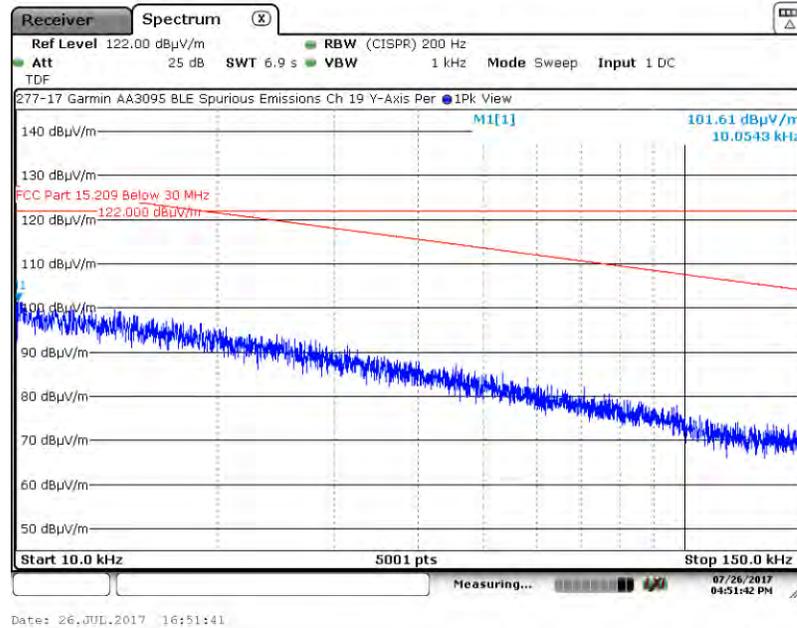

A1.2.6. Measurement Results: Y-Axis, Ground-Parallel Antenna

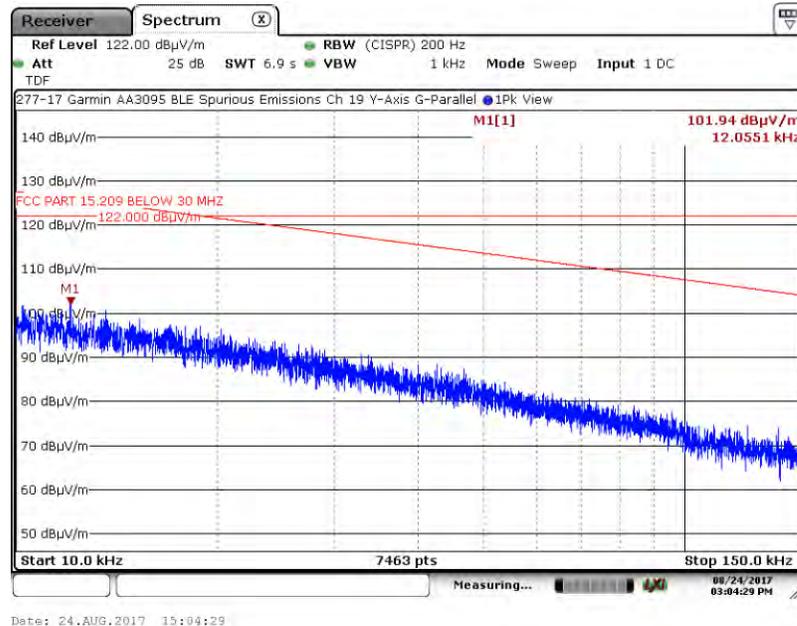

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.2. Channel 19, 2440 MHz

A1.2.7. Measurement Results: Z-Axis, Parallel Antenna

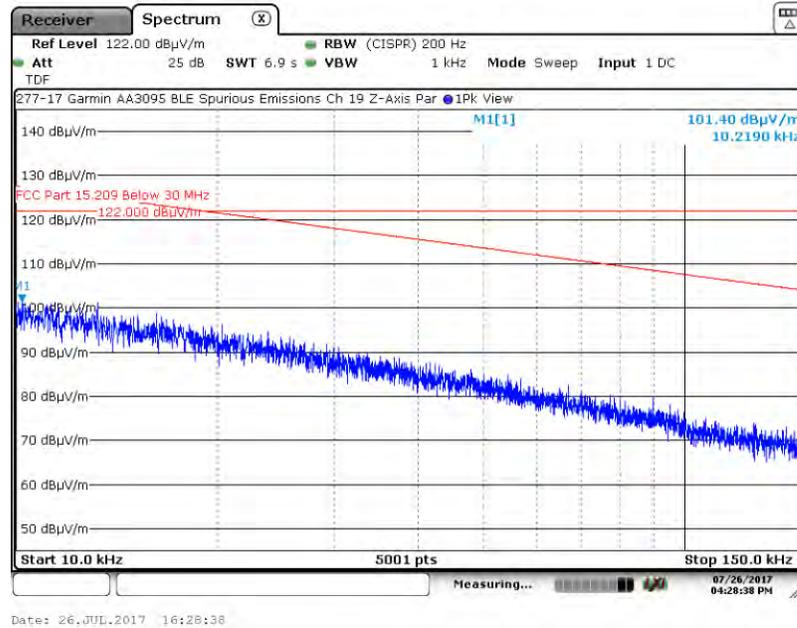

A1.2.8. Measurement Results: Z-Axis, Perpendicular Antenna

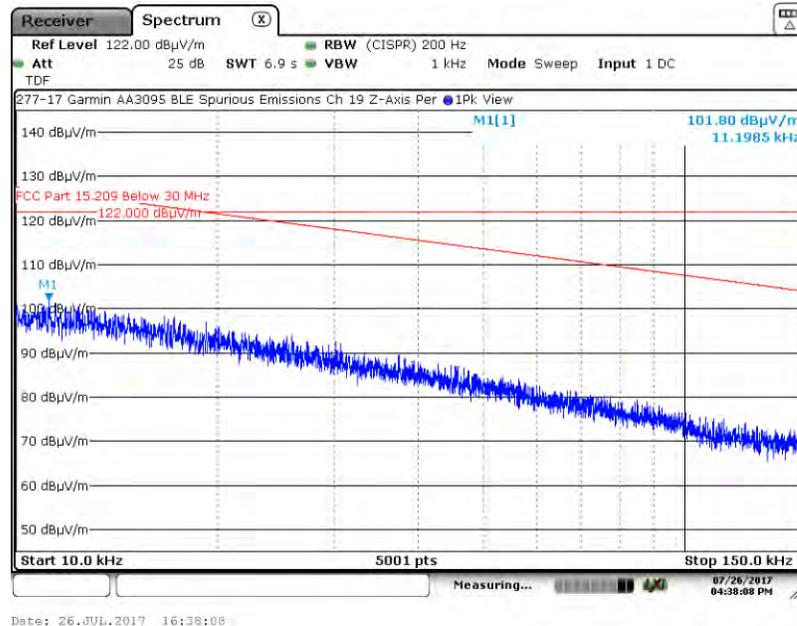

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)

A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.2. Channel 19, 2440 MHz

A1.2.9. Measurement Results: Z-Axis, Ground-Parallel Antenna

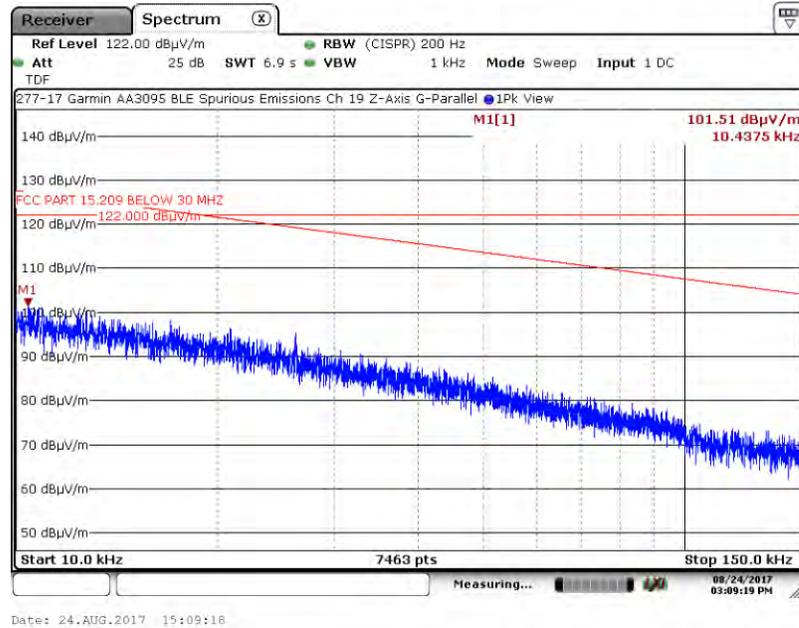

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.3. Channel 39, 2480 MHz

A1.3.1. Measurement Results: X-Axis, Parallel Antenna

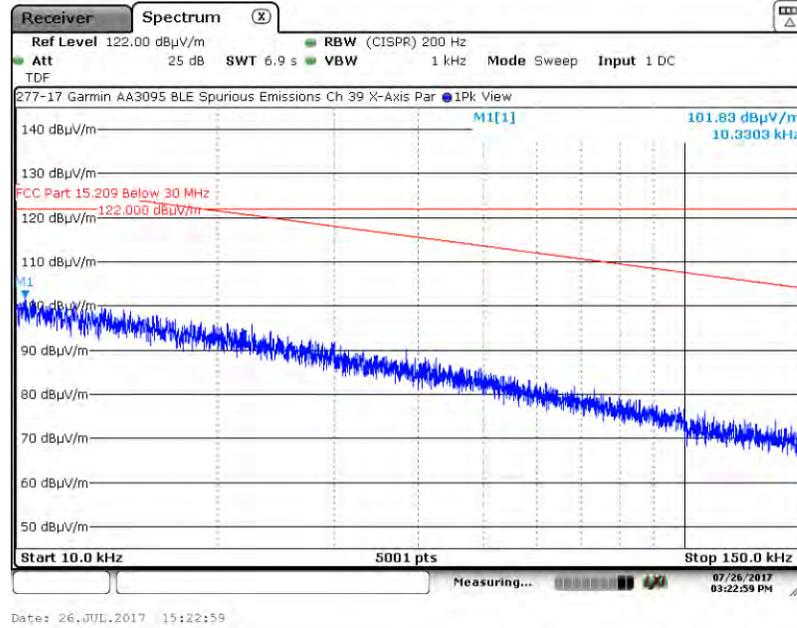

A1.3.2. Measurement Results: X-Axis, Perpendicular Antenna

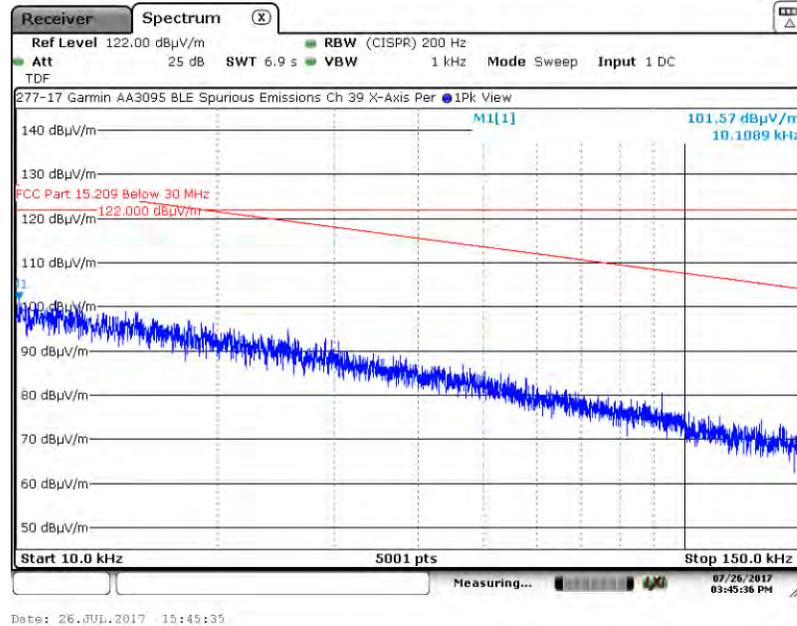

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.3. Channel 39, 2480 MHz

A1.3.3. Measurement Results: X-Axis, Ground-Parallel Antenna

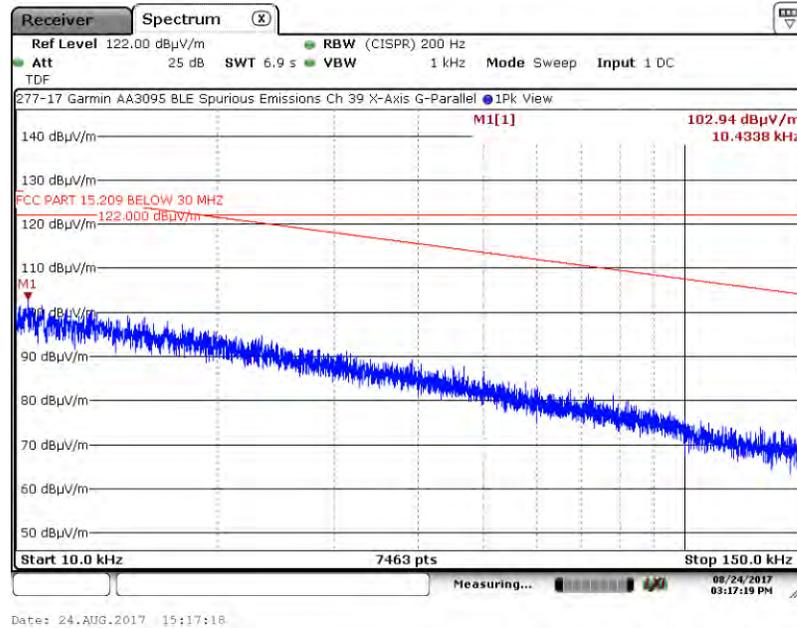

A1.3.4. Measurement Results: Y-Axis, Parallel Antenna

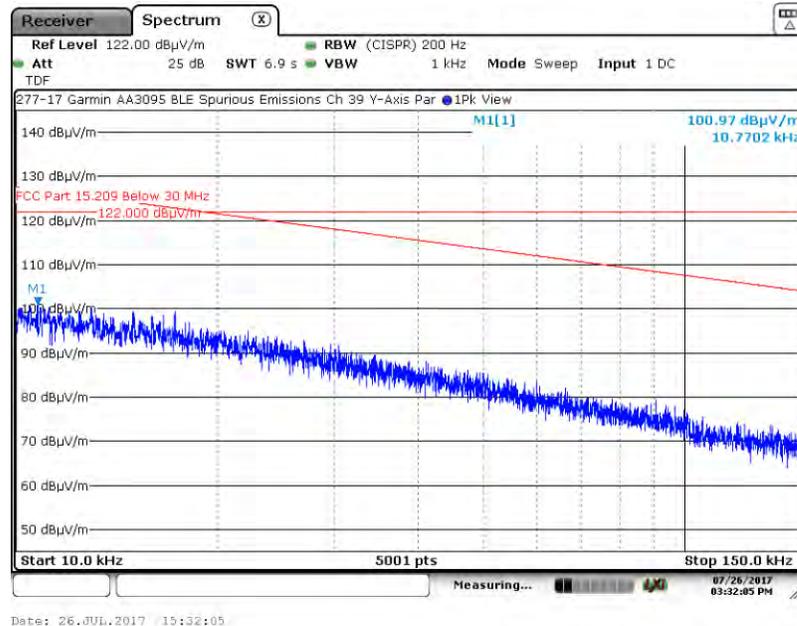

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.3. Channel 39, 2480 MHz

A1.3.5. Measurement Results: Y-Axis, Perpendicular Antenna

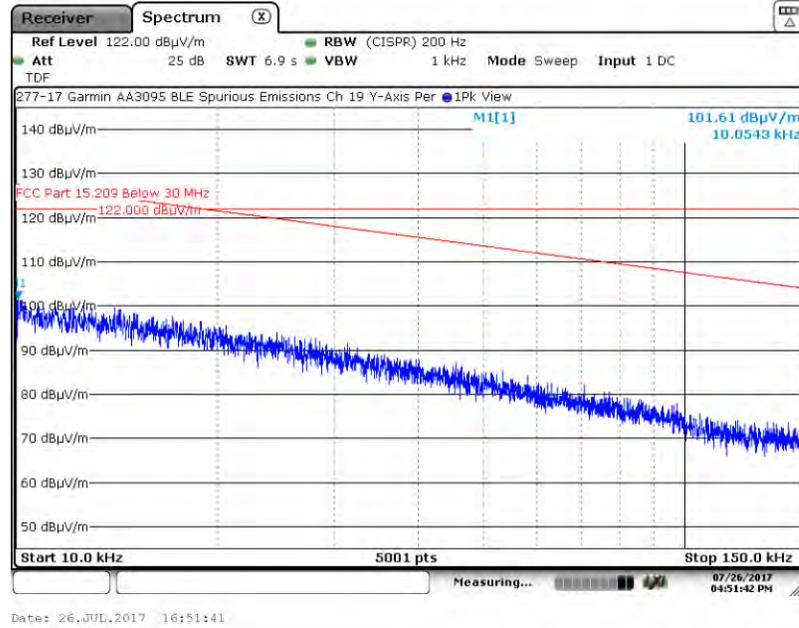

A1.3.6. Measurement Results: Y-Axis, Ground-Parallel Antenna

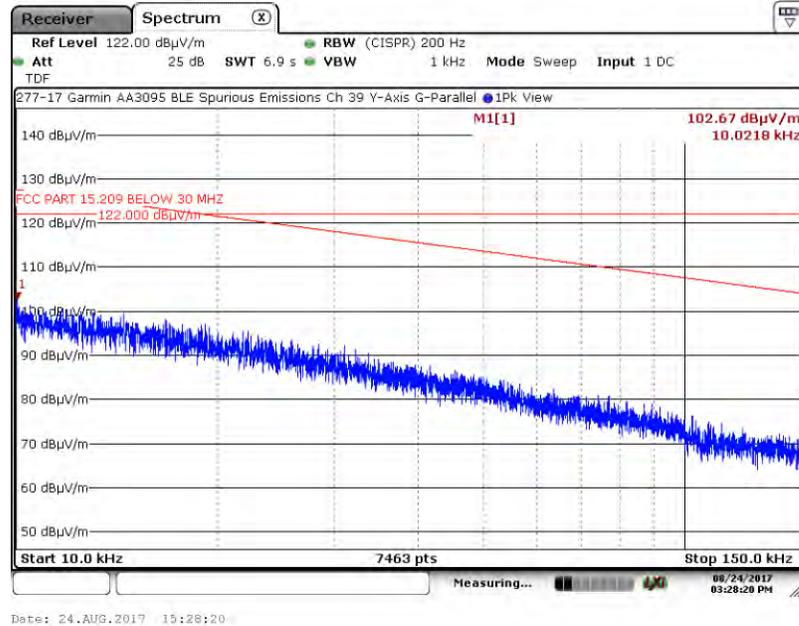

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.3. Channel 39, 2480 MHz

A1.3.7. Measurement Results: Z-Axis, Parallel Antenna

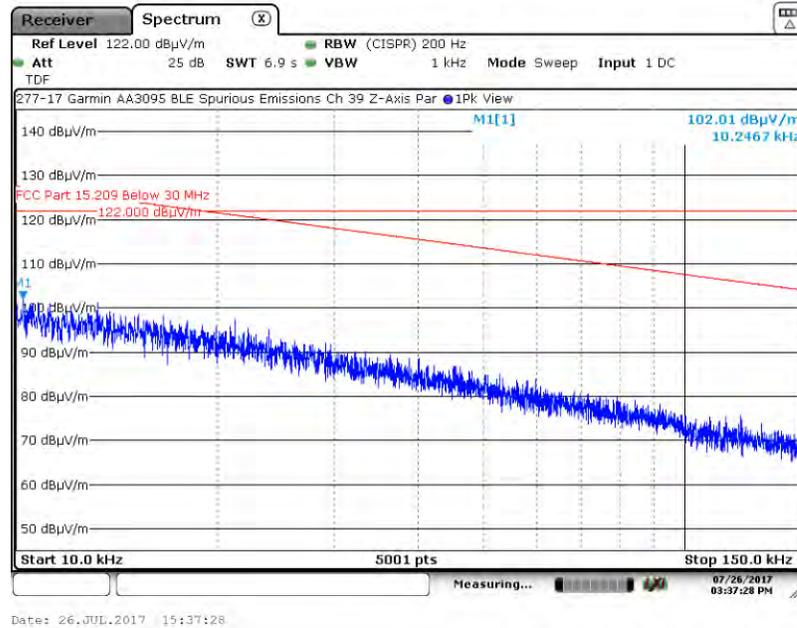

A1.3.8. Measurement Results: Z-Axis, Perpendicular Antenna

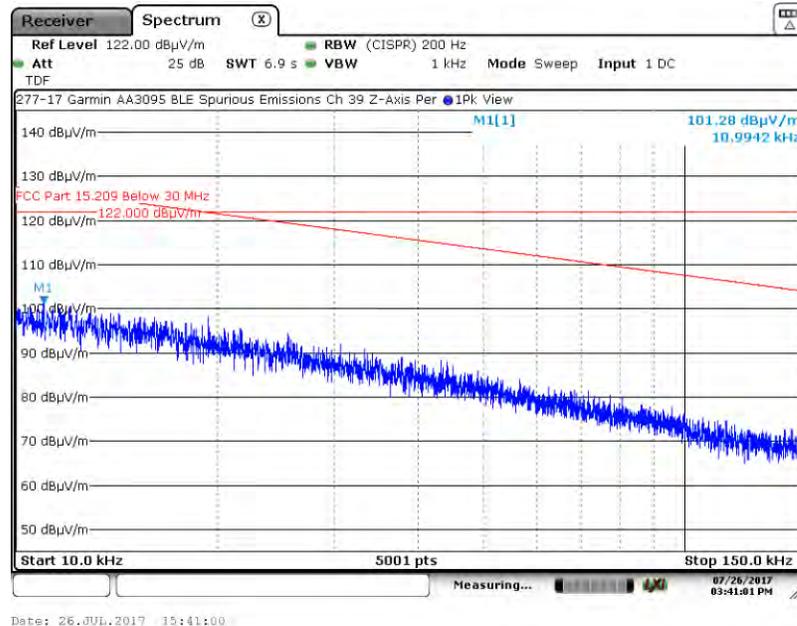

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)

A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.3. Channel 39, 2480 MHz

A1.3.9. Measurement Results: Z-Axis, Ground-Parallel Antenna

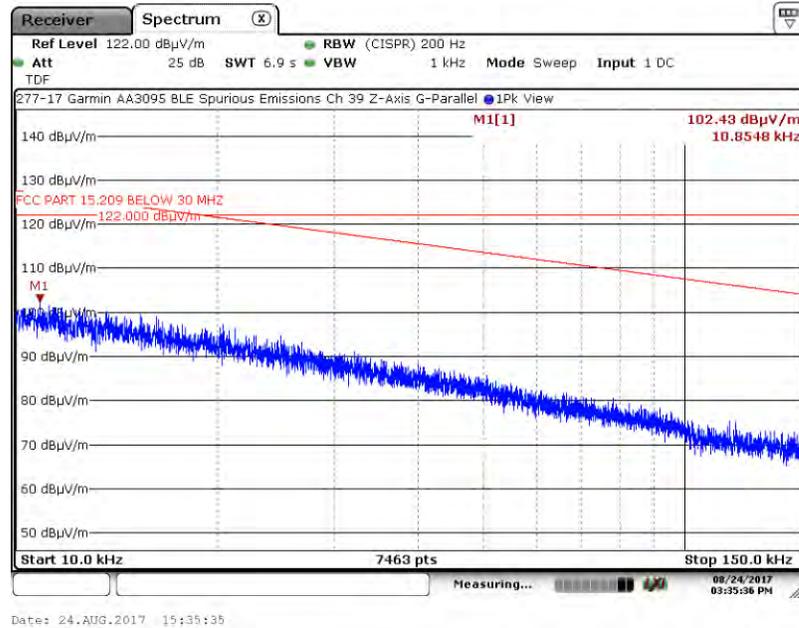

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)

A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.1. Channel 0, 2402 MHz

A2.1.1. Measurement Results: X-Axis, Parallel Antenna

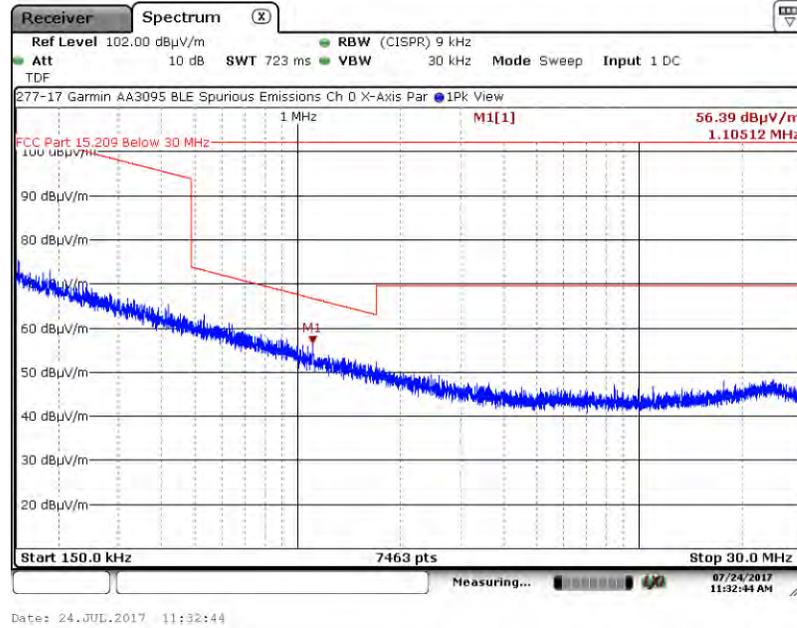

A2.1.2. Measurement Results: X-Axis, Perpendicular Antenna



Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.1. Channel 0, 2402 MHz

A2.1.3. Measurement Results: X-Axis, Ground-Parallel Antenna

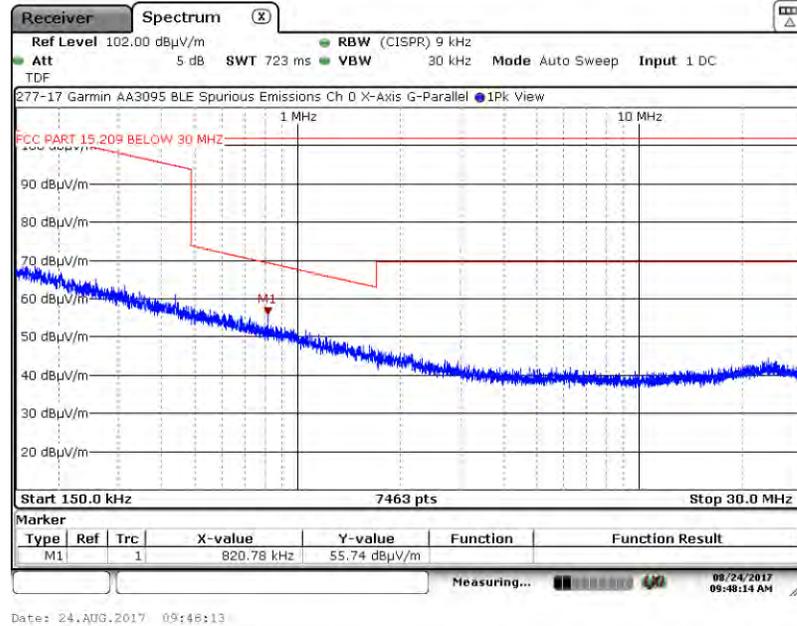

A2.1.4. Measurement Results: Y-Axis, Parallel Antenna

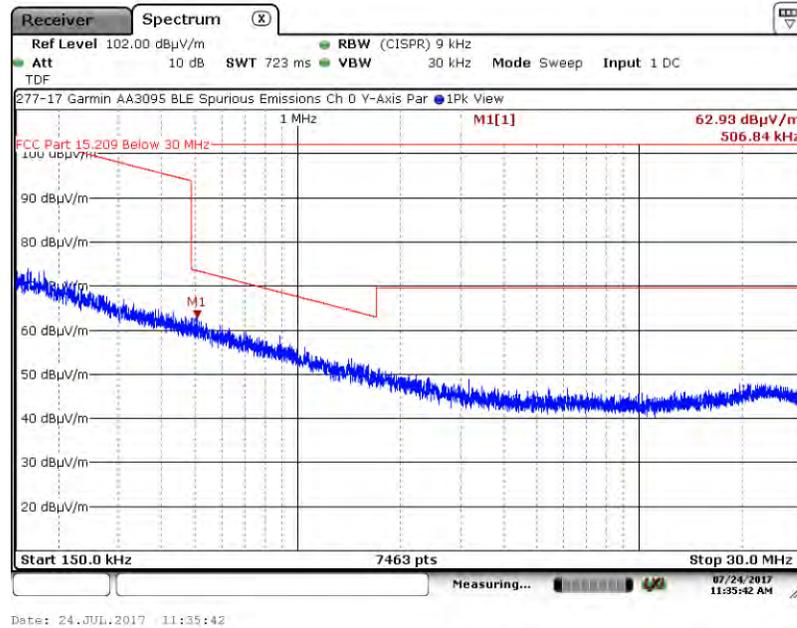

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.1. Channel 0, 2402 MHz

A2.1.5. Measurement Results: Y-Axis, Perpendicular Antenna

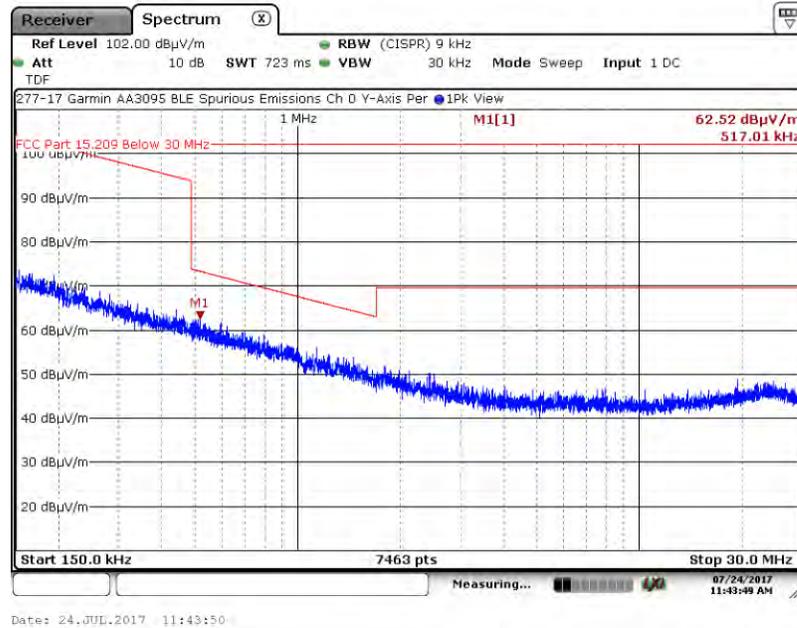

A2.1.6. Measurement Results: Y-Axis, Ground-Parallel Antenna

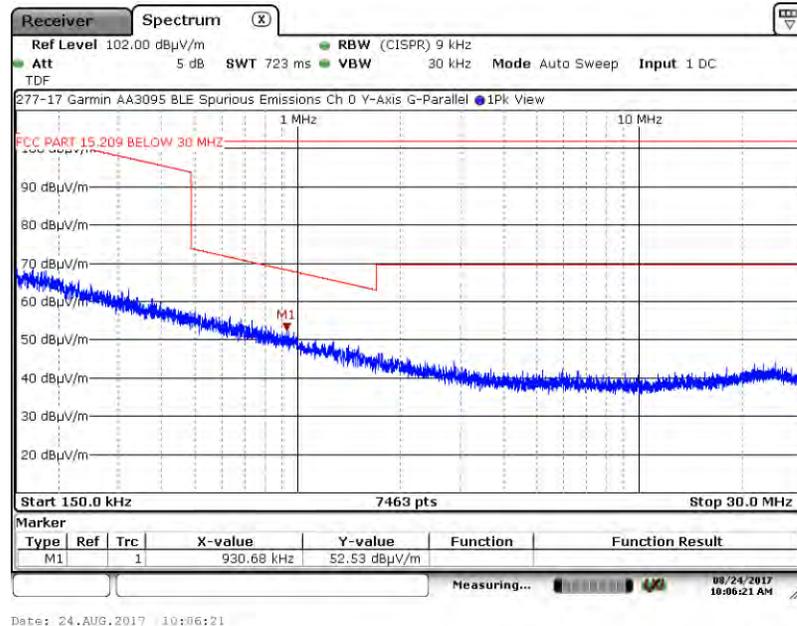

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.1. Channel 0, 2402 MHz

A2.1.7. Measurement Results: Z-Axis, Parallel Antenna

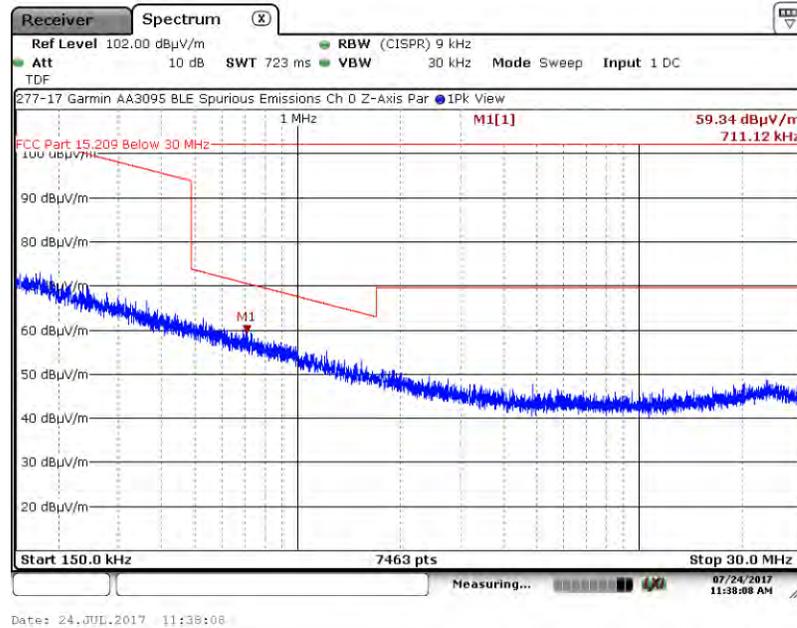

A2.1.8. Measurement Results: Z-Axis, Perpendicular Antenna

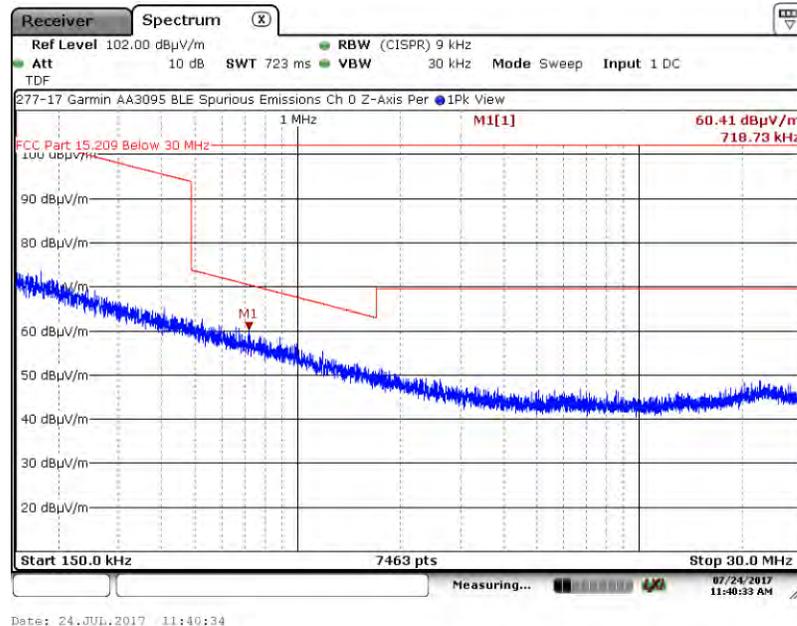


Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)

A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.1. Channel 0, 2402 MHz

A2.1.9. Measurement Results: Z-Axis, Ground-Parallel Antenna

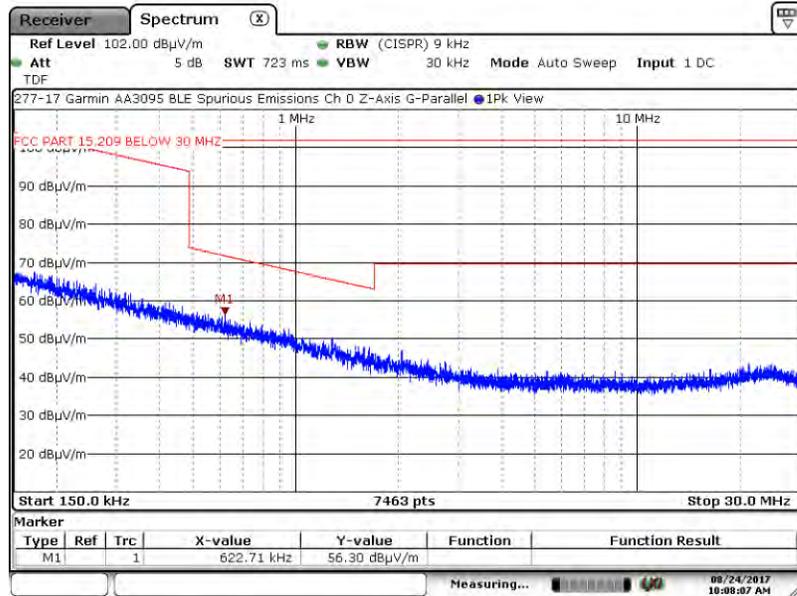

Date: 24.AUG.2017 10:08:07

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.2. Channel 19, 2440 MHz

A2.2.1. Measurement Results: X-Axis, Parallel Antenna

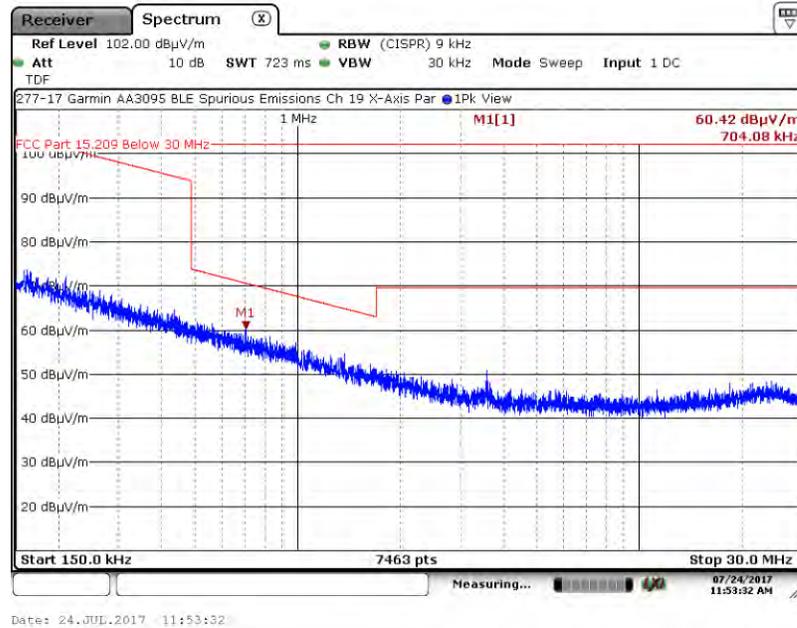

A2.2.2. Measurement Results: X-Axis, Perpendicular Antenna

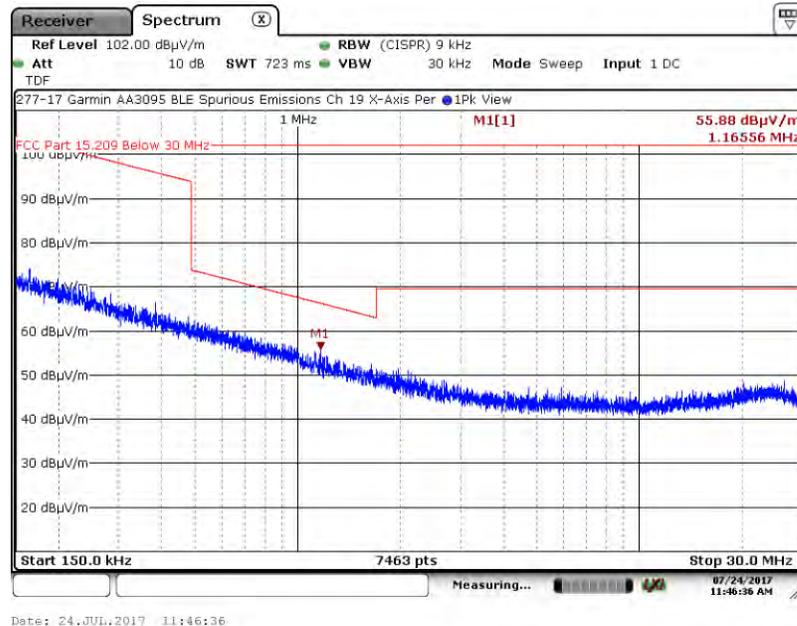

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.2. Channel 19, 2440 MHz

A2.2.3. Measurement Results: X-Axis, Ground-Parallel Antenna

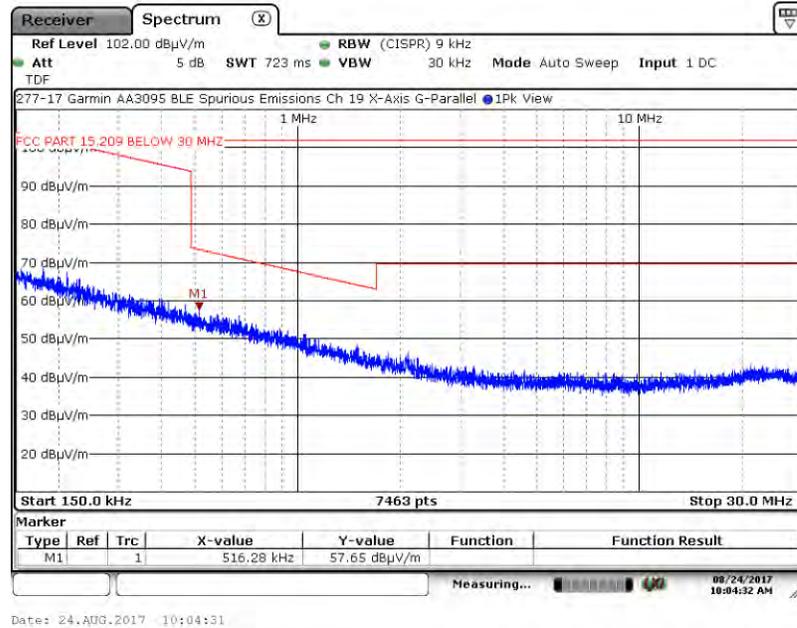

A2.2.4. Measurement Results: Y-Axis, Parallel Antenna

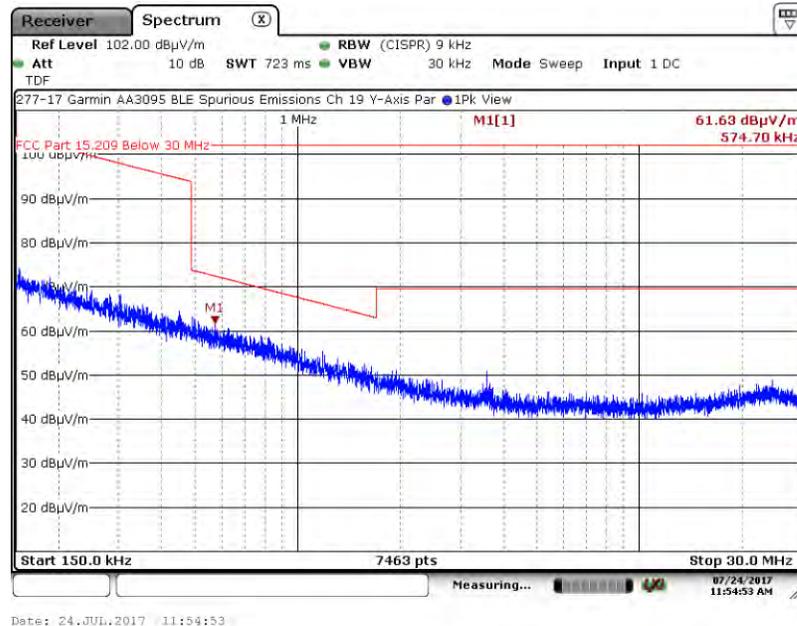

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.2. Channel 19, 2440 MHz

A2.2.5. Measurement Results: Y-Axis, Perpendicular Antenna

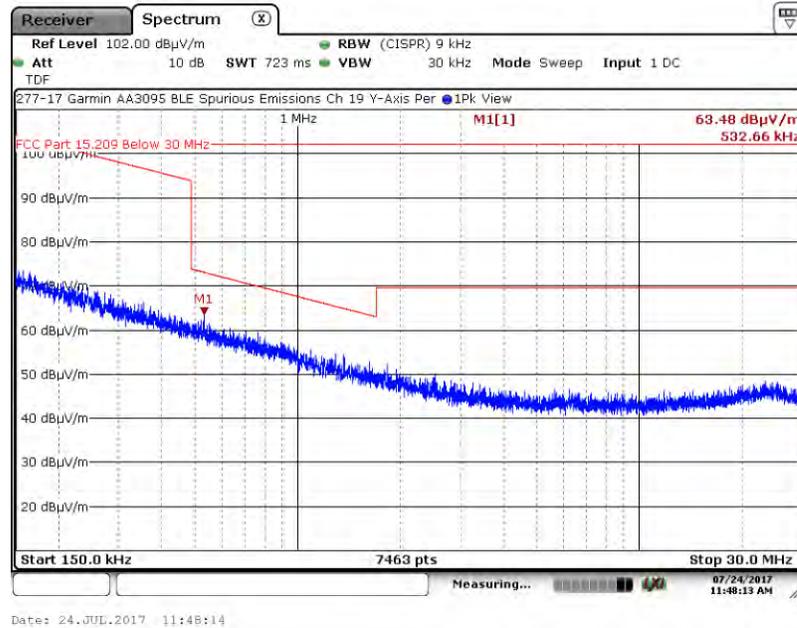

A2.2.6. Measurement Results: Y-Axis, Ground-Parallel Antenna

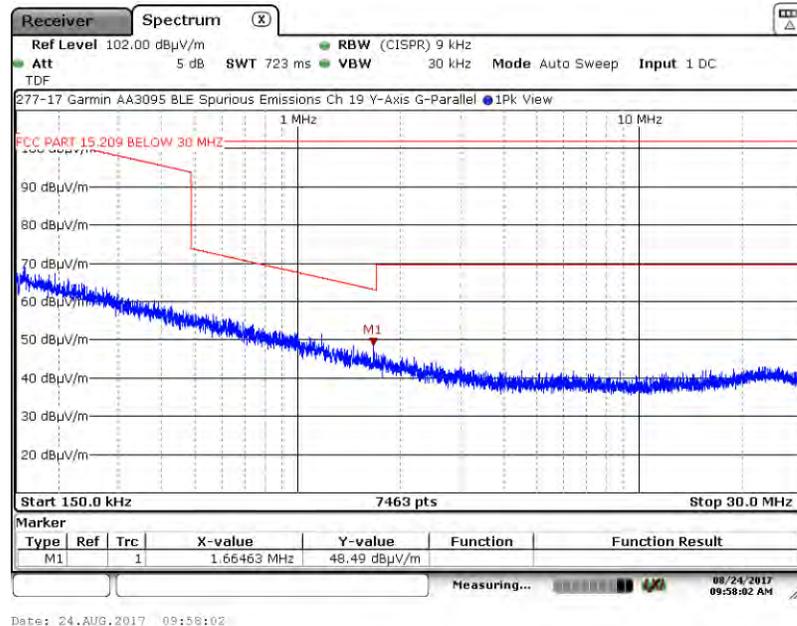

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.2. Channel 19, 2440 MHz

A2.2.7. Measurement Results: Z-Axis, Parallel Antenna

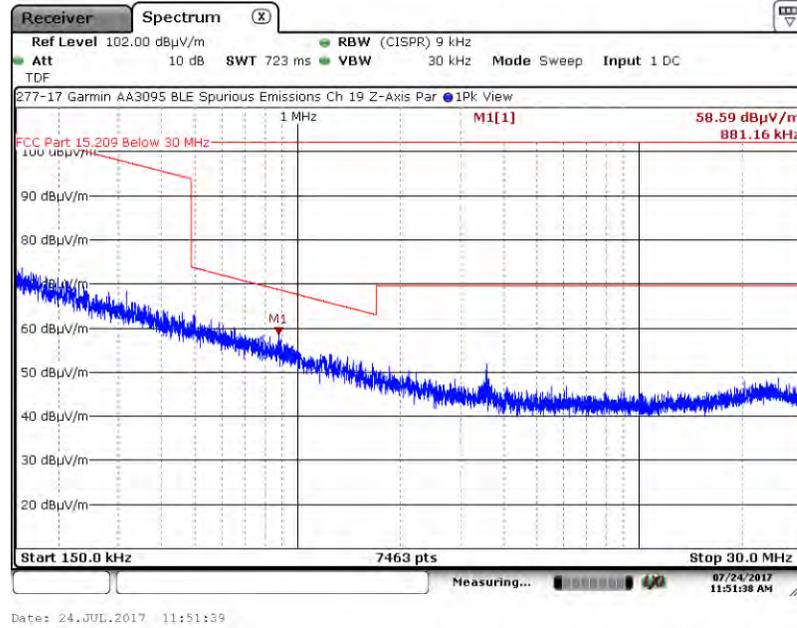

A2.2.8. Measurement Results: Z-Axis, Perpendicular Antenna

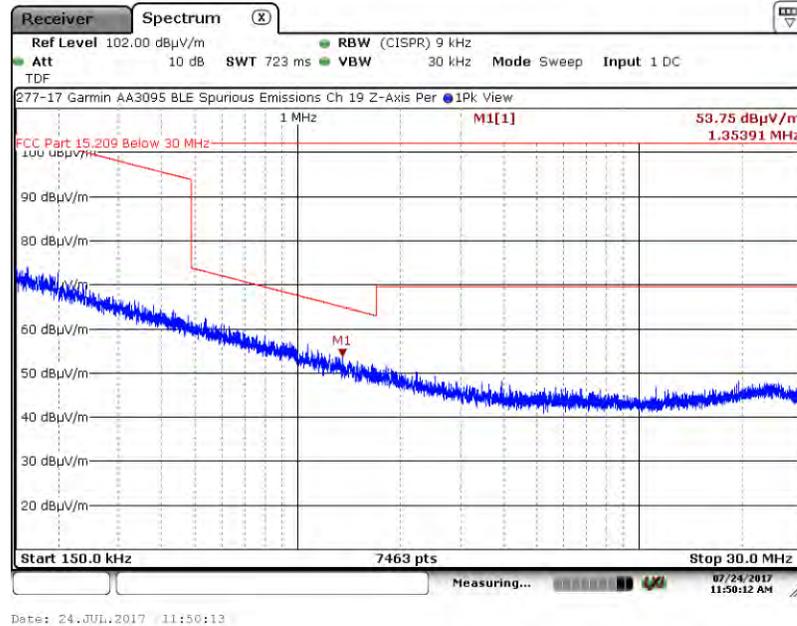


Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)

A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.2. Channel 19, 2440 MHz

A2.2.9. Measurement Results: Z-Axis, Ground-Parallel Antenna

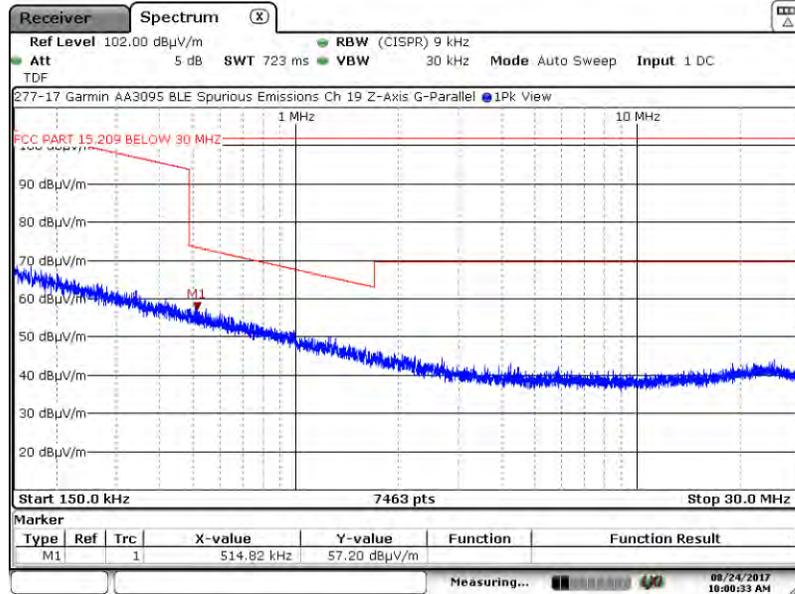

Date: 24.AUG.2017 10:00:32

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.3. Channel 39, 2480 MHz

A2.3.1. Measurement Results: X-Axis, Parallel Antenna

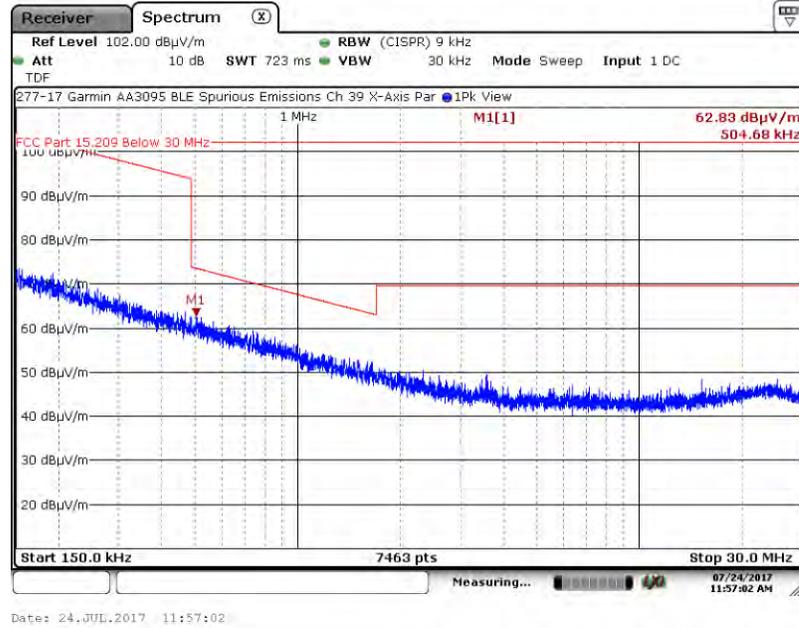

A2.3.2. Measurement Results: X-Axis, Perpendicular Antenna

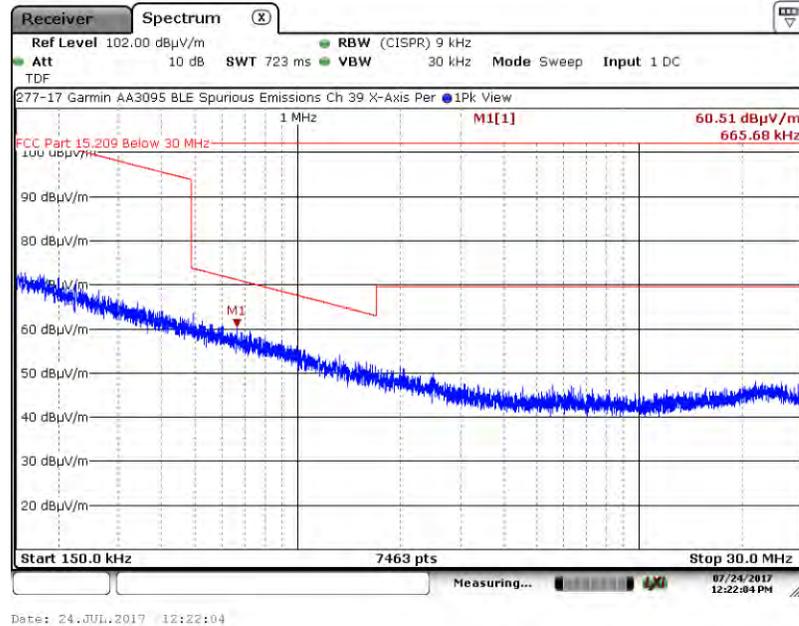

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.3. Channel 39, 2480 MHz

A2.3.3. Measurement Results: X-Axis, Ground-Parallel Antenna

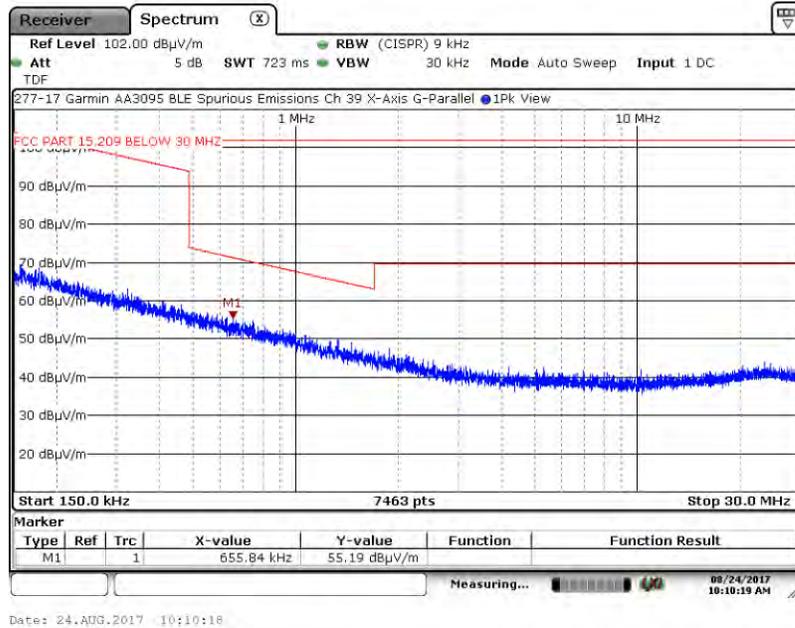

A2.3.4. Measurement Results: Y-Axis, Parallel Antenna

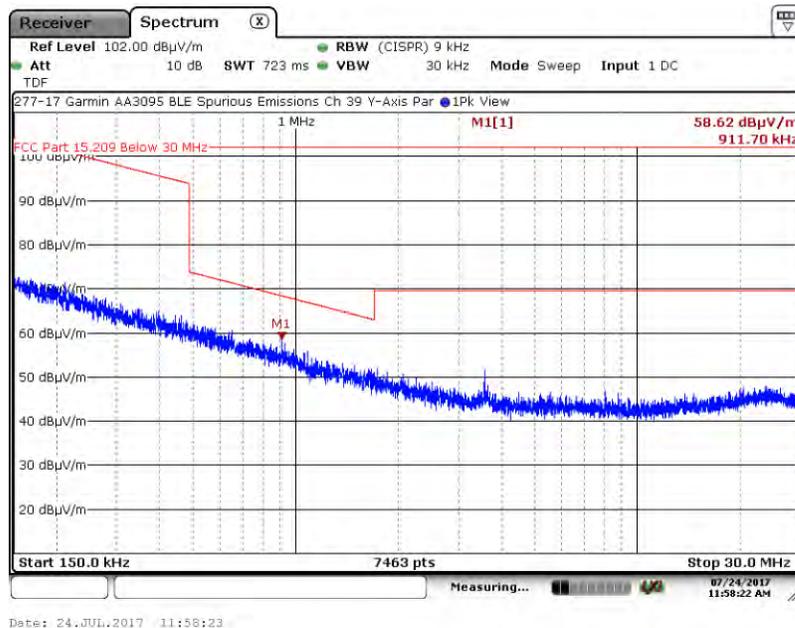

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)


A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.3. Channel 39, 2480 MHz

A2.3.5. Measurement Results: Y-Axis, Perpendicular Antenna

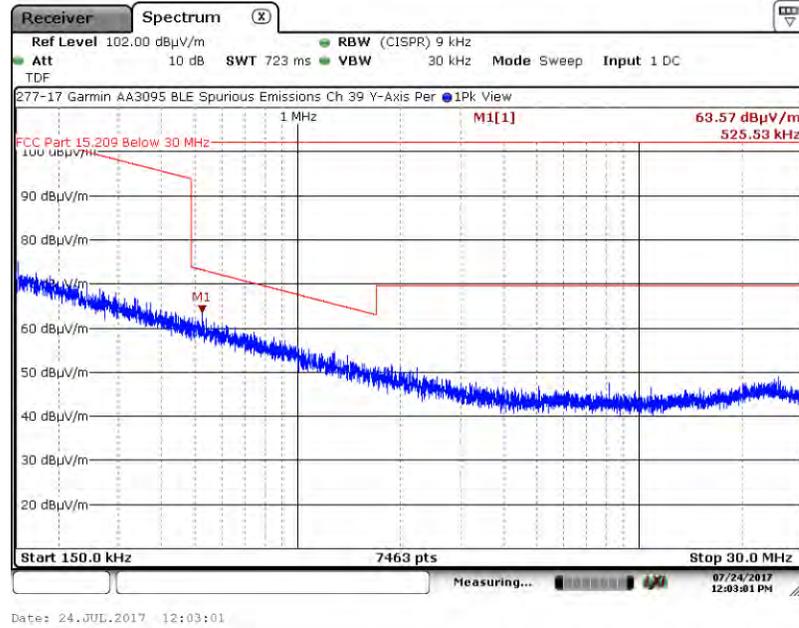

A2.3.6. Measurement Results: X-Axis, Ground-Parallel Antenna

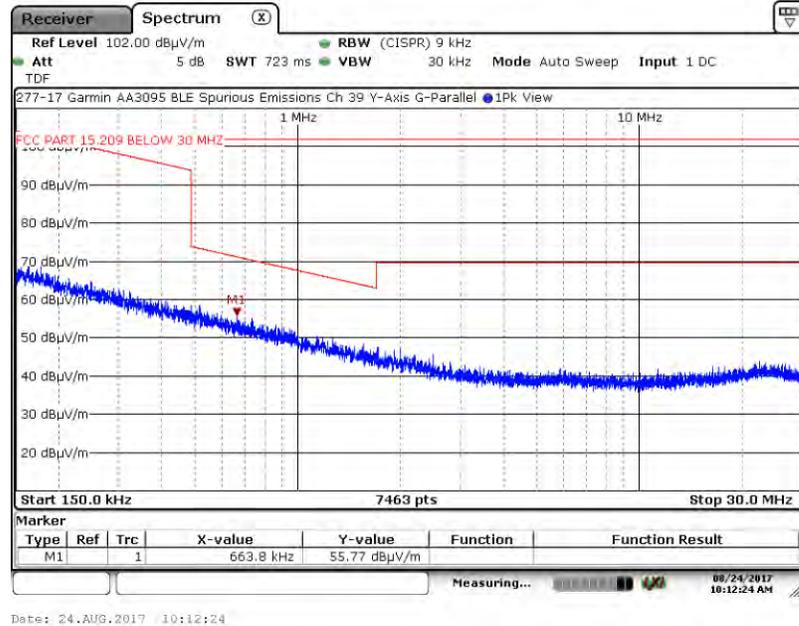

Test Number: 277-17


Issue Date: 7/28/2017

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 25 GHz)

A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results


A2.3. Channel 39, 2480 MHz

A2.3.7. Measurement Results: Z-Axis, Parallel Antenna

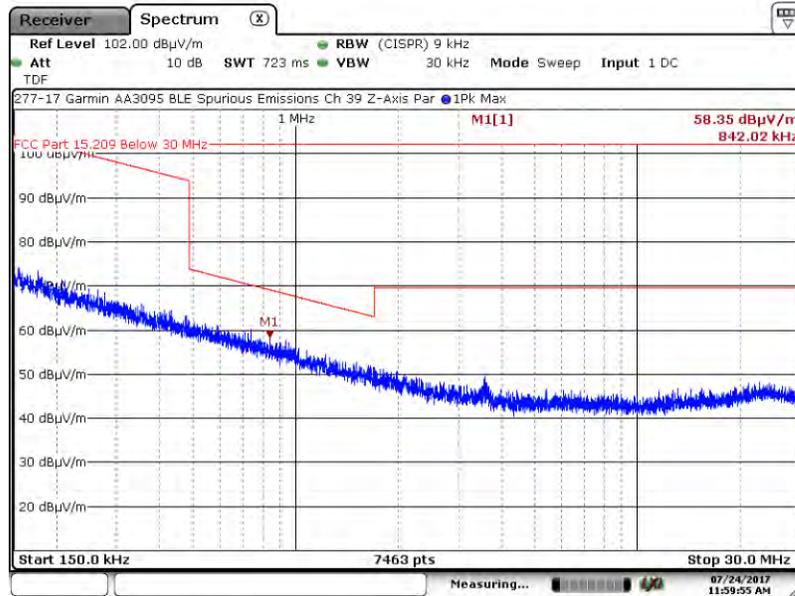

Date: 24.JUL.2017 11:59:56

A2.3.8. Measurement Results: Z-Axis, Perpendicular Antenna

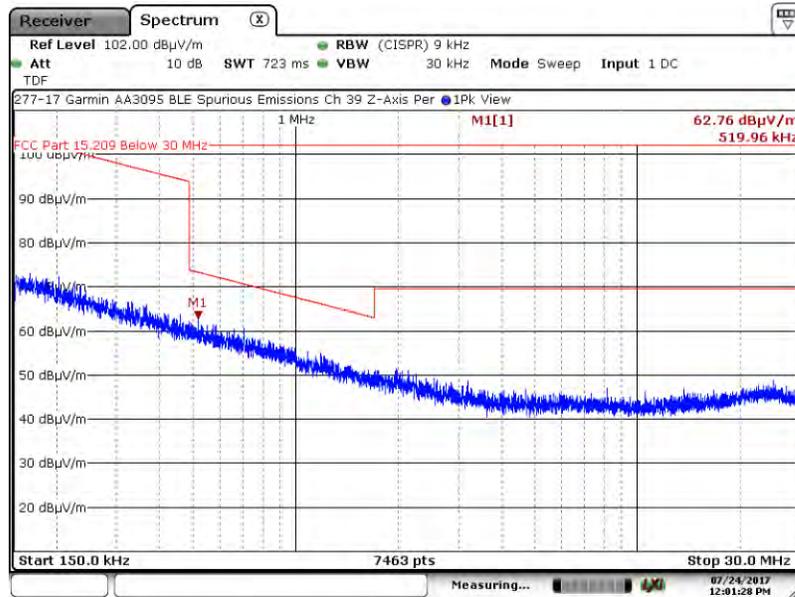

Date: 24.JUL.2017 12:01:29