

FCC/ISED Test Report

Prepared for: Garmin International, Inc.

Address: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: C03561

Test Report No: R20200110-20-E15A

Approved by:



Nic S. Johnson, NCE

Technical Manager

iNARTE Certified EMC Engineer #EMC-003337-NE

DATE: 9 May 2020

Total Pages: 85

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

REVISION PAGE

Rev. No.	Date	Description
0	21 April 2020	Original – NJohnson Prepared by KVepuri/CFarrington
A	9 May 2020	<ol style="list-style-type: none">1. Tables in Section 4.4 were updated to show the frequency range and statements were added to provide clarification about what data was reported.2. Restricted band edge measurements were updated in section 4.5 and Appendix C.3. Contains the report R20200110-20-E15 and its amendments in full. -KV



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

CONTENTS

Revision Page	2
1.0 Summary of test results	4
2.0 EUT Description	5
2.1 Equipment under test	5
2.2 Description of test modes	5
2.3 Description of support units	5
3.0 Laboratory and General Test Description	6
3.1 Laboratory description	6
3.2 Test personnel	6
3.3 Test equipment	7
3.4 General Test Procedure and Setup for Radio Measuremnts	8
4.0 Results	9
4.1 Output Power	9
4.2 Bandwidth	11
4.3 Duty Cycle	12
4.4 Radiated emissions	15
4.5 Band edges	23
4.6 Power Spectral Density	25
4.7 Conducted AC Mains Emissions	26
Appendix A: Sample Calculation	29
Appendix B – Measurement Uncertainty	31
Appendix C – Graphs and Tables	32
REPORT END	85



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

1.0 SUMMARY OF TEST RESULTS

The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section (Please see the checked box below for the rule part used):

FCC Part 15.247

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 2

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	Pass
FCC Part 15.247(a)(1) RSS-247 Issue 2 Section 5.2	Peak output power	Pass
FCC Part 15.247(a)(1) RSS-247 Issue 2 Section 5.2	Bandwidth	Pass
FCC Part 15.209 RSS-Gen Issue 4, Section 7.1	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 4, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.247(a)(1) RSS-247 Issue 2 Section 5.2	Power Spectral Density	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 2 Section 11.13	Band Edge Measurement	Pass
FCC Part 15.207 RSS-Gen Issue 4, Section 7.1	Conducted Emissions	Pass

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary and Operating Condition:

EUT	C03561
EUT Received	13 January 2020
EUT Tested	19 February 2020- 6 March 2020
Serial No.	3319808469 (Radiated Measurements) 3319808431 (Radiated Measurements) 3319808429 (Conducted Measurements)
Operating Band	2400 – 2483.5 MHz
Device Type	<input type="checkbox"/> GMSK <input type="checkbox"/> GFSK <input type="checkbox"/> BT BR <input type="checkbox"/> BT EDR 2MB <input type="checkbox"/> BT EDR 3MB <input checked="" type="checkbox"/> 802.11x
Power Supply / Voltage	Internal Battery/ 5VDC Charger: Garmin (Phi Hong) MN: PSAF10R-050Q (Representative Power Supply)

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:

For Bluetooth Transmissions:

Channel	Frequency
Low	2402 MHz
Mid	2440/2441 MHz
High	2480 MHz

For 802.11x Transmissions:

Channel	Frequency
Low	2412 MHz
Mid	2437 MHz
High	2462 MHz

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

2.3 DESCRIPTION OF SUPPORT UNITS

None

3.0 LABORATORY AND GENERAL TEST DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number:	1953.01
FCC Accredited Test Site Designation No:	US1060
Industry Canada Test Site Registration No:	4294A-1
NCC CAB Identification No:	US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
 Temperature of $22 \pm 3^\circ$ Celsius



3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Nic Johnson	Technical Manager	Review/editing
2	Karthik Vepuri	Test Engineer	Testing and report
3	Caleb Farrington	Test Engineer	Testing and report

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer	N9038A	MY59050109	23 Apr 2019	23 Apr 2021
Keysight EXA Signal Analyzer	N9010A	MY56070862	14 Dec 2018	14 Dec 2020
SunAR RF Motion	JB1	A082918-1	15 Oct 2018	15 Oct 2020
EMCO Horn Antenna	3115	6416	26 Jan 2018	26 Jan 2021
EMCO Horn Antenna	3116	2576	31 Jan 2018	31 Jan 2021
EMCO Loop Antenna	6512	00024936	11 Feb 2019	11 Feb 2021
Rohde & Schwarz Preamplifier	TS-PR18	3545700803	09 Mar 2018*	09 Mar 2021*
Trilithic High Pass Filter	6HC330	23042	09 Mar 2018*	09 Mar 2021*
Rohde & Schwarz LISN	ESH3-Z5	836679/010	25 Jul 2019	25 Jul 2020
TDK Emissions Lab Software	V11.25	700307	NA	NA
Humidity Meter - Omega	iTHX-SD	18020051	14 Feb 2019	14 Feb 2021
JFW Industries Variable attenuator	50DR-046 SMA	594239	29 May 2018*	29 May 2020*
RF Cable (preamplifier to antenna)	MFR-57500	01-07-002	09 Mar 2018*	09 Mar 2021*
RF Cable (antenna to 10m chamber bulkhead)	FSCM 64639	01E3872	09 Mar 2018*	09 Mar 2021*
RF Cable (10m chamber bulkhead to control room bulkhead)	FSCM 64639	01E3874	09 Mar 2018*	09 Mar 2021*
RF Cable (Control room bulkhead to RF switch)	FSCM 64639	01E3871	09 Mar 2018*	09 Mar 2021*
RF Cable (RF switch to test receiver)	FSCM 64639	01F1206	09 Mar 2018*	09 Mar 2021*
RF switch – Rohde and Schwarz	TS-RSP	1113.5503.14	09 Mar 2018*	09 Mar 2021*
N connector bulkhead (10m chamber)	PE9128	NCEEBH1	09 Mar 2018*	09 Mar 2021*
N connector bulkhead (control room)	PE9128	NCEEBH2	09 Mar 2018*	09 Mar 2021*

*Internal Characterization

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

	Report Number:	R20200110-20-E15A	Rev	A
	Prepared for:	Garmin International, Inc.		

3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMENTS

Measurement type presented in this report (Please see the checked box below):

Conducted

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

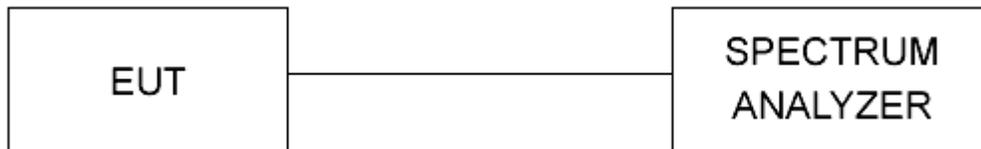


Figure 1 - Bandwidth Measurements Test Setup

Radiated

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

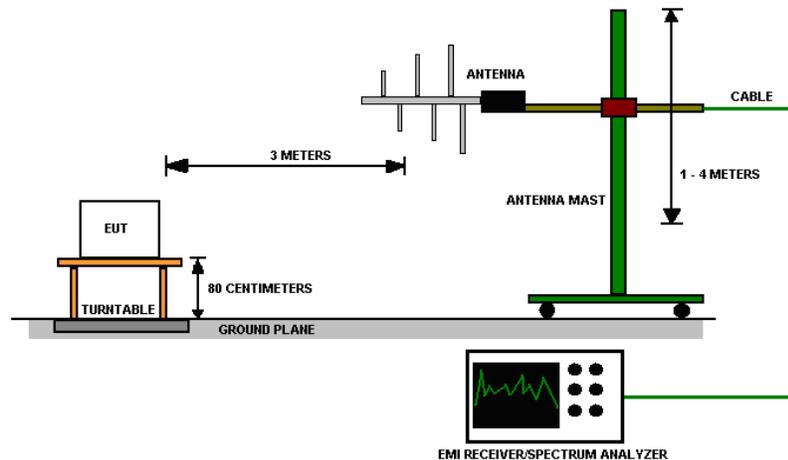


Figure 2 - Radiated Emissions Test Setup



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

4.0 RESULTS

4.1 OUTPUT POWER

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of power measurements:

For FCC Part 15.249 Device:

For Informational Purposes only

For FCC Part 15.247 Device:

The maximum allowed peak output power is 30 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the output power plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables below.



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

CHANNEL	Average OUTPUT POWER (dBm)	RESULT	Transmitter
Low	17.69	PASS	802.11b
Mid	17.36	PASS	802.11b
High	16.91	PASS	802.11b
Low	10.96	PASS	802.11g
Mid	15.25	PASS	802.11g
High	10.35	PASS	802.11g
Low	9.06	PASS	802.11n
Mid	14.39	PASS	802.11n
High	8.81	PASS	802.11n

CHANNEL	PEAK OUTPUT POWER (dBm)	RESULT	Transmitter
Low	24.140	PASS	802.11b
Mid	24.650	PASS	802.11b
High	23.440	PASS	802.11b
Low	21.290	PASS	802.11g
Mid	24.590	PASS	802.11g
High	21.270	PASS	802.11g
Low	19.280	PASS	802.11n
Mid	24.600	PASS	802.11n
High	19.070	PASS	802.11n



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

4.2 BANDWIDTH

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of bandwidth measurements:

For FCC Part 15.249 Device:

For Informational Purposes only

For FCC Part 15.247 Device:

The 99% occupied bandwidth is for informational purpose only. The 6dB bandwidth of the signal must be greater than 500 kHz.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the bandwidth plots can be found in the Appendix C.
2. All the measurements were found to be compliant.



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

4.3 DUTY CYCLE

Test Method:

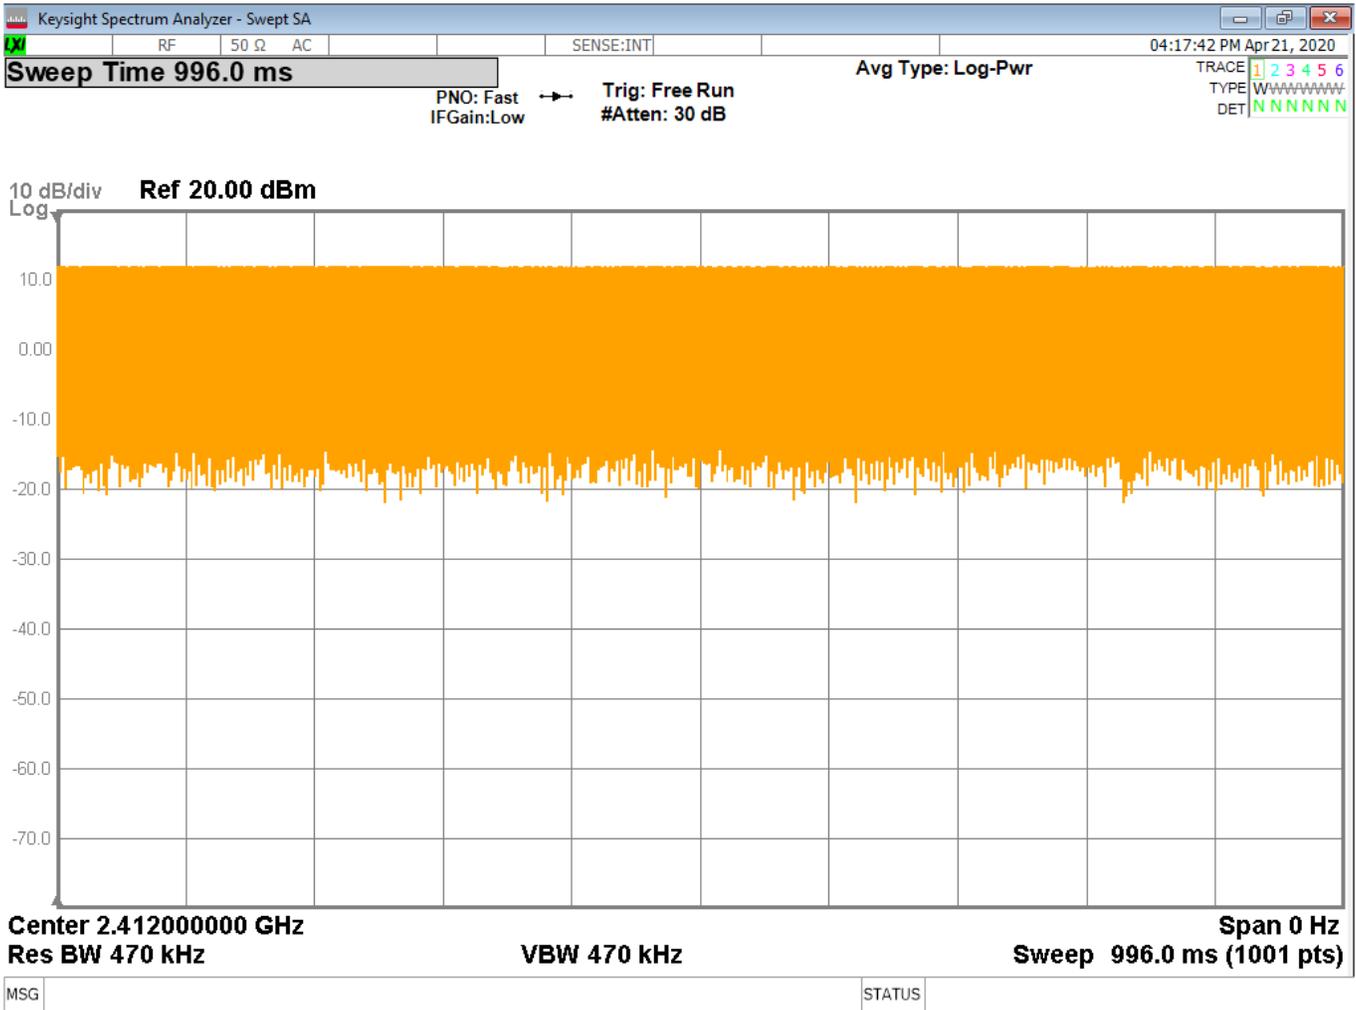


Figure 3 – Duty Cycle, 802.11 b



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

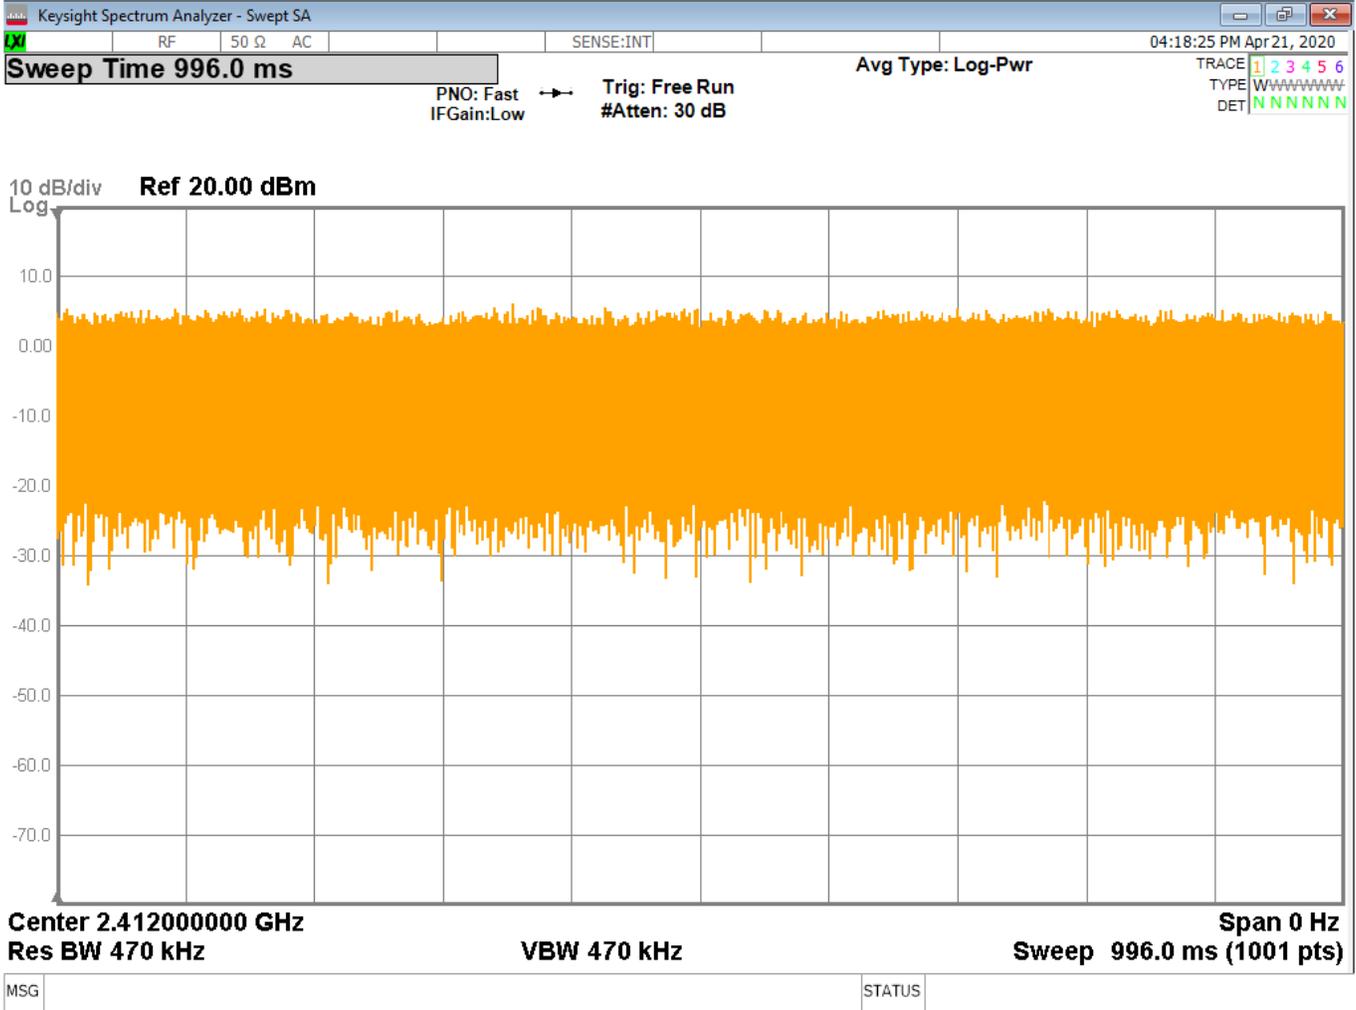


Figure 4 – Duty Cycle, 802.11 g



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

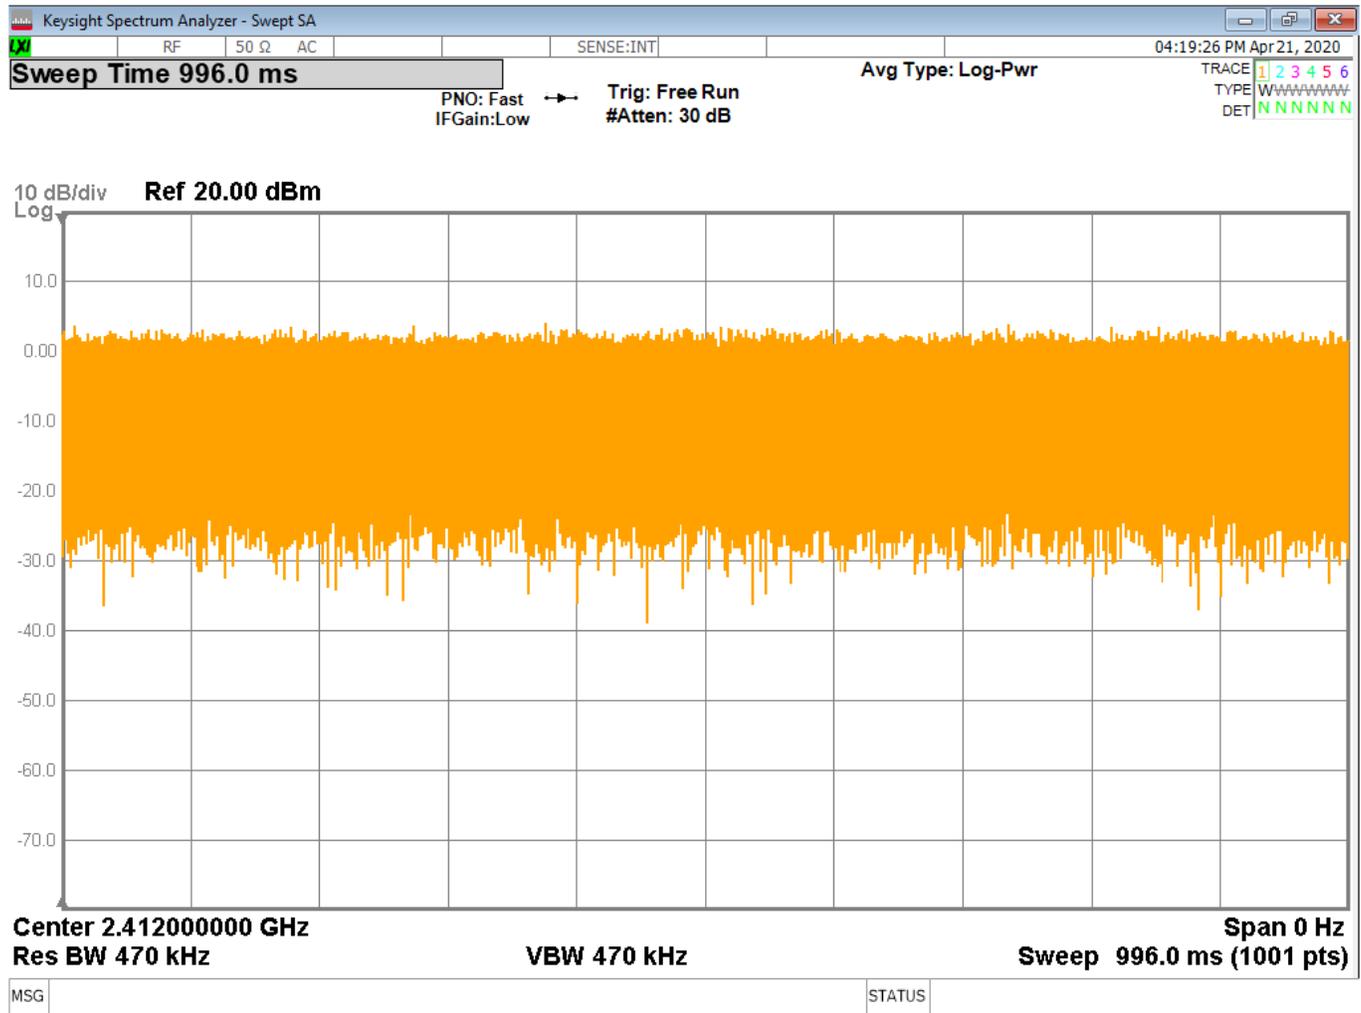


Figure 5 – Duty Cycle, 802.11 n

Duty cycle was found to be 100 percent for all three modulations.

4.4 RADIATED EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

Test procedures:

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

Test setup:

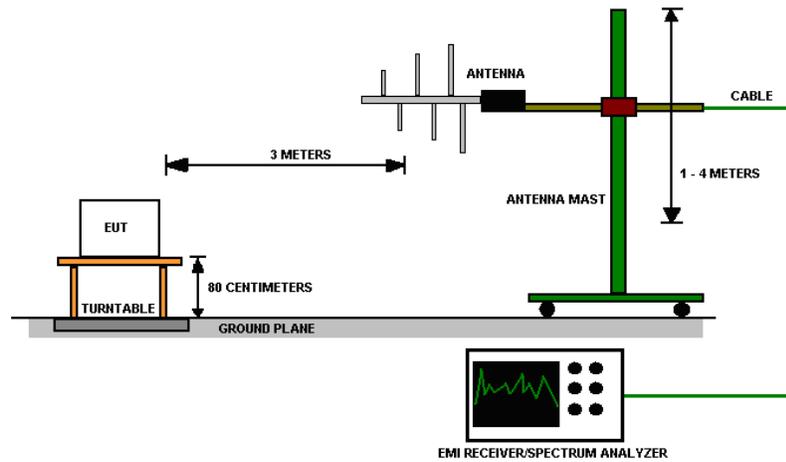


Figure 6 - Radiated Emissions Test Setup

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

Details can be found in section 2.1 of this report.

Test results:

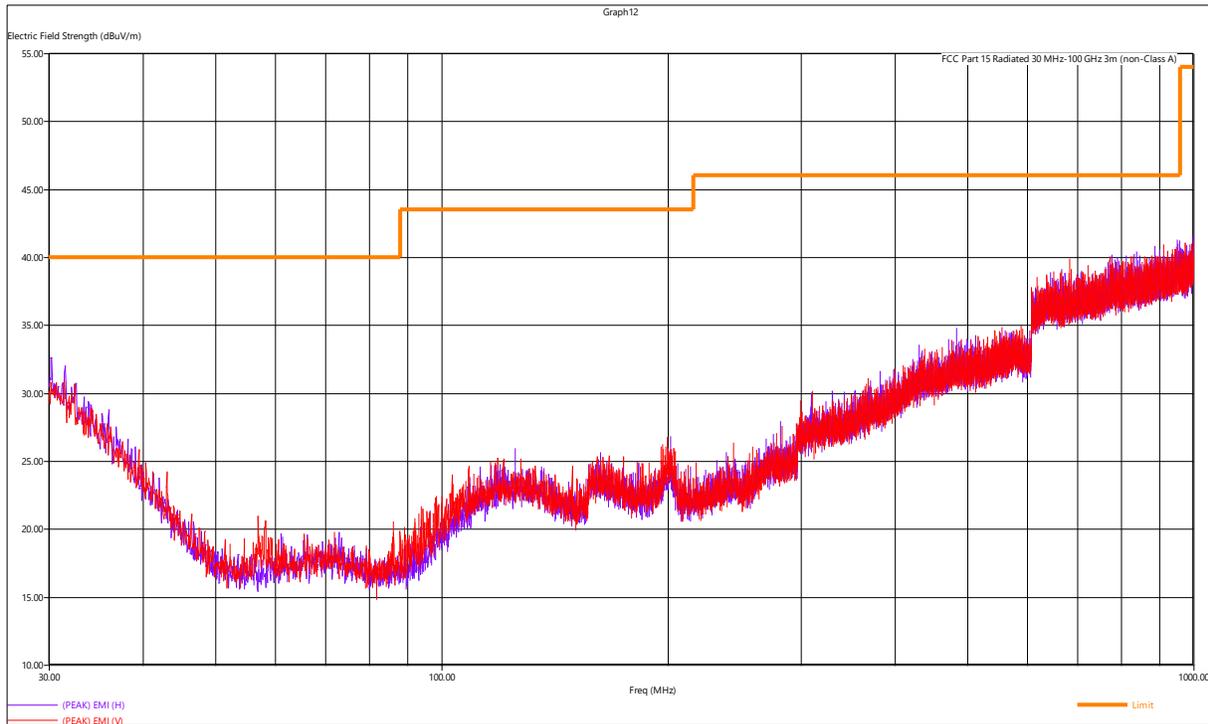


Figure 7 - Radiated Emissions Plot, Receive

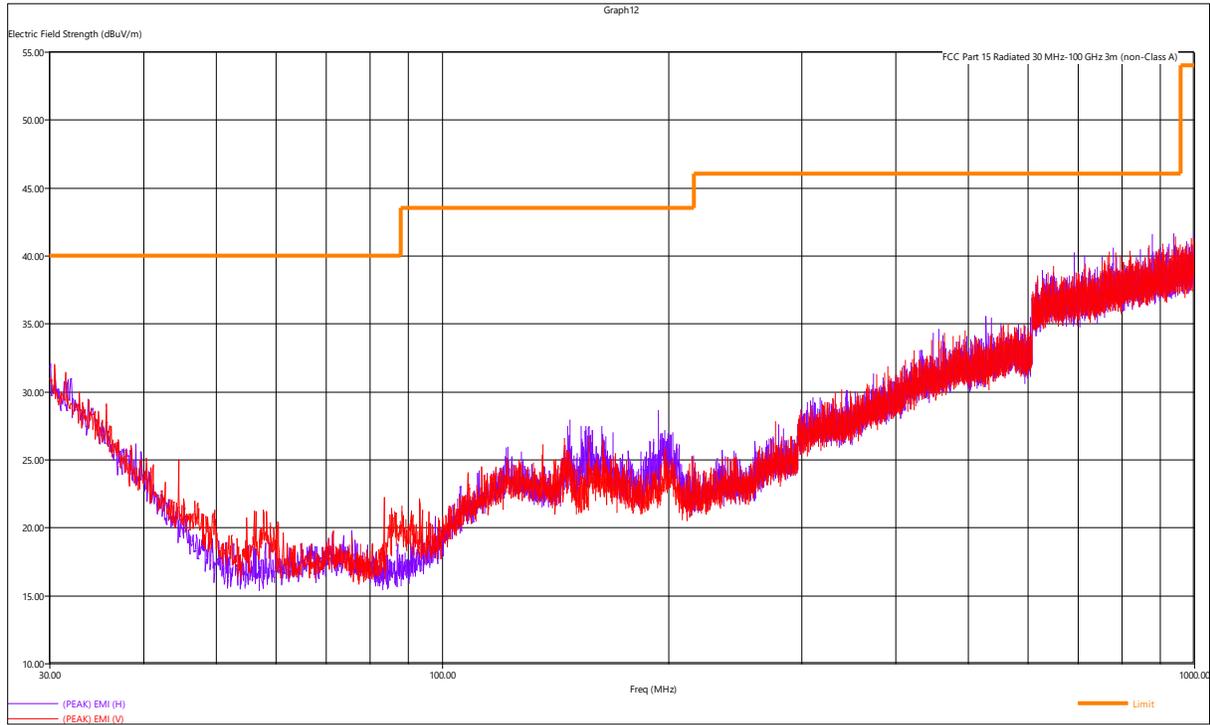


Figure 8 - Radiated Emissions Plot, 802.11b

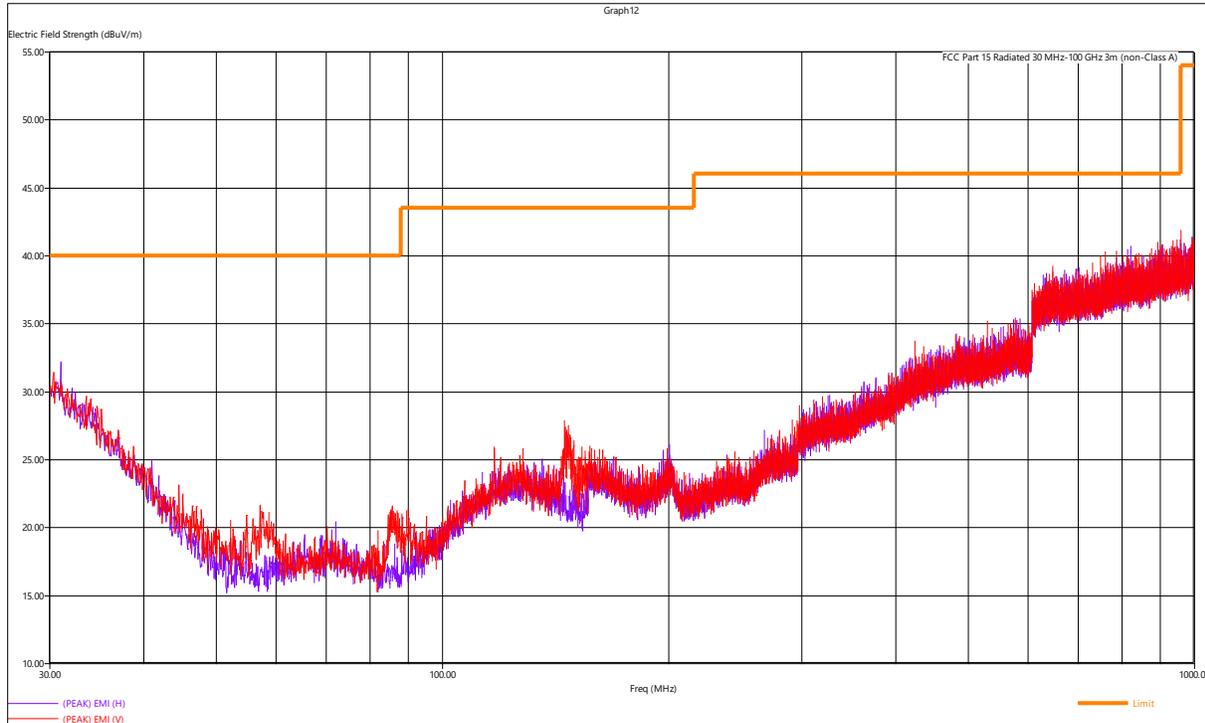


Figure 9 - Radiated Emissions Plot, 802.11g

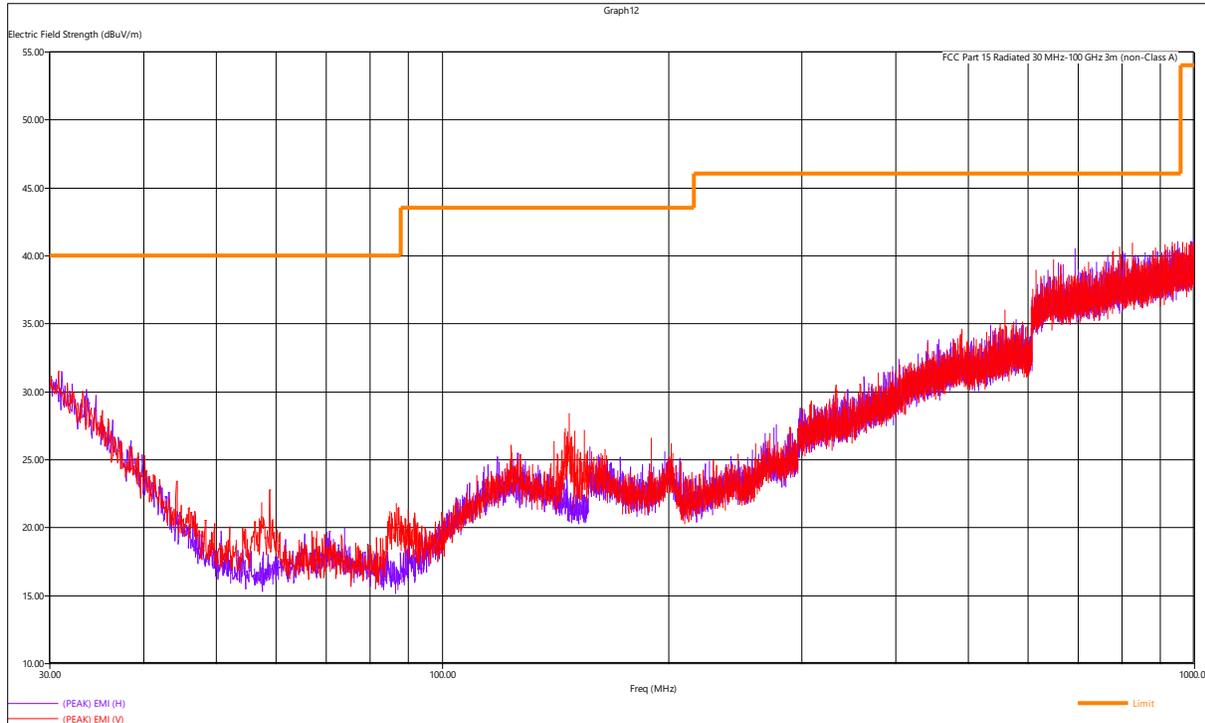


Figure 10 - Radiated Emissions Plot, 802.11n

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the plot and table above.

*If the measurements were found to be at least 6 dB below the limit, they were not reported.



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

Peak Measurements, 802.11, 30 MHz-25 GHz								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBμV/m	dBμV/m	dB	cm.	deg.			
2412.000000	99.40	N/A	N/A	200	207	V	Low	802.11b
2437.000000	97.60	N/A	N/A	200	207	V	Mid	802.11b
2480.000000	96.89	N/A	N/A	200	207	V	High	802.11b
2412.000000	96.16	N/A	N/A	200	207	V	Low	802.11g
2437.000000	98.88	N/A	N/A	200	207	V	Mid	802.11g
2480.000000	95.55	N/A	N/A	200	207	V	High	802.11g
2412.000000	94.17	N/A	N/A	200	207	V	Low	802.11n
2437.000000	98.20	N/A	N/A	200	207	V	Mid	802.11n
2480.000000	93.28	N/A	N/A	200	207	V	High	802.11n

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the plot and table above.

*If the measurements were found to be at least 6 dB below the limit, they were not reported.

Average Measurements, 802.11, 30 MHz-25 GHz								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBμV/m	dBμV/m	dB	cm.	deg.			
2412.000000	92.04	N/A	N/A	200	207	V	Low	802.11b
2437.000000	90.48	N/A	N/A	200	207	V	Mid	802.11b
2480.000000	89.54	N/A	N/A	200	207	V	High	802.11b
2412.000000	83.03	N/A	N/A	200	207	V	Low	802.11g
2437.000000	87.19	N/A	N/A	200	207	V	Mid	802.11g
2480.000000	83.46	N/A	N/A	200	207	V	High	802.11g
2412.000000	81.28	N/A	N/A	200	207	V	Low	802.11n
2437.000000	86.48	N/A	N/A	200	207	V	Mid	802.11n
2480.000000	81.37	N/A	N/A	200	207	V	High	802.11n

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the plot and table above.

*If the measurements were found to be at least 6 dB below the limit, they were not reported.

Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

4.5 BAND EDGES

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of band-edge measurements:

For FCC Part 15.249 Device:

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

For FCC Part 15.247 Device:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

Test procedures:

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

Test results:

Pass

Restricted Band Edge Measurements							
Modulation	Channel	Average level	Average Limit	Average Margin	Peak Level	Peak Limit	Peak Margin
802.11b	Low	42.271	53.980	11.709	53.895	73.890	19.995
802.11b	High	41.156	53.980	12.824	54.723	73.890	19.167
802.11g	Low	45.581	53.980	8.399	62.089	73.890	11.801
802.11g	High	43.233	53.980	10.747	59.623	73.890	14.267
802.11n	Low	43.308	53.980	10.672	56.497	73.890	17.393
802.11n	High	41.967	53.980	12.013	54.605	73.890	19.285

Comments:

1. All the band edge plots can be found in the Appendix C.
2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
3. If the device falls under FCC Part 15.249 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 50 dB between peak and the band edge.
4. The restricted band edge compliance is shown by comparing to the general limit defined in Part 15.209. The limit shown in the graph accounts for the antenna gain of the device.



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

4.6 POWER SPECTRAL DENSITY

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of power measurements:

For FCC Part 15.249 Device:

Not Applicable

For FCC Part 15.247 Device:

The maximum PSD allowed is 8 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

4. All the Power Spectral Density (PSD) plots can be found in the Appendix C.
5. All the measurements were found to be compliant.
6. The measurements are reported on the graph.

4.7 CONDUCTED AC MAINS EMISSIONS

Test Method: ANSI C63.10-2013, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test Results:

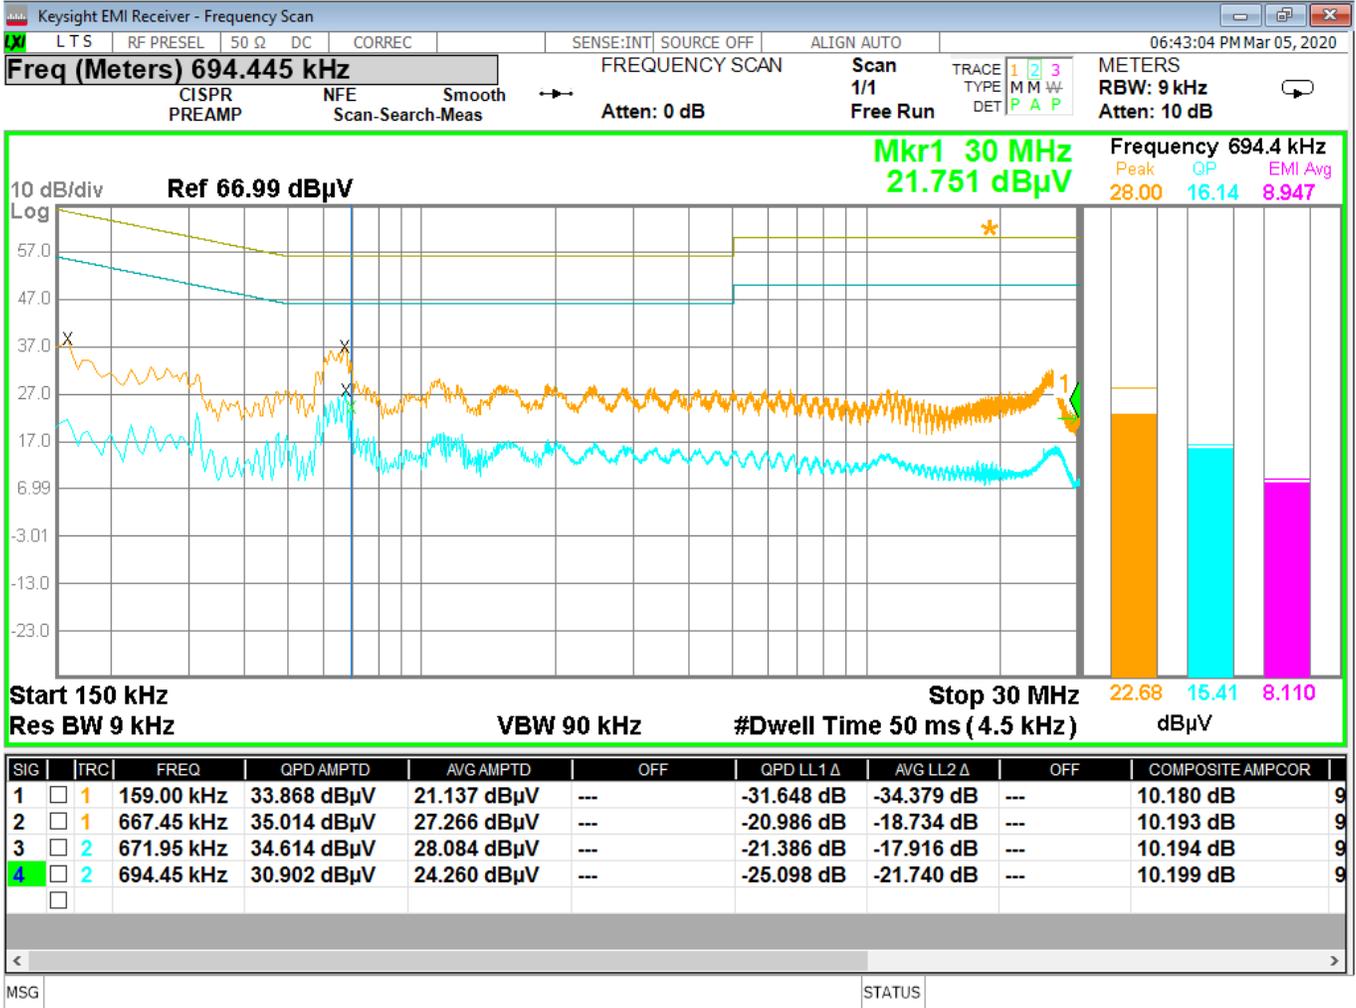


Figure 11 - Conducted Emissions Plot, Line

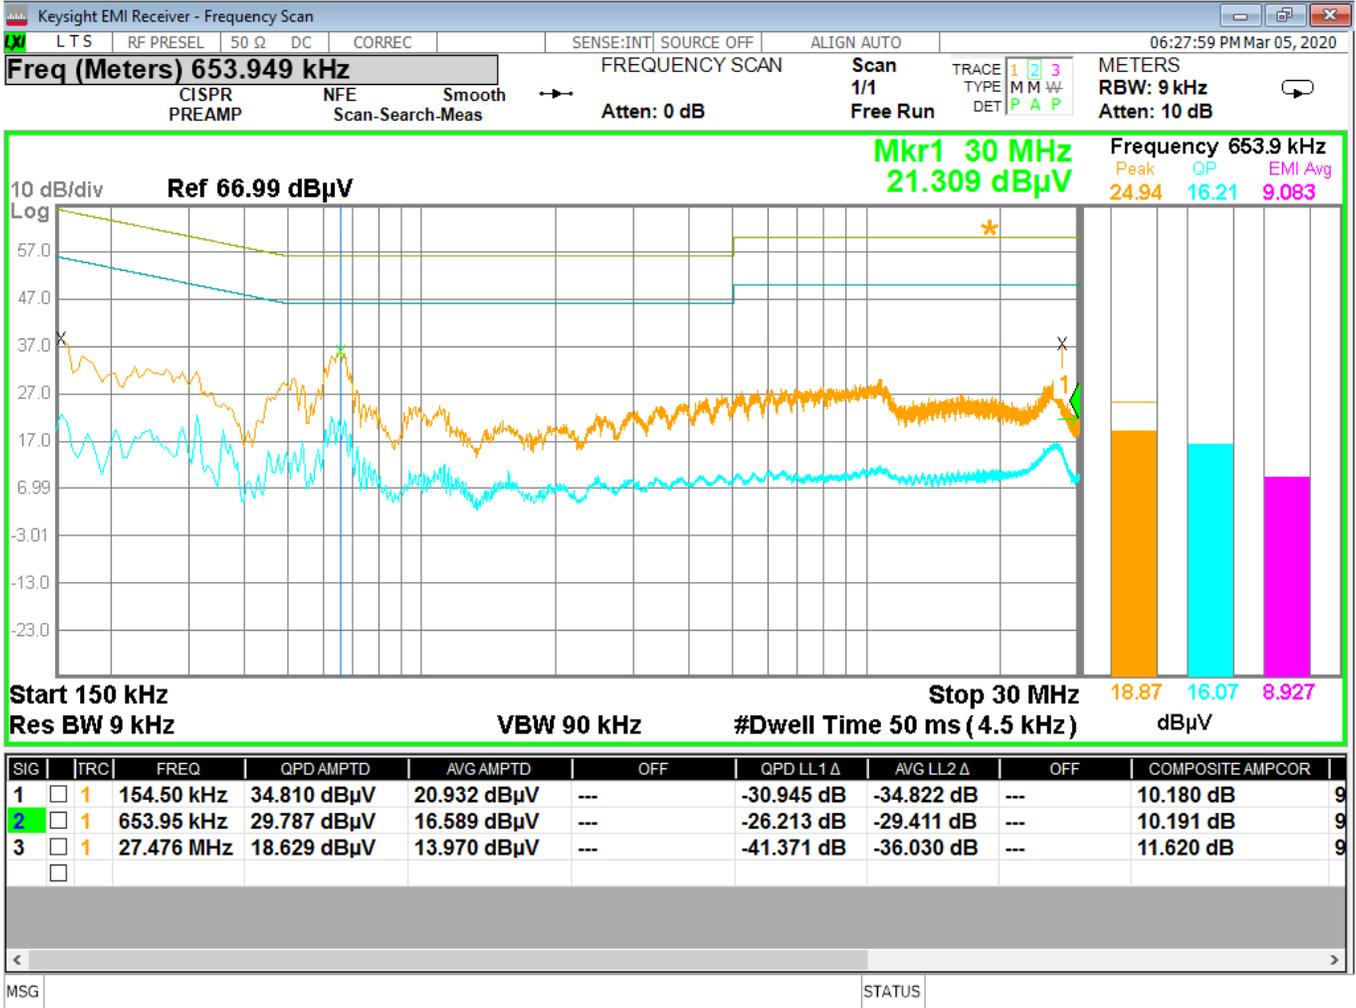


Figure 12 - Conducted Emissions Plot, Neutral



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

- RA = Receiver Amplitude
- AF = Antenna Factor
- CF = Cable Attenuation Factor
- AG = Amplifier Gain
- AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP (Watts) = [Field Strength (V/m) \times antenna distance (m)]^2 / 30$$

$$Power (watts) = 10^{[Power (dBm)/10]} / 1000$$

$$Voltage (dB\mu V) = Power (dBm) + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field Strength (V/m) = 10^{[Field Strength (dB\mu V/m) / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

10log(10^9) is the conversion from micro to milli



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:


Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.




Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		


APPENDIX C – GRAPHS AND TABLES

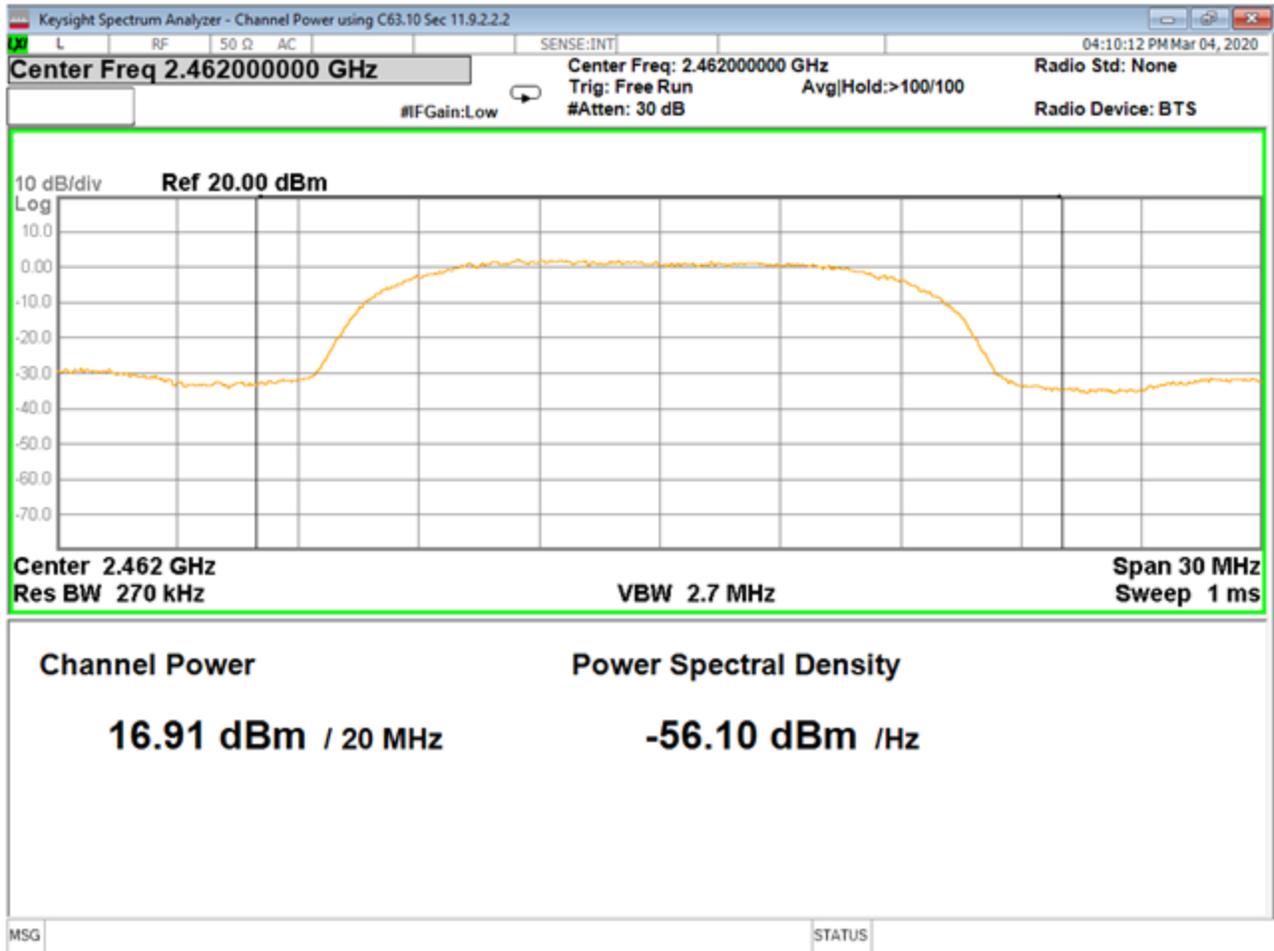

C03561 Average Power High Ch WIFI b

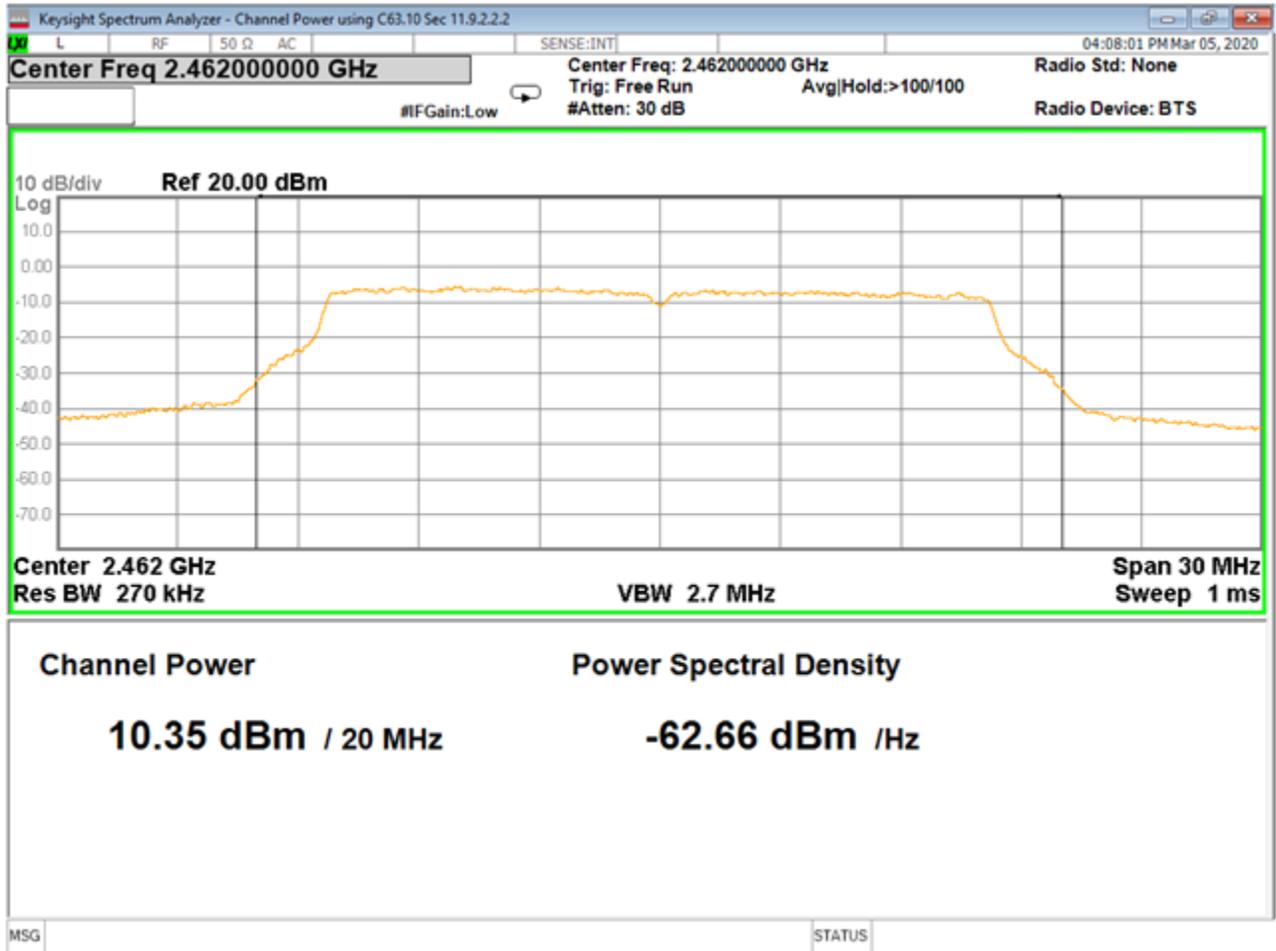

C03561 Average Power High Ch WIFI g

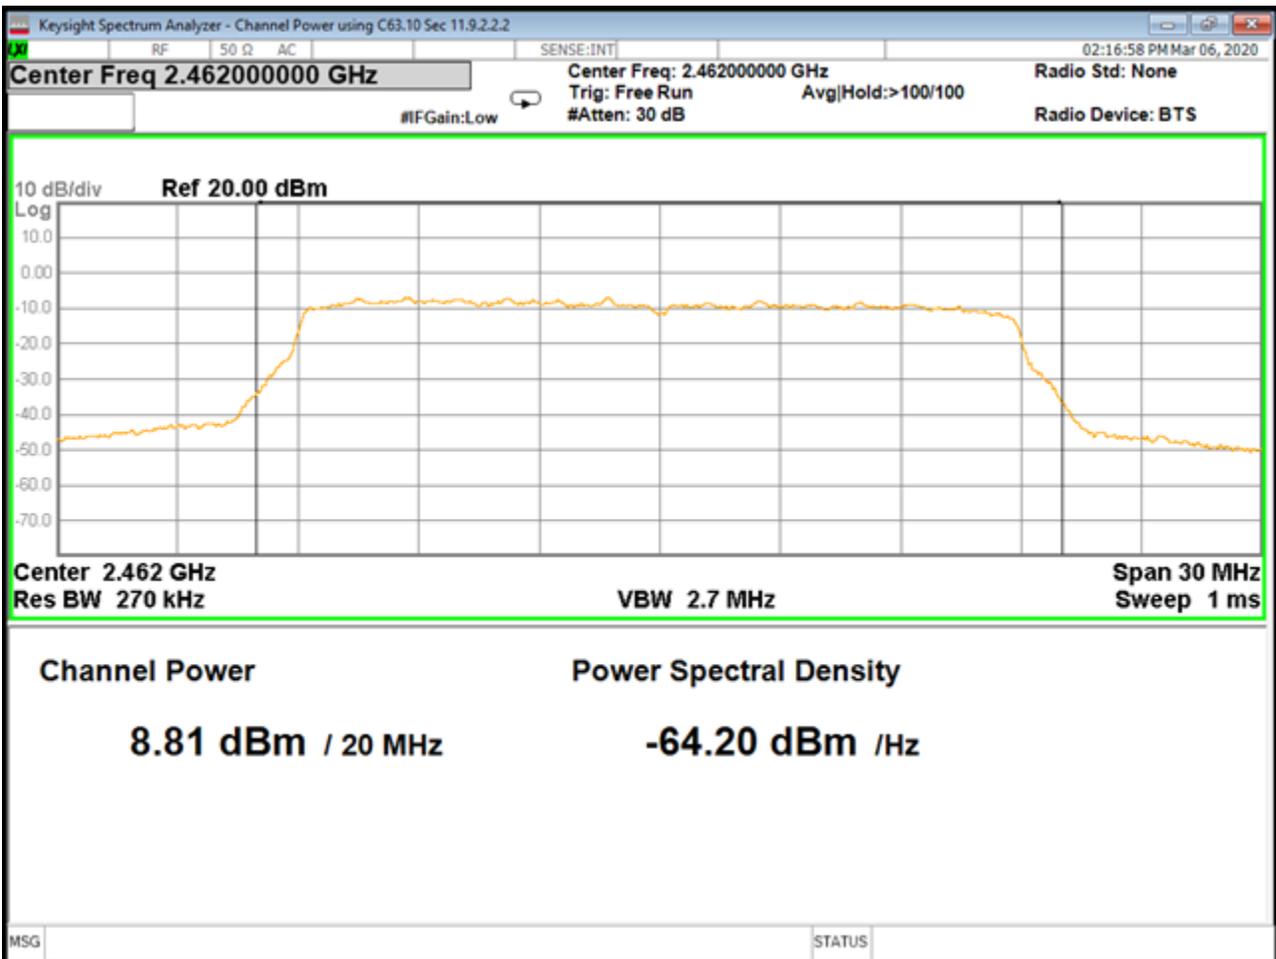

C03561 Average Power High Ch WIFI n



Report Number:


R20200110-20-E15A

Rev


A

Prepared for:


Garmin International, Inc.

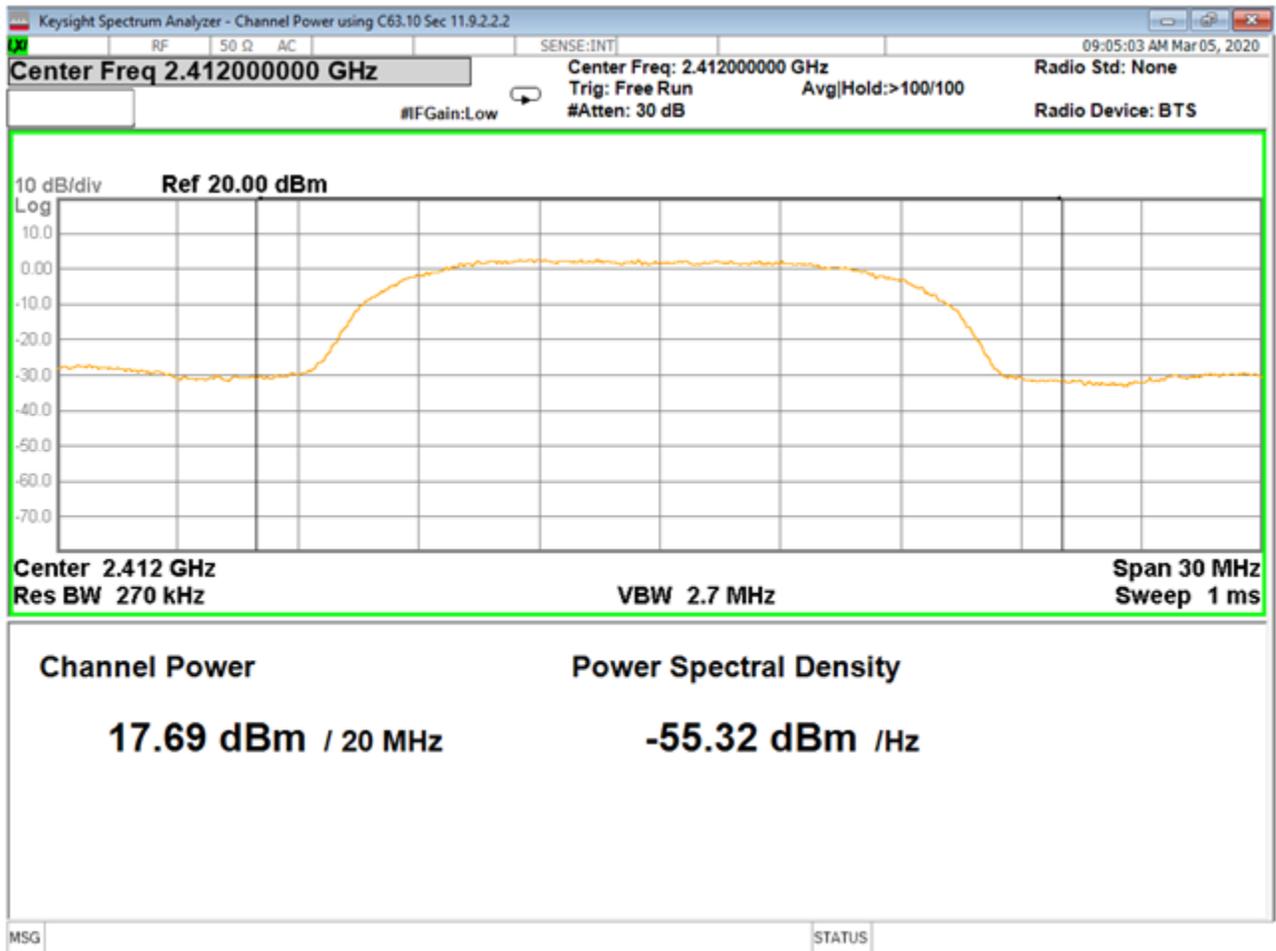

C03561 Average Power low Ch WIFI b

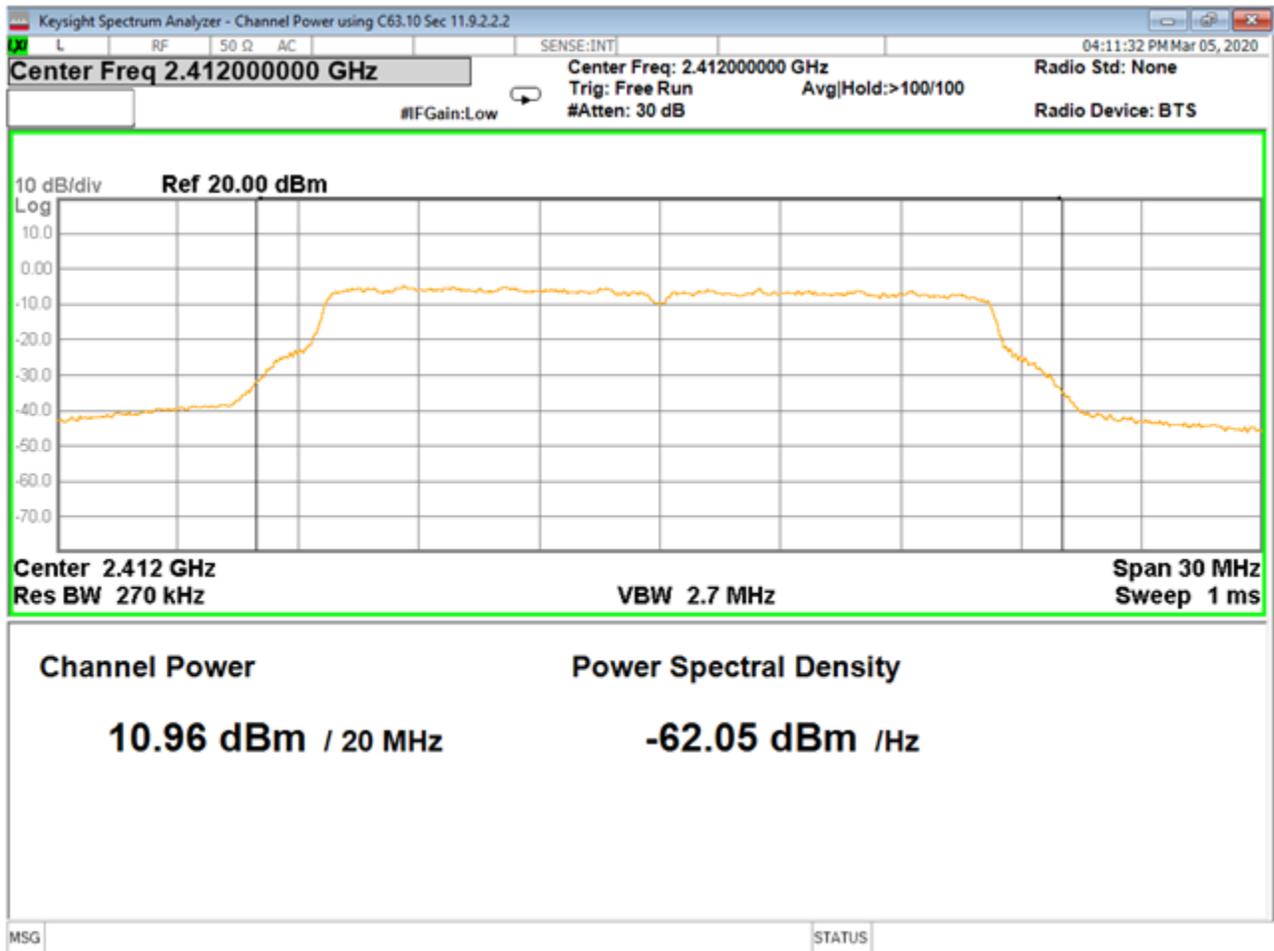

C03561 Average Power Low Ch WIFI g

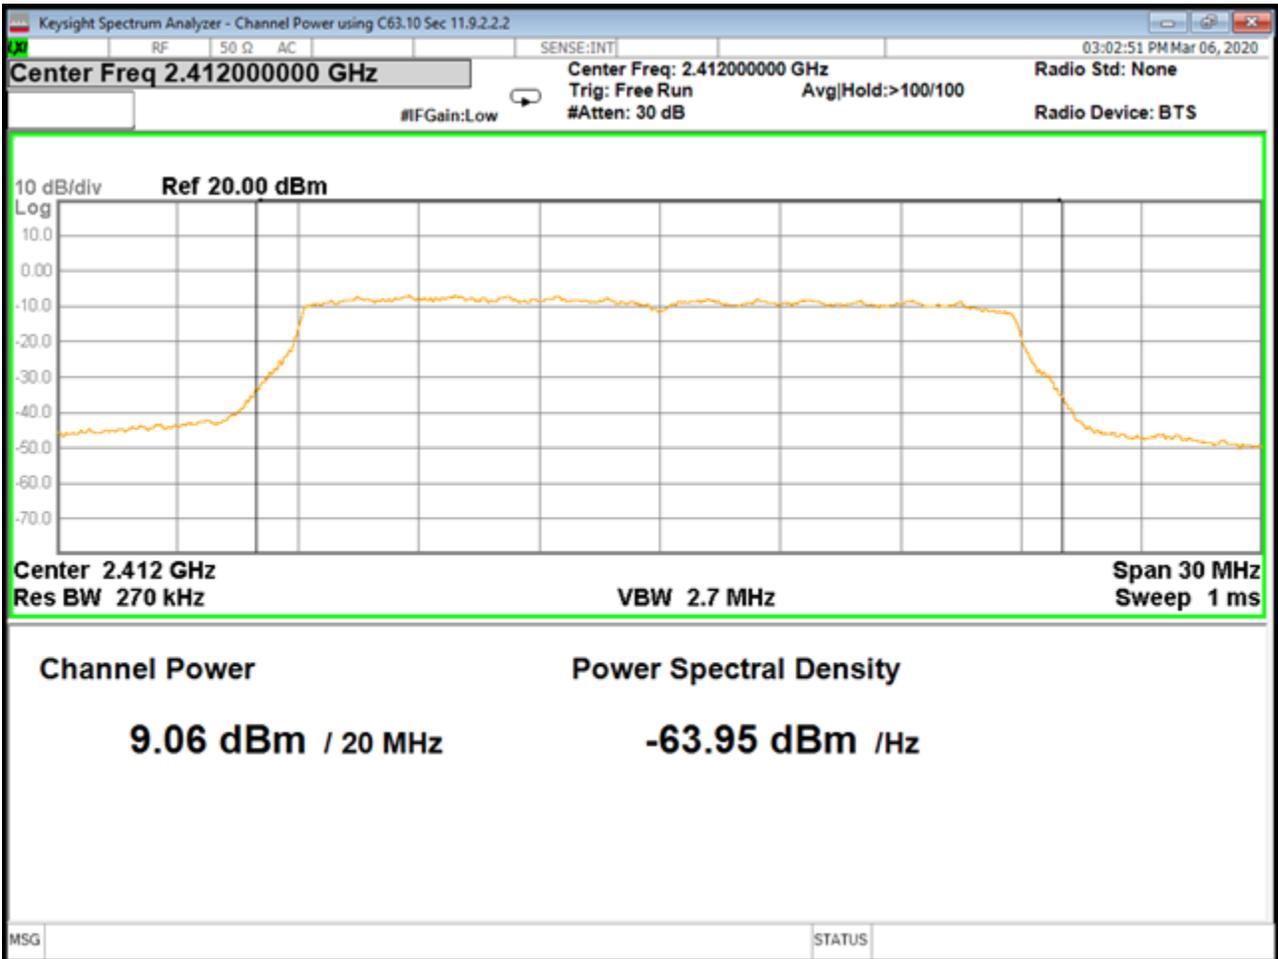

C03561 Average Power low Ch WIFI n



Report Number:


R20200110-20-E15A

Rev

A

Prepared for:

Garmin International, Inc.

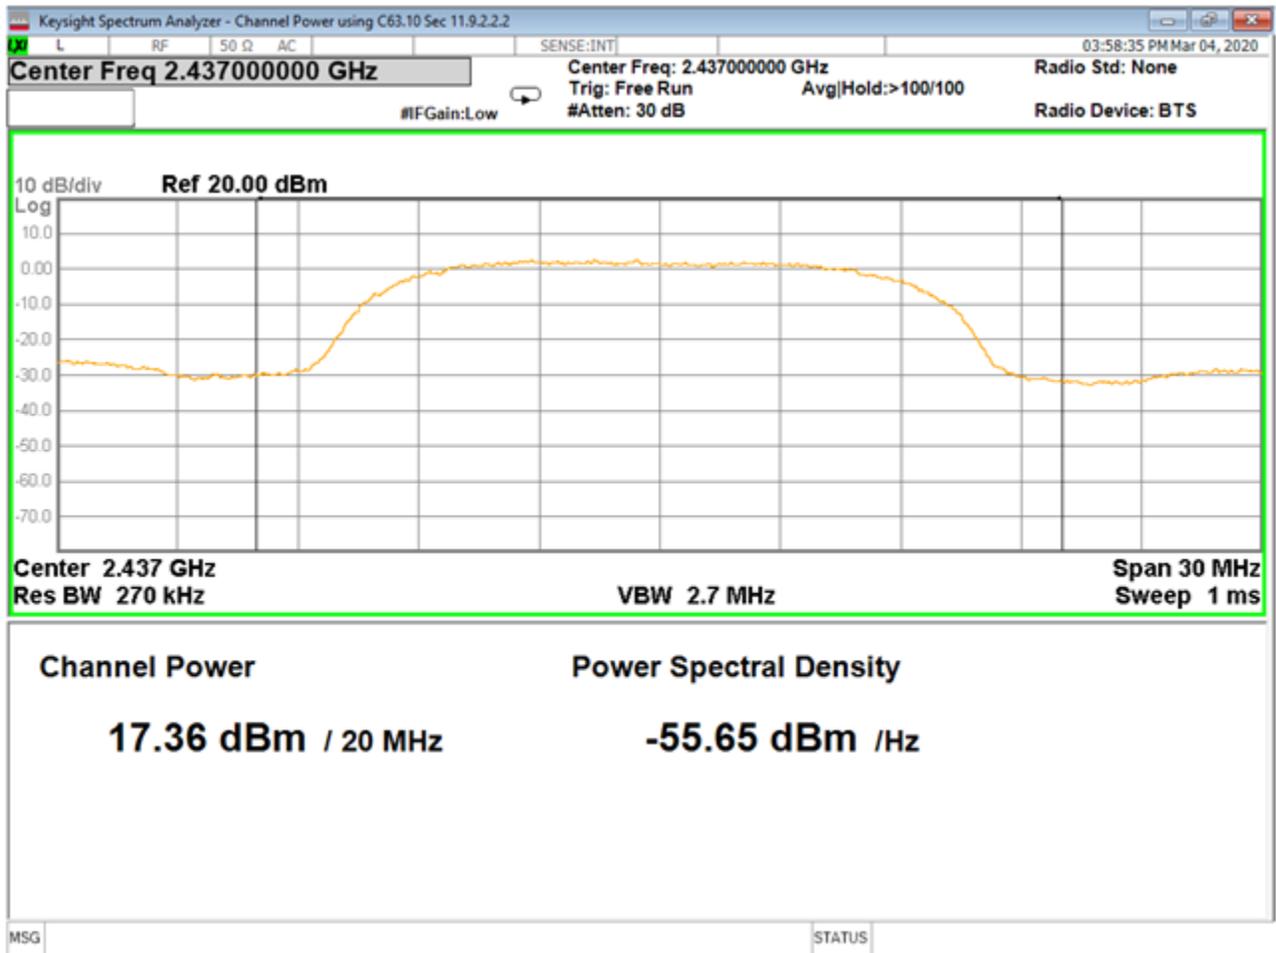

C03561 Average Power Mid Ch WIFI b



Report Number:


R20200110-20-E15A

Rev


A

Prepared for:

Garmin International, Inc.

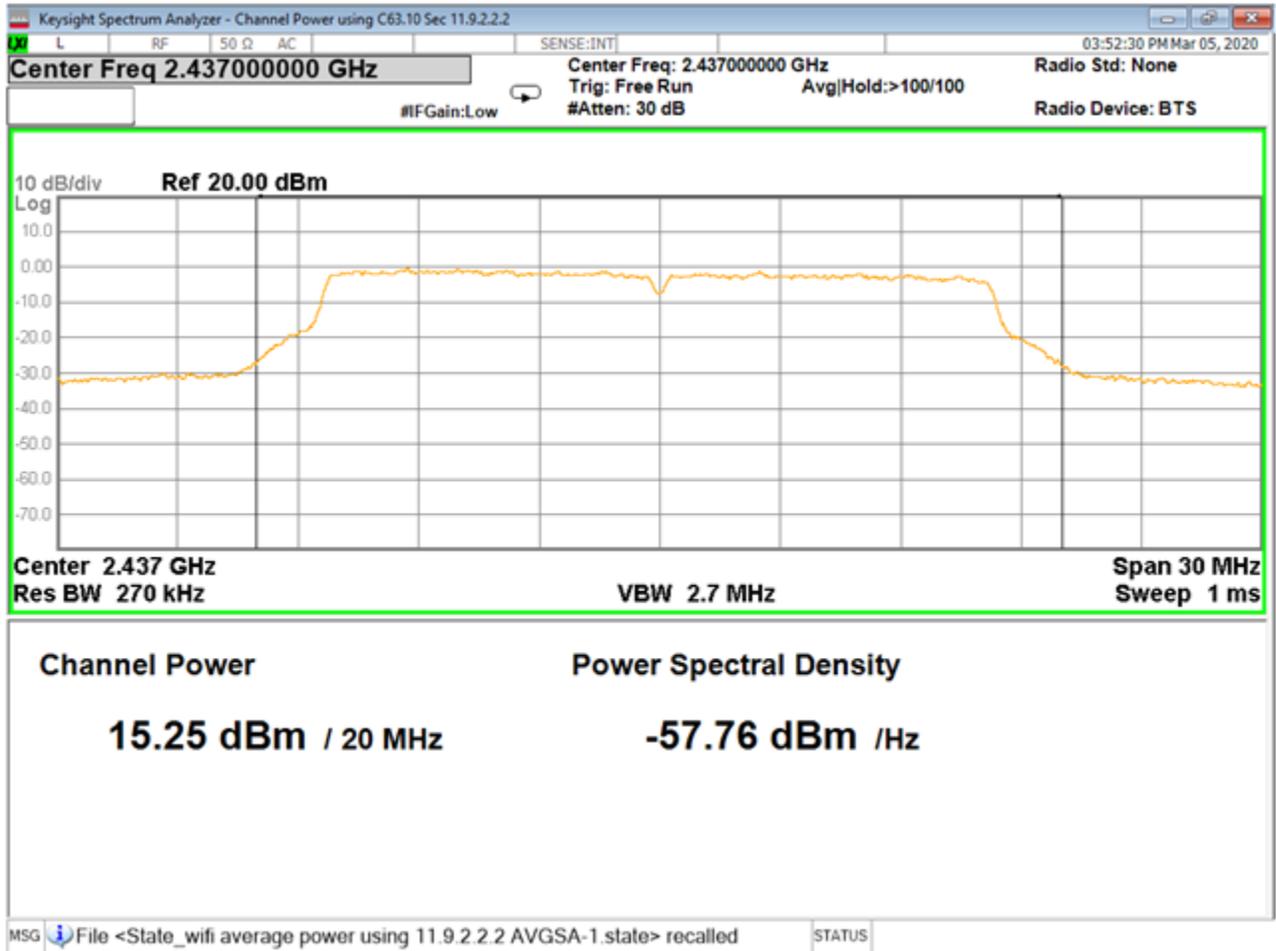

C03561 Average Power Mid Ch WIFI g

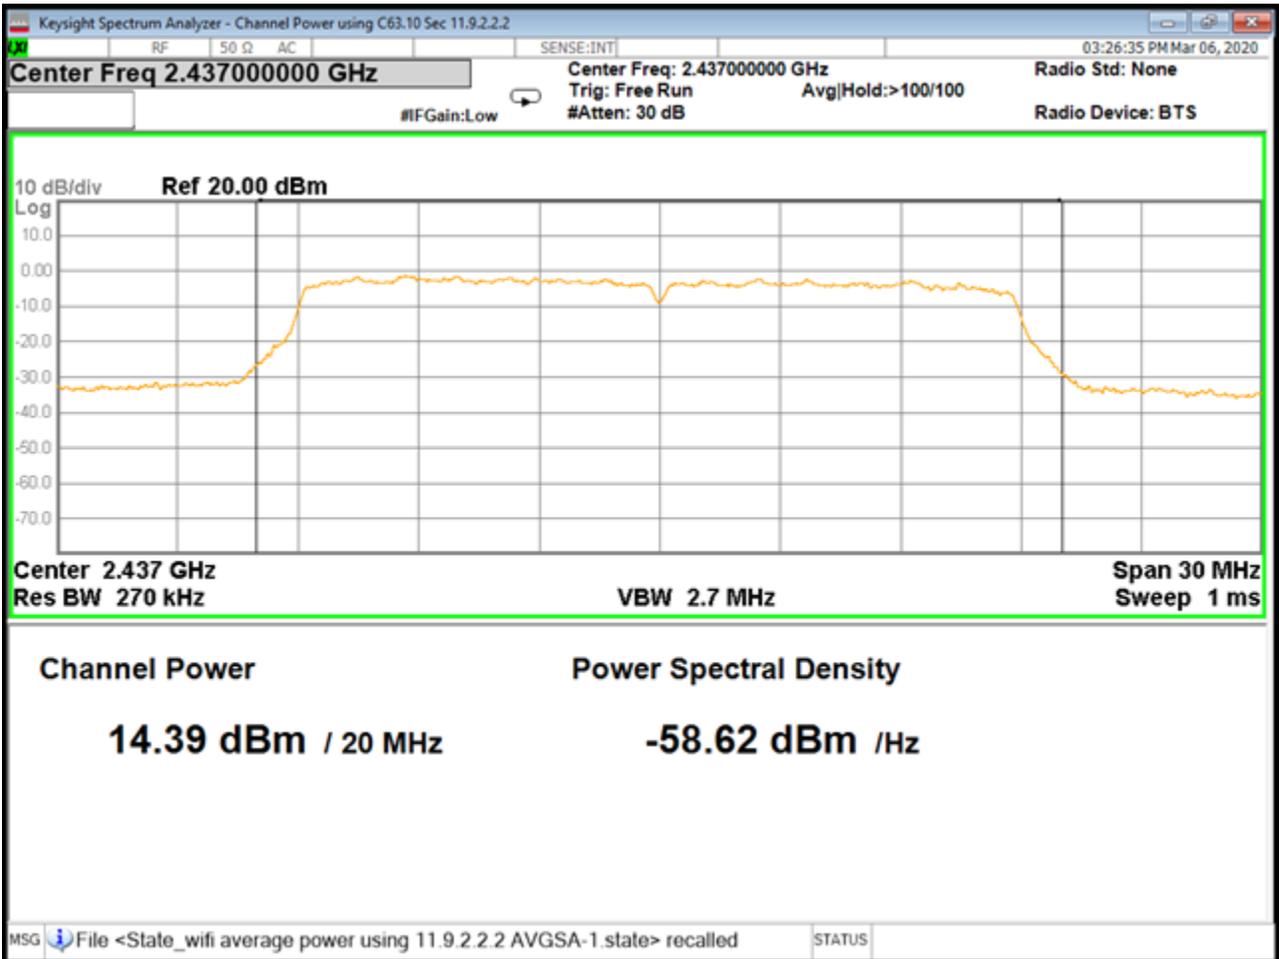

C03561 Average Power Mid Ch WIFI n



Report Number:


R20200110-20-E15A

Rev

A

Prepared for:

Garmin International, Inc.

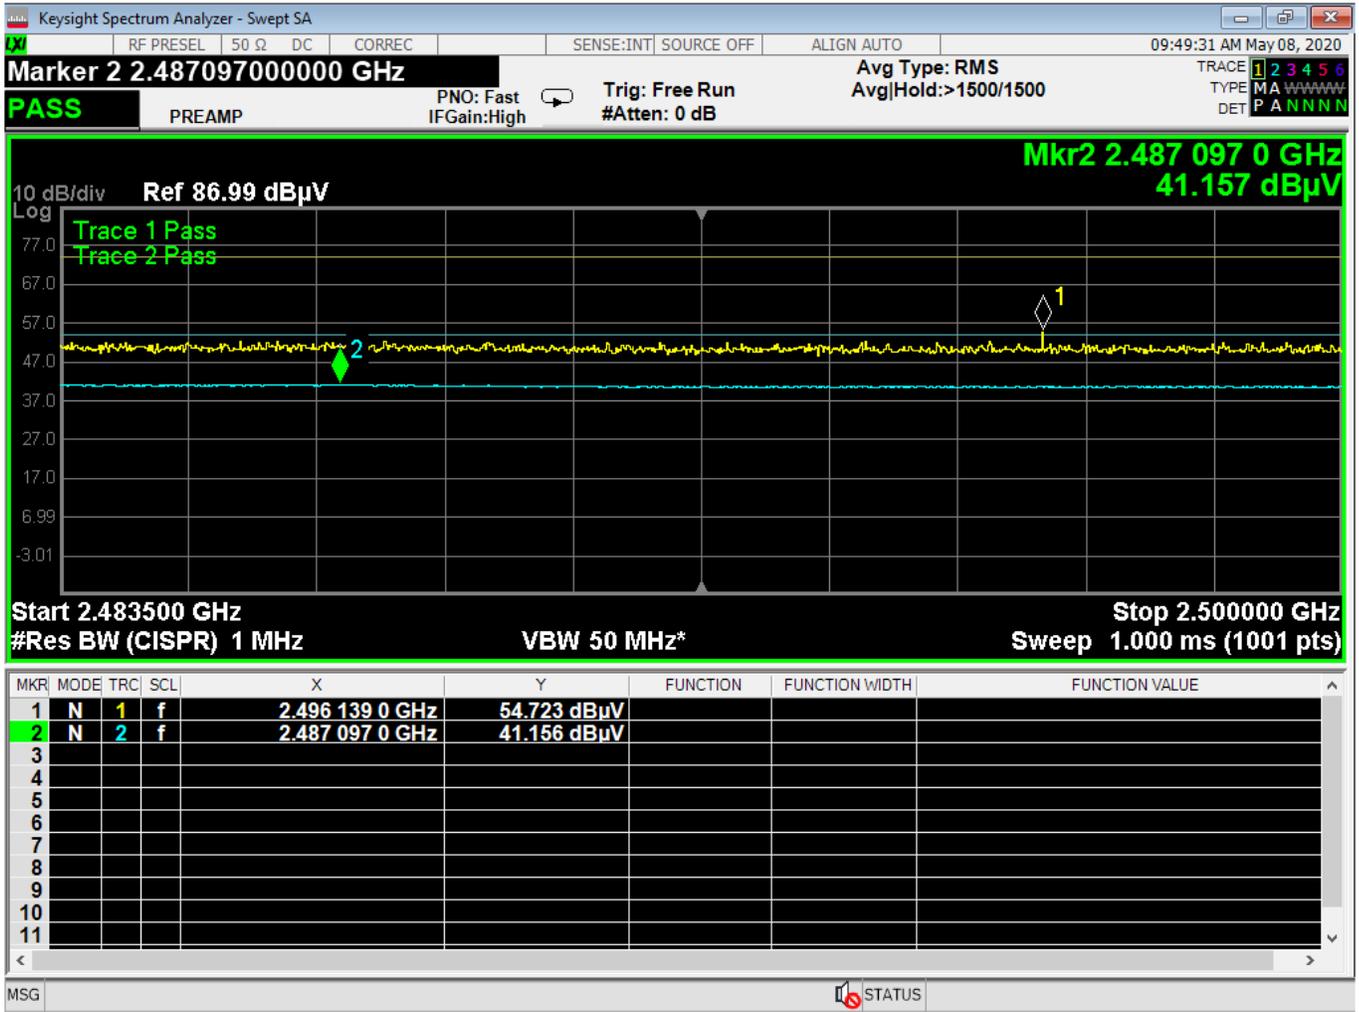

C03561 restricted Higher Band Edge Ch WIFI b

*Limit per Part 15.209 is 73.98 dBμV/m for peak and 53.98 dBμV/m for average at 3m test distance. Peak and Average Trace values are shown with corresponding limits. Tabular data for worst case frequencies shown above can be found in section 4.5.




Report Number: R20200110-20-E15A

Rev

A

Prepared for: Garmin International, Inc.

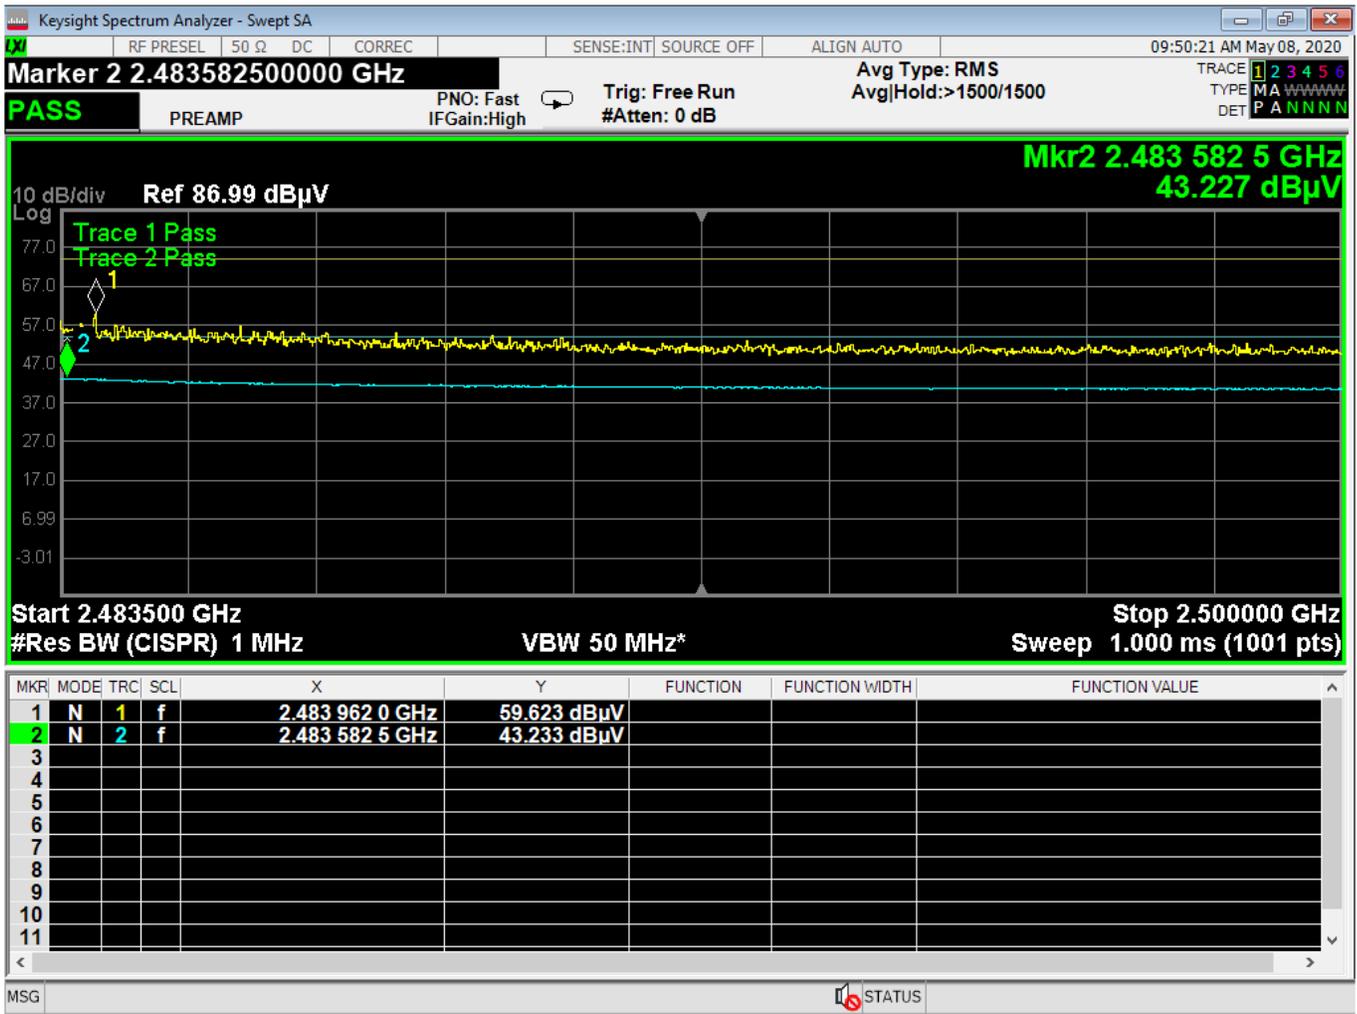

C03561 restricted Higher Band Edge WIFI g

*Limit per Part 15.209 is 73.98 dB μ V/m for peak and 53.98 dB μ V/m for average at 3m test distance. Peak and Average Trace values are shown with corresponding limits. Tabular data for worst case frequencies shown above can be found in section 4.5.



Report Number:


R20200110-20-E15A

Rev

A

Prepared for:

Garmin International, Inc.

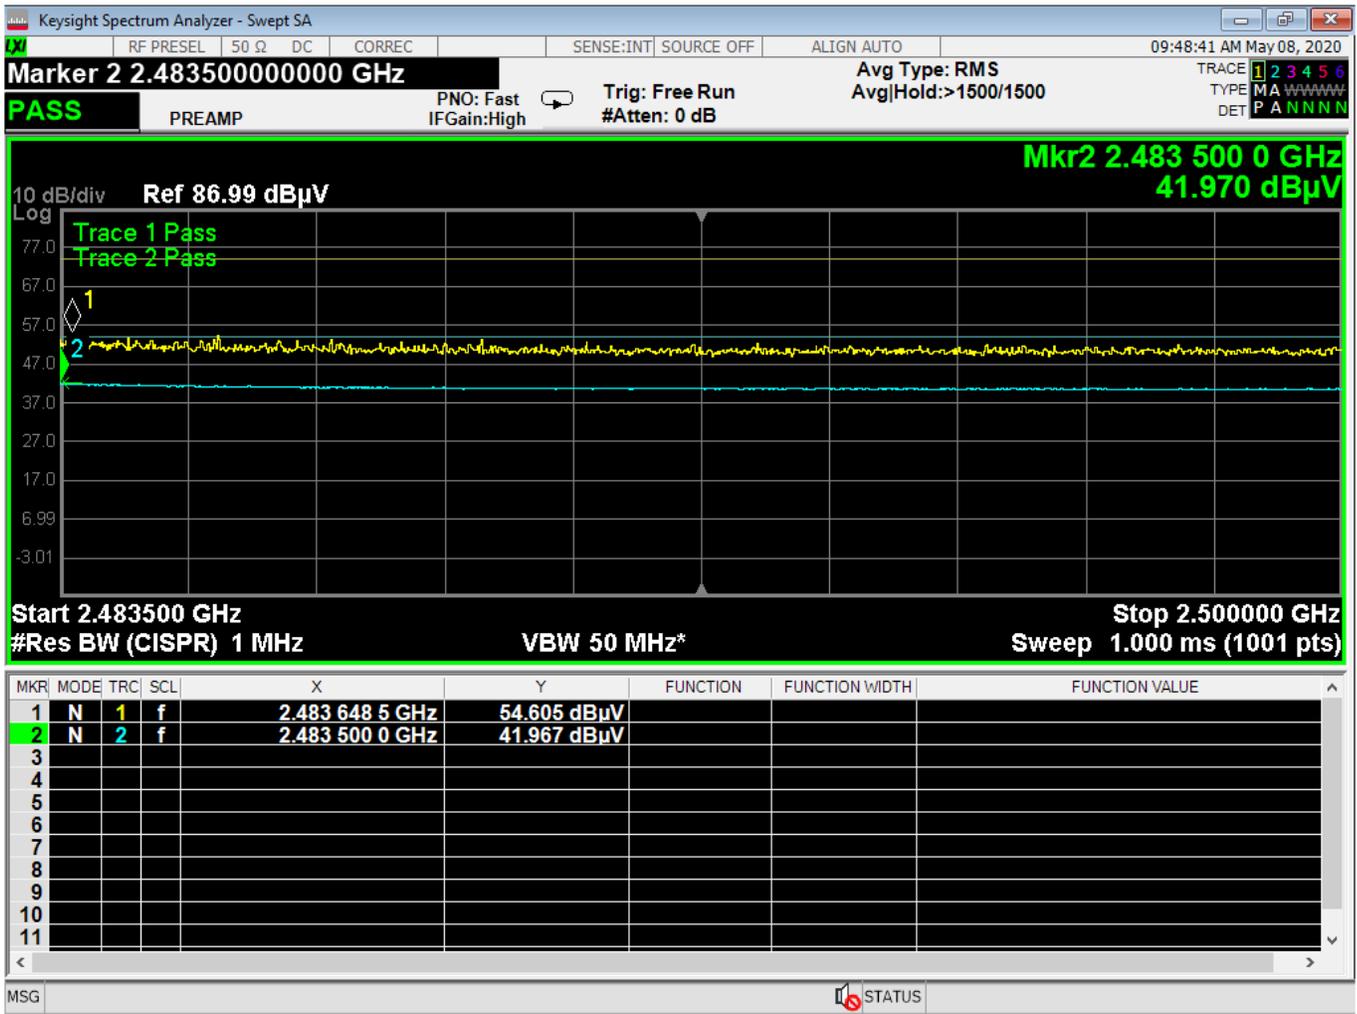


C03561 restricted Higher Band Edge WIFI n

*Limit per Part 15.209 is 73.98 dBμV/m for peak and 53.98 dBμV/m for average at 3m test distance. Peak and Average Trace values are shown with corresponding limits. Tabular data for worst case frequencies shown above can be found in section 4.5.



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

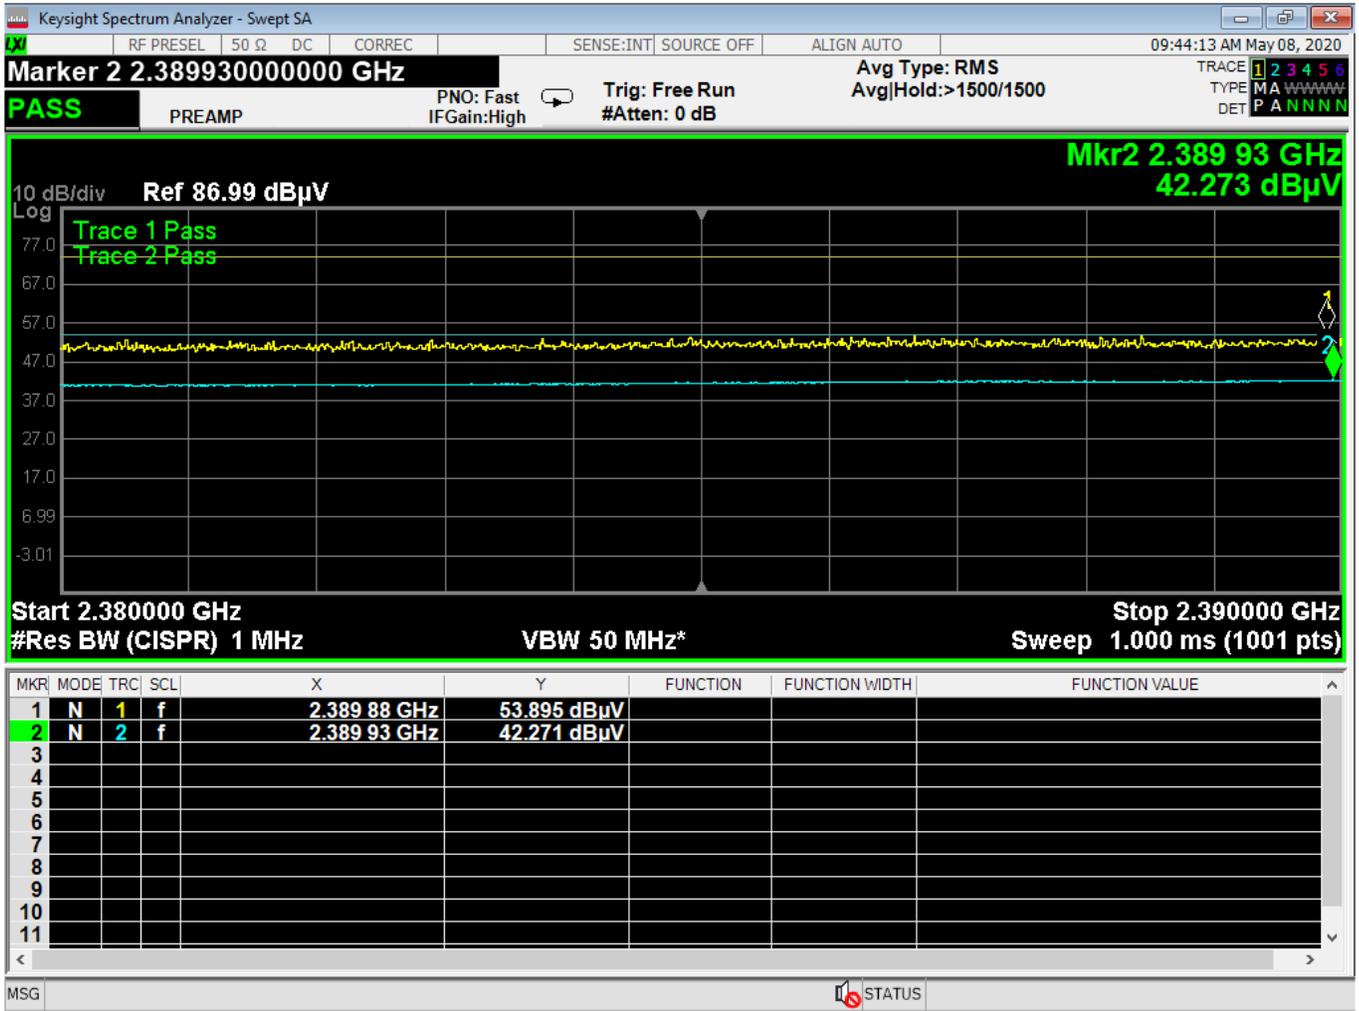


C03561 Restricted Lower Band Edge WIFI b

*Limit per Part 15.209 is 73.98 dBμV/m for peak and 53.98 dBμV/m for average at 3m test distance. Peak and Average Trace values are shown with corresponding limits. Tabular data for worst case frequencies shown above can be found in section 4.5.



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

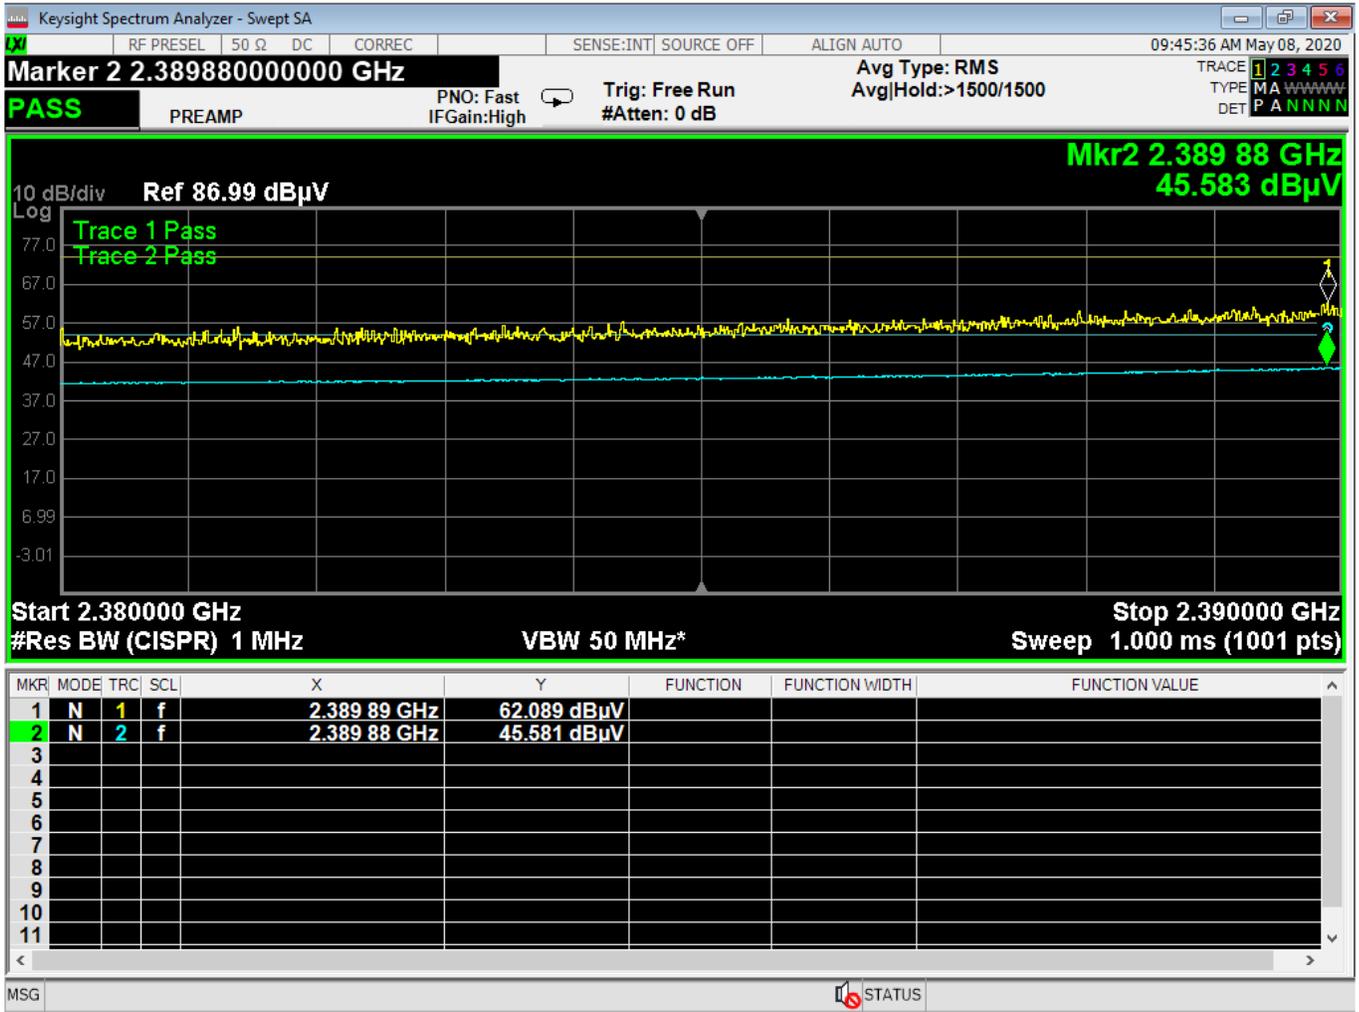


C03561 Restricted Lower Band Edge WIFI g

*Limit per Part 15.209 is 73.98 dBμV/m for peak and 53.98 dBμV/m for average at 3m test distance. Peak and Average Trace values are shown with corresponding limits. Tabular data for worst case frequencies shown above can be found in section 4.5.



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

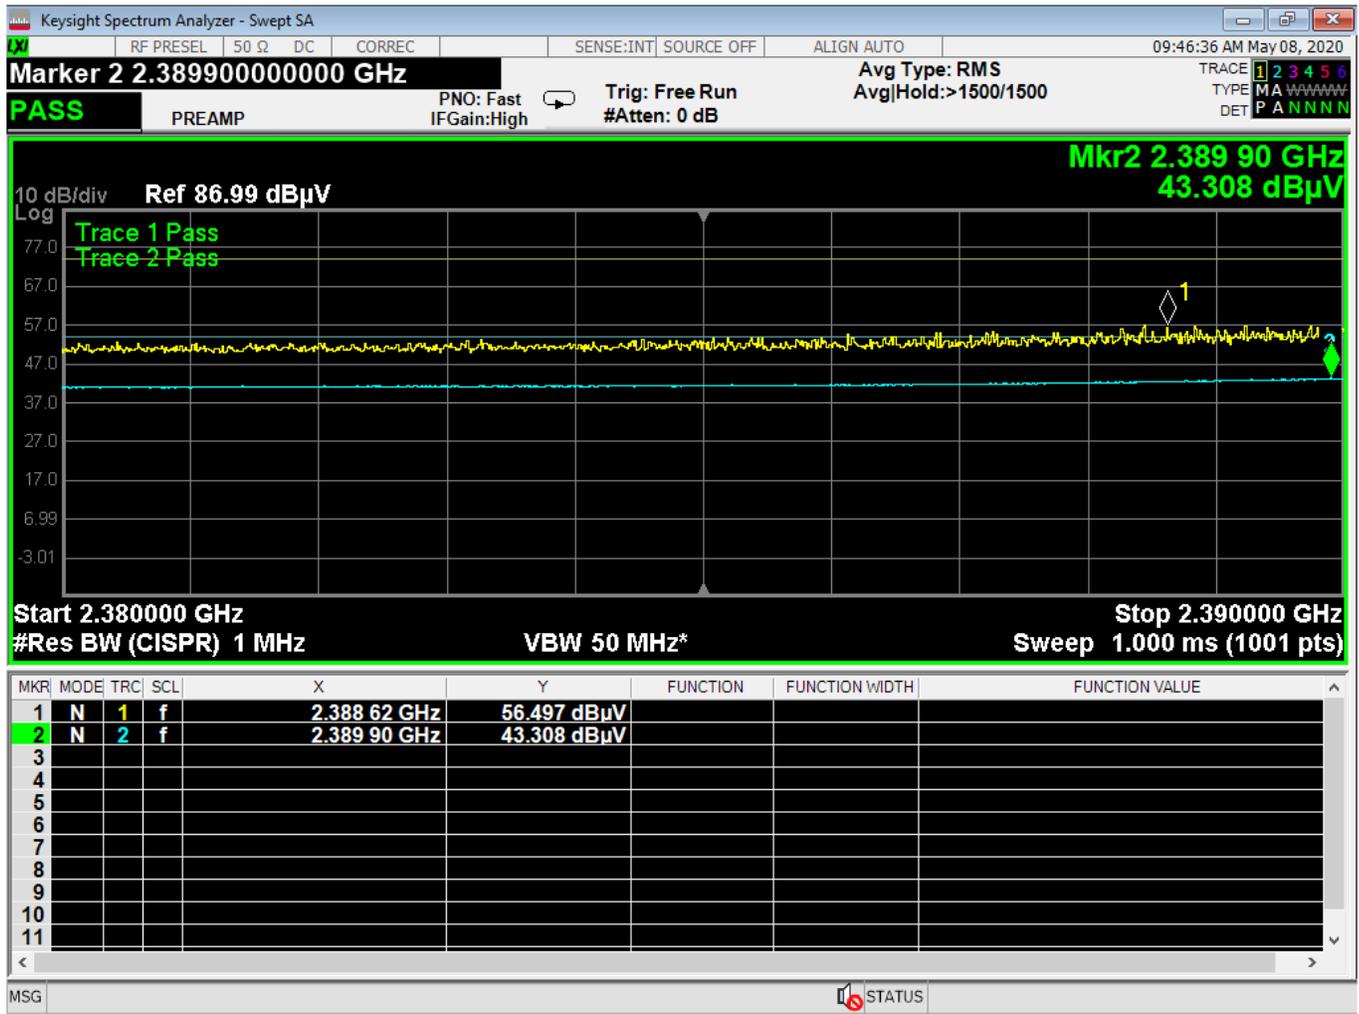

C03561 Restricted Lower Band Edge WIFI n

*Limit per Part 15.209 is 73.98 dBμV/m for peak and 53.98 dBμV/m for average at 3m test distance. Peak and Average Trace values are shown with corresponding limits. Tabular data for worst case frequencies shown above can be found in section 4.5.



Report Number:


R20200110-20-E15A

Rev


A

Prepared for:


Garmin International, Inc.

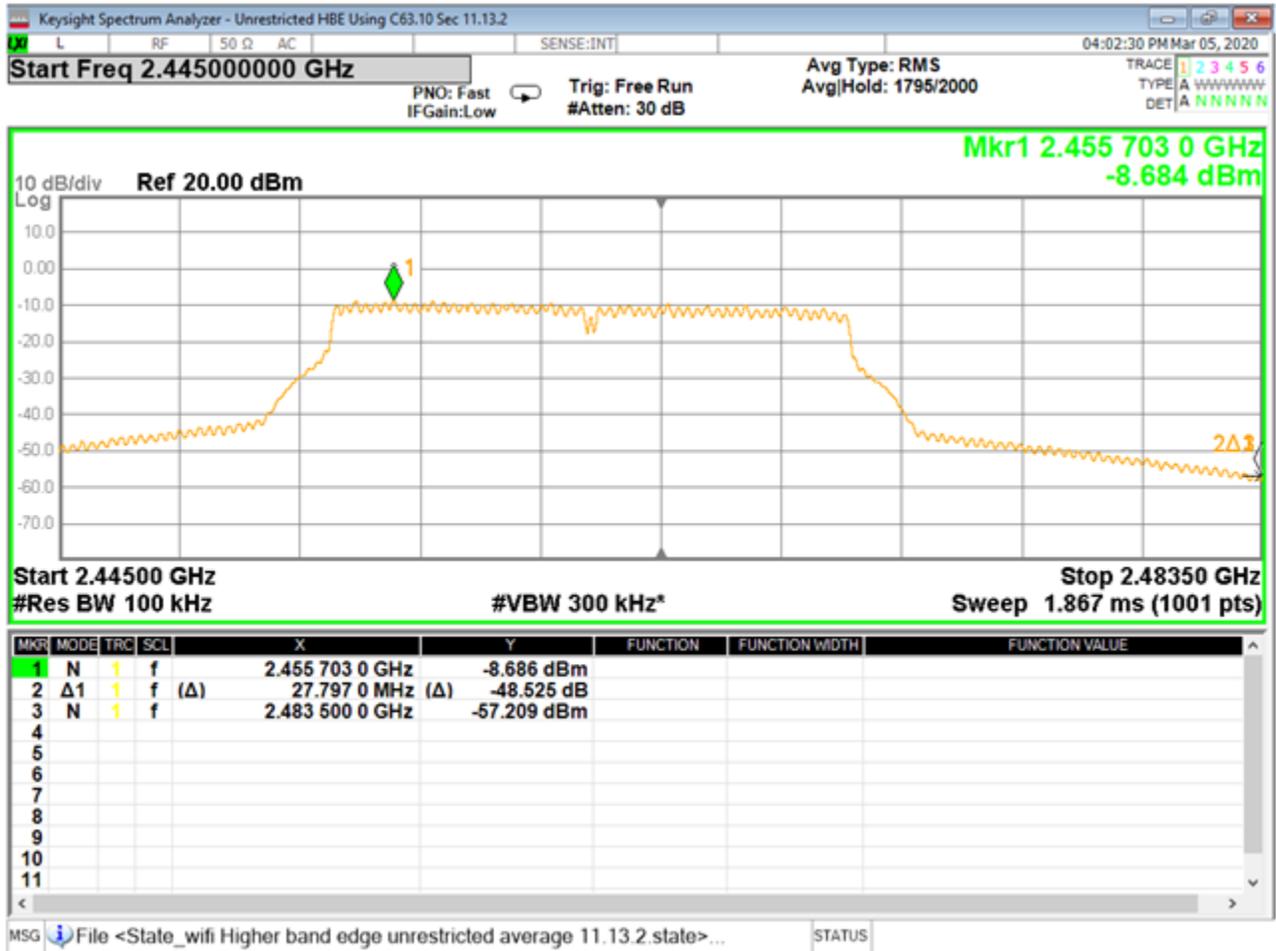


C03561 Average Unrestricted Higher Band Edge Ch WIFI g

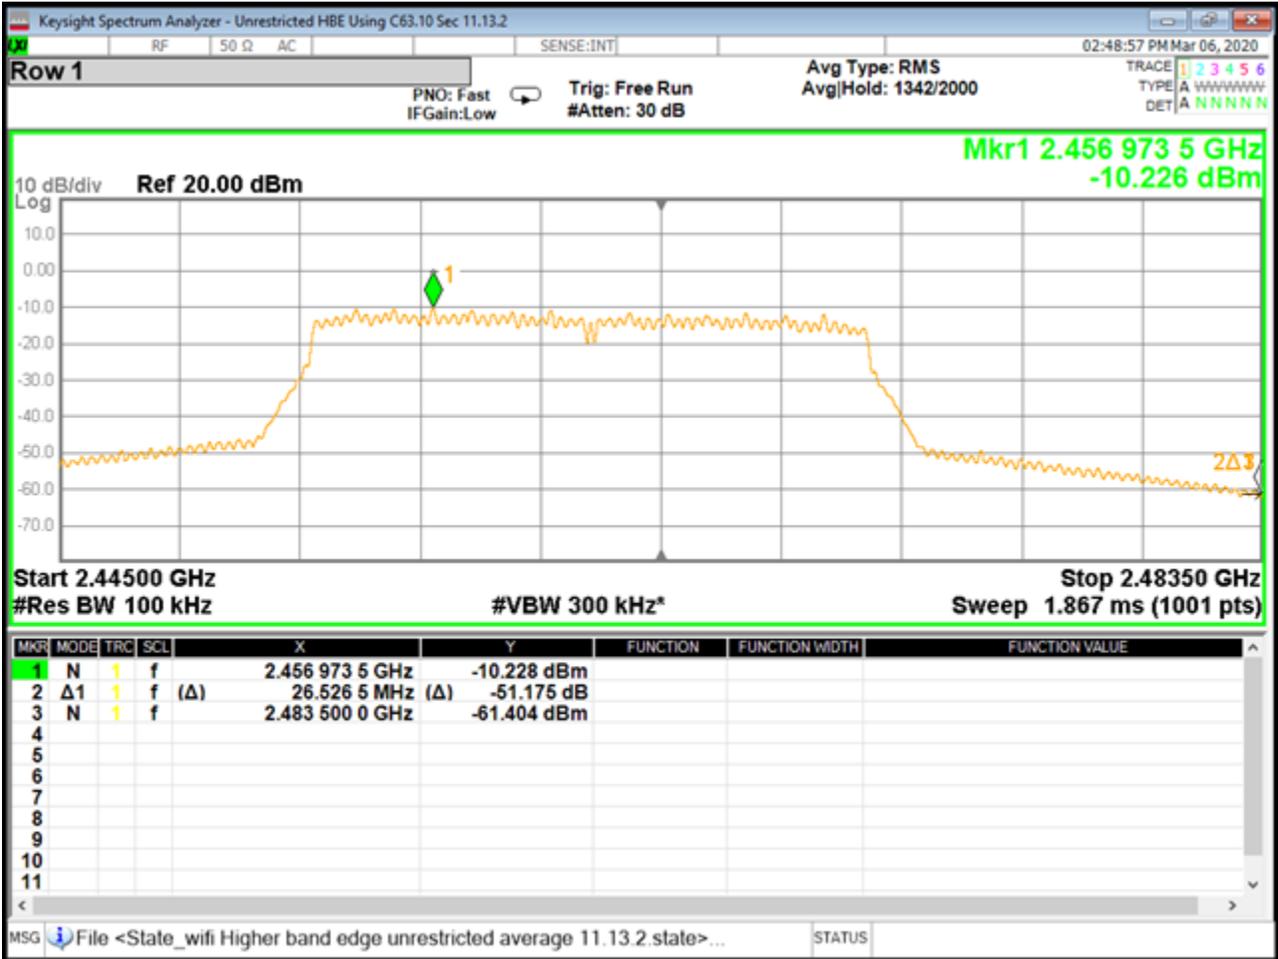


C03561 Average Unrestricted Higher Band Edge Ch WIFI n

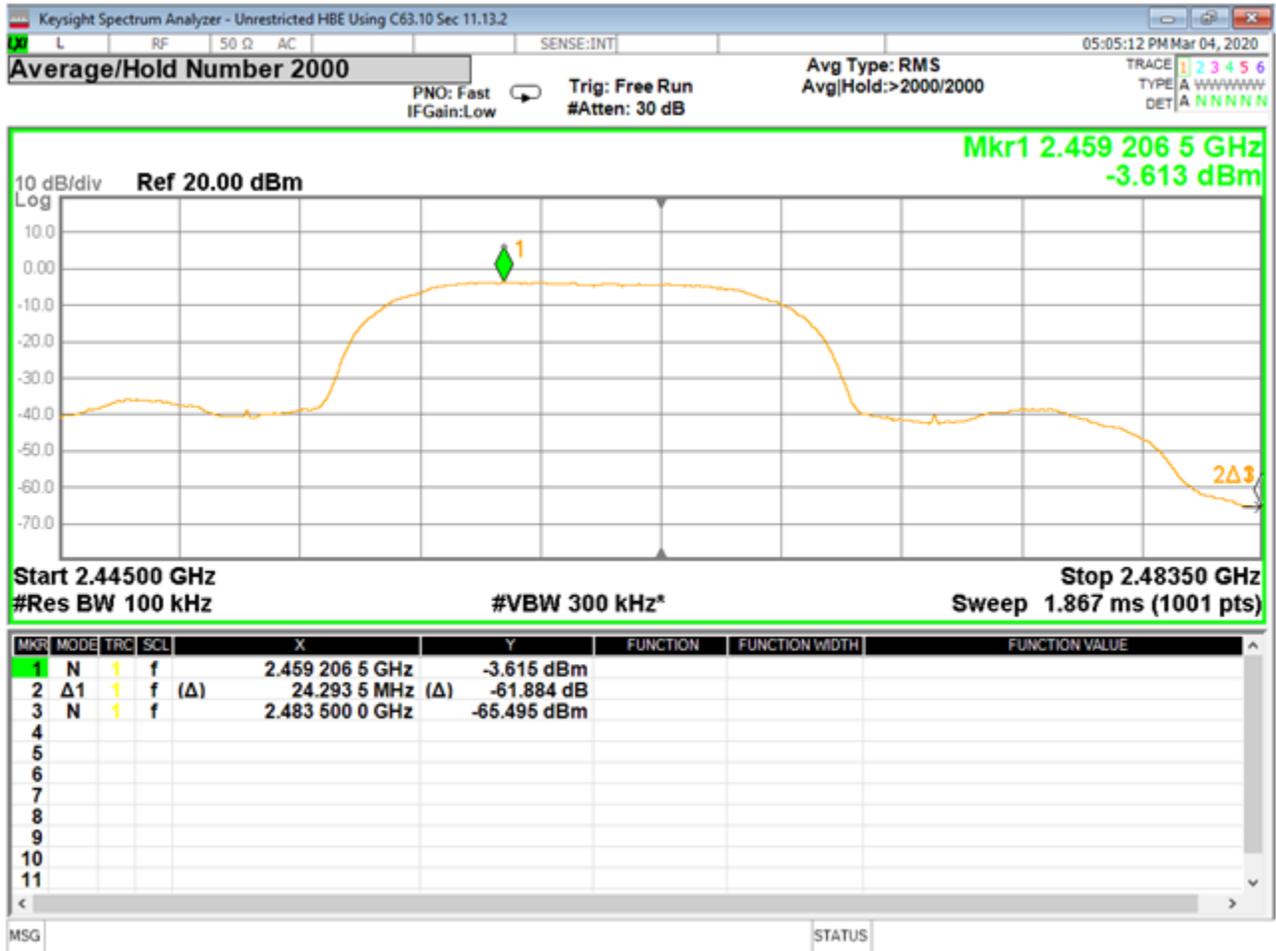

C03561 Average Unrestricted Higher Band Edge WIFI b

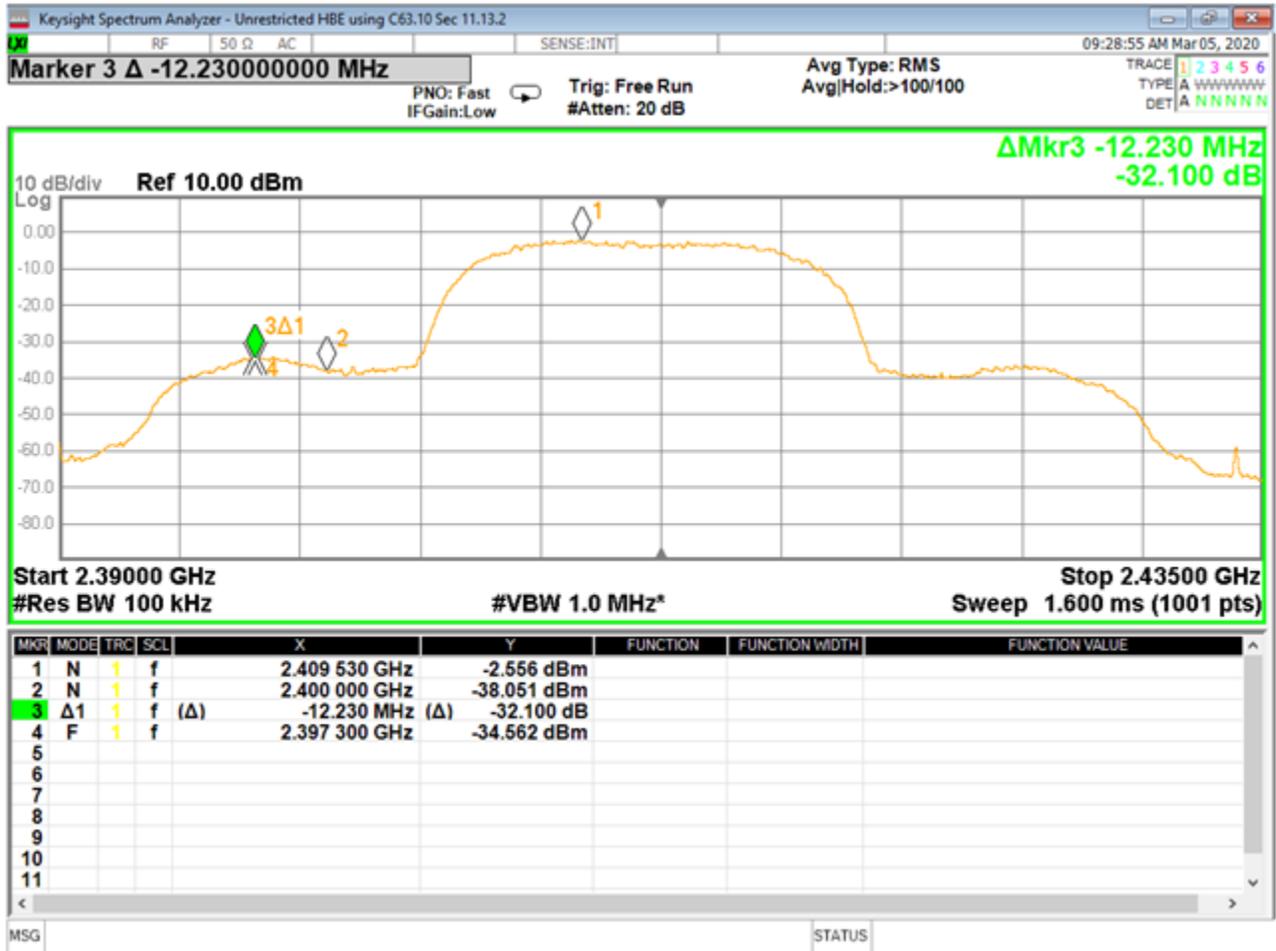


C03561 Average Unrestricted Lower Band Edge WIFI b

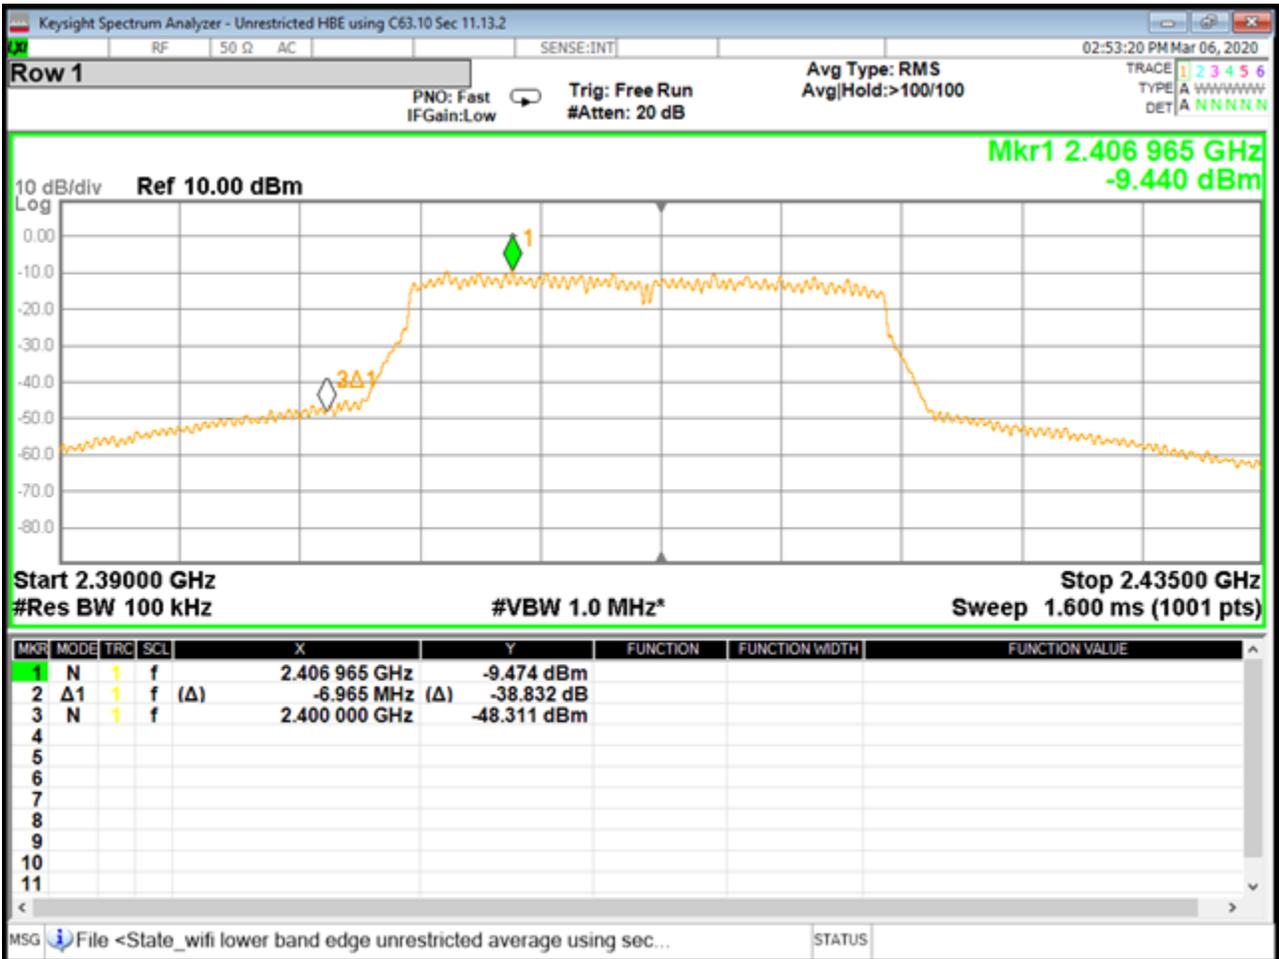

C03561 Average Unrestricted Lower Band Edge WIFI n




Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

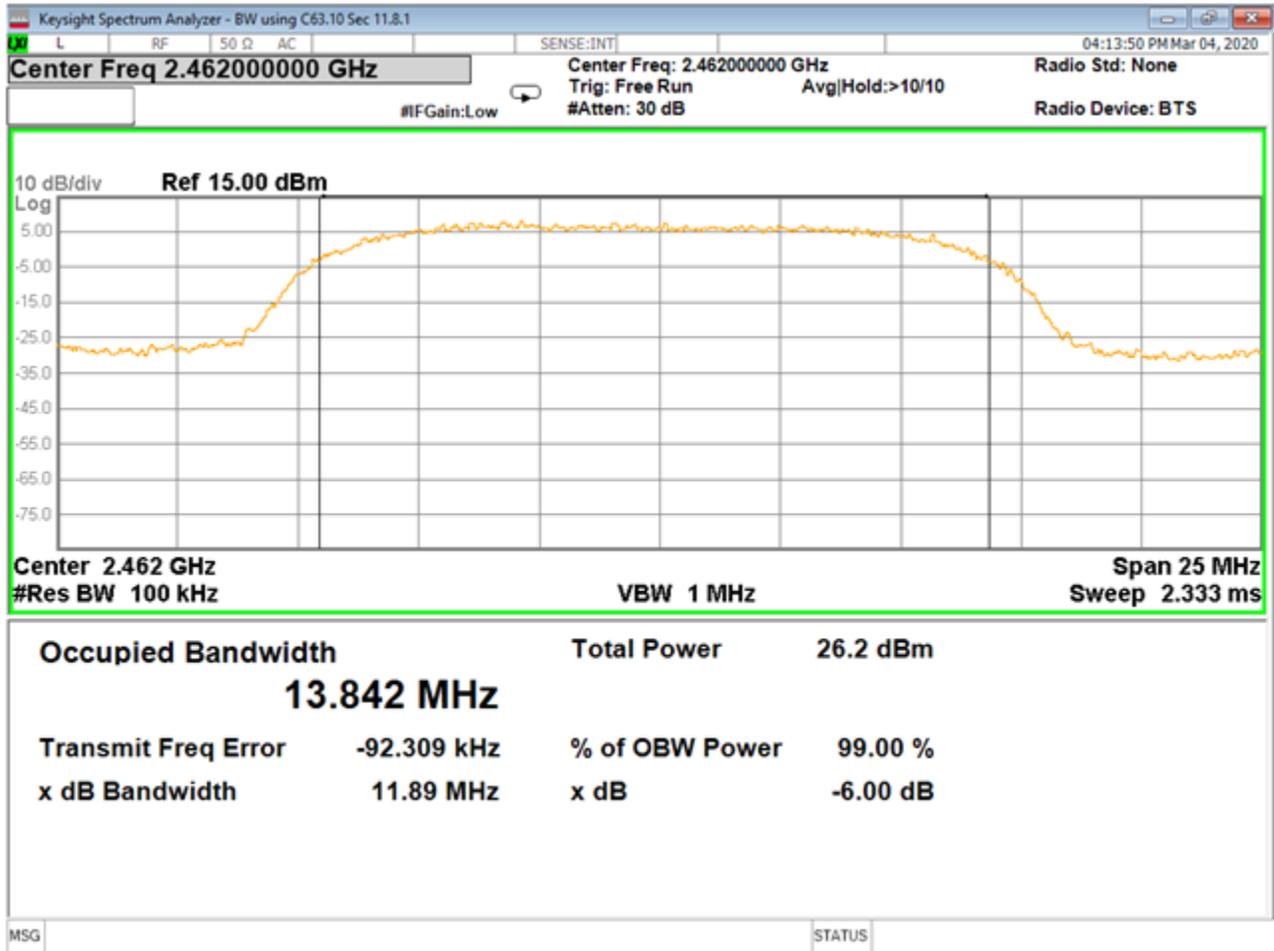

C03561 BW High Ch WIFI b




Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

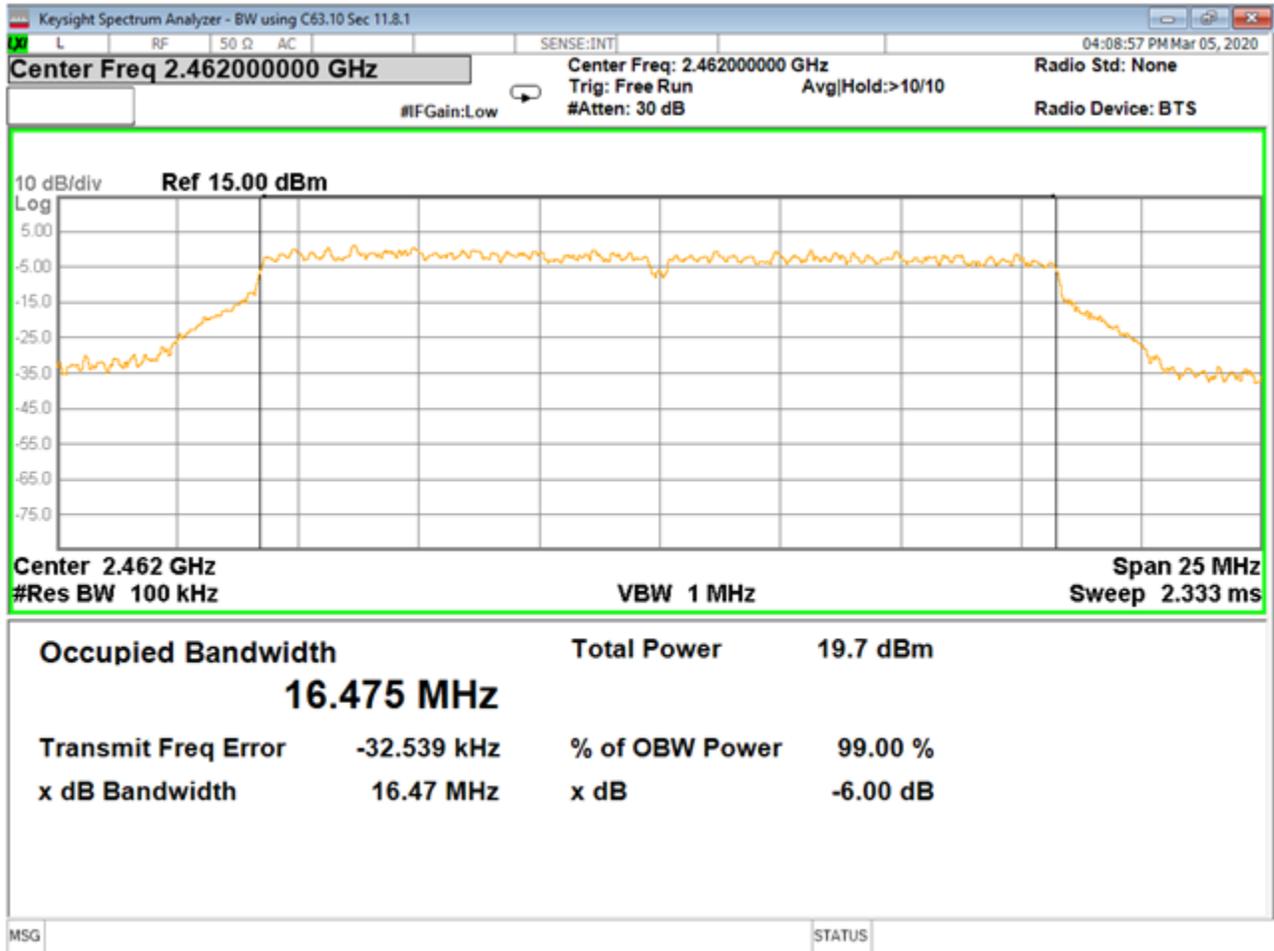

C03561 BW High Ch WIFI g



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

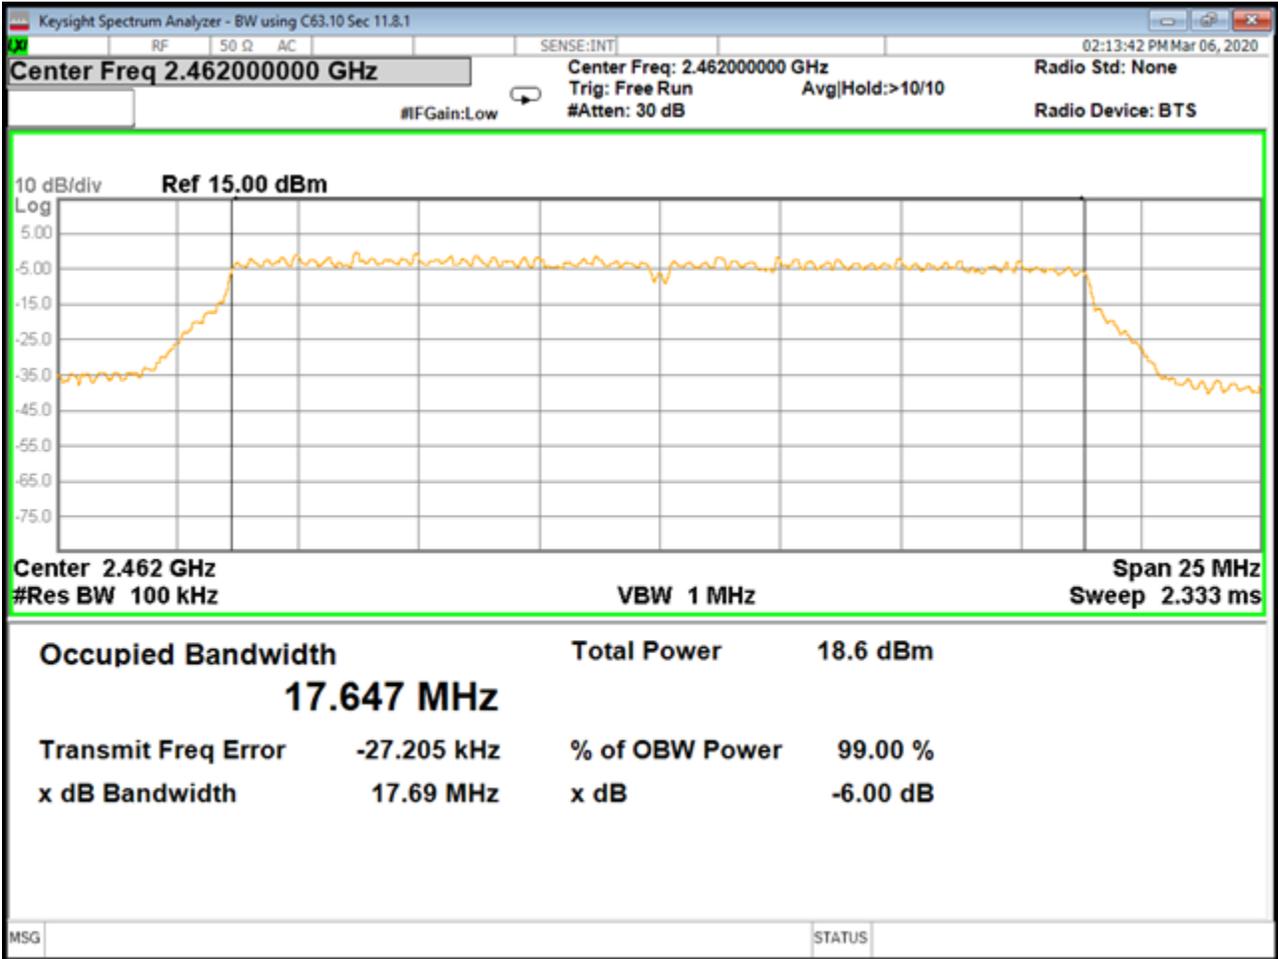

C03561 BW High Ch WIFI n



Report Number:


R20200110-20-E15A

Rev

A

Prepared for:


Garmin International, Inc.

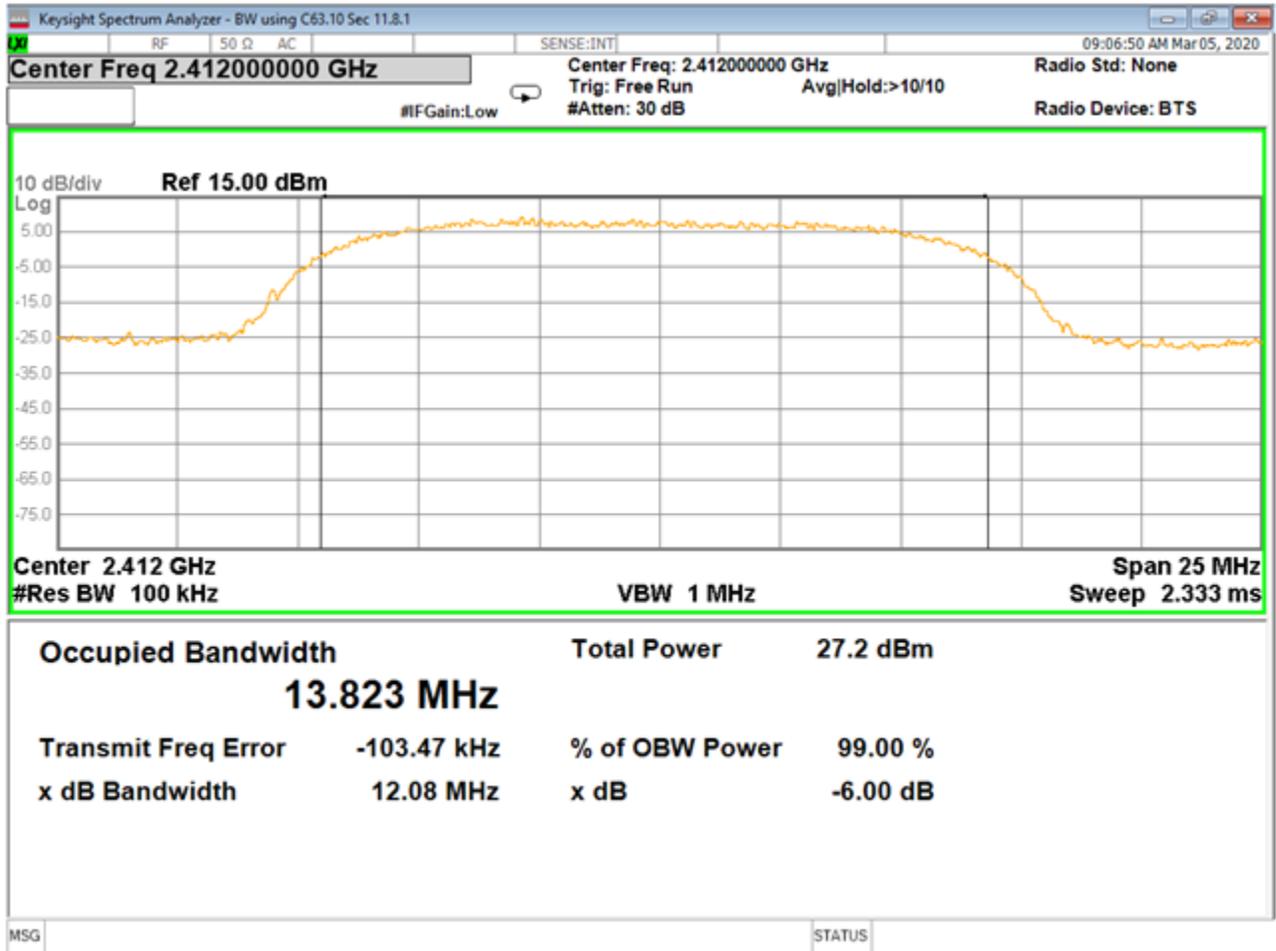

C03561 BW low Ch WIFI b



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

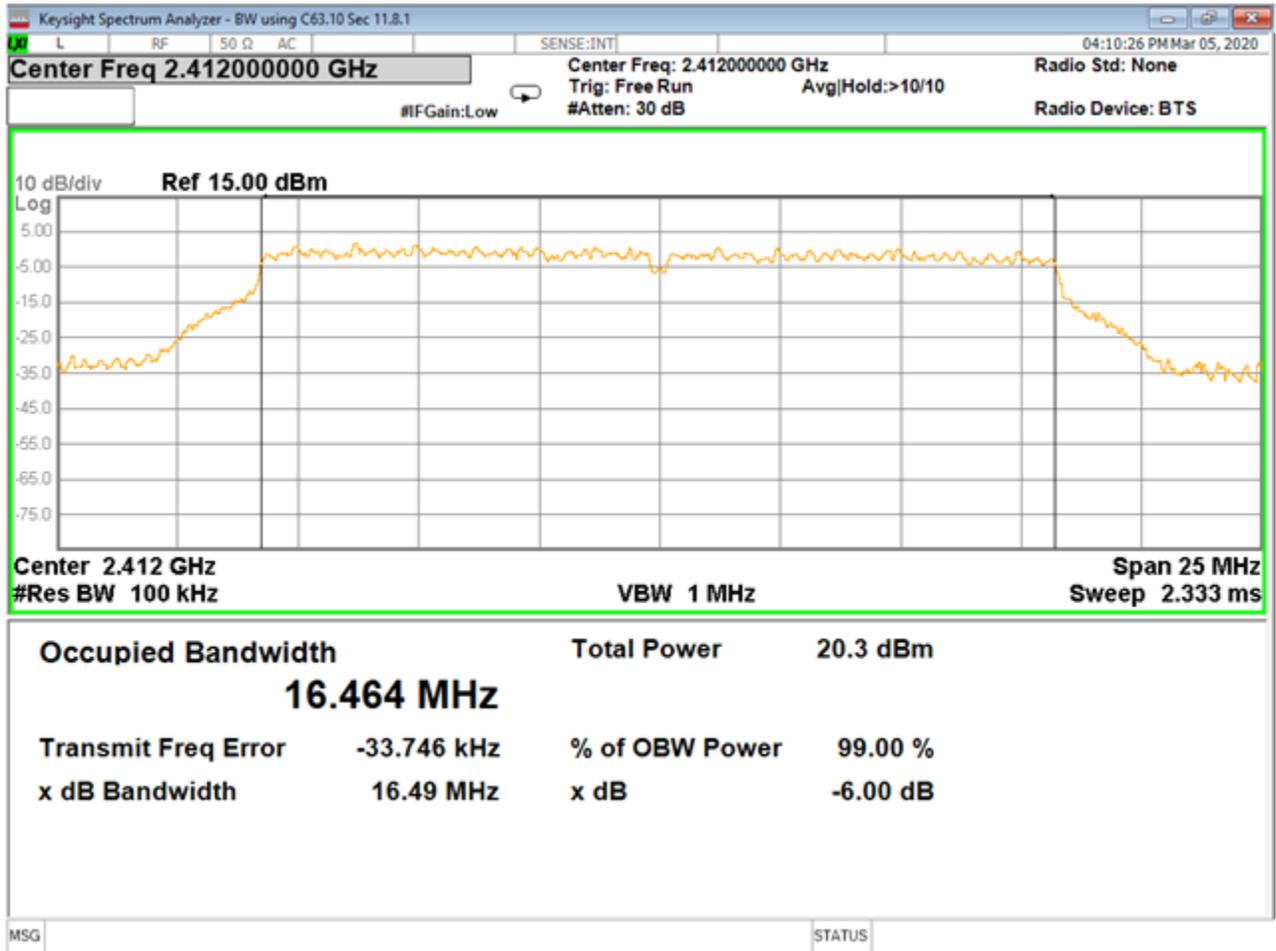

C03561 BW low Ch WIFI g



Report Number:


R20200110-20-E15A

Rev

A

Prepared for:


Garmin International, Inc.

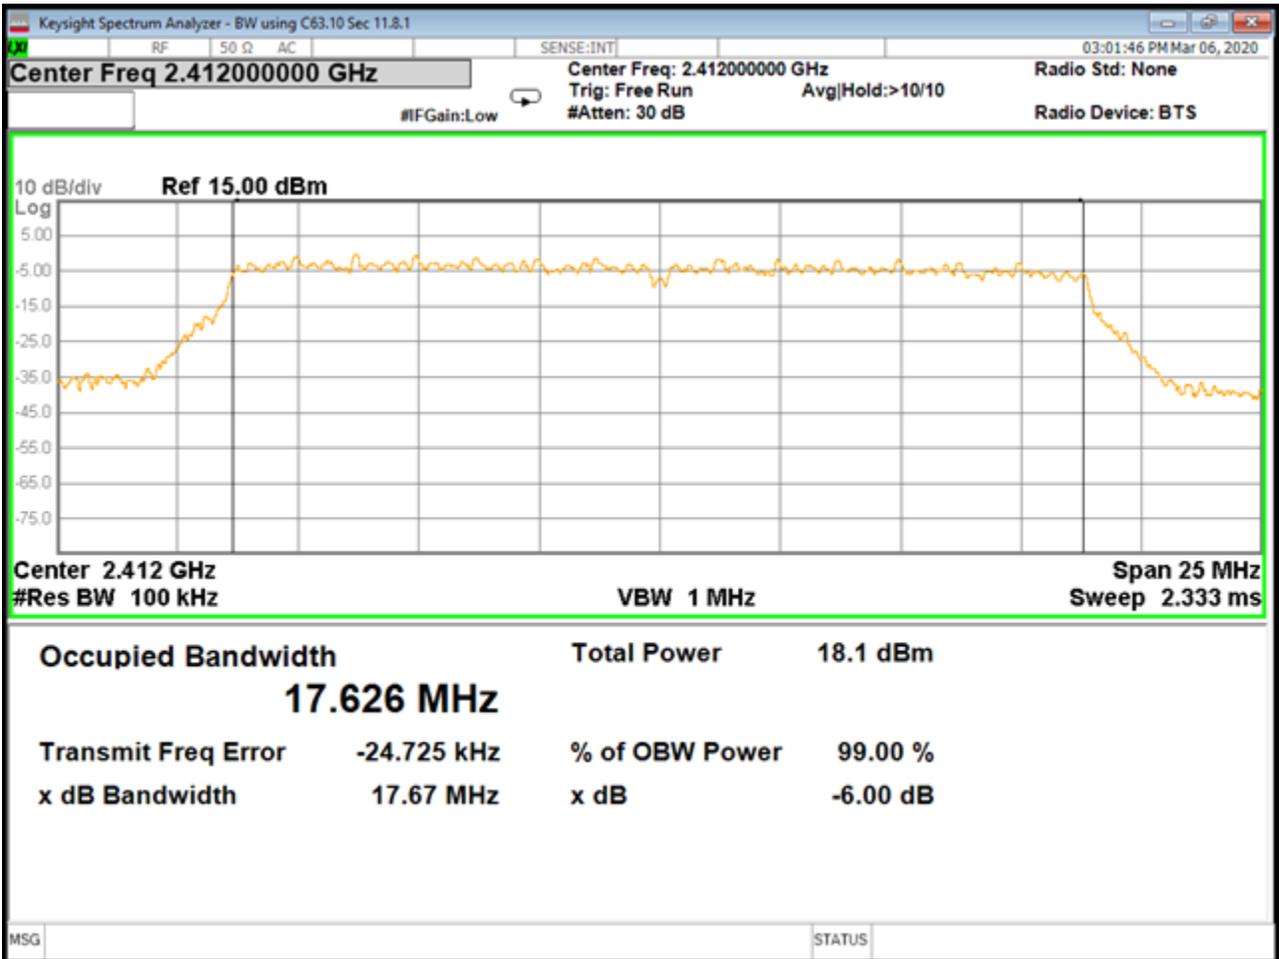

C03561 BW low Ch WIFI n



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

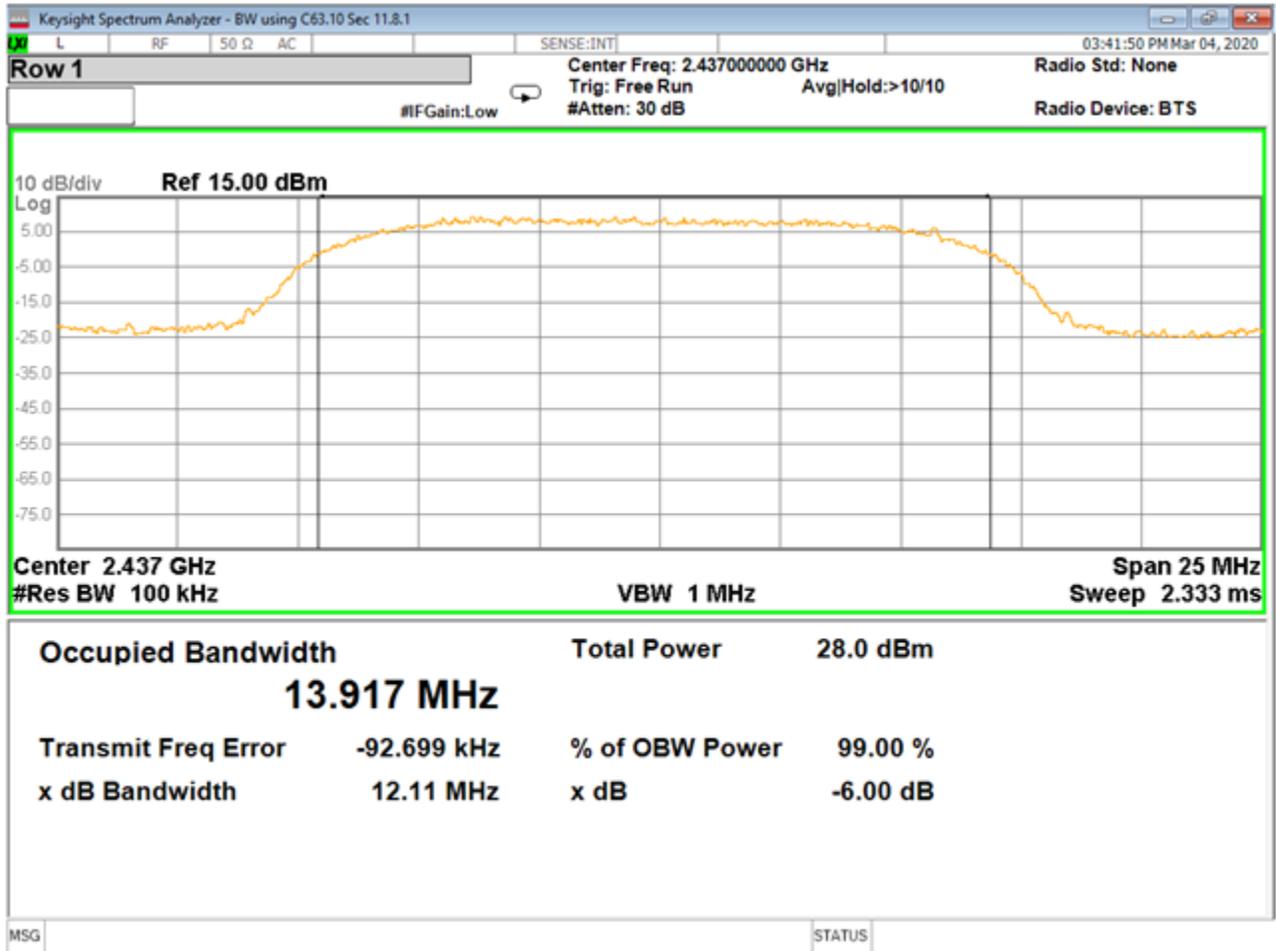

C03561 BW Mid Ch WIFI b



Report Number:


R20200110-20-E15A

Rev

A

Prepared for:


Garmin International, Inc.

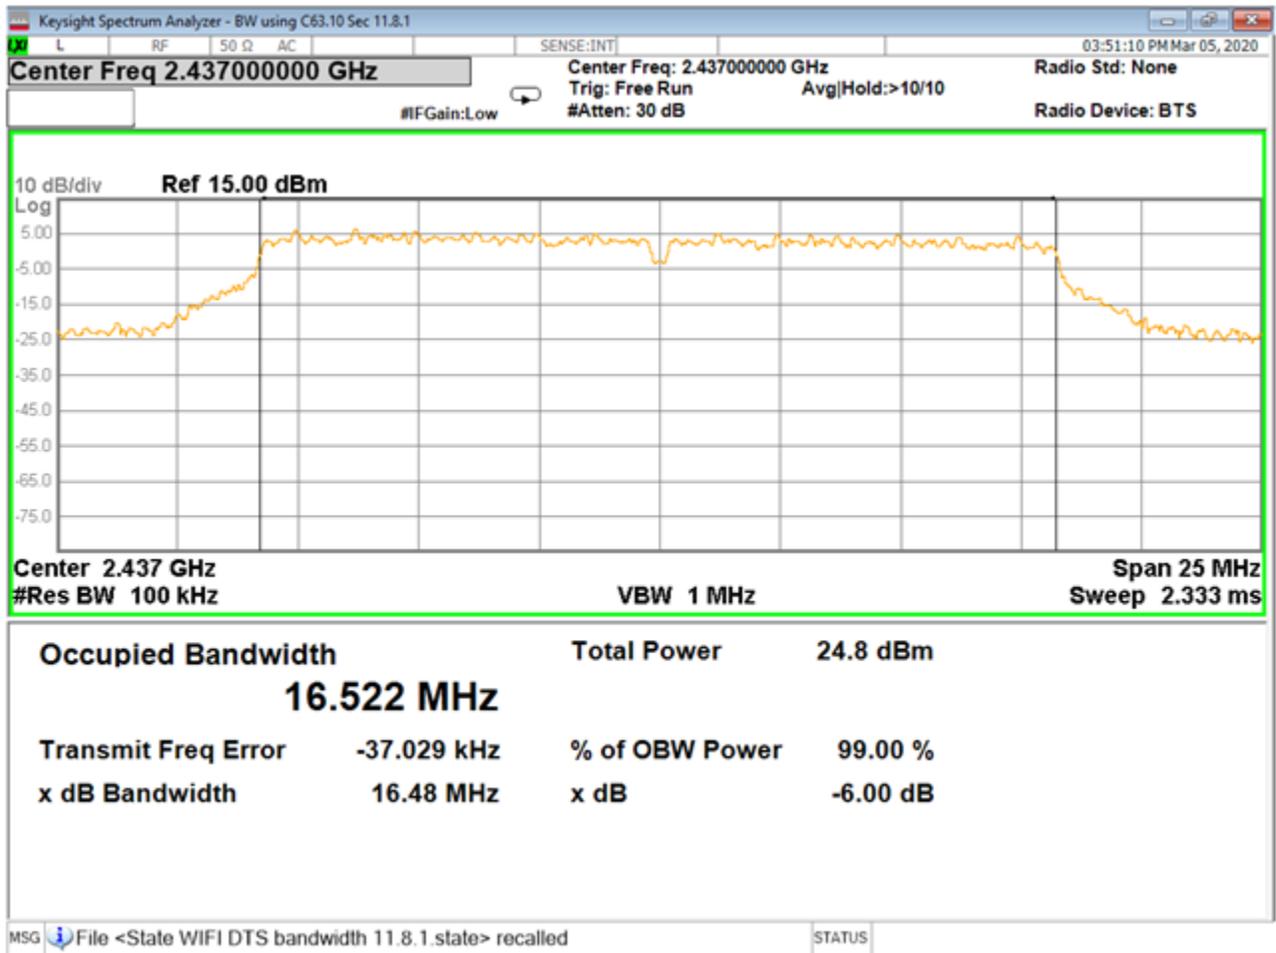


C03561 BW Mid Ch WIFI g



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

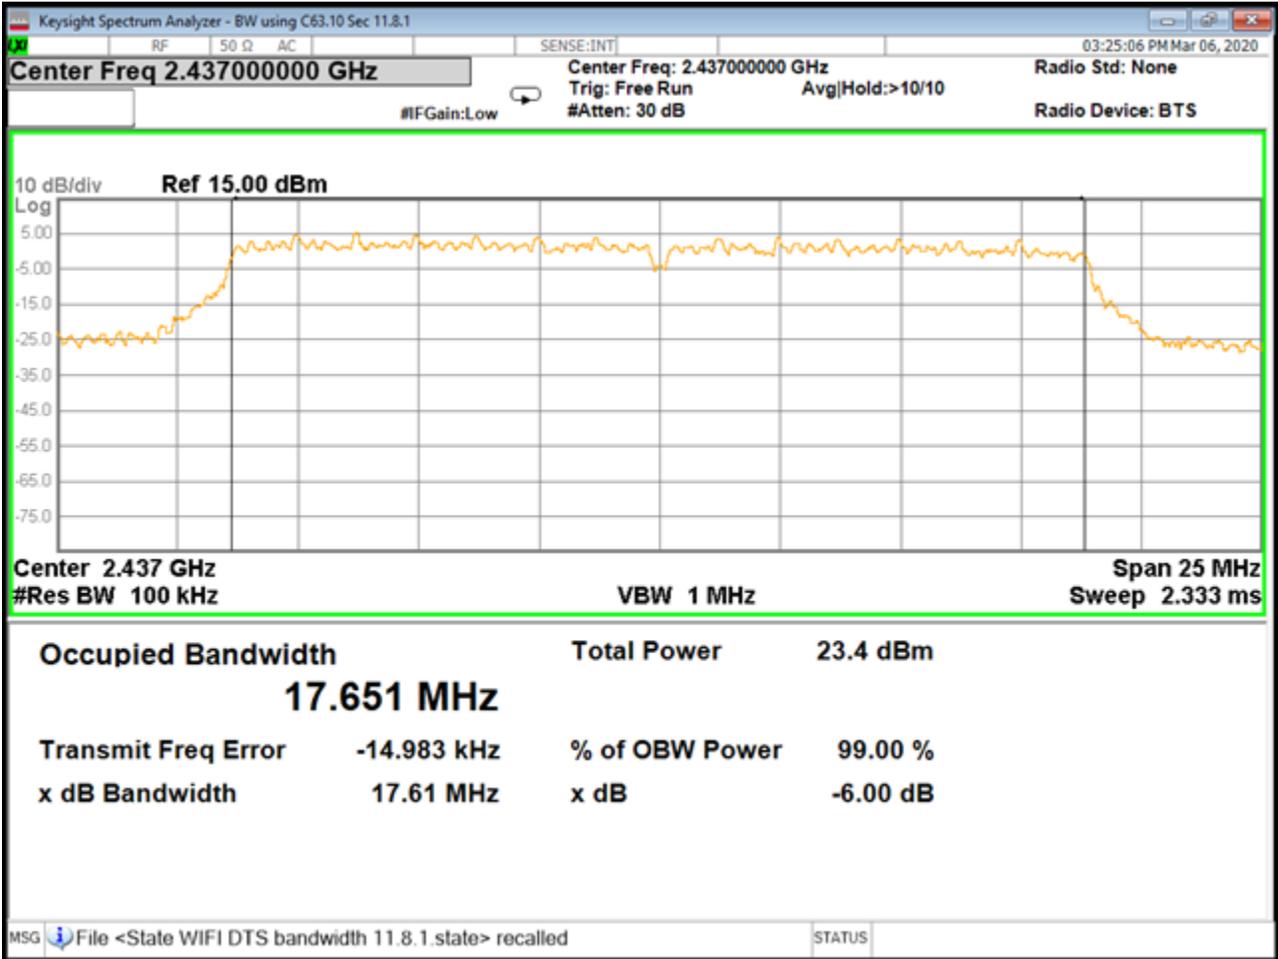

C03561 BW Mid Ch WIFI n

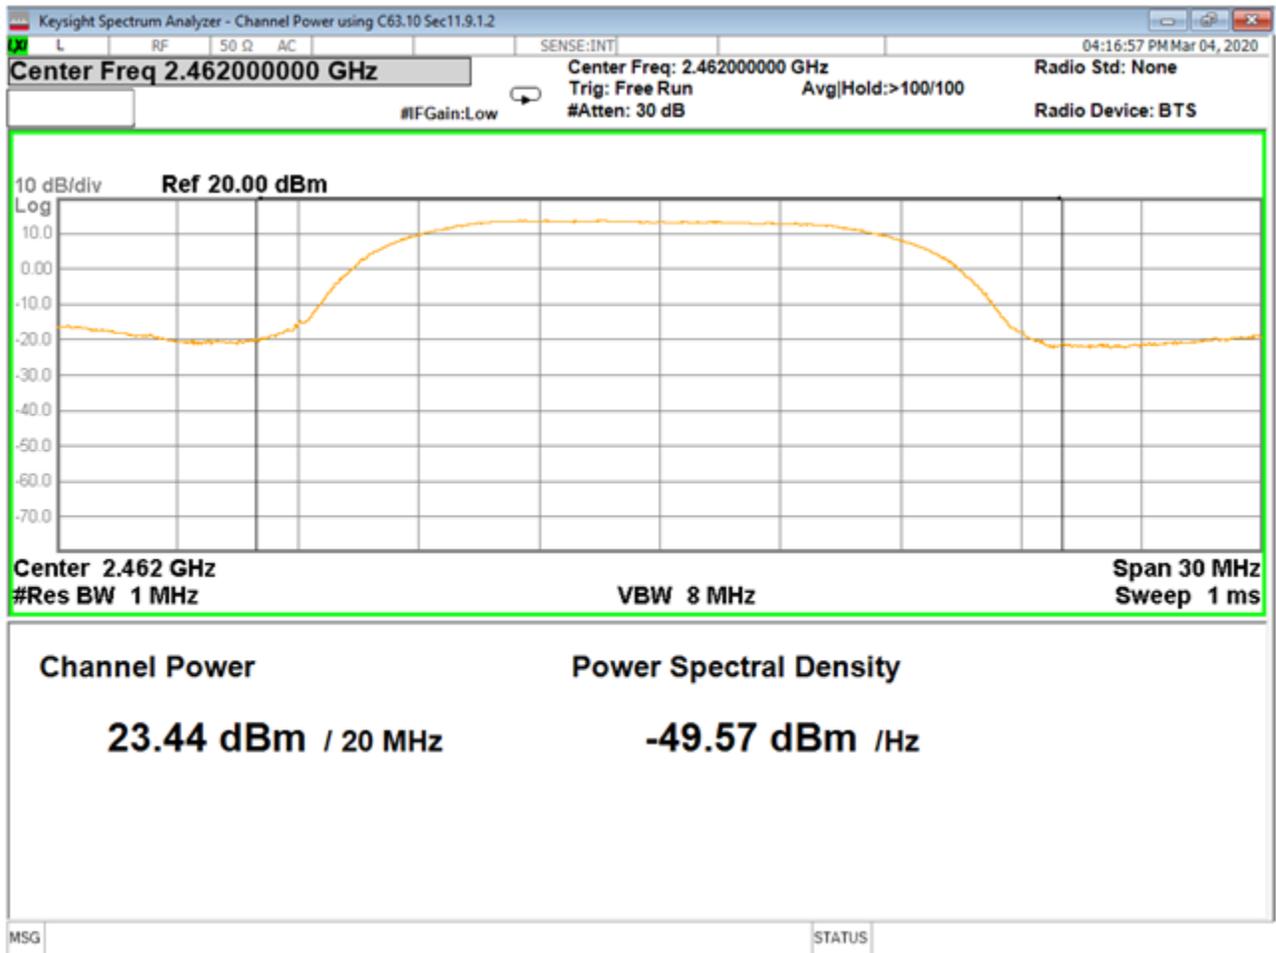

C03561 Peak Power High Ch WIFI b



Report Number:


R20200110-20-E15A

Rev


A

Prepared for:

Garmin International, Inc.

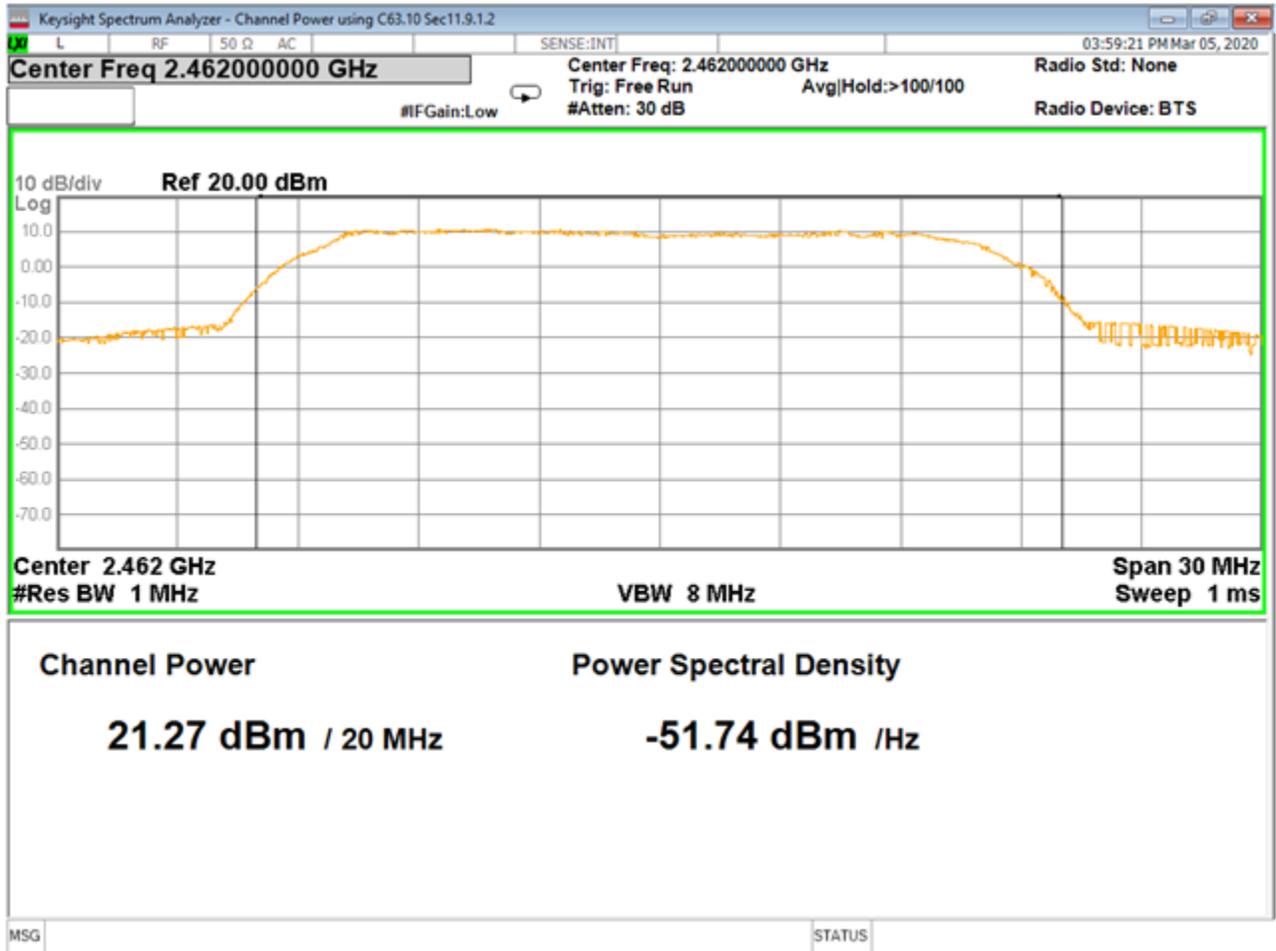

C03561 Peak Power High Ch WIFI g

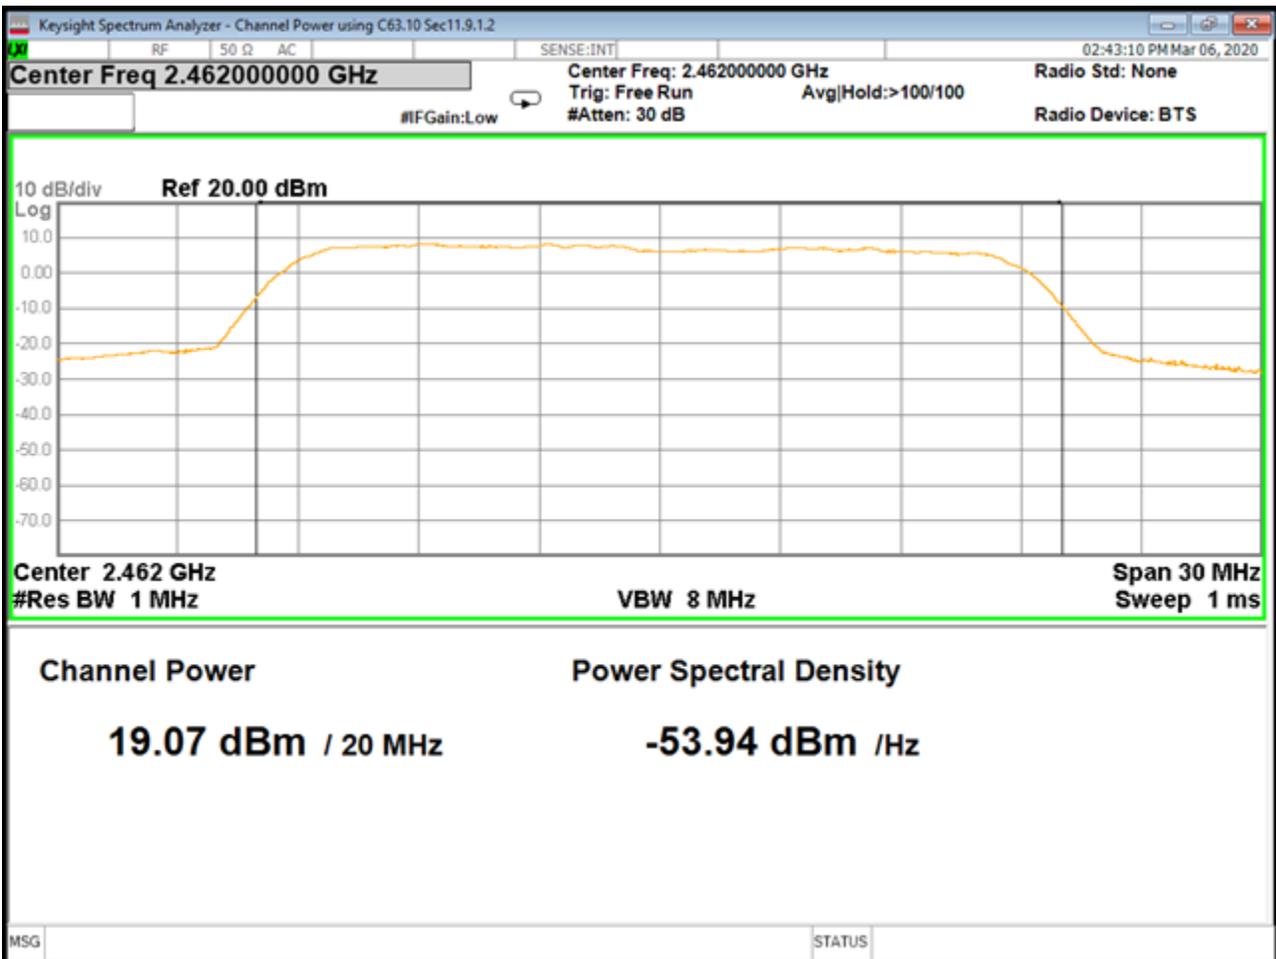

C03561 Peak Power High Ch WIFI n



Report Number:


R20200110-20-E15A

Rev


A

Prepared for:


Garmin International, Inc.

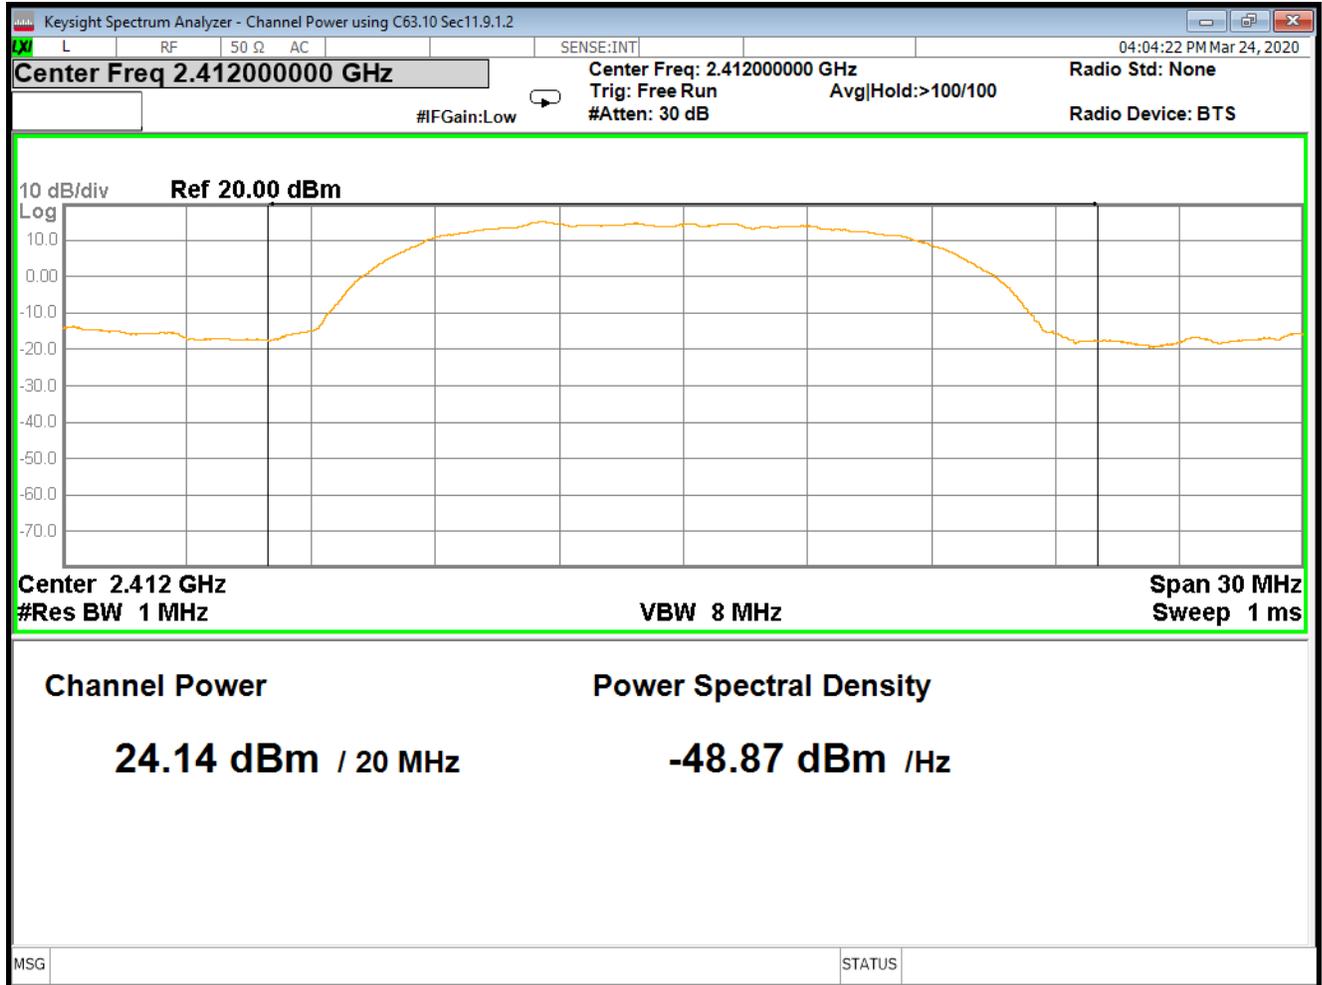

C03561 Peak Power Low Ch WIFI b

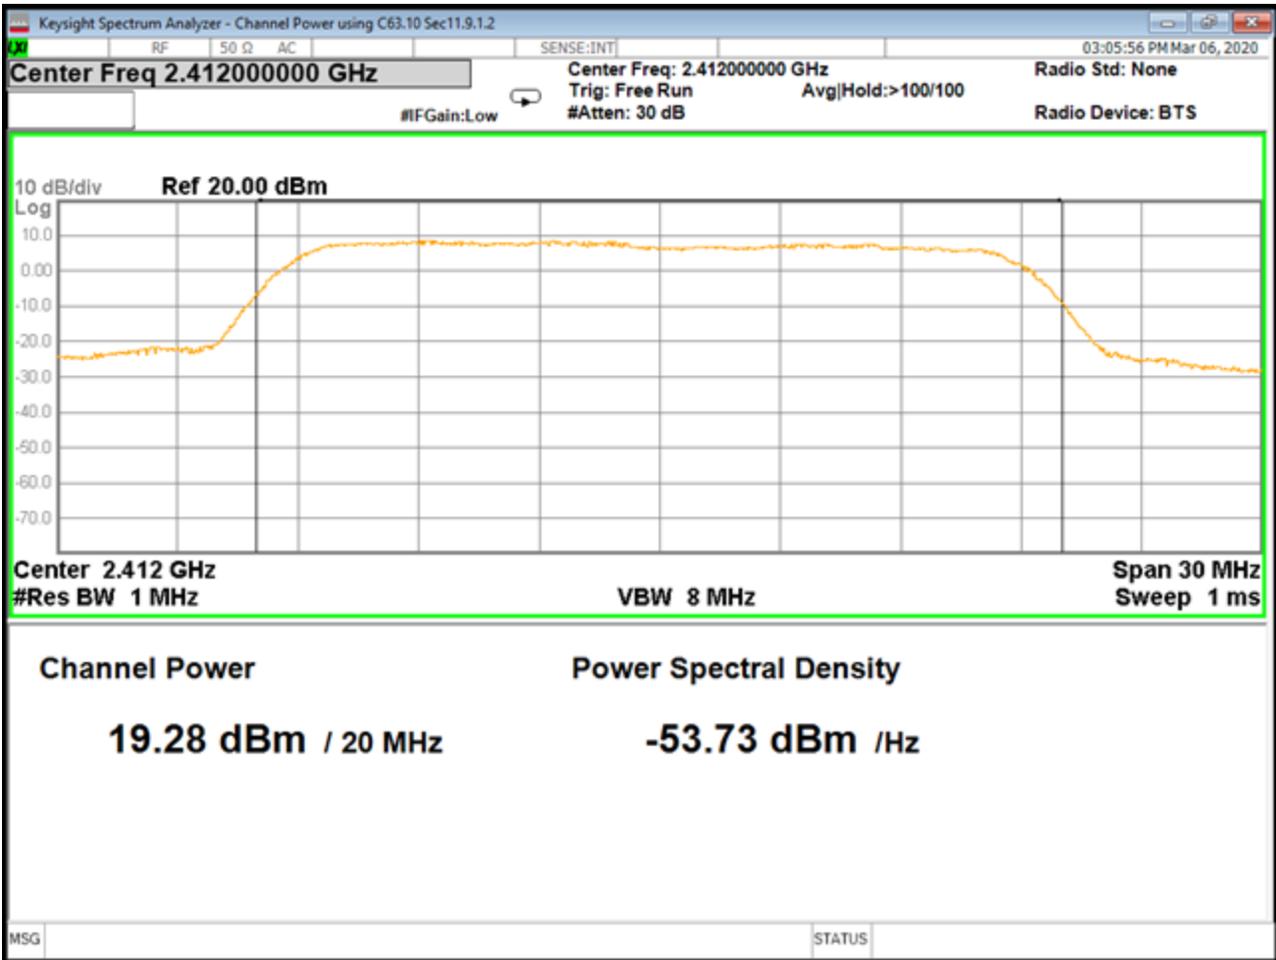

C03561 Peak Power Low Ch WIFI n

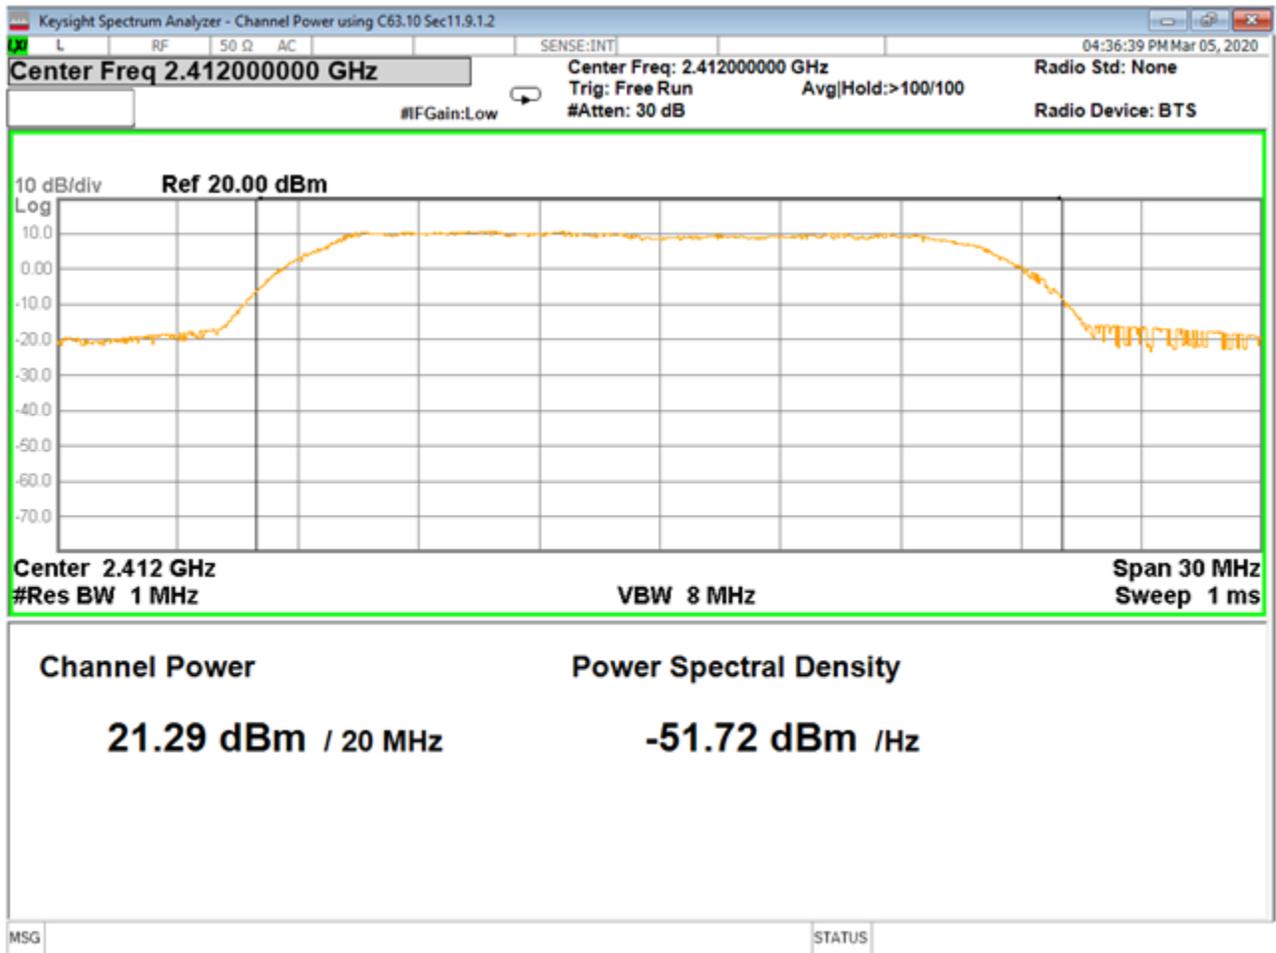

C03561 Peak Power Low ChWIFI g



Report Number:


R20200110-20-E15A

Rev

A

Prepared for:

Garmin International, Inc.

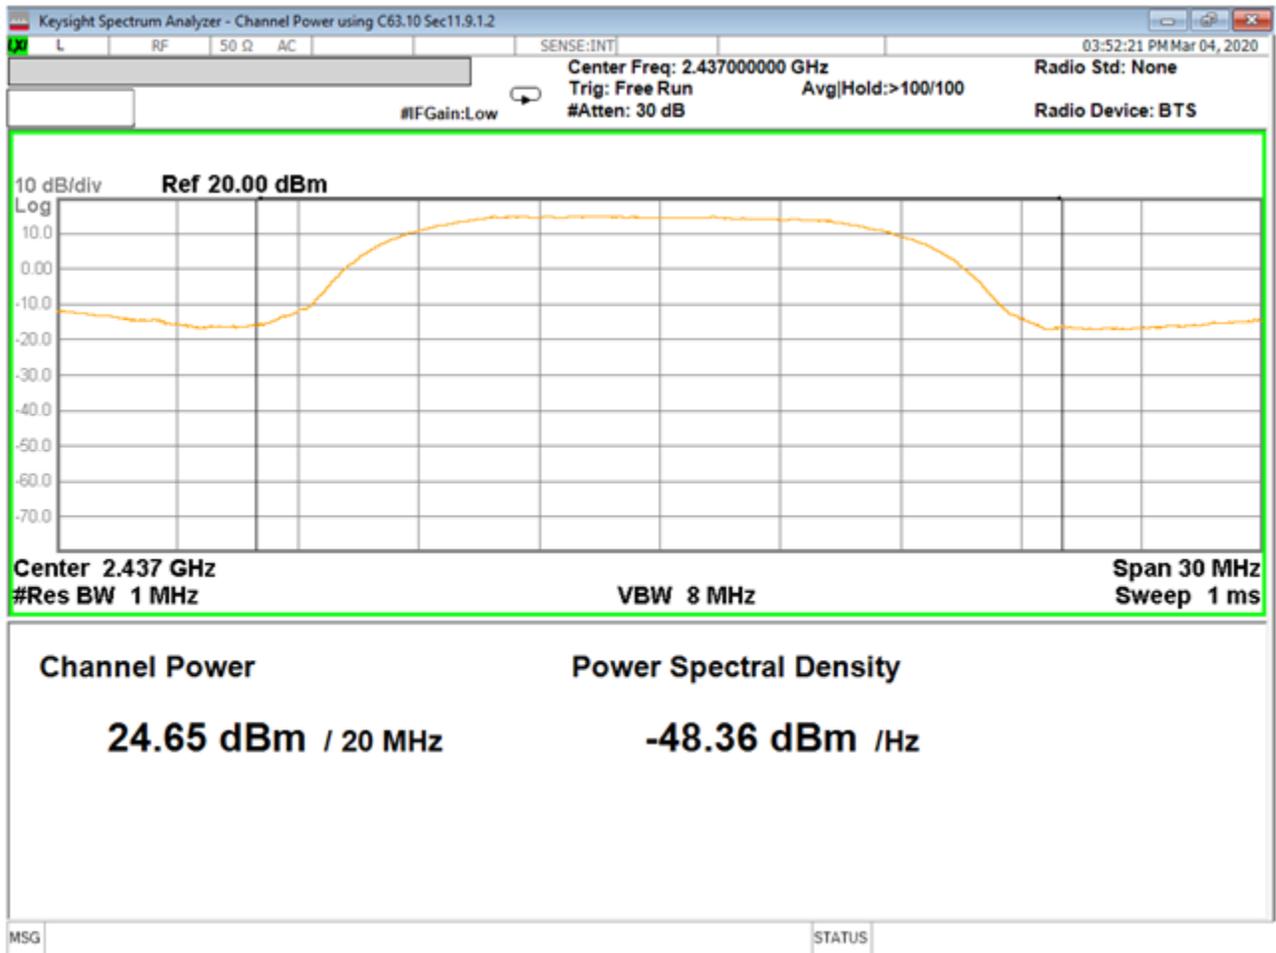

C03561 Peak Power Mid Ch WIFI b



Report Number:


R20200110-20-E15A

Rev


A

Prepared for:


Garmin International, Inc.

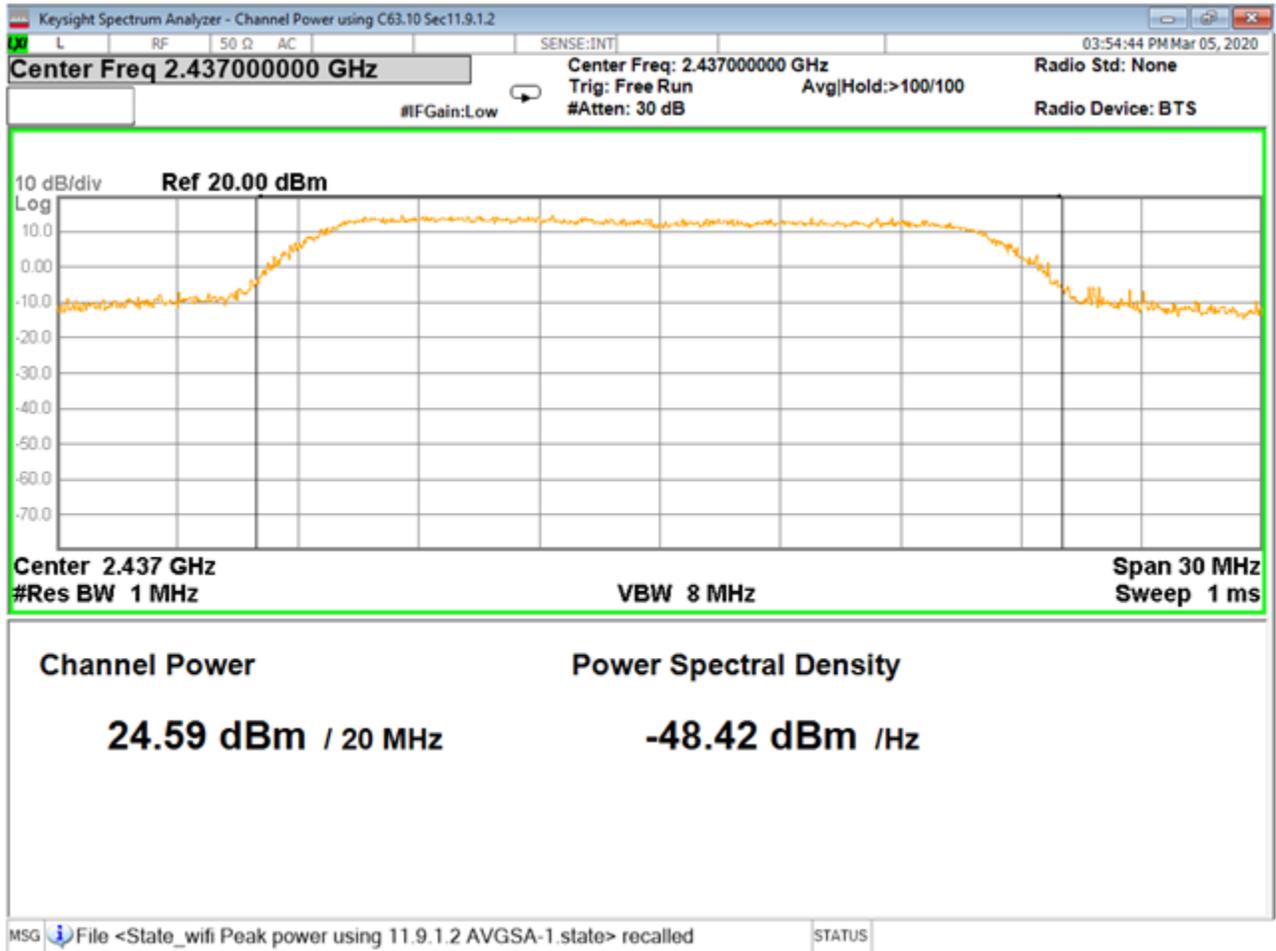


C03561 Peak Power Mid Ch WIFI g

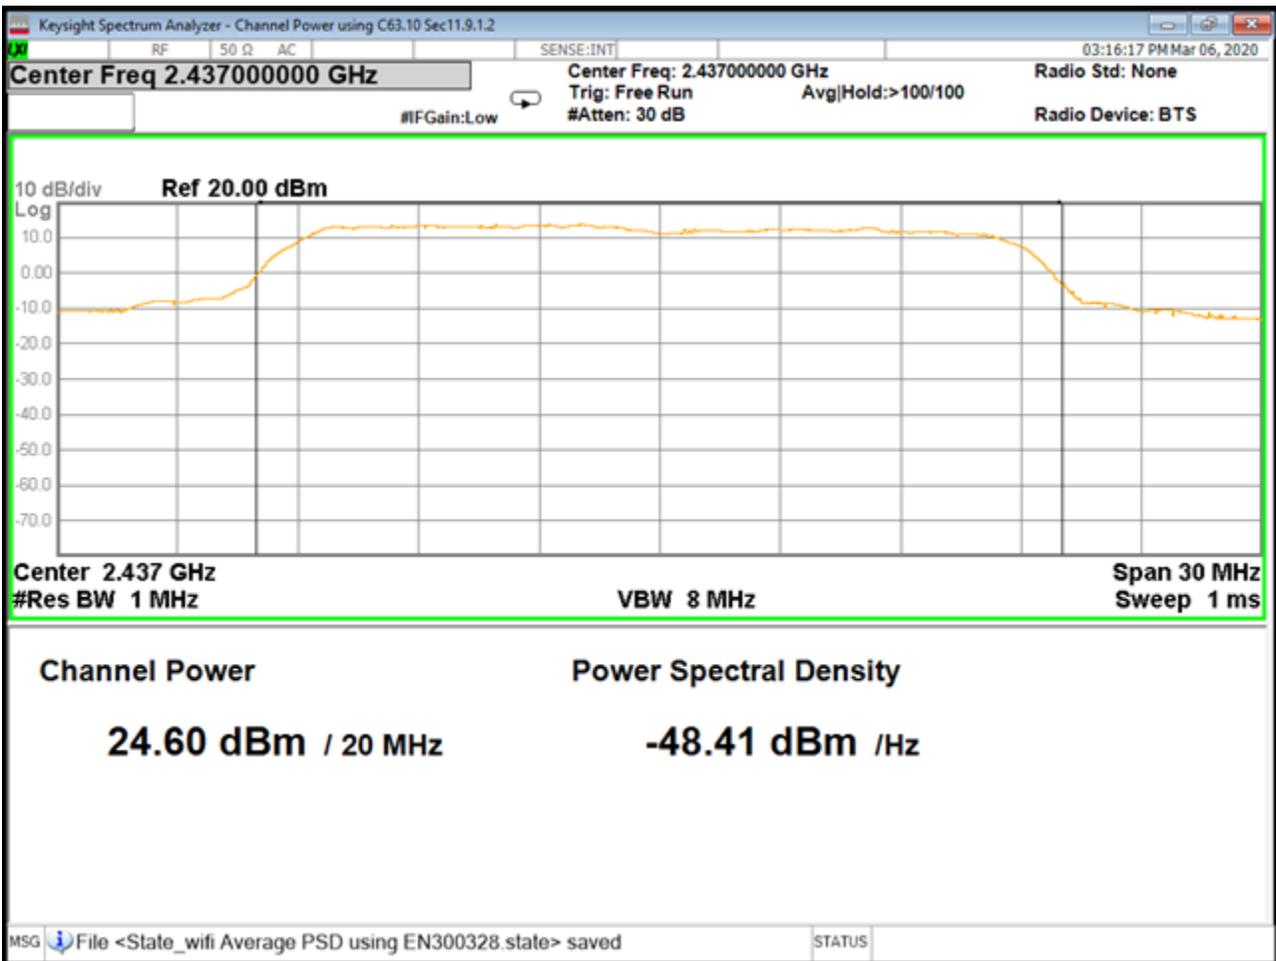


C03561 Peak Power mid Ch WIFI n

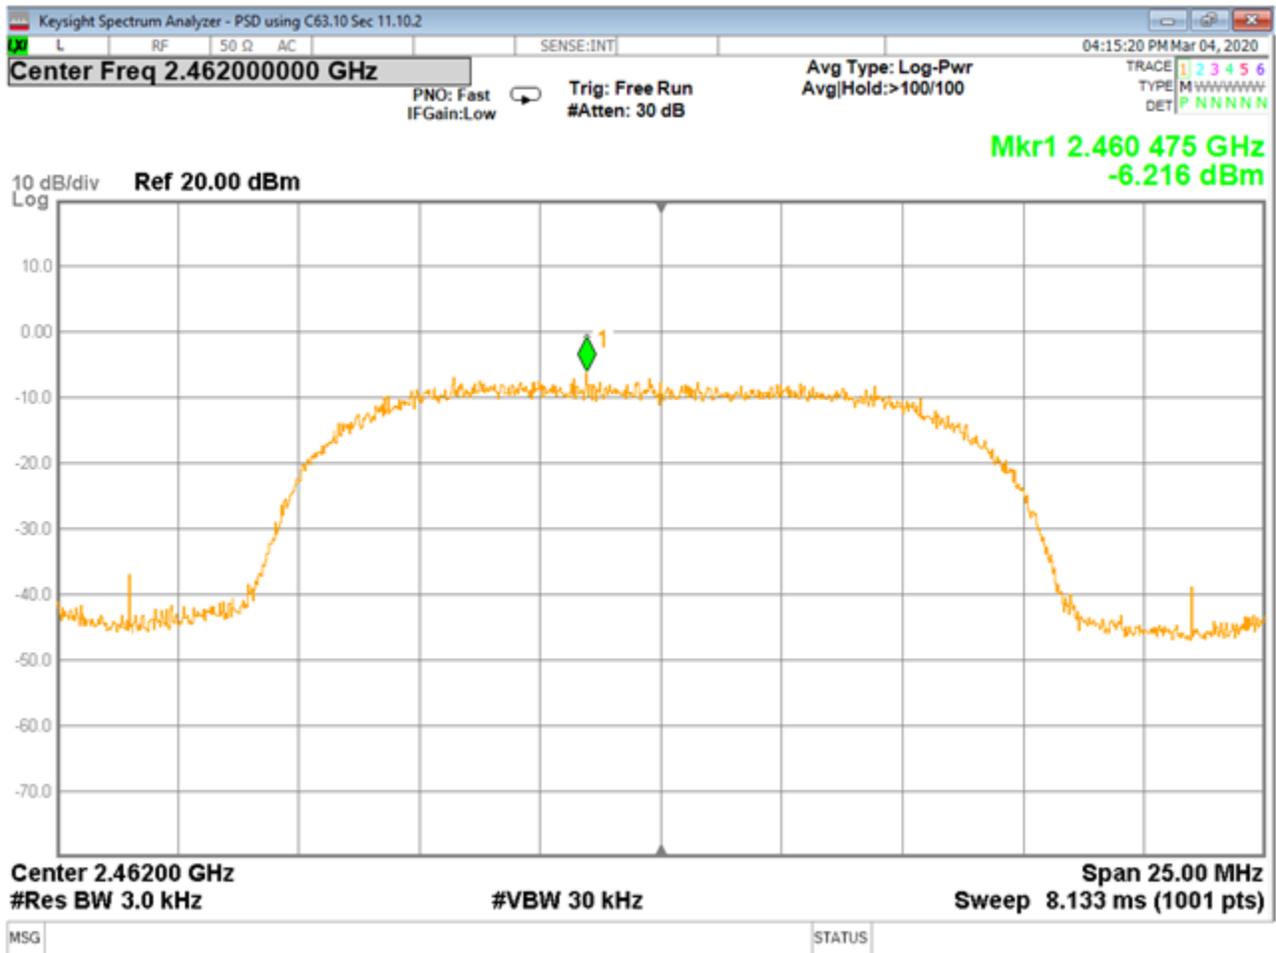


C03561 Peak PSD High Ch WIFI b

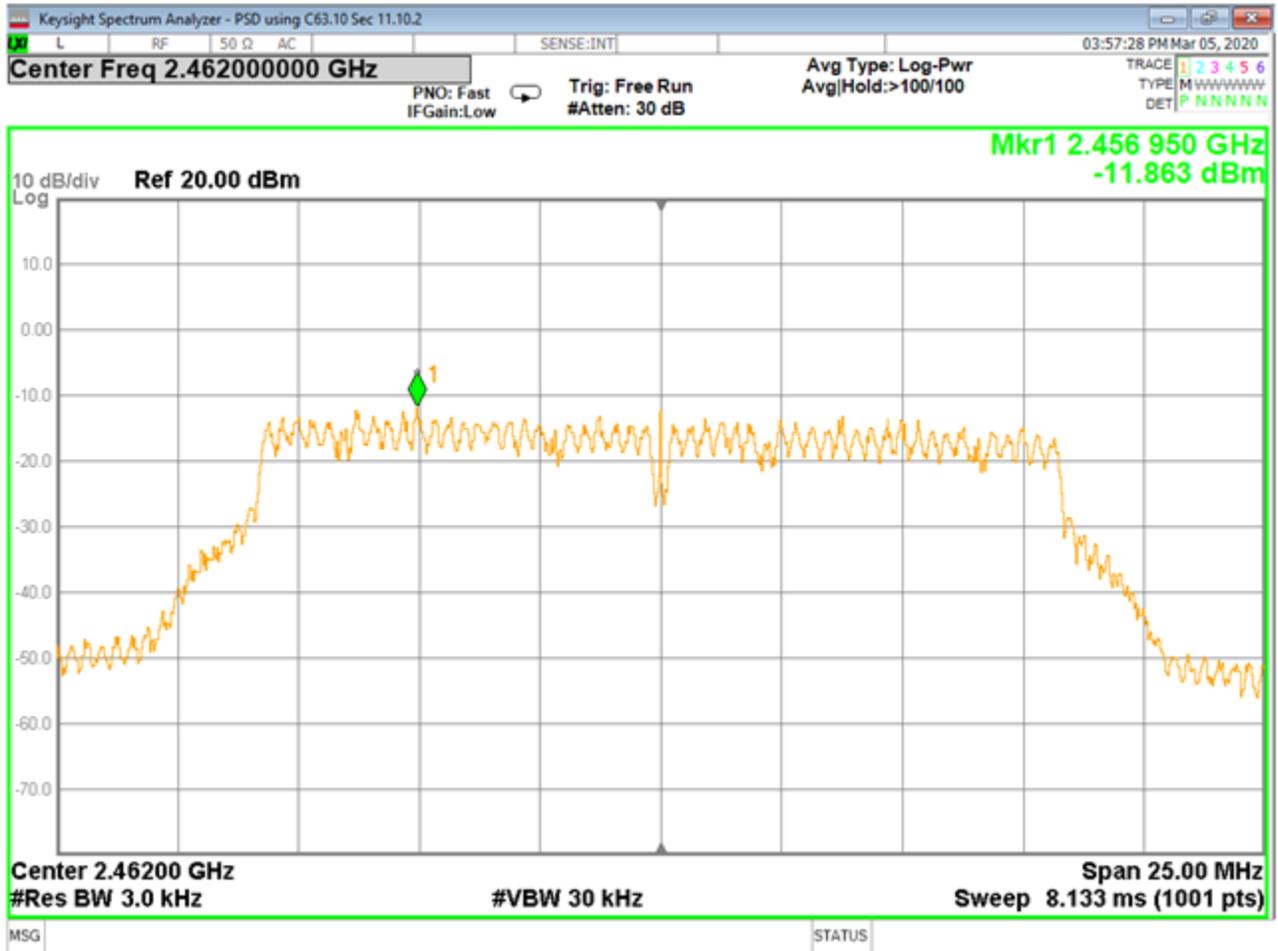


C03561 Peak PSD High Ch WIFI g

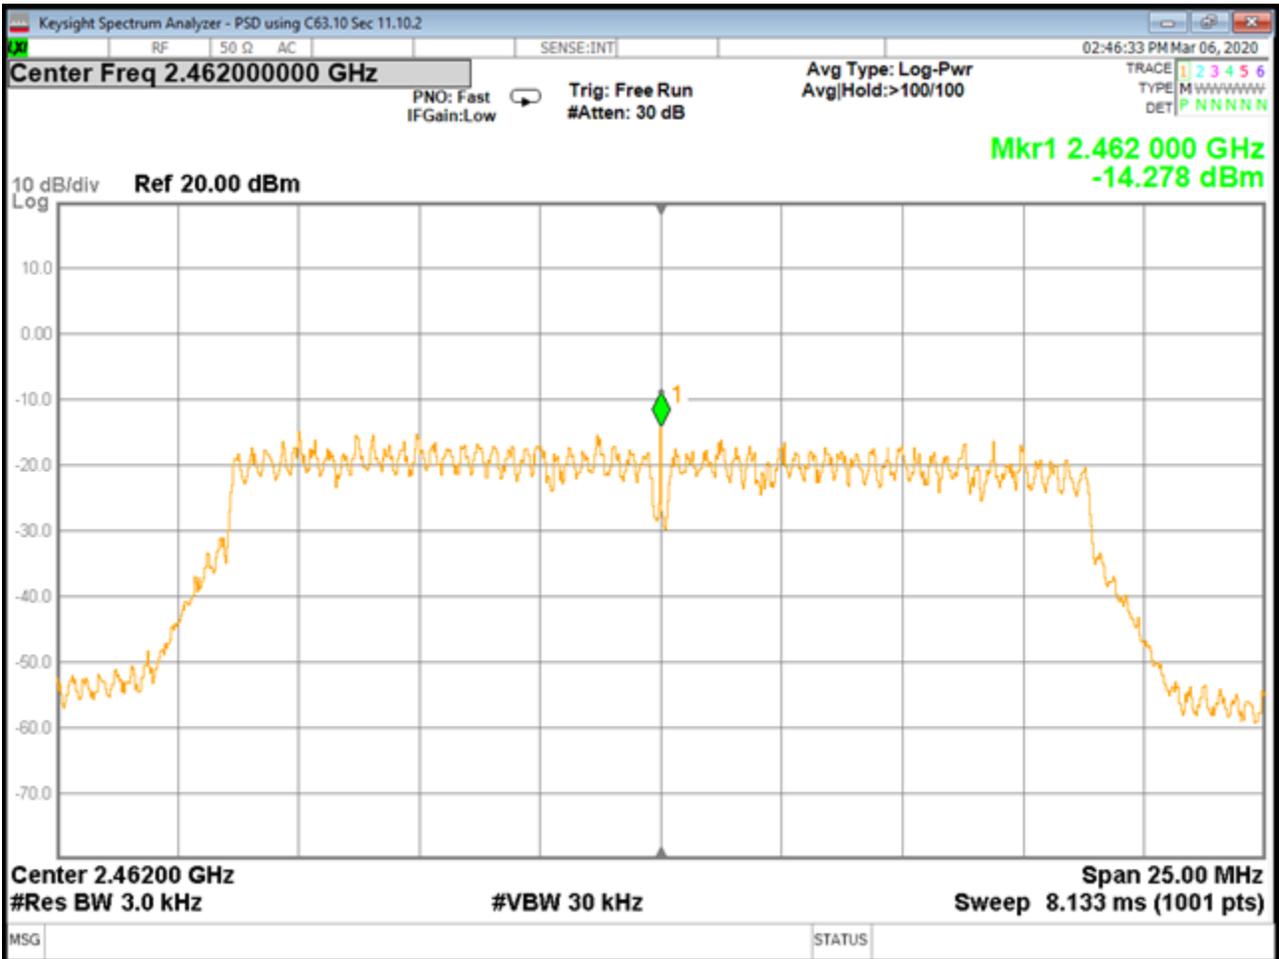

C03561 Peak PSD High Ch WIFI n

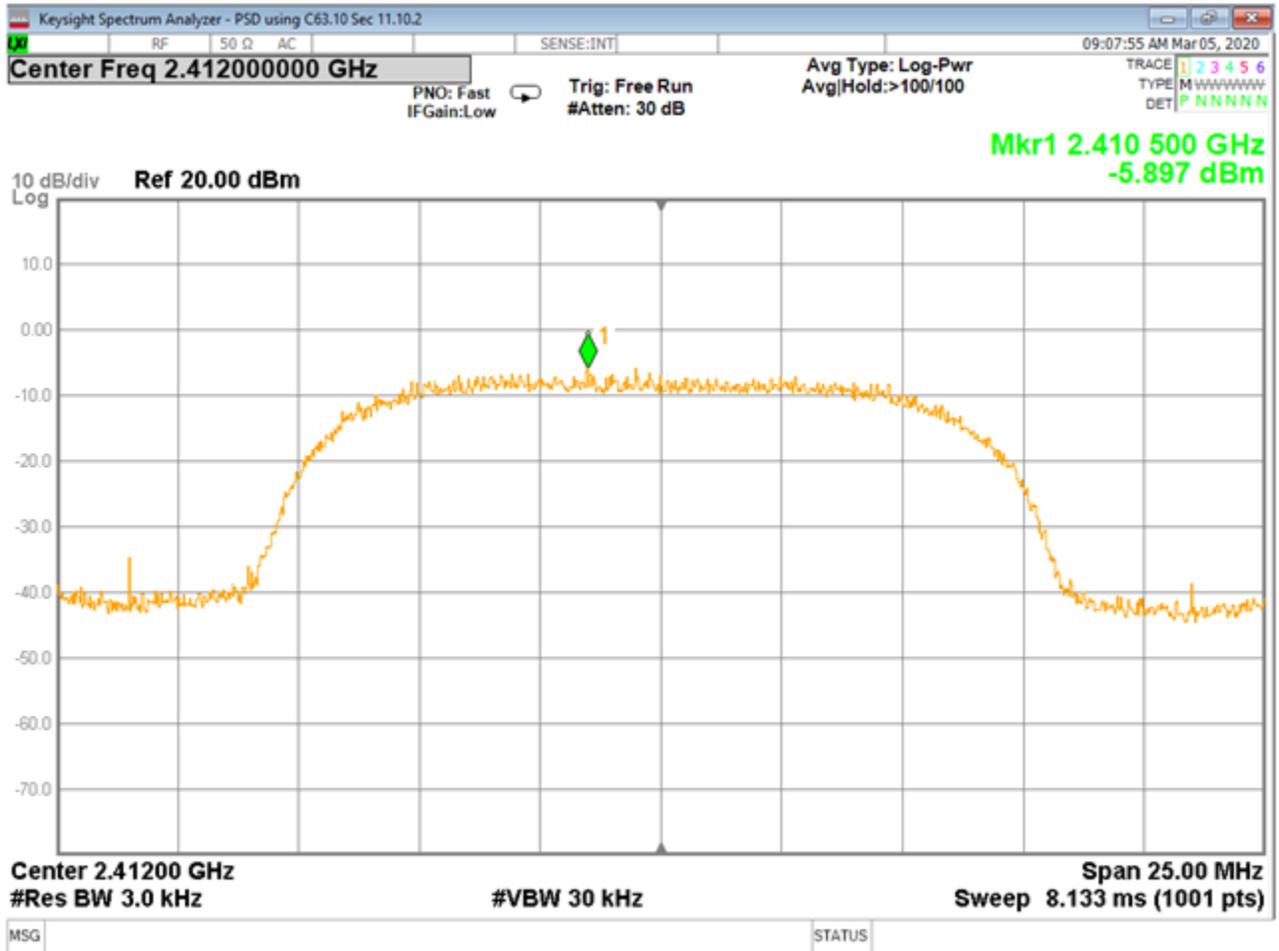


C03561 Peak PSD Low Ch WIFI b

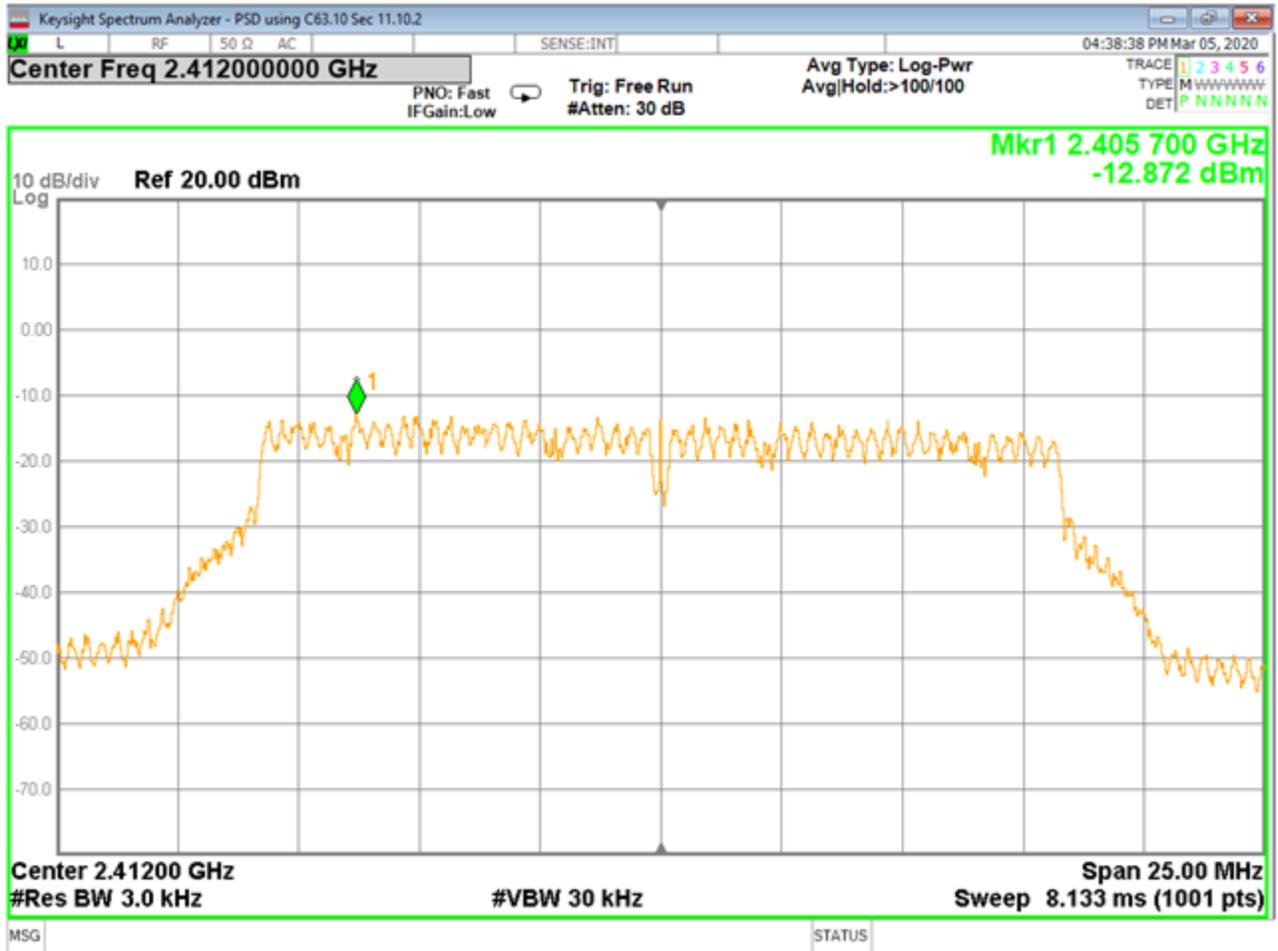


C03561 Peak PSD Low ChWIFI g




Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

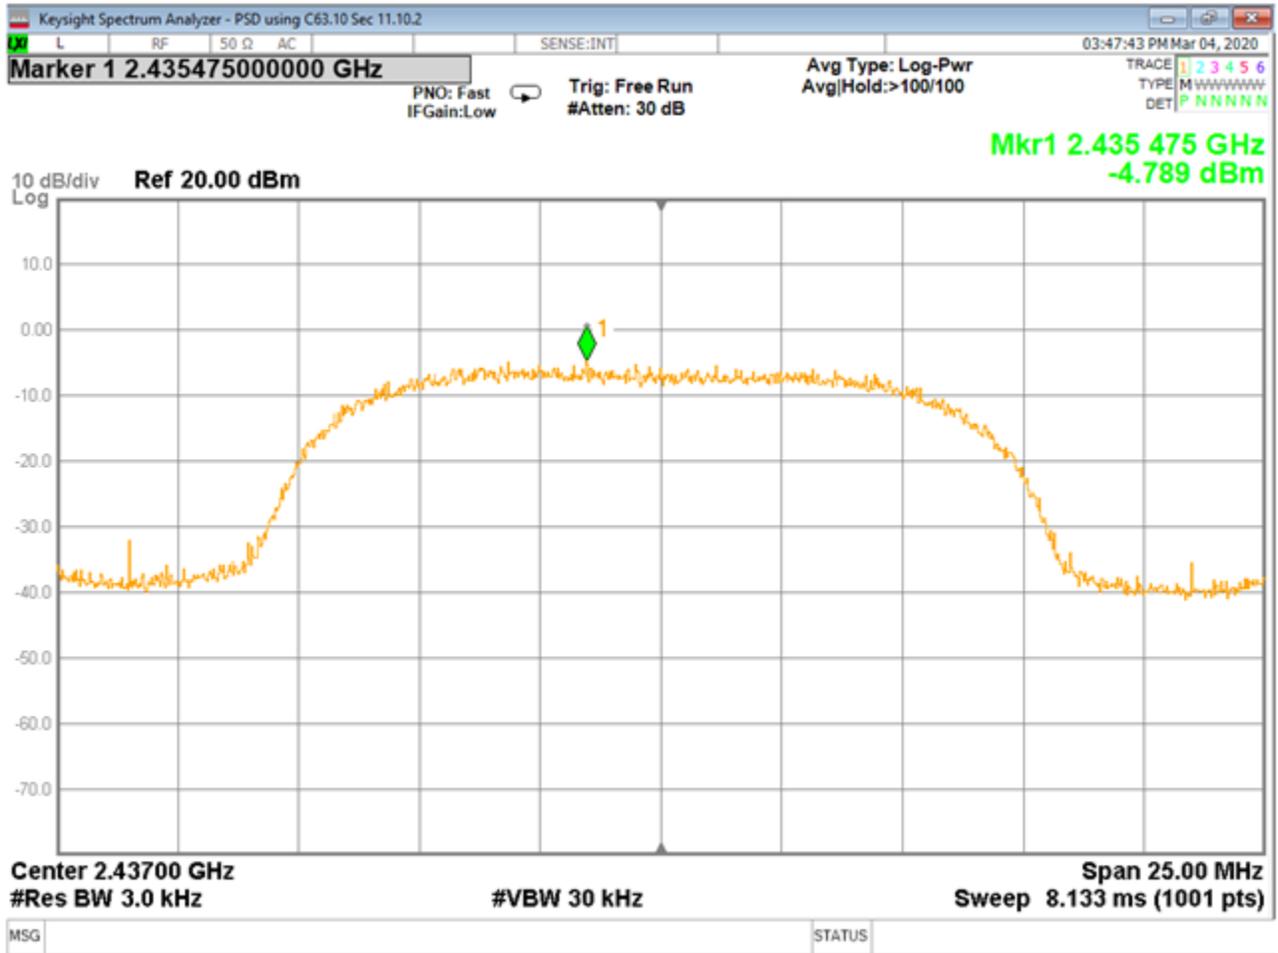


C03561 Peak PSD Mid Ch WIFI b

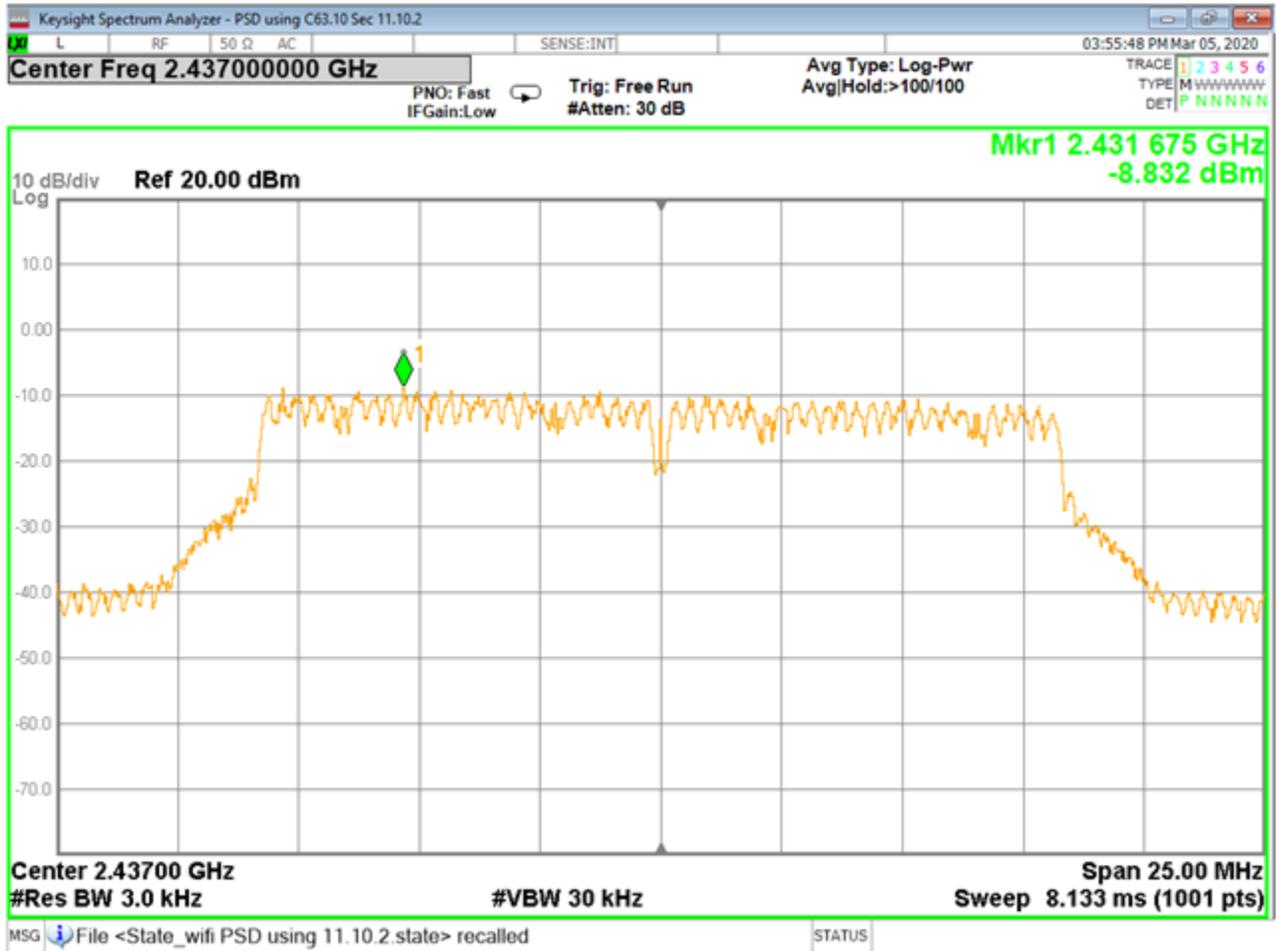


C03561 Peak PSD Mid Ch WIFI g

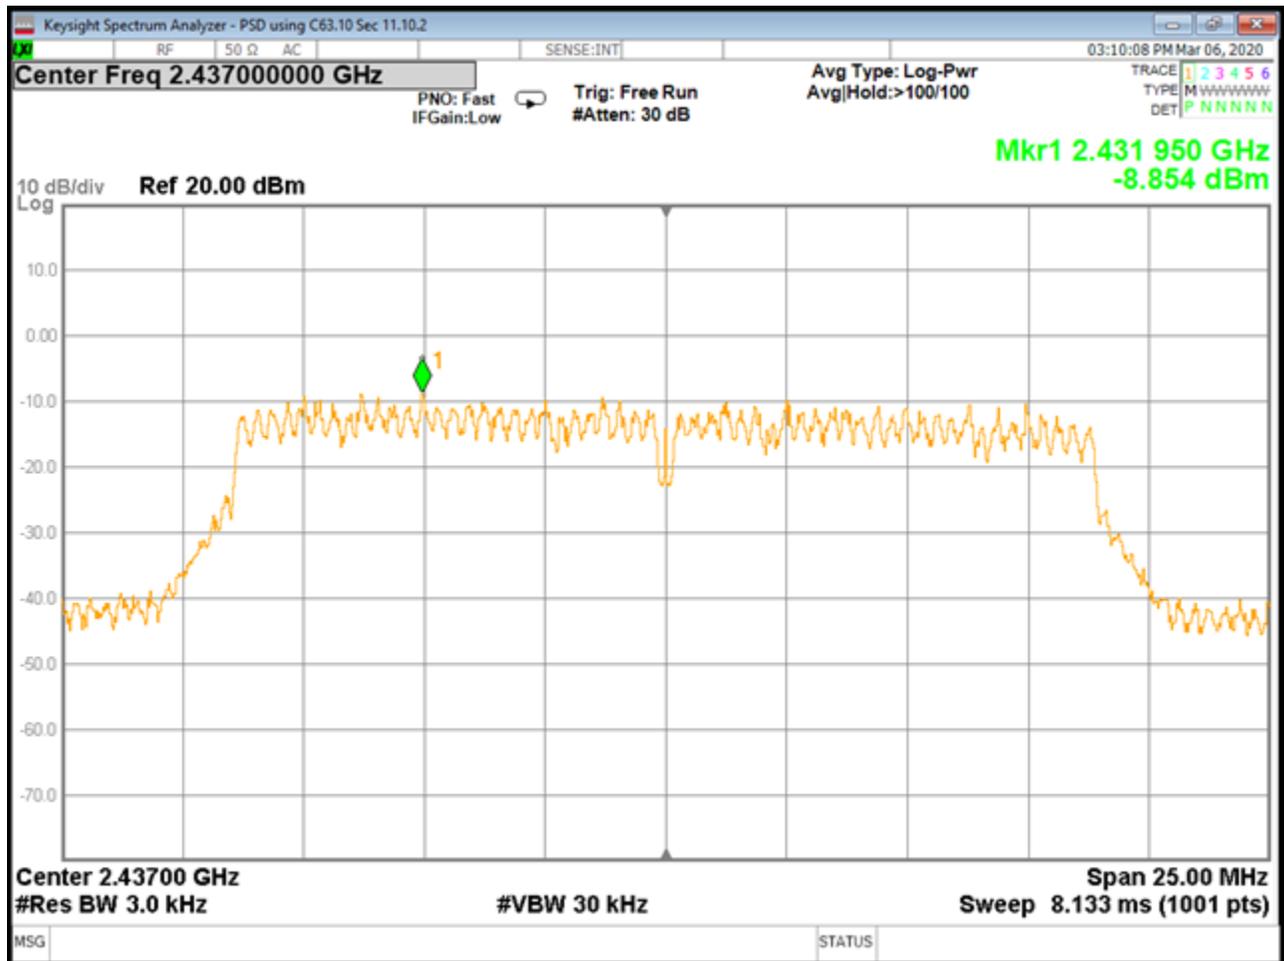


C03561 Peak PSD mid Ch WIFI n

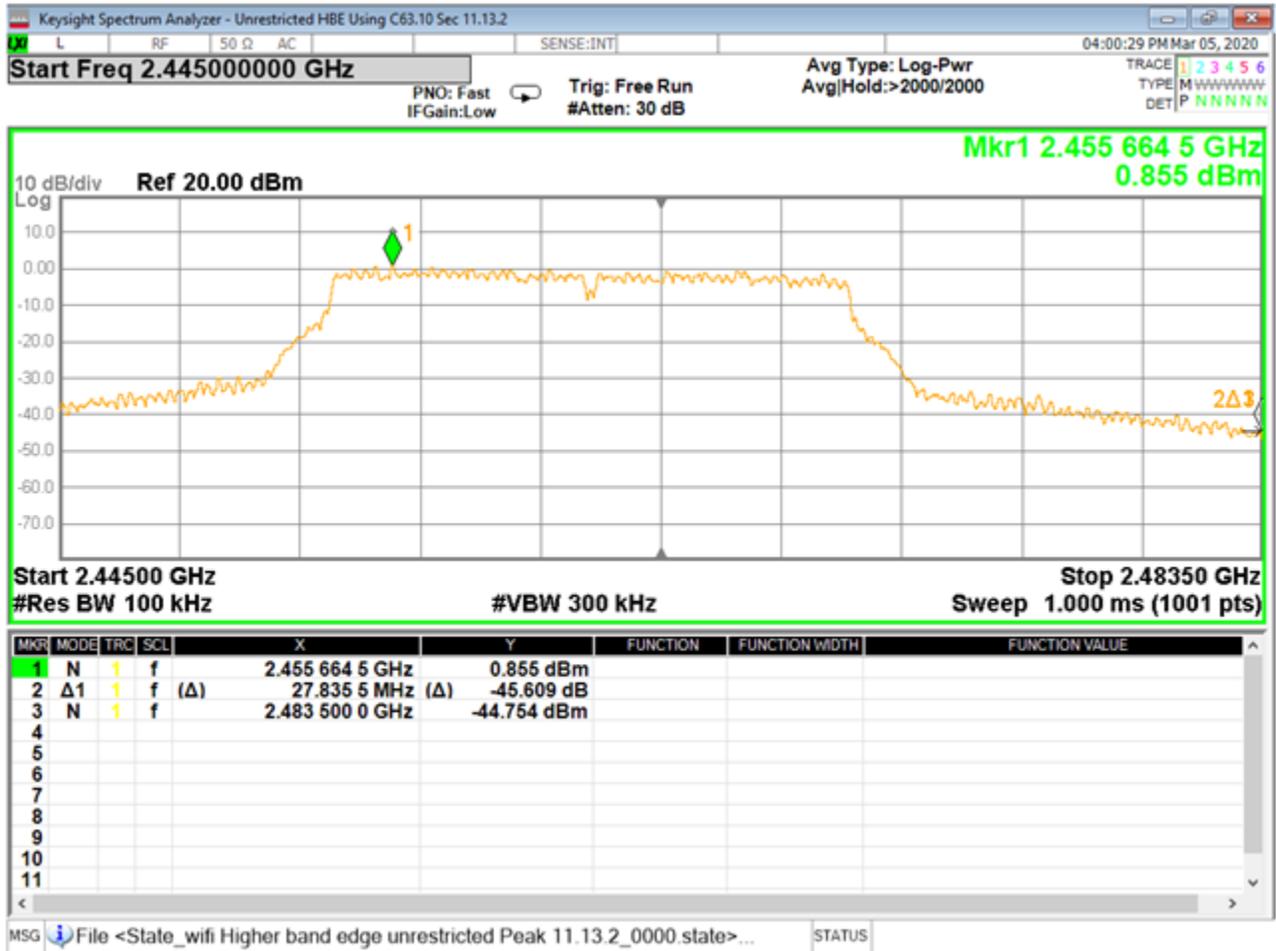


C03561 Peak Unrestricted Higher Band Edge Ch WIFI g

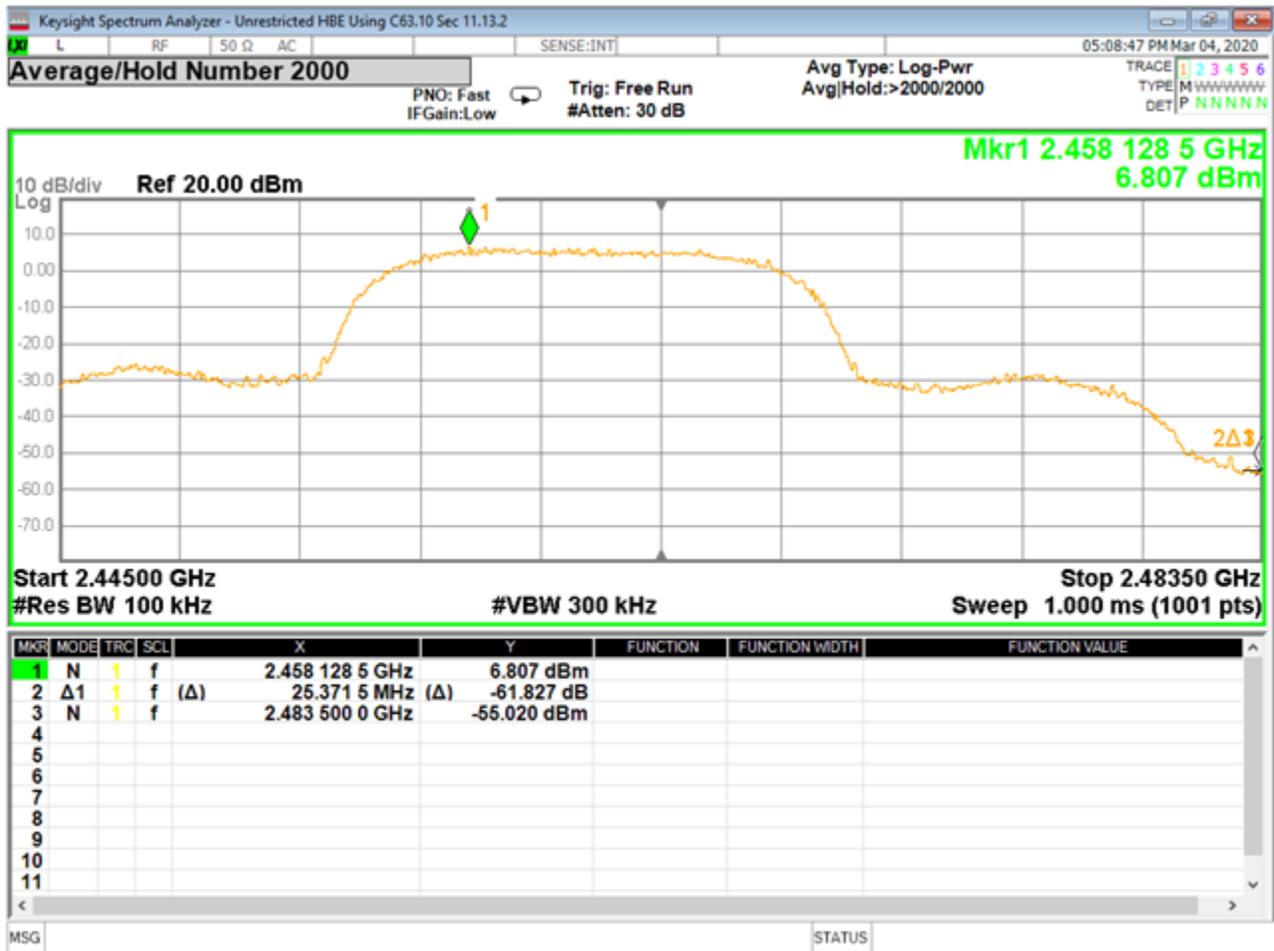


C03561 Peak Unrestricted Higher Band Edge WIFI b

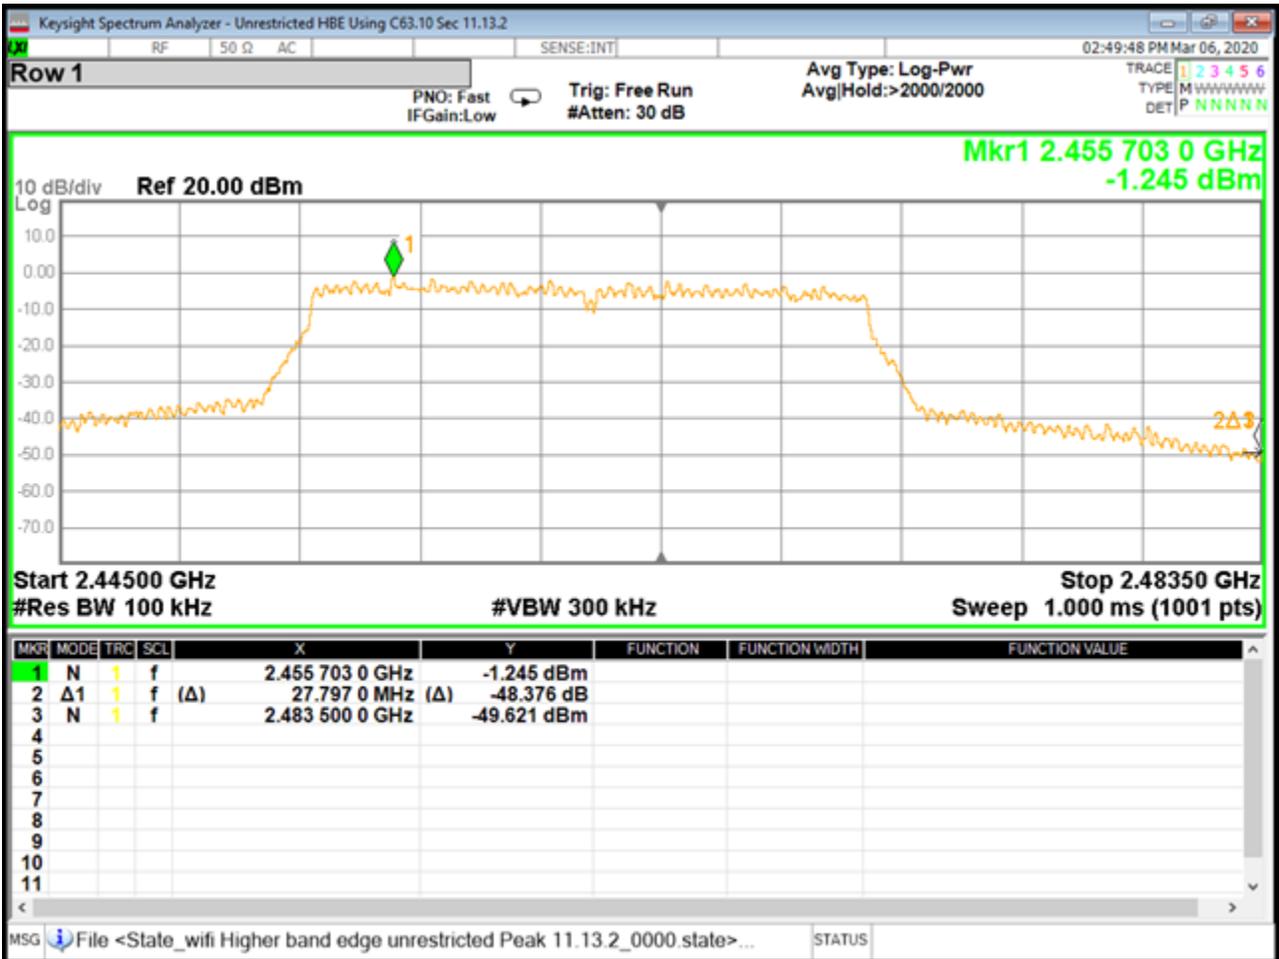

C03561 Peak Unrestricted Higher Band Edge WIFI n

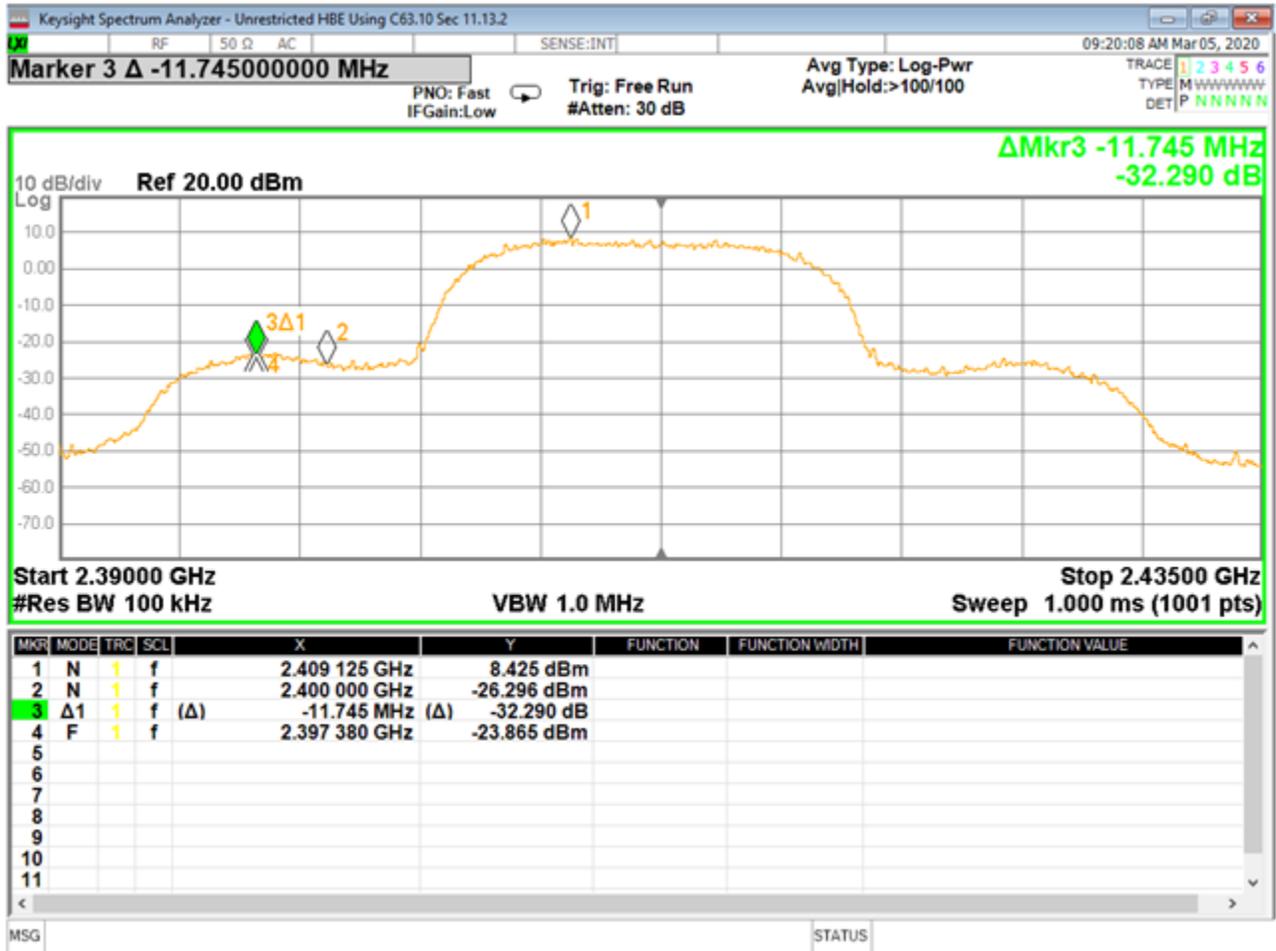

C03561 Peak Unrestricted Lower Band Edge WIFI b

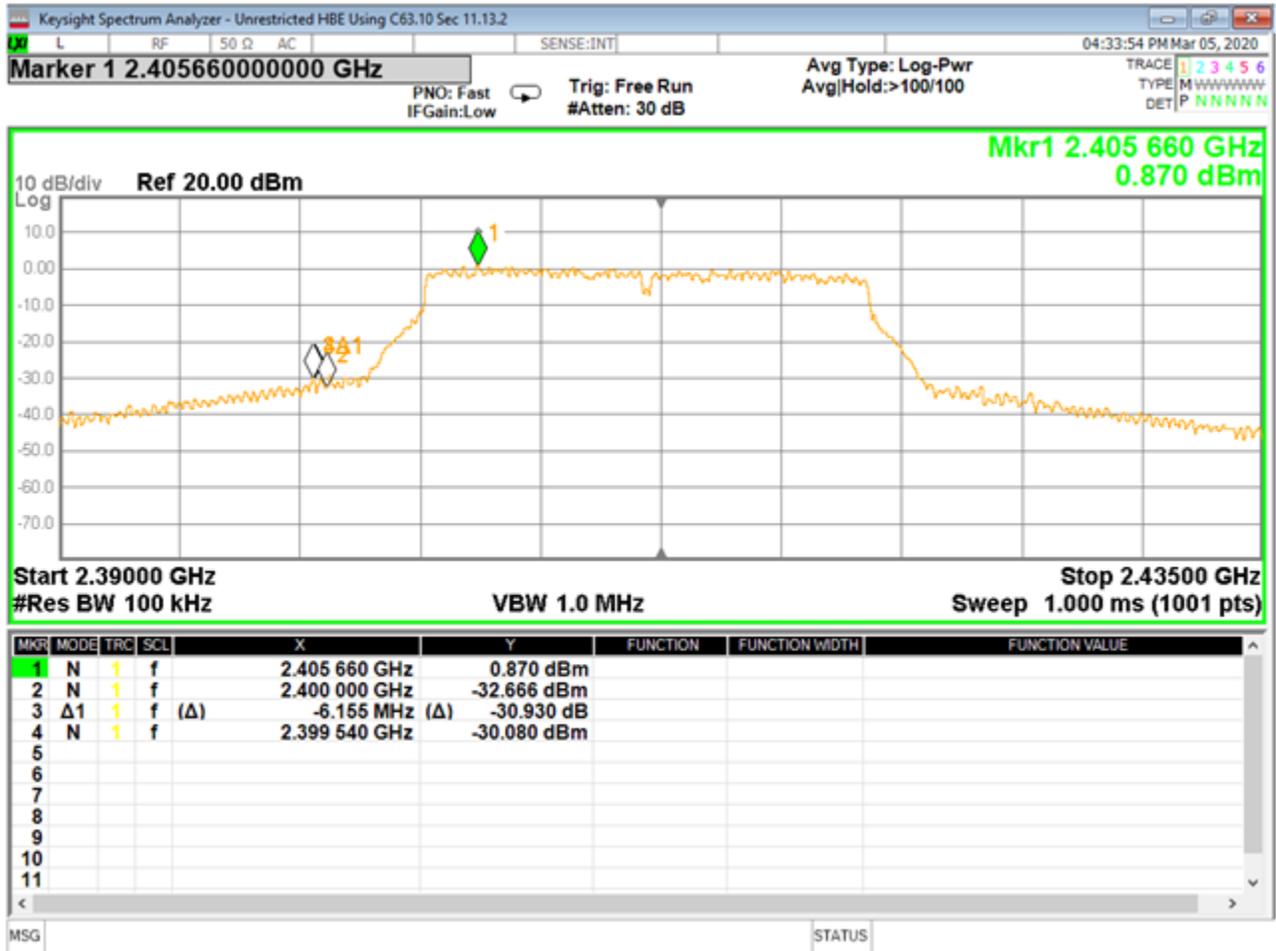

C03561 Peak Unrestricted Lower Band Edge WIFI g



C03561 Peak Unrestricted Lower Band Edge WIFI n



Report Number:	R20200110-20-E15A	Rev	A
Prepared for:	Garmin International, Inc.		

REPORT END