



F2 Labs
16740 Peters Road
Middlefield, Ohio 44062
United States of America
www.f2labs.com

RADIO CERTIFICATION TEST REPORT

Manufacturer: Deister Electronic GmbH
11 Hermann Bahlsen Str
Barsinghausen D-30890 GERMANY

Applicant: Deister Electronics USA, Inc.
8576 Wellington Road
Manassas, Virginia 20109 USA

Product Name: PRDi/5 RFID Reader

Product Description: RFID reader compatible with Key Management Terminals for the reading of both 125kHz and 13.56 MHz security credentials.

Operating Voltage/Freq. of EUT During Testing: 12VDC from external power supply

Model(s): PRDi/5*
**Denotes actual model tested as worst-case representative of product family that includes models PRDi/5 and PRDi/5 SEOS.*

FCC ID: IXLPRDI5

Testing Commenced: 2024-10-15

Testing Ended: 2024-10-16

Summary of Test Results: In Compliance

The EUT complies with the EMC requirements when manufactured identically as the unit tested in this report, including any required modifications and/or manufacturer's statement. Any changes to the design or build of this unit subsequent to this testing may deem it non-compliant.

Standards:

- ❖ FCC Part 15 Subpart C, Section 15.209
- ❖ FCC Part 15 Subpart C, Section 15.215(c) – Additional provisions to the general radiated emission limitations
- ❖ FCC Part 15 Subpart A, Section 15.31(e) – Measurement Standards
- ❖ FCC15.207 - Conducted Limits



Order No(s): F2P33253A

Applicant: Deister Electronics USA, Inc.
Model(s): PRDi/5

Evaluation Conducted by:

Julius Chiller, Senior Wireless Project Engineer

Report Reviewed by:

Ken Littell, Vice President of Operations

F2 Labs
26501 Ridge Road
Damascus, MD 20872
Ph 301.253.4500

F2 Labs
16740 Peters Road
Middlefield, OH 44062
Ph 440.632.5541

F2 Labs
8583 Zionsville Road
Indianapolis, IN 46268
Ph 317.610.0611

This test report may be reproduced in full; partial reproduction only may be made with the written consent of F2 Labs. The results in this report apply only to the equipment tested.



TABLE OF CONTENTS

1	<u>ADMINISTRATIVE INFORMATION</u>
2	<u>SUMMARY OF TEST RESULTS/MODIFICATIONS</u>
3	<u>TABLE OF MEASURED RESULTS</u>
4	<u>ENGINEERING STATEMENT</u>
5	<u>EUT INFORMATION AND DATA</u>
6	<u>LIST OF MEASUREMENT INSTRUMENTATION</u>
7	<u>OCCUPIED BANDWIDTH</u>
8	<u>FIELD STRENGTH OF EMISSIONS/RADIATED SPURIOUS EMISSIONS</u>
9	<u>VARIATION OF THE INPUT POWER</u>
10	<u>CONDUCTED EMISSIONS</u>
11	<u>TEST SETUP PHOTOGRAPH(S)</u>



1 ADMINISTRATIVE INFORMATION

1.1 Measurement Location:

F2 Labs in Middlefield, Ohio. Site description and attenuation data are on file with the FCC's Sampling and Measurement Branch at the FCC Laboratory in Columbia, MD.

1.2 Measurement Procedure:

All measurements were performed according to ANSI C63.10 and recommended FCC procedure of measurement of equipment operating under Section 15.209. A list of the measurement equipment can be found in Section 6.



1.3 Uncertainty Budget:

The uncertainty in EMC measurements arises from several factors which affect the results, some associated with environmental conditions in the measurement room, the test equipment being used, and the measurement techniques adopted.

The measurement uncertainty budgets detailed below are calculated from the test and calibration data and are expressed with a 95% confidence factor using a coverage factor of $k=2$. The Uncertainty for a laboratory is referred to as U_{lab} . For Radiated and Conducted Emissions, the Expanded Uncertainty is compared to the U_{cispr} values to determine if a specific margin is required to deem compliance.

U_{lab}

Measurement Range	Combined Uncertainty	Expanded Uncertainty
Radiated Emissions <1 GHz @ 3m	2.54dB	5.07dB
Radiated Emissions <1 GHz @ 10m	2.55dB	5.09dB
Radiated Emissions 1 GHz to 2.7 GHz	1.81dB	3.62dB
Radiated Emissions 2.7 GHz to 18 GHz	1.55dB	3.10dB
AC Power Line Conducted Emissions, 150kHz to 30 MHz	1.38dB	2.76dB
AC Power Line Conducted Emissions, 9kHz to 150kHz	1.66dB	3.32dB

U_{cispr}

Measurement Range	Expanded Uncertainty
Radiated Emissions <1 GHz @ 3m	5.2dB
Radiated Emissions <1 GHz @ 10m	5.2dB
Radiated Emissions 1 GHz to 2.7 GHz	Under Consideration
Radiated Emissions 2.7 GHz to 18 GHz	Under Consideration
AC Power Line Conducted Emissions, 150kHz to 30 MHz	3.6dB
AC Power Line Conducted Emissions, 9kHz to 150kHz	4.0dB

If U_{lab} is less than or equal to U_{cispr} , then:

- compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} in table 1, then:

- compliance is deemed to occur if no measured disturbance, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Note: Only measurements listed in the tables above that relate to tests included in this Test Report are applicable.



Order No(s): F2P33253A

Applicant: Deister Electronics USA, Inc.
Model(s): PRDi/5

1.4 Document History:

Document Number	Description	Issue Date	Approved By
F2P33253A-01E	First Issue	2024-10-16	K. Littell

**2 SUMMARY OF TEST RESULTS**

Test Name	Standard(s)	Results
Occupied Bandwidth	CFR 47 Part 15.215(c)	Complies
Field Strength of Emissions	CFR 47 Part 15.209	Complies
Radiated Spurious Emissions	CFR 47 Part 15.209	Complies
Variation of the Input Power	CFR 47 Part 15.31(e)	Complies
Conducted Emissions	CFR 47 Part 15.207(a)	Complies

Modifications Made to the Equipment
None



3 TABLE OF MEASURED RESULTS

Test		13.56 MHz	125kHz
Field Strength of Fundamental at 1m		---	12.3 $\mu\text{V/m}$ / 21.8 dB $\mu\text{V/m}$
¹ Field Strength of Fundamental at 3m		12.5 $\mu\text{V/m}$ / 21.93 dB $\mu\text{V/m}$	---
¹ Field Strength of Fundamental corrected for 40dB/decade 30m distance correction		0.125 $\mu\text{V/m}$ -18.07 dB $\mu\text{V/m}$ /	----
¹ Field Strength of Fundamental corrected for 40dB/decade 300m distance correction		---	0.39 nV/m -68.1 dB $\mu\text{V/m}$
Limit for Fundamental at 30m		30 $\mu\text{V/m}$ / 29.54 dB $\mu\text{V/m}$	----
Limit for Fundamental at 300m		--	19.2 $\mu\text{V/m}$ 25.6 dB $\mu\text{V/m}$
-20dB Occupied Bandwidth		233kHz	1.12kHz
99% Occupied Bandwidth		354kHz	14kHz
² Variation of Input Power @ 12VDC corrected for distance	Nominal	21.93 dB $\mu\text{V/m}$	21.8 dB $\mu\text{V/m}$
	-15%	21.92 dB $\mu\text{V/m}$	21.8 dB $\mu\text{V/m}$
	+15%	21.92 dB $\mu\text{V/m}$	21.98 dB $\mu\text{V/m}$

¹ 13.56MHz field strength was measured at 3m. 125 kHz field strength was measured at 1m.

² The voltage variation testing was done at 12VDC nominal. Readings were recorded at 3m (13.56 MHz) and 1m (125 kHz) distance.



4 ENGINEERING STATEMENT

This report has been prepared on behalf of Deister Electronics USA, Inc., to provide documentation for the testing described herein. This equipment has been tested and found to comply with part 15.209 of the FCC Rules using ANSI C63.10 and Part 15 standards. The test results found in this test report relate only to the items tested.



5 EUT INFORMATION AND DATA

5.1 Equipment Under Test:

Product: RFID Reader

Model(s): PRDi/5*

**Denotes actual model tested as worst-case representative of product family that includes models PRDi/5 and PRDi/5 SEOS.*

Serial No(s): 3262201035

Firmware Version: F41

Hardware Version: A

FCC ID: IXLPRDI5

5.2 Trade Name:

Deister Electronics USA, Inc.

5.3 Power Supply:

12VDC from external power supply

5.4 Applicable Rules:

CFR 47, Part 15.209

5.5 Antenna:

Integral

5.6 Accessories:

Device	Manufacturer	Model Number	Serial Number
DC Supply*	BK Precision	1685B	346F17303

**Denotes F2 Labs-supplied equipment.*

5.7 Test Item Condition:

The equipment to be tested was received in good condition.

5.8 Testing Algorithm:

EUT was configured to transmit in continuous mode at 13.56 MHz and 125kHz.

**6 LIST OF MEASUREMENT INSTRUMENTATION**

Equipment Type	Asset Number	Manufacturer	Model	Serial Number	Calibration Due Date
Shielded Chamber	CL166-E	Albatross Projects	B83117-DF435-T261	US140023	2024-11-15
Receiver	CL151	Rohde & Schwarz	ESU40	100319	2025-04-09
Antenna, JB3 Combination	CL175	Sunol Sciences	JB3	A030315	2025-09-18
Amplifier w/18" Loop Antenna	CL163-Loop	AH Systems, Inc.	EHA-52B	100	2024-12-14
Low Loss Cable Set	CL315 / CL318	Fairview Microwave	FMC0202914-72/FMC0202914-240	None Spec.	2025-04-09, 2025-04-10
Pre-Amplifier	CL284	A.H. Systems	PAM-1001	131	2025-04-10
Software:	Tile Version 3.4.B.3		Software Verified: 2024-10-15 to 2024-10-16		
Software:	EMC 32, Version 8.53.0		Software Verified: 2024-10-15 to 2024-10-16		
Spectrum Analyzer	0204	Hewlett Packard	HP8591A	3149A02546	2025-04-08
Software:	EMC Analyzer 85712D Rev. A.00.01			Date Verified:	2024-10-15 to 2024-10-16
Transient Limiter	0202	Hewlett Packard	11947A	3107A00729	2025-04-09
LISN	CL181	Com-Power	LI-125A	191226	2026-11-20
LISN	CL182	Com-Power	LI-125A	191225	2026-11-21
Temp/Hum. Recorder	CL293	Thermpro	TP50	1	2025-05-31
Temp/Hum. Recorder	CL294	Thermpro	TP50	2	2026-04-27



7 OCCUPIED BANDWIDTH

7.1 Requirements:

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the -20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage.


Bandwidth measurements were made at the 13.56 MHz and 125kHz frequencies. The 20dB bandwidth was measured using the Marker Delta method. The 99% bandwidth was measured using the analyzer's OBW measurement function.



7.2 Test Data - Occupied Bandwidth

Test Date(s):	2024-10-15	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.215(c)	Air Temperature:	20.4°C
		Relative Humidity:	43%

13.56 MHz: 99% OBW

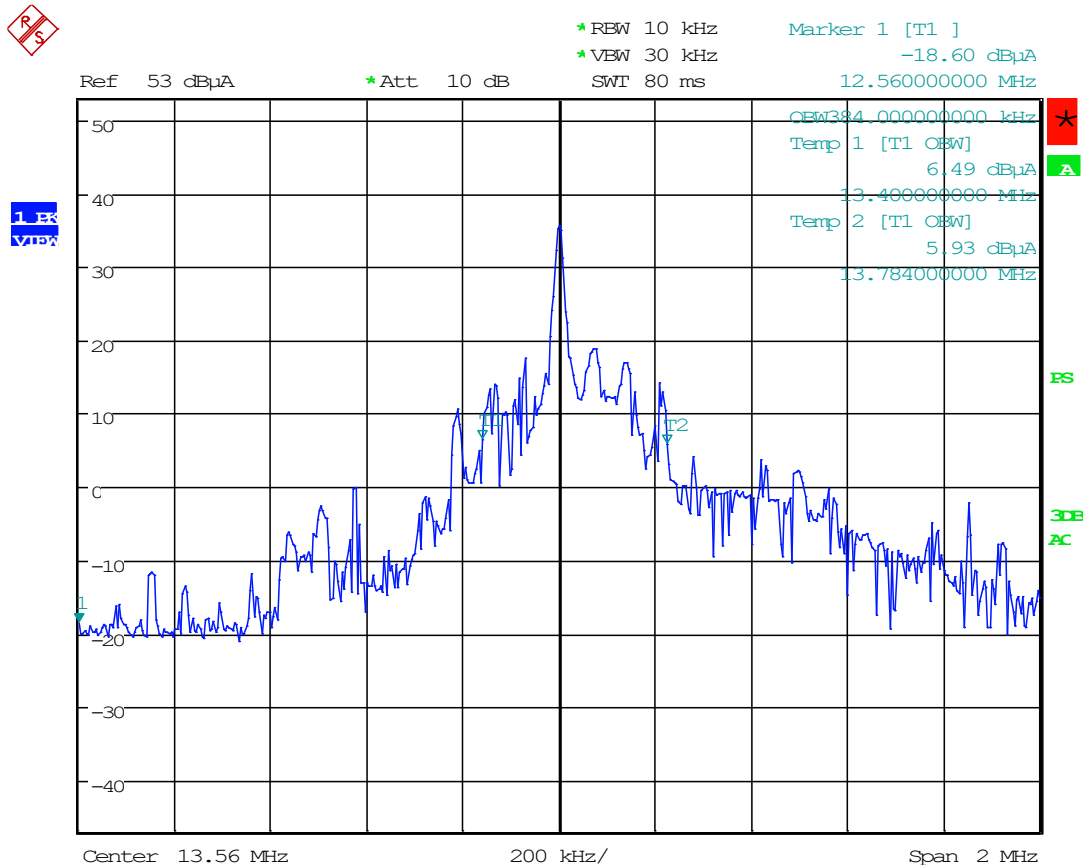

Date: 15.OCT.2024 11:28:40




Order No(s): F2P33253A

Applicant: Deister Electronics USA, Inc.


Model(s): PRDi/5

13.56 MHz: -20dB OBW

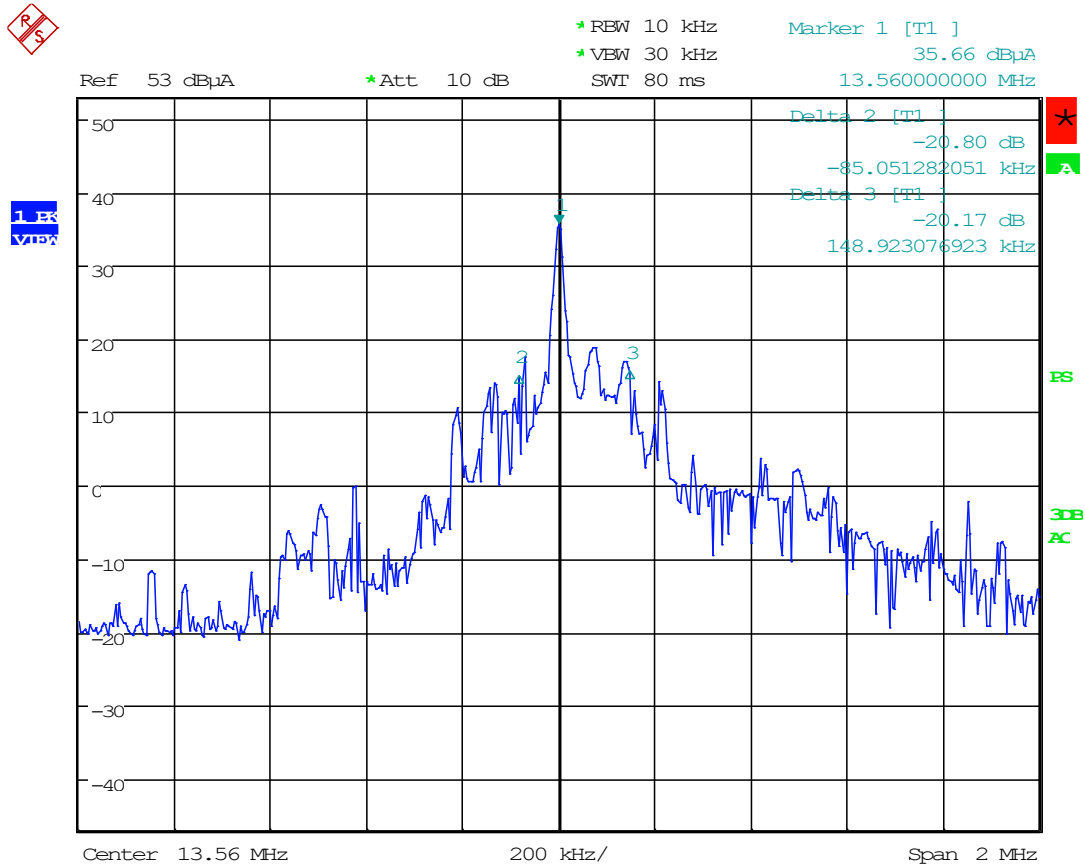

Date: 15.OCT.2024 11:31:19

125kHz: 99% OBW

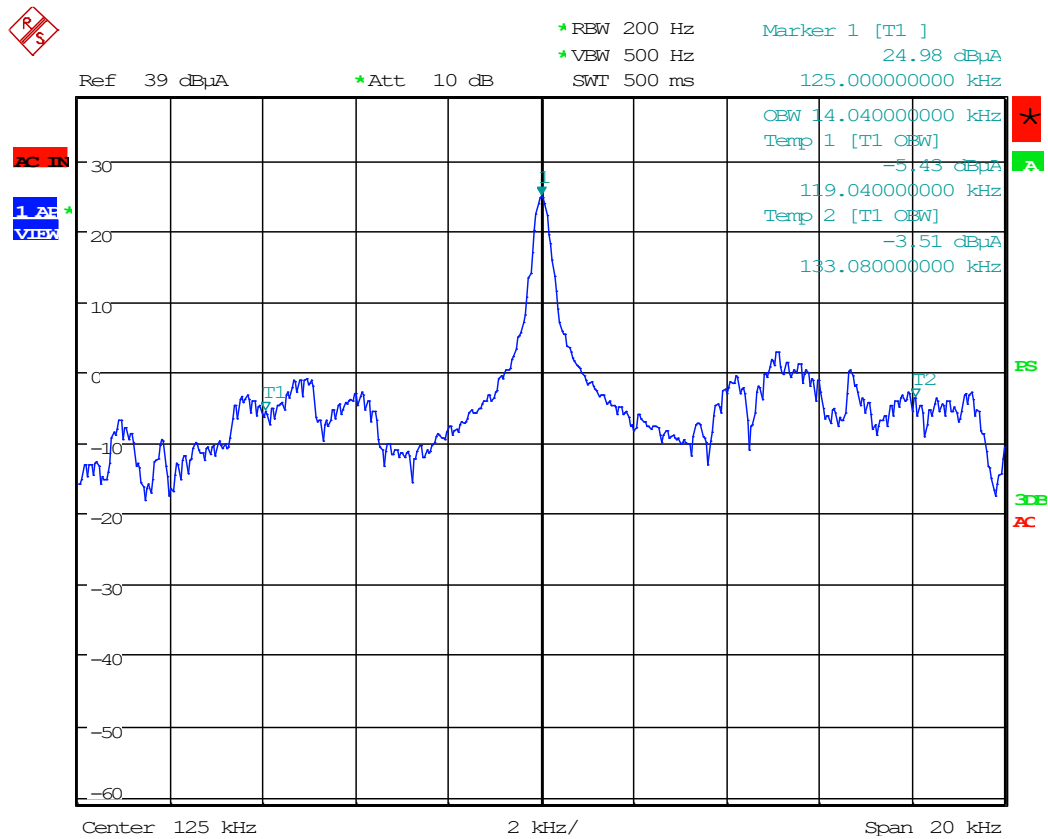

Date: 15.OCT.2024 14:45:05




Order No(s): F2P33253A

Applicant: Deister Electronics USA, Inc.

Model(s): PRDi/5

125 kHz: -20dB OBW

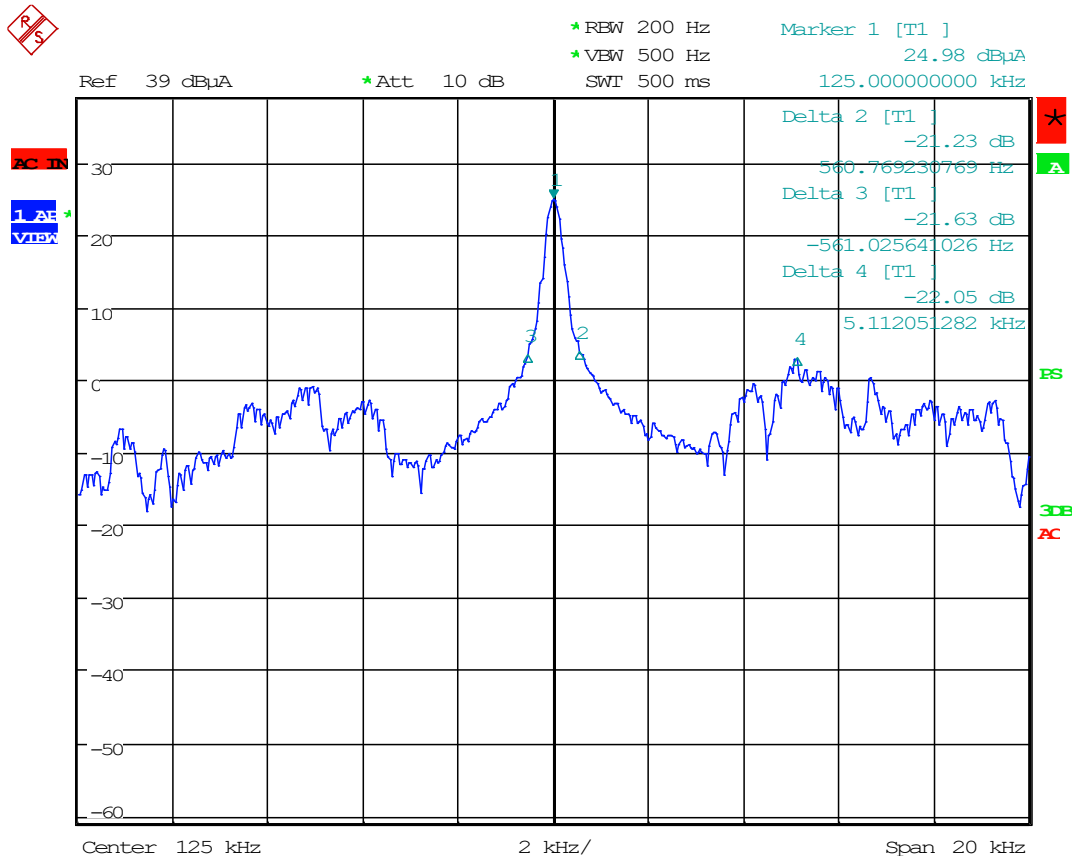

Date: 15.OCT.2024 14:46:17



8 FIELD STRENGTH OF EMISSIONS / RADIATED SPURIOUS EMISSIONS

At least 6 of the highest frequencies were measured per ANSI 63.4 in a 3-meter anechoic chamber. Frequencies below 1 GHz were measured using a quasi-peak detector. The antenna was raised between 1 and 4 meters and the EUT turntable was rotated 360 degrees to maximize the emissions. Some of the frequencies did not change with the EUT on or off. At those frequencies, the test distance was shortened to 1 meter and still no emissions from the EUT were visible or over the ambient or limit. Frequencies were scanned from 9kHz to 200 MHz (tenth harmonic) and the highest emissions are listed below.

Notes: Plots are peak, max hold pre-scan data included only to determine what frequencies to investigate and measure. During the pre-scan evaluation, the EUT was rotated in all possible directions and three orthogonal positions to find the maximum emissions. The orthogonal position that showed the highest emissions was used. At some frequencies, no emissions from the EUT were measurable over the ambient noise floor. The readings did not change with EUT on and EUT off.


125 kHz Field Strength was measured at 1 meter.

13.56 MHz Field Strength was measured at 3 meters.




Test Date(s):	2024-10-15	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.209	Air Temperature:	20.6°C
Results:	Complies	Relative Humidity:	43%

125kHz Field Strength

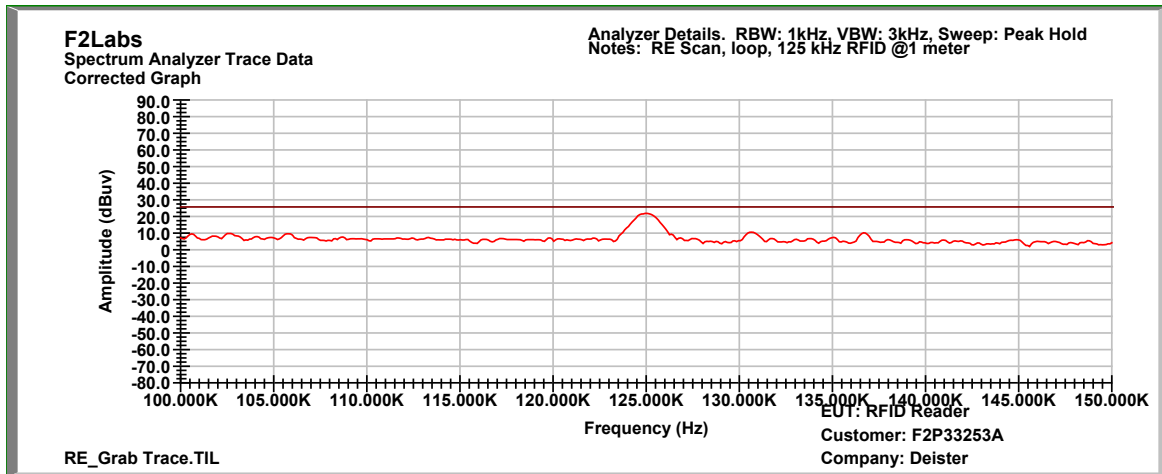

Field Strength of Fundamental at 1m for 125kHz = 12.3 $\mu\text{V/m}$ / 21.8 dB $\mu\text{V/m}$


13.56 MHz Field Strength

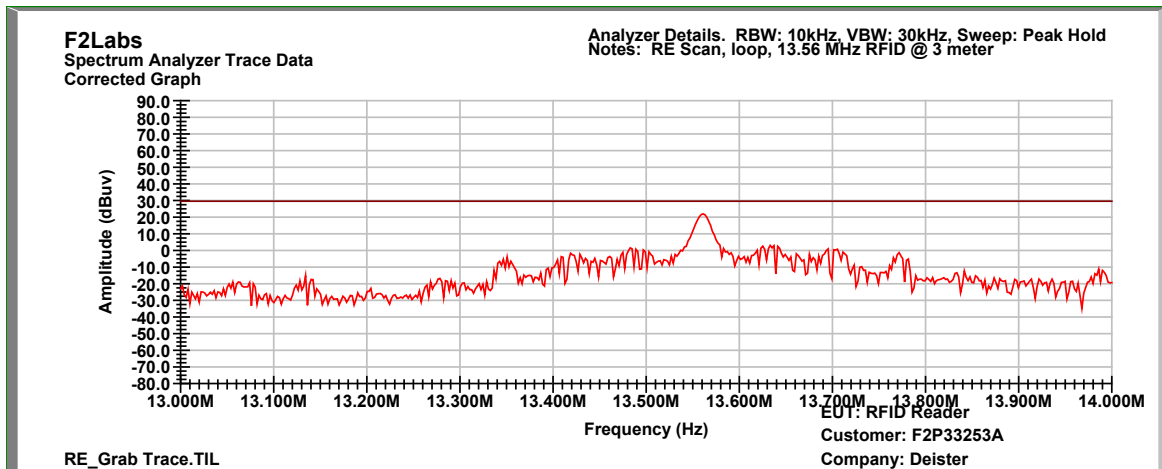


Field Strength of Fundamental at 3m for 13.56 MHz = 12.5 $\mu\text{V/m}$ / 21.93 dB $\mu\text{V/m}$



Characterization Scan, 0.009 MHz to 0.15 MHz (Loop Antenna)

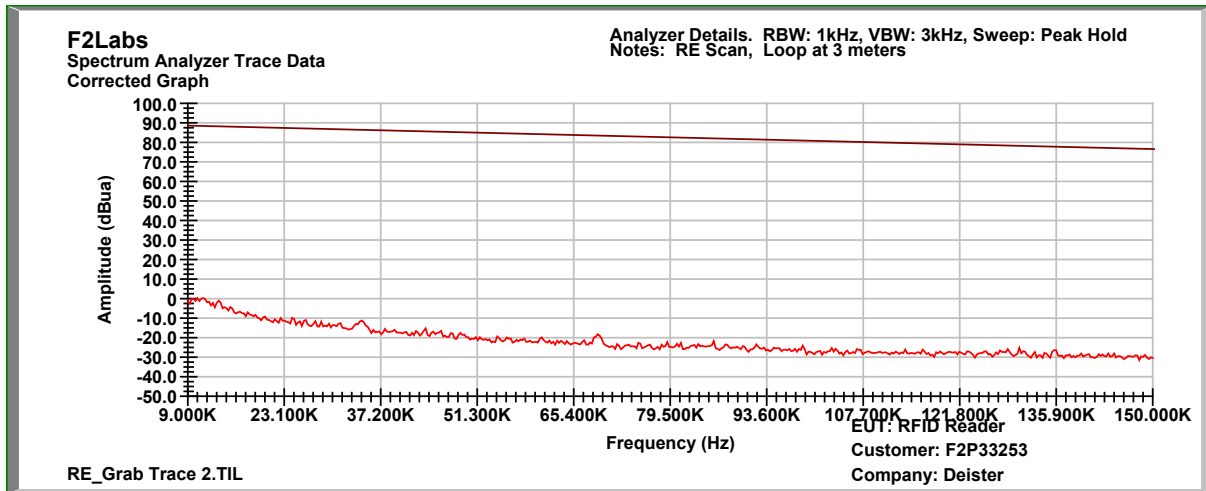


Characterization Scan, 0.15 MHz to 30 MHz (Loop Antenna)

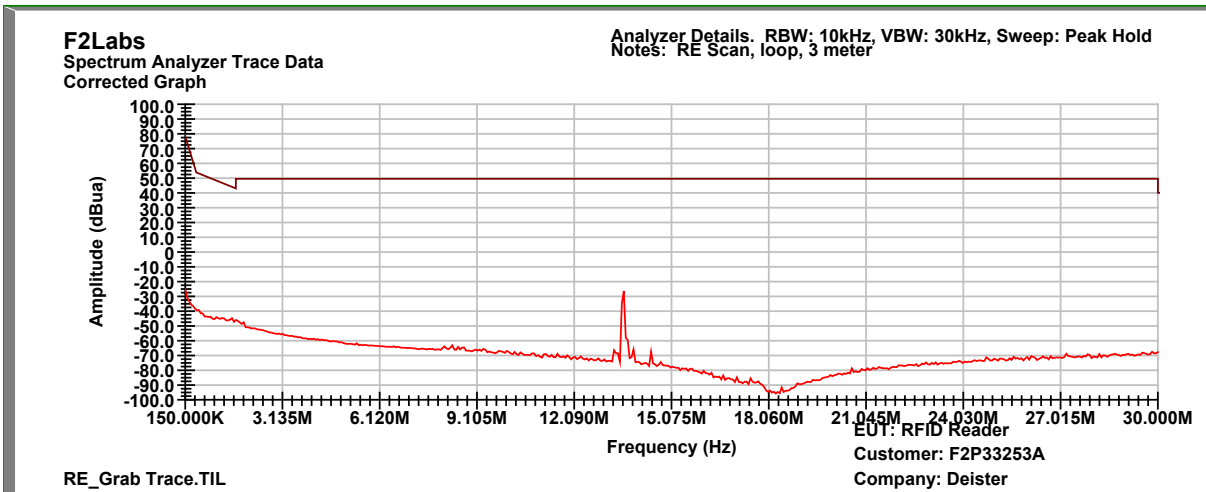





Radiated Spurious Emissions, 30 MHz to 1000 MHz

Frequency (MHz)	Ant. Pol.	Ant. Height (cm)	Azimuth (degrees)	Reading (dBμV)	Cable Loss & Antenna Factor (dB)	Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
72.870000	V	100.00	31.00	47.9	-31.5	16.40	40.0	-23.6
75.200000	V	112.00	208.00	63.2	-31.6	31.60	40.0	-8.4
77.340000	V	110.00	0.00	57.3	-31.8	25.50	40.0	-14.5
81.220000	V	110.00	346.00	44.7	-32.1	12.60	40.0	-27.4
108.380000	V	115.00	272.00	47.0	-27.3	19.70	43.5	-23.8
189.660000	V	100.00	155.00	42.0	-27.5	14.50	43.5	-29.0
189.860000	H	207.00	252.00	60.8	-27.5	33.30	43.5	-10.2

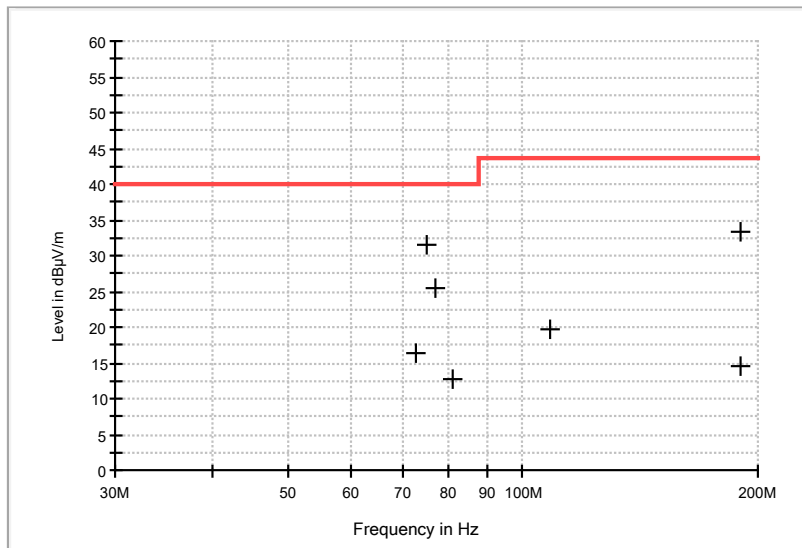



Radiated Spurious Emissions, 30 MHz to 1000 MHz - Vertical

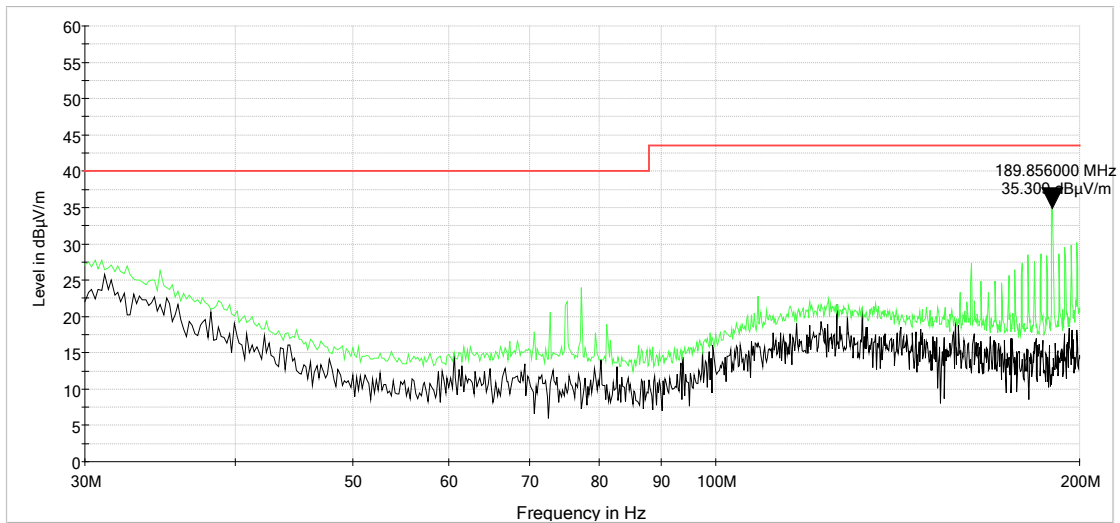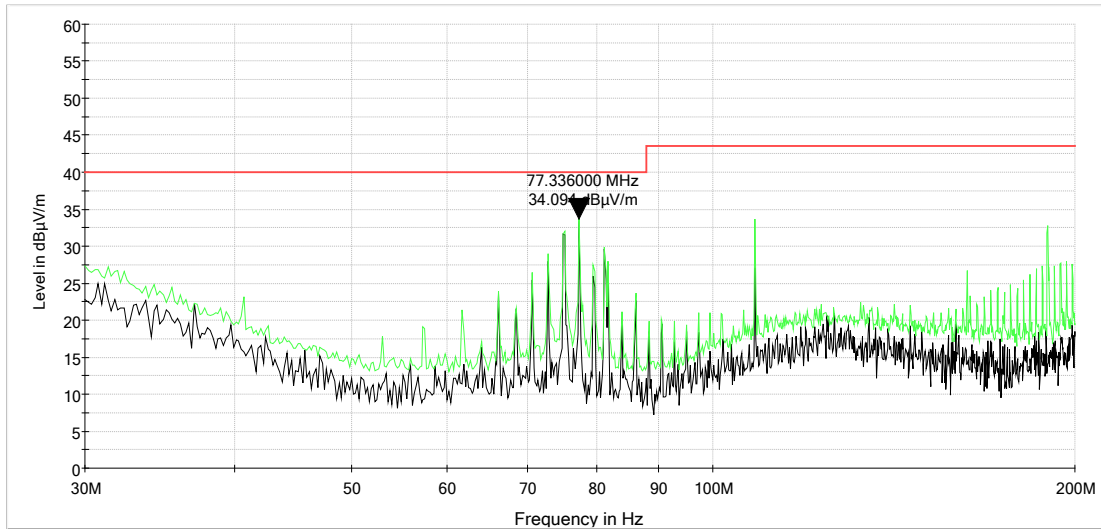



9 VARIATION OF THE INPUT POWER, 15.31(e)

9.1 Requirements:

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.




9.2 Test Data – Variation of the Input Power

Test Date(s):	2024-10-15	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.31(e)	Air Temperature:	20.6°C
Results:	Complies*	Relative Humidity:	43%


**The results show that the fundamental frequency did not move outside the frequency band and the field strength did not increase above the limit during the variations.*




125 kHz: Characterization Scan, 10VDC

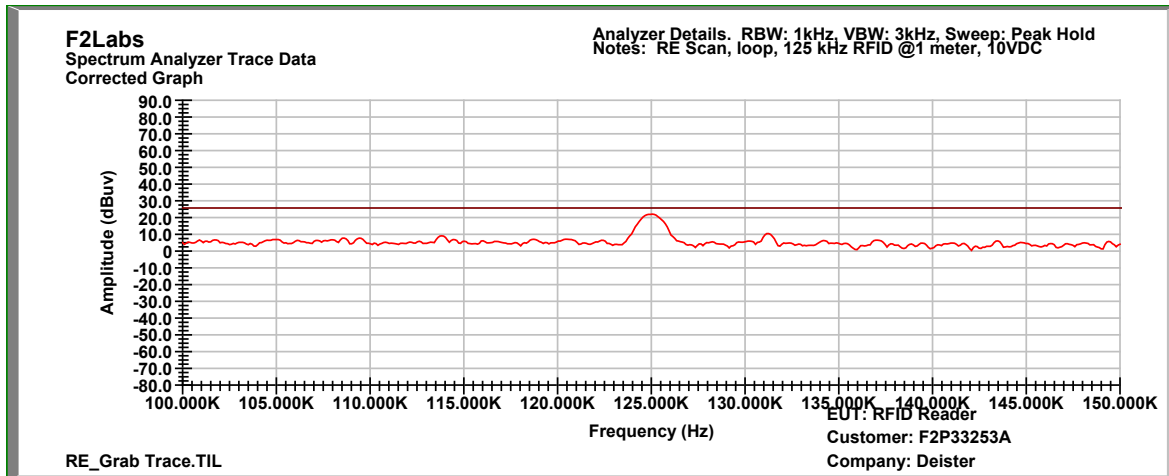

125 kHz: Characterization Scan, 12VDC (Nominal)

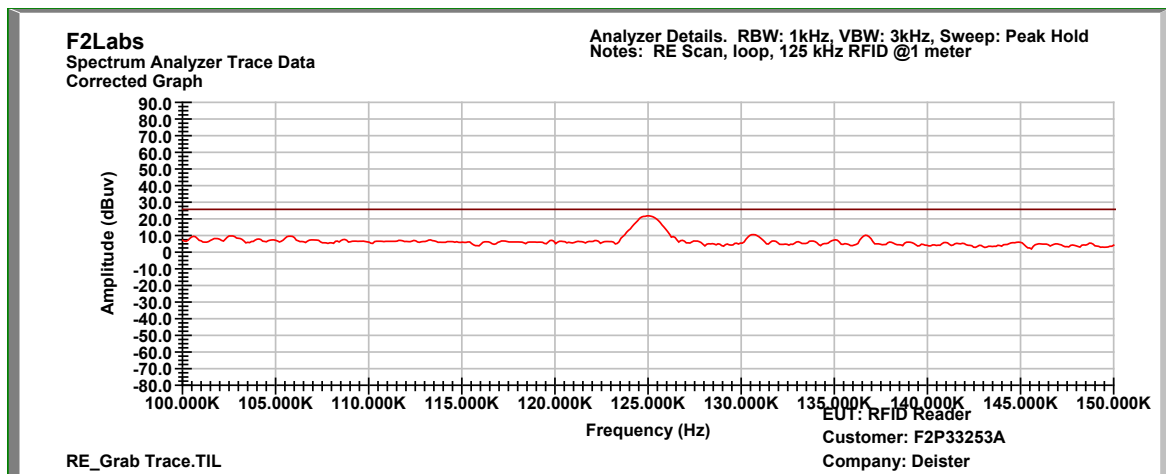


125 kHz: Characterization Scan, 14VDC

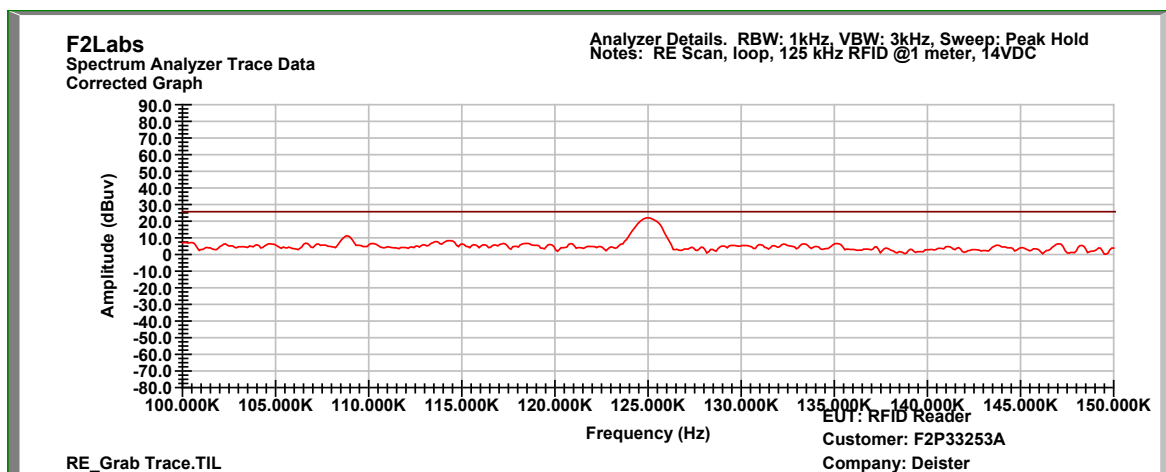





13.56 MHz: Characterization Scan, 10VDC

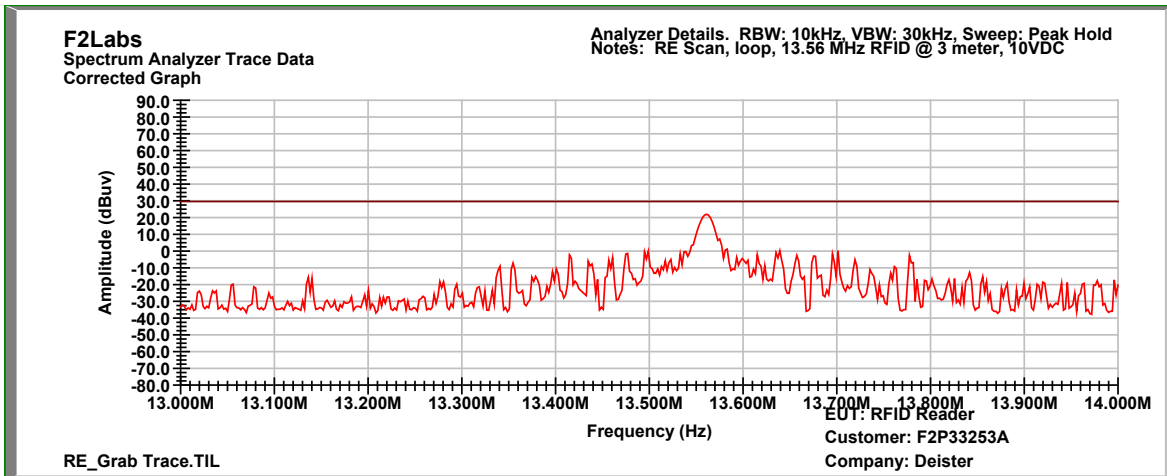

13.56 MHz: Characterization Scan, 12VDC (Nominal)

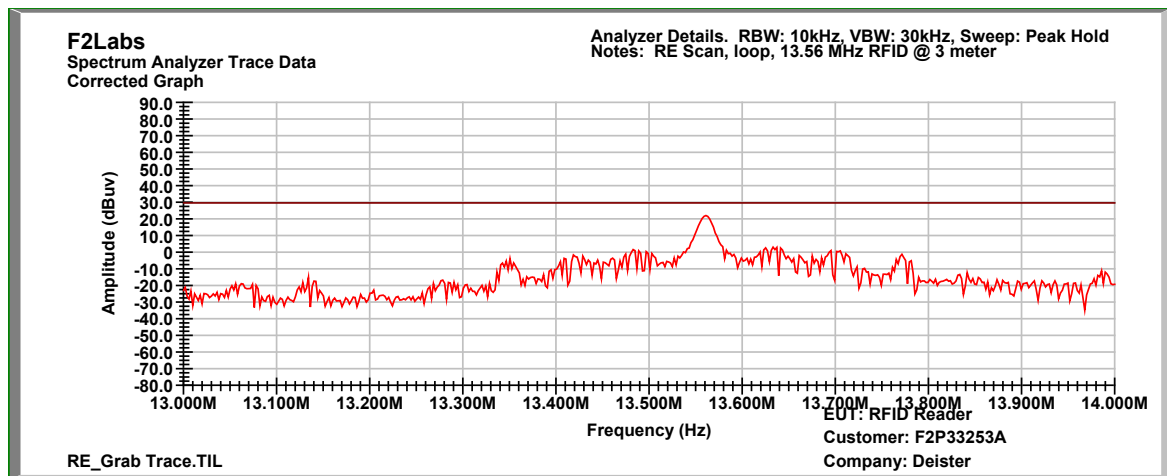

13.56 MHz: Characterization Scan, 14VDC

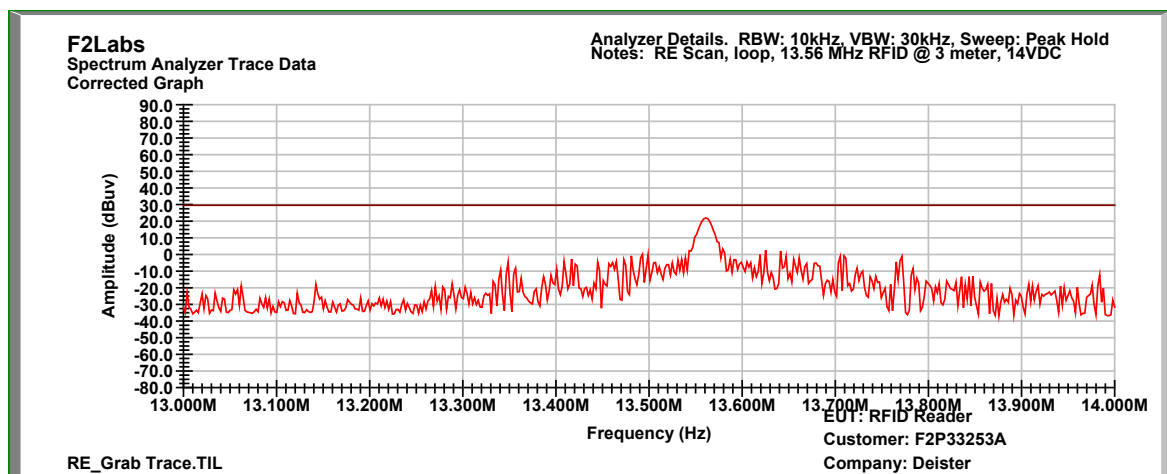



10 CONDUCTED EMISSIONS

10.1 Requirements

In accordance with FCC CFR 47 Part 15.207(a), "Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

10.2 Procedure


The EUT was placed on a 1.0 x 1.5 meter non-conductive table, 0.8 meter above a horizontal ground plane and 0.4 meter from a vertical ground plane. Power was provided to the EUT through a LISN bonded to a 3 x 2 meter ground plane. The LISN and peripherals were supplied power through a filtered AC power source. The output of the LISN was connected to the input of the receiver via a transient limiter, and emissions in the range 150 kHz to 30 MHz were measured. The measurements were recorded using the quasi-peak and average detectors as directed by the standard, and the resolution bandwidth during testing was 9 kHz. The raw measurements were corrected to allow for attenuation from the LISN, transient limiter and cables.




10.3 Conducted Emissions Test Data

Test Date(s):	2024-10-15	Test Engineer:	J. Chiller
Rule:	15.207	Air Temperature:	22.4° C
Test Results:	Complies	Relative Humidity:	44%

Conducted Test – Live: 0.15 MHz to 0.5 MHz

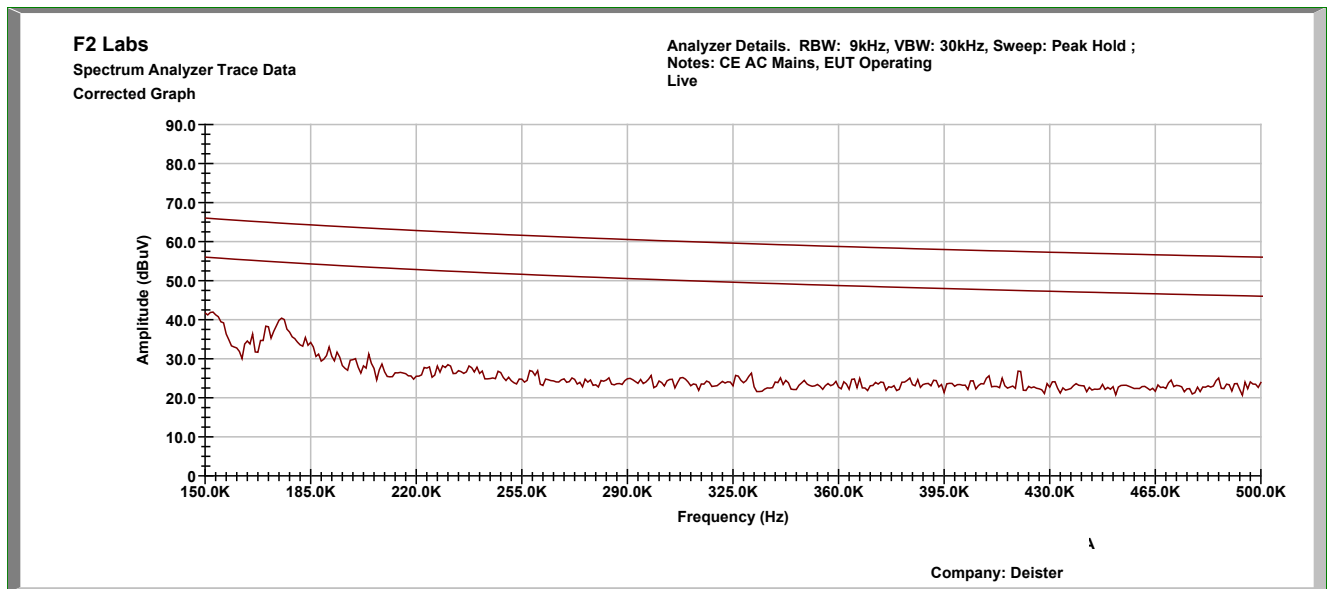


Conducted Test – Live: 0.5 MHz to 5.0 MHz

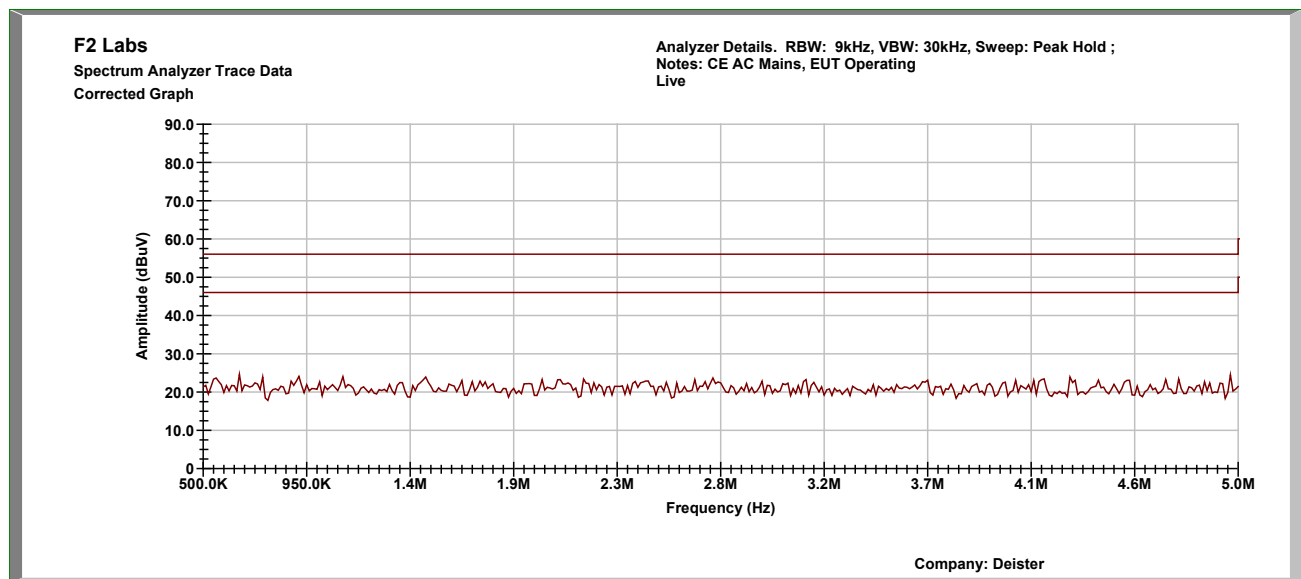




Conducted Test – Live: 5.0 MHz to 30.0 MHz

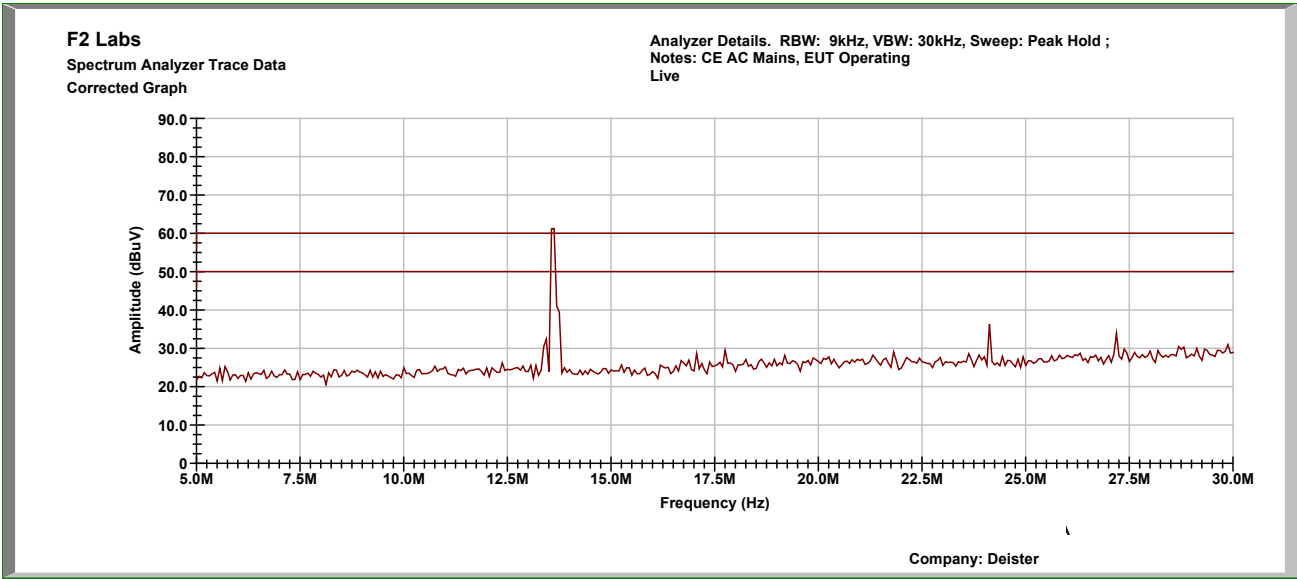


Top Discrete Measurements								
No.	Conductor	Frequency (MHz)	Detector	Level (dBμV)	Adjustment (dB)	Results (dBμV)	Limit (dBμV)	Margin (dB)
1	Live	13.56	Quasi-Peak	46.63	12.235	58.865	60.0	-1.14
			Average	35.00	12.235	47.235	50.0	-2.77



Conducted Test – Neutral: 0.15 MHz to 0.5 MHz

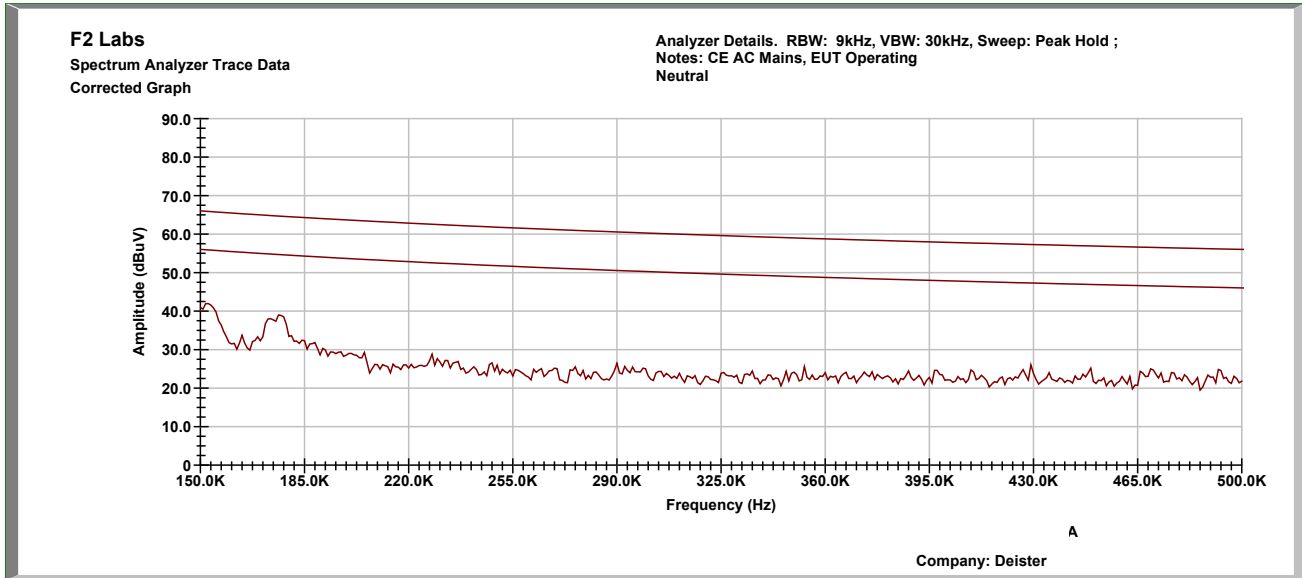


Conducted Test – Neutral: 0.5 MHz to 5.0 MHz

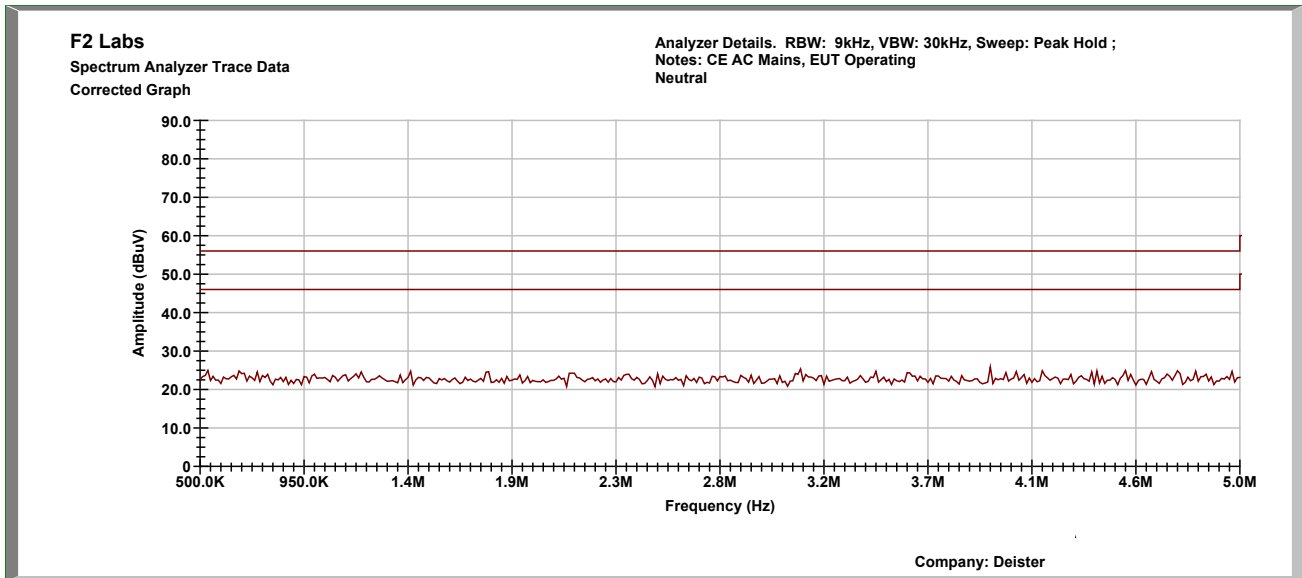



Conducted Test – Neutral: 5.0 MHz to 30.0 MHz

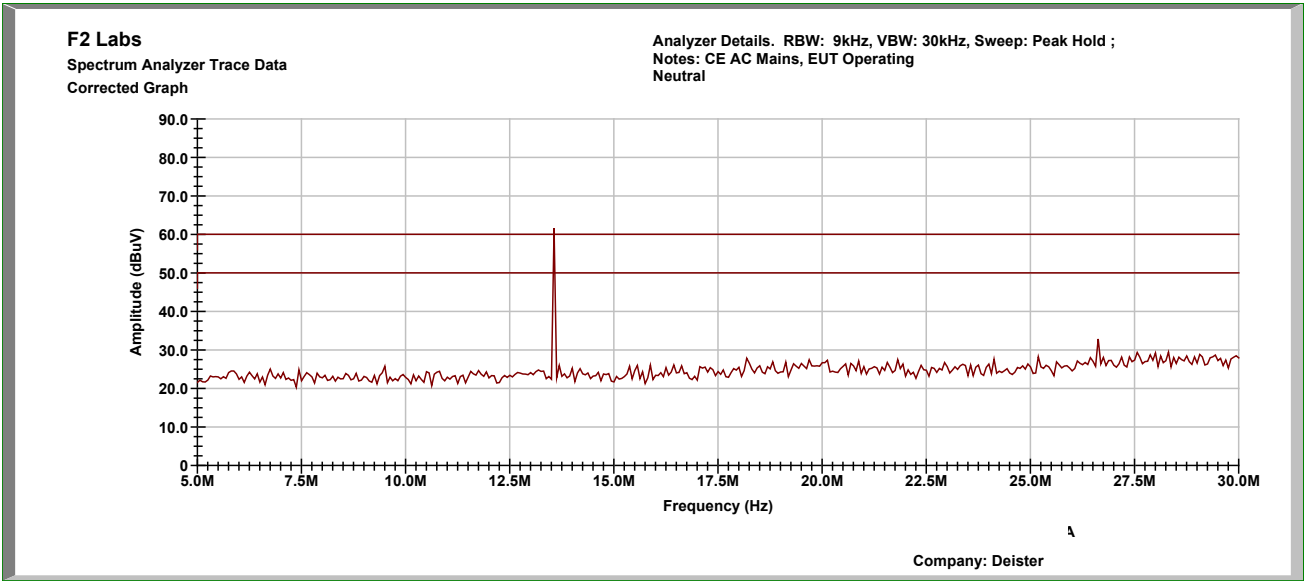

Top Discrete Measurements								
No.	Conductor	Frequency (MHz)	Detector	Level (dBμV)	Adjustment (dB)	Results (dBμV)	Limit (dBμV)	Margin (dB)
1	Neutral	13.56	Quasi-Peak	46.15	12.145	58.295	60.0	-1.71
			Average	35.78	12.145	47.925	50.0	-2.08



Order No(s): F2P33253A
Model(s): PRDi/5

Applicant: Deister Electronics USA, Inc.

11 TEST SETUP PHOTOGRAPH(S)

General Test Setup





Order No(s): F2P33253A
Model(s): PRDi/5

Applicant: Deister Electronics USA, Inc.

Loop at 1 meter, 125 kHz Field Strength





Order No(s): F2P33253A
Model(s): PRDi/5

Applicant: Deister Electronics USA, Inc.

13.56 MHz Field Strength / Radiated Spurious Emissions: Less than 30 MHz







Order No(s): F2P33253A
Model(s): PRDi/5

Applicant: Deister Electronics USA, Inc.

Radiated Spurious Emissions: 30 MHz to 200 MHz

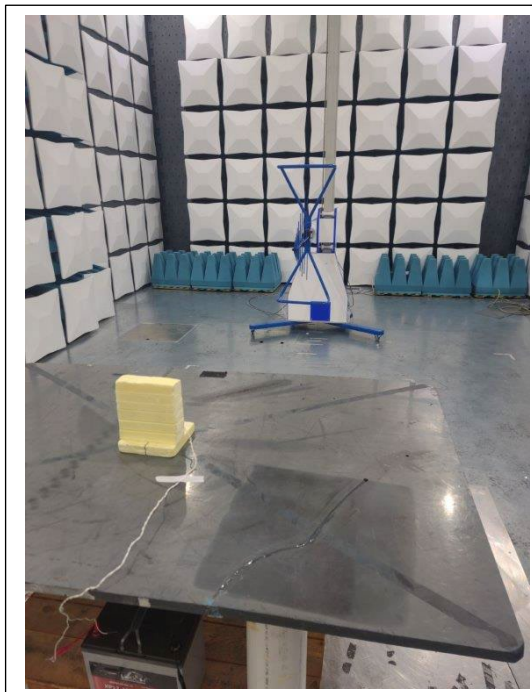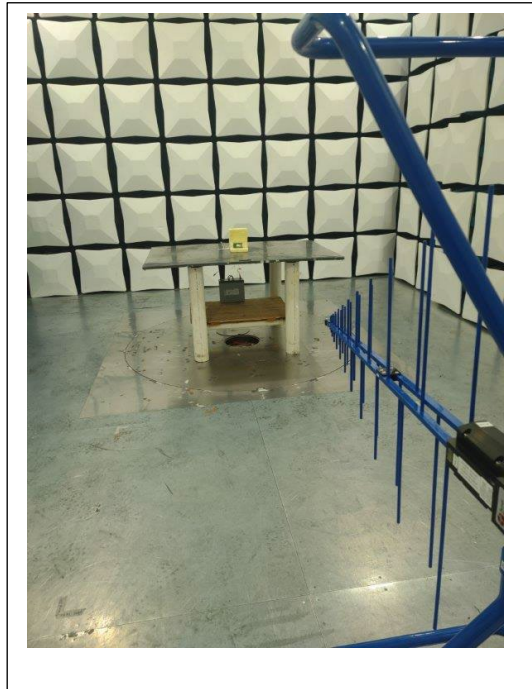




Order No(s): F2P33253A
Model(s): PRDi/5

Applicant: Deister Electronics USA, Inc.

Voltage Variations

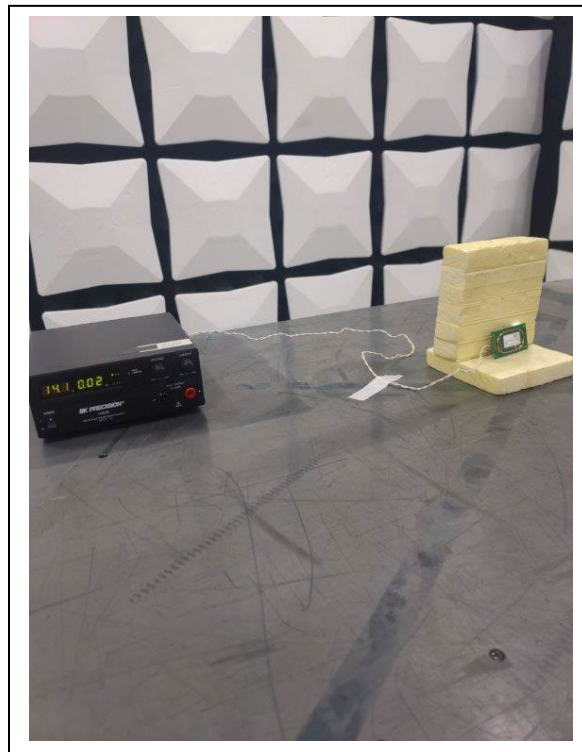



Order No(s): F2P33253A
Model(s): PRDi/5

Applicant: Deister Electronics USA, Inc.

Conducted Emissions

