

*FCC PART 15, SUBPART B and SUBPART C
TEST REPORT**for*
CUSTOMER CALLBOX
MODEL: CB461

Prepared for

INDYME SOLUTIONS, INC.
8295 AERO PLACE
SAN DIEGO, CA 92123

Prepared by: _____

MATT HARRISON

Approved by: _____

JOSH HANSEN**COMPATIBLE ELECTRONICS INC.**
20621 Pascal Way
LAKE FOREST, CA 92630
(949) 587-0400**DATE: MARCH 19, 2013**

	REPORT BODY	APPENDICES					TOTAL
		<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>	
PAGES	18	2	2	2	15	21	60

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
SIX HIGHEST RADIATED EMISSIONS READINGS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description Of Test Configuration - EMI	9
4.1.1 Photograph Test Configuration	9
4.1.1 Cable Construction and Termination	10
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment	12
6. TEST SITE DESCRIPTION	13
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
6.3 Facility Environmental Characteristics	13
7. CHARACTERISTICS OF THE TRANSMITTER	14
7.1 Channel Number and Frequency	14
7.2 Antenna	14
8. TEST PROCEDURES	15
8.1 RF Emissions	15
8.1.1 Conducted Emissions Test	15
8.1.2 Radiated Emissions (Spurious and Harmonics) Test	16
8.1.3 Radiated Emissions (Spurious and Harmonics) Test (Continued)	17
8.1.4 Bandwidth of the Fundamental	17
8.1.5 Fundamental Field Strength	17
8.1.7 Duty Cycle	18
8.1.8 Duration Time	18
9. TEST PROCEDURE DEVIATIONS	18
10. CONCLUSIONS	18

LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos • Test Setup Diagrams • Radiated Emissions Photos • Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of Test Site Below 1GHz
2	Plot Map And Layout of Test Site Above 1GHz

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST or any other agency of the U.S. Government.

Device Tested: Customer Callbox
Model: CB461

Product Description: The CB461 is a Customer Callbox. The call boxes function as local alert transmitters used for customer service notification in a retail service environment.

Modifications: The EUT was not modified in order to comply with specifications.

Manufacturer: Indyme Solutions, Inc.
8295 Aero Place
San Diego, CA 92123

Test Date: December 11th, 2012, January 30th, 2013, and March 11th, 2013.

Test Specifications: CFR Title 47, Part 15 Subpart B, Section 15.109 and Subpart C, Sections 15.205, 15.209 and 15.231

Test Procedure: ANSI C63.4: 2009
ANSI C63.10: 2009

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Radiated RF Emissions, 0.01 - 30MHz	Complies with the limits of CFR Title 47, Part 15, Subpart C, Section 15.205 & 15.209
2	Radiated RF Emissions, 30 - 4000 MHz	Complies with the limits of CFR Title 47, Part 15, Subpart B, Section 15.109, and Subpart C, Sections 15.205, 15.209, & 15.231
3	-20 dB Occupied Bandwidth of the Emission	Complies with the limits of CFR Title 47, Part 15, Subpart C, Section 15.231 (c).
4	Fundamental Field Strength	Complies with the limits of CFR Title 47, Part 15, Subpart C, Section 15.231 (b).
5	Duration Time	Complies with the limits of CFR Title 47, Part 15, Subpart C, Section 15.231 (a).

SIX HIGHEST RADIATED EMISSIONS READINGS

	Reading Type (PK / QP / AV)	Polarization (Vert / Horz)	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Delta (dB)	With RR or No RR	Test Distance
1	AV	H	303.825	72.21	74.92	-2.71	RR	3-meter
2	AV	V	303.825	66.78	74.92	-8.14	RR	3-meter
3	AV	H	303.825	65.87	74.92	-9.04	NO RR	3-meter
4	AV	H	607.60	42.84	54.93	-12.09	RR	3-meter
5	AV	H	607.60	41.44	54.93	-13.49	NO RR	3-meter
6	AV	V	607.60	40.45	54.93	-14.48	NO RR	3-meter

* - RR = Remote Reset.

1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Customer Callbox Model: CB461. The EMI measurements were performed according to the measurement procedure described in ANSI C63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the specification limits defined by CFR Title 47, Part 15, Subpart B Section 15.109 and Subpart C, Sections 15.205, 15.209 and 15.231.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Compatible Electronics 20621 Pascal Way, Lake Forest, California 92630.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Indyme Solutions, Inc.

Greg King Compliance Engineer

Compatible Electronics, Inc.

Matt Harrison Test Technician
Josh Hansen Lab Manager

2.4 Date Test Sample was Received

The test sample was received on December 11, 2012.

2.5 Disposition of the Test Sample

The sample remains at Compatible Electronics as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
CLA	Cigar Lighter Adaptor
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2009	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10 2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description Of Test Configuration - EMI

Setup and operation of the equipment under test.

Specifics of the EUT and Peripherals Tested

The Customer Callbox Model: CB461 (EUT) was set up in a table top configuration. The transmit antenna of the EUT is a wire soldered to the PCB, which is contained inside the plastic housing. The EUT was explored in 3 orthogonal axes (X-axis, Y-axis and Z-axis). The EUT was testing in two different configurations; The CB461 Stand alone, and connected to a Remote Reset (RR) Button.

The final test was performed in the worst case emission configuration. There was a fresh battery installed before testing.

The EUT was continuously transmitting throughout the tests.

The final data was taken in the mode described above in the X-Axis configuration without the Remote Reset and in the Y-Axis with the Remote Reset. Please see Appendix E for the data sheets.

4.1.1 Photograph Test Configuration



4.1.1 Cable Construction and Termination

Cable 1

This is a 3 meter, unshielded, round cable that connected the EUT to the Remote Reset. It is hardwired into both ends. The cable was bundled to a length of 1m. There is a ferrite at the EUT end of the Cable.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIALNUMBER	FCC ID
CUSTOMER CALLBOX (EUT)	INDYME SOLUTIONS, INC.	CB461	NONE	J69CB461
REMOTE RESET	INDYME	N/A	N/A	N/A

5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Computer	HP	Pavilion Slimline	MXV94400D8	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100219	9/26/2012	9/26/2013
Antenna, Loop	Com Power	AL-130	17085	01/26/2011	01/26/2013
Antenna, CombiLog	Com Power	AC-220	25857	5/25/2012	5/25/2013
Antenna, Horn 1-18GHz	Com Power	AH-118	071225	7/3/2012	7/3/2013
Pre-Amp	Com-Power	PAM-118	443009	6/11/2012	6/11/2013
Mast, Antenna Positioner	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Antenna Mast	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Turntable	Sunol Science Corporation	FM 2001	N/A	N/A	N/A
Mast and Turntable Controller	Sunol Science Corporation	SC104V	020808-1	N/A	N/A

6. TEST SITE DESCRIPTION**6.1 Test Facility Description**

Please refer to section 2.1 and 7.1 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was placed in the center of the table when configured without the remote reset cable attached. When the remote reset cable was attached, the EUT was placed on the rear of the table with the cable bundled and hanging over the edge in accordance with ANSI C63.10. The test site receive antenna distance was measured from the closest periphery of the EUT setup.

The EUT was not grounded.

6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.


7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Number and Frequency

1 == 303.825 MHz

7.2 Antenna

The transmit antenna of the EUT is a 1¼" wire soldered to the PCB, which is contained inside the plastic housing. A photo of the PCB and 1¼" wire is shown below:

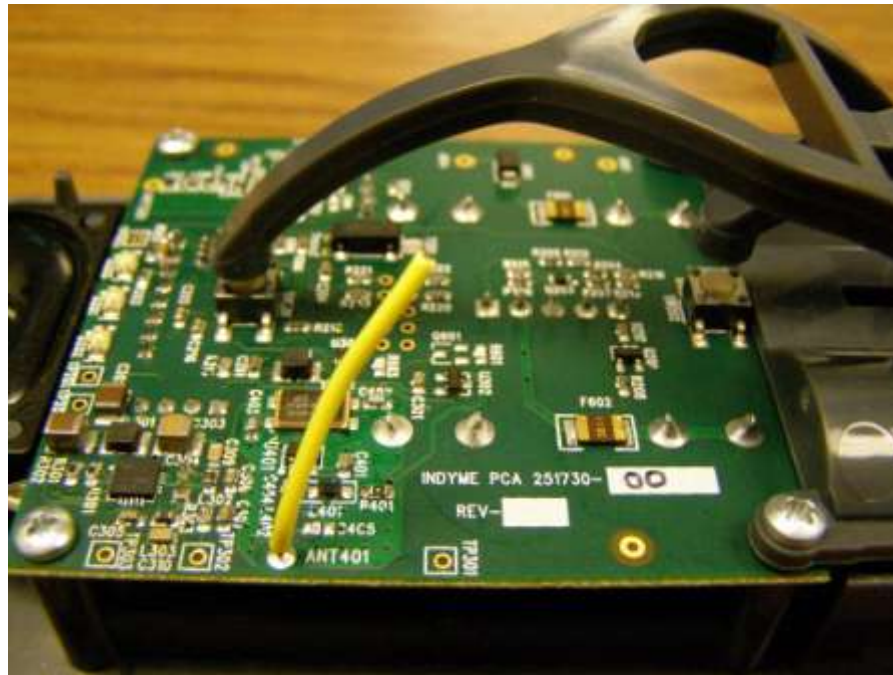

8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test

(This test was not performed.)

Test Results:

The EUT is battery powered; therefore this test was not performed.

8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps.

The spurious emission frequencies above 1 GHz were investigated with the built-in average detector.

The harmonic emissions frequencies were investigated with the duty cycle correction factor.

The measurement bandwidths and transducers used for the radiated emissions (Spurious) tests were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 1 GHz	120 kHz	CombiLog Antenna
1 GHz to 4 GHz	1 MHz	Horn Antenna

The Semi-Anechoic test sites of Compatible Electronics, Inc., Lab R and Lab P (Lake Forest) were used for all tests. These test sites are set up according to ANSI C63.10. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Final data was collected in the worst case configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The loop antenna was also rotated in the horizontal and vertical axis in order to ensure accurate results.

8.1.3 Radiated Emissions (Spurious and Harmonics) Test (Continued)

The EUT was continuously transmitting during the test. The EUT was tested at a 3-meter test distance to obtain the final test data. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with the requirements of CFR Title 47, Part 15, Subpart B, Section 15.109 **Class B**; and CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209 and 15.231. There were no emissions found below 30MHz.

8.1.4 Bandwidth of the Fundamental

The -20 dB bandwidth was checked using the EMI Receiver to see that the emissions were wholly within the 0.25% of the operating frequency centered on the fundamental frequency. The RBW was set to 1-5% of the expected bandwidth. A Plot of the -20 dB bandwidth is located in Appendix E.

Test Results:

The EUT complies with the requirements of CFR Title 47, Part 15, Subpart C, section 15.231 (c)

8.1.5 Fundamental Field Strength

The EUT was continuously transmitting during the test and measured using the EMI Receiver at a 3-meter test distance to obtain the final test data. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.231 (b).

8.1.7 Duty Cycle

Duty Cycle Correction Factor = -14.774 dB

$$\delta(\text{dB}) = 20 \log \left[\sum (nt_1 + mt_2 + \dots + \xi t_x) / T \right]$$

where

n is the number of pulses of duration t_1

m is the number of pulses of duration t_2

ξ is the number of pulses of duration t_x

T is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

$$1.014028\text{ms} \times 18 = 18.252504$$

$$18.252504 / 100\text{ms} = 0.18252504$$

$$20 \log (0.18252504) = -14.774 \text{ dB correction factor}$$

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.231.

8.1.8 Duration Time

The Duration Time was measured using the EMI Receiver and a near field probe to obtain the final test data. The final qualification data sheet is located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.231 (a).

9. TEST PROCEDURE DEVIATIONS

The test procedures were not deviated from throughout all tests.

10. CONCLUSIONS

The Customer Callbox Model: CB461 meets all of the specification limits defined in CFR Title 47, Part 15, Subpart B, Section 15.109 for the digital portion; and the limits defined in Subpart C, sections 15.205, 15.209, and 15.231 for the transmitter portion.



APPENDIX A

LABORATORY RECOGNITIONS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Taiwan and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025 an ISO 9002 equivalent. Please follow the link to the NIST site for each of our facilities NVLAP certificate and scope of accreditation.

NVLAP listing links

Agoura Division - <http://ts.nist.gov/Standards/scopes/2000630.htm>

Brea Division - <http://ts.nist.gov/Standards/scopes/2005280.htm>

Silverado/Lake Forest Division - <http://ts.nist.gov/Standards/scopes/2005270.htm>



ANSI listing

[CETCB](#)

<https://www.ansica.org/wwwversion2/outside/ALLdirectoryDetails.asp?menuID=1&prgID=3&orgID=123&status=4>



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for EMC under the US/EU Mutual Recognition Agreement (MRA).



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for Taiwan/BSMI under the US/APEC (Asia-Pacific Economic Cooperation) Mutual Recognition Agreement (MRA).

We are also certified/listed for IT products by the following country/agency:



VCCI Listing, from VCCI site

[Enter "Compatible" in search form](http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html) http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html



FCC Listing, from FCC OET site

[FCC test lab search](https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm) <https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm>



Compatible Electronics IC listing can be found at:

<http://www.ic.gc.ca/eic/site/ic1.nsf/eng/home>

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



APPENDIX B

MODIFICATIONS TO THE EUT

MODIFICATIONS TO THE EUT

There were no modifications made to the EUT.



APPENDIX C

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Customer Callbox
Model: CB461
S/N: None

Additional Model Numbers:

Customer Callbox with Remote Reset
Model: CB461
S/N: None.





APPENDIX D

DIAGRAMS, CHARTS, AND PHOTOS

**FIGURE 1: PLOT MAP AND LAYOUT OF TEST SITE
BELOW 1 GHZ**

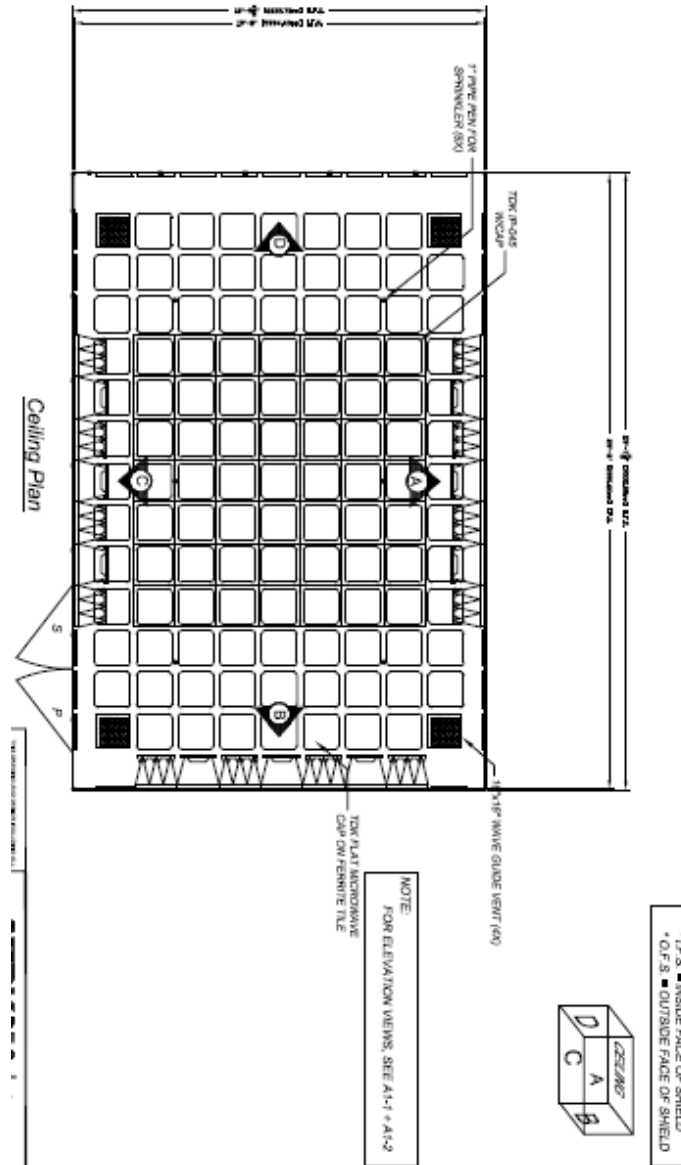


Figure 1 TDK FAC-3 test chamber

COM-POWER AC-220**LAB R - COMBILOG ANTENNA****S/N: 25857****CALIBRATION DUE: May 25, 2013**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	17.8	180	9.4
35	18.4	200	9.0
40	19.2	250	12.0
45	17.2	300	13.4
50	17.2	300	13.4
60	13.5	400	15.0
70	8.9	500	17.3
80	6.0	600	17.8
90	7.1	700	20.0
100	8.0	800	20.5
120	9.2	900	20.8
140	7.5	1000	22.4
160	8.3		


COM-POWER AH-118**HORN ANTENNA****S/N: 071225****CALIBRATION DUE: JULY 3, 2013**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
1000	26.5	9500	40.4
1500	27.2	10000	40.3
2000	31.5	10500	41.7
2500	31.9	11000	42.1
3000	32.7	11500	42.3
3500	34.0	12000	42.6
4000	33.5	12500	41.4
4500	34.9	13000	42.7
5000	36.2	13500	43.6
5500	36.6	14000	42.4
6000	36.8	14500	42.7
6500	37.4	15000	45.4
7000	39.4	15500	45.1
7500	39.6	16000	42.9
8000	42.4	16500	44.0
8500	40.3	17000	46.8
9000	39.6	17500	47.5
		18000	46.6

COM-POWER AL-130**LOOP ANTENNA****S/N: 17085****CALIBRATION DUE: JANUARY 26, 2013**

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)	FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-41.14	10.36	0.8	-40.91	10.59
0.01	-40.98	10.52	0.9	-40.8	10.7
0.02	-40.87	10.63	1	-40.81	10.69
0.03	-40.13	11.37	2	-40.51	10.99
0.04	-40.42	11.08	3	-40.54	10.96
0.05	-41.06	10.44	4	-40.44	11.06
0.06	-41.07	10.43	5	-40.32	11.18
0.07	-41.12	10.38	6	-40.69	10.81
0.08	-41.03	10.47	7	-40.37	11.13
0.09	-41.04	10.46	8	-39.99	11.51
0.1	-41.26	10.24	9	-40.00	11.5
0.2	-41.23	10.27	10	-40.08	11.42
0.3	-41.26	10.24	15	-42.36	9.14
0.4	-41.14	10.36	20	-38.75	12.75
0.5	-41.24	10.26	25	-40.70	10.8
0.6	-41.22	10.28	30	-41.09	10.41
0.7	-41.12	10.38			

COM-POWER PAM-118**1-18GHz - PREAMPLIFIER**

S/N: 443009

CALIBRATION DUE: JUNE 11, 2013

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
500	26.53	5500	24.39
1000	25.23	6000	23.96
1100	25.53	6500	23.39
1200	26.1	7000	22.06
1300	26.03	7500	21.97
1400	26.06	8000	22.47
1500	25.97	8500	22.65
1600	26.04	9000	23.04
1700	25.84	9500	23.95
1800	26.01	10000	23.51
1900	25.92	11000	22.75
2000	25.89	12000	22.35
2500	26.06	13000	21.68
3000	26.13	14000	21.88
3500	25.64	15000	22.15
4000	25.62	16000	22.15
4500	25.43	17000	22.34
5000	24.92	18000	22.11



VIEW 1

INDYME SOLUTIONS, INC.
CUSTOMER CALLBOX
MODEL: CB461 WITH OUT REMOTE RESET
FCC SUBPART B AND C – RADIATED SPURIOUS EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



VIEW 2

INDYME SOLUTIONS, INC.
CUSTOMER CALLBOX
MODEL: CB461 WITH OUT REMOTE RESET
FCC SUBPART B AND C – RADIATED SPURIOUS EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



VIEW 1

INDYME SOLUTIONS, INC.
CUSTOMER CALLBOX
MODEL: CB461 WITH REMOTE RESET
FCC SUBPART B AND C – RADIATED SPURIOUS EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



VIEW 2

INDYME SOLUTIONS, INC.
CUSTOMER CALLBOX
MODEL: CB461 WITH REMOTE RESET
FCC SUBPART B AND C – RADIATED SPURIOUS EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



VIEW 1

INDYME SOLUTIONS, INC.
CUSTOMER CALLBOX
MODEL: CB461

FCC SUBPART B AND C – RADIATED SPURIOUS EMISSIONS ABOVE 1GHZ

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



VIEW 2

INDYME SOLUTIONS, INC.
CUSTOMER CALLBOX
MODEL: CB461

FCC SUBPART B AND C – RADIATED SPURIOUS EMISSIONS ABOVE 1GHZ

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



VIEW 1

INDYME SOLUTIONS, INC.
CUSTOMER CALLBOX
MODEL: CB461 WITH REMOTE RESET
FCC SUBPART B AND C – RADIATED SPURIOUS EMISSIONS ABOVE 1GHZ

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



VIEW 2

INDYME SOLUTIONS, INC.
CUSTOMER CALLBOX
MODEL: CB461 WITH REMOTE RESET
FCC SUBPART B AND C – RADIATED SPURIOUS EMISSIONS ABOVE 1GHZ

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



APPENDIX E

DATA SHEETS



RADIATED EMISSIONS


SPURIOUS AND HARMONICS

DATA SHEETS

Title: FCC 15.209
File: Radiated Pre-Scan 30-1000Mhz.set
Operator: Matt Harrison
EUT Type: CB461 With Out Remote Reset (X-Axis).
EUT Condition: Constantly Transmitting.
Comments:
Temp: 77f
Hum: 24%
Battery Powered

1/30/2013 3:06:47 PM
Sequence: Preliminary Scan

Compatible Electronics, Inc. FAC-3 (Lab-P)

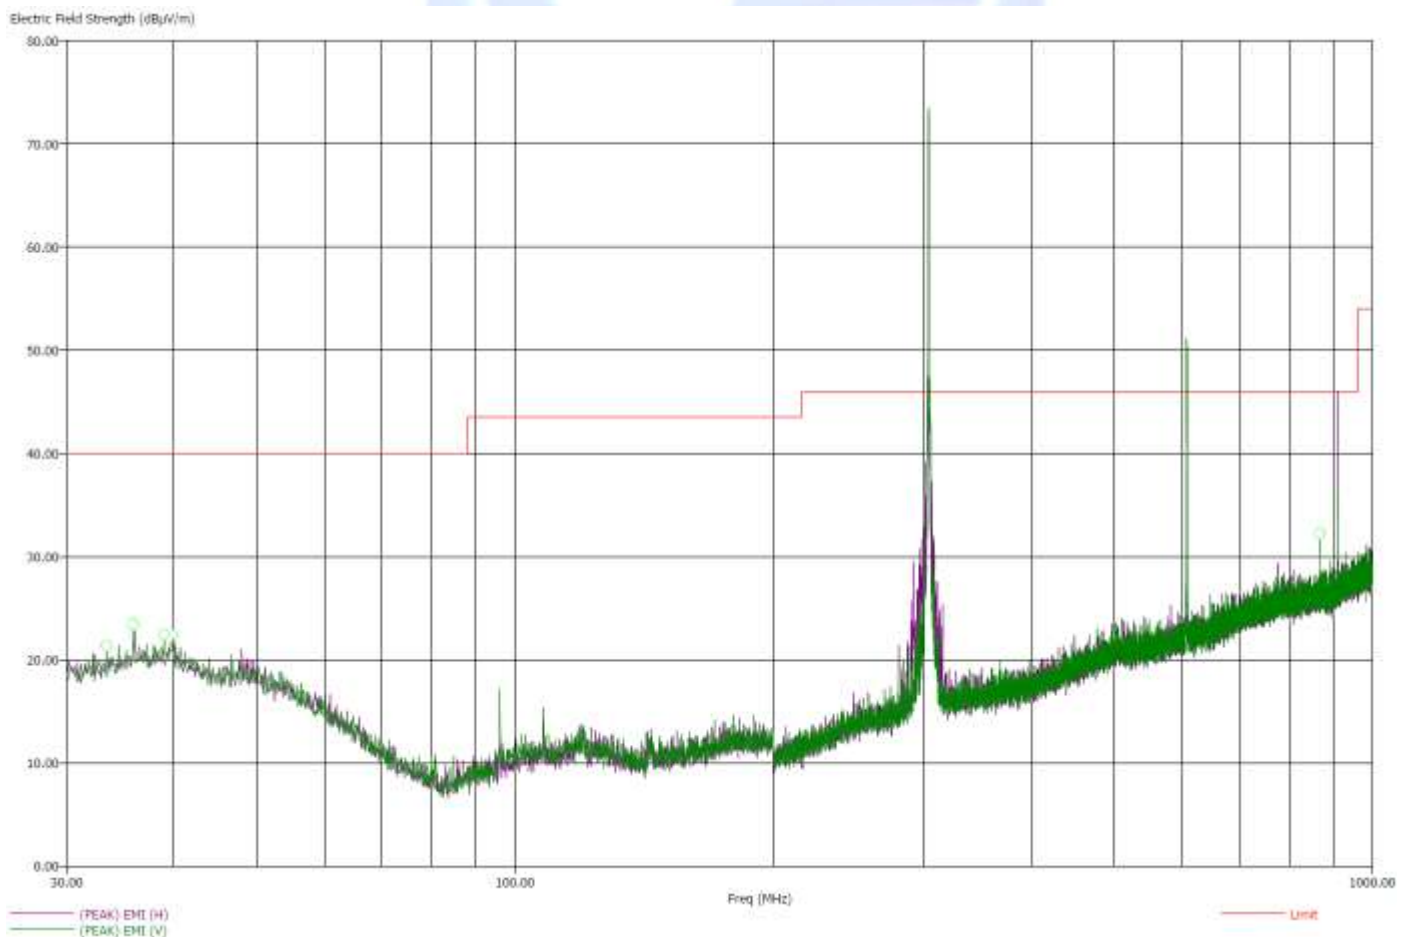

No Spurious Emissions Found Below 30MHz or above 1000MHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.231
File: Radiated Final 30-1000Mhz.set
Operator: Matt Harrison
EUT Type: CB461 With Out Remote Reset (X-Axis).
EUT Condition: Constantly Transmitting.
Comments:
Temp: 77f
Hum: 24%
Battery Powered

1/30/2013 3:27:54 PM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC- 3 (LAB P)


Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dBuV/m)	(PEAK) EMI (dBuV/m)	Limit (dBuV/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer (dB)	Cable (dB)
33.40	-25.45	14.55	20.10	40.00	H	182.50	167.52	18.21	0.54
35.90	-24.30	15.70	21.60	40.00	V	59.00	237.29	18.56	0.56
36.00	-18.00	22.00	25.37	40.00	H	353.75	215.76	18.57	0.56
39.00	-24.29	15.71	21.10	40.00	V	359.00	210.52	19.03	0.59
39.80	-24.00	16.00	21.28	40.00	H	327.75	234.35	19.17	0.60
869.40	-16.09	29.91	33.66	46.00	V	351.00	113.88	20.71	3.78

No Spurious Emissions Found Below 30MHz or above 1000MHz

Title: FCC 15.209
File: Radiated Pre-Scan 30-1000Mhz_RR.set
Operator: Matt Harrison
EUT Type: CB461 With Remote Reset (Y-Axis).
EUT Condition: Constantly Transmitting.
Comments:
Temp: 77f
Hum: 24%
Battery Powered

1/30/2013 3:55:36 PM
Sequence: Preliminary Scan

Compatible Electronics, Inc. FAC-3 (Lab-P)

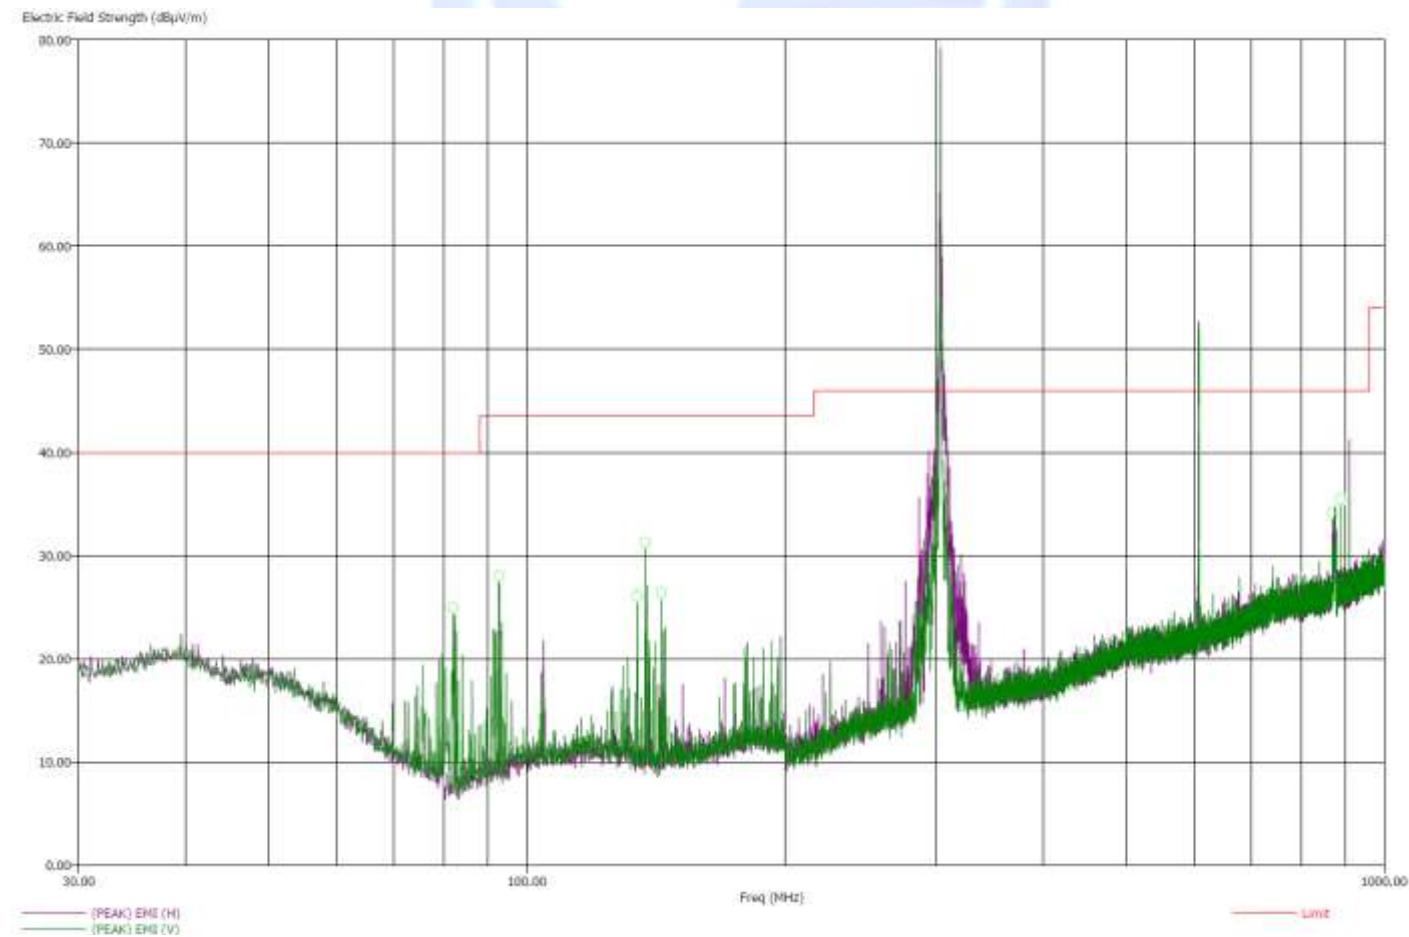

No Spurious Emissions Found Below 30MHz or above 1000MHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.231
File: Radiated Final 30-1000Mhz_RR.set
Operator: Matt Harrison
EUT Type: CB461 With Remote Reset (Y-Axis).
EUT Condition: Constantly Transmitting.
Comments:
Temp: 77f
Hum: 24%
Battery Powered

1/30/2013 4:23:55 PM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC- 3 (LAB P)

Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dBuV/m)	(PEAK) EMI (dBuV/m)	Limit (dBuV/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer (dB)	Cable (dB)
82.10	-30.26	9.74	28.48	40.00	V	217.25	122.35	6.23	0.74
92.90	-28.27	15.25	31.59	43.52	V	192.00	140.76	7.37	0.90
134.70	-31.95	11.57	28.04	43.52	V	98.25	108.00	7.93	1.24
137.50	-27.00	16.52	33.00	43.52	V	90.50	131.70	7.69	1.25
143.60	-31.31	12.21	28.64	43.52	V	104.50	113.29	7.65	1.28
870.80	-17.70	28.30	32.28	46.00	H	254.75	377.41	20.72	3.78
891.30	-22.73	23.27	28.60	46.00	V	16.00	169.82	20.78	3.87

No Spurious Emissions Found Below 30MHz or above 1000MHz

HARMONIC EMISSIONS

FCC 15.231

Indyme

Call Button

Model: CB461 With Out Remote Reset

Duty Cycle Correction Factor: -14.77

Date: 1/30/2013

Lab: P

TestedBy: Matt Harrison

Harmonic Emissions - Vertical.

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
607.60	55.22	V	--	--	Peak	1.00	250	
607.60	40.45	V	54.93	-14.48	Avg	1.00	250	
911.40	42.91	V	--	--	Peak	1.70	95	
911.40	28.14	V	54.93	-26.79	Avg	1.70	95	
1215.20		V	--	--	Peak			No Emission Found
1215.20		V	--	--	Avg			In Restricted Band
1519.00		V	--	--	Peak			No Emission Found
1519.00		V	--	--	Avg			In Restricted Band
1822.80		V	--	--	Peak			No Emission Found
1822.80		V	--	--	Avg			No Emission Found
2126.60		V	--	--	Peak			No Emission Found
2126.60		V	--	--	Avg			No Emission Found
2430.40		V	--	--	Peak			No Emission Found
2430.40		V	--	--	Avg			No Emission Found
2734.20		V	--	--	Peak			No Emission Found
2734.20		V	--	--	Avg			In Restricted Band
3038.00		V	--	--	Peak			No Emission Found
3038.00		V	--	--	Avg			No Emission Found

Test distance

3 meter

HARMONIC EMISSIONS

FCC 15.231

Indyme

Call Button

Model: CB461 With Out Remote Reset

Duty Cycle Correction Factor: -14.77

Date: 1/30/2013

Lab: P

TestedBy: Matt Harrison

Harmonic Emissions - Horizontal.

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
607.60	56.21	H	--	--	Peak	1.55	360	
607.60	41.44	H	54.93	-13.49	Avg	1.55	360	
911.40	48.96	H	--	--	Peak	1.00	0	
911.40	34.19	H	54.93	-20.74	Avg	1.00	0	
1215.20		H	--	--	Peak			No Emission Found
1215.20		H	--	--	Avg			In Restricted Band
1519.00		H	--	--	Peak			No Emission Found
1519.00		H	--	--	Avg			In Restricted Band
1822.80		H	--	--	Peak			No Emission Found
1822.80		H	--	--	Avg			No Emission Found
2126.60		H	--	--	Peak			No Emission Found
2126.60		H	--	--	Avg			No Emission Found
2430.40		H	--	--	Peak			No Emission Found
2430.40		H	--	--	Avg			No Emission Found
2734.20		H	--	--	Peak			No Emission Found
2734.20		H	--	--	Avg			In Restricted Band
3038.00		H	--	--	Peak			No Emission Found
3038.00		H	--	--	Avg			No Emission Found

Test distance

3 meter

HARMONIC EMISSIONS

FCC 15.231

Indyme
Call Button
Model: CB461 With Remote Reset
Duty Cycle Correction Factor: -14.77

Date: 3/11/2013
Lab: P
TestedBy: Matt Harrison

Harmonic Emissions - Vertical.

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
607.60	54.59	V	--	--	Peak	1.00	260	
607.60	39.82	V	54.93	-15.11	Avg	1.00	260	
911.40	41.41	V	--	--	Peak	1.15	160	
911.40	26.64	V	54.93	-28.29	Avg	1.15	160	
1215.20		V	--	--	Peak			No Emission Found
1215.20		V	--	--	Avg			In Restricted Band
1519.00	39.95	V	--	--	Peak	1.30	0	In Restricted Band
1519.00	25.18	V	53.98	-28.80	Avg	1.30	0	In Restricted Band
1822.80		V	--	--	Peak			No Emission Found
1822.80		V	--	--	Avg			No Emission Found
2126.60		V	--	--	Peak			No Emission Found
2126.60		V	--	--	Avg			No Emission Found
2430.40		V	--	--	Peak			No Emission Found
2430.40		V	--	--	Avg			No Emission Found
2734.20		V	--	--	Peak			No Emission Found
2734.20		V	--	--	Avg			In Restricted Band
3038.00		V	--	--	Peak			No Emission Found
3038.00		V	--	--	Avg			No Emission Found

Test distance
3 meter

HARMONIC EMISSIONS

FCC 15.231

Indyme

Call Button

Model: CB461 With Remote Reset

Duty Cycle Correction Factor: -14.77

Date: 1/30/2013

Lab: P

TestedBy: Matt Harrison

Harmonic Emissions - Horizontal.

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
607.60	57.61	H	--	--	Peak	1.00	209	
607.60	42.84	H	54.93	-12.09	Avg	1.00	209	
911.40	46.48	H	--	--	Peak	1.00	50	
911.40	31.71	H	54.93	-23.22	Avg	1.00	50	
1215.20		H	--	--	Peak			No Emission Found
1215.20		H	--	--	Avg			In Restricted Band
1519.00	39.61	H	--	--	Peak	1.88	250	In Restricted Band
1519.00	24.84	H	53.98	-29.14	Avg	1.88	250	In Restricted Band
1822.80		H	--	--	Peak			No Emission Found
1822.80		H	--	--	Avg			No Emission Found
2126.60		H	--	--	Peak			No Emission Found
2126.60		H	--	--	Avg			No Emission Found
2430.40		H	--	--	Peak			No Emission Found
2430.40		H	--	--	Avg			No Emission Found
2734.20		H	--	--	Peak			No Emission Found
2734.20		H	--	--	Avg			In Restricted Band
3038.00		H	--	--	Peak			No Emission Found
3038.00		H	--	--	Avg			No Emission Found

Test distance

3 meter



-20 dB BANDWIDTH

DATA SHEETS


Title: FCC 15.231 (c)
File: CB461 -20dB Occupied Bandwidth
Operator: Matt Harrison
EUT Type: CB461
EUT Condition: Continuously Transmitting
Comments:
Temp: 66f
Hum: 46%

12/11/2012 10:56:10


Compatible Electronics, Inc. FAC- 3 (LAB P)

Freq (MHz)	BW (kHz)	Limit (kHz)	Margin (kHz)
303.825	50.10	759.56	-709.46

-20 dB Occupied Bandwidth Plot

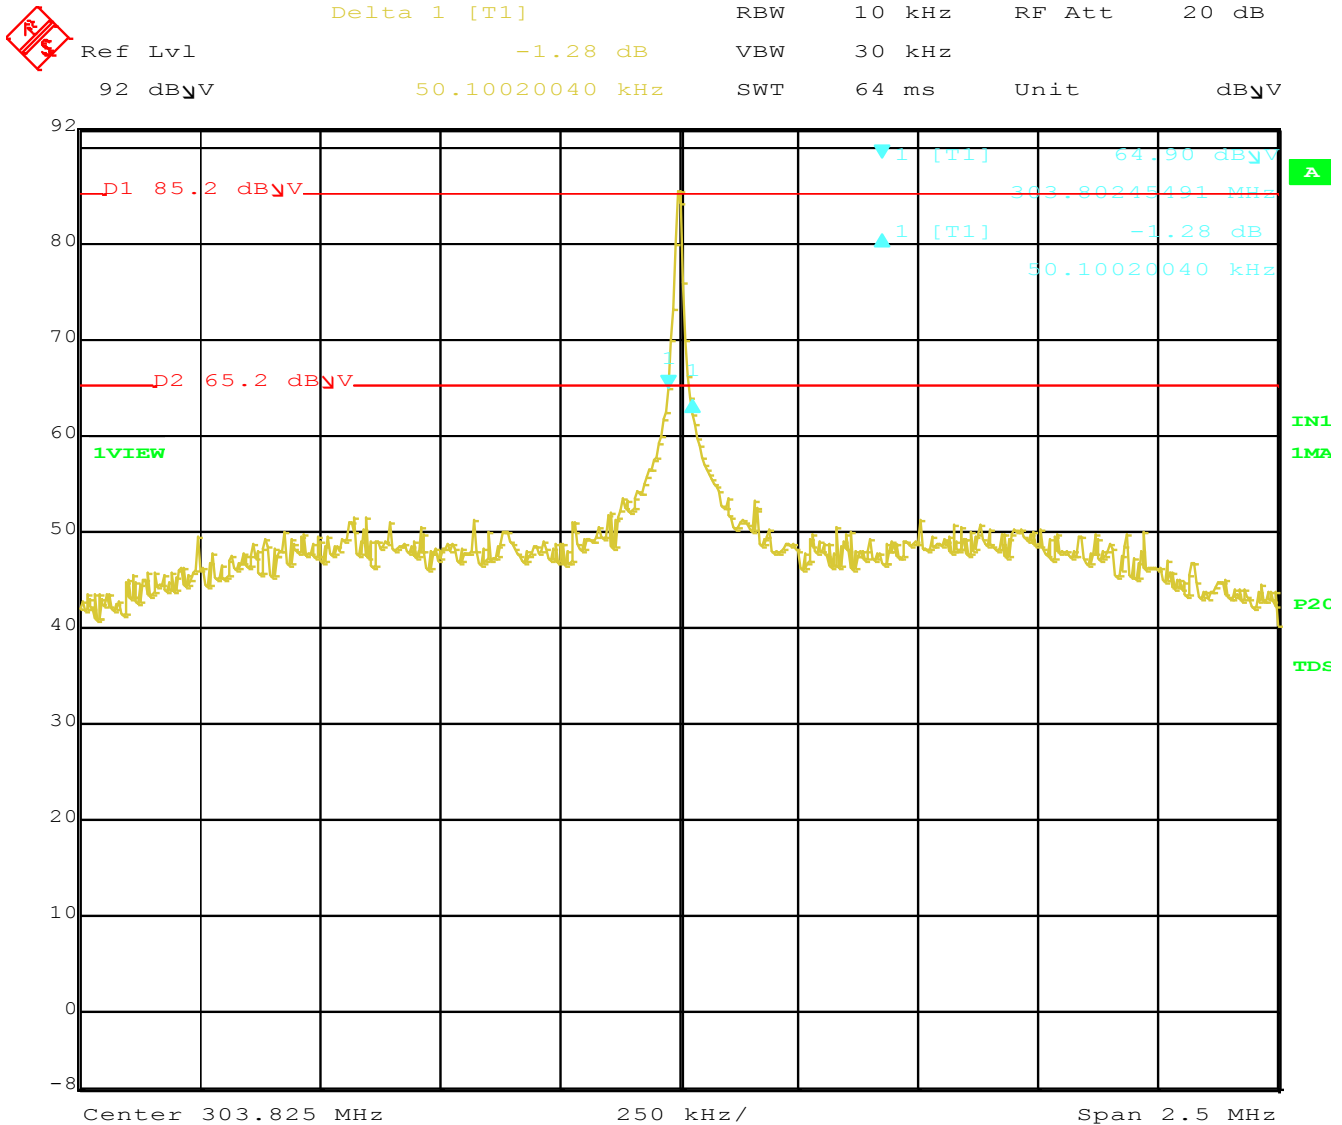

Title: Indyme CB461
Comment A: 20dB Bandwidth.
Date: 11.DEC.2012 10:56:10

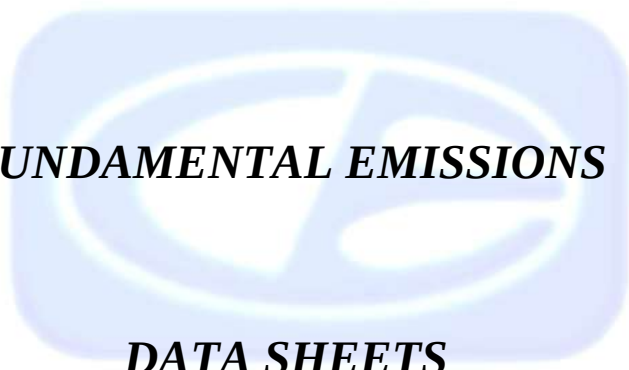

FUNDAMENTAL EMISSIONS

DATA SHEETS

Title: FCC 15.231
File: CB461 Peak Transmit EMI
Operator: Matt Harrison
EUT Type: CB461 With Out Remote Reset
EUT Condition: Continuously Transmitting
Comments: Worst Case Orientation: X
Temp: 66f
Hum: 46%

1/30/2012 1:40:36 PM


Compatible Electronics, Inc. FAC- 3 (LAB P)

Freq (MHz)	Peak EMI (dB μ V/m)	AVG (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
303.825 (H)	80.65	65.87	74.92	-9.04
303.825 (V)	75.07	60.29	74.92	-14.62

FUNDAMENTAL EMISSIONS



Marker 1 [T2] RBW 100 kHz RF Att 20 dB
Ref Lvl 80.65 dBμV VBW 300 kHz
92 dBμV 303.79747234 MHz SWT 5.5 ms Unit dBμV

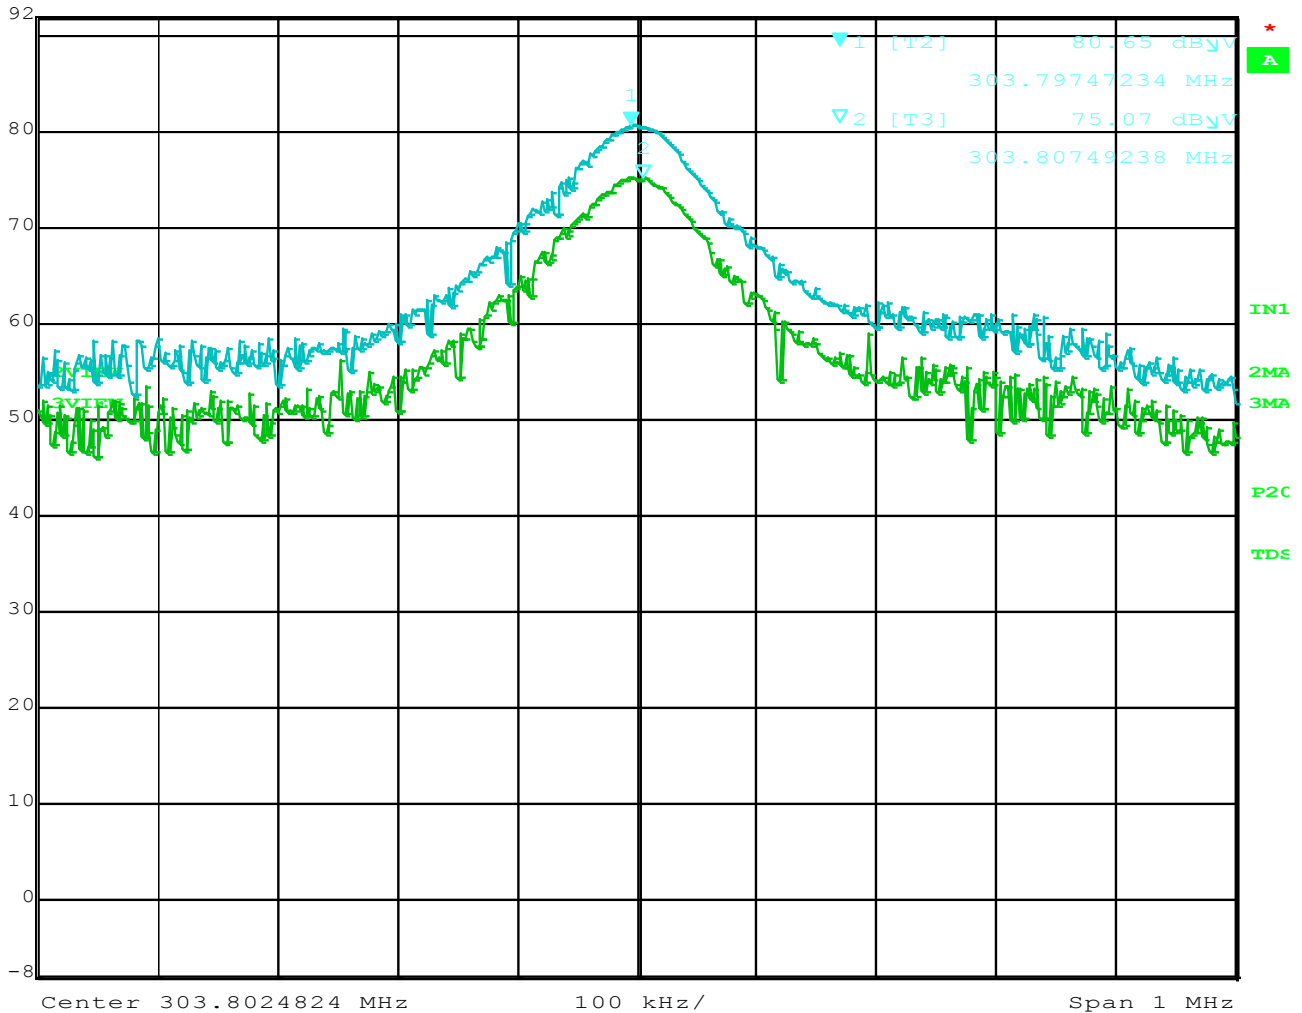

Title: CB461
Comment A: Field Strength
Date: 30.JAN.2013 14:40:36


Title: FCC 15.231
File: CB461 Peak Transmit EMI
Operator: Matt Harrison
EUT Type: CB461 With Remote Reset
EUT Condition: Continuously Transmitting
Comments: Worst Case Orientation: Y W/#0443665806 Ferrite @ EUT (9cm Away with 1 Loop)
Temp: 66f
Hum: 46%

3/11/2013 16:44:21 PM

Compatible Electronics, Inc. FAC- 3 (LAB P)

Freq (MHz)	Peak EMI (dB μ V/m)	AVG (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
303.825 (H)	86.98	72.21	74.92	-2.71
303.825 (V)	81.55	66.78	74.92	-8.14

FUNDAMENTAL EMISSIONS

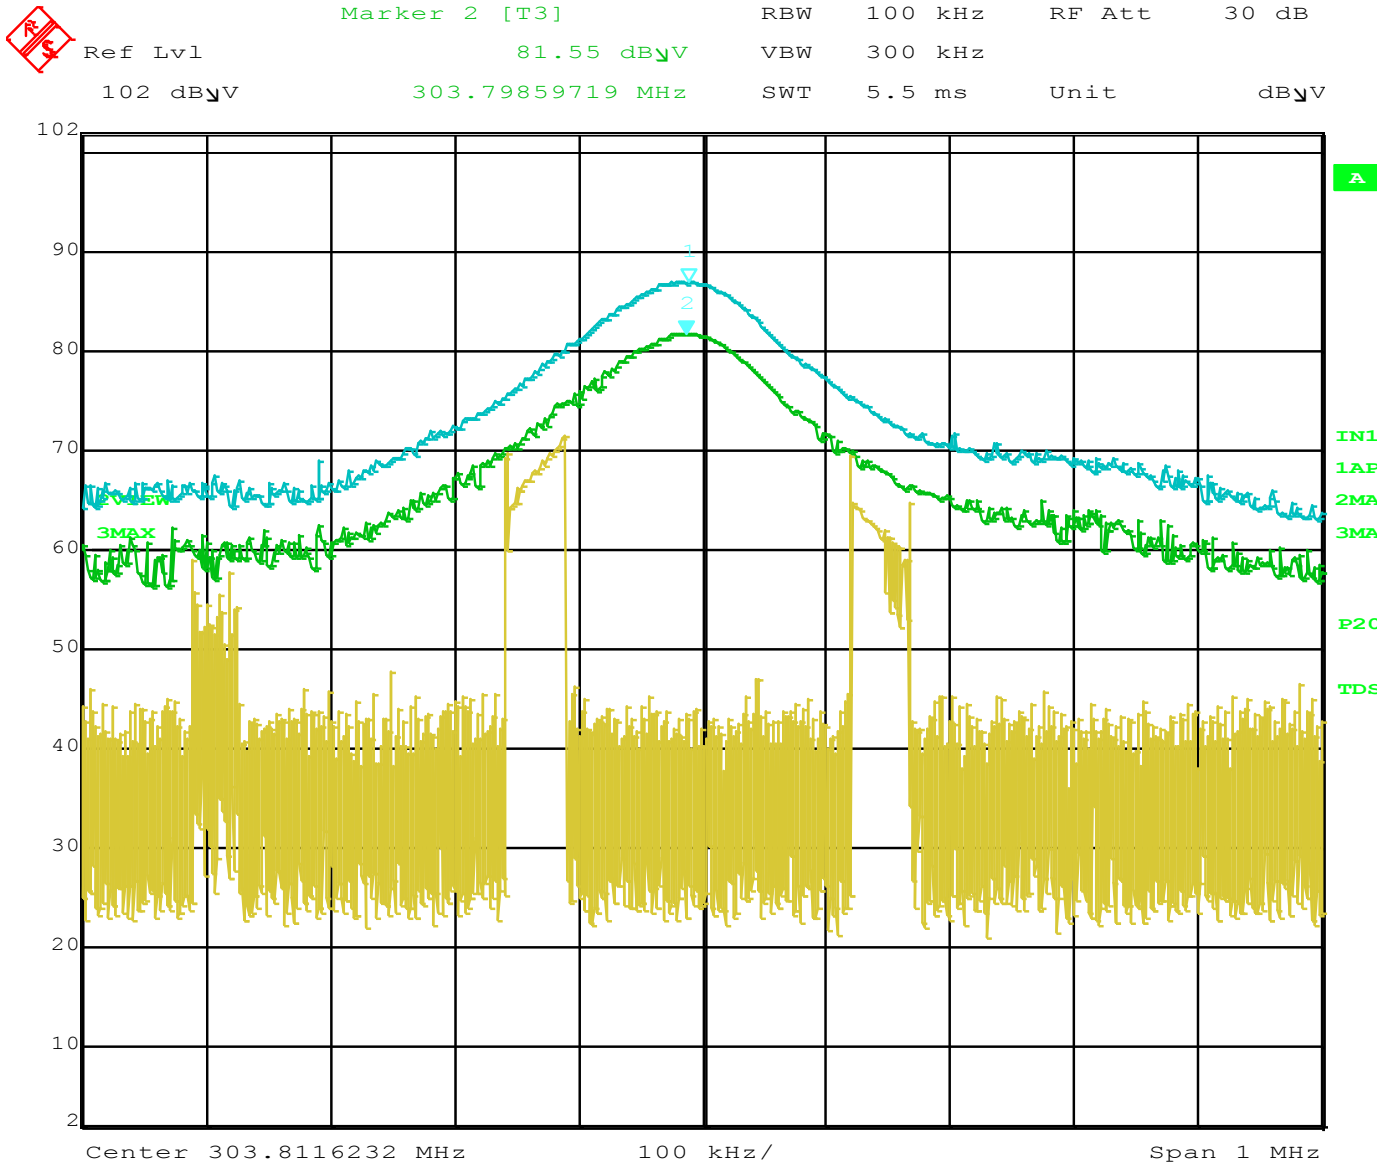


Title: CB461 With Remote Reset.
Comment A: Field Strength With #0443665806 Ferrite W/1 Loop
EUT.
Date: 11.MAR.2013 16:44:21

Duty Cycle



Delta 1 [T1] RBW 100 kHz RF Att 20 dB
Ref Lvl -3.03 dB VBW 300 kHz
92 dB μ V 1.014028 ms SWT 2 ms Unit dB μ V

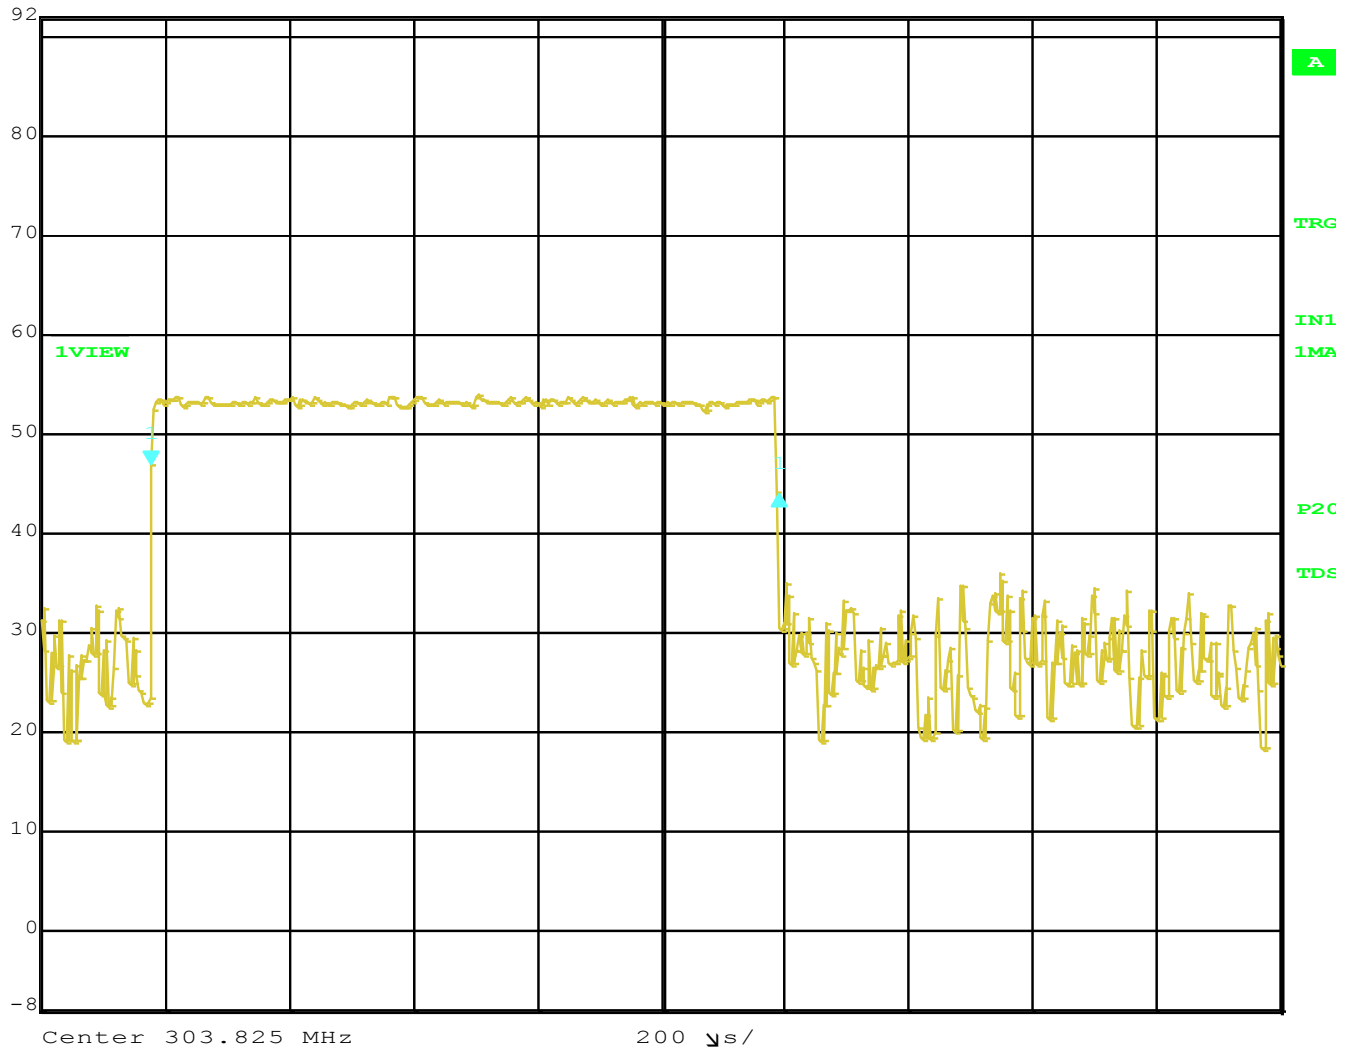


Title: Indyme CB461
Comment A: Duty Cycle: Pulse Width
Date: 11.DEC.2012 09:25:00

Time of Pulse = 1.014028 mS

Duty Cycle



Marker 1 [T1] RBW 100 kHz RF Att 20 dB
Ref Lvl 33.70 dB μ V VBW 300 kHz
92 dB μ V 1.202405 ms SWT 100 ms Unit dB μ V

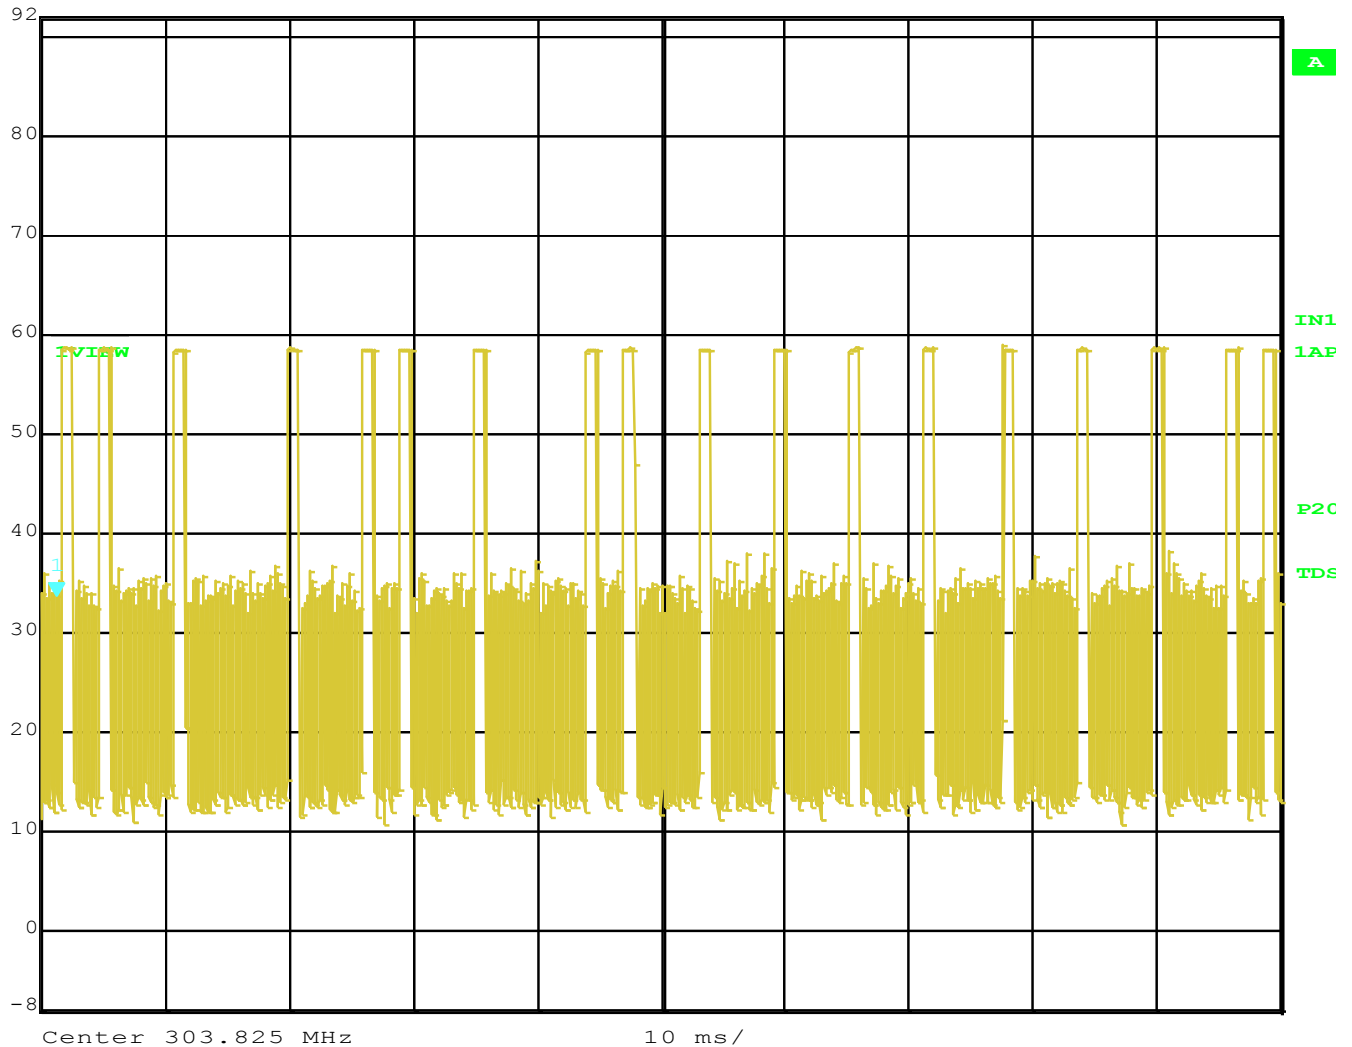

Title: Indyme CB461

Comment A: Duty Cycle: Number of Pulses


Date: 11.DEC.2012 09:05:18

Number of Pulses in Worst Case 100 mS = 18
Duty Cycle = 1.014028 mS*18 = 18.252504 mS = 18.25%
The Peak to Average Duty Cycle Correction = 14.77dB

Transmit Duration



Delta 1 [T1] RBW 100 kHz RF Att 20 dB
Ref Lvl -0.62 dB VBW 300 kHz
92 dBμV 2.795391 s SWT 5 s Unit dBμV

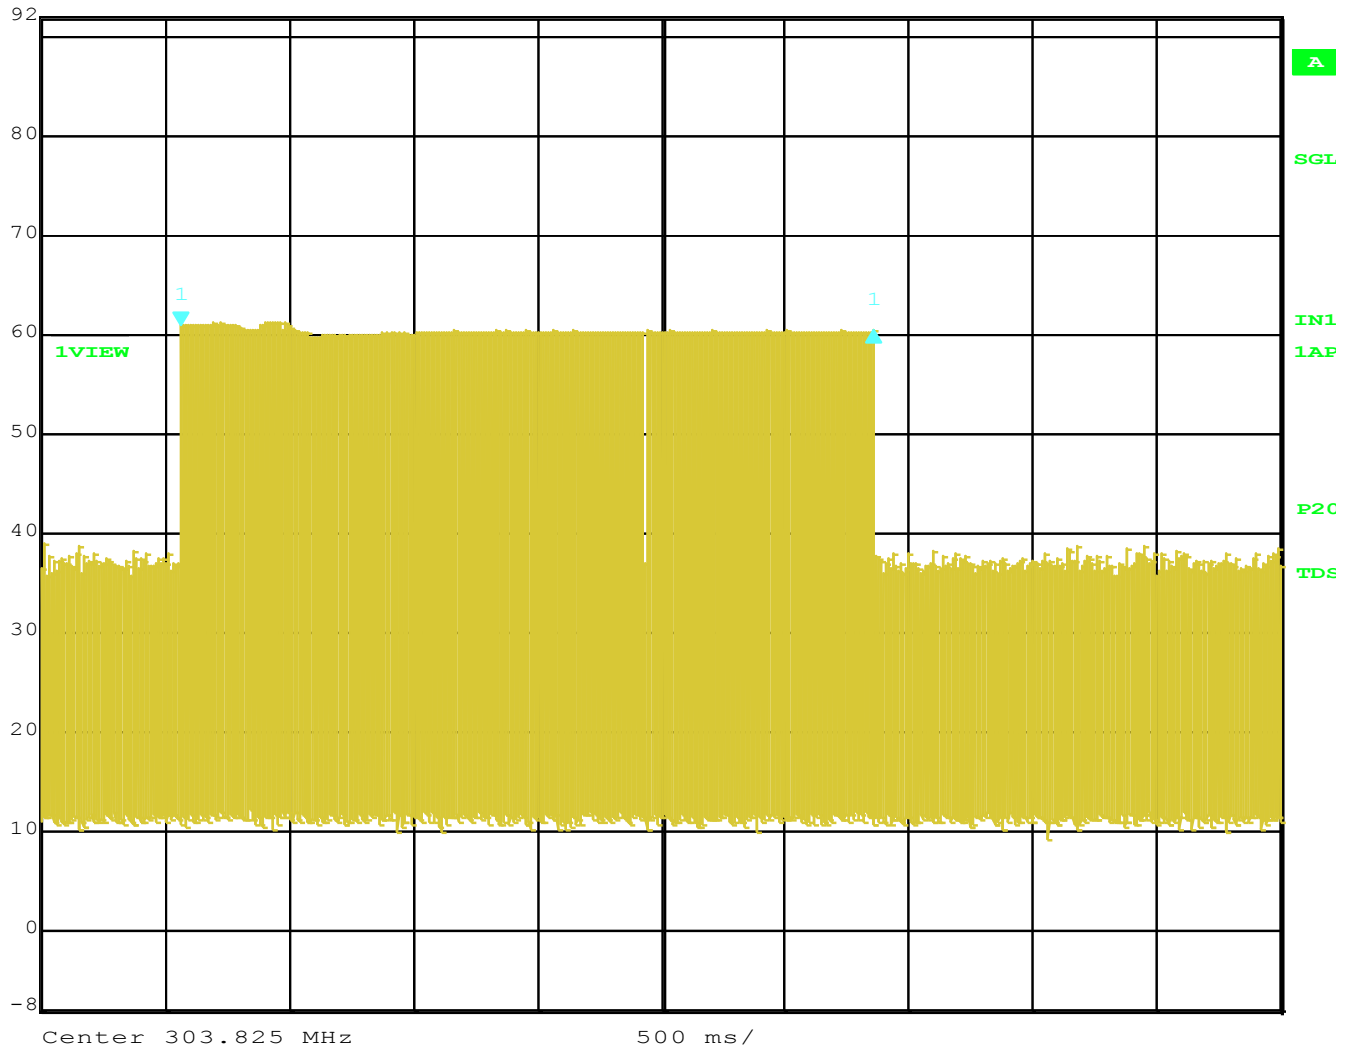

Title: Indyme CB461

Comment A: Total On Time

Date: 11.DEC.2012 09:15:31

Transmit Duration = < 5 seconds