



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

3G/UNLICENSED WIRELESS HUB

MODEL NUMBER: QWH-HUB-V1.0A

**FCC ID: J9C2NET
IC: 2723A-2NET**

REPORT NUMBER: 11U14082-3

ISSUE DATE: NOVEMBER 30, 2011

Prepared for
**QUALCOMM INCORPORATED
5775 MOREHOUSE DRIVE
SAN DIEGO, CA 92121-1714
U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	11/30/11	Initial Issue	F. Ibrahim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT.....	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. SOFTWARE AND FIRMWARE	7
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. ANTENNA PORT TEST RESULTS	11
7.1. 802.11b MODE IN THE 2.4 GHz BAND	11
7.1.1. 6 dB BANDWIDTH	11
7.1.2. 99% BANDWIDTH	15
7.1.3. OUTPUT POWER	19
7.1.4. AVERAGE POWER	23
7.1.5. POWER SPECTRAL DENSITY	24
7.1.6. CONDUCTED SPURIOUS EMISSIONS.....	28
7.2. 802.11g MODE IN THE 2.4 GHz BAND	35
7.2.1. 6 dB BANDWIDTH	35
7.2.2. 99% BANDWIDTH	39
7.2.3. OUTPUT POWER	43
7.2.4. AVERAGE POWER	47
7.2.5. POWER SPECTRAL DENSITY	48
7.2.6. CONDUCTED SPURIOUS EMISSIONS.....	52
8. RADIATED TEST RESULTS	59
8.1. LIMITS AND PROCEDURE	59
8.2. TRANSMITTER ABOVE 1 GHz	60
8.2.1. TX ABOVE 1 GHz FOR 802.11b 1TX MODE IN THE 2.4 GHz BAND	60
8.2.2. TX ABOVE 1 GHz FOR 802.11g 1TX MODE IN THE 2.4 GHz BAND	69
8.3. RECEIVER ABOVE 1 GHz.....	78

8.4.	WORST-CASE BELOW 1 GHz	79
9.	AC POWER LINE CONDUCTED EMISSIONS	82
10.	MAXIMUM PERMISSIBLE EXPOSURE	86
11.	SETUP PHOTOS	90

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: QUALCOMM INCORPORATED
5775 MOREHOUSE DRIVE
SAN DIEGO, CA 92121-1714
U.S.A.

EUT DESCRIPTION: 3G/UNLICENSED WIRELESS HUB

MODEL: QWH-HUB-V1.0A

SERIAL NUMBER: FCC 5 (Antenna Port) and 145 (Radiated)

DATE TESTED: NOVEMBER 18 TO 22, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:



FRANK IBRAHIM
EMC SUPERVISOR
UL CCS

Tested By:



DAVID GARCIA
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a 3G/ Unlicensed Wireless Hub with WLAN and Bluetooth.

The radio module is manufactured by Huawei.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	18.24	66.68
2412 - 2462	802.11g	19.40	87.10

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal PIFA antenna, with a maximum gain of 3.8 dBi.

5.4. SOFTWARE AND FIRMWARE

The test utility software used during testing was wlanContTx2, rev. 11-2-2011

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power.

Radiated emissions below 1 GHz and power line conducted emissions were performed with the EUT set to the channel with highest output power.

For the fundamental investigation X, Y and Z orientations have been investigated, and the worst case was found to be at Y orientation.

Worst-case data rates used based on input from the client were as follows:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	HP/Compaq	6910p	CND8153DGD	DoC
AC Adapter	HP	PA-1131-08HC	820024302	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	USB	Shielded	1m	
2	AC	1	AC	Unshielded	1.8m	
3	DC	1	DC	Unshielded	1.8m	

TEST SETUP

The EUT is set to transmit WLAN mode by temporarily connecting to a laptop via a USB cable to enter the appropriate command in the DOS CMD window.

SETUP DIAGRAM FOR TESTS

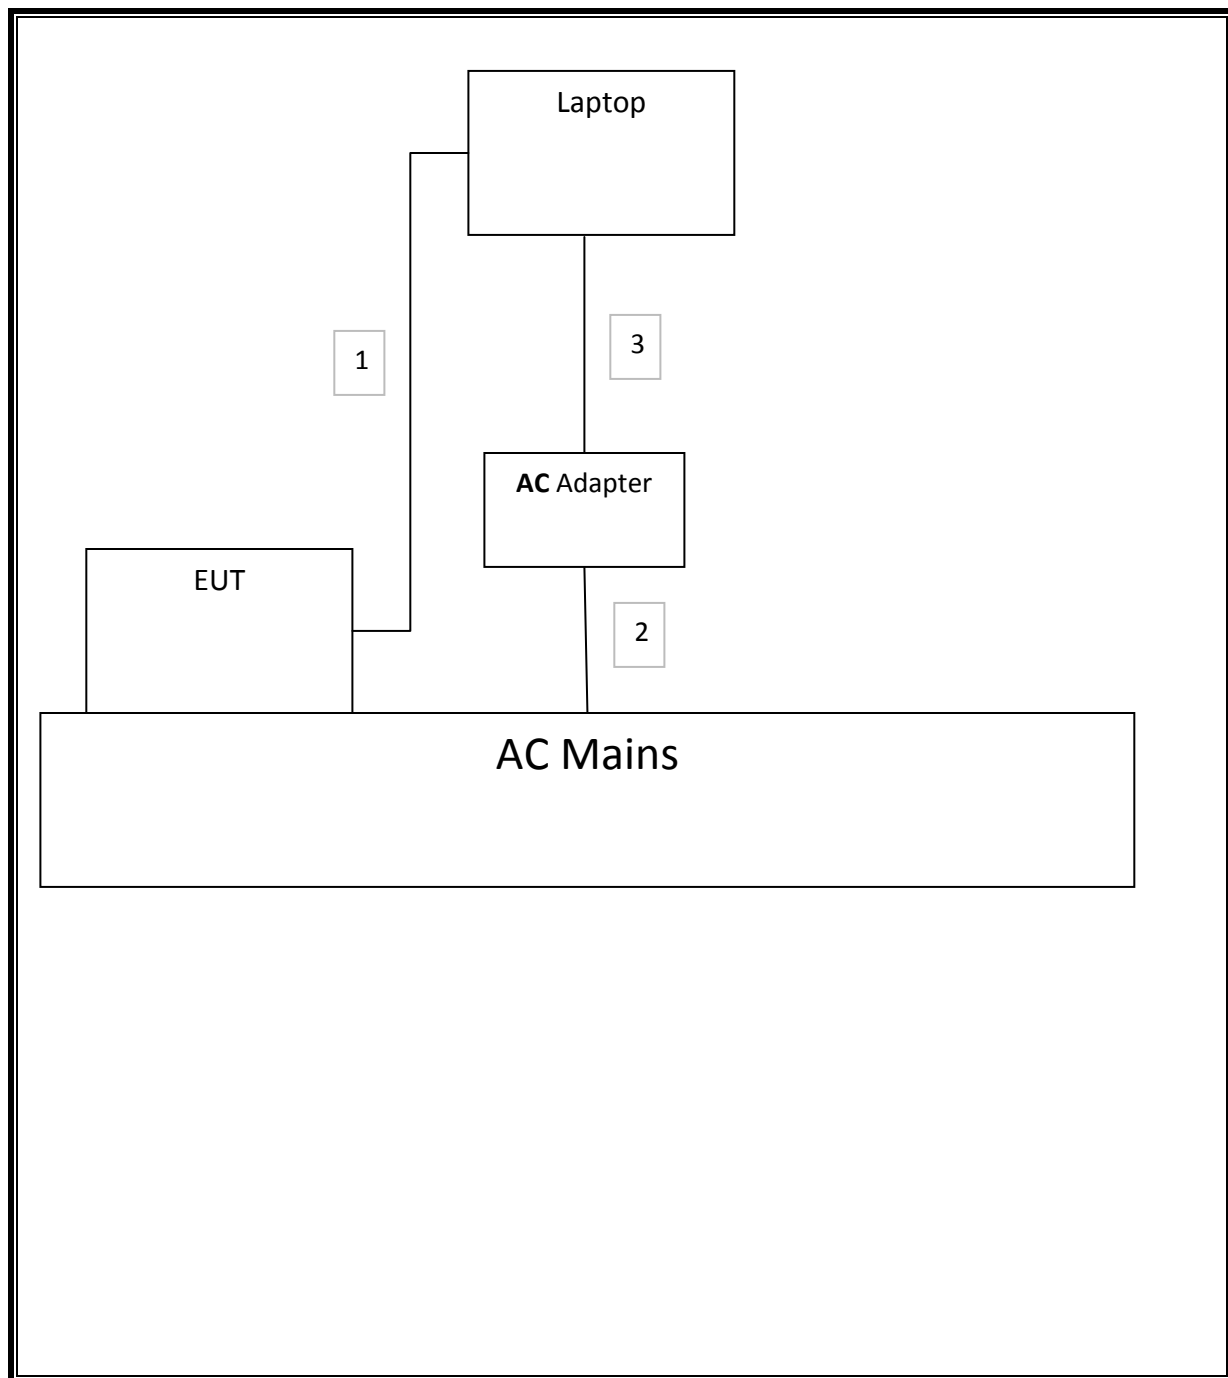

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01176	08/04/12
P-Seies single channel Power Meter	Agilent / HP	N1911A	1260847C	08/04/12
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00986	12/17/11
Bi Directional coupler	RF Lambda	RFDC5M06G15	--	--
P-Seies single channel Power Meter	Agilent / HP	N1911A	N/A	08/04/12
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	06/13/12
Preamplifier, 1300 MHz	Agilent / HP	8447D	C01048	07/16/12
BiLog Antenna	ETS	3117	C01005	07/25/12
Antenna, Horn, 18 GHz	EMCO	3115	C00945	06/26/12
PSA	Agilent	E4440A	T129	04/28/12
Power meter	Agilent	E4416A	PPM3	03/22/12
Power Sensor	Agilent	E9327A	T233	03/22/12
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/15/12
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	N02481	11/16/12
EMI Test Receiver	R&S	ESC17	10000741	07/02/12
Antenna, Horn, 26.5 GHz	ARA	SWH-28	C01015	10/06/12

7. ANTENNA PORT TEST RESULTS

7.1. 802.11b MODE IN THE 2.4 GHz BAND

7.1.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	9.08	0.5
Middle	2437	9.00	0.5
High	2462	9.08	0.5

6 dB BANDWIDTH

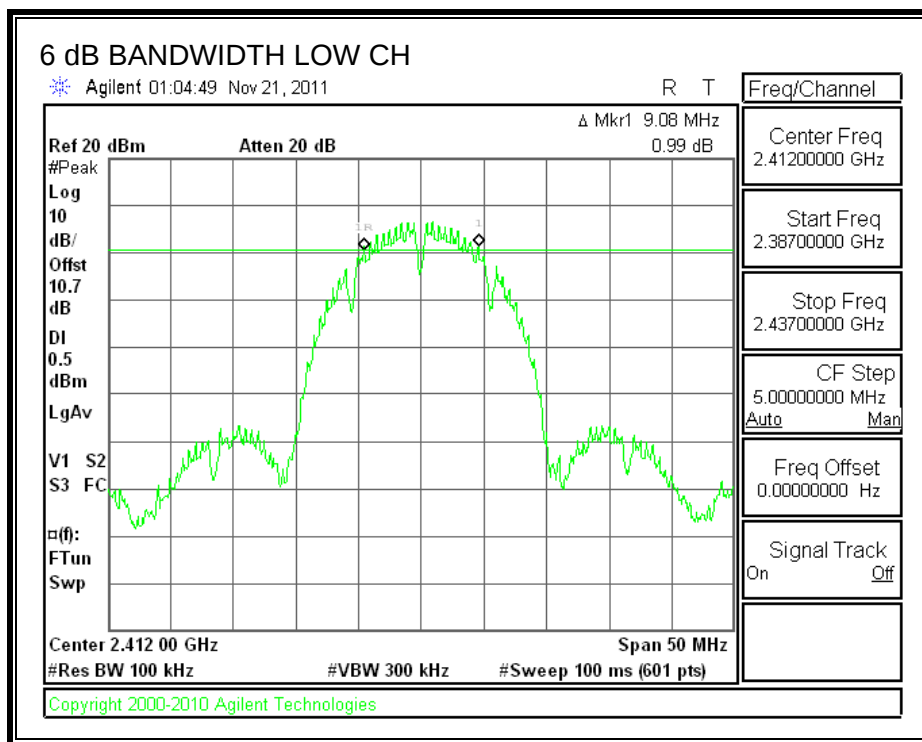

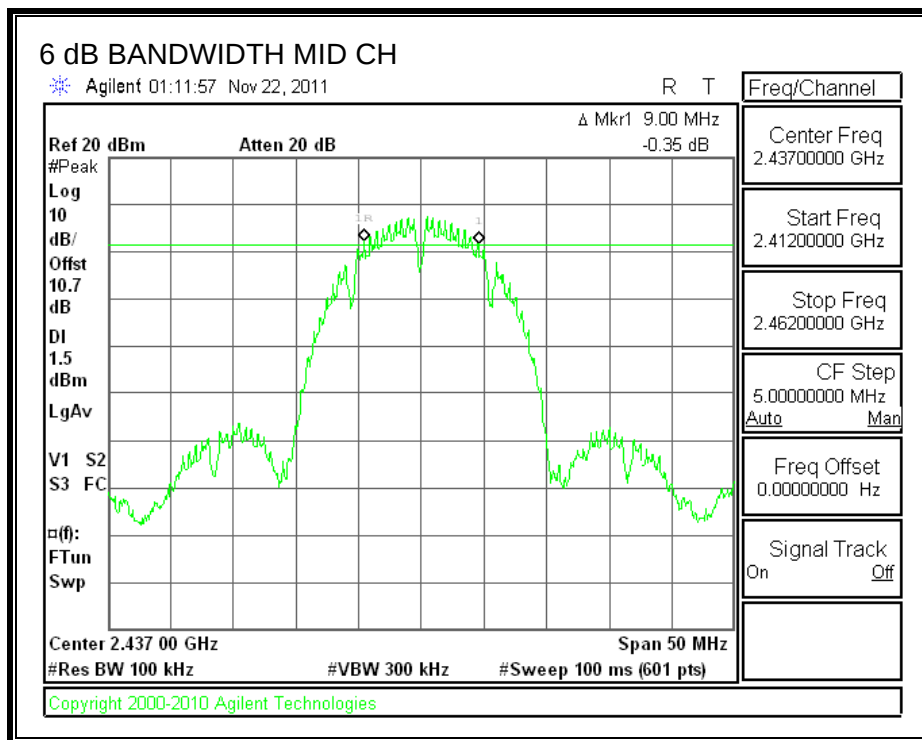

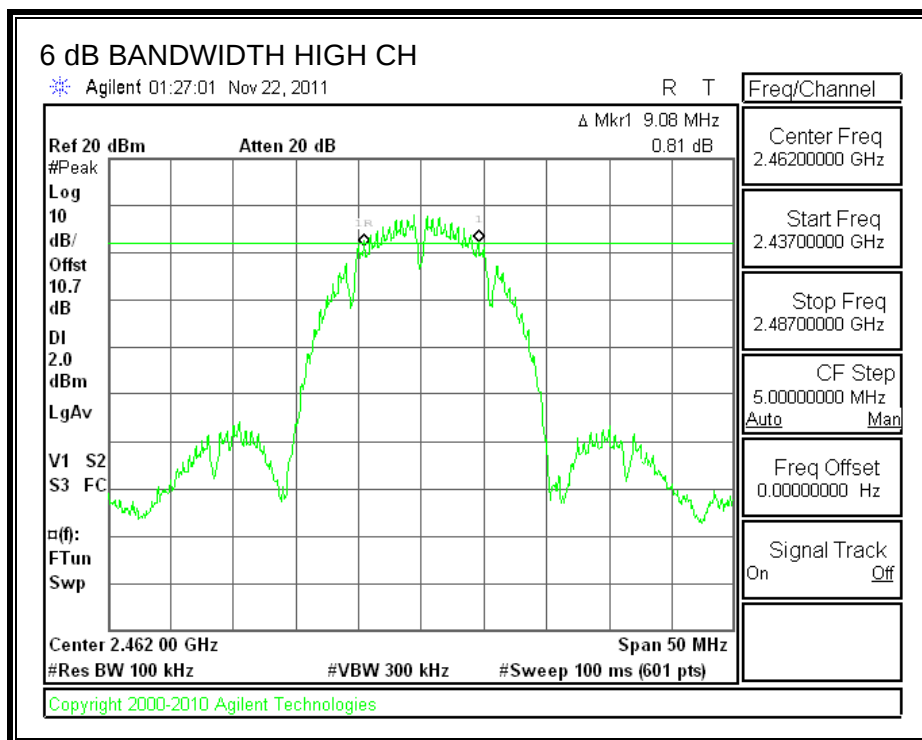

7.1.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	13.6256
Middle	2437	13.6324
High	2462	13.6518

99% BANDWIDTH

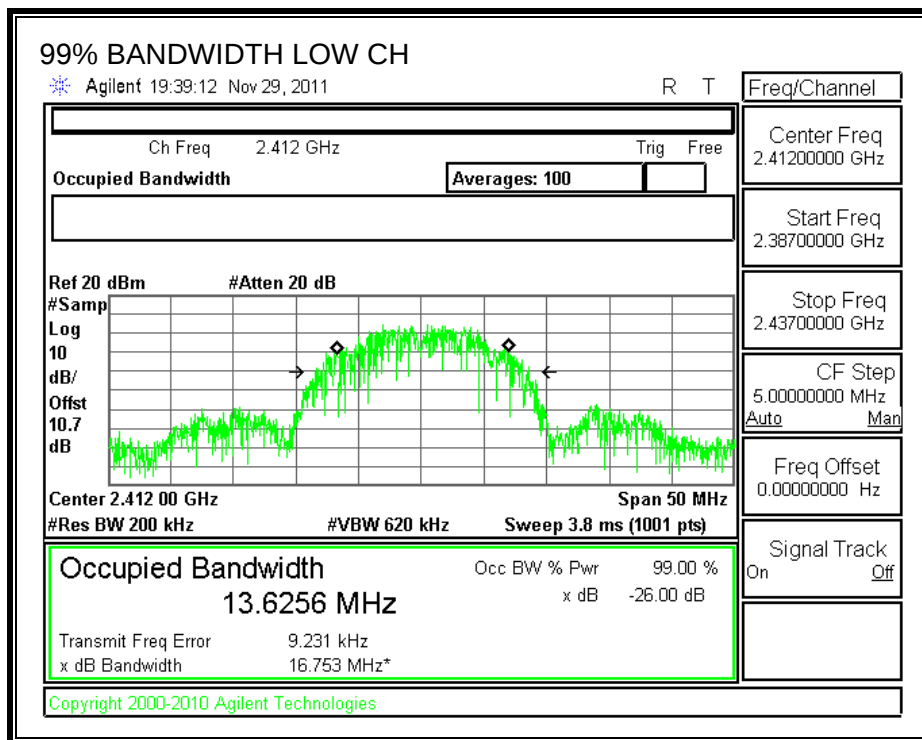

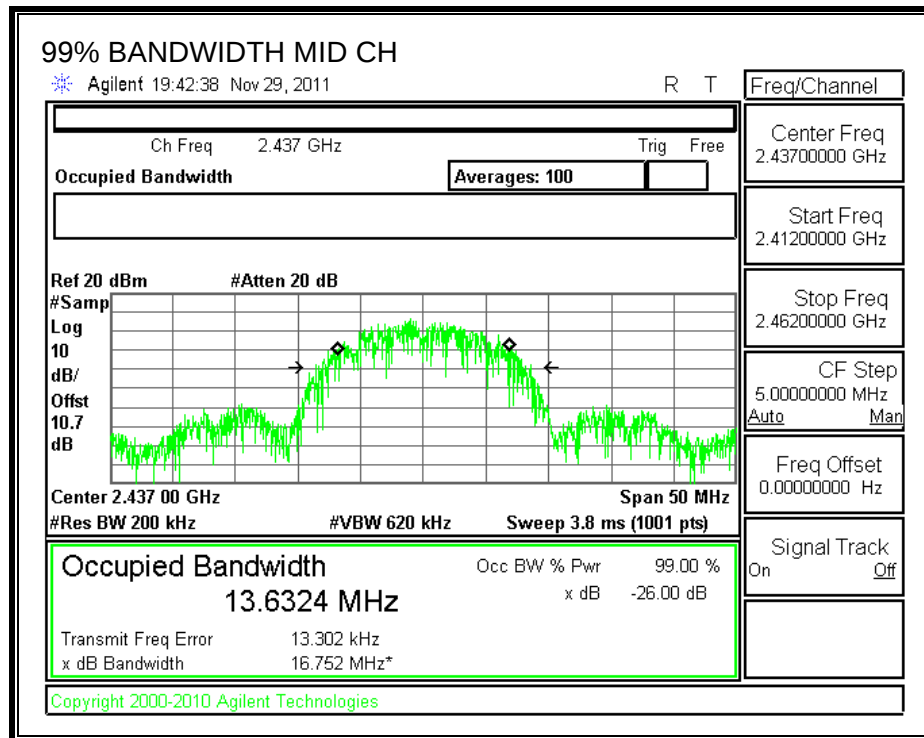

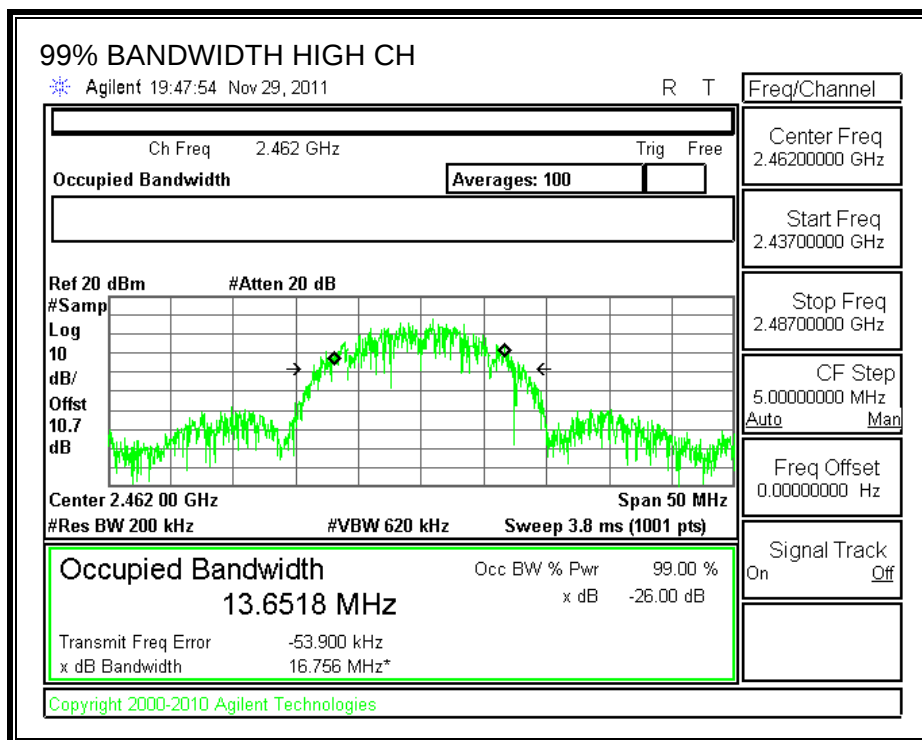

7.1.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


Peak power is measured using the Channel bandwidth Alternative peak output power procedure specified in "TCB Training for Devices covered under Scopes A1 - A4" by Joe Dichoso, May 2003.


RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Attenuator and Cable Offset (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	6.56	10.71	17.27	30	-12.73
Middle	2437	7.04	10.71	17.75	30	-12.25
High	2462	7.53	10.71	18.24	30	-11.76

OUTPUT POWER

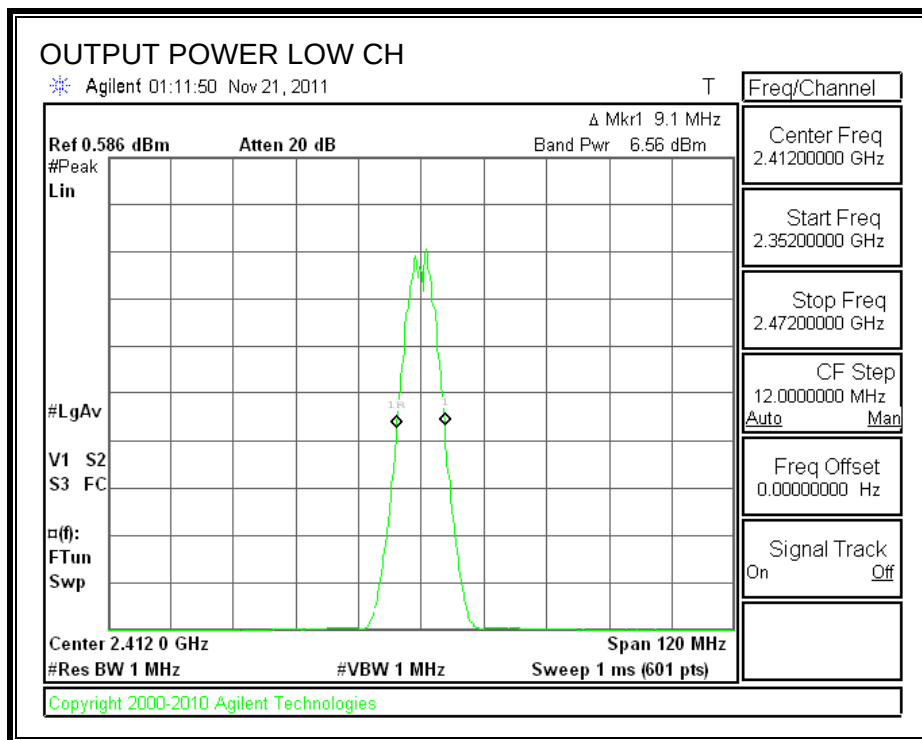

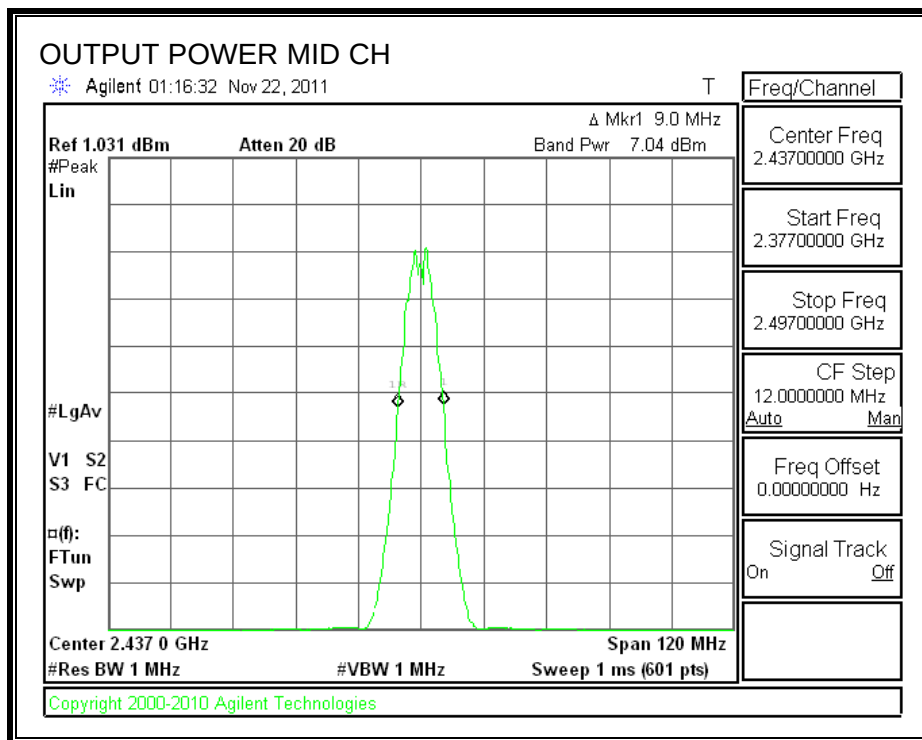

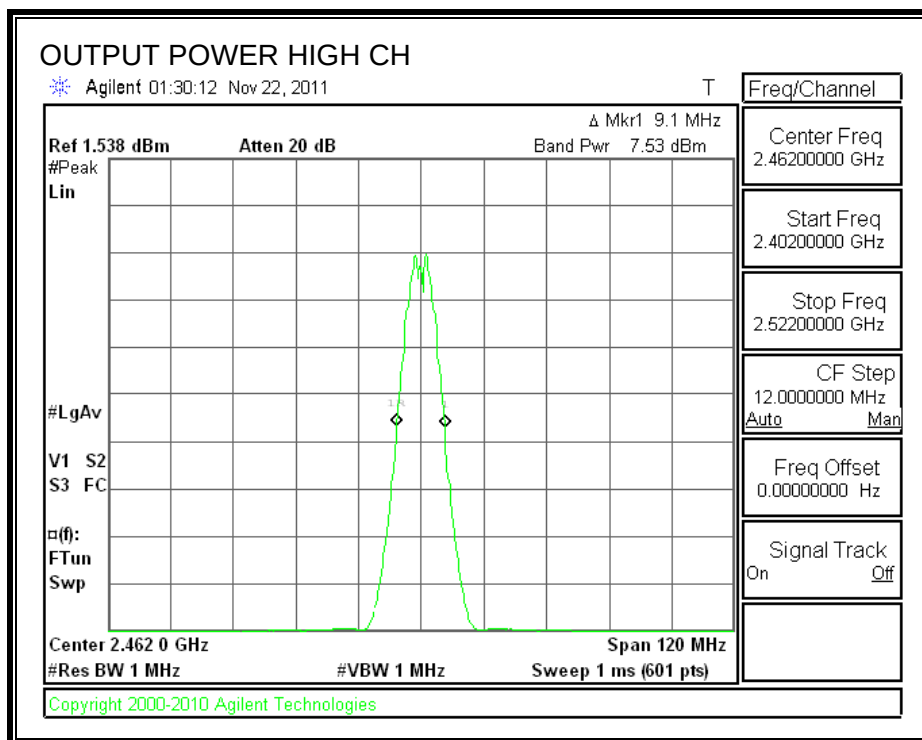

7.1.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.71 dB (including 10 dB pad and 0.71 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2412	15.25
Middle	2437	15.85
High	2462	16.22

7.1.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-6.64	8	-14.64
Middle	2437	-6.45	8	-14.45
High	2462	-5.64	8	-13.64

POWER SPECTRAL DENSITY

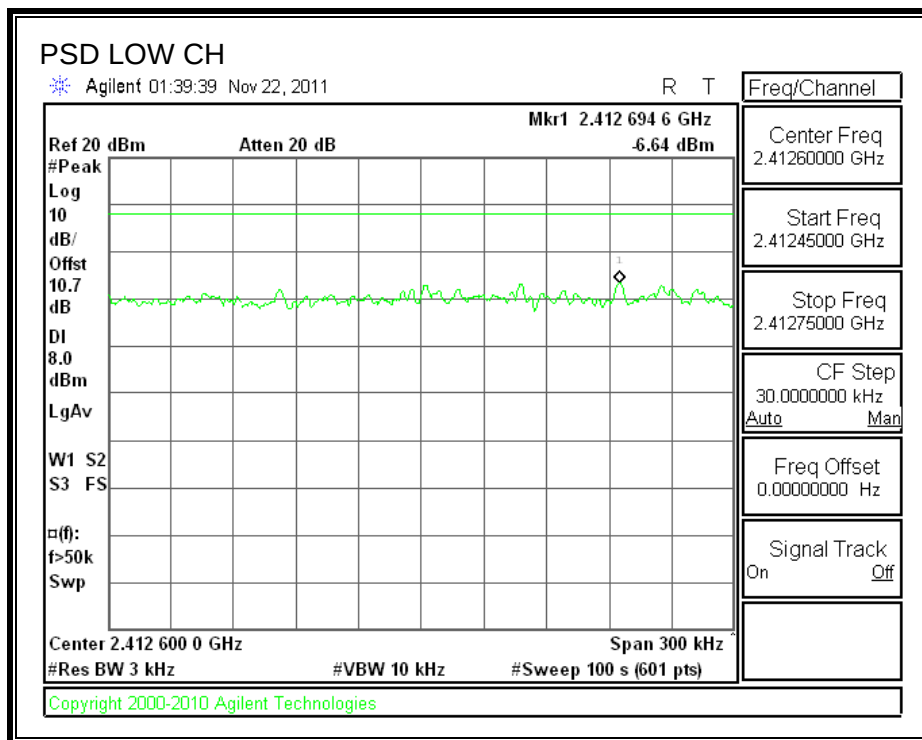

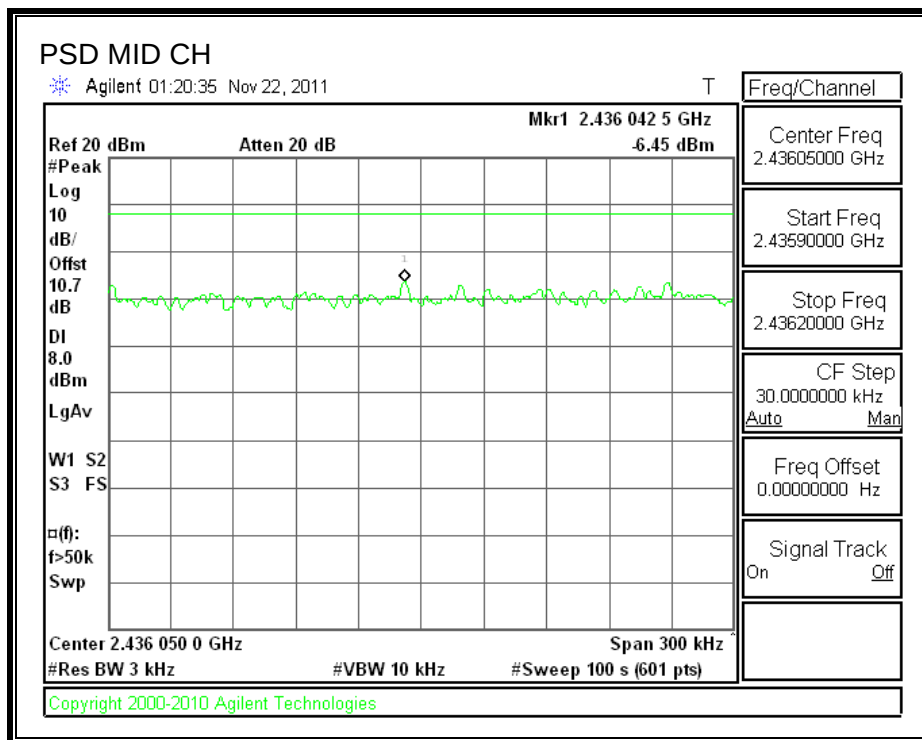

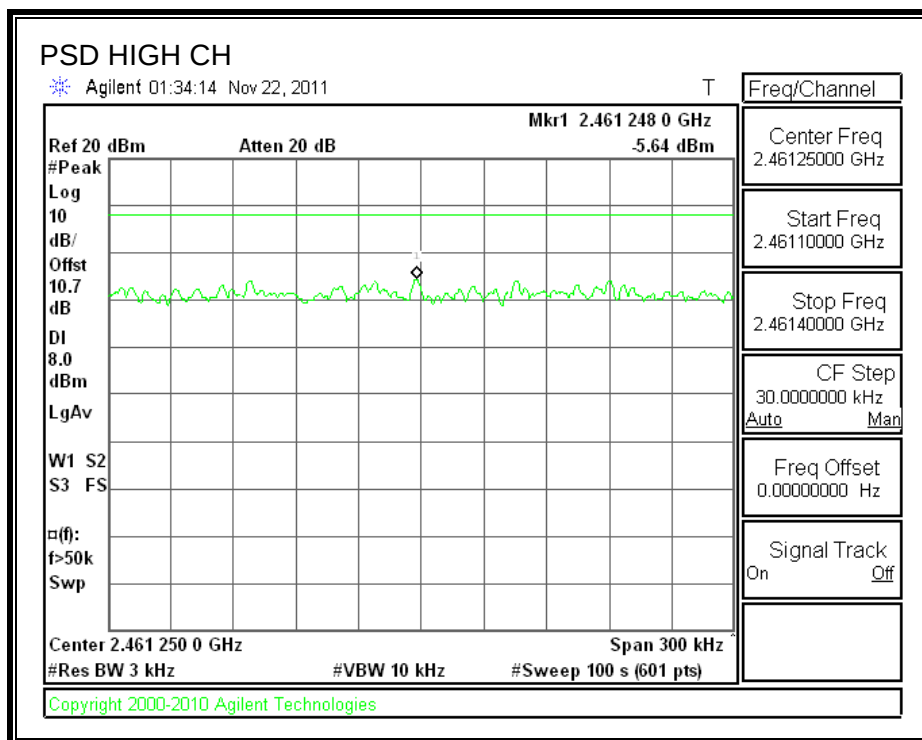

7.1.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

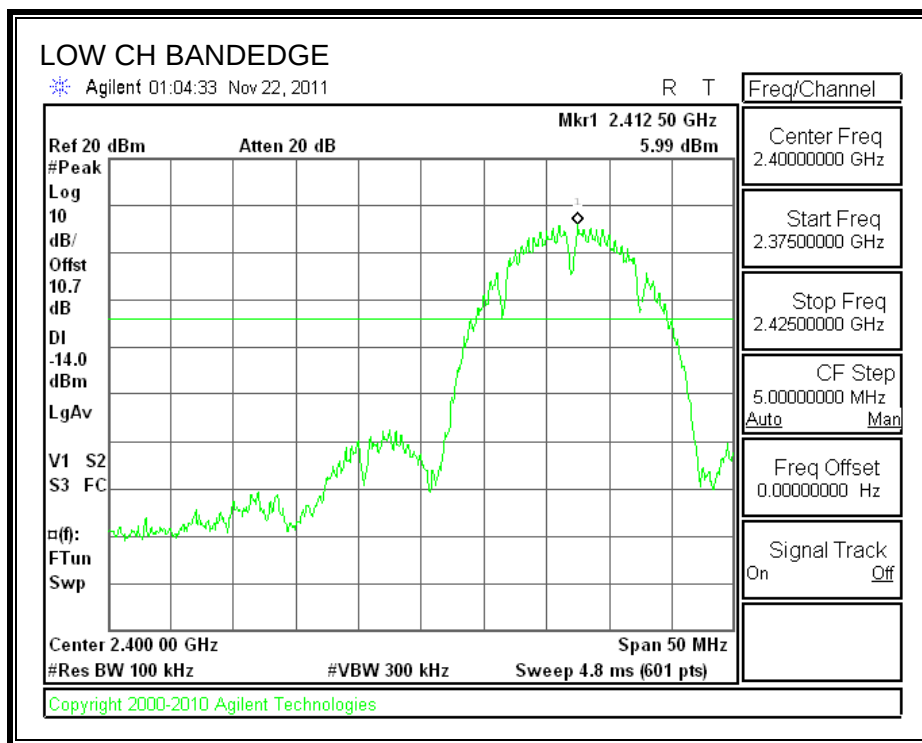

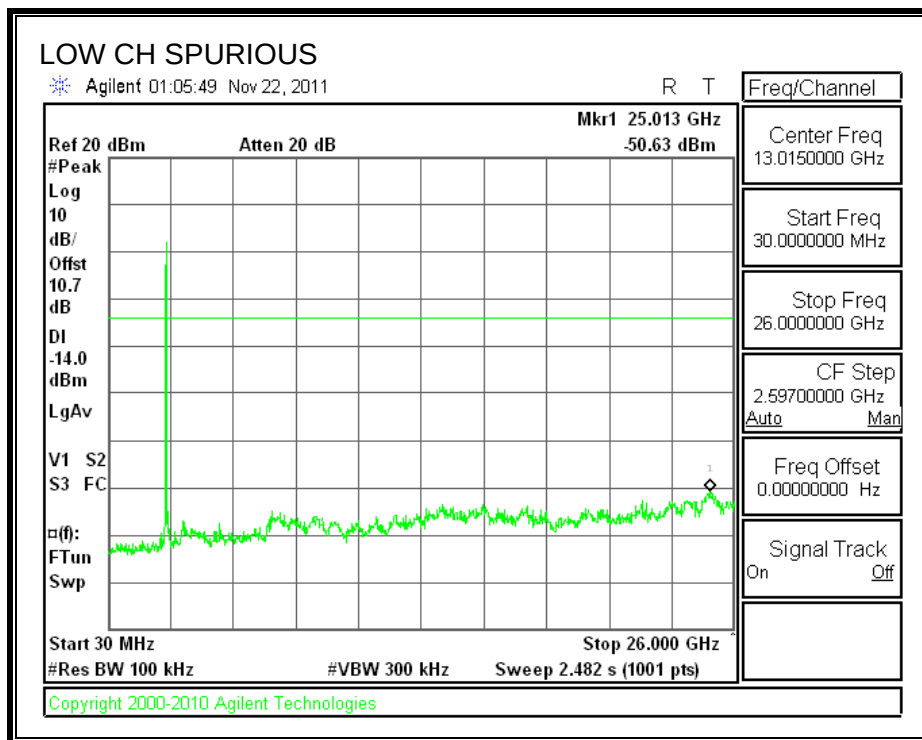



SPURIOUS EMISSIONS, MID CHANNEL

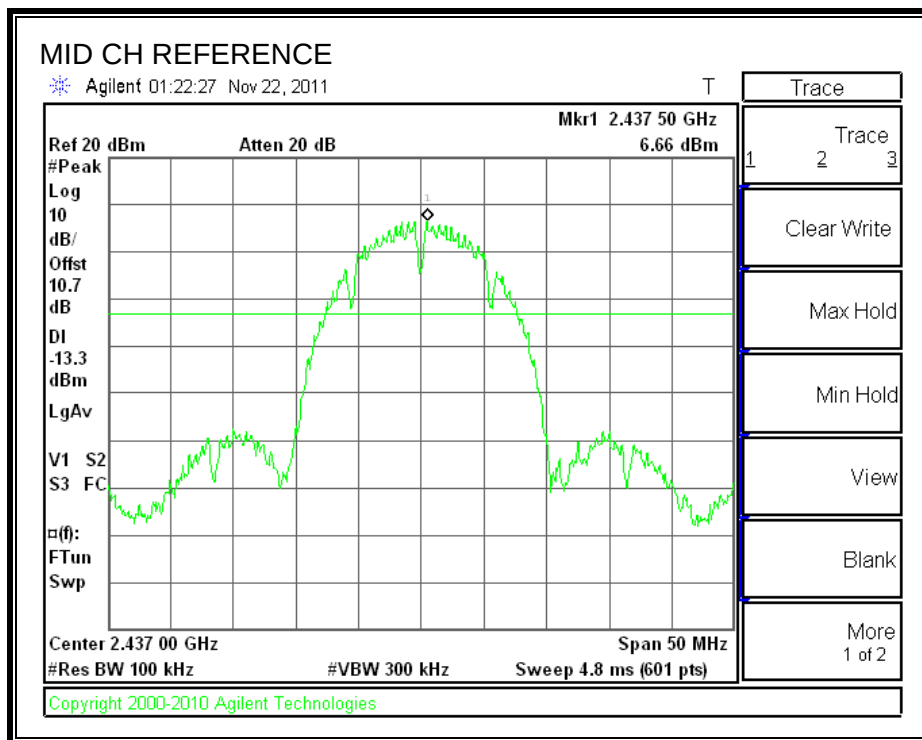

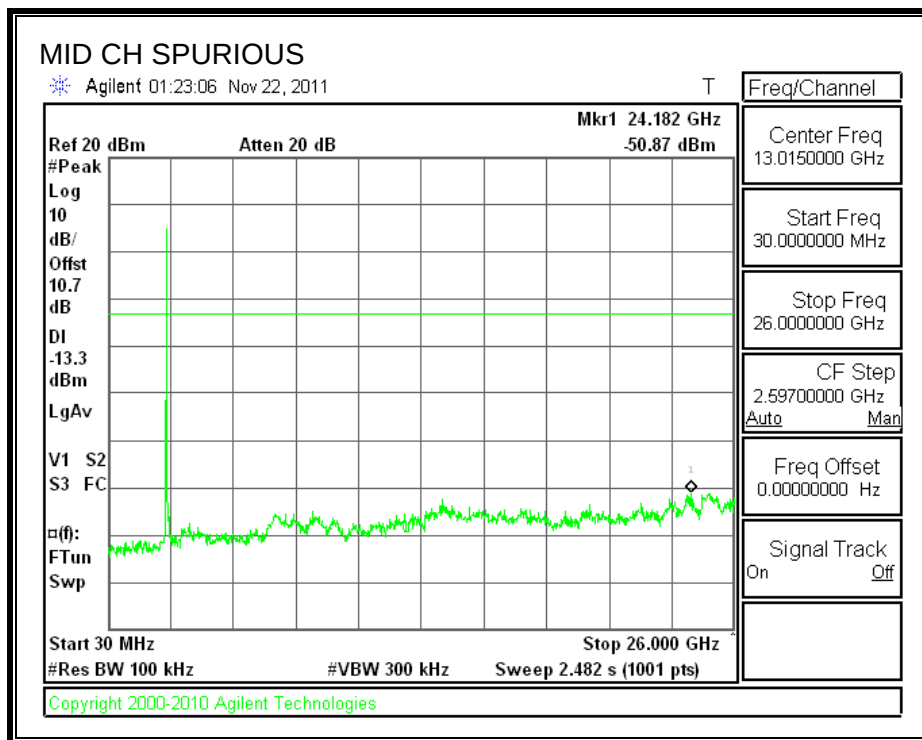

SPURIOUS EMISSIONS, HIGH CHANNEL

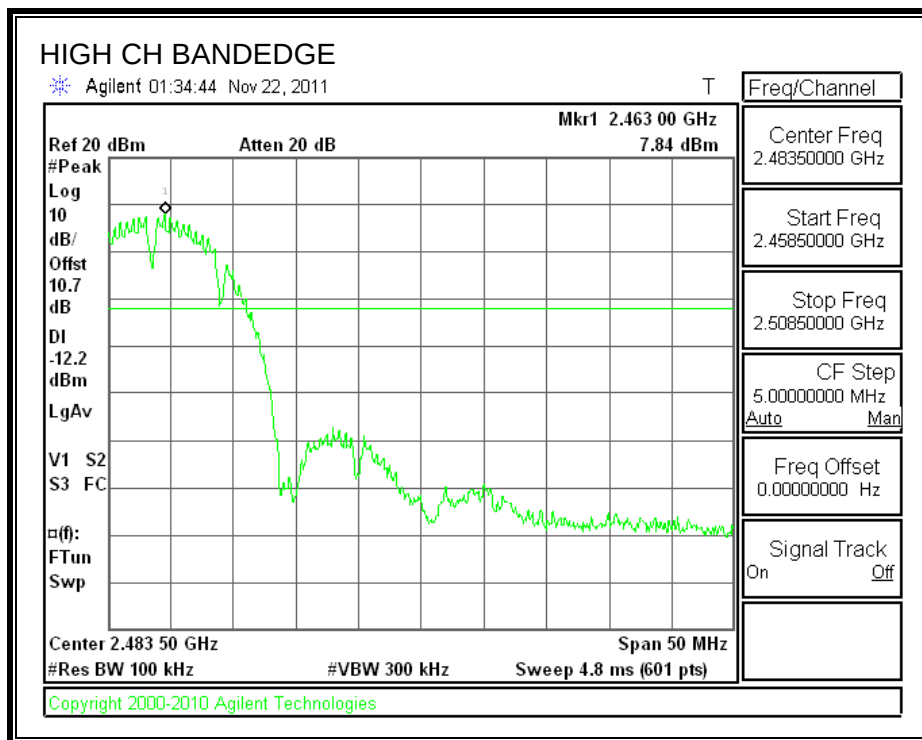

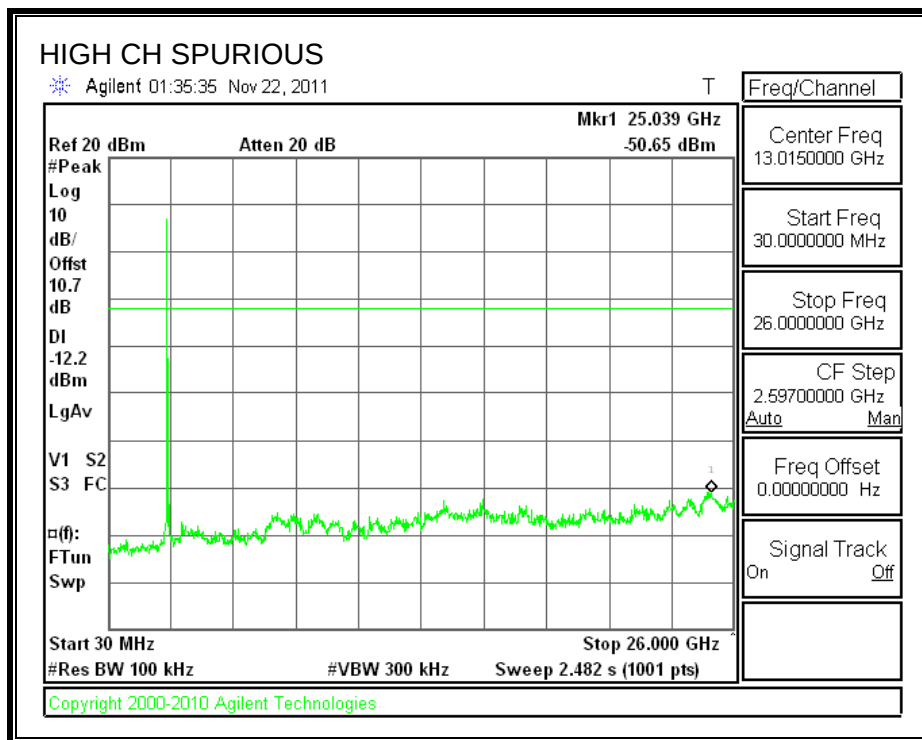

7.2. 802.11g MODE IN THE 2.4 GHz BAND

7.2.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.50	0.5
Middle	2437	15.75	0.5
High	2462	15.75	0.5

6 dB BANDWIDTH

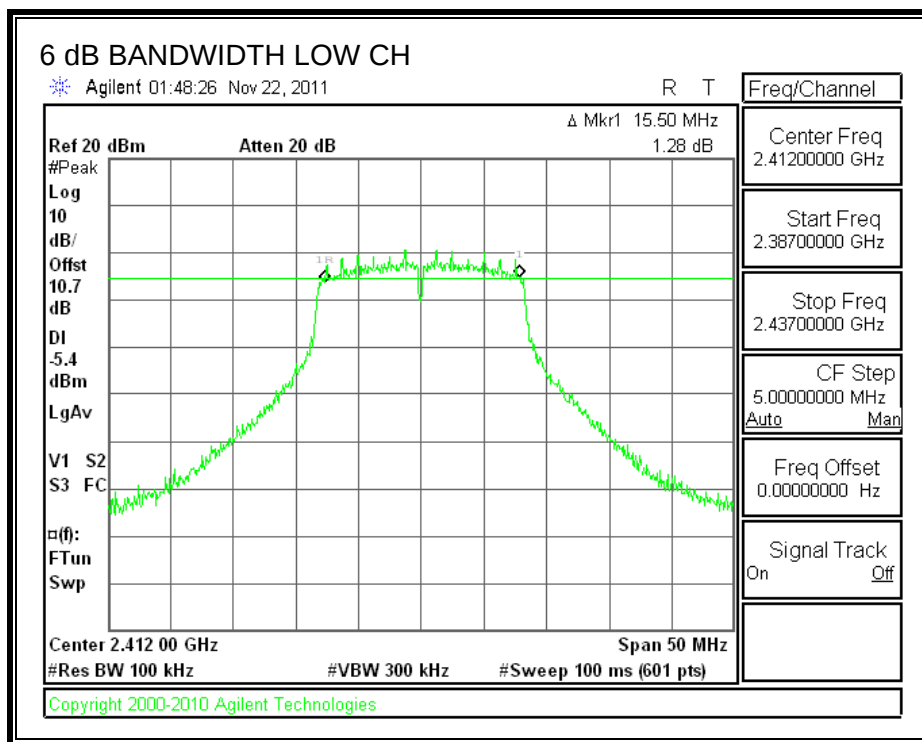

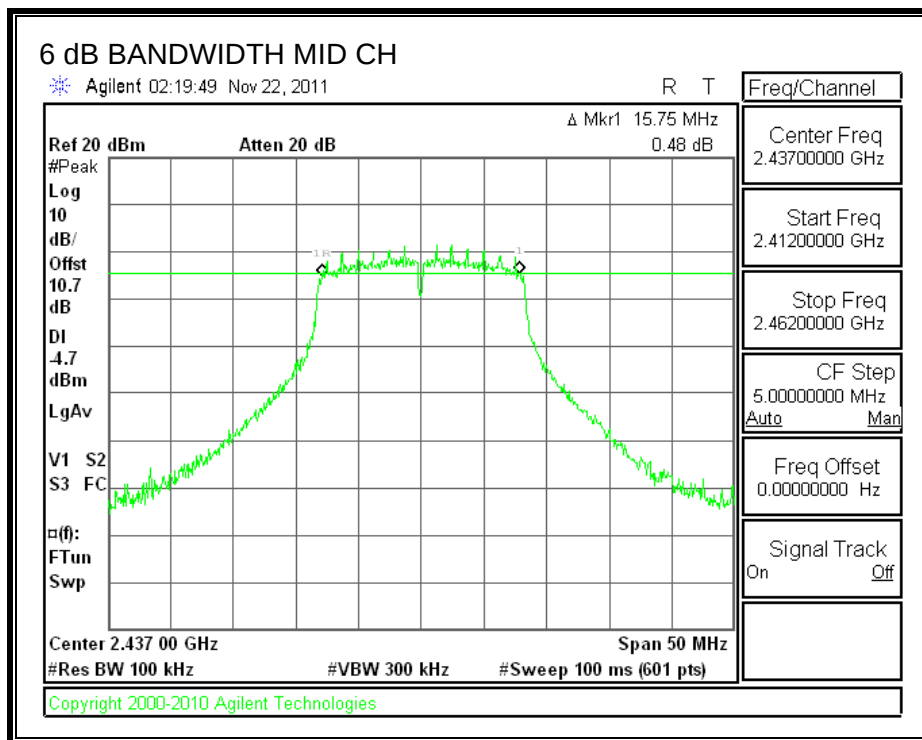

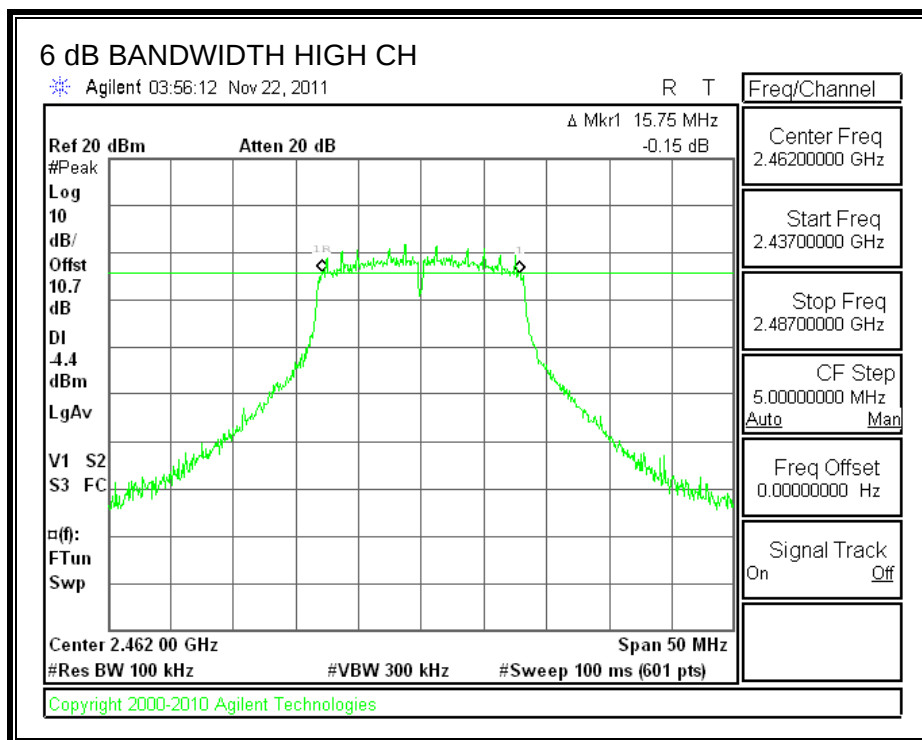

7.2.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.337
Middle	2437	16.3493
High	2462	16.3577

99% BANDWIDTH

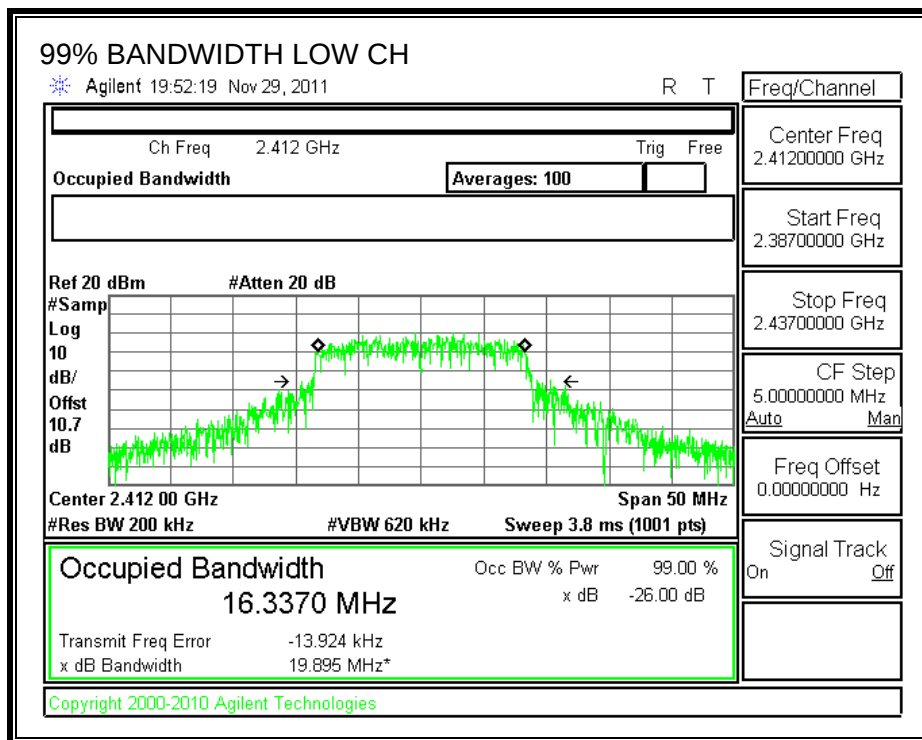

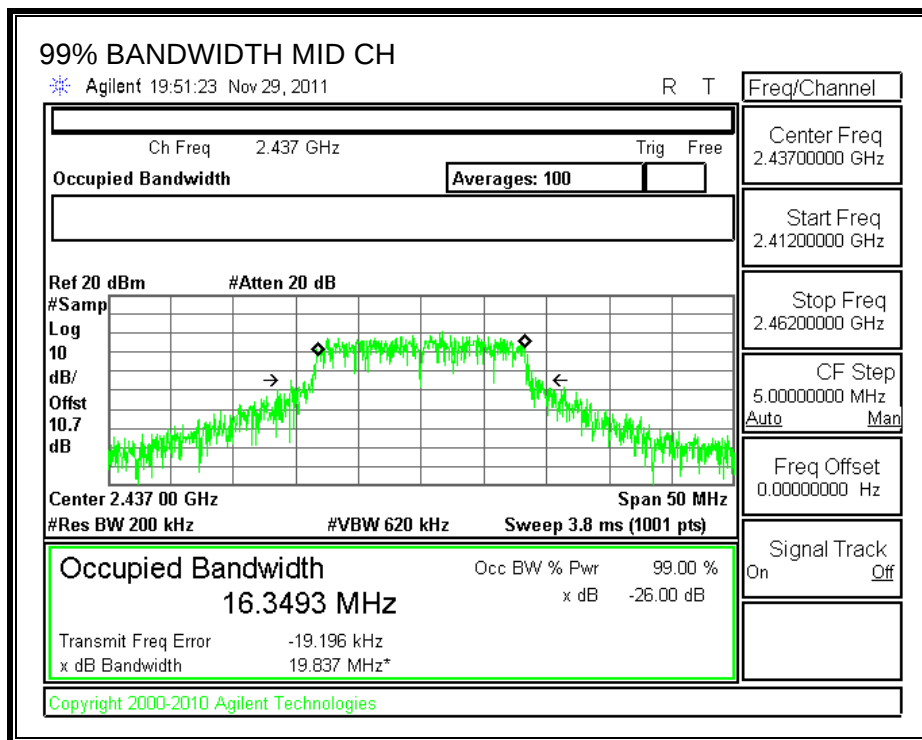

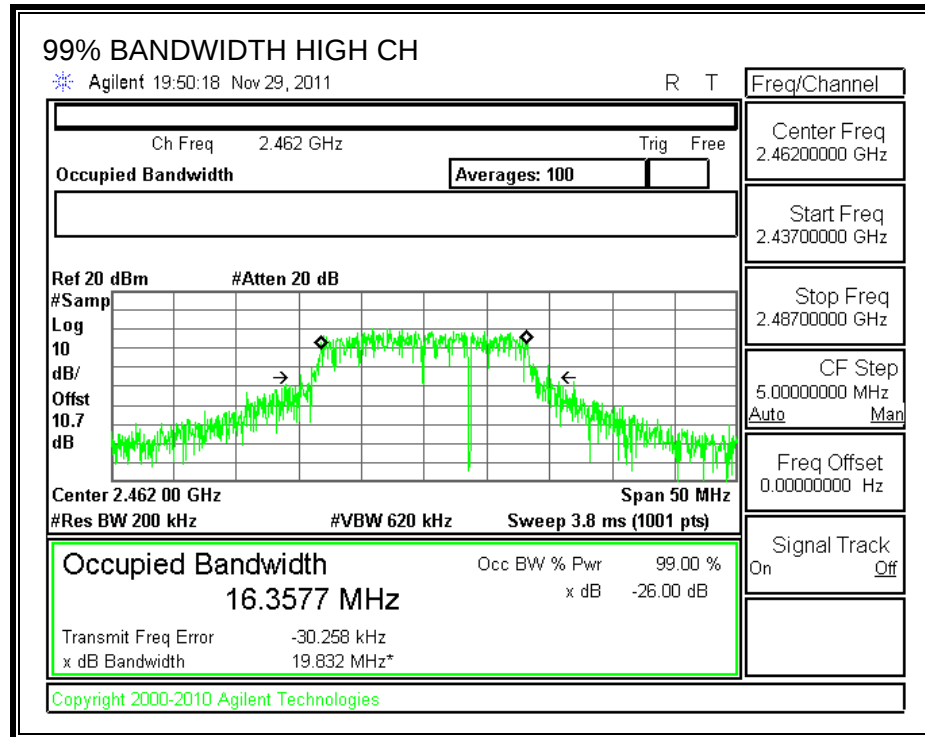

7.2.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


Peak power is measured using the Channel bandwidth Alternative peak output power procedure specified in "TCB Training for Devices covered under Scopes A1 - A4" by Joe Dichoso, May 2003.


RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Attenuator and Cable Offset (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	7.85	10.71	18.56	30	-11.44
Middle	2437	8.33	10.71	19.04	30	-10.96
High	2462	8.69	10.71	19.40	30	-10.60

OUTPUT POWER

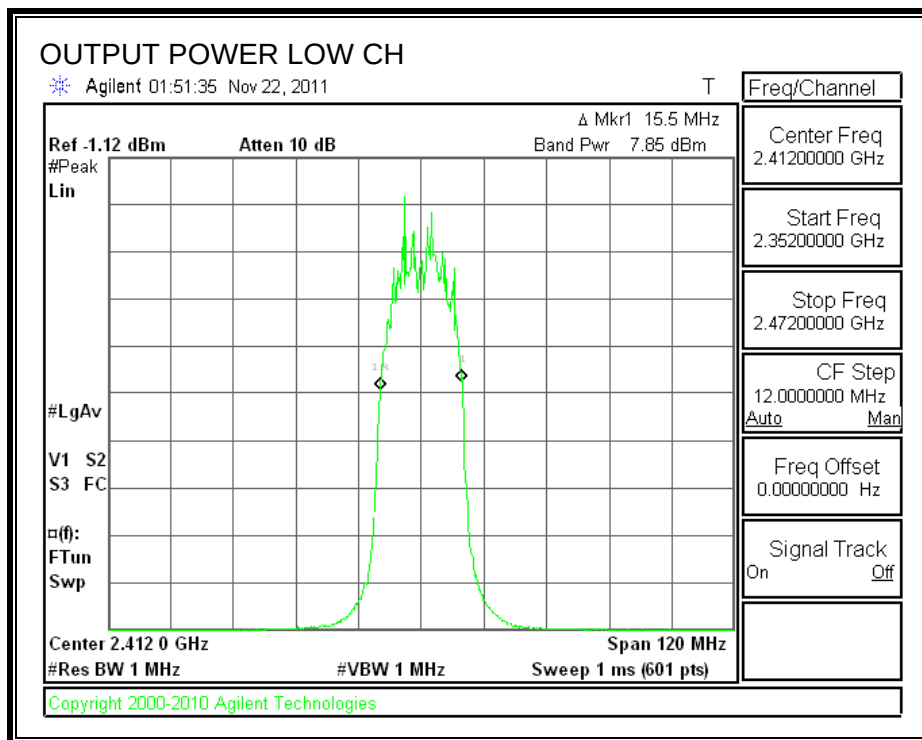

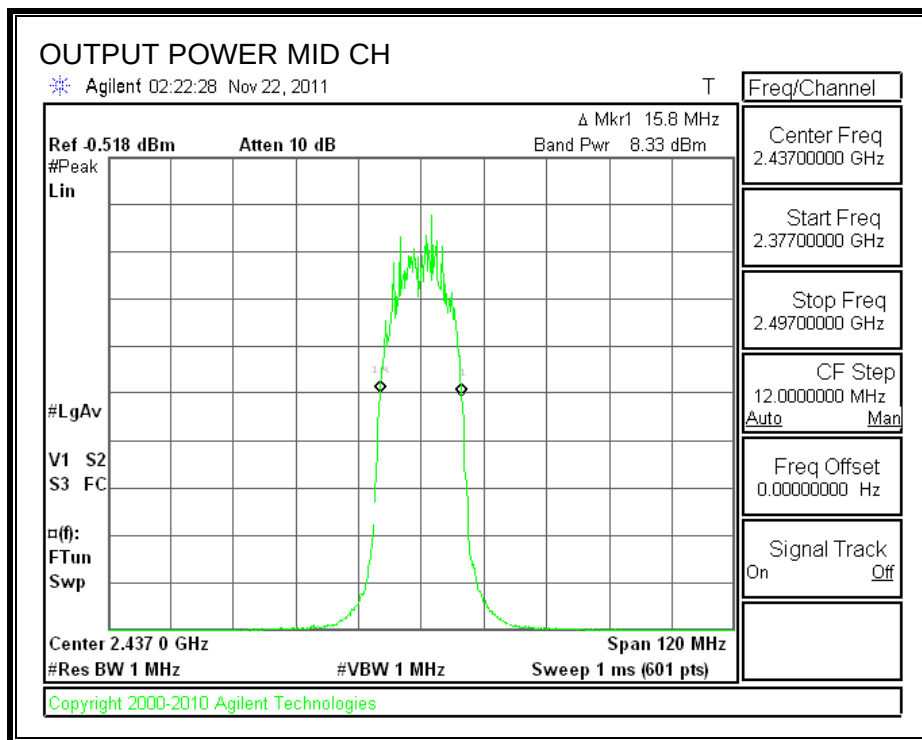

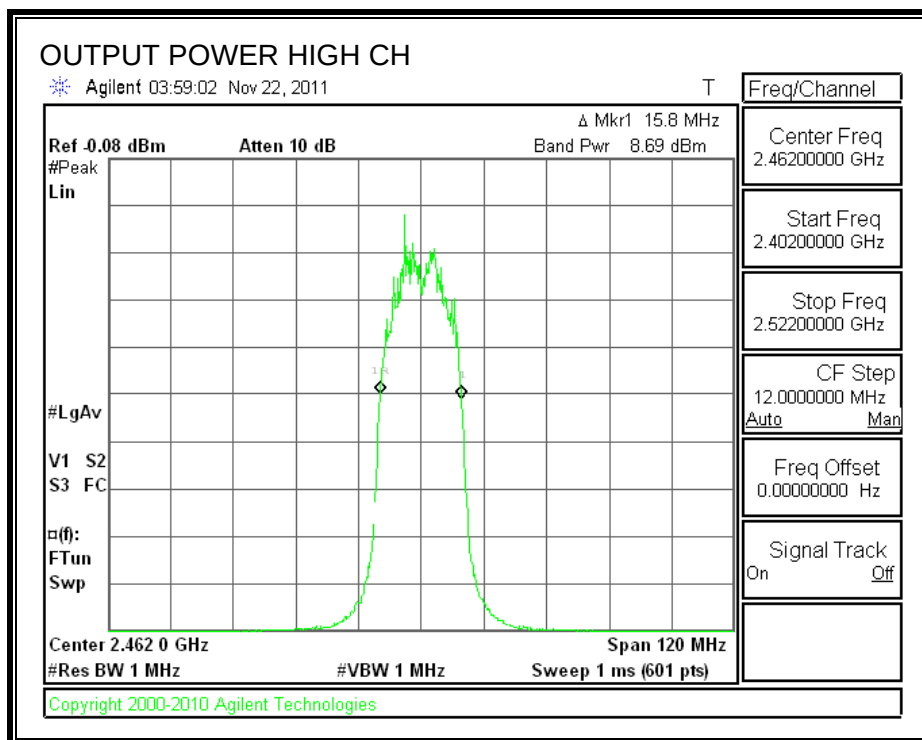

7.2.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.71 dB (including 10dB pad and 0.71dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2412	11.23
Middle	2437	11.65
High	2462	12.05

7.2.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-12.72	8	-20.72
Middle	2437	-12.00	8	-20.00
High	2462	-12.40	8	-20.40

POWER SPECTRAL DENSITY

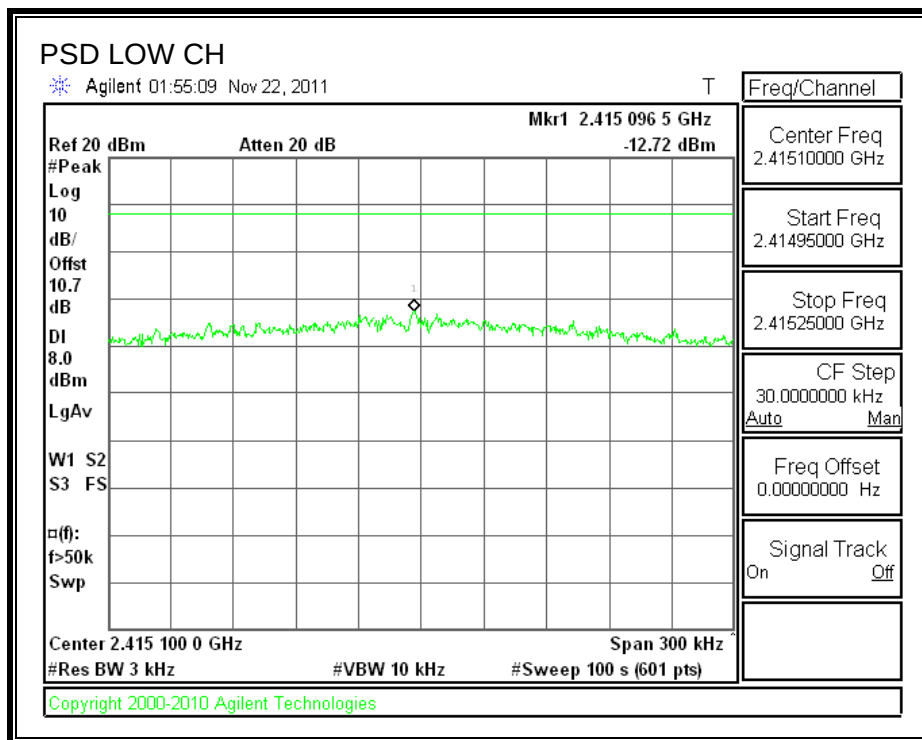

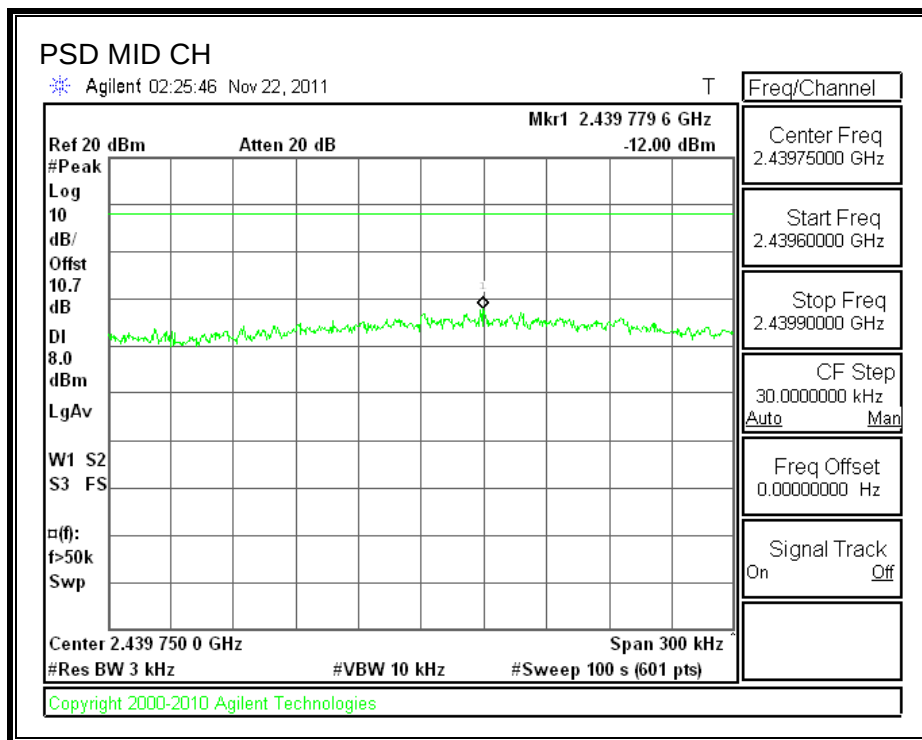

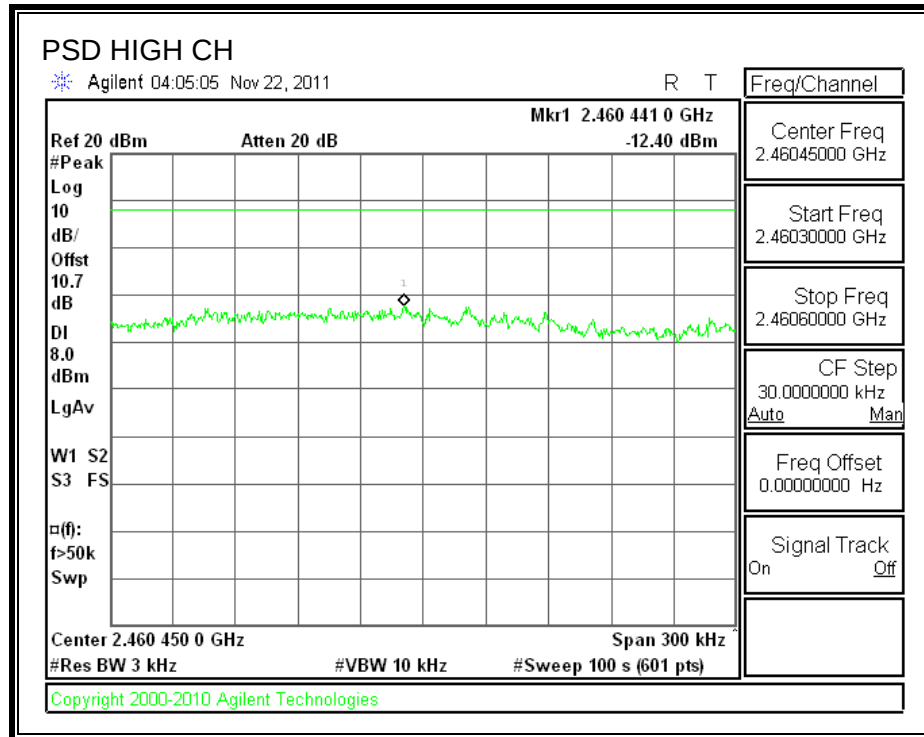

7.2.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

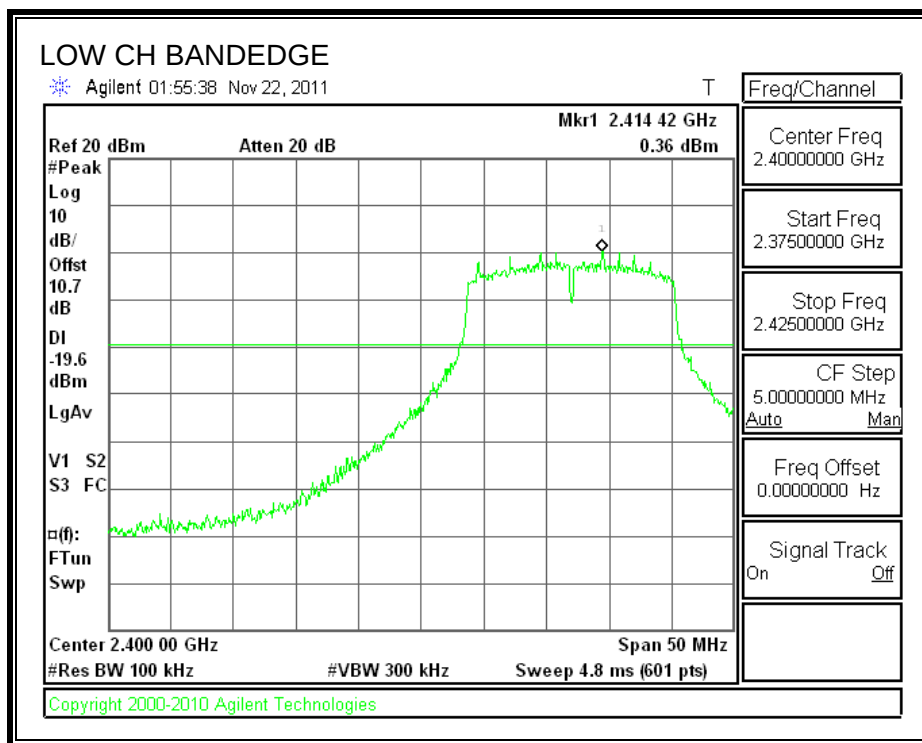

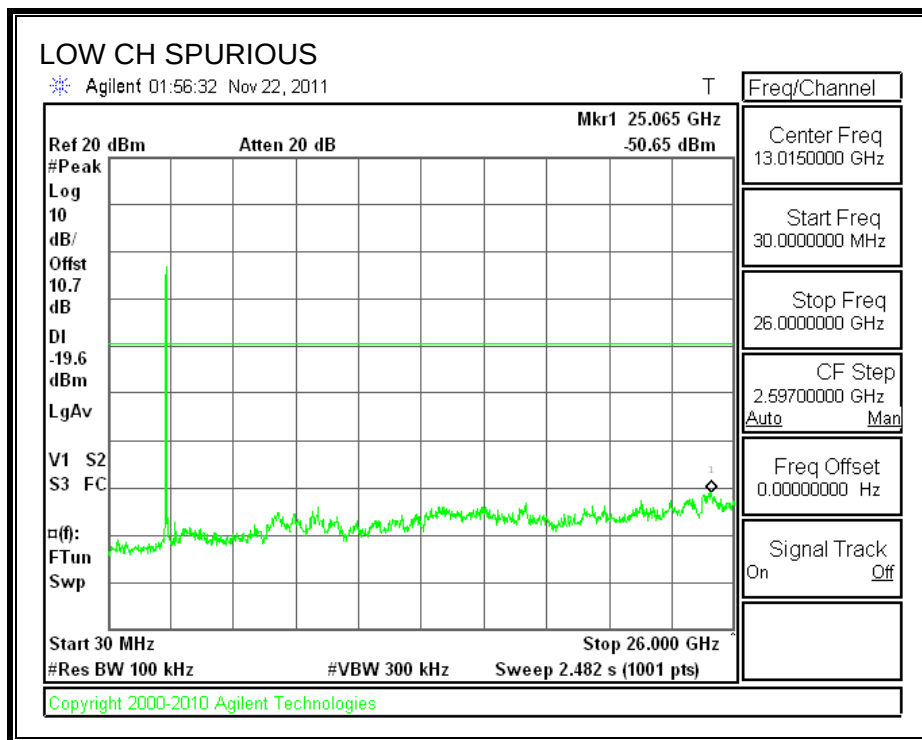



SPURIOUS EMISSIONS, MID CHANNEL

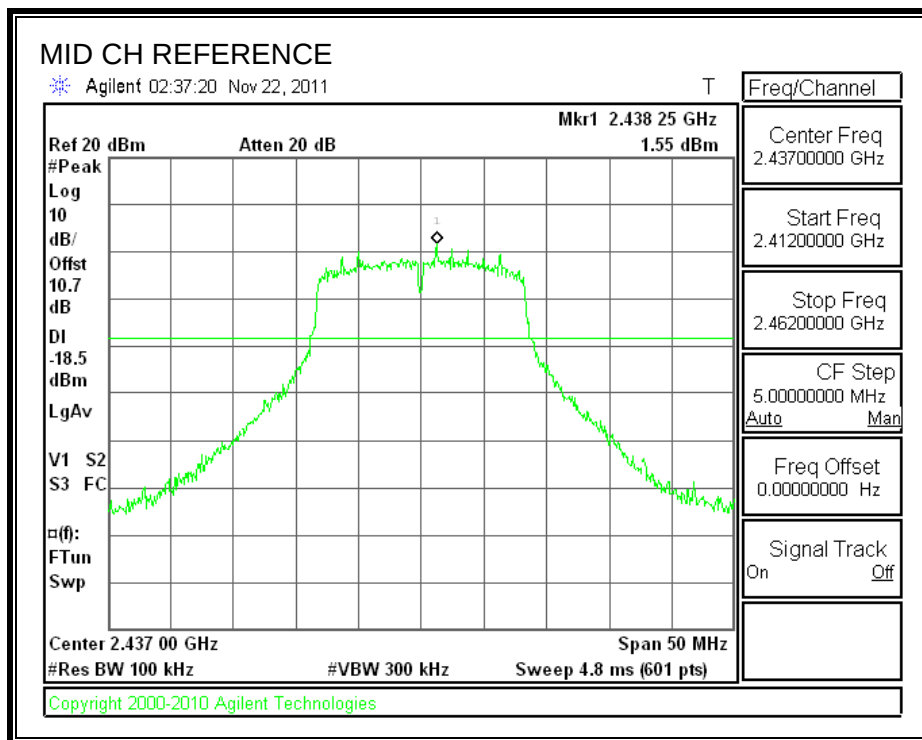

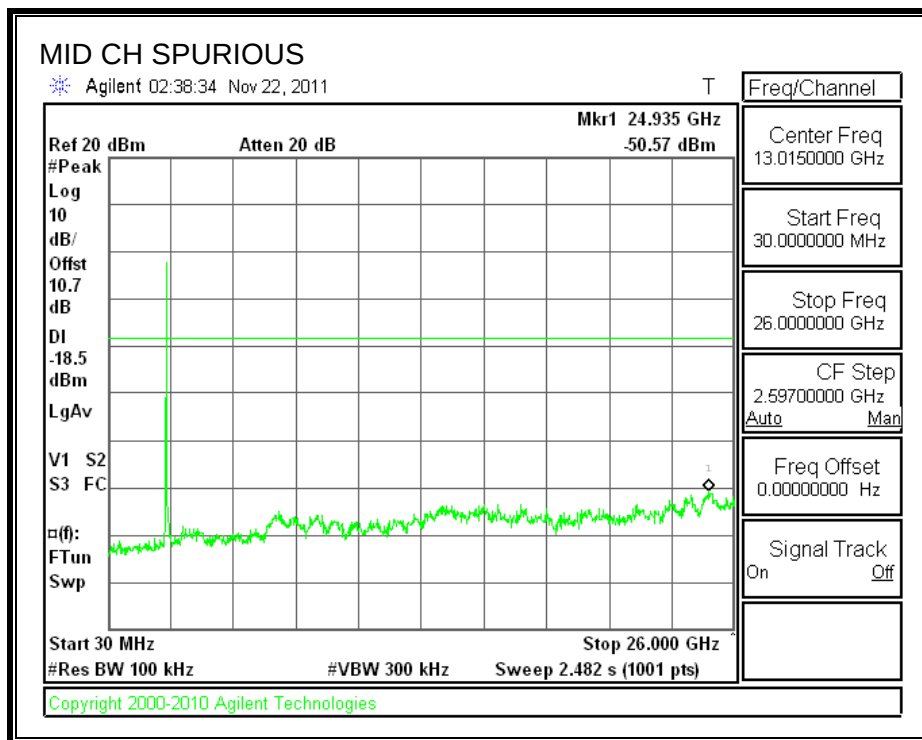

SPURIOUS EMISSIONS, HIGH CHANNEL

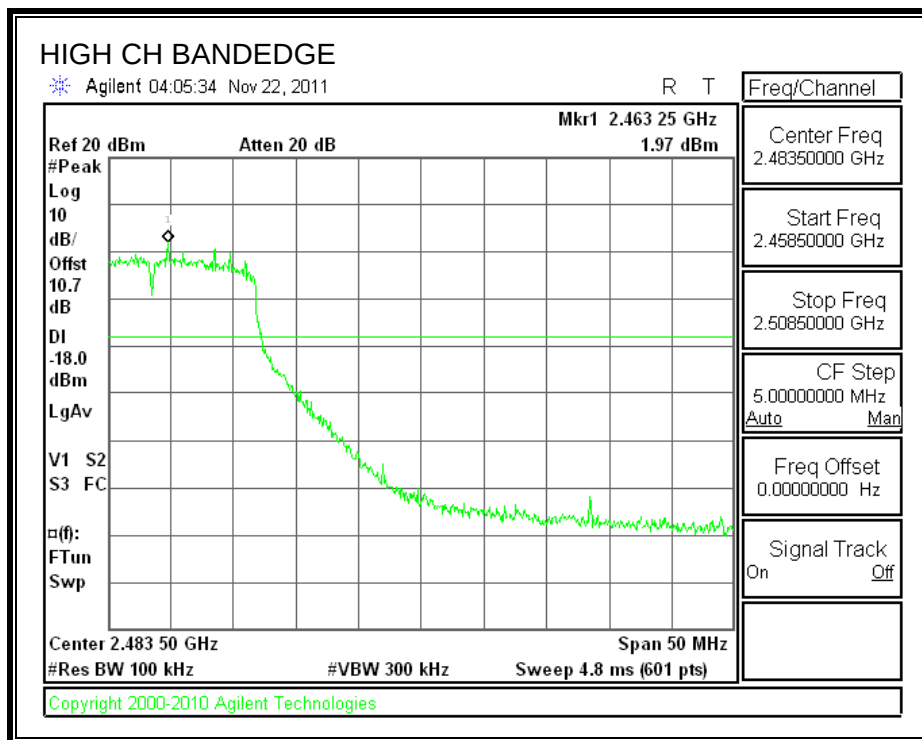

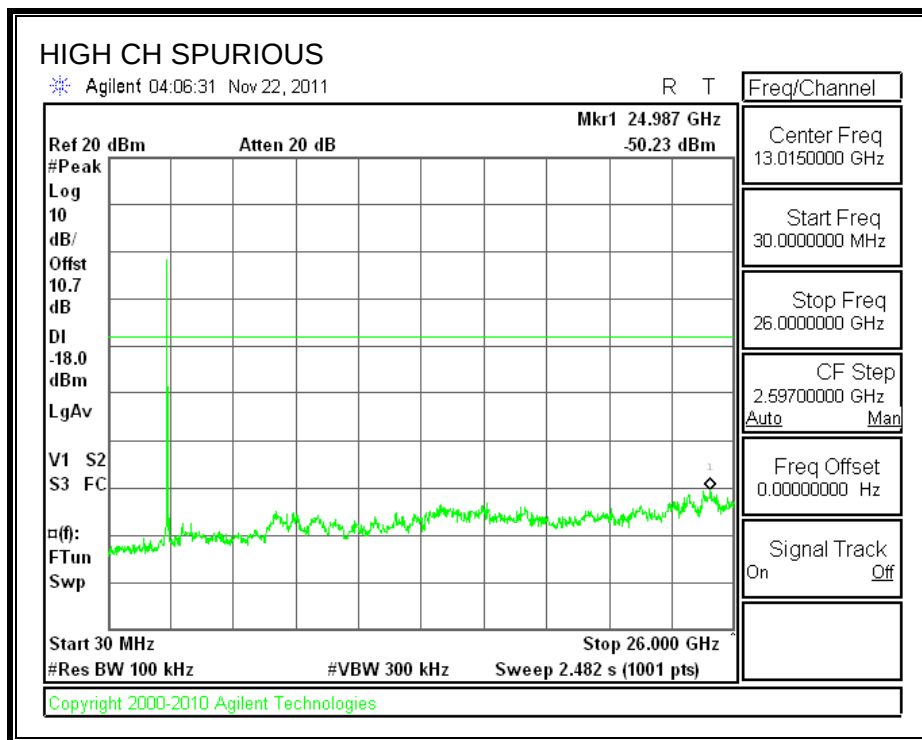

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz


8.2.1. TX ABOVE 1 GHz FOR 802.11b 1TX MODE IN THE 2.4 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

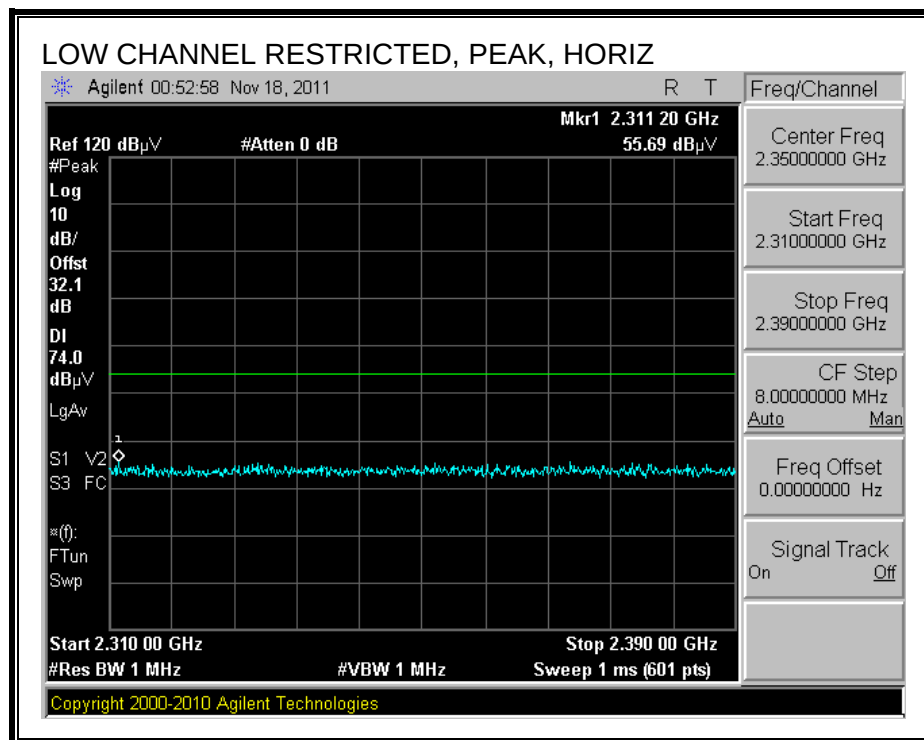

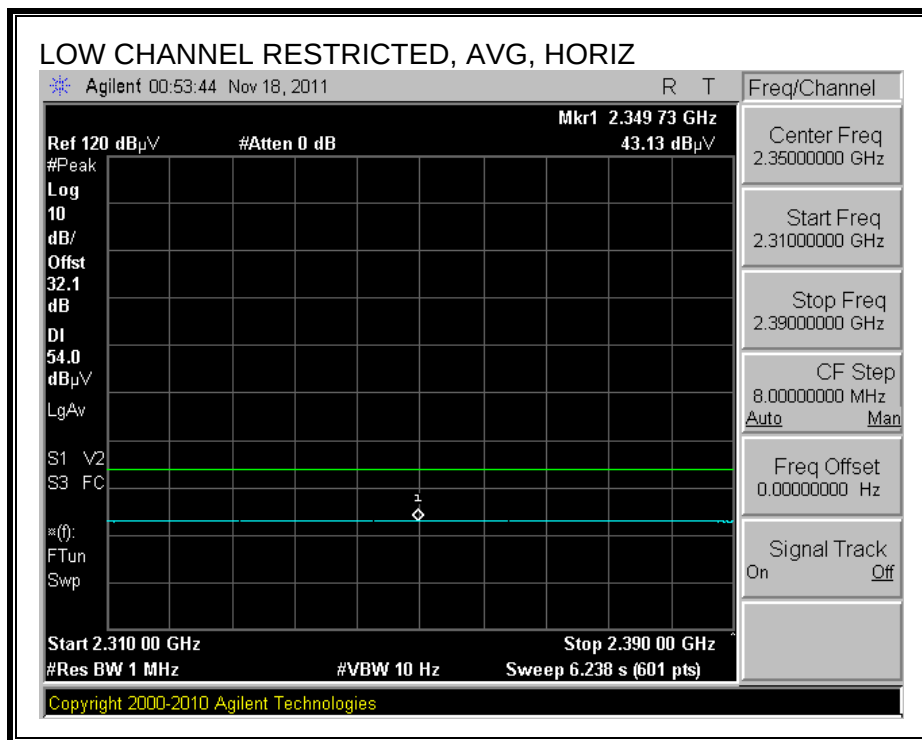



RESTRICTED BANEDGE (LOW CHANNEL, VERTICAL)

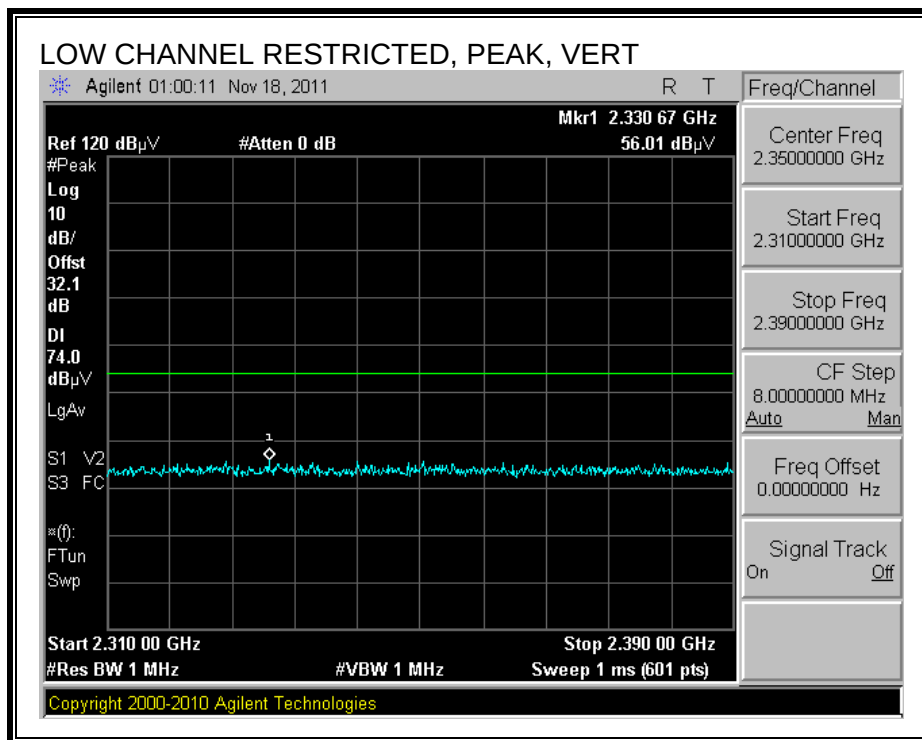

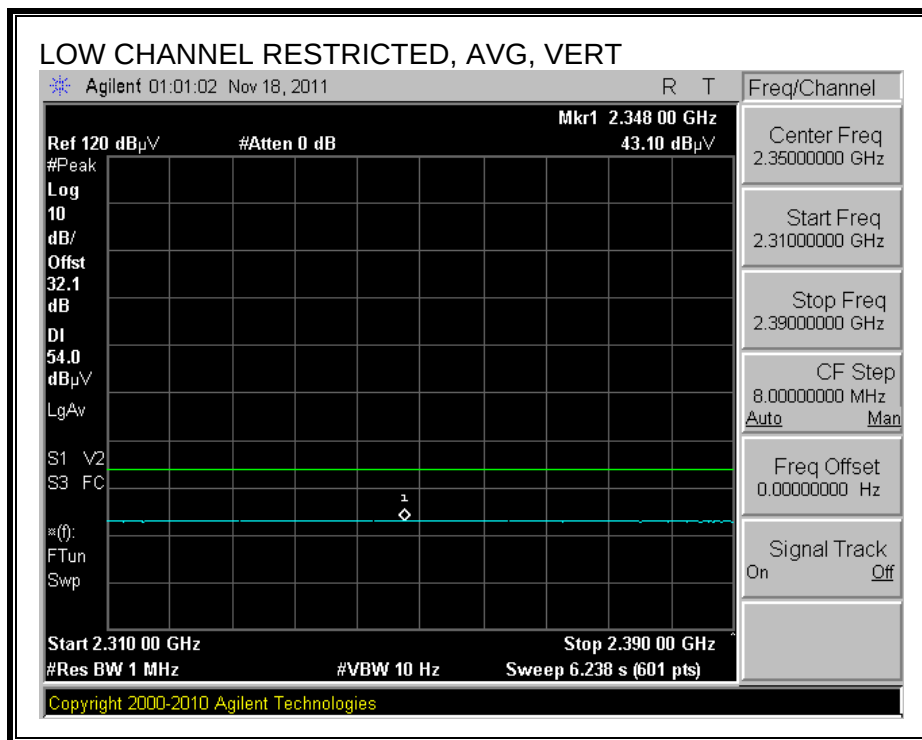



RESTRICTED BANEDGE (HIGH CHANNEL, HORIZONTAL)

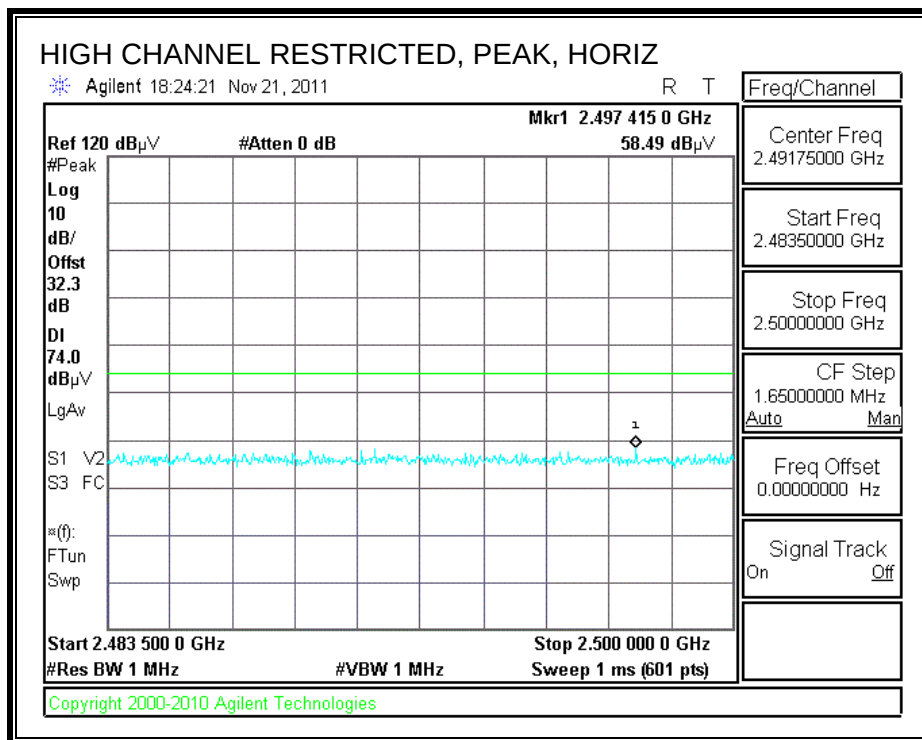

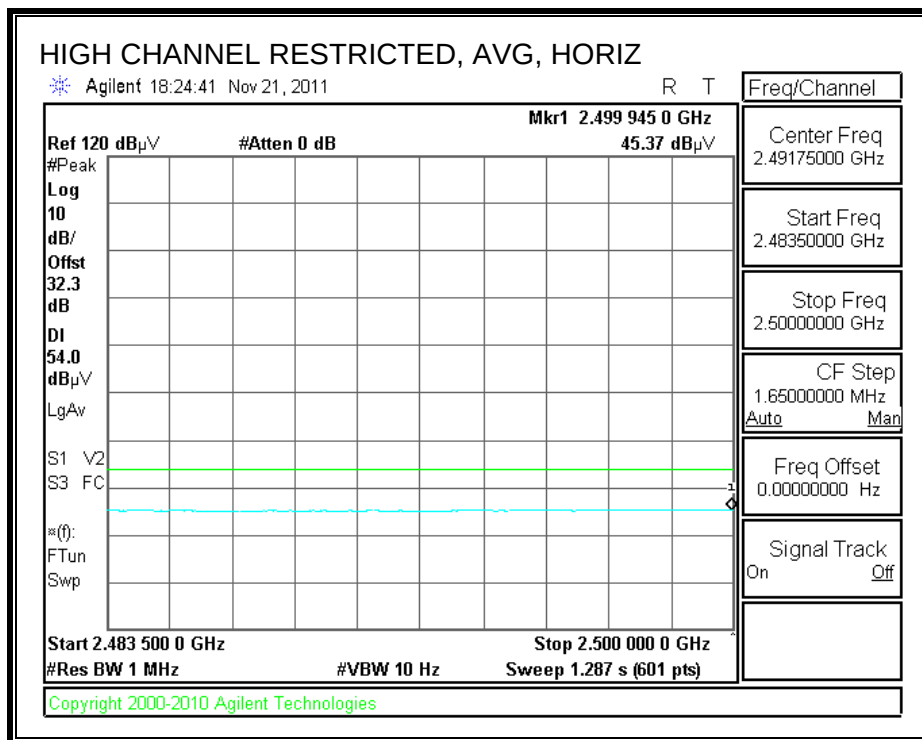

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

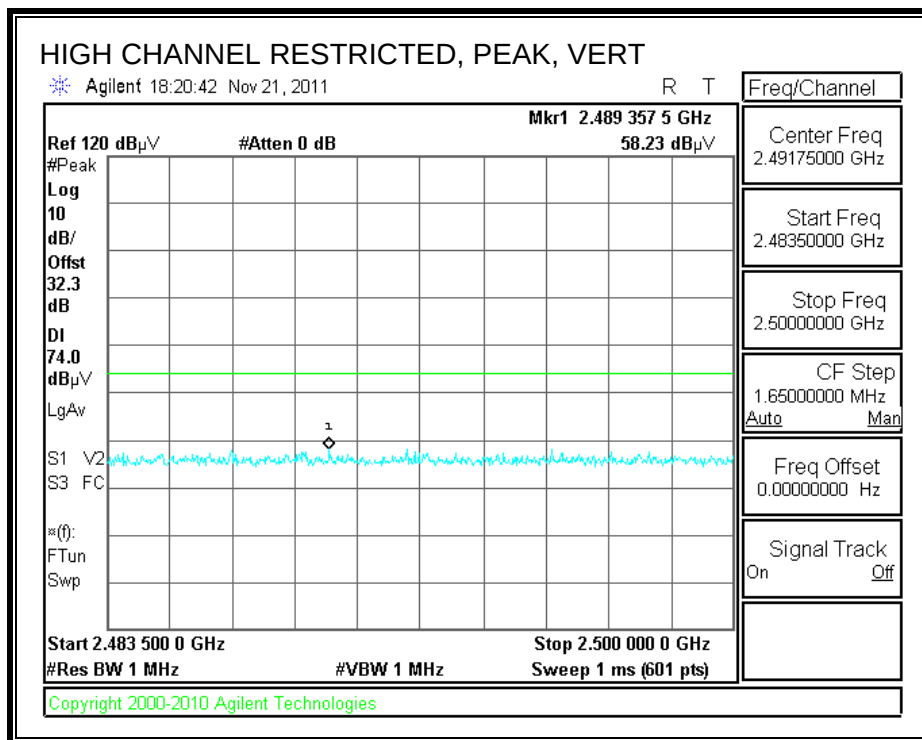

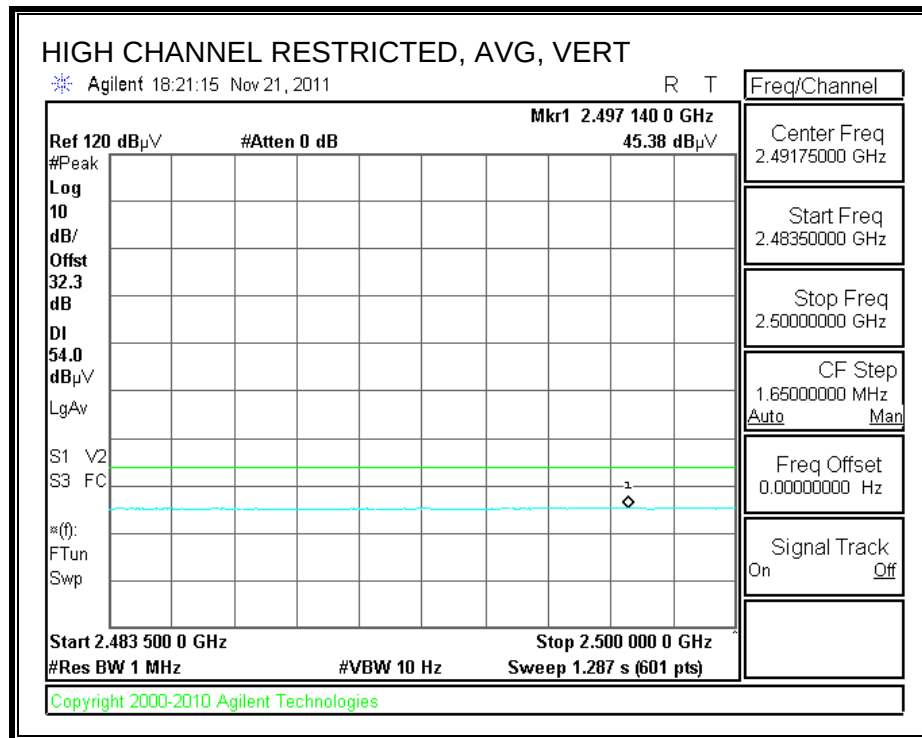



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																	
Compliance Certification Services, Fremont 5m Chamber-B																	
Company:		Qualcomm															
Project #:		11U14082															
Date:		11/21/2011															
Test Engineer:		Thanh Nguyen															
Configuration:		EUT StandAlone															
Mode:		Transmit b Mode															
Test Equipment:																	
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				Limit	
T60; S/N: 2238 @3m				T34 HP 8449B								T125; ARA 18-26GHz; S/N:1007				FCC 15.205	
Hi Frequency Cables																	
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz	
3' cable 22807700				12' cable 22807600				20' cable 22807500						R_001			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
Low Ch																	
4.824	3.0	37.6	25.0	33.9	6.3	-34.1	0.0	0.0	43.7	31.1	74	54	-30.3	-22.9	Noise floor/V		
4.824	3.0	37.8	24.9	33.9	6.3	-34.1	0.0	0.0	43.9	31.0	74	54	-30.1	-23.0	Noise floor/H		
Mid Ch																	
4.874	3.0	38.3	25.2	33.9	6.3	-34.0	0.0	0.0	44.5	31.4	74	54	-29.5	-22.6	Noise floor/V		
4.874	3.0	38.6	25.4	33.9	6.3	-34.0	0.0	0.0	44.8	31.6	74	54	-29.2	-22.4	Noise floor/H		
High Ch																	
4.924	3.0	38.2	25.1	34.0	6.3	-34.0	0.0	0.0	44.5	31.4	74	54	-29.5	-22.6	Noise floor/V		
4.924	3.0	38.0	25.5	34.0	6.3	-34.0	0.0	0.0	44.3	31.8	74	54	-29.7	-22.2	Noise floor/H		
Rev. 07.08.11																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										


8.2.2. TX ABOVE 1 GHz FOR 802.11g 1TX MODE IN THE 2.4 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

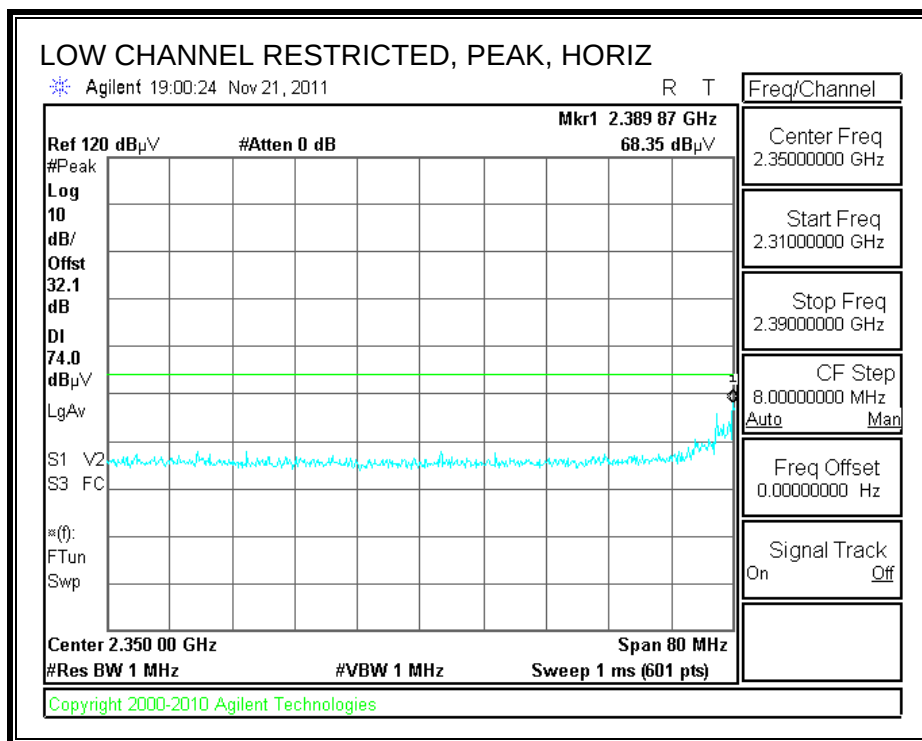

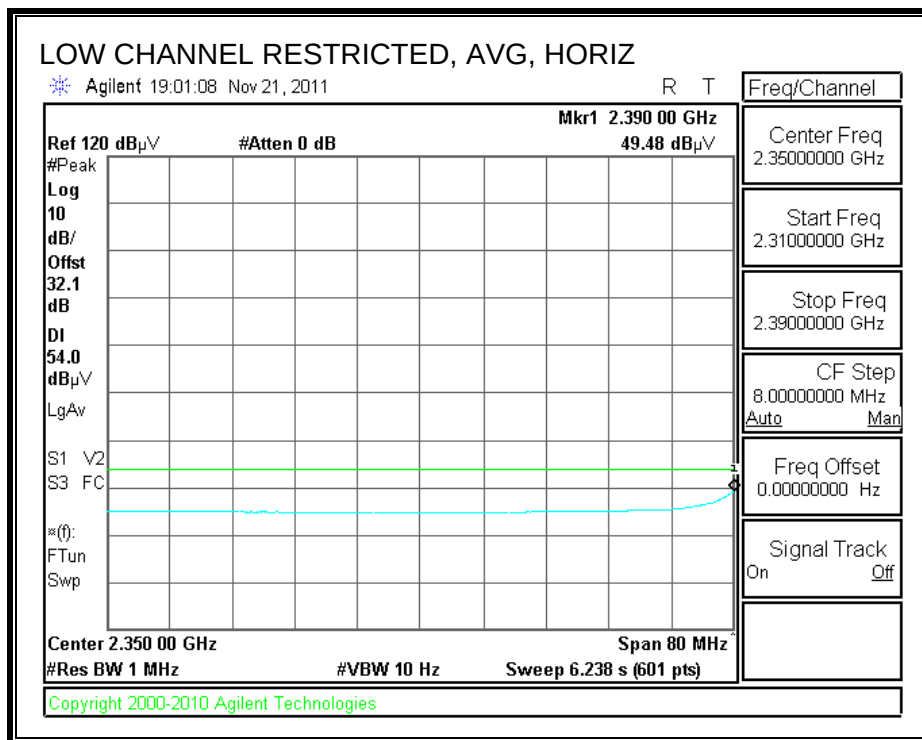



RESTRICTED BANEDGE (LOW CHANNEL, VERTICAL)

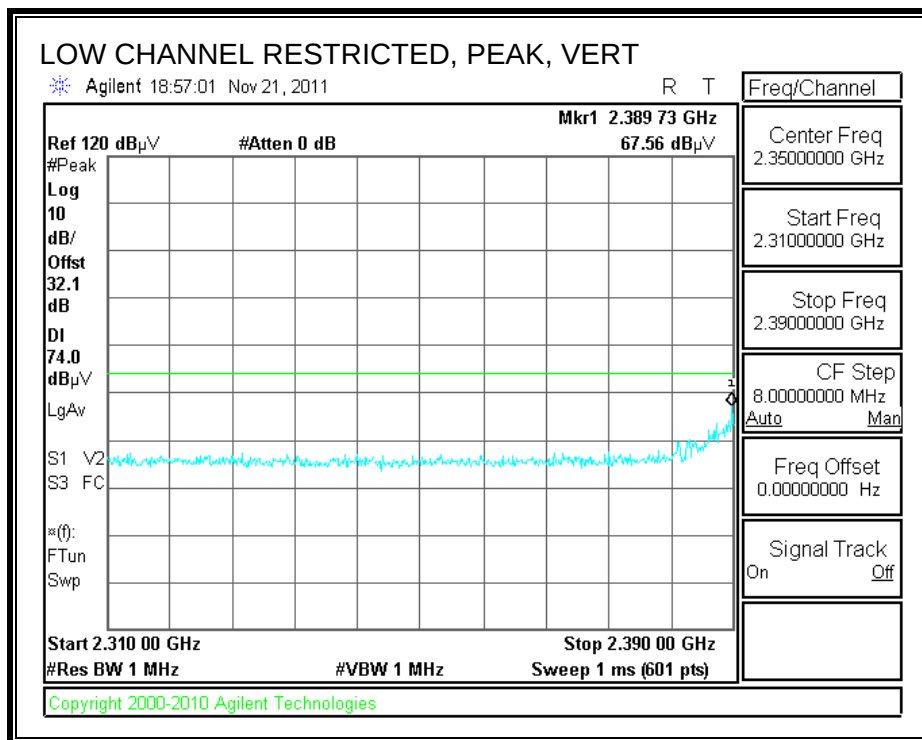

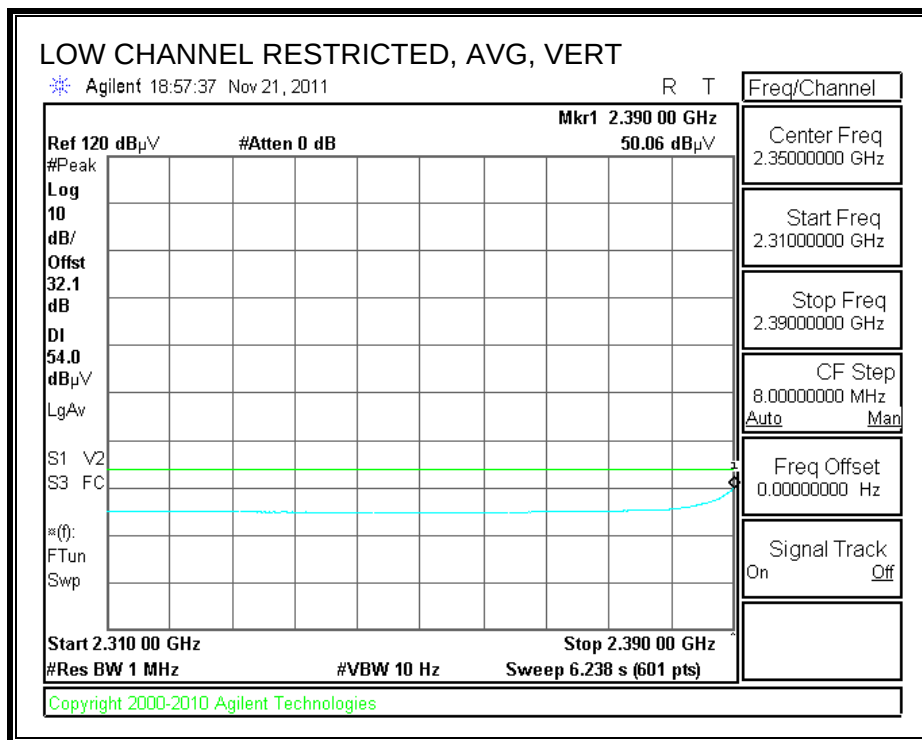



RESTRICTED BANEDGE (HIGH CHANNEL, HORIZONTAL)

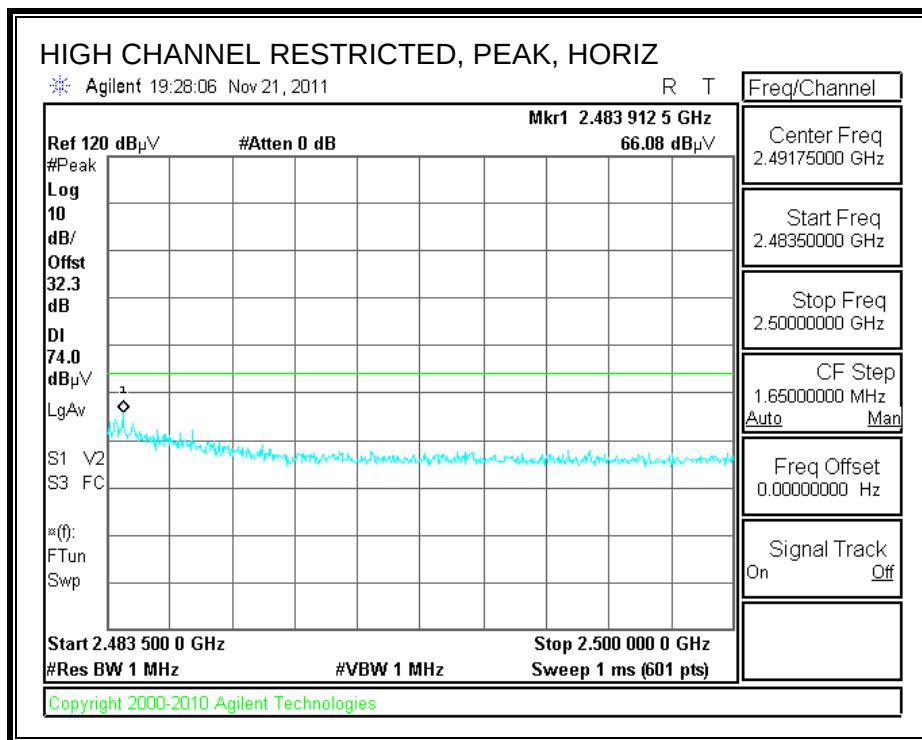

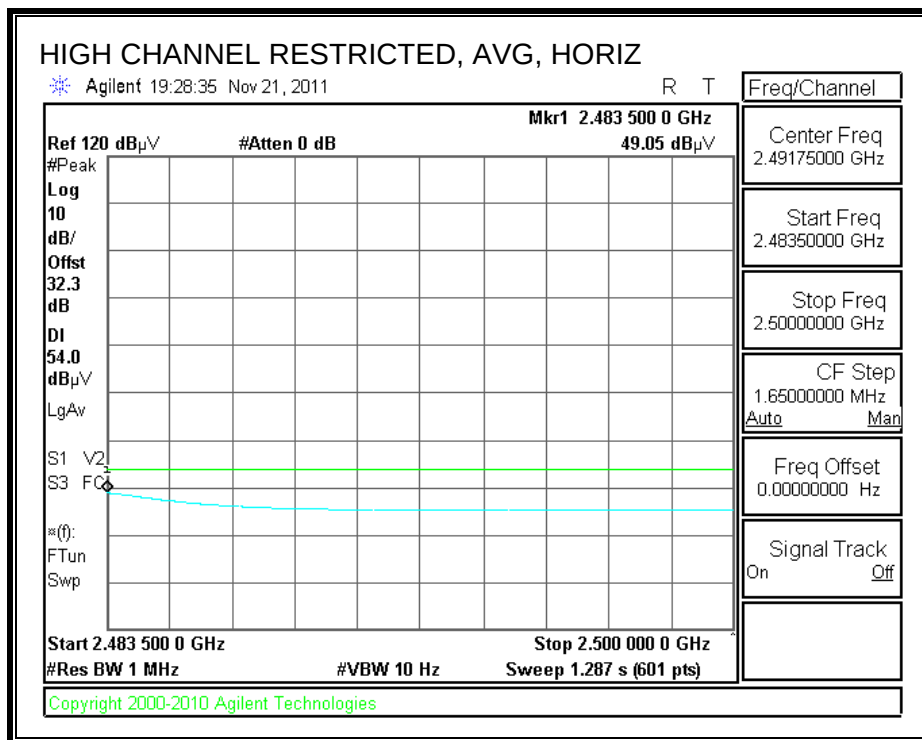

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

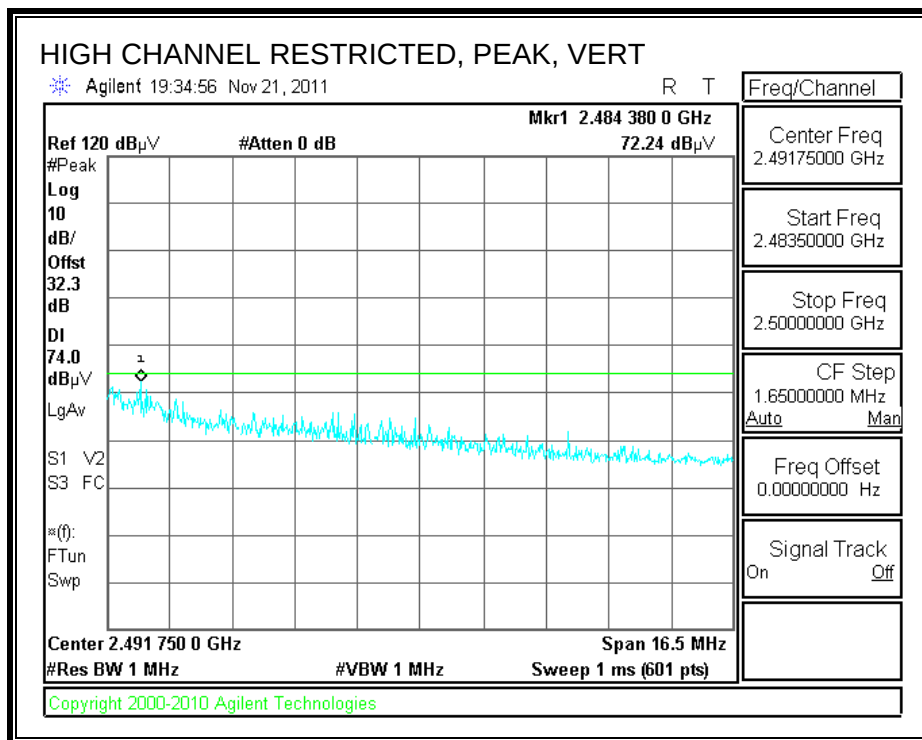

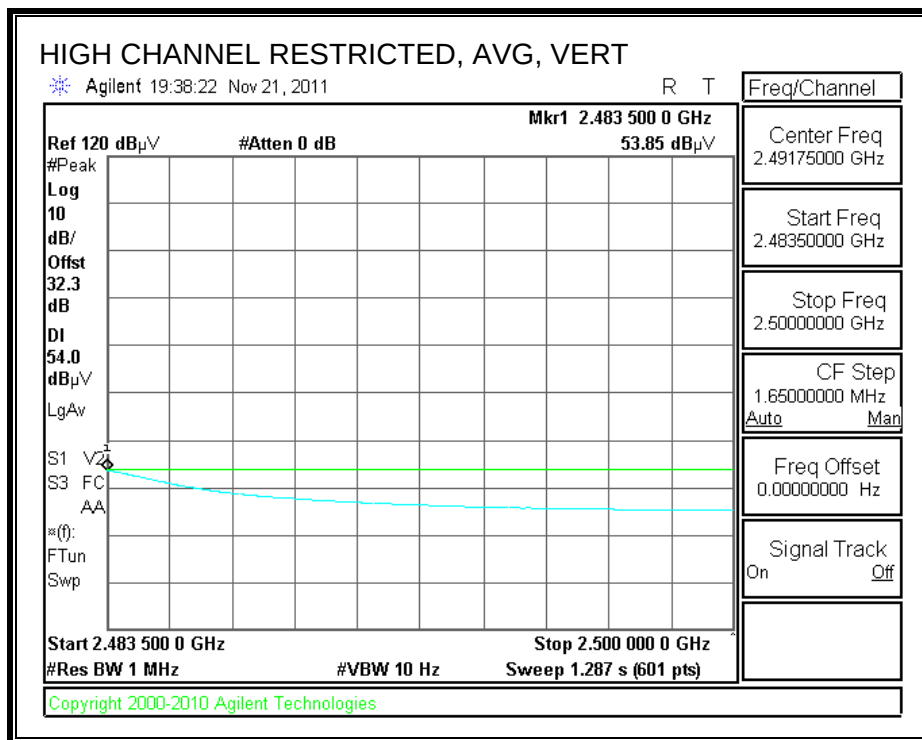

HARMONICS AND SPURIOUS EMISSIONS


High Frequency Measurement																	
Compliance Certification Services, Fremont 5m Chamber-B																	
Company:		Qualcomm															
Project #:		11U14082															
Date:		11/21/2011															
Test Engineer:		Thanh Nguyen															
Configuration:		EUT StandAlone															
Mode:		Transmit g Mode															
Test Equipment:																	
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				Limit	
T59; S/N: 3245 @3m				T145 Agilent 3008A0056								T125; ARA 18-26GHz; S/N:1007				FCC 15.205	
Hi Frequency Cables																	
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz	
3' cable 22807700				12' cable 22807600				20' cable 22807500						R_001			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
Low Ch																	
4.824	3.0	36.9	25.0	33.2	6.3	-34.8	0.0	0.0	41.5	29.6	74	54	-32.5	-24.4	Noise floor/V		
4.824	3.0	37.9	25.0	33.2	6.3	-34.8	0.0	0.0	42.5	29.6	74	54	-31.5	-24.4	Noise floor/H		
Mid Ch																	
4.874	3.0	37.9	25.0	33.2	6.3	-34.8	0.0	0.0	42.6	29.8	74	54	-31.4	-24.2	Noise floor/V		
4.874	3.0	38.1	25.0	33.2	6.3	-34.8	0.0	0.0	42.8	29.8	74	54	-31.2	-24.2	Noise floor/H		
High Ch																	
4.924	3.0	38.0	24.8	33.3	6.3	-34.8	0.0	0.0	42.8	29.6	74	54	-31.2	-24.4	Noise floor/V		
4.924	3.0	37.0	24.8	33.3	6.3	-34.8	0.0	0.0	41.8	29.6	74	54	-32.2	-24.4	Noise floor/H		
Rev. 07.08.11																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										

8.3. RECEIVER ABOVE 1 GHz


High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber-B															
Company:		Qualcomm													
Project #:		11U14082													
Date:		11/21/2011													
Test Engineer:		Thanh Nguyen													
Configuration:		EUT StandAlone													
Mode:		Receive Mode													
Test Equipment:															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T59; S/N: 3245 @3m		T145 Agilent 3008A005€						RX RSS 210							
Hi Frequency Cables															
3' cable 22807700		12' cable 22807600		20' cable 22807500		HPF		Reject Filter		<u>Peak Measurements</u> RBW=VBW=1MHz <u>Average Measurements</u> RBW=1MHz ; VBW=10Hz					
3' cable 22807700		12' cable 22807600		20' cable 22807500											
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fldr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
1.030	3.0	46.0	33.7	24.0	2.7	-35.9	0.0	0.0	36.7	24.4	74	54	-37.3	-29.6	Noise floor/V
1.650	3.0	43.6	31.0	26.8	3.4	-35.6	0.0	0.0	38.2	25.6	74	54	-35.8	-28.4	Noise floor/H
Rev. 07.08.11															
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit		
CL	Cable Loss					HPF	High Pass Filter								

8.4. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

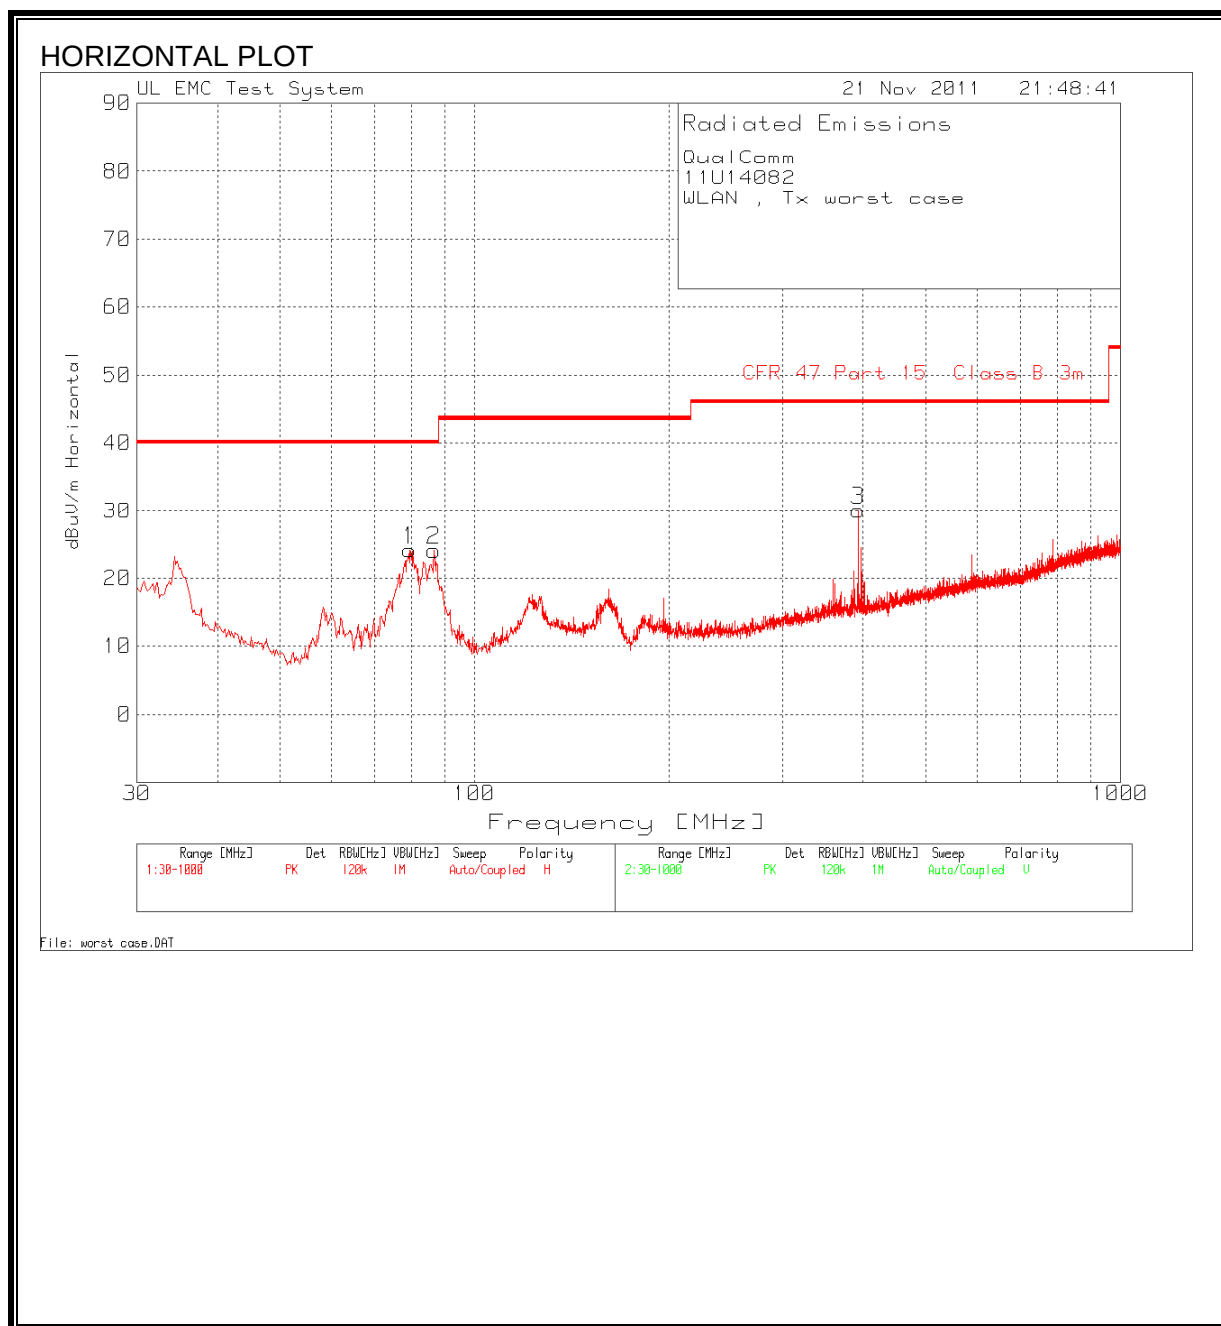

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

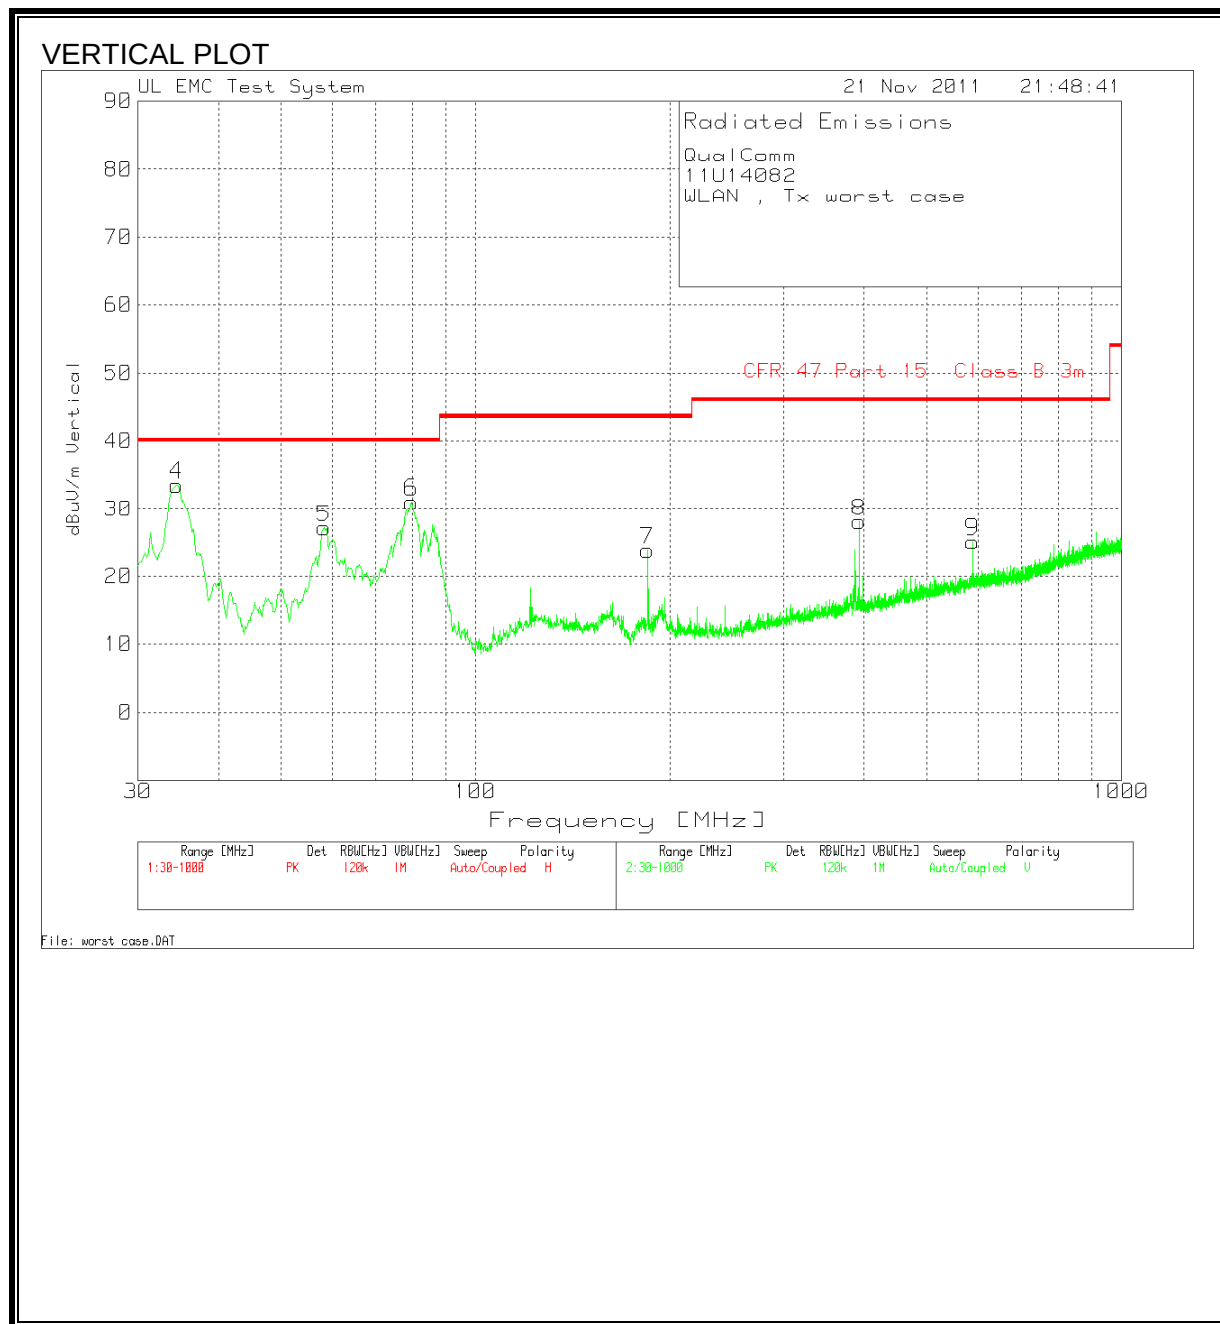

EMI DATA

Qualcomm									
11U14082									
WLAN , Tx worst case									
Range 1 30 - 1000MHz									
Test Freq. (MHz)	Meter Reading (dBuV)	Detector	Pre-Amp Gain [dB]	Antenna Factor [dB]	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Azimuth	Polarity
79.4305	43.25	PK	-27.1	8	24.15	40	-15.85	176	Horz
86.6027	43.62	PK	-27	7.5	24.12	40	-15.88	176	Horz
392.6839	40.79	PK	-25.6	14.9	30.09	46	-15.91	99	Horz
Range: 2 30 - 1000MHz									
Test Freq. (MHz)	Meter Reading (dBuV)	Detector	Pre-Amp Gain [dB]	Antenna Factor [dB]	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Azimuth	Polarity
34.4584	43.23	PK	-27.5	17.8	33.53	40	-6.47	99	Vert
58.3014	46.24	PK	-27.2	8.1	27.14	40	-12.86	99	Vert
79.6243	50.11	PK	-27.1	8	31.01	40	-8.99	99	Vert
184.8821	38.81	PK	-26	11	23.81	43.5	-19.69	99	Vert
392.6839	38.76	PK	-25.6	14.9	28.06	46	-17.94	176	Vert
589.0488	32.46	PK	-25.7	18.3	25.06	46	-20.94	99	Vert

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE


ANSI C63.4

RESULTS


6 WORST EMISSIONS

Qualcomm								
11U14082								
Mode WLAN								
Line-L1 .15 - 30MHz								
Test Freq. (MHz)	Meter Reading	Detector	LISN [dB]	Correct Reading (dBuVolts)	Class B Quasi-peak Limit	Quasi-Peak Margin	Class B Average Limit	Average Margin
0.285	54.41	PK	0.8	55.21	60.7	-5.49		
0.2841	50.89	QP	0.8	51.69	60.7	-9.01		
0.285	44.68	Av	0.8	45.48	60.7	-15.22	50.7	-5.22
0.402	45.82	PK	0.5	46.32	57.8	-11.48		
0.3993	38.2	QP	0.5	38.7	57.87	-19.17	47.87	-9.17
0.402	31.31	Av	0.5	31.81	57.8	-25.99	47.8	-15.99
1.032	43.6	PK	0.3	43.9	56	-12.1		
1.0347	34.06	QP	0.3	34.36	56	-21.64	46	-11.64
1.032	28.87	Av	0.3	29.17	56	-26.83	46	-16.83
Line-L2 .15 - 30MHz								
Test Freq. (MHz)	Meter Reading	Detector	LISN [dB]	Correct Reading (dBuVolts)	Class B Quasi-peak Limit	Quasi-Peak Margin	Class B Average Limit	Average Margin
0.2895	57.31	PK	0.8	58.11	60.5	-2.39		
0.285	53.37	QP	0.8	54.17	60.67	-6.5		
0.2895	46.4	Av	0.8	47.2	60.5	-13.3	50.5	-3.3
0.492	50.49	PK	0.5	50.99	56.1	-5.11		
0.4875	46.05	QP	0.5	46.55	56.21	-9.66		
0.492	38.25	Av	0.5	38.75	56.1	-17.35	46.1	-7.35
1.3605	54.08	PK	0.3	54.38	56	-1.62		
1.3641	44.64	QP	0.3	44.94	56	-11.06		
1.3605	41.57	Av	0.3	41.87	56	-14.13	46	-4.13

LINE 1 RESULTS

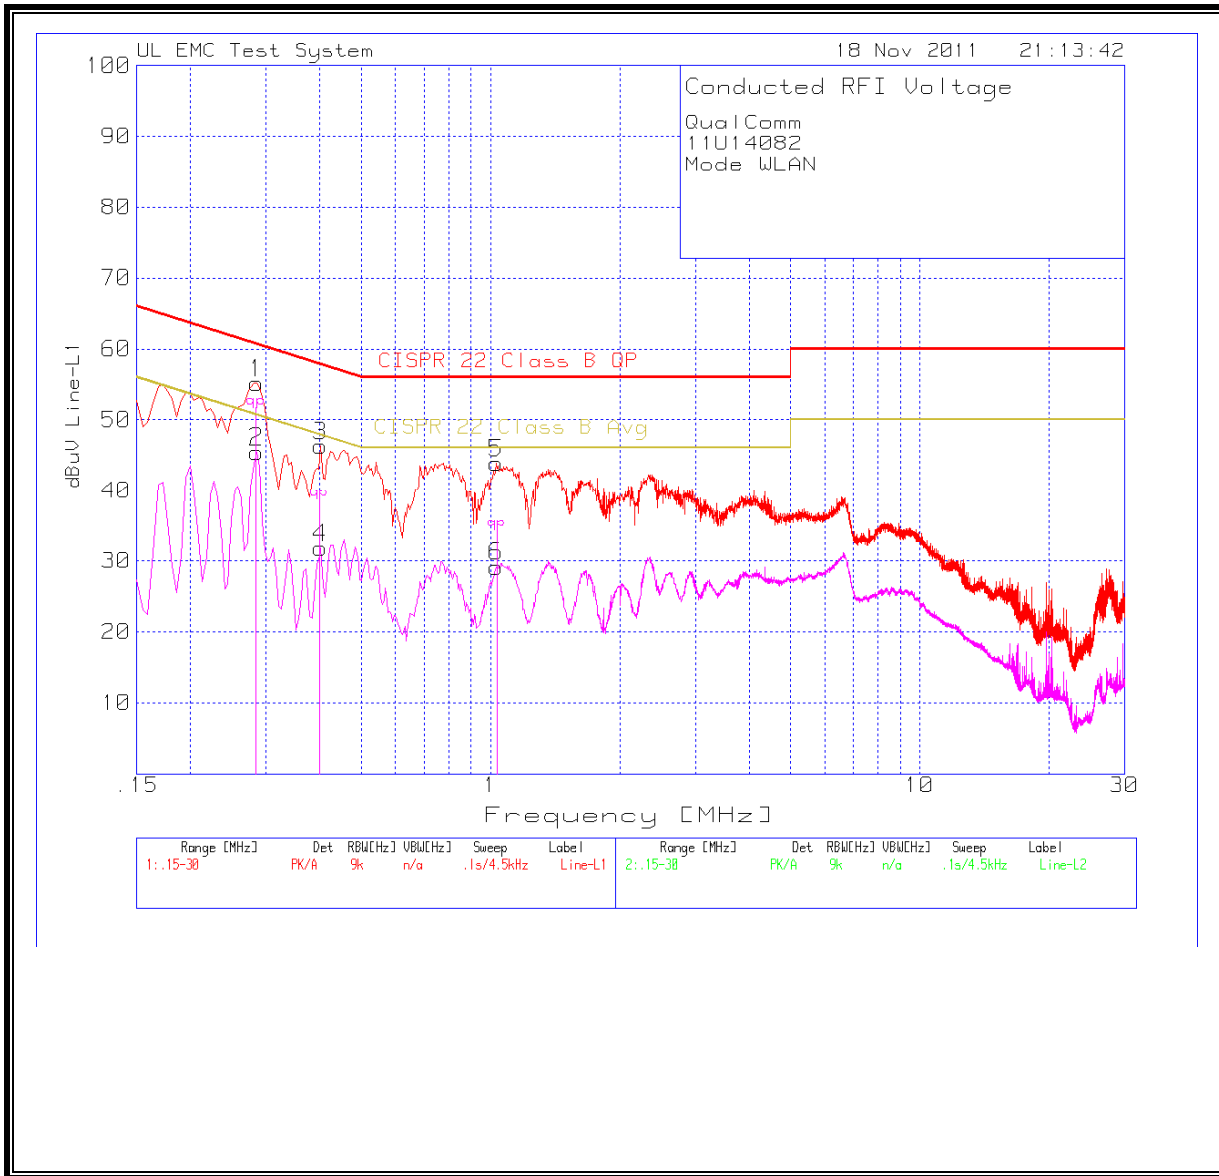

LINE 2 RESULTS

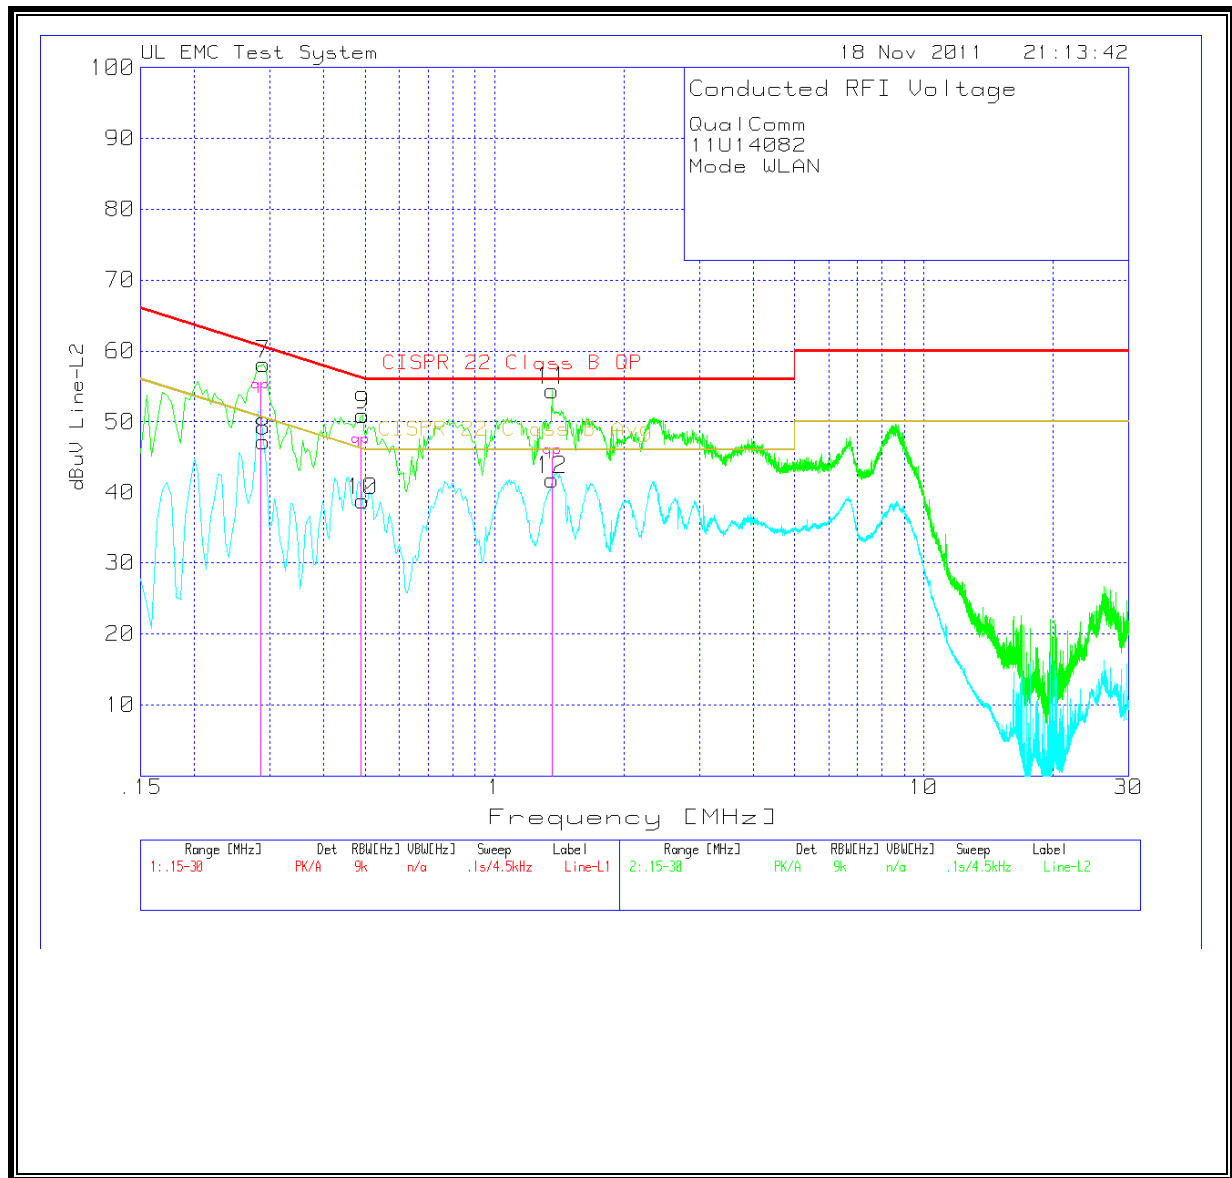

10. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	$280/f$	$2.19/f$		6
10–30	28	$2.19/f$		6
30–300	28	0.073	2*	6
300–1 500	$1.585f^{0.5}$	$0.0042f^{0.5}$	$f/150$	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	$616\,000/f^{1.2}$
150 000–300 000	$0.158f^{0.5}$	$4.21 \times 10^{-4}f^{0.5}$	$6.67 \times 10^{-5}f$	$616\,000/f^{1.2}$

* Power density limit is applicable at frequencies greater than 100 MHz.

Notes: 1. Frequency, f , is in MHz.
2. A power density of 10 W/m² is equivalent to 1 mW/cm².
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \text{Pi} * D^2)$$

where

S = Power density in W/m²

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m² is converted to units of mW/cm² by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \text{Pi} * S))$$

where

D = Separation distance in m

EIRP = Equivalent Isotropic Radiated Power in W

S = Power density in W/m²

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power * Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)$$

where

Px = Power of transmitter x

Gx = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Band	Mode	Separation Distance (m)	Output AV Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m^2)	FCC Power Density (mW/cm^2)
2.4 GHz	WLAN	0.20	16.22	3.80	0.20	0.020