

FCC Test Report

Product Name	Wireless Headphones
Model No.	ATH-M50xBT
FCC ID.	JFZM50XBT

Applicant	Audio-Technica Corporation
Address	2-46-1 Nishi-naruse, Machida, Tokyo, 194-8666

Date of Receipt	Aug. 15, 2018
Issued Date	Sep. 06, 2018
Report No.	1880226R-RFUSP01V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Test Report

Issued Date: Sep. 06, 2018

Report No.: 1880226R-RFUSP01V00



Product Name	Wireless Headphones
Applicant	Audio-Technica Corporation
Address	2-46-1 Nishi-naruse, Machida, Tokyo, 194-8666
Manufacturer	Audio-Technica Corporation
Model No.	ATH-M50xBT
FCC ID.	JFZM50XBT
EUT Rated Voltage	DC 3.7V (Power by Battery)
EUT Test Voltage	DC 3.7V (Power by Battery)
Trade Name	Audio-Technica Corporation
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2017 ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Joanne Lin)

Tested By :



(Engineer / Bill Lin)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description.....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
1.7. List of Test Equipment.....	10
2. CONDUCTED EMISSION	11
2.1. Test Setup	11
2.2. Limits.....	11
2.3. Test Procedure	12
2.4. Uncertainty	12
2.5. Test Result of Conducted Emission.....	13
3. PEAK POWER OUTPUT	15
3.1. Test Setup	15
3.2. Limit	15
3.3. Test Procedure	15
3.4. Uncertainty	15
3.5. Test Result of Peak Power Output	16
4. RADIATED EMISSION	18
4.1. Test Setup	18
4.2. Limits.....	19
4.3. Test Procedure	20
4.4. Uncertainty	20
4.5. Test Result of Radiated Emission	21
5. RF ANTENNA CONDUCTED TEST	29
5.1. Test Setup	29
5.2. Limits.....	29
5.3. Test Procedure	29
5.4. Uncertainty	29
5.5. Test Result of RF Antenna Conducted Test	30
6. BAND EDGE	32
6.1. Test Setup	32
6.2. Limit	33
6.3. Test Procedure	33
6.4. Uncertainty	33
6.5. Test Result of Band Edge	34
7. CHANNEL NUMBER.....	46
7.1. Test Setup	46
7.2. Limit	46
7.3. Test Procedure	46
7.4. Uncertainty	46
7.5. Test Result of Channel Number.....	47
8. CHANNEL SEPARATION.....	49
8.1. Test Setup	49
8.2. Limit	49
8.3. Test Procedure	49
8.4. Uncertainty	49
8.5. Test Result of Channel Separation.....	50
9. DWELL TIME	54
9.1. Test Setup	54
9.2. Limit	54
9.3. Test Procedure	54
9.4. Uncertainty	54
9.5. Test Result of Dwell Time	55
10. OCCUPIED BANDWIDTH	59
10.1. Test Setup	59

10.2.	Limits.....	59
10.3.	Test Procedure	59
10.4.	Uncertainty	59
10.5.	Test Result of Occupied Bandwidth	60
11.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	64
Attachment 1: EUT Test Photographs		
Attachment 2: EUT Detailed Photographs		

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Wireless Headphones
Trade Name	Audio-Technica Corporation
Model No.	ATH-M50xBT
FCC ID.	JFZM50XBT
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	Chip Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	MITSUBISHI	AM03DP-ST01	Chip Antenna	1.2dBi for 2.4 GHz

Note: The antenna of EUT is conforming to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is a Wireless Headphones computer with a Bluetooth.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
5. Bluetooth operation was evaluated at both 1Mb/s and 3Mb/s data rates. 2Mb/s data rate was found, through pre-testing, to produce emissions similar to those for 3Mb/s.

Test Mode	Mode 1: Transmit - 1Mbps
	Mode 2: Transmit - 3Mbps

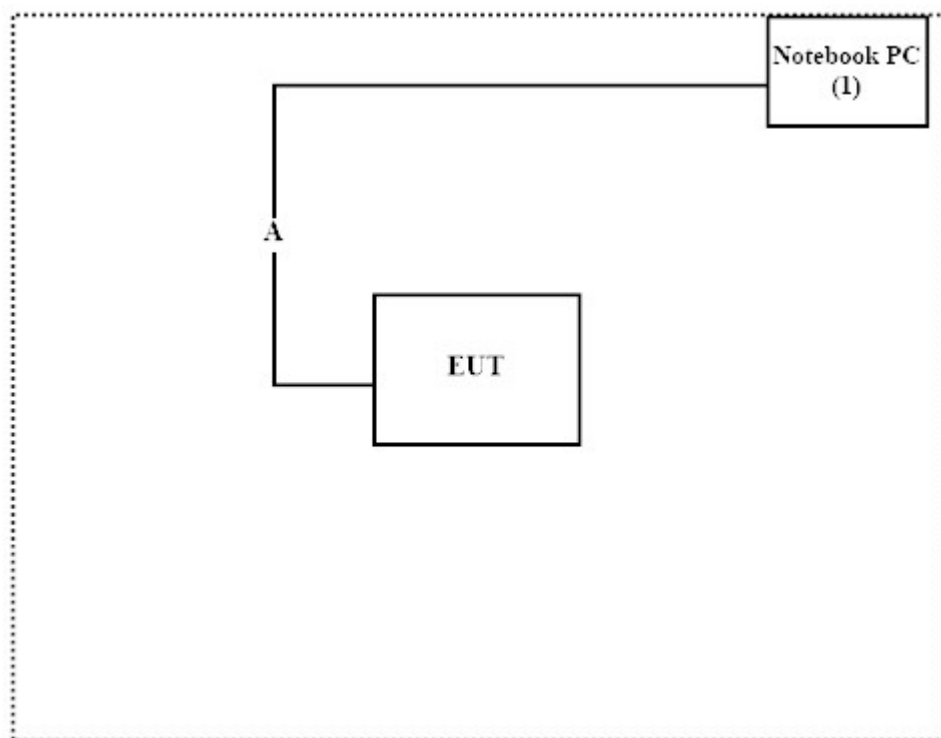
1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	P62G	CY9FJC2	N/A

Signal Cable Type		Signal cable Description
A	USB Cable	Shielded, 1.2m

1.4. Configuration of Tested System



1.5. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute software “BlueTest3 Version 2.6.2” on the Notebook PC.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: http://www.dekra.com.tw/index_en

Site Description: Accredited by TAF
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd.
Site Address: No.159, Sec. 2, Wenhua 1st Rd., Linkou Dist.,
New Taipei City 24457, Taiwan.
TEL: 886-2-2602-7968 / FAX : 866-2-2602-3286
E-Mail : info.tw@dekra.com

FCC Accreditation Number: TW0023

1.7. List of Test Equipment

For Conduction measurements /ASR1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	EMI Test Receiver	R&S	ESR7	161601	2018.02.08	2019.02.07
X	Two-Line V-Network	R&S	ENV216	101306	2018.03.09	2019.03.08
X	Two-Line V-Network	R&S	ENV216	101307	2018.03.20	2019.03.19
X	Coaxial Cable	Quietek	RG400_BNC	RF001	2018.05.24	2019.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “X” are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

For Conducted measurements /ASR4

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103464	2018.01.23	2019.01.22
X	Power Meter	Anritsu	ML2496A	1548003	2017.12.11	2018.12.10
X	Power Sensor	Anritsu	MA2411B	1531024	2017.12.11	2018.12.10
X	Power Sensor	Anritsu	MA2411B	1531025	2017.12.11	2018.12.10
	Bluetooth Tester	R&S	CBT	101238	2018.01.18	2019.01.17

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “X” are used to measure the final test results.
3. Test Software version : QuieTek Conduction Test System V8.0.110

For Radiated measurements /ACB1


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	AMETEK	HLA6121	49611	2018.01.26	2019.01.25
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-674	2018.04.02	2019.04.01
X	Horn Antenna	ETS-Lindgren	3117	00203800	2017.11.10	2018.11.09
X	Horn Antenna	Com-Power	AH-840	101087	2018.06.01	2019.05.31
X	Pre-Amplifier	EMCI	EMC001330	980316	2018.06.01	2019.05.31
X	Pre-Amplifier	EMCI	EMC051835SE	980311	2018.06.04	2019.06.03
X	Pre-Amplifier	EMCI	EMC05820SE	980310	2018.06.04	2019.06.03
X	Pre-Amplifier	EMCI	EMC184045SE	980314	2018.05.16	2019.05.15
X	Filter	MICRO TRONICS	BRM50702	G249	2018.08.20	2019.08.19
	Filter	MICRO TRONICS	BRM50716	G187	2018.08.20	2019.08.19
X	EMI Test Receiver	R&S	ESR7	101602	2017.12.11	2018.12.10
X	Spectrum Analyzer	R&S	FSV40	101148	2018.02.08	2019.02.07
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2018.05.25	2019.05.24
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2018.05.16	2019.05.15

Note:

1. Loop Antenna is calibrated every two year, the other equipments are calibrated every one year.
2. The test instruments marked with “X” are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

2. Conducted Emission

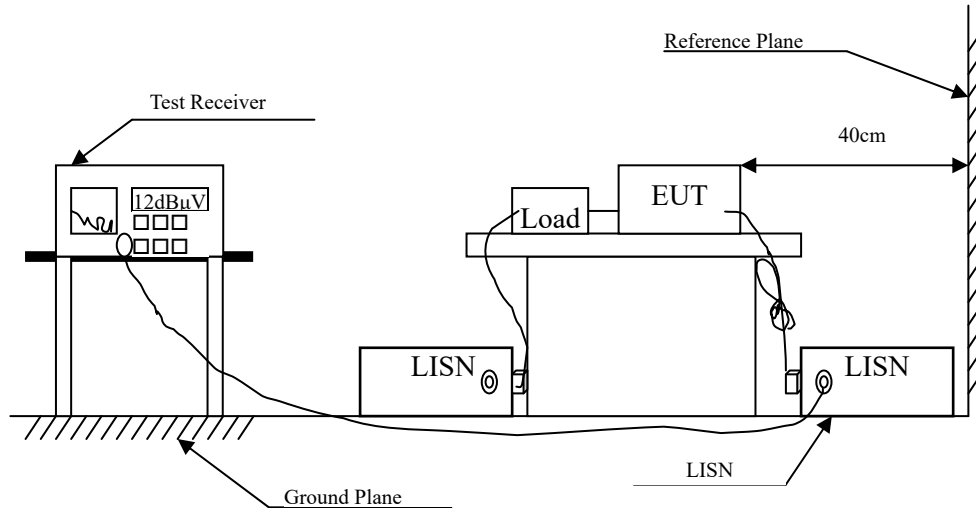2.1. Test Setup



2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

2.4. Uncertainty

$\pm 2.35\text{dB}$

2.5. Test Result of Conducted Emission

Product : Wireless Headphones
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2018/08/27

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V	dB	dB μ V
LINE 1					
Quasi-Peak					
0.152	9.611	44.143	53.754	-12.189	65.943
0.258	9.614	30.187	39.800	-23.114	62.914
0.443	9.626	26.105	35.731	-21.898	57.629
2.677	9.677	18.396	28.073	-27.927	56.000
3.694	9.707	22.889	32.596	-23.404	56.000
9.893	9.839	23.144	32.983	-27.017	60.000
Average					
0.152	9.611	27.510	37.121	-18.822	55.943
0.258	9.614	17.154	26.768	-26.146	52.914
0.443	9.626	13.758	23.384	-24.245	47.629
2.677	9.677	12.021	21.698	-24.302	46.000
3.694	9.707	11.756	21.463	-24.537	46.000
9.893	9.839	17.431	27.270	-22.730	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Wireless Headphones
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2018/08/27


Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V	dB	dB μ V
LINE 2					
Quasi-Peak					
0.152	9.602	41.268	50.870	-15.073	65.943
0.310	9.614	24.827	34.441	-26.988	61.429
0.458	9.619	21.421	31.040	-26.160	57.200
2.695	9.677	18.168	27.845	-28.155	56.000
3.712	9.707	23.802	33.509	-22.491	56.000
9.827	9.839	18.659	28.498	-31.502	60.000
Average					
0.152	9.602	21.885	31.487	-24.456	55.943
0.310	9.614	15.468	25.082	-26.347	51.429
0.458	9.619	9.243	18.862	-28.338	47.200
2.695	9.677	11.352	21.029	-24.971	46.000
3.712	9.707	12.014	21.721	-24.279	46.000
9.827	9.839	12.699	22.538	-27.462	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output

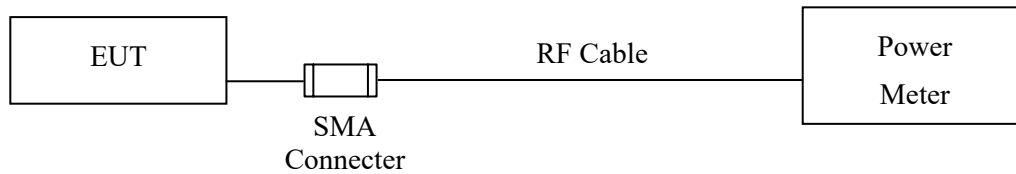3.1. Test Setup



3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

3.4. Uncertainty

± 0.86 dB

3.5. Test Result of Peak Power Output

Product : Wireless Headphones
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit - 1Mbps
Test Date : 2018/08/23

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	7.15	1 Watt= 30 dBm	Pass
Channel 39	2441.00	6.93	1 Watt= 30 dBm	Pass
Channel 78	2480.00	6.29	1 Watt= 30 dBm	Pass


Product : Wireless Headphones
Test Item : Peak Power Output
Test Mode : Mode 2: Transmit - 3Mbps
Test Date : 2018/08/23

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	5.65	1 Watt= 30 dBm	Pass
Channel 39	2441.00	5.58	1 Watt= 30 dBm	Pass
Channel 78	2480.00	4.96	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup

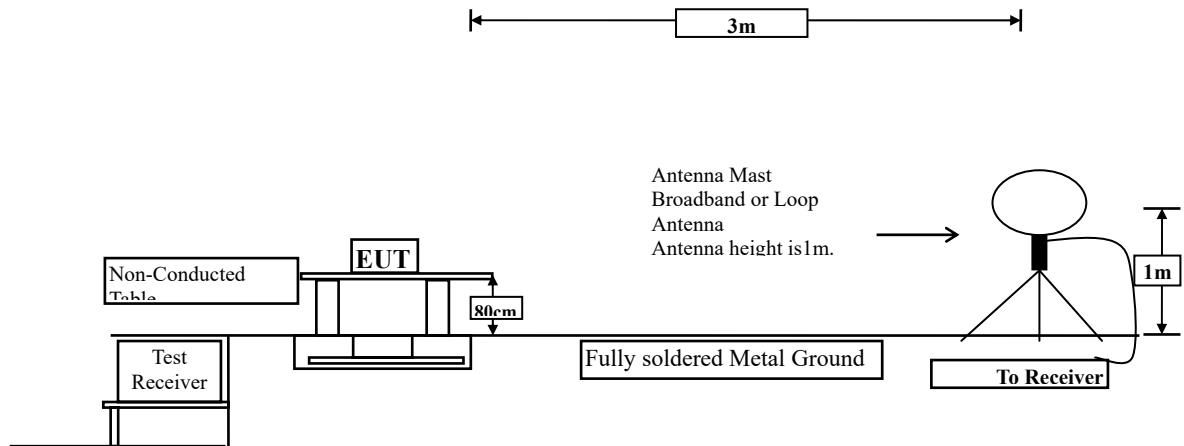
Radiated Emission Under 30MHz



Radiated Emission Below 1GHz

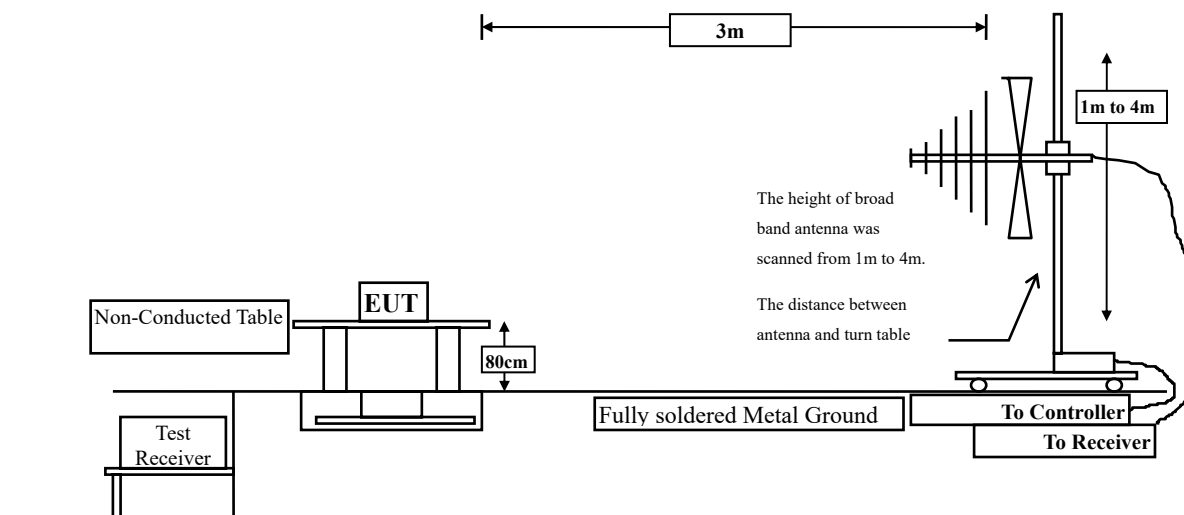

Radiated Emission Above 1GHz

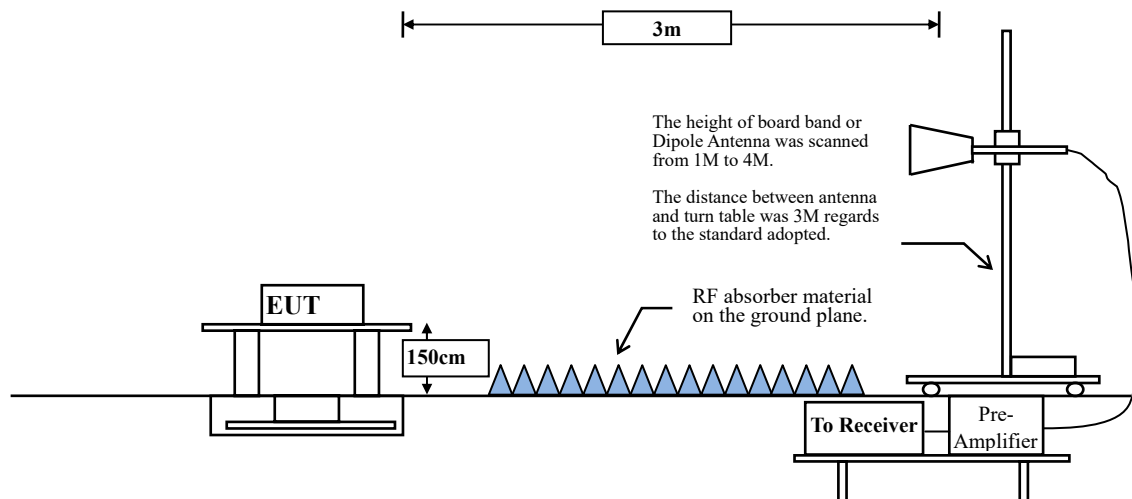

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

4.4. Uncertainty

Horizontal polarization :

30-300MHz: $\pm 4.08\text{dB}$; 300M-1GHz: $\pm 3.86\text{dB}$; 1-18GHz: $\pm 3.77\text{dB}$; 18-40GHz: $\pm 3.98\text{dB}$

Vertical polarization :

30-300MHz: $\pm 4.81\text{dB}$; 300M-1GHz: $\pm 3.87\text{dB}$; 1-18GHz : $\pm 3.83\text{dB}$; 18-40GHz: $\pm 3.98\text{dB}$

4.5. Test Result of Radiated Emission

Product : Wireless Headphones
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2018/08/29

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4804.000	-6.081	52.400	46.319	-27.681	74.000
7206.000	-3.033	49.590	46.557	-27.443	74.000
9608.000	-0.774	45.710	44.937	-29.063	74.000
Average					
Detector:					
--					54.000
Vertical					
Peak Detector:					
4804.000	-6.081	51.660	45.579	-28.421	74.000
7206.000	-3.033	49.790	46.757	-27.243	74.000
9608.000	-0.774	45.850	45.077	-28.923	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Headphones
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps(2441MHz)
 Test Date : 2018/08/29

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4882.000	-6.042	51.590	45.548	-28.452	74.000
7323.000	-2.954	50.840	47.886	-26.114	74.000
9764.000	-0.487	46.440	45.953	-28.047	74.000
Average					
Detector:					
--					54.000
Vertical					
Peak Detector:					
4882.000	-6.042	50.750	44.708	-29.292	74.000
7323.000	-2.954	50.250	47.296	-26.704	74.000
9764.000	-0.487	46.510	46.023	-27.977	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Headphones
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2018/08/29

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4960.000	-6.041	51.100	45.059	-28.941	74.000
7440.000	-2.805	50.180	47.375	-26.625	74.000
9920.000	-0.260	45.970	45.710	-28.290	74.000
Average					
Detector:					
--					54.000
Vertical					
Peak Detector:					
4960.000	-6.041	51.200	45.159	-28.841	74.000
7440.000	-2.805	50.920	48.115	-25.885	74.000
9920.000	-0.260	46.040	45.780	-28.220	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Headphones
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2402MHz)
 Test Date : 2018/08/29

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level	dB	dB μ V/m
	dB	dB μ V	dB μ V/m		
Horizontal					
Peak Detector:					
4804.000	-6.081	50.850	44.769	-29.231	74.000
7206.000	-3.033	48.460	45.427	-28.573	74.000
9608.000	-0.774	46.130	45.357	-28.643	74.000
Average					
Detector:					
--					54.000
Vertical					
Peak Detector:					
4804.000	-6.081	49.710	43.629	-30.371	74.000
7206.000	-3.033	47.920	44.887	-29.113	74.000
9608.000	-0.774	46.040	45.267	-28.733	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Headphones
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2018/08/29

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
Peak Detector:					
4882.000	-6.042	50.220	44.178	-29.822	74.000
7323.000	-2.954	48.450	45.496	-28.504	74.000
9764.000	-0.487	46.240	45.753	-28.247	74.000
Average					
Detector:					
--					54.000
Vertical					
Peak Detector:					
4882.000	-6.042	49.820	43.778	-30.222	74.000
7323.000	-2.954	48.020	45.066	-28.934	74.000
9764.000	-0.487	46.060	45.573	-28.427	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Headphones
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2018/08/29

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
4960.000	-6.041	50.680	44.639	-29.361	74.000
7440.000	-2.805	47.820	45.015	-28.985	74.000
9920.000	-0.260	45.500	45.240	-28.760	74.000
Average					
Detector:					
--					54.000
Vertical					
Peak Detector:					
4960.000	-6.041	49.710	43.669	-30.331	74.000
7440.000	-2.805	47.670	44.865	-29.135	74.000
9920.000	-0.260	45.270	45.010	-28.990	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Wireless Headphones
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2441MHz)
 Test Date : 2018/08/28

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
49.681	-10.918	35.264	24.345	-15.655	40.000
111.536	-14.244	46.934	32.690	-10.810	43.500
249.304	-12.090	45.047	32.956	-13.044	46.000
468.609	-6.481	36.284	29.804	-16.196	46.000
732.899	-2.354	30.987	28.633	-17.367	46.000
953.609	0.397	31.143	31.540	-14.460	46.000
Vertical					
56.710	-11.747	41.316	29.569	-10.431	40.000
111.536	-14.244	40.309	26.065	-17.435	43.500
224.000	-13.137	44.647	31.510	-14.490	46.000
410.971	-7.763	32.014	24.251	-21.749	46.000
692.130	-3.102	30.957	27.855	-18.145	46.000
960.638	0.492	31.197	31.688	-22.312	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Wireless Headphones
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - 3Mbps (2441MHz)
 Test Date : 2018/08/28


Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
49.681	-10.918	37.146	26.227	-13.773	40.000
119.971	-13.432	42.645	29.213	-14.287	43.500
249.304	-12.090	44.406	32.315	-13.685	46.000
468.609	-6.481	36.818	30.338	-15.662	46.000
706.188	-2.871	31.991	29.120	-16.880	46.000
960.638	0.492	31.613	32.104	-21.896	54.000
Vertical					
58.116	-11.921	42.387	30.465	-9.535	40.000
101.696	-15.852	43.410	27.558	-15.942	43.500
224.000	-13.137	44.104	30.967	-15.033	46.000
410.971	-7.763	32.447	24.684	-21.316	46.000
741.333	-2.191	30.699	28.508	-17.492	46.000
960.638	0.492	30.460	30.951	-23.049	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna Conducted Test

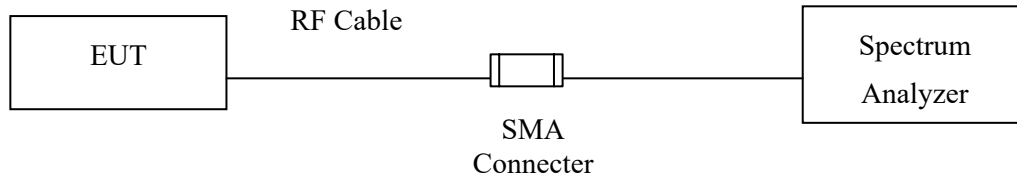5.1. Test Setup



5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

5.4. Uncertainty

$\pm 1.23\text{dB}$

5.5. Test Result of RF Antenna Conducted Test

Product : Wireless Headphones
Test Item : RF Antenna Conducted Test
Test Mode : Mode 1: Transmit - 1Mbps
Test Date : 2018/08/23

Figure Channel 00:

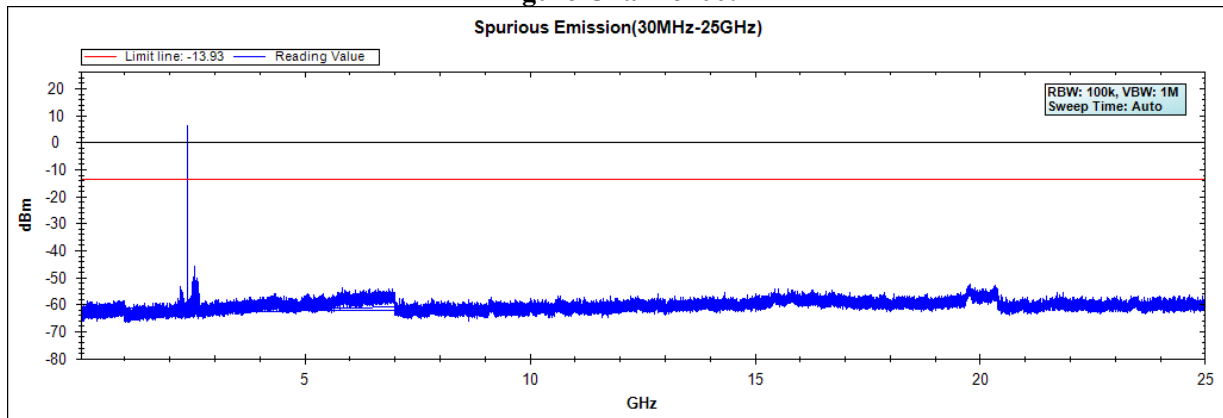


Figure Channel 39:


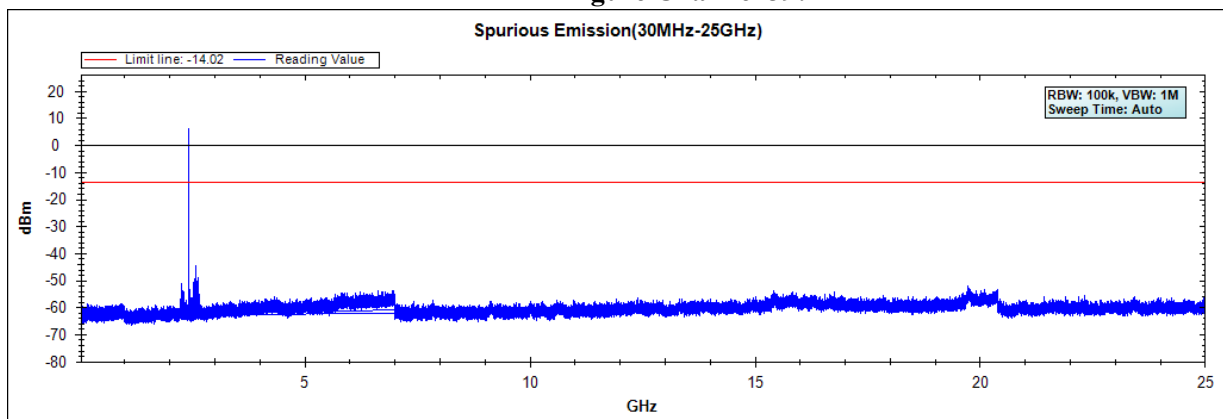
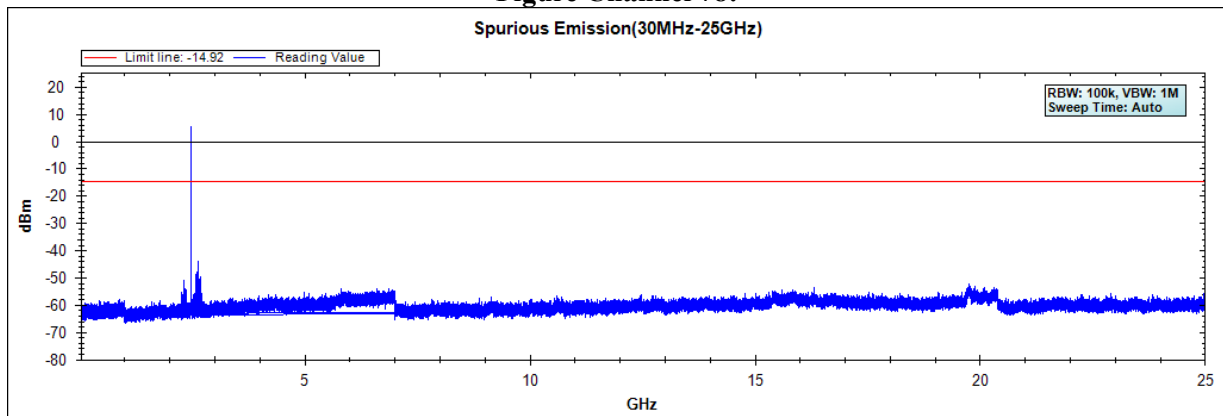
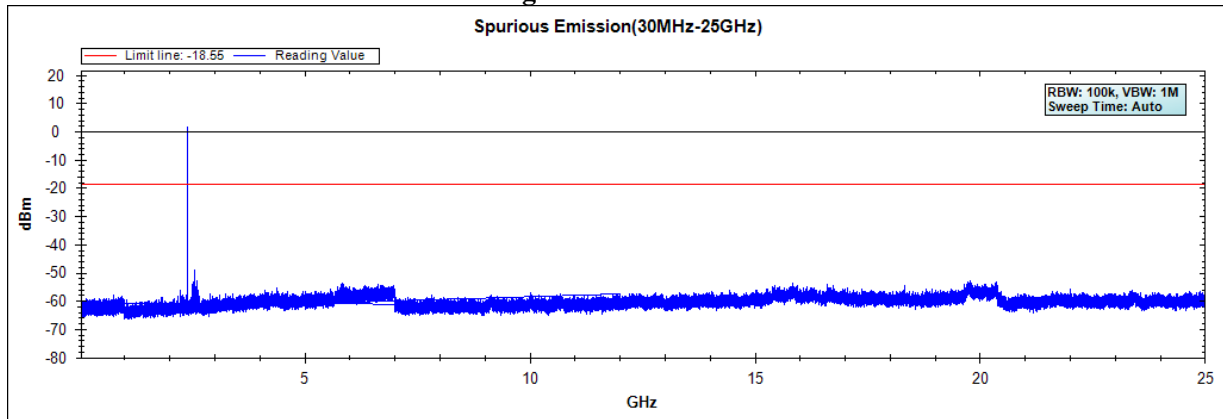
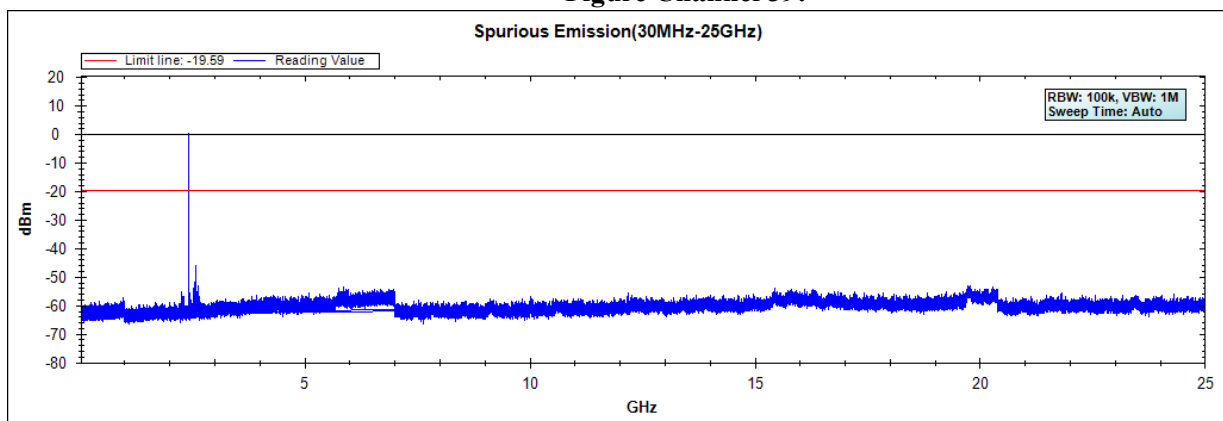


Figure Channel 78:

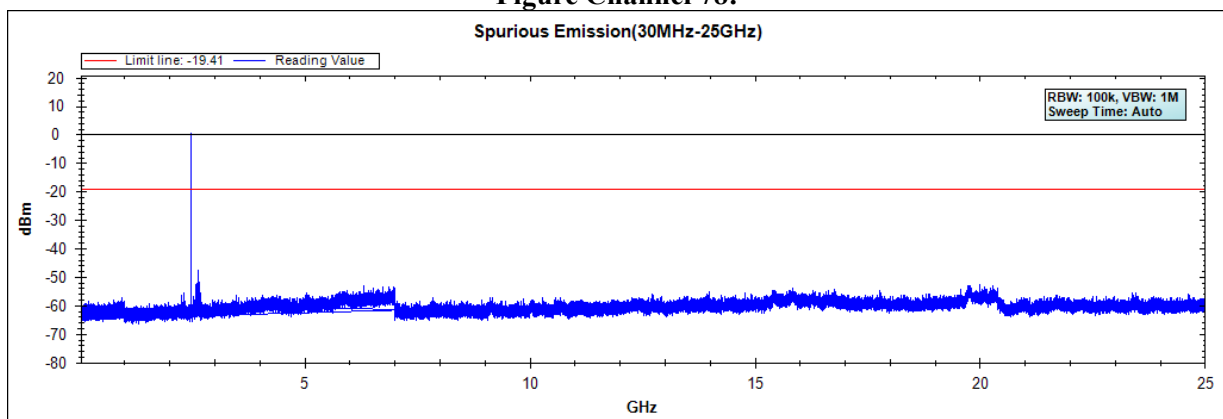

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Wireless Headphones
Test Item : RF Antenna Conducted Test
Test Mode : Mode 2: Transmit - 3Mbps
Test Date : 2018/08/23


Figure Channel 00:**Figure Channel 39:****Figure Channel 78:**

Note: The above test pattern is synthesized by multiple of the frequency range.


6. Band Edge

6.1. Test Setup

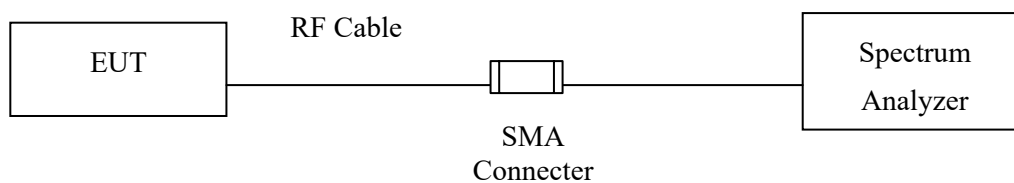RF Conducted Measurement



RF Radiated Measurement:

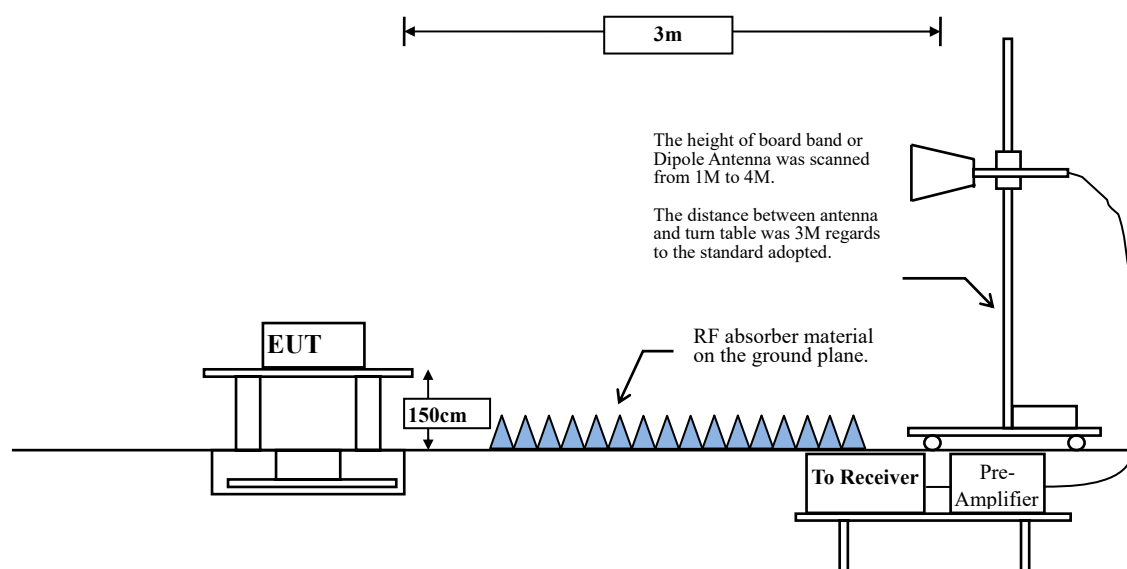

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

6.4. Uncertainty

Conducted: $\pm 1.23\text{dB}$

Radiated:

Horizontal polarization : 1-18GHz: $\pm 3.77\text{dB}$

Vertical polarization : 1-18GHz : $\pm 3.83\text{dB}$

6.5. Test Result of Band Edge

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2018/08/28

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
00 (Peak)	2366.957	10.171	38.788	48.958	74.00	54.00	Pass
00 (Peak)	2390.000	10.262	36.447	46.709	74.00	54.00	Pass
00 (Peak)	2400.000	10.304	59.843	70.146	--	--	--
00 (Peak)	2402.174	10.312	94.493	104.805	--	--	--
00 (Average)	2350.290	10.097	26.198	36.295	74.00	54.00	Pass
00 (Average)	2390.000	10.262	24.772	35.034	74.00	54.00	Pass
00 (Average)	2400.000	10.304	43.914	54.217	--	--	--
00 (Average)	2402.029	10.312	79.719	90.031	--	--	--

Figure Channel 00: Horizontal (Peak)


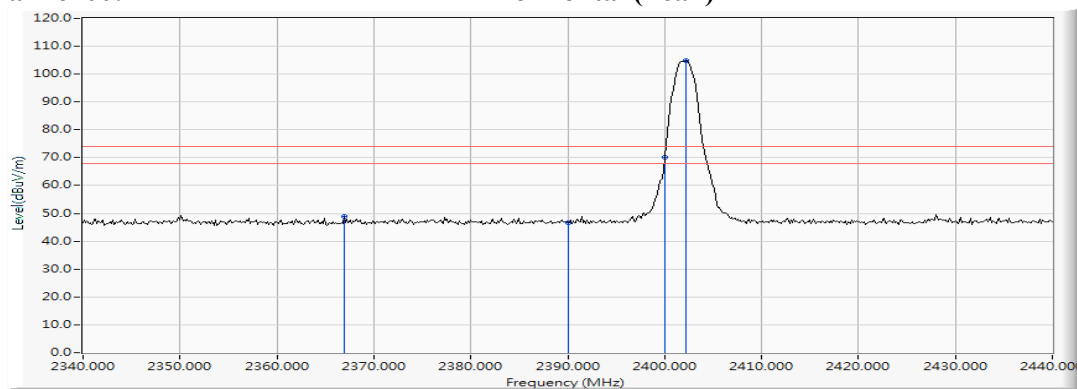


Figure Channel 00: Horizontal (Average)

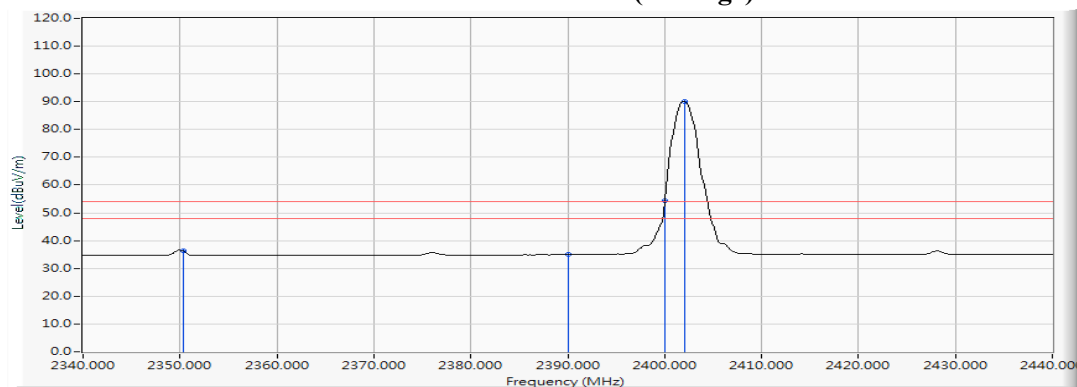



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2018/08/28

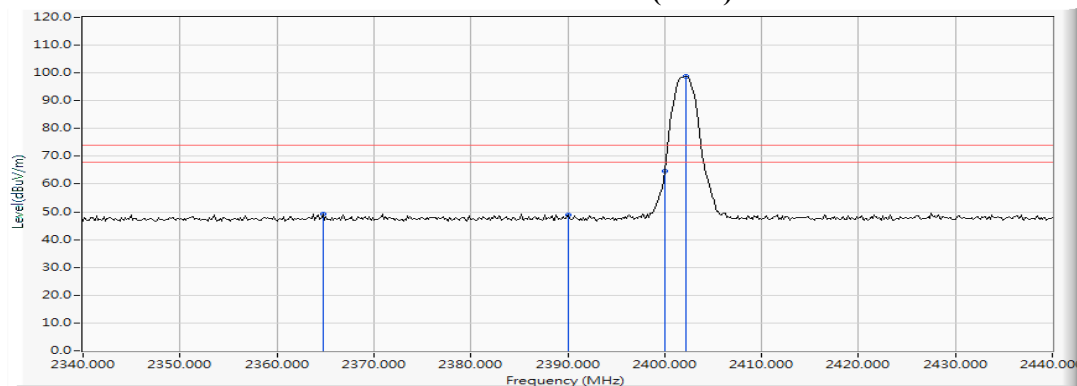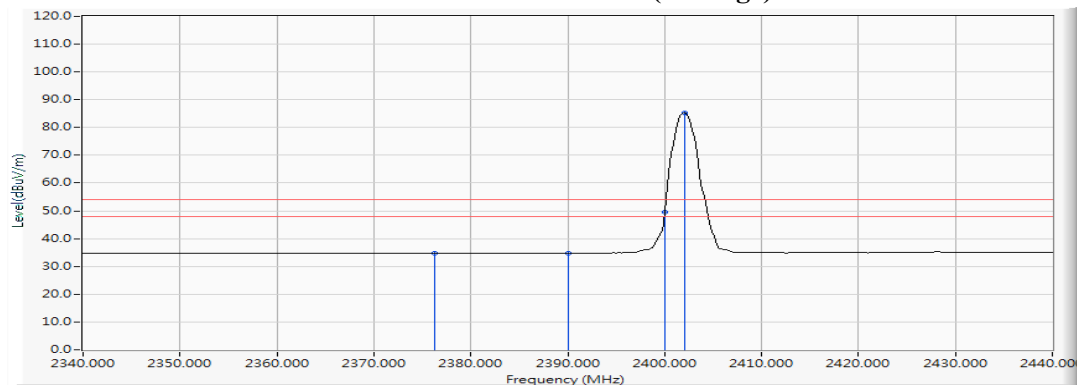RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2364.783	10.161	39.202	49.363	74.00	54.00	Pass
00 (Peak)	2390.000	10.262	38.563	48.825	74.00	54.00	Pass
00 (Peak)	2400.000	10.304	54.335	64.638	--	--	--
00 (Peak)	2402.174	10.312	88.459	98.771	--	--	--
00 (Average)	2376.232	10.206	24.688	34.894	74.00	54.00	Pass
00 (Average)	2390.000	10.262	24.566	34.828	74.00	54.00	Pass
00 (Average)	2400.000	10.304	39.338	49.641	--	--	--
00 (Average)	2402.029	10.312	74.904	85.216	--	--	--

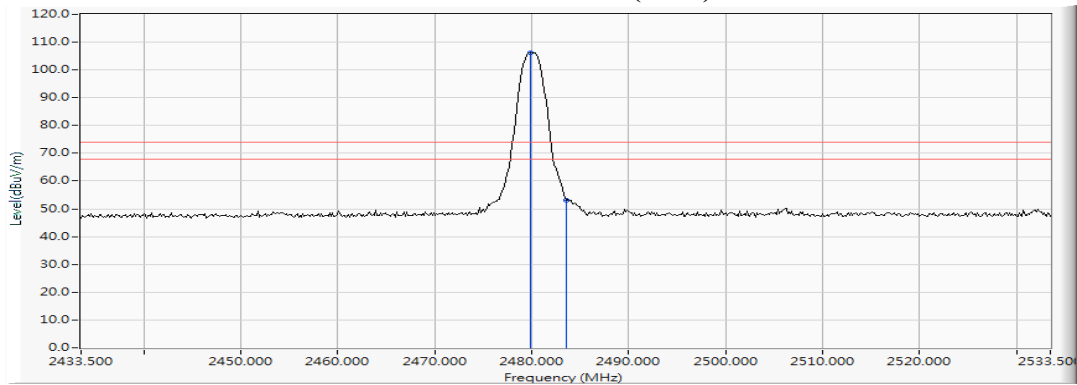
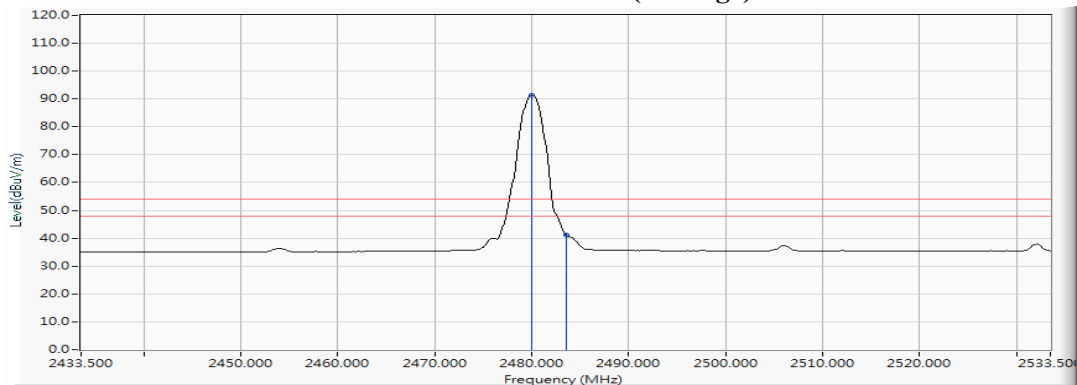
Figure Channel 00:
VERTICAL (Peak)

Figure Channel 00:
VERTICAL (Average)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2018/08/28

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
78 (Peak)	2479.877	10.628	95.583	106.210	--	--	--
78 (Peak)	2483.500	10.640	42.432	53.073	74.00	54.00	Pass
78 (Average)	2480.022	10.628	80.685	91.313	--	--	--
78 (Average)	2483.500	10.640	30.661	41.302	74.00	54.00	Pass

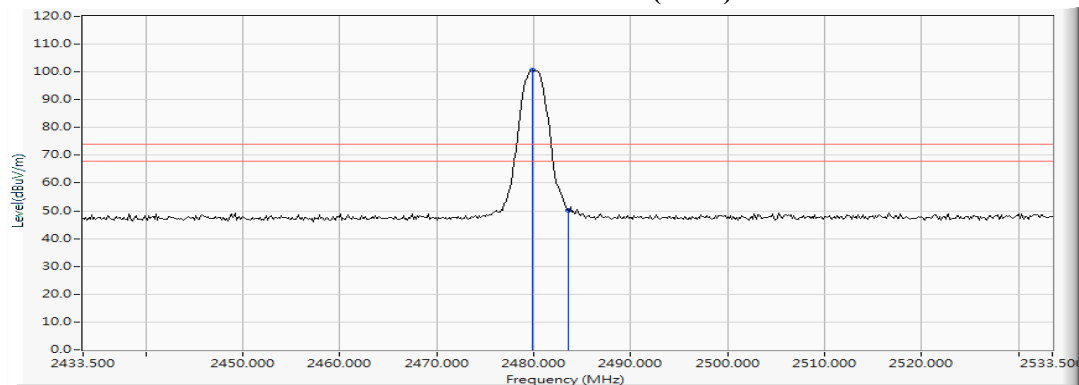
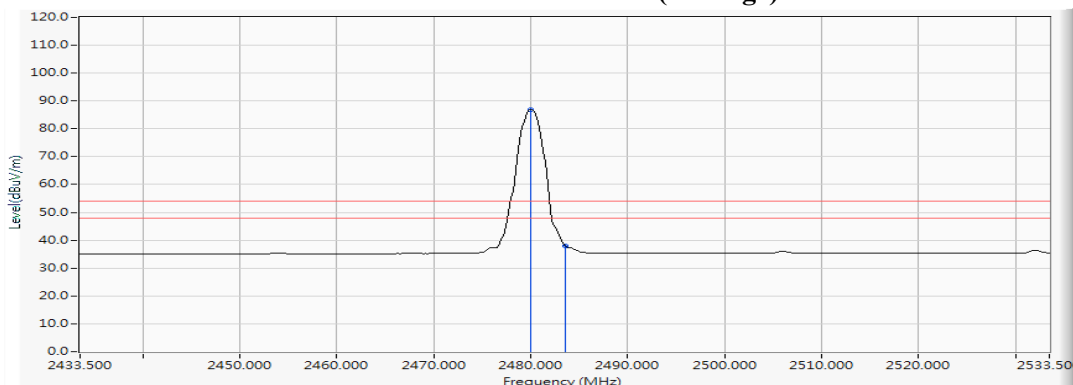
Figure Channel 78:
Horizontal (Peak)

Figure Channel 78:
Horizontal (Average)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2018/08/28

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
78 (Peak)	2479.877	10.628	89.956	100.583	--	--	--
78 (Peak)	2483.500	10.640	39.576	50.217	74.00	54.00	Pass
78 (Average)	2480.022	10.628	76.175	86.803	--	--	--
78 (Average)	2483.500	10.640	27.391	38.032	74.00	54.00	Pass

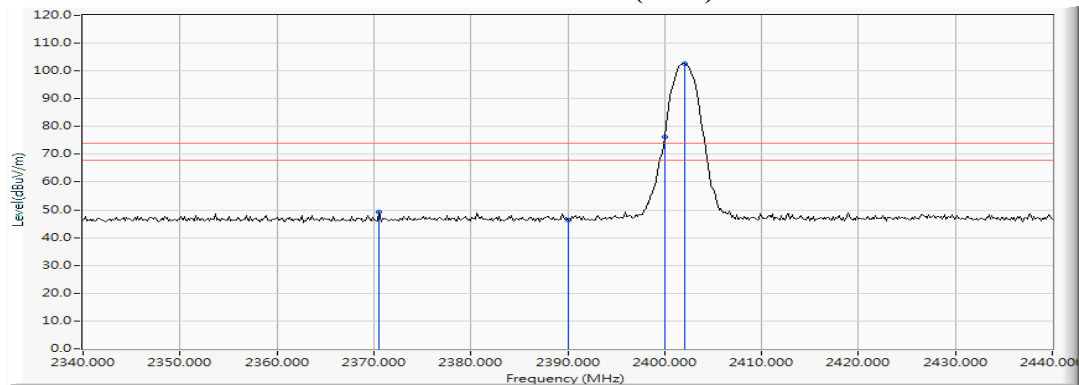
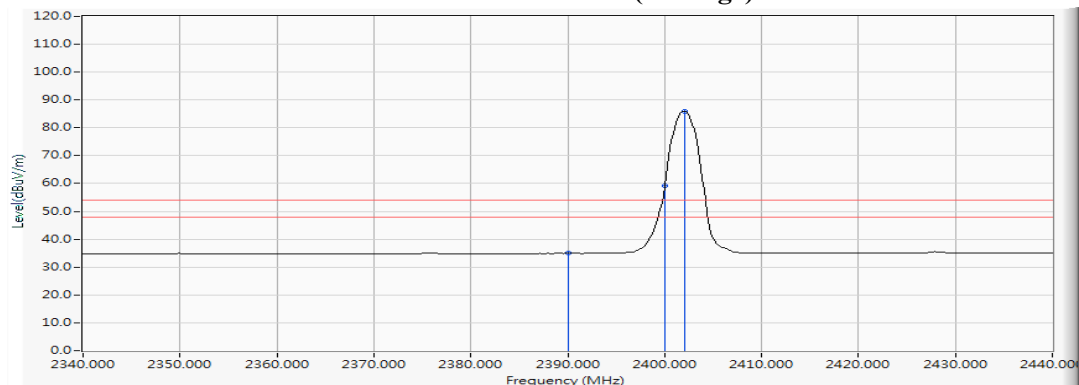
Figure Channel 78: VERTICAL (Peak)

Figure Channel 78: VERTICAL (Average)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2402MHz)
 Test Date : 2018/08/28

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
00 (Peak)	2370.580	10.184	39.093	49.277	74.00	54.00	Pass
00 (Peak)	2390.000	10.262	36.099	46.361	74.00	54.00	Pass
00 (Peak)	2400.000	10.304	66.020	76.323	--	--	--
00 (Peak)	2402.029	10.312	92.229	102.541	--	--	--
00 (Average)	2390.000	10.262	24.737	34.999	74.00	54.00	Pass
00 (Average)	2400.000	10.304	48.784	59.087	--	--	--
00 (Average)	2402.029	10.312	75.631	85.943	--	--	--



Figure Channel 00: Horizontal (Peak)**Figure Channel 00: Horizontal (Average)****Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2402MHz)
 Test Date : 2018/08/28

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
00 (Peak)	2386.232	10.246	37.567	47.813	74.00	54.00	Pass
00 (Peak)	2390.000	10.262	36.882	47.144	74.00	54.00	Pass
00 (Peak)	2400.000	10.304	60.925	71.228	--	--	--
00 (Peak)	2402.029	10.312	86.566	96.878	--	--	--
00 (Average)	2390.000	10.262	24.559	34.821	74.00	54.00	Pass
00 (Average)	2400.000	10.304	44.393	54.696	--	--	--
00 (Average)	2402.029	10.312	71.091	81.403	--	--	--

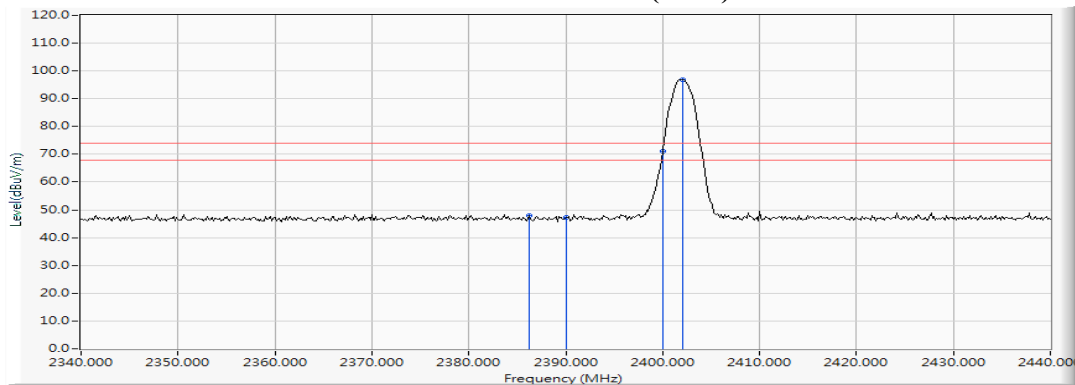
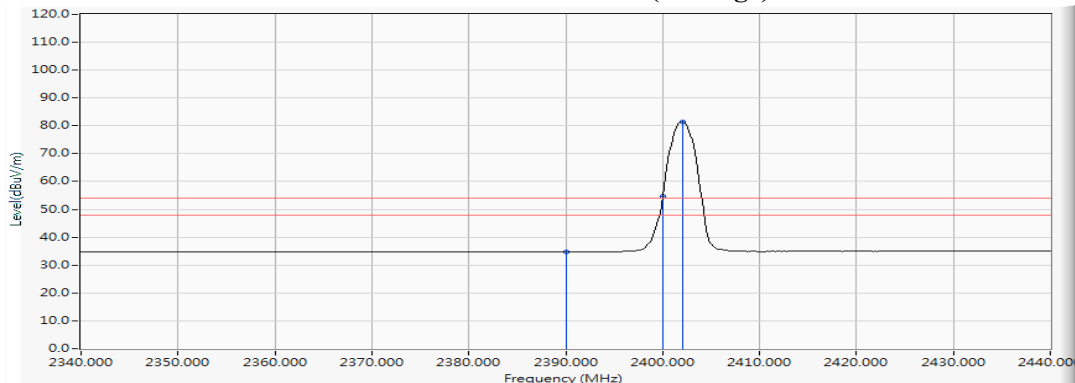
Figure Channel 00: VERTICAL (Peak)**Figure Channel 00: VERTICAL (Average)****Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2018/08/28

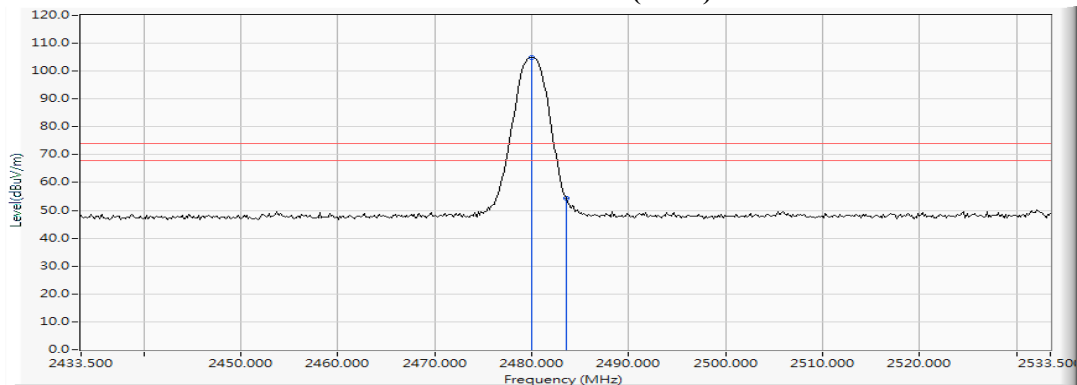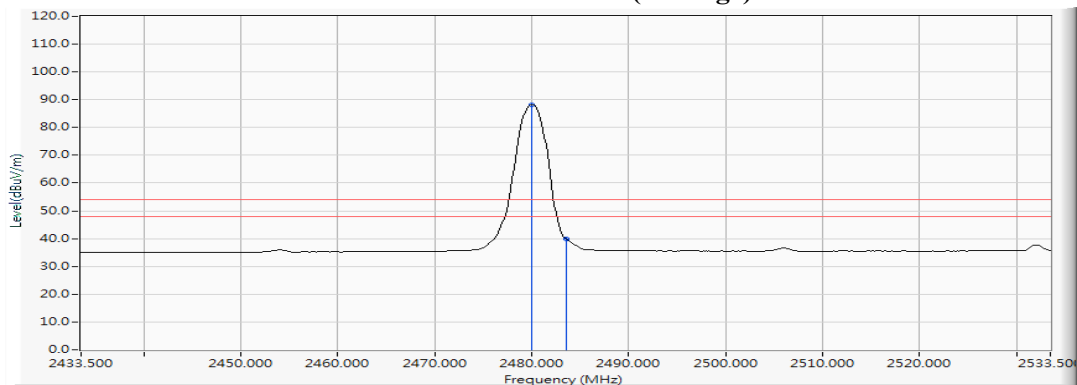RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
78 (Peak)	2480.022	10.628	94.343	104.971	--	--	--
78 (Peak)	2483.500	10.640	43.651	54.292	74.00	54.00	Pass
78 (Average)	2480.022	10.628	77.525	88.153	--	--	--
78 (Average)	2483.500	10.640	29.270	39.911	74.00	54.00	Pass

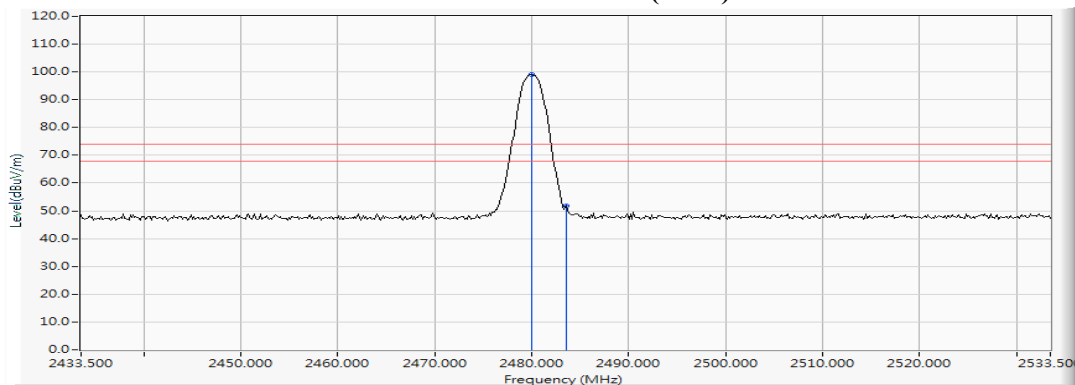
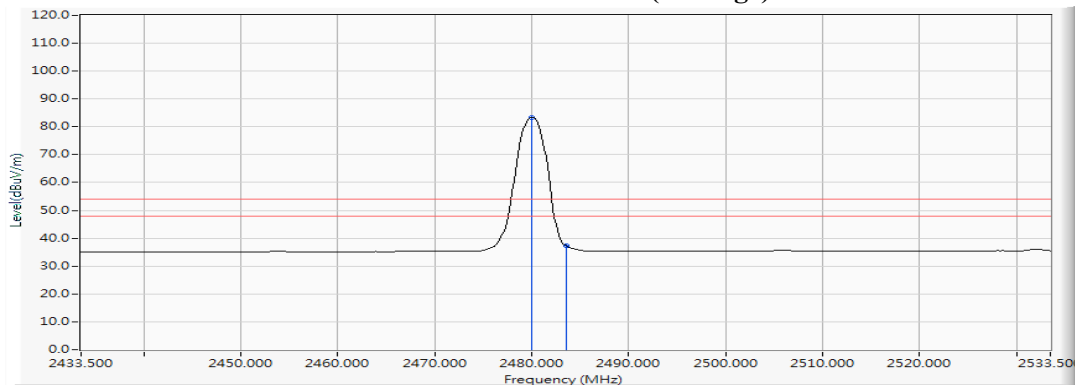
Figure Channel 00:
Horizontal (Peak)

Figure Channel 00:
Horizontal (Average)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (2480MHz)
 Test Date : 2018/08/28

RF Radiated Measurement (VERTICAL):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)	Result
78 (Peak)	2480.022	10.628	88.384	99.012	--	--	--
78 (Peak)	2483.500	10.640	41.168	51.809	74.00	54.00	Pass
78 (Average)	2480.022	10.628	72.743	83.371	--	--	--
78 (Average)	2483.500	10.640	26.536	37.177	74.00	54.00	Pass


Figure Channel 78:**VERTICAL (Peak)****Figure Channel 78:****VERTICAL (Average)****Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (Hopping off)


Measurement Level	Result
Δ (dB)	
> 20	PASS

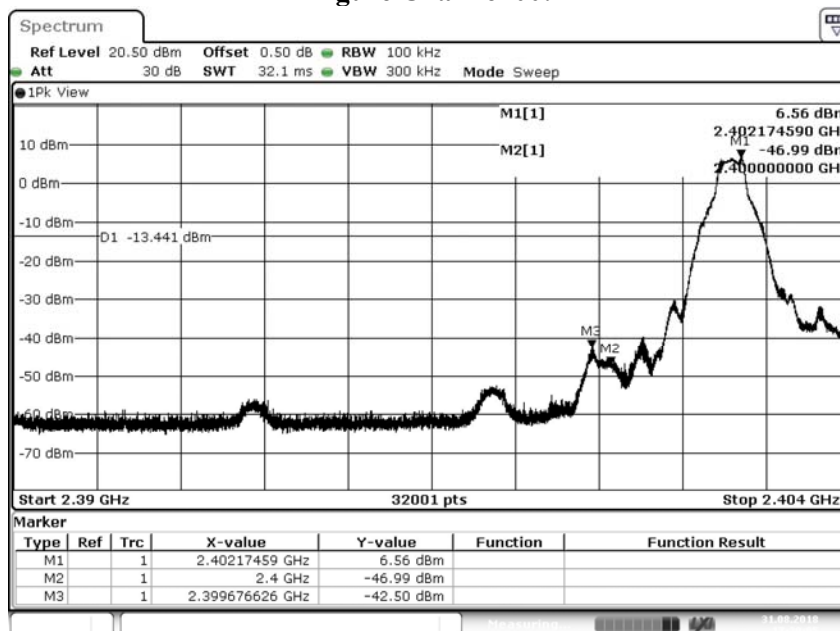Figure Channel 00:



Date: 31.AUG.2018 17:29:06

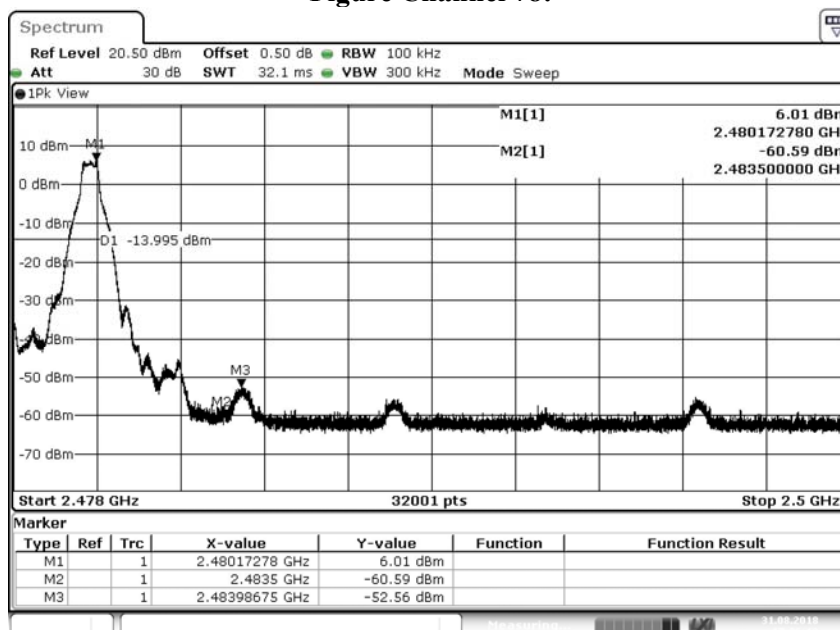Figure Channel 78:




Date: 31.AUG.2018 17:36:14

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (Hopping off)


Measurement Level	Result
Δ (dB)	
> 20	PASS

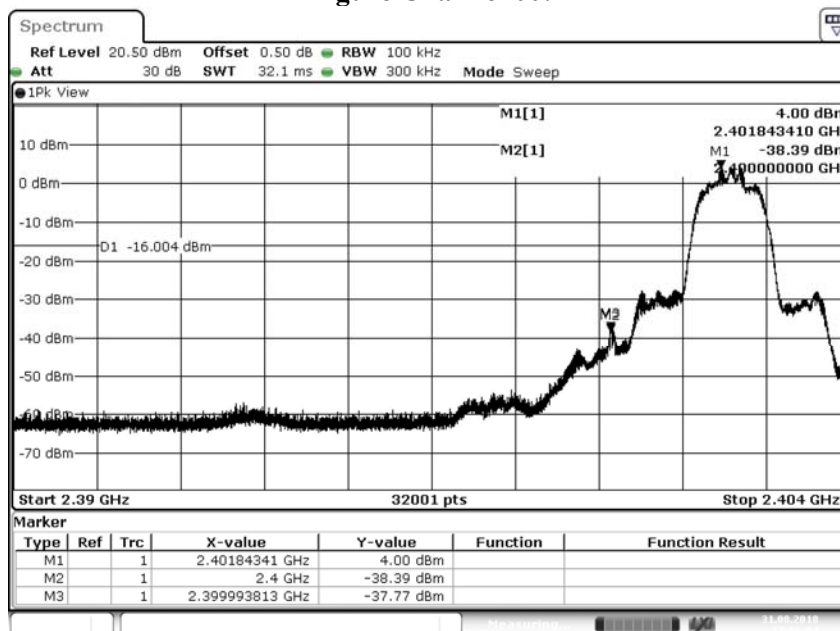Figure Channel 00:



Date: 31.AUG.2018 17:56:04

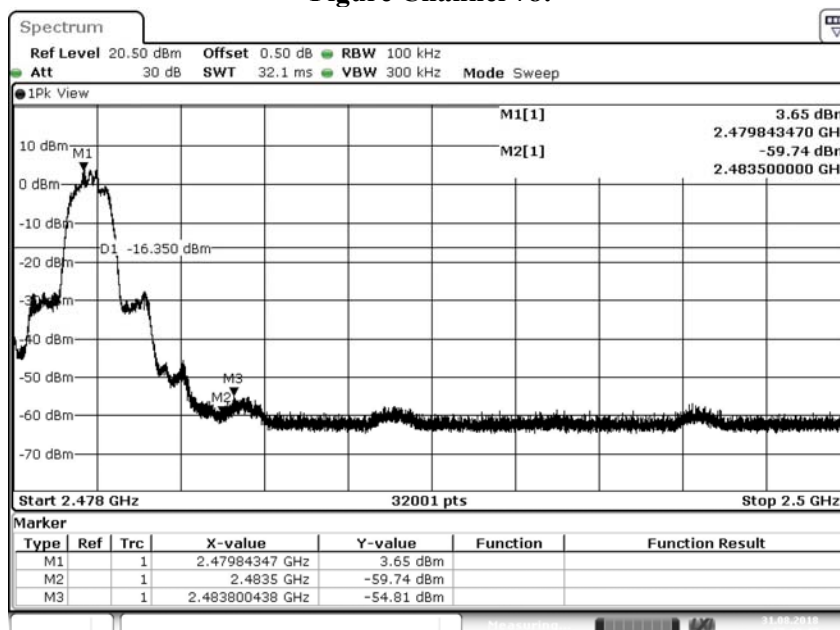Figure Channel 78:




Date: 31.AUG.2018 17:49:47

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps(Hopping on)


Measurement Level	Result
Δ (dB)	
> 20	PASS

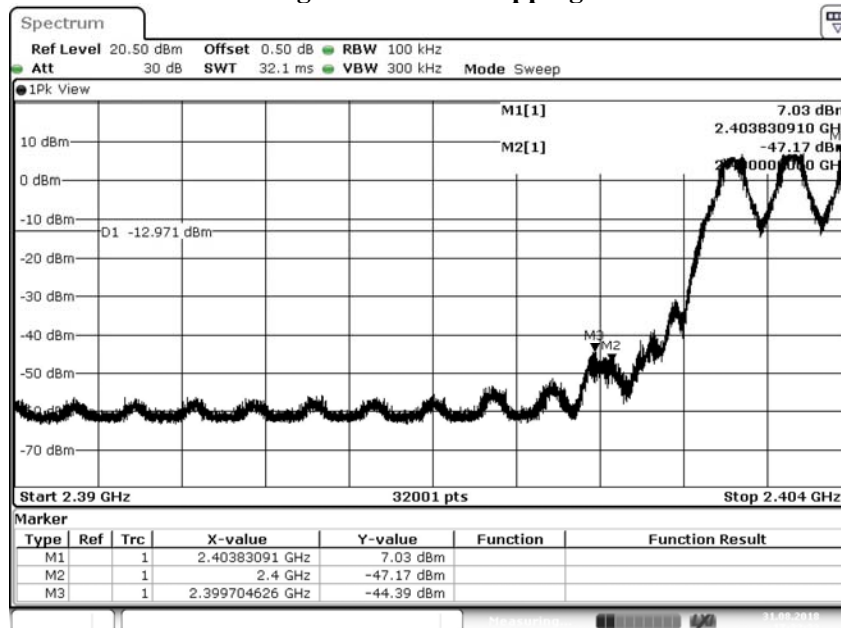Figure Channel Hopping:



Date: 31.AUG.2018 17:32:22

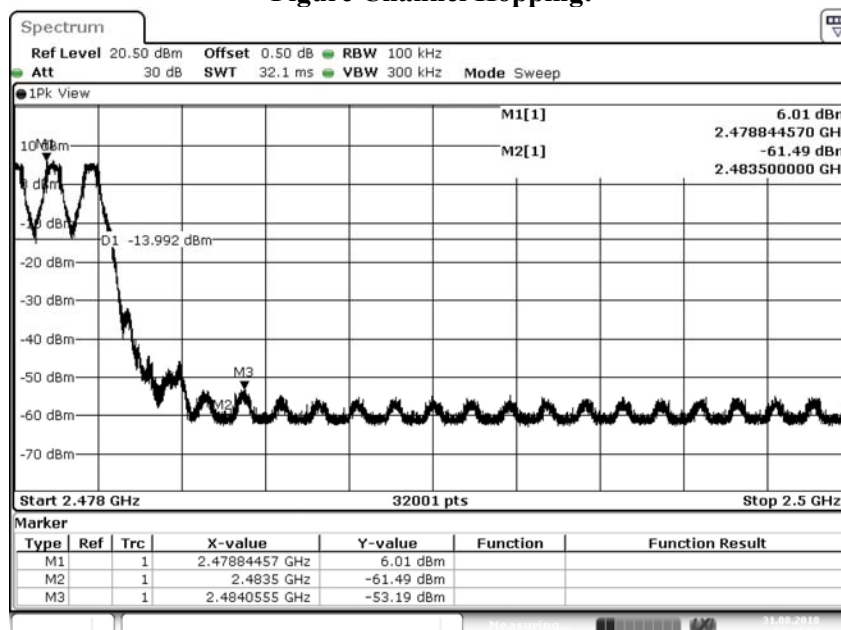Figure Channel Hopping:




Date: 31.AUG.2018 17:40:55

Product : Wireless Headphones
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - 3Mbps (Hopping on)


Measurement Level	Result
Δ (dB)	
> 20	PASS

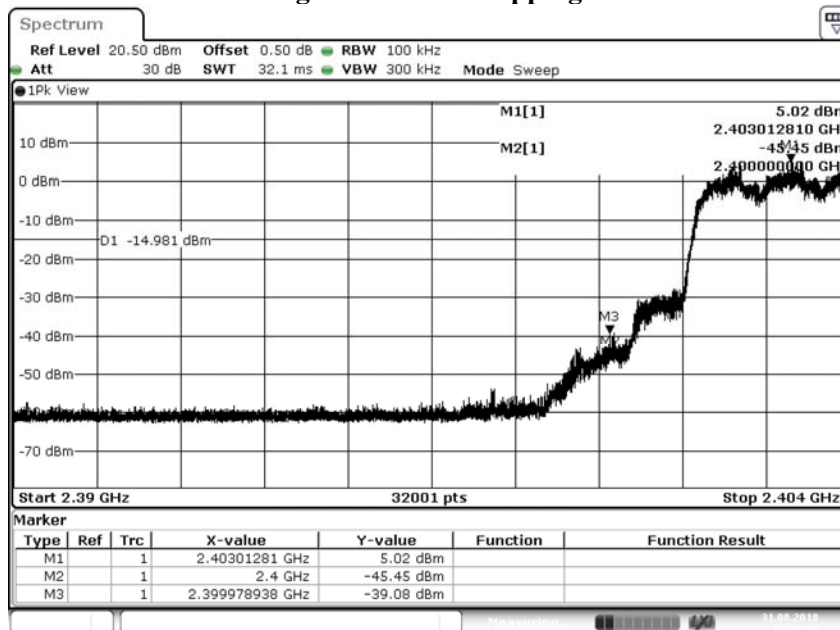Figure Channel Hopping:



Date: 31.AUG.2018 17:59:47

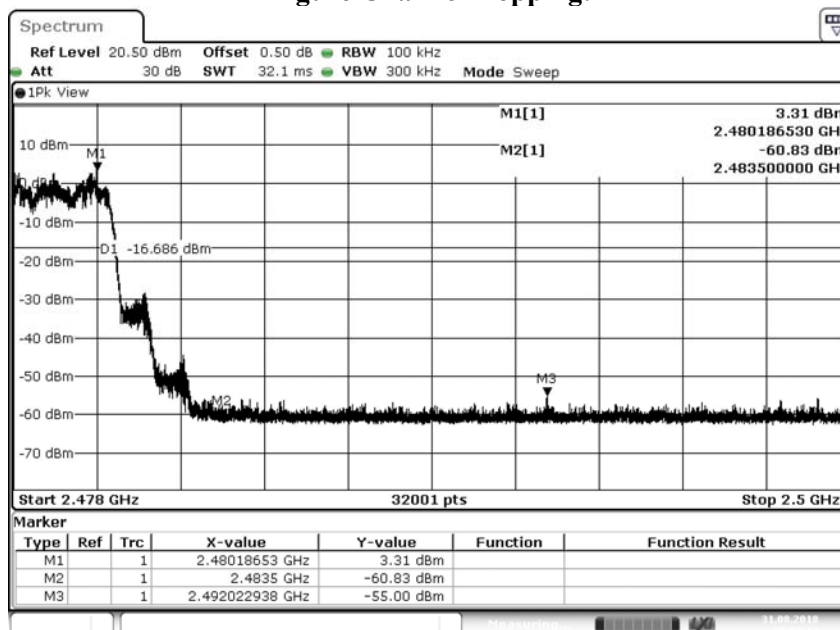
Figure Channel Hopping:



Date: 31.AUG.2018 17:53:15

7. Channel Number

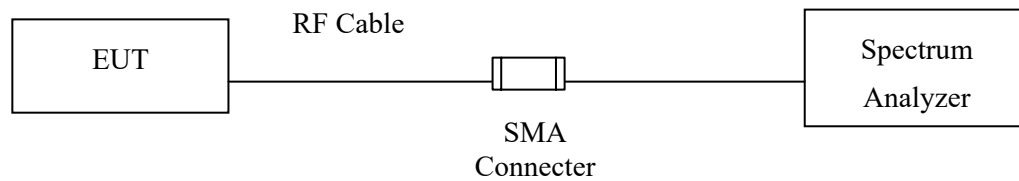7.1. Test Setup



7.2. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

7.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

7.4. Uncertainty


N/A

7.5. Test Result of Channel Number

Product : Wireless Headphones
 Test Item : Channel Number
 Test Mode : Mode 1: Transmit - 1Mbps


Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

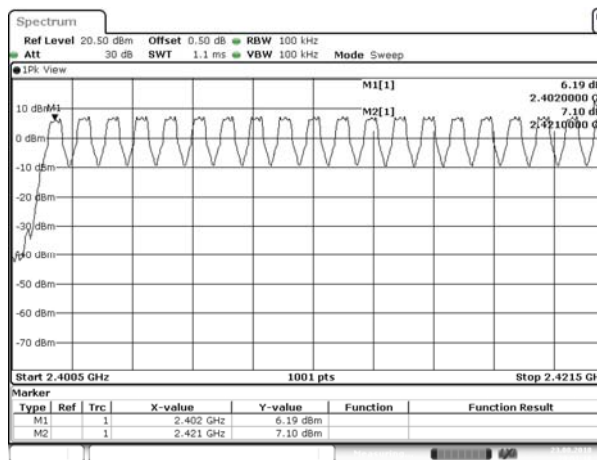2402-2421MHz




Date: 23 AUG 2018 20:51:19

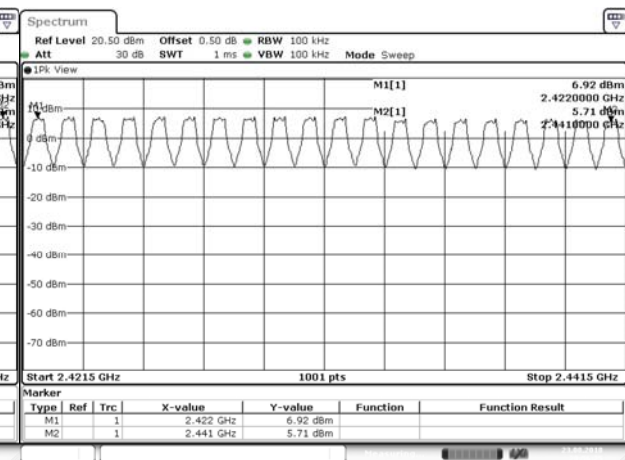2422-2441MHz




Date: 23 AUG 2018 20:56:25

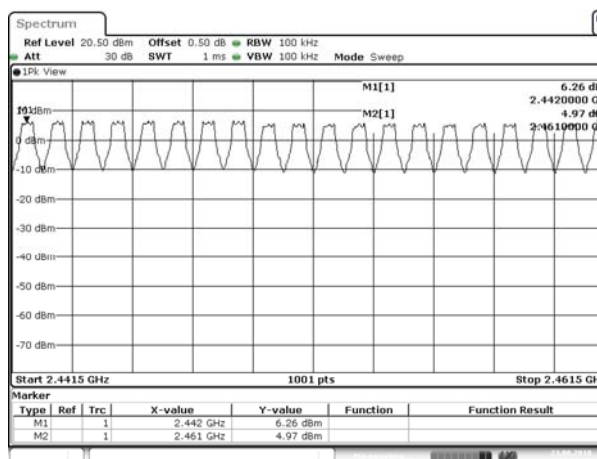2442-2461MHz



Date: 23 AUG 2018 21:00:46

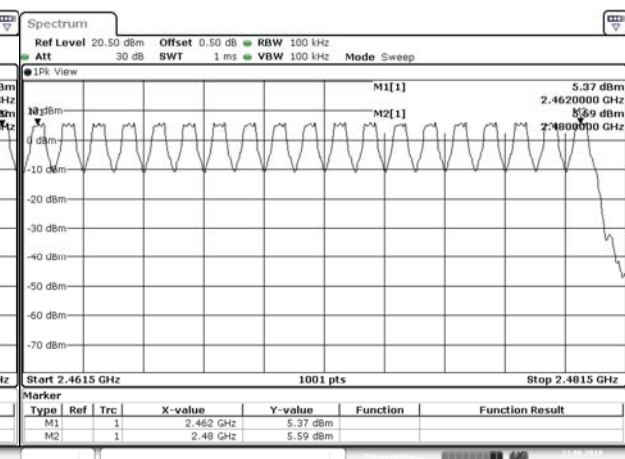2462-2480MHz




Date: 23 AUG 2018 21:10:44

Product : Wireless Headphones
 Test Item : Channel Number
 Test Mode : Mode 2: Transmit - 3Mbps


Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

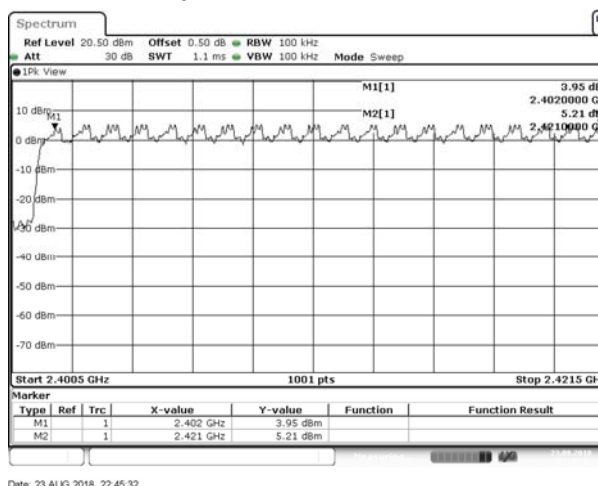2402-2421MHz




Date: 23 AUG 2018 22:45:32

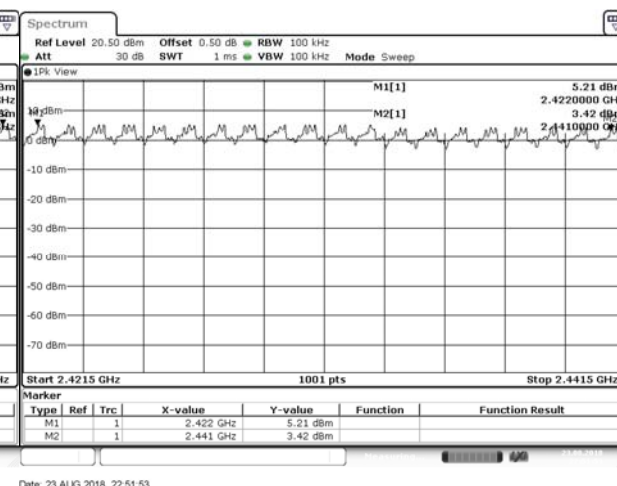2422-2441MHz




Date: 23 AUG 2018 22:51:53

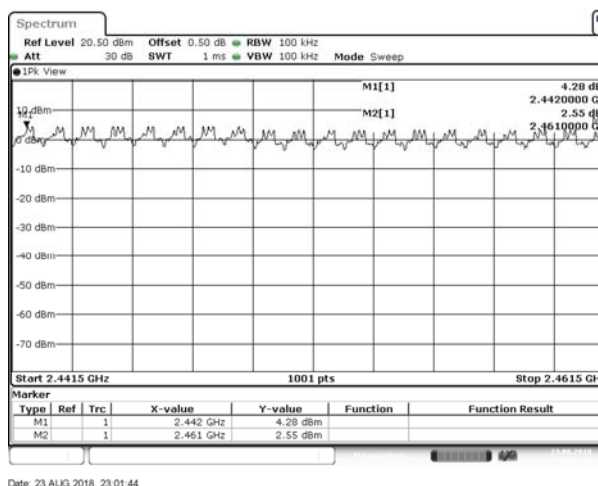2442-2461MHz



Date: 23 AUG 2018 23:01:44

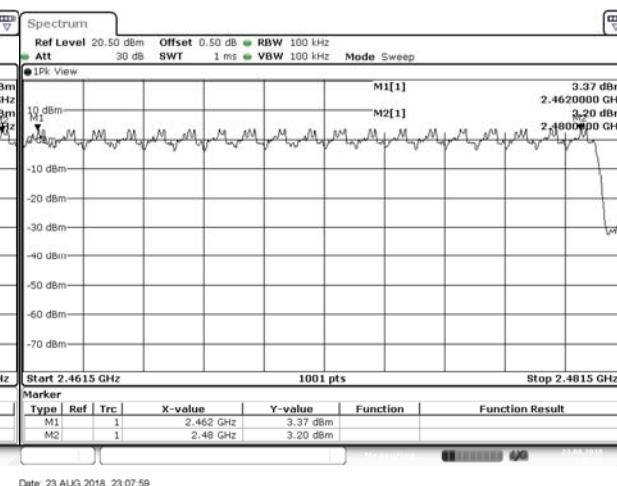
2462-2480MHz



Date: 23 AUG 2018 23:07:59

8. Channel Separation

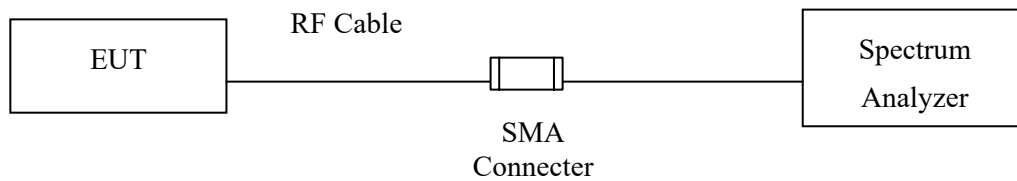8.1. Test Setup



8.2. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

8.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

8.4. Uncertainty

$\pm 279.2\text{Hz}$


8.5. Test Result of Channel Separation

Product : Wireless Headphones
 Test Item : Channel Separation
 Test Mode : Mode 1: Transmit - 1Mbps

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	634.0	Pass
39	2441	1000	>25 kHz	632.0	Pass
78	2480	1000	>25 kHz	630.0	Pass


NOTE: The 20dB Bandwidth is refer to section 10.

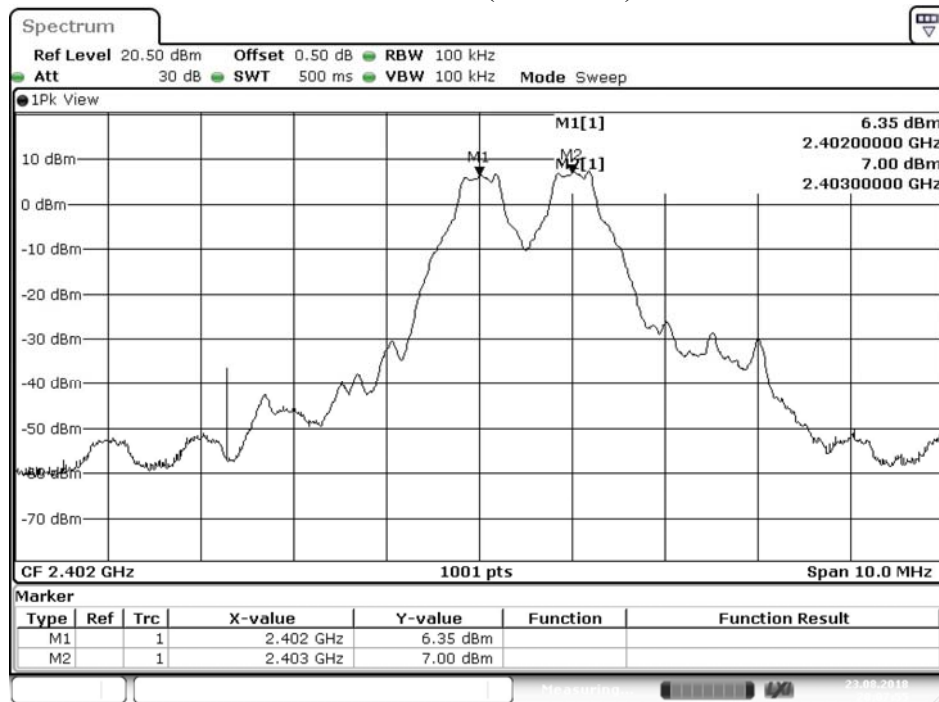Channel 00 (2402MHz)




Date: 23.AUG.2018 20:07:56

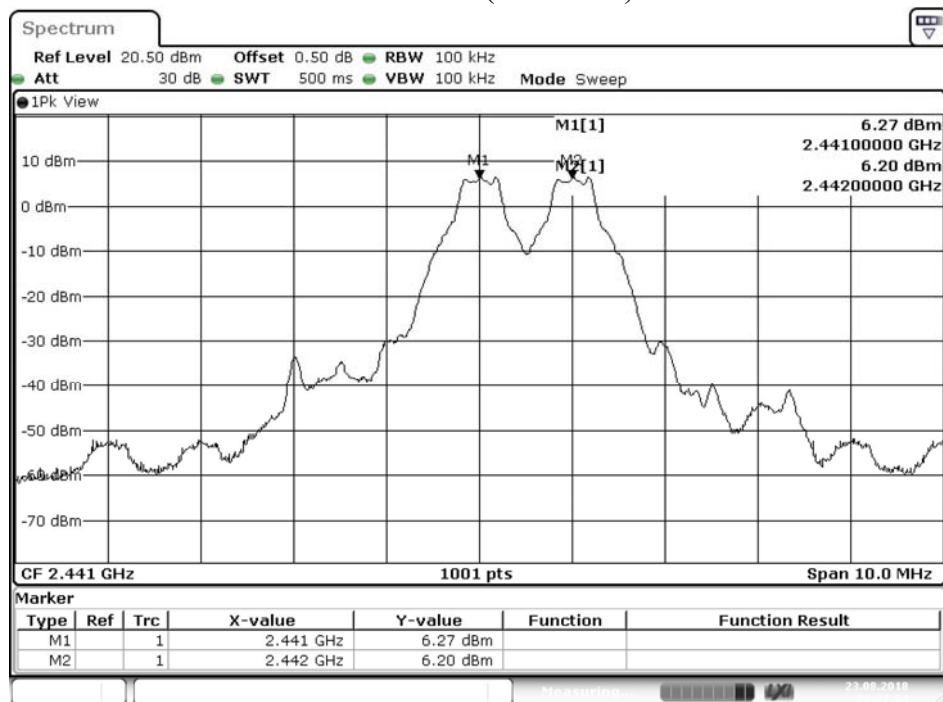Channel 39 (2441MHz)



Date: 23.AUG.2018 20:22:04

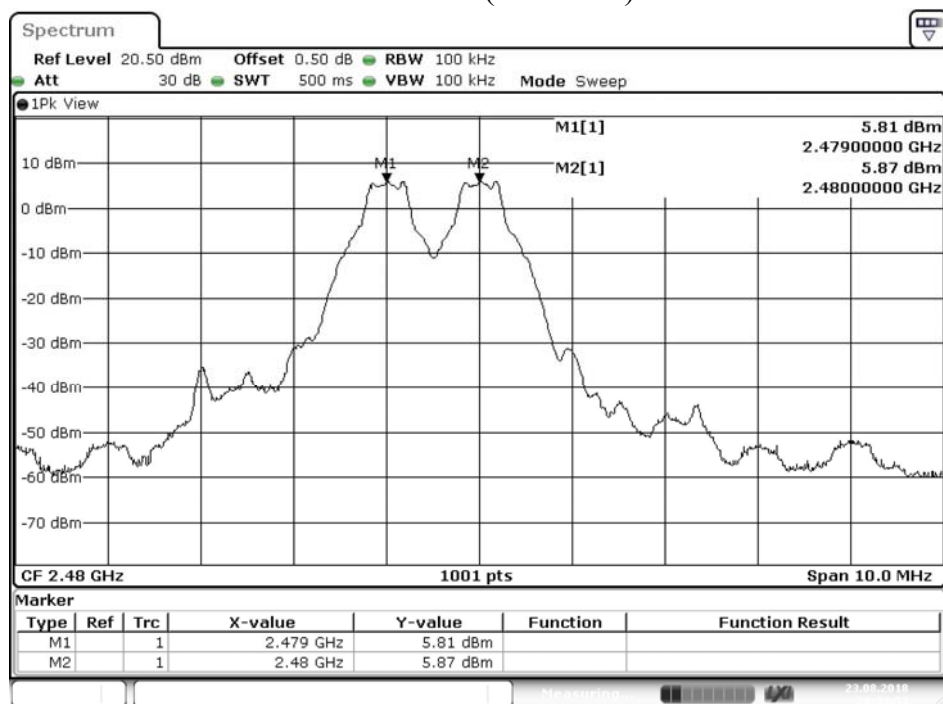Channel 78 (2480MHz)




Date: 23.AUG.2018 20:33:53

Product : Wireless Headphones
 Test Item : Channel Separation
 Test Mode : Mode 2: Transmit - 3Mbps

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	844.0	Pass
39	2441	1000	>25 kHz	844.0	Pass
78	2480	1000	>25 kHz	842.0	Pass


NOTE: The 20dB Bandwidth is refer to section 10.

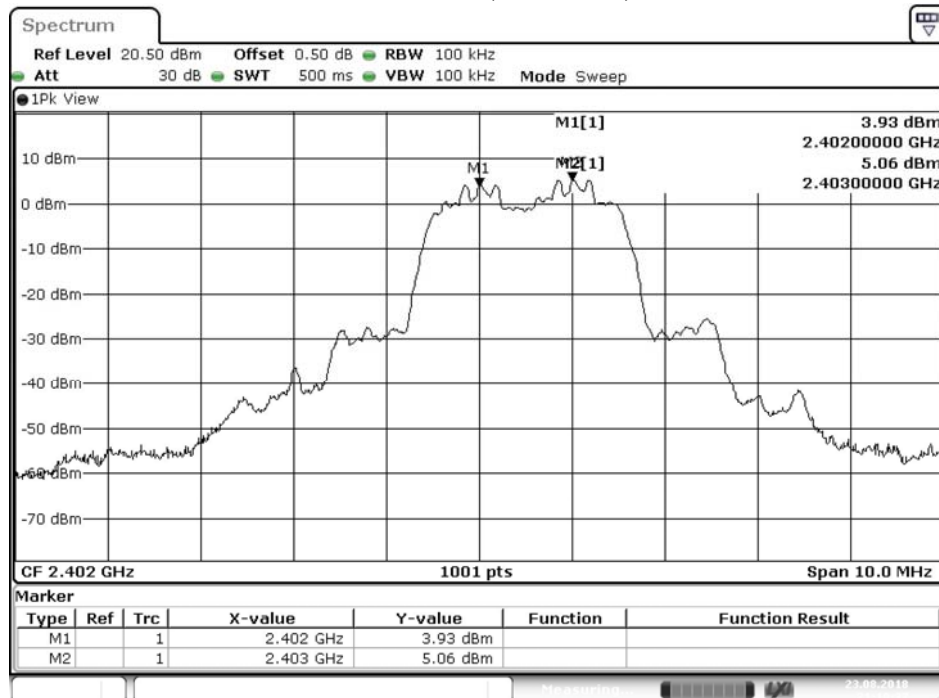Channel 00 (2402MHz)




Date: 23.AUG.2018 21:19:37

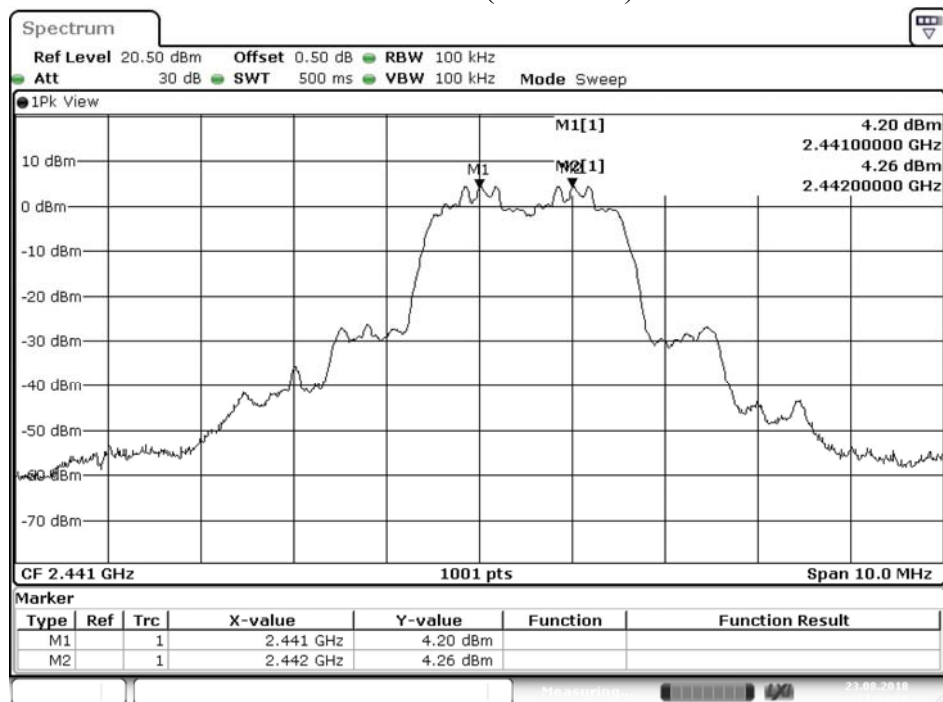Channel 39 (2441MHz)



Date: 23.AUG.2018 21:53:28

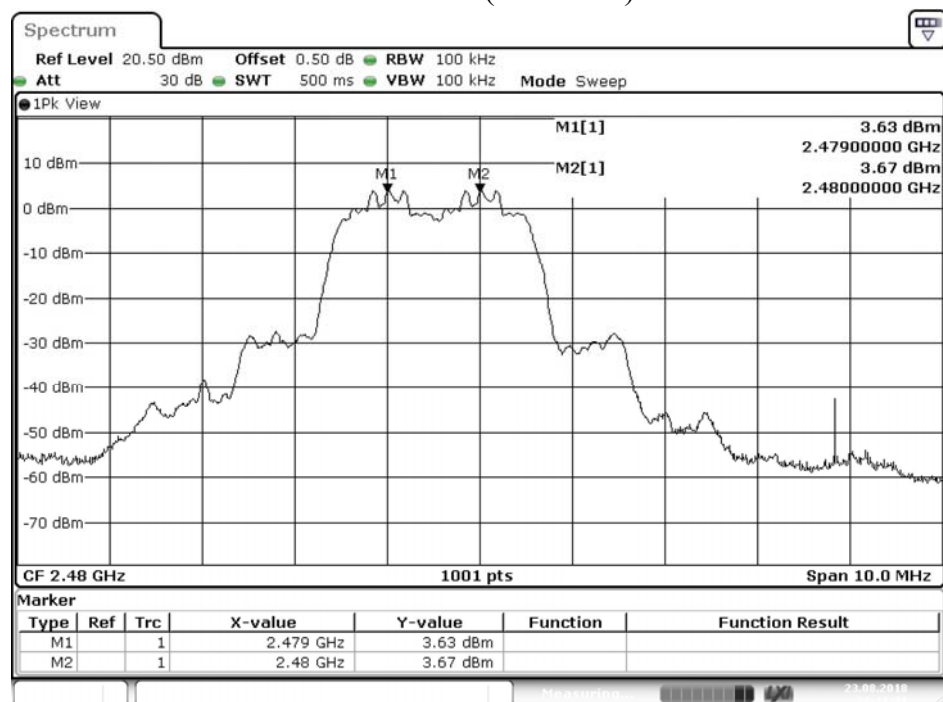
Channel 78 (2480MHz)



Date: 23.AUG.2018 22:11:31

9. Dwell Time

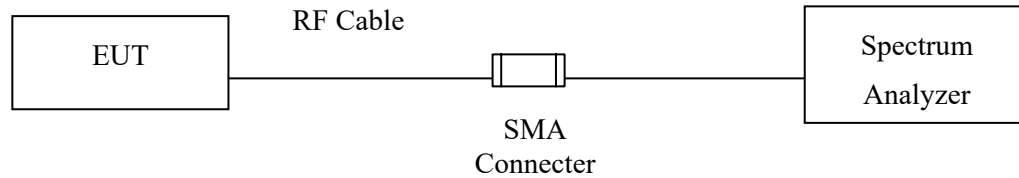9.1. Test Setup



9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

9.4. Uncertainty

$\pm 2.31\text{msec}$

9.5. Test Result of Dwell Time


Product : Wireless Headphones
 Test Item : Dwell Time
 Test Mode : Mode 1: Transmit - 1Mbps (Channel 00,39,78)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.897	12	50	0.70	0.278	0.4	Pass
2441	2.897	12	50	0.70	0.278	0.4	Pass
2480	2.897	12	50	0.70	0.278	0.4	Pass

Duty cycle = ((Time slot length(ms)*Hopping of Number) / Sweep time (ms)


Dwell time = (Duty cycle /79) * (79*0.4)

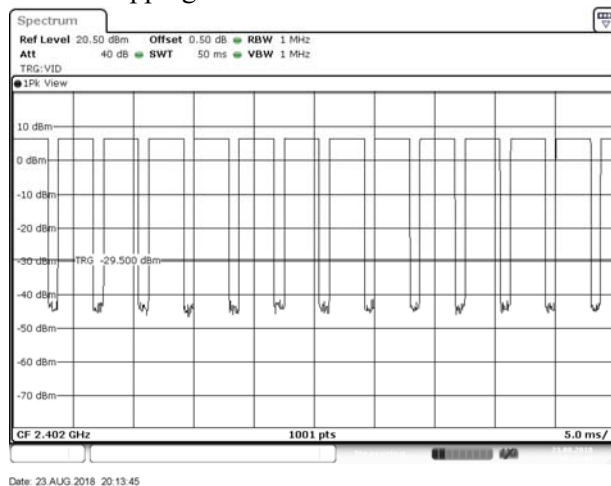CH 00 Hopping of Number




Date: 23.AUG.2018 20:13:45

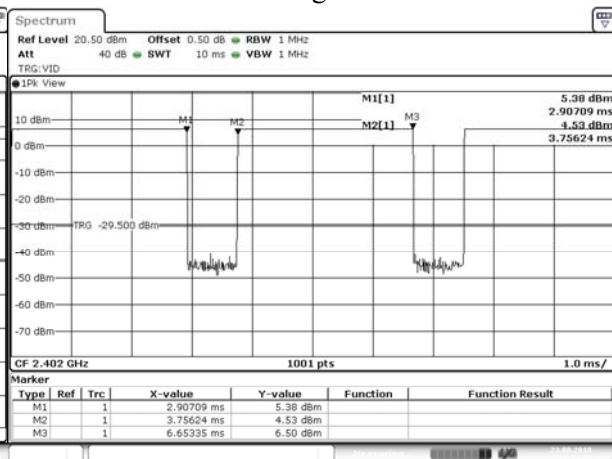CH 00 Time slot length




Date: 23.AUG.2018 20:14:01

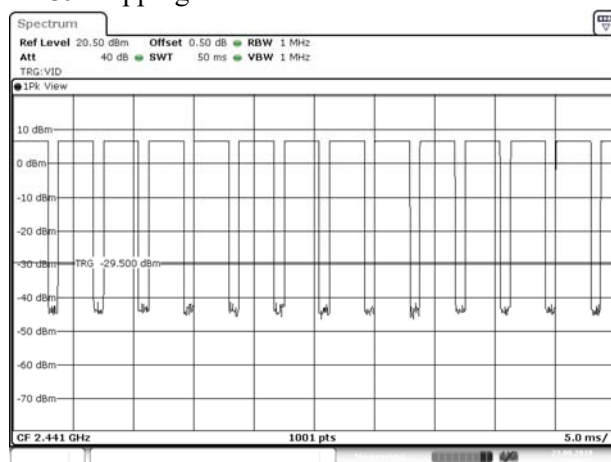CH39 Hopping of Number




Date: 23.AUG.2018 20:26:30

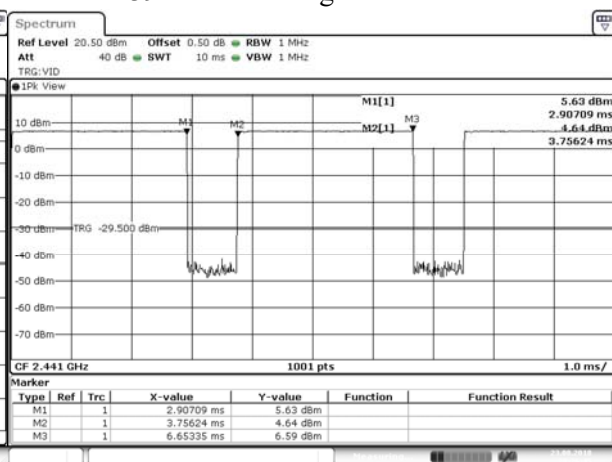CH 39 Time slot length




Date: 23.AUG.2018 20:26:45

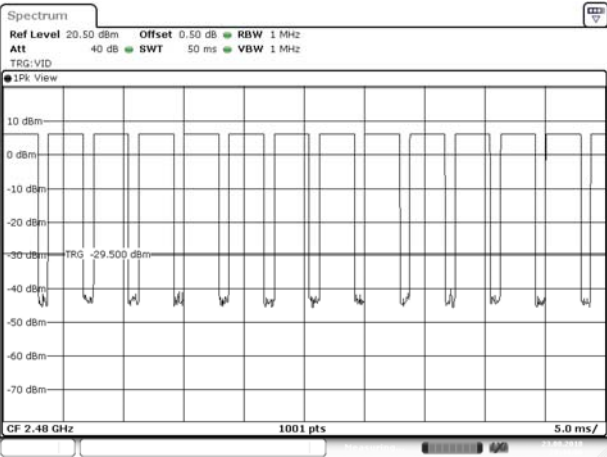CH 78 Hopping of Number



Date: 23.AUG.2018 20:44:01

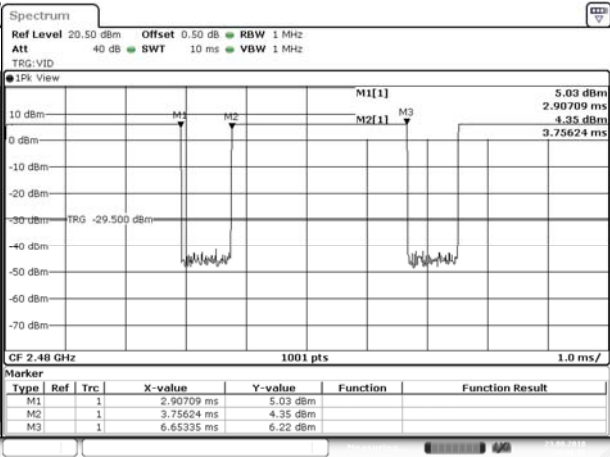CH 78 Time slot length



Date: 23.AUG.2018 20:44:16

Note:
The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


Product : Wireless Headphones
 Test Item : Dwell Time
 Test Mode : Mode 2: Transmit - 3Mbps (Channel 00,39,78)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.907	12	50	0.70	0.279	0.4	Pass
2441	2.907	12	50	0.70	0.279	0.4	Pass
2480	2.907	12	50	0.70	0.279	0.4	Pass

Duty cycle = ((Time slot length(ms)*Hopping of Number) / Sweep time (ms))


Dwell time = (Duty cycle / 79) * (79*0.4)

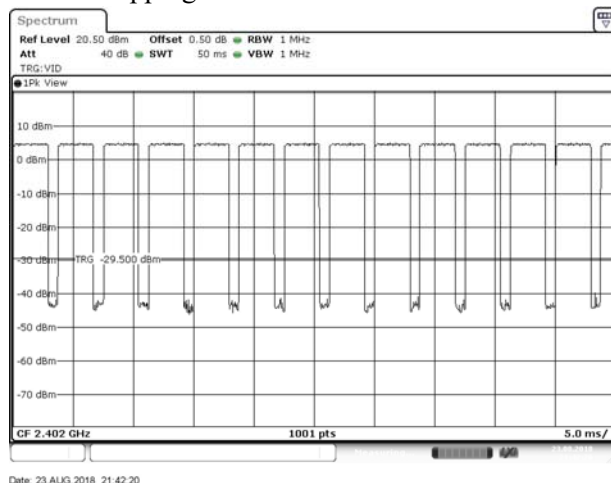CH 00 Hopping of Number




Date: 23.AUG.2018 21:42:20

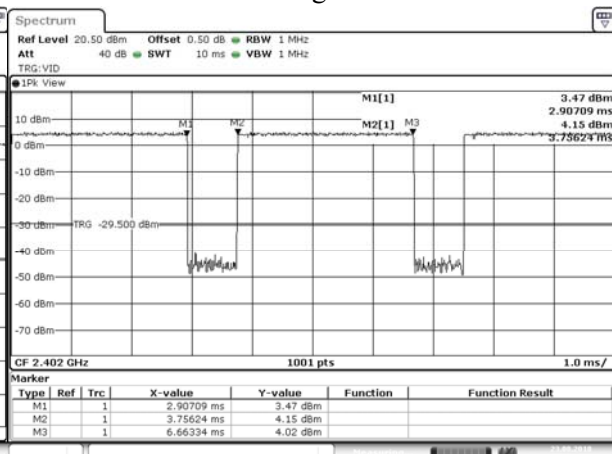CH 00 Time slot length




Date: 23.AUG.2018 21:42:36

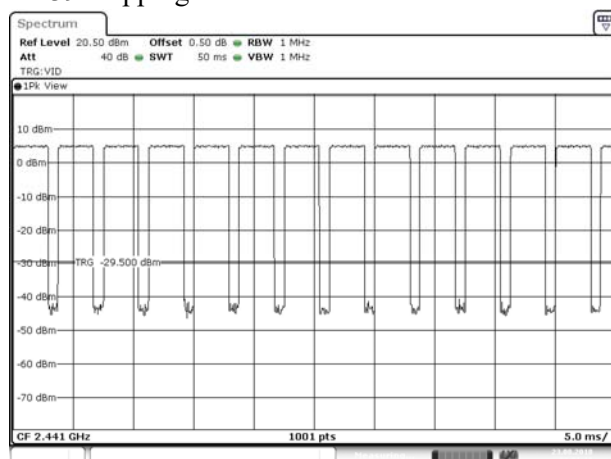CH39 Hopping of Number




Date: 23.AUG.2018 22:01:19

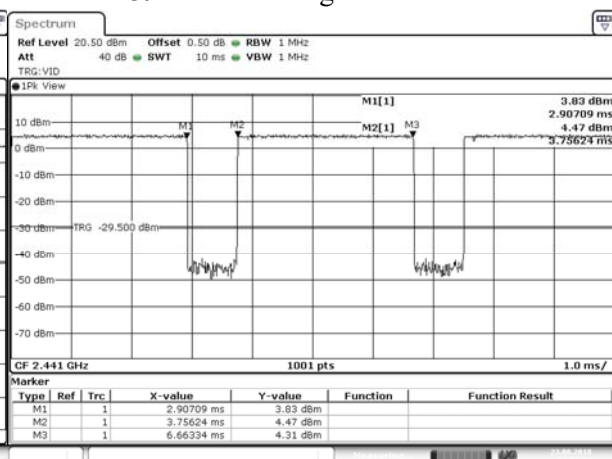CH 39 Time slot length




Date: 23.AUG.2018 22:01:34

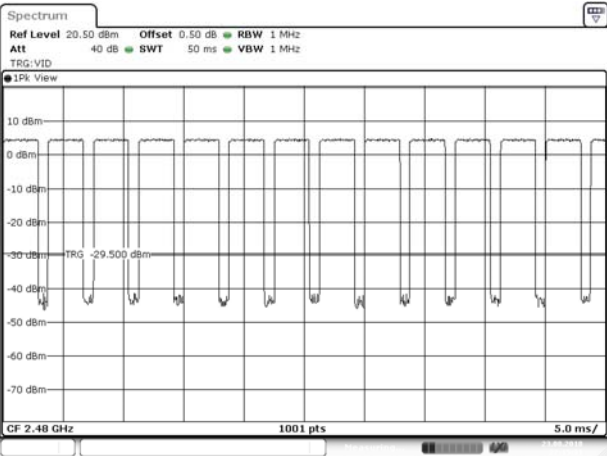CH 78 Hopping of Number



Date: 23.AUG.2018 22:15:31

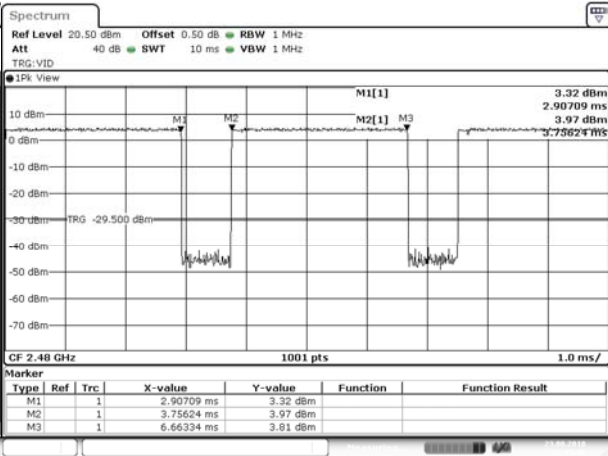CH 78 Time slot length




Date: 23.AUG.2018 22:15:47

Note:
The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.

10. Occupied Bandwidth

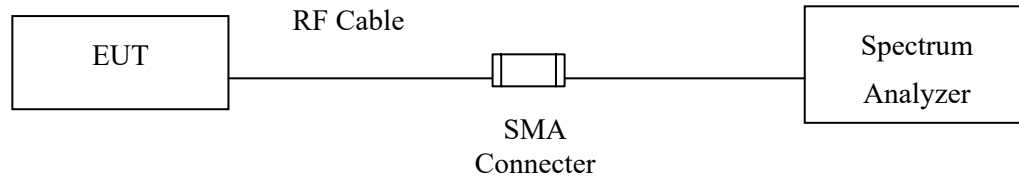10.1. Test Setup



10.2. Limits

N/A

10.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

10.4. Uncertainty

$\pm 279.2\text{Hz}$

10.5. Test Result of Occupied Bandwidth

Product : Wireless Headphones
 Test Item : Occupied Bandwidth Data
 Test Mode : Mode 1: Transmit - 1Mbps

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	951	--	NA
39	2441	948	--	NA
78	2480	945	--	NA

Figure Channel 00:



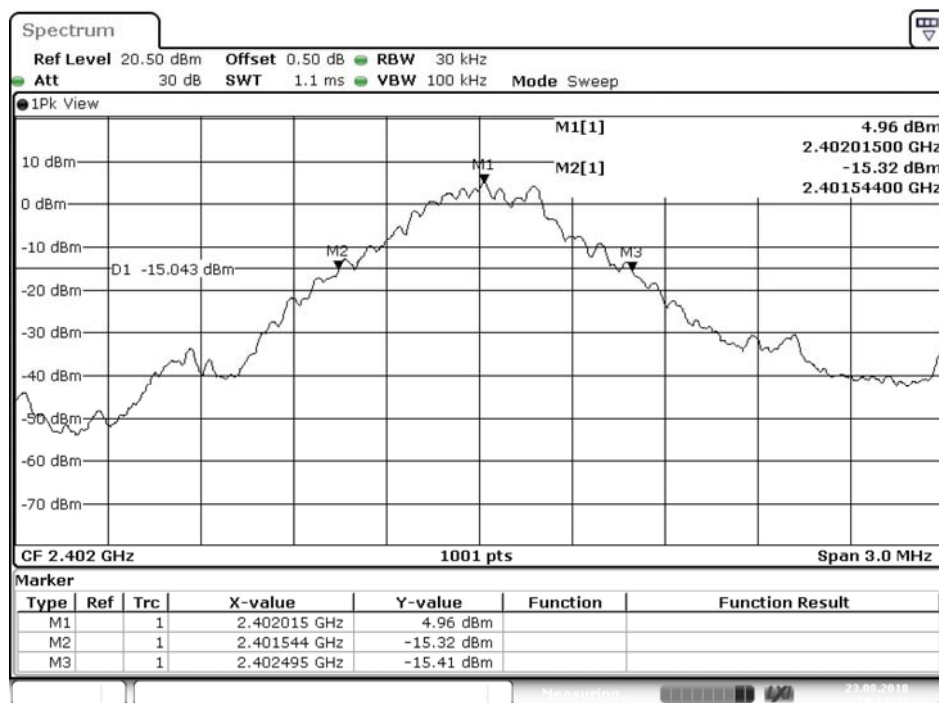


Figure Channel 39:

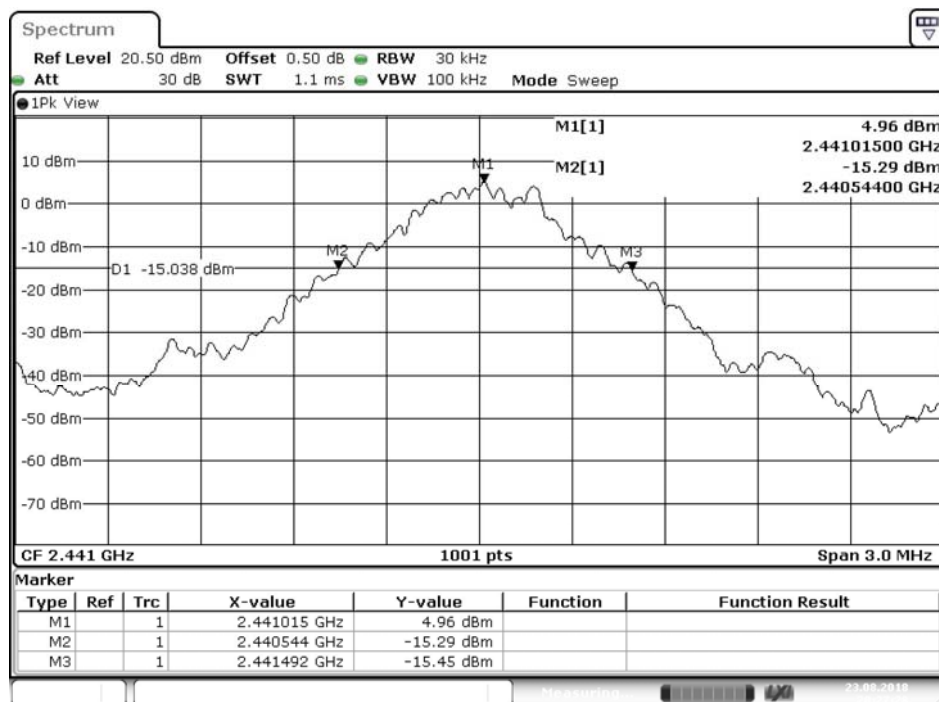

Date: 23.AUG.2018 20:27:28

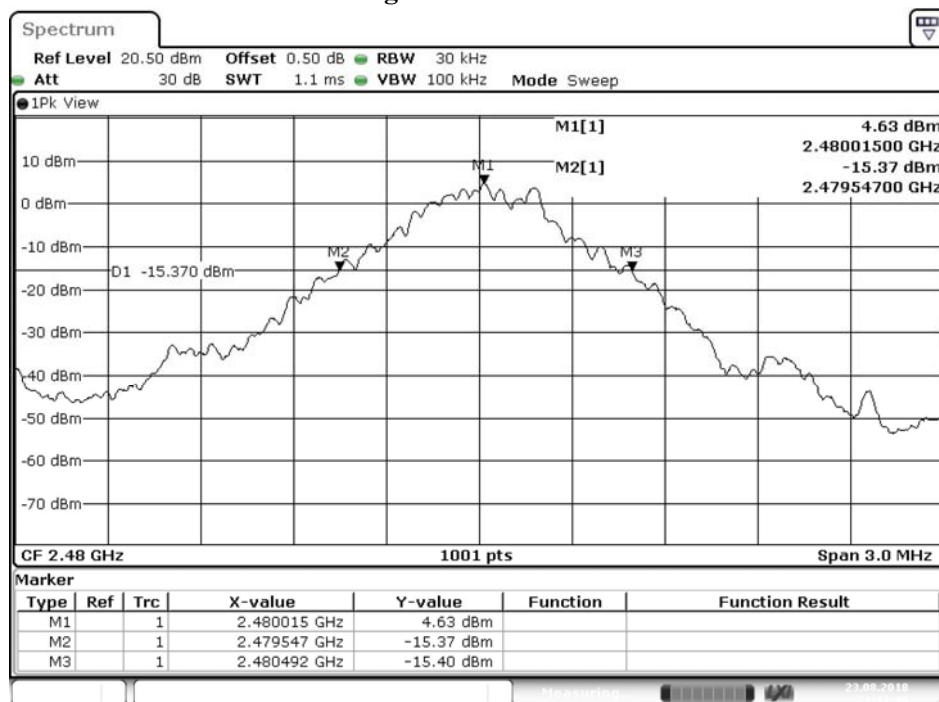Figure Channel 78:




Date: 23.AUG.2018 21:11:40

Product : Wireless Headphones
 Test Item : Occupied Bandwidth Data
 Test Mode : Mode 2: Transmit - 3Mbps


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1266	--	NA
39	2441	1266	--	NA
78	2480	1263	--	NA

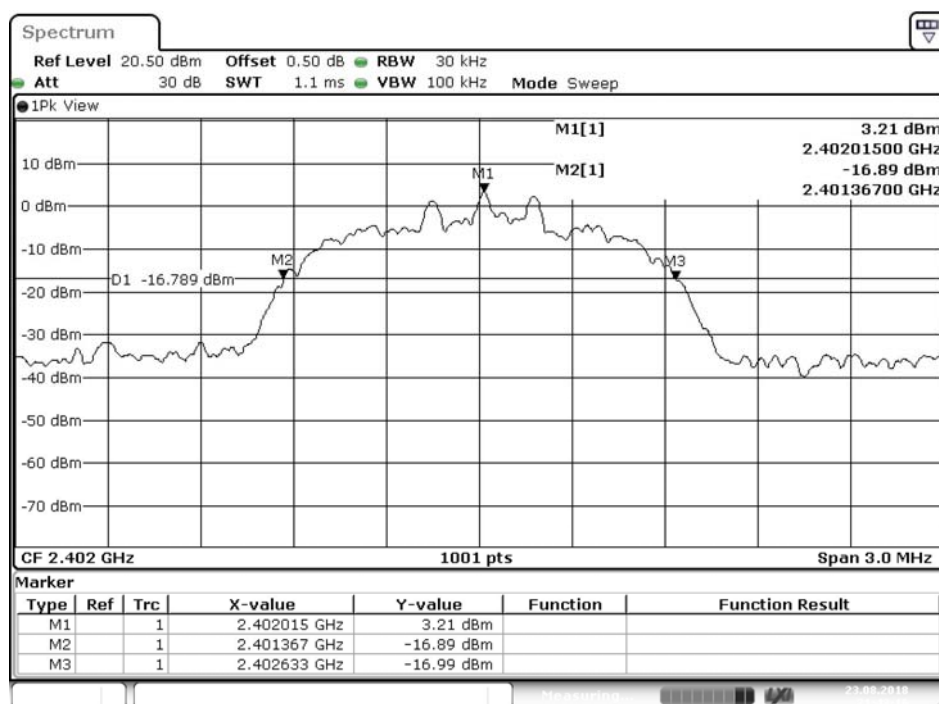Figure Channel 00:




Date: 23.AUG.2018 21:43:17

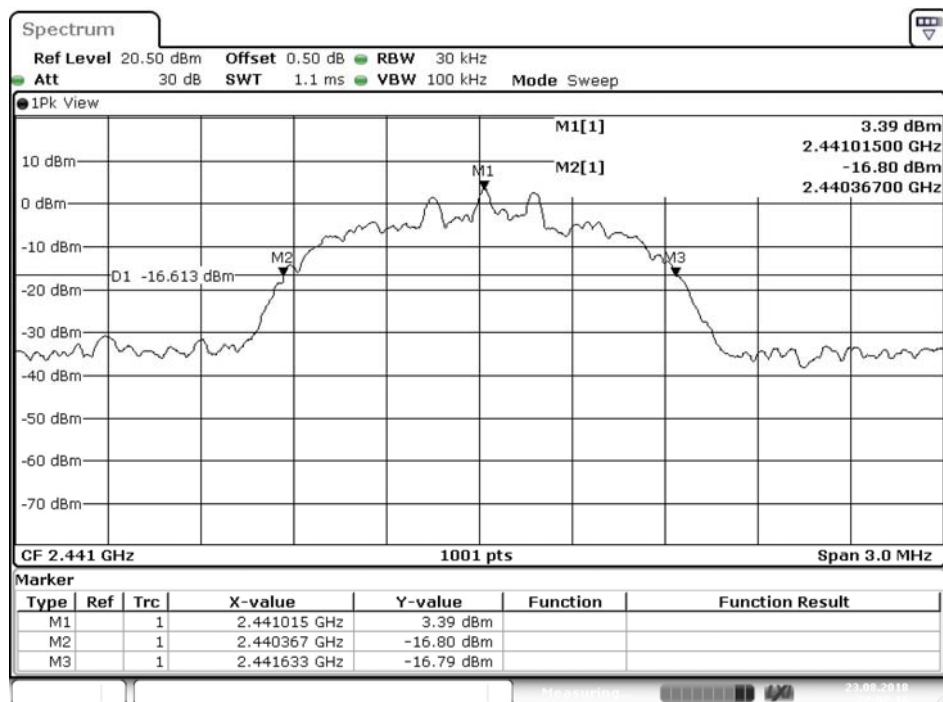Figure Channel 39:



Date: 23.AUG.2018 22:02:17

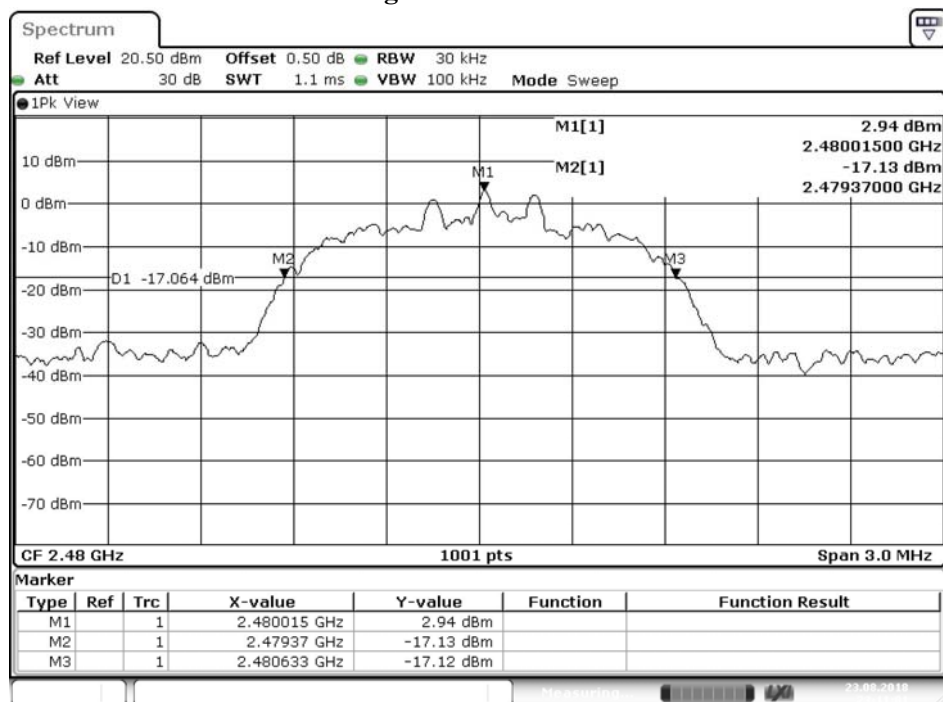Figure Channel 78:



Date: 23.AUG.2018 23:11:01

11. EMI Reduction Method During Compliance Testing

No modification was made during testing.