



MET Laboratories, Inc.

Safety Certification - EMI - Telecom Environmental Simulation

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

Audio-Technica
1221 Commerce Drive
Stow, Ohio 44224-1760

November 12, 2010

Dear Chris Henderson,

Enclosed is the EMC test report for compliance testing of the Audio-Technica, SpectraPulse Beltpack, MTU301, tested to the requirements of Title 47 of the Code of Federal Regulations (CFR), Part 15 Subpart B and ICES-003, Issue 4 February 2004 for a Class A Digital Device.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\Audio-Technica\EMC30074-FCC)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. This letter of transmittal is not a part of the attached report.



MET Laboratories, Inc.

Safety Certification - EMI - Telecom Environmental Simulation

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

Electromagnetic Compatibility Test Report

For the

**Audio-Technica
SpectraPulse Beltpack, MTU301**

Tested under

**Title 47 of the Code of Federal Regulations (CFR),
Part 15 Subpart B & ICES-003
for a Class A Digital Device**

MET Report: EMC30074-FCC

November 12, 2010

Prepared For:

**Audio-Technica
1221 Commerce Drive
Stow, Ohio 44224-1760**

**Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Avenue
Baltimore, MD 21230**



Audio-Technica
SpectraPulse Beltpack, MTU301

Electromagnetic Compatibility
CFR Title 47, Part 15, Subpart B

Electromagnetic Compatibility Test Report

For the

**Audio-Technica
SpectraPulse Beltpack, MTU301**

Tested under

**Title 47 of the Code of Federal Regulations (CFR),
Part 15 Subpart B & ICES-003
for a Class A Digital Device**

MET Report: EMC30074-FCC

A handwritten signature in black ink, appearing to read "D. Tennakoon".

Dusmantha Tennakoon
Project Engineer, Electromagnetic Compatibility Lab

A handwritten signature in black ink, appearing to read "Jennifer Warnell".

Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the applicable limits. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Title 47 of the CFR, Part 15, Subpart B and Industry Canada standards ICES-003, Issue 4 February 2004 for a Class A Digital Device under normal use and maintenance.

A handwritten signature in black ink, appearing to read "Shawn McMillen".

Shawn McMillen,
Wireless Manager, Electromagnetic Compatibility Lab



Audio-Technica
SpectraPulse Beltpack, MTU301

Electromagnetic Compatibility
CFR Title 47, Part 15, Subpart B & ICES-003

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	November 12, 2010	Initial Issue.



Table of Contents

1.0 Testing Summary	1
2.0 Equipment Configuration.....	2
2.1 Overview	2
2.2 Test Site	3
2.3 Description of Test Sample	3
2.4 Equipment Configuration.....	3
2.5 Support Equipment	4
2.6 Ports and Cabling Information	4
2.7 Mode of Operation	6
2.8 Modifications	6
2.8.1 Modifications to EUT	6
2.8.2 Modifications to Test Standard	6
2.9 Disposition of EUT	6
3.0 Electromagnetic Compatibility Emission Criteria.....	7
3.1 Conducted Emission Limits	7
3.2 Radiated Emission Limits	13
4.0 Test Equipment	22
5.0 Compliance Information.....	23
5.1 Verification Information	23
5.2 Label and User's Manual Information	28
5.3 ICES-003 Procedural & Labeling Requirements	30



List of Tables

Table 1. Summary of Test Results	1
Table 2. EUT Overview	2
Table 3. Equipment Configuration	3
Table 4. Support Equipment.....	4
Table 5. Ports and Cabling Information	4
Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)	7
Table 7. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), Class A Computer Peripheral	8
Table 8. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), Class A Computer Peripheral	9
Table 9. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), Charging Mode.....	10
Table 10. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), Charging Mode	11
Table 11. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	13
Table 12. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Running on Batteries, FCC Limits	14
Table 13. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Running on Batteries, ICES-003 Limits	14
Table 14. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Charging Mode, FCC Limits	16
Table 15. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Charging Mode, ICES-003 Limits.....	16
Table 16. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Class A Computer Peripheral, FCC Limits	18
Table 17. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Class A Computer Peripheral, ICES-003 Limits	18
Table 18. Test Equipment	22

List of Figures

Figure 1. Block Diagram of Test Configuration.....	5
--	---

List of Photographs

Photograph 1. Conducted Emissions, Test Setup, Class A Computer Peripheral	12
Photograph 2. Conducted Emissions, Test Setup, Charging Mode.....	12
Photograph 3. Radiated Emissions, Test Setup, Running on Batteries	20
Photograph 4. Radiated Emissions, Test Setup, Charging Mode	20
Photograph 5. Radiated Emissions, Test Setup, Class A Computer Peripheral.....	21

List of Plots

Plot 1. Conducted Emission, Phase Line Plot, 0.15 MHz to 30 MHz, Class A Computer Peripheral.....	8
Plot 2. Conducted Emission, Neutral Line Plot, 0.15 MHz to 30 MHz, Class A Computer Peripheral	9
Plot 3. Conducted Emission, Phase Line Plot, 0.15 MHz to 30 MHz, Charging Mode	10
Plot 4. Conducted Emission, Neutral Line Plot, 0.15 MHz to 30 MHz, Charging Mode.....	11
Plot 5. Radiated Emissions, Pre-Scan, Running on Batteries.....	15



Plot 6. Radiated Emissions, Pre-Scan, Charging Mode.....	17
Plot 7. Radiated Emissions, Pre-Scan, Class A Computer Peripheral	19



List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
ANSI	American National Standards Institute
Cal	Calibration
d	Measurement Distance
dB	Deci Bels
dB μ V	Deci-Bels above one micro Volt
dB μ V/m	Deci-Bels above one micro Volt per meter
DC	Direct Current
DCF	Distance Correction Factor
E	Electric Field
EUT	Equipment Under Test
f	Frequency
FCC	Federal Communications Commission
GHz	Giga Hertz
Hz	Hertz
kHz	kilohertz
kPa	kilopascal
kV	kilo Volt
LISN	Line Impedance Stabilization Network
MHz	MegaHertz
μ H	micro Henry
μ F	micro Farad
μ s	micro seconds
RF	Radio Frequency
RMS	Root-Mean-Square



Audio-Technica
SpectraPulse Beltpack, MTU301

Electromagnetic Compatibility
Testing Summary
CFR Title 47, Part 15, Subpart B & ICES-003

1.0 Testing Summary

Title 47 of the CFR, Part 15, Subpart B, Reference and Test Description	IC Reference	Results	Comments
15.107 (a) Conducted Emission Limits for a Class A Digital Device	ICES-003 Issue 4 February 2004	Compliant	Measured emissions were below applicable limits.
15.109 (a) Radiated Emission Limits for a Class A Digital Device	ICES-003 Issue 4 February 2004	Compliant	Measured emissions were below applicable limits.

Table 1. Summary of Test Results



2.0 Equipment Configuration

2.1 Overview

MET Laboratories, Inc. was contracted by Audio-Technica to perform testing on the SpectraPulse Beltpack, MTU301, under Audio-Technica purchase order number 4500002833.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Audio-Technica, SpectraPulse Beltpack, MTU301.

In accordance with §2.955(a) (3), the following data is presented in support of the verification of the Audio-Technica, SpectraPulse Beltpack, MTU301. Audio-Technica should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the SpectraPulse Beltpack, MTU301 has been **permanently** discontinued, as per §2.955(b).

The results obtained relate only to the item(s) tested.

Model(s) Tested:	SpectraPulse Beltpack, MTU301
Model(s) Covered:	SpectraPulse Beltpack, MTU301
Primary Power as Tested:	3 vdc (battery operated) and 120 vac charging mode
Equipment Emissions Class:	A
Highest Clock Frequency:	24.576 MHz
Evaluated by:	Dusmantha Tennakoon
Report Date:	November 12, 2010

Table 2. EUT Overview



2.2 Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Avenue, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a semi-anechoic chamber. In accordance with §2.948(a) (3), a complete site description is contained at MET Laboratories.

2.3 Description of Test Sample

The SpectraPulse Beltpack, MTU301, Equipment Under Test (EUT), is a wireless microphone system. The intended use is for boardroom or like applications used for recording, telephone communications, and sound reinforcement.

This particular unit is a beltpack transceiver intended to be used with a lavalier or head-worn type microphone.

2.4 Equipment Configuration

The EUT was set up as outlined in Figure 1. All equipment incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
EUT1	Microphone Transmitter Unit	MTU301	ES 04 6/1/10

Table 3. Equipment Configuration



2.5 Support Equipment

Ref. ID	Name / Description	Manufacturer	Model Number	Serial Number
AUX1	Digital Receiver Module	Audio-Technica	DRM141	1026-03026
AUX2	Audio Controller Interface	Audio-Technica	ACI707	NW-828428
AUX3	Computer Speaker	unknown	MMS 557	E154645B
AUX4	Head-worn Microphone	Audio-Technica	AT892	PSC88-2058

Table 4. Support Equipment

2.6 Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
EUT1	No ports		-			
AUX1	LINK OUT	CAT 5e 8-cond	1	6	Y	LINK IN on AUX2
AUX2	LINK IN	CAT 5e 8-cond	1	6	Y	LINK OUT on AUX1
	LINK OUT	Not Used	-			
	RS-232(front panel)	Not Used	-			
	VAC IN	IEC 3-cond	1	2	N	110VAC LINE FEED
	CONTROL INPUTS	Not Used	-			
	CONTROL OUTPUTS	Not Used	-			
	MIC OUT 1	Special 3 – pin audio	1		Y	(PHONO) R INPUT on AUX3
	MIC OUT 2 - 7	Not Used	-			
AUX3	AUX INPUT R	Special 3 – pin audio	1		Y	MIC OUT 1 on AUX2
	AUX INPUT L	Not Used	-			
	VAC IN	Pre-connected	1	2	N	110VAC LINE FEED
AUX4	HIROSE 4-PIN FEMALE	Audio Input into EUT Beltpack	1		Y	INTO EUT MIC INPUT

Table 5. Ports and Cabling Information

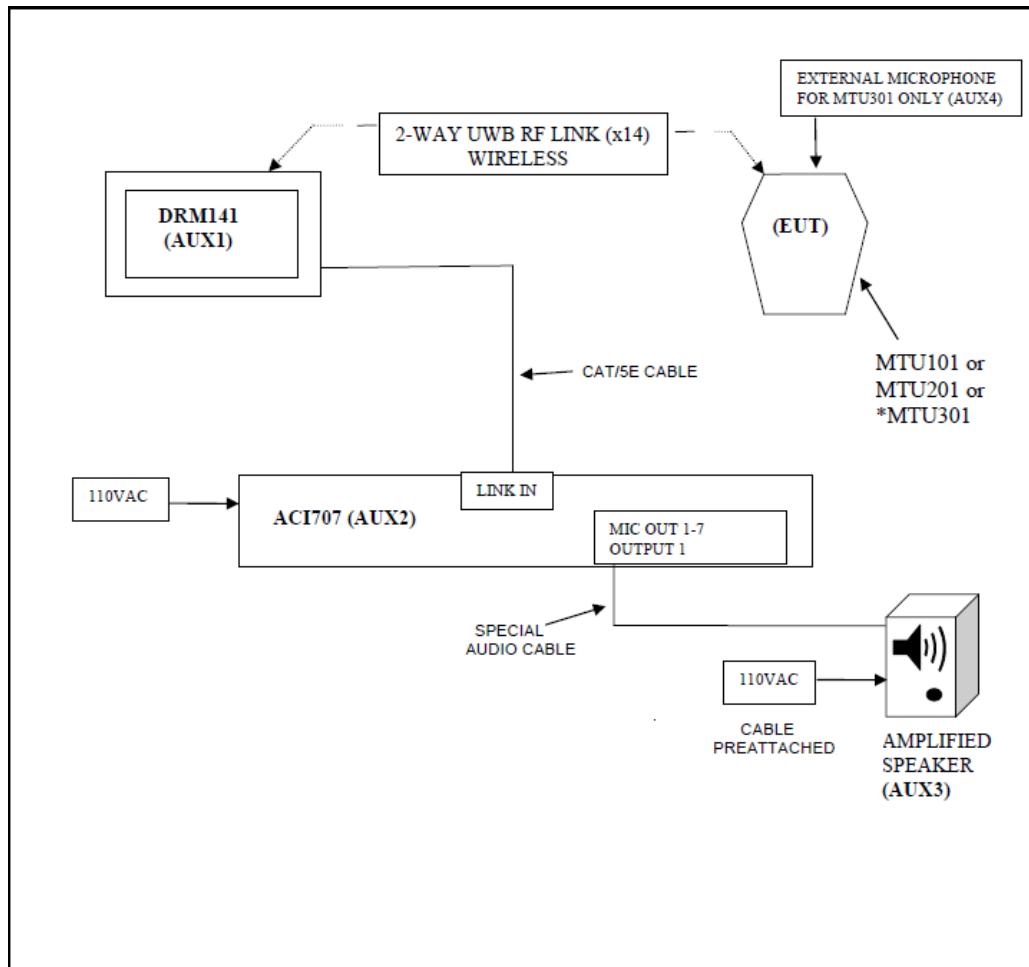


Figure 1. Block Diagram of Test Configuration



2.7 Mode of Operation

The EUT was turned on.

2.8 Modifications

2.8.1 Modifications to the EUT

A charging cable with a ferrite was required to pass radiated emissions testing. The part number is 31-480002 5'.

2.8.2 Modifications to the Test Standard

No modifications were made to the test standard.

2.9 Disposition of EUT

The test sample including all support equipment (if any), submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Audio-Technica upon completion of testing.

3.0 Electromagnetic Compatibility Emission Criteria

3.1 Conducted Emission Limits

Test Requirement(s):

15.107 (a) “Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.”

15.107 (b) “For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.”

Frequency range (MHz)	15.107(b), Class A Limits (dB μ V)		15.107(a), Class B Limits (dB μ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15- 0.5	79	66	66 - 56	56 - 46
0.5 – 5.0	73	60	56	46
5.0 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.

Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)

Test Procedures:

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a $50\Omega/50\mu\text{H}$ LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were remeasured using a quasi-peak and/or average detector as appropriate.

Test Results:

The EUT was compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.

Test Engineer(s):

Manasi Bhandiwad


Test Date(s):

10/25/10

Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.152	49	0	49	79	-30	38.52	0	38.52	66	-27.48
0.161	47	0	47	79	-32	36.62	0	36.62	66	-29.38
0.197	42.77	0	42.77	79	-36.23	34.13	0	34.13	66	-31.87
0.27	44.12	0	44.12	79	-34.88	35.44	0	35.44	66	-30.56
11.83	27.78	0.07	27.85	73	-45.15	18.77	0.07	18.84	60	-41.16
18.21	22.4	0.1	22.5	73	-50.5	14.17	0.1	14.27	60	-45.73


Table 7. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), Class A Computer Peripheral

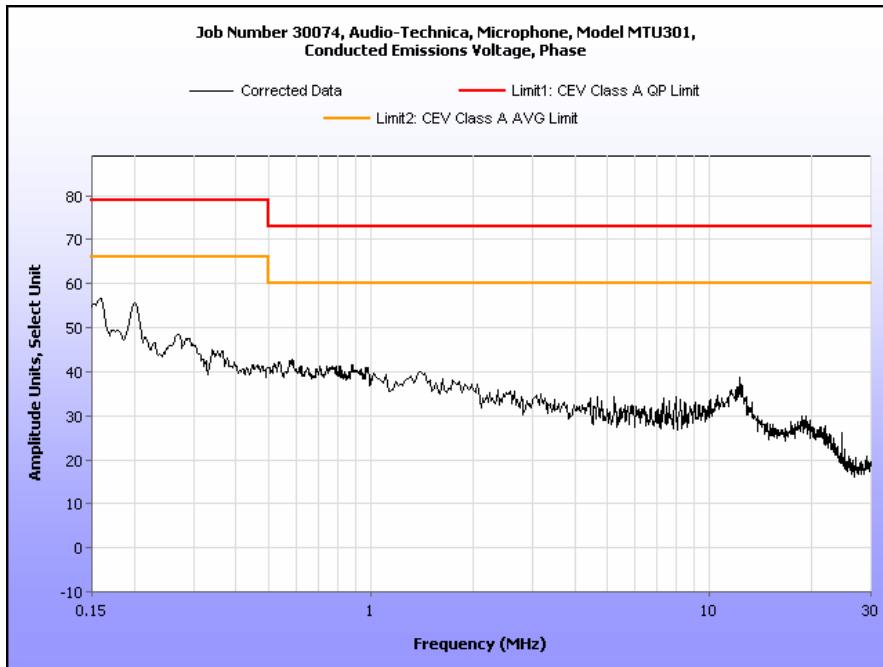

Plot 1. Conducted Emission, Phase Line Plot, 0.15 MHz to 30 MHz, Class A Computer Peripheral

Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)


Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.151	52.89	0	52.89	79	-26.11	40.9	0	40.9	66	-25.1
0.436	45.1	0	45.1	79	-33.9	28.62	0	28.62	66	-37.38
0.594	46.15	0	46.15	73	-26.85	35.92	0	35.92	60	-24.08
0.903	43.01	0	43.01	73	-29.99	26.82	0	26.82	60	-33.18
5.94	29.78	0.05	29.83	73	-43.17	15.9	0.05	15.95	60	-44.05
12.07	29.72	0.07	29.79	73	-43.21	23.2	0.07	23.27	60	-36.73

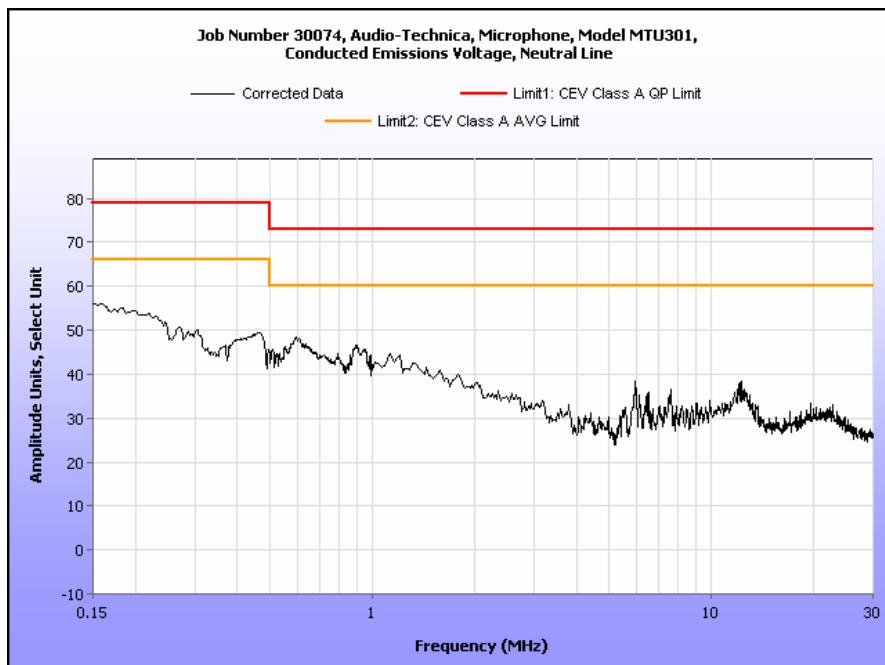Table 8. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), Class A Computer Peripheral

Plot 2. Conducted Emission, Neutral Line Plot, 0.15 MHz to 30 MHz, Class A Computer Peripheral

Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.159	42.58	0	42.58	79	-36.42	29.96	0	29.96	66	-36.04
0.179	41.3	0	41.3	79	-37.7	29.53	0	29.53	66	-36.47
0.201	39.47	0	39.47	79	-39.53	28.48	0	28.48	66	-37.52
0.222	37.26	0	37.26	79	-41.74	26.77	0	26.77	66	-39.23
0.245	35.35	0	35.35	79	-43.65	25.35	0	25.35	66	-40.65
0.446	34.92	0	34.92	79	-44.08	27.17	0	27.17	66	-38.83

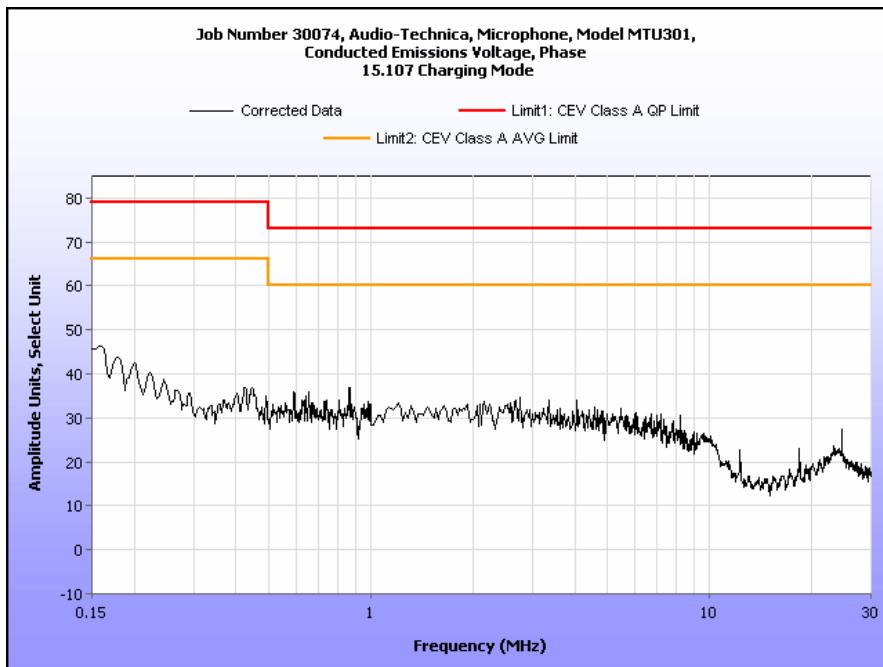
Table 9. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz), Charging Mode




Plot 3. Conducted Emission, Phase Line Plot, 0.15 MHz to 30 MHz, Charging Mode

Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.152	44.42	0	44.42	79	-34.58	28.39	0	28.39	66	-37.61
0.194	35.15	0	35.15	79	-43.85	26.02	0	26.02	66	-39.98
0.4475	34.66	0	34.66	79	-44.34	26.81	0	26.81	66	-39.19
1.183	19.5	0	19.5	73	-53.5	11.31	0	11.31	60	-48.69
6.785	18.64	0.05	18.69	73	-54.31	8.85	0.05	8.9	60	-51.1
9.64	17.12	0.06	17.18	73	-55.82	9.7	0.06	9.76	60	-50.24

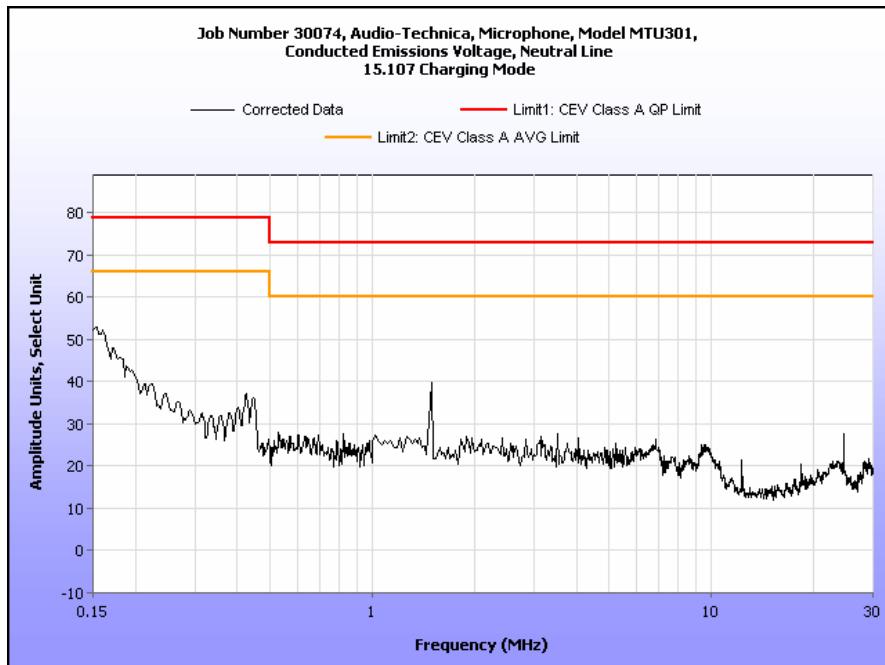Table 10. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz), Charging Mode

Plot 4. Conducted Emission, Neutral Line Plot, 0.15 MHz to 30 MHz, Charging Mode

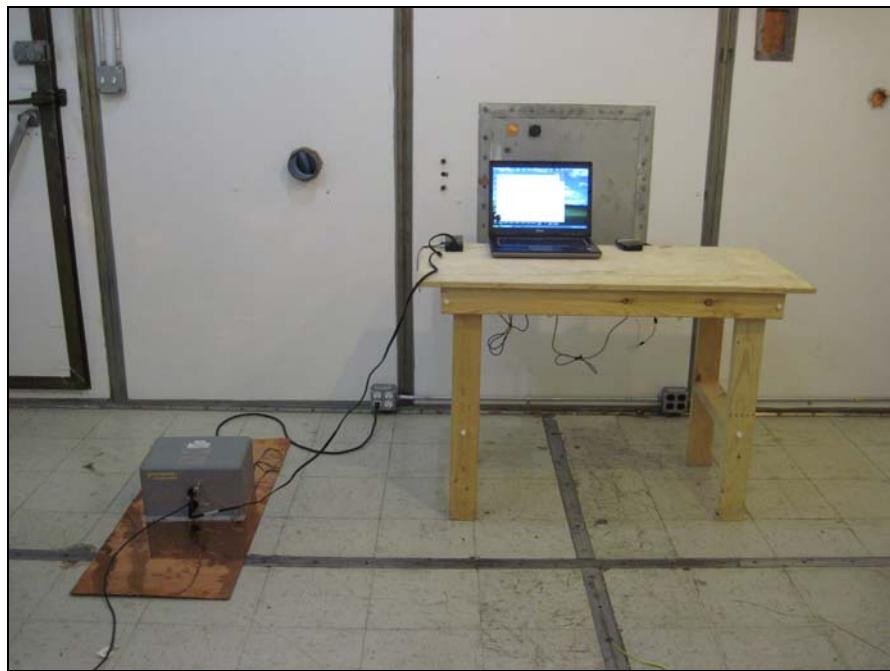Conducted Emission Limits Test Setup



Photograph 1. Conducted Emissions, Test Setup, Class A Computer Peripheral



Photograph 2. Conducted Emissions, Test Setup, Charging Mode

3.2 Radiated Emission Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 11.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 11.

Frequency (MHz)	Field Strength (dB μ V/m)	
	§15.109 (b), Class A Limit (dB μ V) @ 10m	§15.109 (a), Class B Limit (dB μ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 11. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures:

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

(Emissions measured at 3m were normalized using an inverse proportionality factor of 20dB per decade for comparison to the 10 m limit.).

Test Results:

The EUT was compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.

Test Engineer(s):

Dusmantha Tennakoon

Test Date(s):

10/15/10 & 10/21/10

Radiated Emissions Limits Test Results, Class A, 30 MHz to 1 GHz

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
172.01578	0	H	2.28	28.01	8.96	0.23	10.46	26.74	43.50	-16.76
172.01578	360	V	1.00	28.80	8.96	0.23	10.46	27.53	43.50	-15.97
73.714679	347	H	2.60	23.43	8.93	0.23	10.46	22.13	39.00	-16.87
73.714679	57	V	1.00	21.44	8.93	0.23	10.46	20.14	39.00	-18.86
485.35897	278	H	2.07	17.42	17.21	1.00	10.46	25.17	46.40	-21.23
485.35897	110	V	1.00	12.73	17.21	1.00	10.46	20.48	46.40	-25.92
153.59193	311	H	2.19	18.97	8.20	0.23	10.46	16.94	43.50	-26.56
153.59193	0	V	1.00	23.25	8.20	0.23	10.46	21.22	43.50	-22.28


Table 12. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Running on Batteries, FCC Limits

Note: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3\text{ m}/10\text{ m})$ as expressed in the 'Distance Correction' column.

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
172.01578	0	H	2.28	28.01	8.96	0.23	10.46	26.74	40.00	-13.26
172.01578	360	V	1.00	28.80	8.96	0.23	10.46	27.53	40.00	-12.47
73.714679	347	H	2.60	23.43	8.93	0.23	10.46	22.13	40.00	-17.87
73.714679	57	V	1.00	21.44	8.93	0.23	10.46	20.14	40.00	-19.86
485.35897	278	H	2.07	17.42	17.21	1.00	10.46	25.17	47.00	-21.83
485.35897	110	V	1.00	12.73	17.21	1.00	10.46	20.48	47.00	-26.52
153.59193	311	H	2.19	18.97	8.20	0.23	10.46	16.94	40.00	-23.06
153.59193	0	V	1.00	23.25	8.20	0.23	10.46	21.22	40.00	-18.78

Table 13. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Running on Batteries, ICES-003 Limits

Note: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3\text{ m}/10\text{ m})$ as expressed in the 'Distance Correction' column.

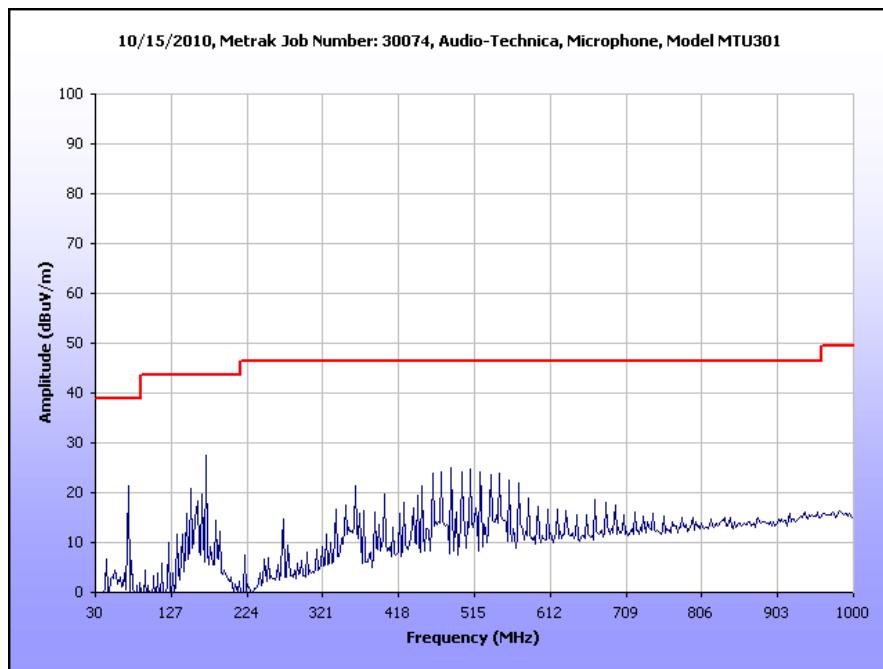

Plot 5. Radiated Emissions, Pre-Scan, Running on Batteries

Radiated Emissions Limits Test Results, Class A, 30 MHz to 1 GHz

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
47.855711	121	H	1.47	5.26	9.19	0.23	10.46	4.22	39.00	-34.78
47.855711	225	V	1.01	19.64	9.19	0.23	10.46	18.60	39.00	-20.40
76.784569	169	H	1.79	16.14	8.11	0.23	10.46	14.02	39.00	-24.98
76.784569	145	V	1.17	27.57	8.11	0.23	10.46	25.45	39.00	-13.55
73.714429	169	H	2.32	18.11	8.93	0.23	10.46	16.81	39.00	-22.19
73.714429	294	V	1.03	26.48	8.93	0.23	10.46	25.18	39.00	-13.82
70.644289	158	H	2.18	9.82	9.41	0.23	10.46	9.00	39.00	-30.00
70.644289	201	V	1.82	17.30	9.41	0.23	10.46	16.48	39.00	-22.52
172.02906	139	H	1.40	23.95	8.96	0.23	10.46	22.68	43.50	-20.82


Table 14. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Charging Mode, FCC Limits

Note: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3\text{ m}/10\text{ m})$ as expressed in the 'Distance Correction' column.

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
47.855711	121	H	1.47	5.26	9.19	0.23	10.46	4.22	40.00	-35.78
47.855711	225	V	1.01	19.64	9.19	0.23	10.46	18.60	40.00	-21.40
76.784569	169	H	1.79	16.14	8.11	0.23	10.46	14.02	40.00	-25.98
76.784569	145	V	1.17	27.57	8.11	0.23	10.46	25.45	40.00	-14.55
73.714429	169	H	2.32	18.11	8.93	0.23	10.46	16.81	40.00	-23.19
73.714429	294	V	1.03	26.48	8.93	0.23	10.46	25.18	40.00	-14.82
70.644289	158	H	2.18	9.82	9.41	0.23	10.46	9.00	40.00	-31.00
70.644289	201	V	1.82	17.30	9.41	0.23	10.46	16.48	40.00	-23.52
172.02906	139	H	1.40	23.95	8.96	0.23	10.46	22.68	40.00	-17.32
172.02906	259	V	1.00	29.56	8.96	0.23	10.46	28.29	40.00	-11.71
153.59719	320	H	2.21	19.97	8.20	0.23	10.46	17.94	40.00	-22.06
153.59719	241	V	1.00	23.79	8.20	0.23	10.46	21.76	40.00	-18.24

Table 15. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Charging Mode, ICES-003 Limits

Note: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3\text{ m}/10\text{ m})$ as expressed in the 'Distance Correction' column.

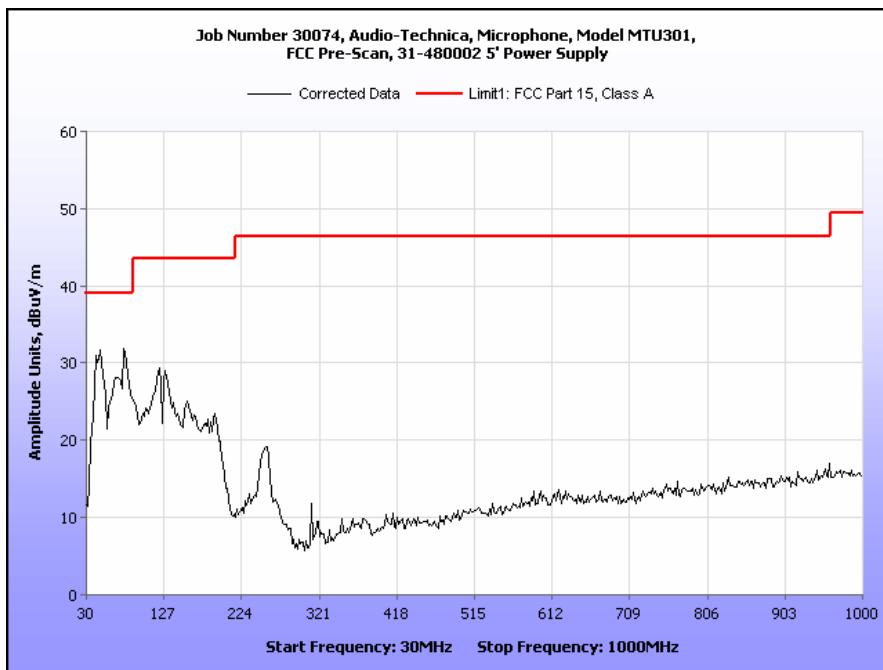

Plot 6. Radiated Emissions, Pre-Scan, Charging Mode

Radiated Emissions Limits Test Results, Class A, 30 MHz to 1 GHz

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
172.01829	324	H	2.07	28.04	8.96	0.23	10.46	26.77	43.50	-16.73
172.01829	319	V	1.00	33.66	8.96	0.23	10.46	32.39	43.50	-11.11
70.673347	0	H	2.62	17.12	9.40	0.23	10.46	16.29	39.00	-22.71
70.673347	283	V	1.75	19.19	9.40	0.23	10.46	18.36	39.00	-20.64
400.91383	32	H	1.00	7.48	15.42	0.84	10.46	13.28	46.40	-33.12
400.91383	360	V	1.00	8.78	15.42	0.84	10.46	14.58	46.40	-31.82
42.996243	360	H	2.16	12.04	8.90	0.23	10.46	10.71	39.00	-28.29
42.996243	96	V	1.00	24.20	8.90	0.23	10.46	22.87	39.00	-16.13
485.35145	255	H	1.00	18.50	17.21	1.00	10.46	26.25	46.40	-20.15
485.35145	27	V	1.00	15.58	17.21	1.00	10.46	23.33	46.40	-23.07
760.90782	0	H	1.00	5.72	20.92	1.50	10.46	17.68	46.40	-28.72
760.90782	0	V	1.00	5.65	20.92	1.50	10.46	17.61	46.40	-28.79


Table 16. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Class A Computer Peripheral, FCC Limits

Note: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3\text{ m}/10\text{ m})$ as expressed in the 'Distance Correction' column.

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
172.01829	324	H	2.07	28.04	8.96	0.23	10.46	26.77	40.00	-13.23
172.01829	319	V	1.00	33.66	8.96	0.23	10.46	32.39	40.00	-7.61
70.673347	0	H	2.62	17.12	9.40	0.23	10.46	16.29	40.00	-23.71
70.673347	283	V	1.75	19.19	9.40	0.23	10.46	18.36	40.00	-21.64
400.91383	32	H	1.00	7.48	15.42	0.84	10.46	13.28	47.00	-33.72
400.91383	360	V	1.00	8.78	15.42	0.84	10.46	14.58	47.00	-32.42
42.996243	360	H	2.16	12.04	8.90	0.23	10.46	10.71	40.00	-29.29
42.996243	96	V	1.00	24.20	8.90	0.23	10.46	22.87	40.00	-17.13
485.35145	255	H	1.00	18.50	17.21	1.00	10.46	26.25	47.00	-20.75
485.35145	27	V	1.00	15.58	17.21	1.00	10.46	23.33	47.00	-23.67
760.90782	0	H	1.00	5.72	20.92	1.50	10.46	17.68	47.00	-29.32
760.90782	0	V	1.00	5.65	20.92	1.50	10.46	17.61	47.00	-29.39


Table 17. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Class A Computer Peripheral, ICES-003 Limits

Note: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3\text{ m}/10\text{ m})$ as expressed in the 'Distance Correction' column.

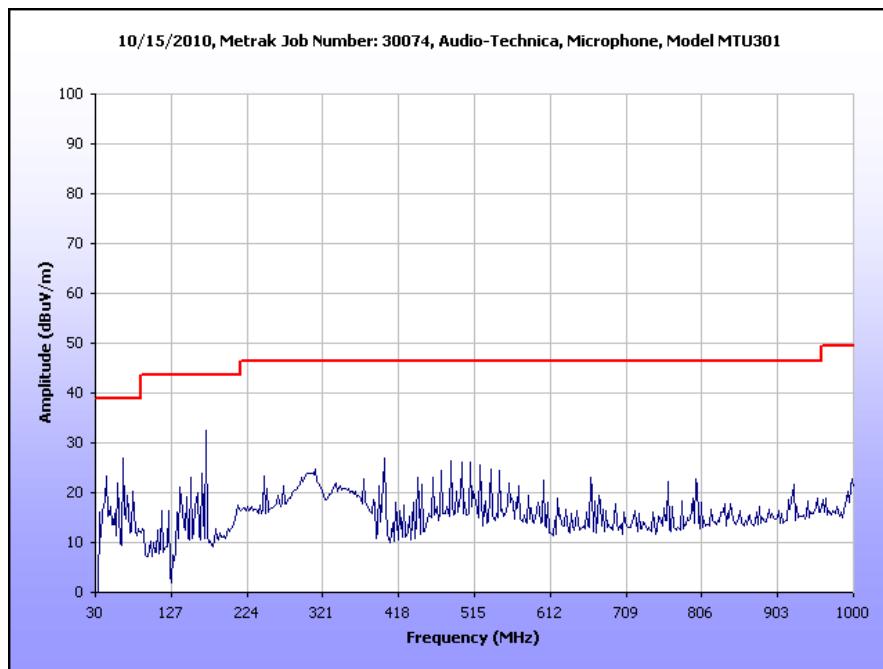

Plot 7. Radiated Emissions, Pre-Scan, Class A Computer Peripheral

Radiated Emission Limits Test Setup

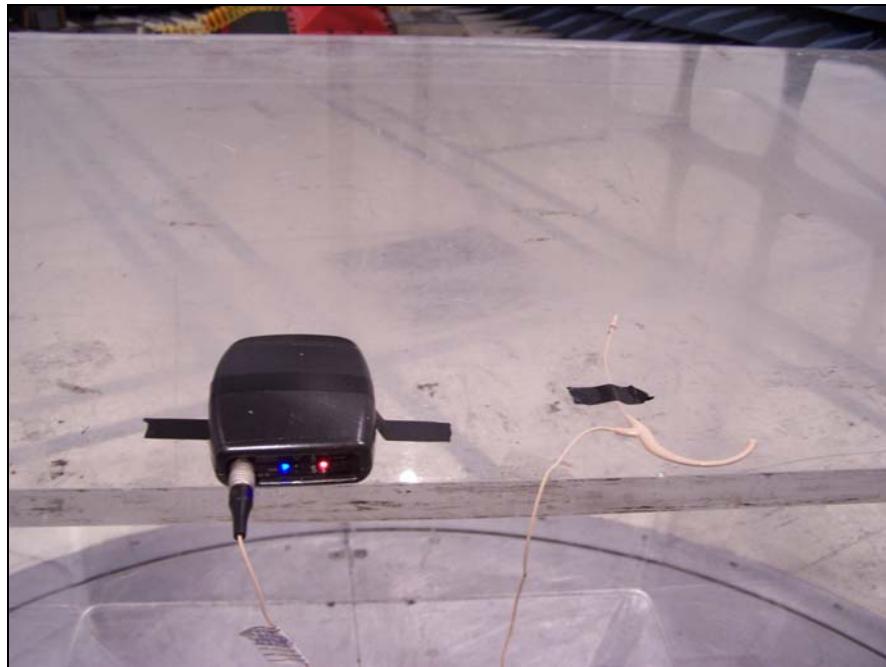

Photograph 3. Radiated Emissions, Test Setup, Running on Batteries



Photograph 4. Radiated Emissions, Test Setup, Charging Mode



Photograph 5. Radiated Emissions, Test Setup, Class A Computer Peripheral



4.0 Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:1999.

Test Name: Conducted Emissions						Test Date(s): 10/25/10
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date	
1T4382	SHIELD ROOM 6	FIL-SHIELD	N/A	SEE NOTE		
1T4564	LISN (24 AMP)	SOLAR ELECTRONICS	9252-50-R-24-BNC	10/06/2010	10/06/2011	
1T4621	ESA-E SERIES SPECTRUM ANALYZER	AGILENT	E4402B	05/10/2010	05/10/2011	
1T4627	THERMO/HYGROMETER	CONTROL COMPANY	S6-627-9	10/09/2009	10/09/2011	
Test Name: Radiated Emissions						Test Date(s): 10/15/10
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date	
1T4568	RADIATING NOISE SOURCE	MET LABORATORIES	N/A	SEE NOTE		
1T4619	THERMO-HYGROMETER	CONTROL COMPANY	S6-627-9	11/07/2008	11/07/2010	
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	05/25/2010	05/25/2011	
1T4300	SEMI-ANECHOIC CHAMBER # 1	EMC TEST SYSTEMS	NONE	08/23/2010	08/23/2013	
1S2485	BILOG ANTENNA	TESEQ	CBL6112D	05/07/2010	05/07/2011	

Table 18. Test Equipment

Note: Functionally verified test equipment is verified using calibrated instrumentation at the time of testing.



5.0 Compliance Information

5.1 Verification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of emitting radio-frequency energy by radiation, conduction, or other means. Radio-frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a provision that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.902 Verification.

- (a) *Verification is a procedure where the manufacturer*² *makes measurements or takes the necessary steps to insure that the equipment complies with the appropriate technical standards.* Submission of a sample unit or representative data to the Commission demonstrating compliance is not required unless specifically requested by the Commission pursuant to § 2.957, of this part.
- (b) Verification attaches to all items subsequently marketed by the manufacturer or importer which are identical as defined in § 2.908 to the sample tested and found acceptable by the manufacturer.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

² In this case, MET Laboratories, Inc. is acting as an agent of the manufacturer.



§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

§ 2.952 Limitation on verification.

- (a) Verification signifies that the manufacturer or importer has determined that the equipment has been shown to be capable of compliance with the applicable technical standards if no unauthorized change is made in the equipment and if the equipment is properly maintained and operated. Compliance with these standards shall not be construed to be a finding by the manufacturer or importer with respect to matters not encompassed by the Commission's rules.
- (b) Verification of the equipment by the manufacturer or importer is effective until a termination date is otherwise established by the Commission.
- (c) No person shall, in any advertising matter, brochure, etc., use or make reference to a verification in a deceptive or misleading manner or convey the impression that such verification reflects more than a determination by the manufacturer or importer that the device or product has been shown to be capable of compliance with the applicable technical standards of the Commission's rules.



§ 2.953 Responsibility for compliance.

- (a) In verifying compliance, the responsible party, as defined in §2.909 warrants that each unit of equipment marketed under the verification procedure will be identical to the unit tested and found acceptable with the standards and that the records maintained by the responsible party continue to reflect the equipment being produced under such verification within the variation that can be expected due to quantity production and testing on a statistical basis.
- (b) The importer of equipment subject to verification may upon receiving a written statement from the manufacturer that the equipment complies with the appropriate technical standards rely on the manufacturer or independent testing agency to verify compliance. The test records required by §2.955 however should be in the English language and made available to the Commission upon a reasonable request, in accordance with §2.956.
- (c) In the case of transfer of control of equipment, as in the case of sale or merger of the grantee, the new manufacturer or importer shall bear the responsibility of continued compliance of the equipment.
- (d) Verified equipment shall be re-verified if any modification or change adversely affects the emanation characteristics of the modified equipment. The party designated in §2.909 bears responsibility for continued compliance of subsequently produced equipment.

§ 2.954 Identification.

Devices subject only to verification shall be uniquely identified by the person responsible for marketing or importing the equipment within the United States. However, the identification shall not be of a format which could be confused with the FCC Identifier required on certified, notified or type accepted equipment. The importer or manufacturer shall maintain adequate identification records to facilitate positive identification for each verified device.

§ 2.955 Retention of records.

- (a) For each equipment subject to verification, the responsible party, as shown in §2.909 shall maintain the records listed as follows:
 - (1) A record of the original design drawings and specifications and all changes that have been made that may affect compliance with the requirements of §2.953.
 - (2) A record of the procedures used for production inspection and testing (if tests were performed) to insure the conformance required by §2.953. (Statistical production line Emission testing is not required.)
- (b) The records listed in paragraph (a) of this section shall be retained for two years after the manufacture of said equipment item has been permanently discontinued, or until the conclusion of an investigation or a proceeding if the manufacturer or importer is officially notified that an investigation or any other administrative proceeding involving his equipment has been instituted.



§ 2.956 FCC inspection and submission of equipment for testing.

(a) Each responsible party shall upon receipt of reasonable request:

- (1) Submit to the Commission the records required by §2.955.
- (2) Submit one or more sample units for measurements at the Commission's Laboratory.
 - (i) Shipping costs to the Commission's Laboratory and return shall be borne by the responsible party.
 - (ii) In the event the responsible party believes that shipment of the sample to the Commission's Laboratory is impractical because of the size or weight of the equipment, or the power requirement or for any other reason, the responsible party may submit a written explanation why such shipment is impractical and should not be required.

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.
- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.
- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.
- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.



5.2 ICES-003 Procedural & Labeling Requirements

From the Industry Canada Electromagnetic Compatibility Advisory Bulletin entitled, "Implementation and Interpretation of the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003" (EMCAB-3, Issue 2, July 1995):

"At present, CISPR 22: 2002 and ICES technical requirements are essentially equivalent. Therefore, if you have CISPR 22: 2002 approval by meeting CISPR Publication 22, the only additional requirements are: to attach a note to the report of the test results for compliance, indicating that these results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations; to maintain these records on file for the requisite five year period; and to provide the device with a notice of compliance in accordance with ICES-003."

Procedural Requirements:

According to Industry Canada's Interference Causing Equipment Standard for Digital Apparatus ICES-003 Issue 4, February 2004:

Section 6.1: A record of the measurements and results, showing the date that the measurements were completed, shall be retained by the manufacturer or importer for a period of at least five years from the date shown in the record and made available for examination on the request of the Minister.

Section 6.2: A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement in the user's manual.

Labeling Requirements:

The suggested text for the notice, in English and in French, is provided below, from the Annex of ICES-003:

This Class [¹] digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [¹] est conforme à la norme NMB-003 du Canada.

¹ Insert either A or B but not both as appropriate for the equipment requirements.