



849 NW State Road 45
Newberry, FL 32669 USA
Phone: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

FCC PART 15 B SUBPART B RECEIVER TEST REPORT

Applicant	AUDIO TECHNICA CORPORATION	
Address	2206 NARUSE, MACHIDA TOKYO 194 JAPAN	
FCC ID	JFZR3100BD	
Product Description	WIRELESS MICROPHONE RECEIVER	
Date Sample Received	11/18/2009	
Date Tested	12/15/2009	
Tested By	Joe Scoglio	
Approved By	Mario de Aranzeta	
Report Number	2812AUT9TestReport.doc	
Test Results	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



Certificate # 0955-01

TABLE OF CONTENTS

GENERAL REMARKS	3
REPORT SUMMARY	4
TEST ENVIRONMENT	4
TEST SETUP SUMMARY	4
DUT SPECIFICATION	5
TEST EQUIPMENT LIST	6
TEST PROCEDURES	7
RADIATED SPURIOUS EMISSIONS	8
POWER LINE CONDUCTED INTERFERENCE	10
RADIATED EMISSIONS TEST SETUP PHOTO	13
CONDUCTED EMISSIONS TEST SETUP PHOTO	14

APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZR3100BD
REPORT: A\AudioTechnica_JFZ\2812AUT9\2812AUT9TestReport.doc

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results relate only to the items tested.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, Fl 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: 12/15/2009

APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZR3100BD
REPORT: A\AudioTechnica_JFZ\2812AUT9\2812AUT9TestReport.doc

REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.
Applicable Rule(s)	Pt 15.109, Pt 15.107, ANSI C63.4: 2003
Related Report	None

TEST ENVIRONMENT

Test Facility	Timco Engineering, Inc. 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition in the laboratory	Temperature: 26°C Relative humidity: 50%

TEST SETUP SUMMARY

Test Setup Diagram/ Description	The DUT was placed on the turntable per setup per ANSI C63.4: 2003. A test set up photo is provided for clarification.
Deviation from the standard/procedure	No deviation
Modification of DUT	No modification

APPLICANT: AUDIO TECHNICA CORPORATION
 FCC ID: JFZR3100BD
 REPORT: A\AudioTechnica_JFZ\2812AUT9\2812AUT9TestReport.doc

DUT SPECIFICATION

DUT Description	WIRELESS MICROPHONE RECEIVER
FCC ID	JFZR3100BD
DUT Power Source	<input checked="" type="checkbox"/> 110–120Vac/50– 60Hz
	<input checked="" type="checkbox"/> DC Power
	<input type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input type="checkbox"/> Portable
Laboratory Test Conditions	Temperature: 26°C Humidity: 55%
Modifications to DUT:	<input checked="" type="checkbox"/> No <input type="checkbox"/> Yes (explanation below)

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZR3100BD

REPORT: A\AudioTechnica_JFZ\2812AUT9\2812AUT9TestReport.doc

TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/10/10
AC Voltmeter	HP	400FL	2213A14499	CAL 3/23/09	3/23/11
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 6/10/09	6/10/11
Frequency Counter	HP	5385A	3242A07460	CAL 5/26/09	5/26/11
Hygro-Thermometer	Extech	445703	0602	CAL 1/30/09	1/30/11
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/26/09	5/26/11
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/18/09	5/18/11
System One	Audio Precision	System One	SYS1-45868	CHAR 2/27/08	2/27/10
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/21/09	11/21/11
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/22/09	11/22/11
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/21/09	11/21/11
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/24/09	11/24/11
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZR3100BD

REPORT: A\AudioTechnica_JFZ\2812AUT9\2812AUT9TestReport.doc

TEST PROCEDURES

Power line conducted Emission: The test procedure used was ANSI C63.4-2003. The spectrum was scanned from 0.15 to 30 MHz.

Radiation Interference: The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The video bandwidth was always greater than or equal to the RBW.

The frequency was scanned from 30 MHz to 1.0 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The DUT was measured in three (3) orthogonal planes when necessary.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

$$\begin{array}{lllll}
 \text{Freq (MHz)} & \text{Meter Reading} & + \text{ACF} & + \text{CL} & = \text{FS} \\
 33 & 20 \text{ dB}\mu\text{V} & + 10.36 \text{ dB/m} & +0.40 \text{ dB} & = 30.36 \text{ dB}\mu\text{V/m @ 3m}
 \end{array}$$

ANSI C63.4-2003 Measurement Procedures: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and verticals planes.

RADIATED SPURIOUS EMISSIONS

Rules Part No.: 15.109

Requirements:

Frequency MHz	Limits
30 – 88	40.0 dB μ V/m measured @ 3 meters
88 – 216	43.5 dB μ V/m measured @ 3 meters
216 – 960	46.0 dB μ V/m measured @ 3 meters
Above 960	54.0 dB μ V/m measured @ 3 meters

Test Data:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dB μ V/m	Margin dB
655.5	34.20	1.0	H	0.42	13.85	15.27	24.73
655.5	34.20	10.2	V	0.42	12.65	23.27	16.73
655.5	48.10	4.1	H	0.49	12.09	16.68	23.32
655.5	48.10	14.9	V	0.49	11.18	26.57	13.43
655.5	85.00	6.9	H	0.61	9.60	17.11	22.89
655.5	85.00	12.8	V	0.61	10.30	23.71	16.29
655.5	99.00	7.7	V	0.65	11.50	19.85	23.65
655.5	99.00	12.5	H	0.65	10.68	23.83	19.67
655.5	233.20	15.3	V	0.97	11.42	27.69	18.31
655.5	233.20	20.0	H	0.97	11.66	32.63	13.37
655.5	411.50	6.3	V	1.21	15.92	23.43	22.57
655.5	411.50	7.4	H	1.21	16.20	24.81	21.19
667.5	34.20	1.0	H	0.42	13.85	15.27	24.73
667.5	34.20	10.2	V	0.42	12.65	23.27	16.73
667.5	48.10	4.1	H	0.49	12.09	16.68	23.32
667.5	48.10	14.9	V	0.49	11.18	26.57	13.43
667.5	85.00	6.9	H	0.61	9.60	17.11	22.89
667.5	85.00	12.8	V	0.61	10.30	23.71	16.29
667.5	99.00	7.7	V	0.65	11.50	19.85	23.65
667.5	99.00	12.5	H	0.65	10.68	23.83	19.67
667.5	233.20	15.3	V	0.97	11.42	27.69	18.31
667.5	233.20	20.2	H	0.97	11.66	32.83	13.17
667.5	423.50	6.8	V	1.22	16.04	24.06	21.94
667.5	423.50	7.7	H	1.22	16.31	25.23	20.77
680.0	34.20	1.0	H	0.42	13.85	15.27	24.73
680.0	34.20	10.2	V	0.42	12.65	23.27	16.73

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZR3100BD

REPORT: A\AudioTechnica_JFZ\2812AUT9\2812AUT9TestReport.doc

TEST DATA COND.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dB μ V/m	Margin dB
680.0	48.10	4.1	H	0.49	12.09	16.68	23.32
680.0	48.10	14.9	V	0.49	11.18	26.57	13.43
680.0	85.00	6.9	H	0.61	9.60	17.11	22.89
680.0	85.00	12.8	V	0.61	10.30	23.71	16.29
680.0	99.00	7.7	V	0.65	11.50	19.85	23.65
680.0	99.00	12.5	H	0.65	10.68	23.83	19.67
680.0	233.20	15.3	V	0.97	11.42	27.69	18.31
680.0	233.20	20.2	H	0.97	11.66	32.83	13.17
680.0	436.00	6.8	V	1.24	16.22	24.26	21.74
680.0	436.00	8.7	H	1.24	16.68	26.62	19.38

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZR3100BD

REPORT: A\AudioTechnica_JFZ\2812AUT9\2812AUT9TestReport.doc

POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Part 15.107

Requirements:

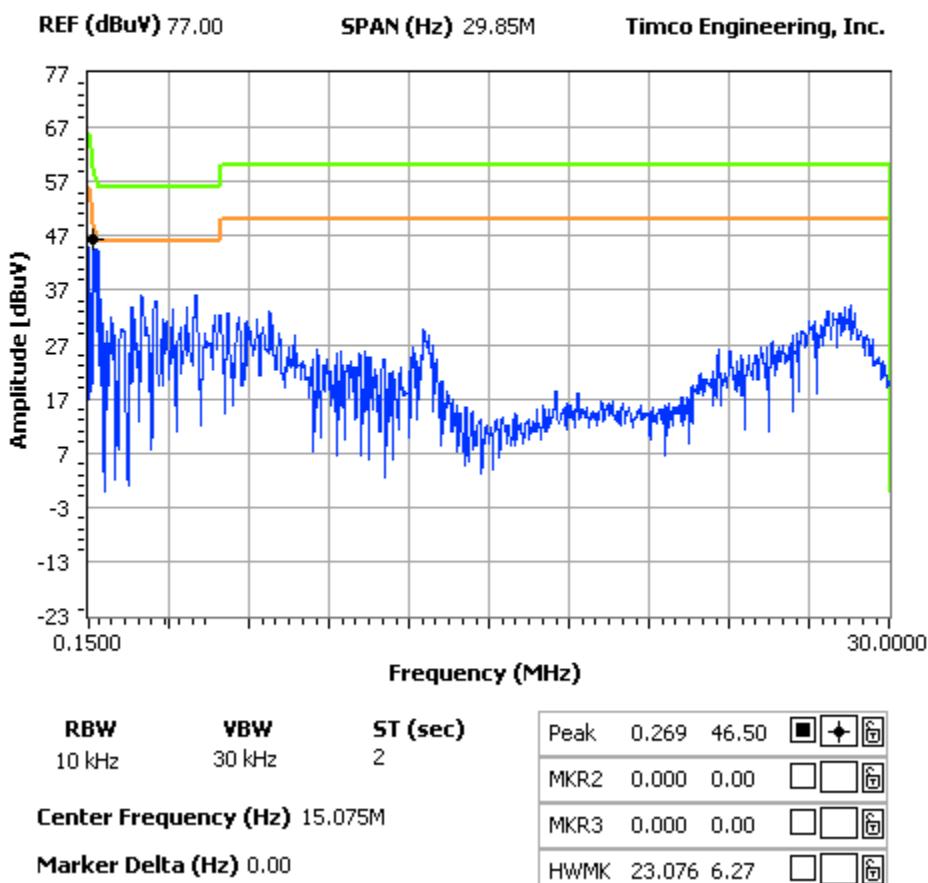
Frequency (MHz)	Quasi Peak Limits (dB μ V)	Average Limits (dB μ V)
0.15 – 0.5	66 – 56 *	56 – 46 *
0.5 – 5.0	56	46
5.0 – 30	60	50
* Decrease with logarithm of frequency		

Test Data: SEE PLOTS BELOW

APPLICANT: AUDIO TECHNICA CORPORATION
 FCC ID: JFZR3100BD
 REPORT: A\AudioTechnica_JFZ\2812AUT9\2812AUT9TestReport.doc

NOTES:

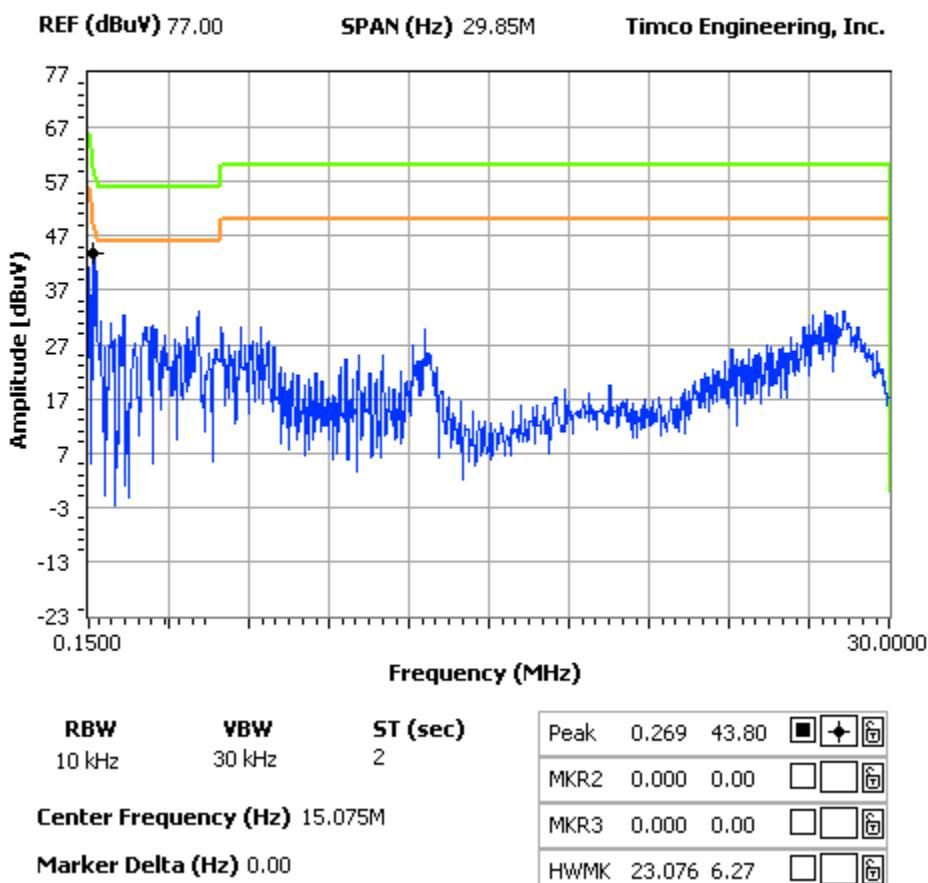
ac line conducted line 1

FCC 15.107 Mask Class B


APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZR3100BD
REPORT: A\AudioTechnica_JFZ\2812AUT9\2812AUT9TestReport.doc

NOTES:

ac line conducted line 2

FCC 15.107 Mask Class B


APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZR3100BD
REPORT: A\AudioTechnica_JFZ\2812AUT9\2812AUT9TestReport.doc

RADIATED EMISSIONS TEST SETUP PHOTO



APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZR3100BD

REPORT: A\AudioTechnica_JFZ\2812AUT9\2812AUT9TestReport.doc

CONDUCTED EMISSIONS TEST SETUP PHOTO



APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZR3100BD
REPORT: A:\AudioTechnica_JFZ\2812AUT9\2812AUT9TestReport.doc