



FCC Part 74H & ISED RSS-210 Test Report

APPLICANT	AUDIO-TECHNICA CORPORATION
ADDRESS	2-46-1 Nishi-Naruse, Machida Tokyo 194-8666 JAPAN
FCC ID	JFZT210B
IC	1752B-T210BD
MODEL NUMBER	ATW-T210bD
PRODUCT DESCRIPTION	BODY-PACK WIRELESS MICROPHONE TRANSMITTER
STANDARD APPLIED	CFR 47 Part 74
DATE SAMPLE RECEIVED	1/3/2020
DATE TESTED	1/21/2020
TESTED BY	Tim Royer
APPROVED BY	Franklin Rose
TEST RESULTS	☒ PASS ☐ FAIL

Report Number	Report Version	Description	Issue Date
411AUT20TestReport	Rev1	Initial Issue	6/2/2020
	Rev 2	Updated output power And how device satisfies KDB206256	6/10/2020

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.

This report relates only to the Equipment Under Test (EUT) sample(s) tested.

TABLE OF CONTENTS

GENERAL REMARKS.....	2
GENERAL INFORMATION	3
RESULTS SUMMARY	4
RF POWER OUTPUT	5
TEST DATA: MEAN OUTPUT POWER MEASUREMENT TABLE, FCC PART 74	6
TEST DATA: MEAN OUTPUT POWER MEASUREMENT TABLE, RSS-210 ANNEX G.....	6
OCCUPIED BANDWIDTH	7
TEST DATA: OPERATING BANDWIDTH MEASUREMENT TABLE, FCC PART 74	9
TEST DATA: OPERATING BANDWIDTH MEASUREMENT TABLE, RSS-210 ANNEX G.....	9
TEST DATA: 656.125 MHz 99% OBW PLOT	10
TEST DATA: 662.125 MHz 99% OBW PLOT	11
TEST DATA: 656.125 MHz EMISSION MASK PLOT.....	12
TEST DATA: 662.125 MHz EMISSION MASK PLOT.....	13
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	14
TEST DATA: 656.125 MHz, FCC PART 74	16
TEST DATA: 662.125 MHz, RSS-210 ANNEX G.....	17
FREQUENCY STABILITY	18
TEST DATA: MEASUREMENT TABLE	19
TEST DATA: MEASUREMENT GRAPH	20
STATEMENT OF MEASUREMENT UNCERTAINTY.....	21
EMC EQUIPMENT LIST	22

GENERAL REMARKS

Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- ☐ Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669
Designation #: US1070

Tested by:



Name and Title	Tim Royer, Project Manager / EMC Testing Engineer
Date	06/2/2020

Reviewed and Approved by:



Name and Title	Franklin Rose, Project Manager / EMC Testing Technician
Date	06/2/2020

GENERAL INFORMATION

EUT Description	BODY-PACK WIRELESS MICROPHONE TRANSMITTER
FCC ID	JFZT210BD
IC	1752B-T210BD
Model Number	ATW-T210bD
Operating Frequency	653-657 MHz Part 74 653-663 MHz RSS-210
Test Frequencies	656.125 MHz Part 74 662.125 MHz RSS-210 Note: The device is channelized, and testing frequencies were limited to only those frequencies available.
Modulation	FM
Maximum Deviation	±40kHz
EUT Power Source	☐ 110-120Vac/50- 60Hz
	☐ DC Power
	☒ Battery Operated Exclusively
Test Item	☐ Prototype
	☒ Pre-Production
	☐ Production
Type of Equipment	☐ Fixed
	☐ Mobile
	☒ Portable
Antenna Connector	n/a (integral antenna)
Test Conditions	The temperature was 26°C Relative humidity of 50%.
Modification to the EUT	A UFL connector was fitted for testing.
Test Exercise	Normal operation.
Applicable Standards	FCC CFR 47 Part 2, & 74, RSS-210, RSS-GEN KDB 971168 D01 V02R02, KDB 206256 ANSI/TIA 603-D:2010, ANSI C63.4 2014, ANSI C63.26 2015
Test Facility	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070, IC: 2056A

RESULTS SUMMARY

FCC Rule Part	ISED Rules Part	Requirement	Test Item	Result
2.1046(a), 74.861(e)(1)(ii)	RSS-210 Annex G.1 RSS-GEN	Conducted Power	RF Power Output	PASS
2.1049(c), 74.861(e)(5)	RSS-210 Annex G.2 RSS-GEN	Operating Bandwidth	Occupied Bandwidth	PASS
2.1049(c), 74.861(e)(7)	RSS-210 Annex G.4 RSS-GEN	Unwanted Emissions	Emission Mask	PASS
2.1053, 74.861(e)	RSS-210 Annex G.4 RSS-GEN	Unwanted Emissions	Field Strength of Spurious Emissions	PASS
2.1055, 74.861(e)(4)	RSS-210 Annex G.3 RSS-GEN	Frequency Tolerance	Frequency Stability	PASS

RF POWER OUTPUT

Rule Part No.: 2.1046(a), 74.861(e) (1)(ii), RSS-210

Requirement:

(e) For low power auxiliary stations operating in the 600 MHz duplex gap and the bands allocated for TV broadcasting, the following technical requirements apply:

(1) The power may not exceed the following values.

(i) 54-72, 76-88, and 174-216 MHz bands: 50 mW EIRP

(ii) 470-608 and 614-698: 250 mW conducted power

RSS-210 Annex G.1


The transmit power shall be measured in average value as a conducted emission over any period of continuous transmission.

The frequency bands, transmit e.i.r.p., authorized bandwidth and frequency stability limits for devices are provided in [table G1](#).

Frequency bands (MHz)	Transmit e.i.r.p. (mW)	Authorized bandwidth (kHz)	Frequency stability ($\pm$ ppm)
54-72 76-88 174-216	50	200	50
470-608	250	200	50
614-616 653-663	20	200	50

Procedure: KDB 971168 D01 Average Power Measurements section 5.2.1
TIA-603-E, 2.2.1

Setup Diagram:

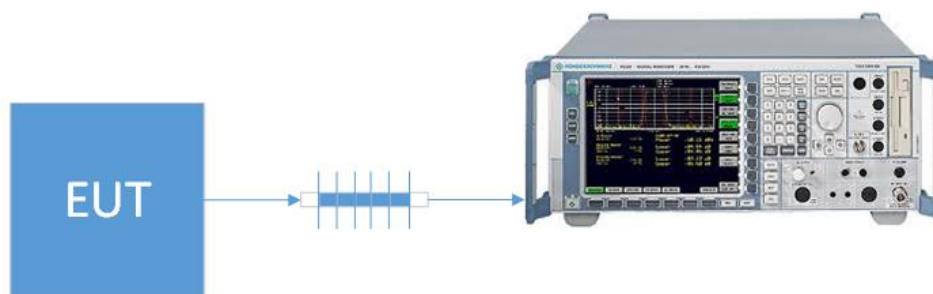

RF POWER OUTPUT

Test Data: Mean Output Power Measurement Table, FCC Part 74

Tuned Frequency (MHz)	Power Output		
	Level (dBm)	Level (mW)	Margin (mW)
656.1250	13.01	20.0	0.0

Test Data: Mean Output Power Measurement Table, RSS-210 Annex G

Tuned Frequency (MHz)	Power Output		
	Level (dBm)	Level (mW)	Margin (mW)
662.1250	13.01	20.0	0.0

Note: The device is factory-tuned to the rated power output.

Results Meet Requirements

OCCUPIED BANDWIDTH

Rule Part No.: 2.1049(c), 74.802(c)(2), 74.861(e)(5)(7), RSS-210

Requirement:

(e) For low power auxiliary stations operating in the 600 MHz duplex gap and the bands allocated for TV broadcasting, the following technical requirements apply:

(5) The operating bandwidth shall not exceed 200 kHz.

(7) Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter.


RSS-210 Annex G.2

Table G1 — Specifications for wireless microphones			
Frequency bands (MHz)	Transmit e.i.r.p. (mW)	Authorized bandwidth (kHz)	Frequency stability (± ppm)
54-72 76-88 174-216	50	200	50
470-608	250	200	50
614-616 653-663	20	200	50

G.2 Occupied bandwidth

The occupied bandwidth for wireless microphones shall not exceed the authorized bandwidth specified in [table G1](#) (above).

OCCUPIED BANDWIDTH

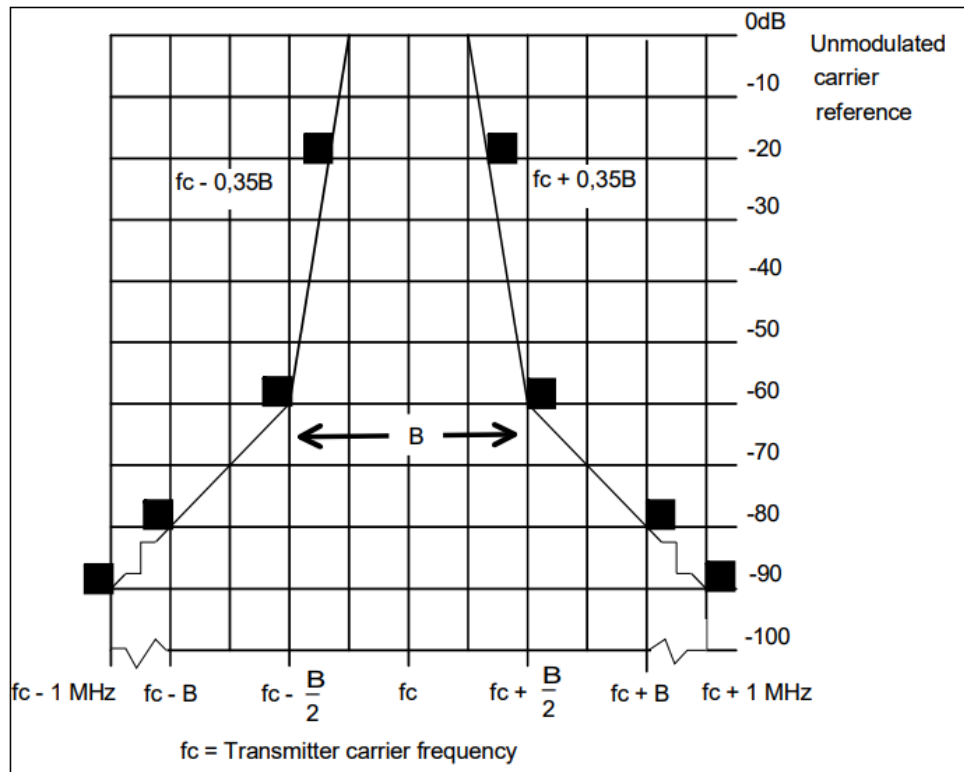


Procedure:

KDB 971168 D01 Power Bandwidth 99% section 4.2
 KDB 971168 D01 Spurious Emissions at antenna term section 6
 ANSI C63.26, 5.4.4 (using Test Setup from TIA 603-E 2.2.11, below)

OCCUPIED BANDWIDTH

Setup Diagram:

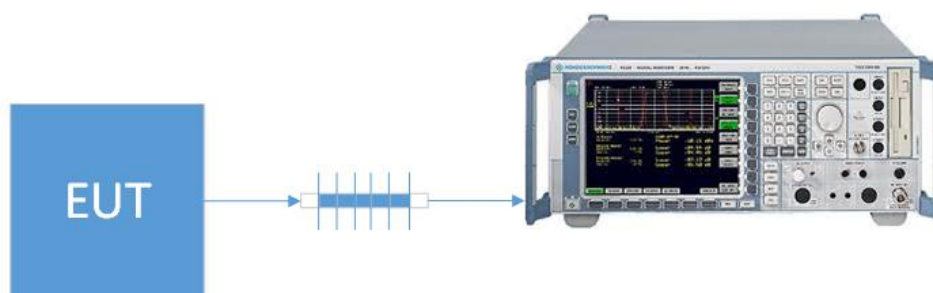

Test Data: Operating Bandwidth Measurement Table, FCC Part 74

Tuned Freq (MHz)	Measured 99% BW (KHz)	Margin (KHz)
656.125	90.5	109.5


Test Data: Operating Bandwidth Measurement Table, RSS-210 Annex G

Tuned Freq (MHz)	Measured 99% BW (KHz)	Margin (KHz)
662.125	91.42	108.58

Results Meet Requirements

OCCUPIED BANDWIDTH


Test Data: 656.125 MHz 99% OBW Plot

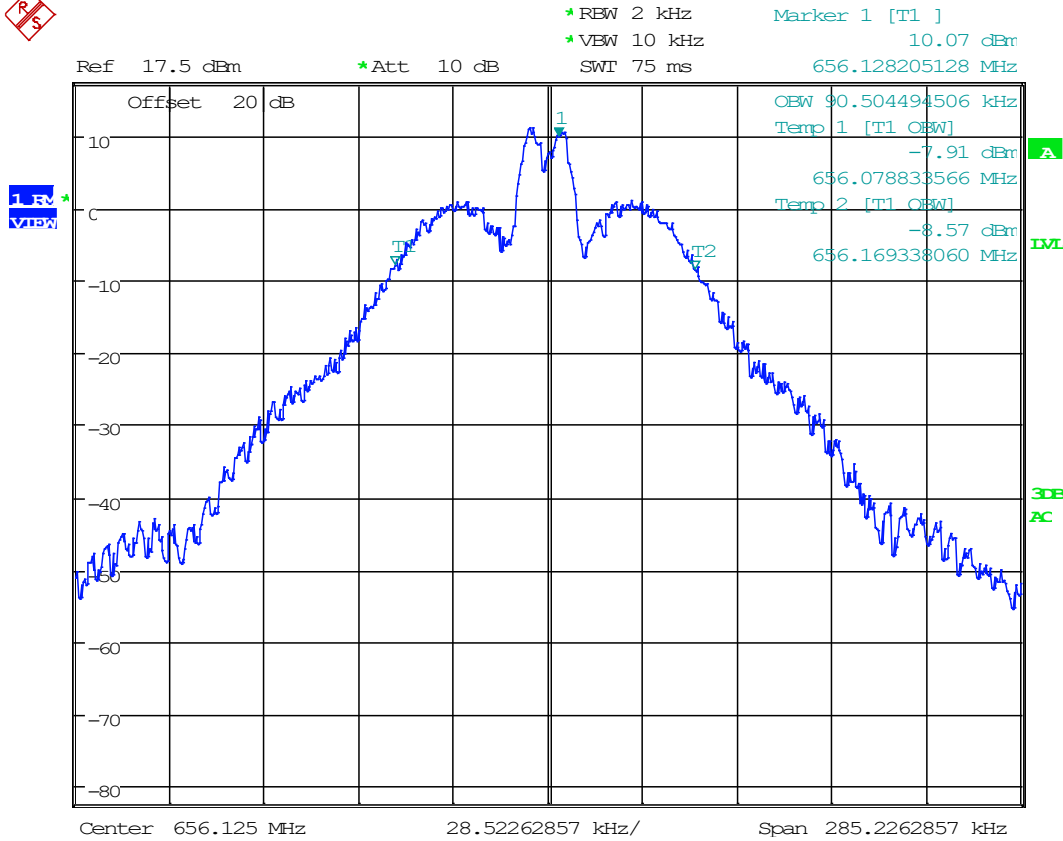

Date: 5.JUN.2020 18:07:53

OCCUPIED BANDWIDTH


Test Data: 662.125 MHz 99% OBW Plot

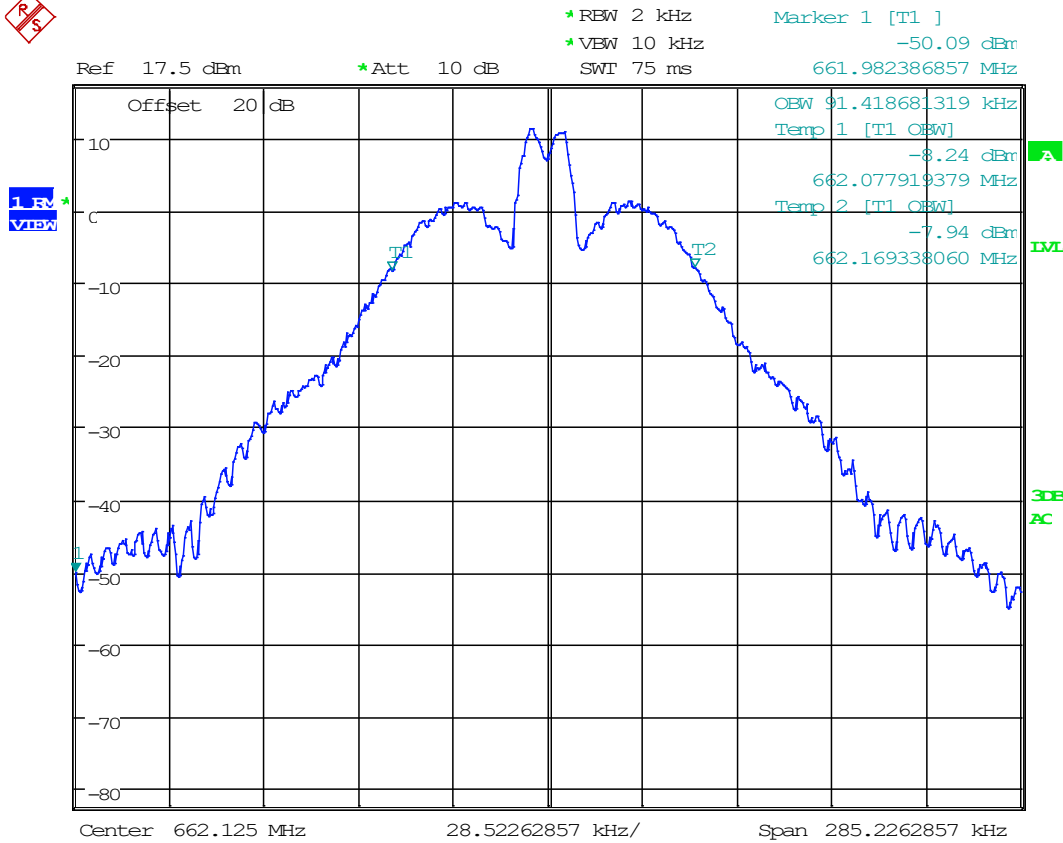

Date: 5.JUN.2020 18:11:20

OCCUPIED BANDWIDTH

Test Data: 656.125 MHz Emission Mask Plot

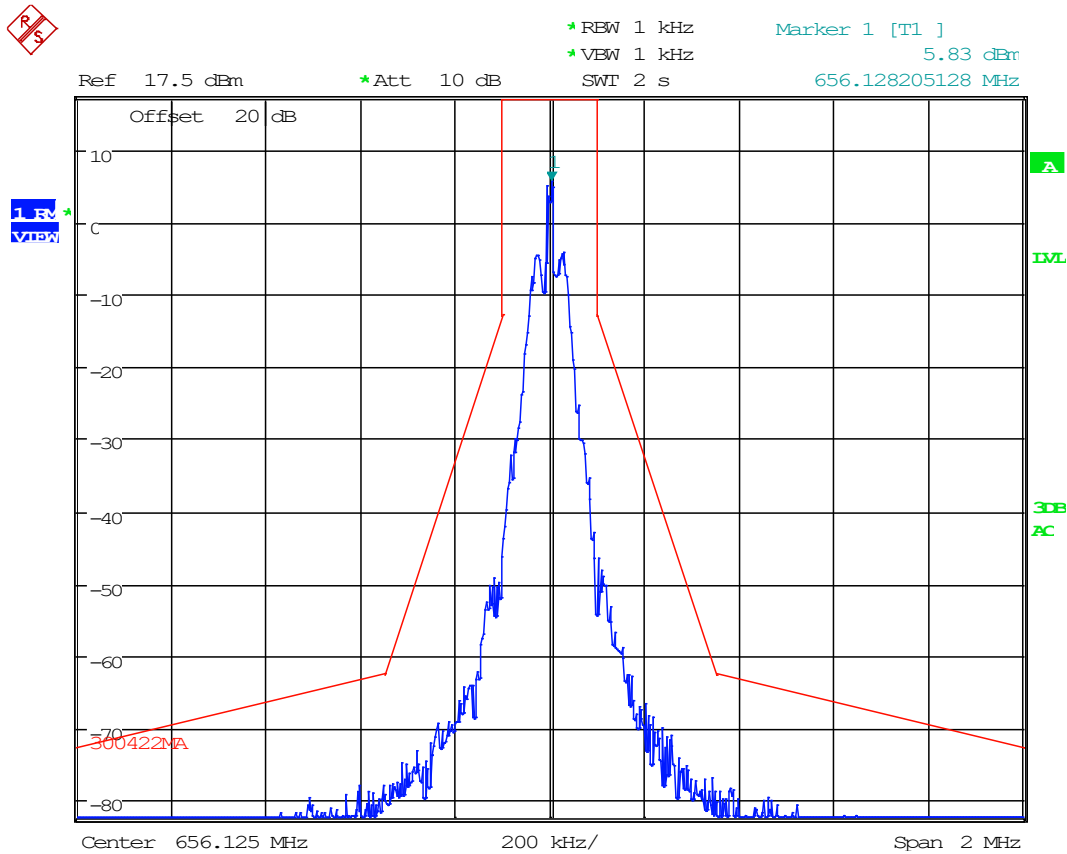

Date: 5.JUN.2020 18:07:22

FIELD STRENGTH OF SPURIOUS EMISSIONS

Rule Part No.: 2.1053, 74.861(8)(7), EN 300-422 v1.4.1 sec 8.4.3, RSS-210

Requirement:

(7) Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter.

RSS-210 Annex G.2

The transmitter unwanted emissions shall meet and be measured according to the requirements in sections 8.3 and 8.4 of ETSI EN 300 422-1.


Limits: ETSI EN 300 422-1 v1.4.2 Section 8.4.3, Table 3

State	Frequency		
	47 MHz to 74 MHz 87.5 MHz to 137 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies below 1 000 MHz	Frequencies above 1 000 MHz
Operation	4 nW	250 nW	1 µW
Standby	2 nW	2 nW	20 nW


Procedure: KDB 971168 D01 Spurious Emissions at antenna term section 7
ANSI C63.26, 5.5.4
ANSI C63.4 General Radiated Testing and Site Validation

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Site Setup:

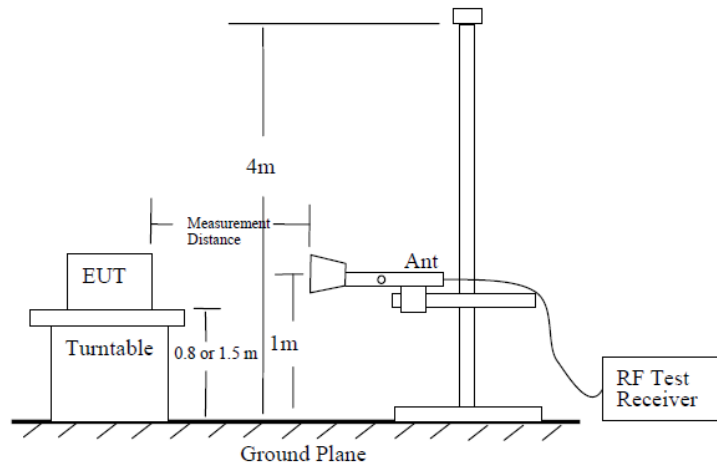

EUT Orientation(s):

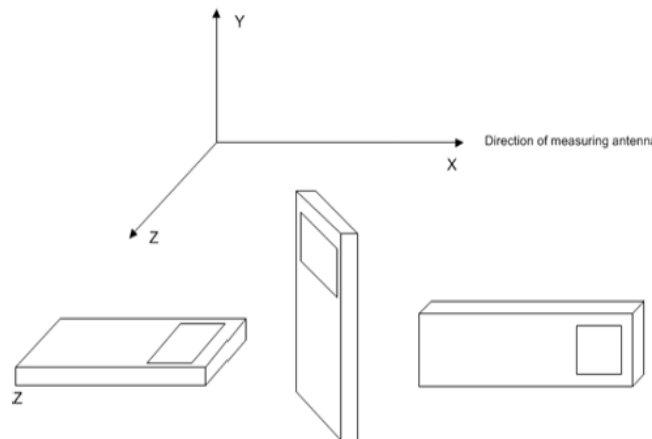

Note: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from the lowest frequency generated internally to at least the tenth harmonic of the fundamental. This test was conducted in accordance with the standard listed above using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669. The measurements below represent the worst case of all the frequencies tested.

Note: The six (6) highest emissions or more of each worst-case operational modes of the EUT are represented below. Emissions 20 dB below the limit are not required to be reported.

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: 656.125 MHz, FCC PART 74

Tuned Frequency (MHz)	Emission Frequency (MHz)	Meter Reading (dBμV)	Antenna Polarity	Coax Loss (dB)	Correction Factor (dB/m)	Field Strength (dBμV/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Margin (dB)	Limit
656.13	1312.30	15.23	H	4.15	28.70	48.08	3.00	48.08	-49.30	19.30	-30.00
656.13	1312.30	15.51	V	4.15	28.70	48.36	3.00	48.36	-49.02	19.02	-30.00
656.13	1968.40	14.70	V	5.13	31.31	51.14	3.00	51.14	-46.24	16.24	-30.00
656.13	1968.40	13.77	H	5.13	31.31	50.21	3.00	50.21	-47.17	17.17	-30.00
656.13	2624.50	19.06	H	5.84	32.41	57.31	3.00	57.31	-40.07	10.07	-30.00
656.13	2624.50	16.90	V	5.84	32.41	55.15	3.00	55.15	-42.23	12.23	-30.00
656.13	3280.70	14.58	V	6.67	32.65	53.90	3.00	53.90	-43.48	13.48	-30.00
656.13	3280.70	14.31	H	6.67	32.65	53.63	3.00	53.63	-43.75	13.75	-30.00
656.13	3936.80	17.92	H	6.99	33.33	58.24	3.00	58.24	-39.14	9.14	-30.00
656.13	3936.80	18.16	V	6.99	33.33	58.48	3.00	58.48	-38.90	8.90	-30.00
656.13	4592.90	20.11	V	7.50	34.05	61.66	3.00	61.66	-35.72	5.72	-30.00
656.13	4592.90	17.88	H	7.50	34.05	59.43	3.00	59.43	-37.95	7.95	-30.00
656.13	5249.00	16.51	H	7.96	34.28	58.75	3.00	58.75	-38.62	8.62	-30.00
656.13	5249.00	16.92	V	7.96	34.28	59.16	3.00	59.16	-38.21	8.21	-30.00
656.13	5905.20	17.67	V	8.48	35.02	61.17	3.00	61.17	-36.21	6.21	-30.00
656.13	5905.20	18.18	H	8.48	35.02	61.68	3.00	61.68	-35.70	5.70	-30.00
656.13	6561.30	18.34	H	9.12	35.58	63.04	3.00	63.04	-34.33	4.33	-30.00
656.13	6561.30	17.74	V	9.12	35.58	62.44	3.00	62.44	-34.93	4.93	-30.00

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: 662.125 MHz, RSS-210 Annex G

Tuned Frequency (MHz)	Emission Frequency (MHz)	Meter Reading (dBμV)	Antenna Polarity	Coax Loss (dB)	Correction Factor (dB/m)	Field Strength (dBμV/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Margin (dB)	Limit
662.13	1330.30	15.18	V	4.19	28.73	48.10	3.00	48.10	-49.27	19.27	-30.00
662.13	1330.30	13.62	H	4.19	28.73	46.54	3.00	46.54	-50.83	20.83	-30.00
662.13	1995.40	20.08	H	5.16	31.31	56.55	3.00	56.55	-40.82	10.82	-30.00
662.13	1995.40	17.13	V	5.16	31.31	53.60	3.00	53.60	-43.77	13.77	-30.00
662.13	2660.50	17.43	V	5.91	32.44	55.78	3.00	55.78	-41.60	11.60	-30.00
662.13	2660.50	16.48	H	5.91	32.44	54.83	3.00	54.83	-42.55	12.55	-30.00
662.13	3325.70	14.00	H	6.70	32.63	53.33	3.00	53.33	-44.05	14.05	-30.00
662.13	3325.70	14.51	V	6.70	32.63	53.84	3.00	53.84	-43.54	13.54	-30.00
662.13	3990.80	19.46	V	7.22	33.39	60.07	3.00	60.07	-37.31	7.31	-30.00
662.13	3990.80	16.26	H	7.22	33.39	56.87	3.00	56.87	-40.51	10.51	-30.00
662.13	4655.90	16.75	H	7.40	33.90	58.05	3.00	58.05	-39.32	9.32	-30.00
662.13	4655.90	15.12	V	7.40	33.90	56.42	3.00	56.42	-40.95	10.95	-30.00
662.13	5321.00	16.90	V	8.08	34.28	59.26	3.00	59.26	-38.12	8.12	-30.00
662.13	5321.00	19.29	H	8.08	34.28	61.65	3.00	61.65	-35.73	5.73	-30.00
662.13	5986.20	17.78	H	8.63	35.11	61.52	3.00	61.52	-35.85	5.85	-30.00
662.13	5986.20	17.96	V	8.63	35.11	61.70	3.00	61.70	-35.67	5.67	-30.00
662.13	6651.30	18.39	V	9.16	35.64	63.19	3.00	63.19	-34.18	4.18	-30.00
662.13	6651.30	19.75	H	9.16	35.64	64.55	3.00	64.55	-32.82	2.82	-30.00

FREQUENCY STABILITY

Rule Part No.: 2.1053, 74.861(e) (4), RSS-210

Requirement: The frequency tolerance of the transmitter shall be 0.005 percent.

RSS-210 Annex G.1

The transmit power shall be measured in average value as a conducted emission over any period of continuous transmission.

The frequency bands, transmit e.i.r.p., authorized bandwidth and frequency stability limits for devices are provided in [table G1](#).

Table G1 — Specifications for wireless microphones			
Frequency bands (MHz)	Transmit e.i.r.p. (mW)	Authorized bandwidth (kHz)	Frequency stability ($\pm$ ppm)
54-72 76-88 174-216	50	200	50
470-608	250	200	50
614-616 653-663	20	200	50

Procedure: KDB 971168 D01 Spurious Emissions at antenna term section 9
TIA 603-D Carrier Frequency Stability 2.2.2


FREQUENCY STABILITY

Test Data: Measurement Table

FCC Part 90 Limit	50.0	ppm	
FCC Part 90 Limit, as ppb	50000	ppb (Parts per Billion)	
FCC Part 90 Limit, as %	0.00500	%	
Strictest Combined Limit, as Hz	33106.122	Hz	
Combined Lower Limit	662.089324	MHz	
Combined Upper Limit	662.155536	MHz	
Rated Supply Voltage	3.0	☐ AC ☒ DC	
Temperature / Voltage Variation			
Temperature (°C)	Supplied Voltage (V)	Frequency (MHz)	Deviation (kHz)
-30	3.0	662.127270	-4.840
-20	3.0	662.126210	-3.780
-10	3.0	662.124400	-1.970
0	3.0	662.123060	-0.630
+10	3.0	662.122430	0.000
+20 (reference)	3.0	662.122430	0.000
+20	2.6	662.122420	0.010
+20	3.5	662.122410	0.020
+30	3.0	662.126450	-4.020
+40	3.0	662.130950	-8.520
+50	3.0	662.135140	-12.710

FREQUENCY STABILITY

Test Data: Measurement Graph

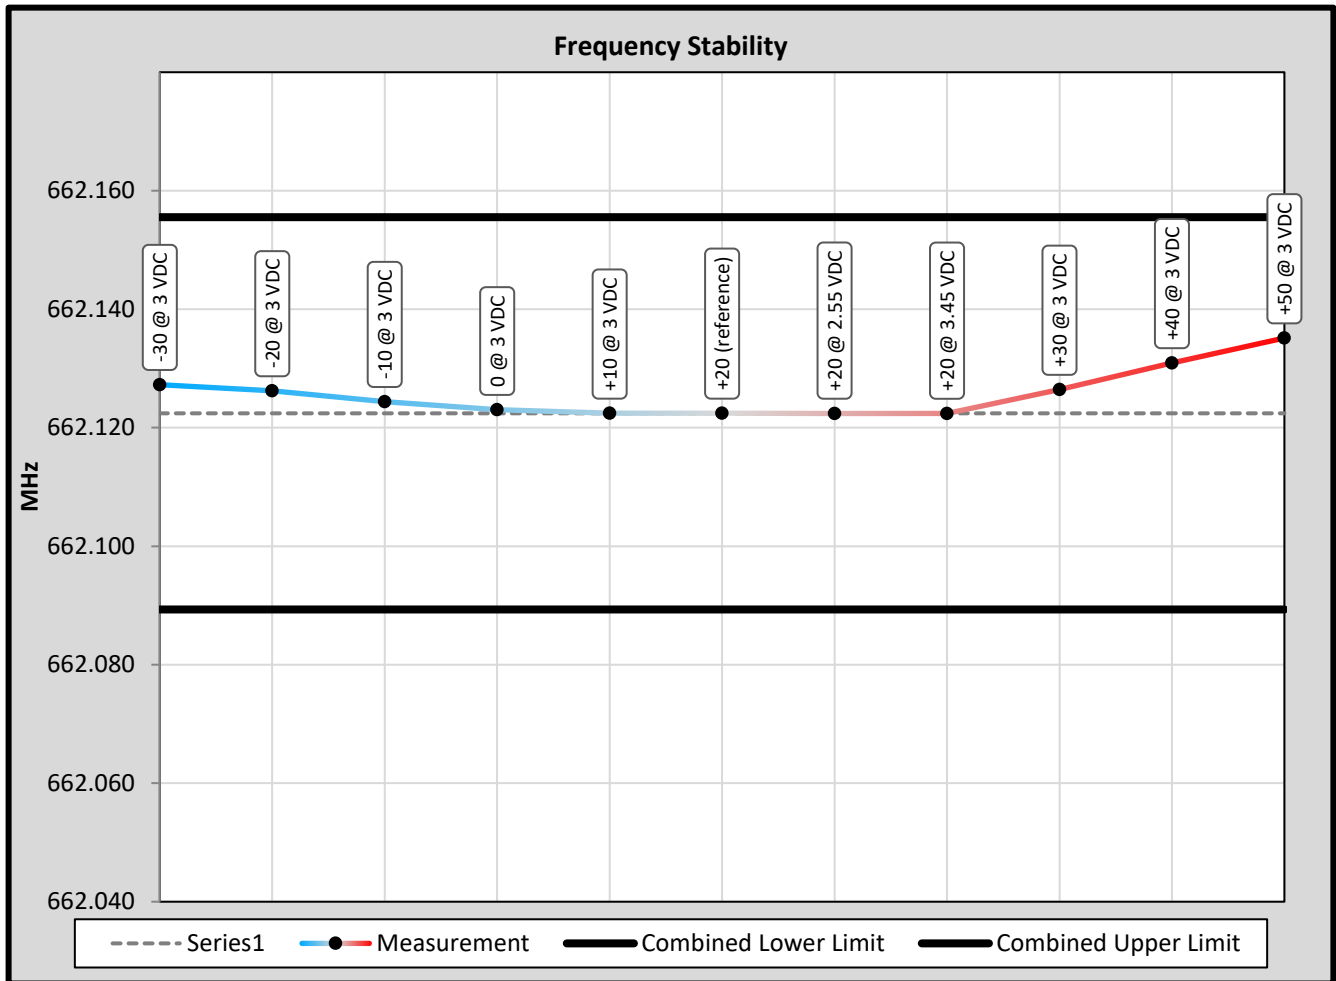

Results Meet Requirements

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4 or ENTR 100-028 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: “Uncertainty in EMC Measurements” and is documented in the Timco Engineering, Inc. quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Timco Engineering, Inc. is reported:

Test Items	Measurement Uncertainty	Notes
RF Frequency Accuracy	$\pm 49.5 \text{ Hz}$	(1)
RF Conducted Power	$\pm 0.93\text{dB}$	(1)
Conducted spurious emission of transmitter valid up to 40GHz	$\pm 1.86\text{dB}$	
Occupied Bandwidth	$\pm 2.65\%$	
Audio Frequency Response	$\pm 1.86\text{dB}$	
Modulation limiting	$\pm 1.88\%$	
Radiated RF Power	$\pm 1.4\text{dB}$	
Maximum frequency deviation: Within 300 Hz and 6kHz of audio freq.	$\pm 1.88\%$	
Within 6kHz and 25kHz of audio Freq.	$\pm 2.04\%$	
Rad Emissions Sub Meth up to 26.5GHz	$\pm 2.14\text{dB}$	
Adjacent channel power	$\pm 1.47\text{dB}$	(1)
Transient Frequency Response	$\pm 1.88\%$	
Temperature	$\pm 1.0^{\circ}\text{C}$	(1)
Humidity	$\pm 5.0\%$	

Notes: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

EMC EQUIPMENT LIST

Device	Manufacturer	Model	SN	Calibration Date	Cal Due Date
EMI Test Receiver R & S ESIB 40 firmware v 4.34.3 BIOS v3.3	Rohde & Schwarz	ESIB 40	100274	07/22/19	07/22/21
Software: Field Strength Program	Timco	N/A	Version 4.10.7.0	N/A	N/A
Coaxial Cable - Chamber 3 cable set (backup)	Micro-Coax	Chamber 3 cable set (backup)	KMKM-0244-02 KMKM-0670-01 KFKF-0197-00	02/27/19	02/27/21
CHAMBER	Panashield	3M	N/A	03/15/19	03/15/21
Antenna: Active Loop	ETS-Lindgren	6502	00062529	12/11/17	12/11/20
Antenna: Biconical 1096	Eaton	94455-1	1096	08/01/17	08/01/20
Antenna: Log-Periodic 1122	Electro-Metrics	LPA-25	1122	07/26/17	07/26/20
Ant: Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	01/30/17	01/30/20
Temperature Chamber LARGE	Tenney Engineering	TTRC	11717-7	N/A	N/A
Type K J Thermometer	Martel	303	080504494	11/06/17	11/06/20

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

END OF TEST REPORT