

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com



Test Report

Product Name: HANDHELD WIRELESS MICROPHONE

FCC ID: JFZT220D

Applicant:

**AUDIO TECHNICA CORPORATION
2206 NARUSE, MACHIDA
TOKYO, 194
JAPAN**

Date Receipt: OCTOBER 20, 2004

Date Tested: OCTOBER 27, 2004

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

REPORT #: A\AudioTechnica_JFZ\1723UT4\1723UT4TestReport.doc

COVER SHEET

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

TABLE OF CONTENTS LIST for Part 74

TEST REPORT CONTAINING:

PAGE 1.....GENERAL INFORMATION & TECHNICAL DESCRIPTION
PAGE 2.....TECHNICAL DESCRIPTION CONT.
 RF POWER OUTPUT
PAGE 3.....MODULATION CHARACTERISTICS
 AUDIO FREQUENCY RESPONSE
PAGE 4.....MODULATION LIMITING
PAGE 5-6.....OCCUPIED BANDWIDTH
PAGE 7.....RADIATED EMISSIONS TEST DATA
PAGE 8.....METHOD OF MEASURING RADIATED EMISSIONS
PAGE 9.....FREQUENCY STABILITY TEST DATA
PAGE 10-11....EQUIPMENT LIST

EXHIBITS INCLUDING:

CONFIDENTIALITY LETTER
BLOCK DIAGRAM
SCHEMATICS
PARTS LIST
LABEL SAMPLE
LABEL LOCATION
USERS MANUAL
EXTERNAL PHOTOGRAPHS
INTERNAL PHOTOGRAPHS
ALIGNMENT PROCEDURE
OPERATIONAL DESCRIPTION
TEST SET UP PHOTOGRAPH

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

REPORT #: A\AudioTechnica_JFZ\1723UT4\1723UT4TestReport.doc

TABLE OF CONTENTS

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

AUDIO TECHNICA CORPORATION
2206 NARUSE, MACHIDA
TOKYO, 194
JAPAN

2.1033 TECHNICAL DESCRIPTION

TECHNICAL DESCRIPTION

(c)(1) Maximum Output Power Rating: 1 Watt into 50 ohms resistive load.

(c)(3) Instruction book. The instruction manual is included in the exhibits.

(c)(4) Type of Emission: 126K0F3E

(c) (4) Type of Emission: 126K0F3E

$$\begin{aligned}
 B_n &= 2M + 2DK \\
 M &= 3 \text{ kHz} \\
 D &= 60 \text{ kHz} \\
 K &= 1 \\
 B_n &= 2(3k) + 2(60k)(1) = 126k
 \end{aligned}$$

74.861 (e)(5) ALLOWED AUTHORIZED BANDWIDTH = 200 kHz.

(c)(6) Frequency Range: 655-680 MHz

(c)(7) Power Range and Controls: UNIT has no controls.

(c)(9) DC Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY
High
V_{ce} = 3.0 VDC
I_{ce} = 0.317 A

Pin = 0.951 Watts

(c)(10) Tune-up procedure. The tune-up procedure is included in the exhibits.

(c)(11) Complete Circuit Diagrams: The circuit diagram and block diagram are included in the exhibits.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

REPORT #: A\AudioTechnica_JFZ\1723UT4\1723UT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1033(c)(12) Photo or Drawing of Label and sketch of location:
Please see the exhibits.

2.1033(c)(13) Photos of Equipment:
Please see the exhibits.

(c)(14) Description of all circuitry and devices provided
for determining and stabilizing frequency.

Description of any circuits or devices employed for
suppression of spurious radiation, for limiting
modulation, and for limiting power.

This circuitry is included in the exhibits.

Limiting Modulation:
The transmitter audio circuitry is contained in
IC101, IC102 and IC103.

Limiting Power:
There is no provision for limiting power.


(15) Digital modulation. This unit does not use digital
modulation.

2.1033(c)(16) The data required by 2.1046 through 2.1057 is
submitted below.

2.1046 **RF power output**
RF power measured is:

OUTPUT POWER: 0.008 WATTS ERP

R.F. POWER OUTPUT TEST PROCEDURE

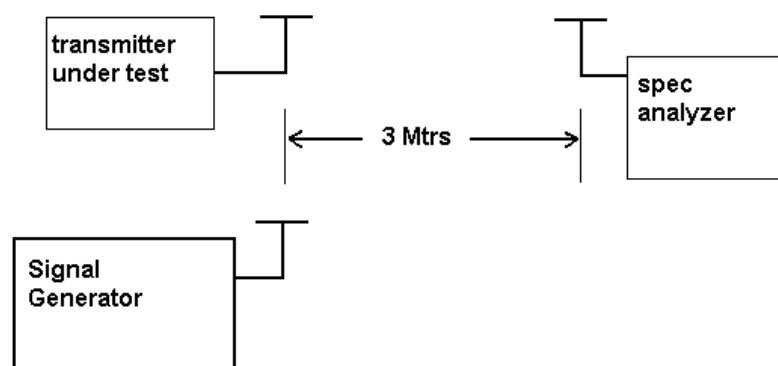

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

REPORT #: A\AudioTechnica_JFZ\1723UT4\1723UT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>


888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1047(a)(b)

Modulation characteristics:

AUDIO_FREQUENCY_RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown below.

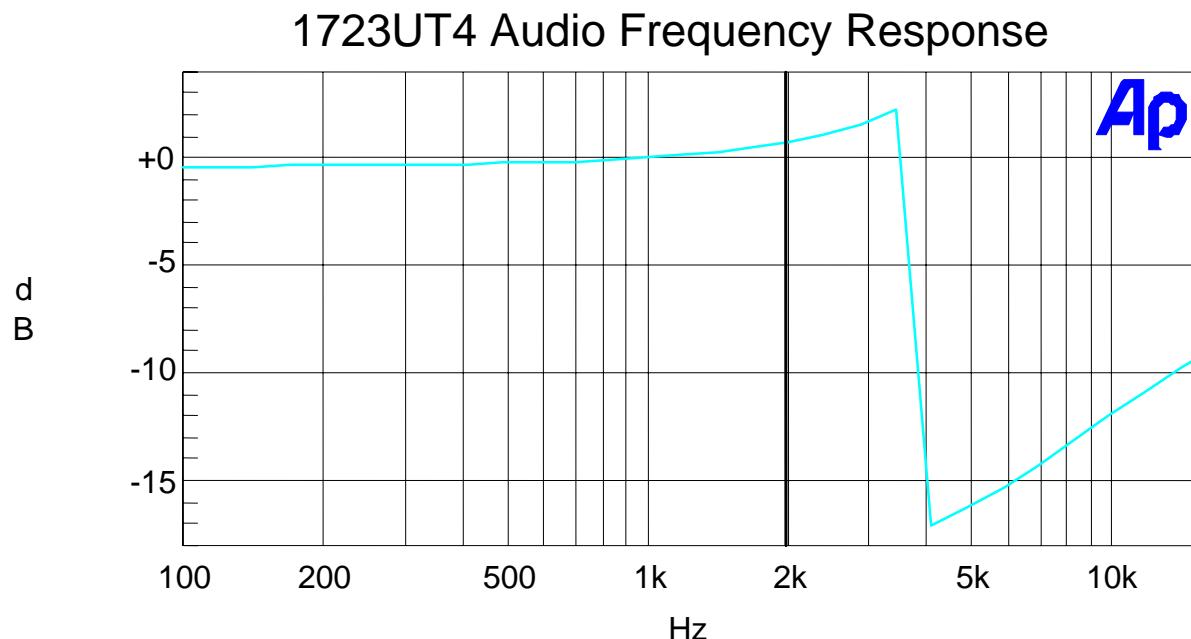

AUDIO_LOW_PASS_FILTER

The audio low pass filter is not required in this unit.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

REPORT #: A\AudioTechnica_JFZ\1723UT4\1723UT4TestReport.doc

Page 3 of 11

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>


888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1047(b)

Audio input versus modulation

A plot of the audio input versus deviation is shown in the following plots.

1723UT4 Modulation Limiting

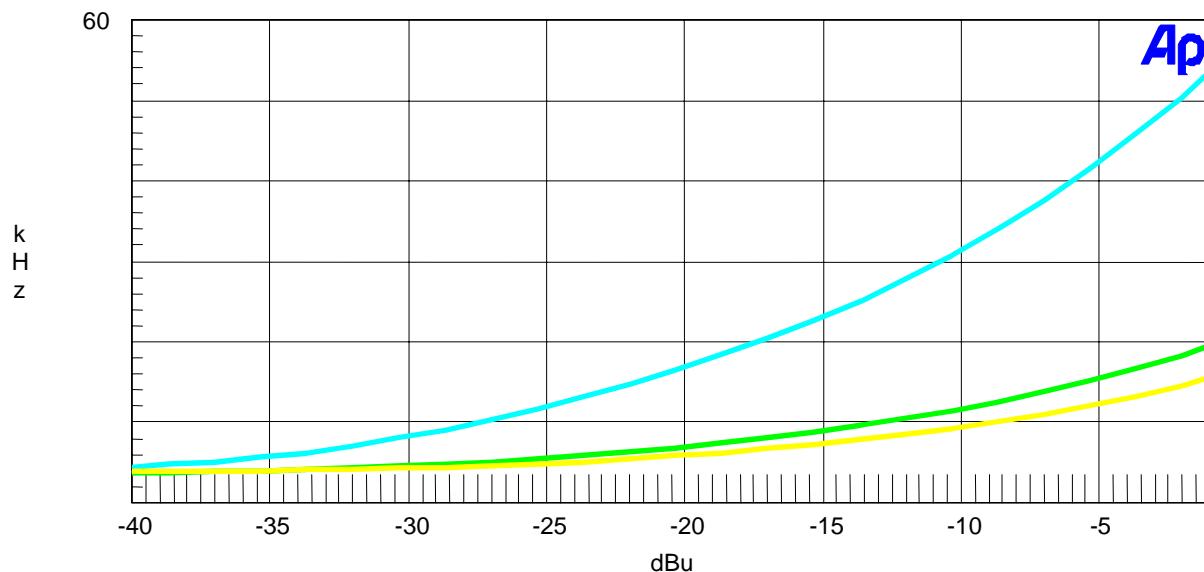

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

REPORT #: A\AudioTechnica_JFZ\1723UT4\1723UT4TestReport.doc

Page 4 of 11

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1049


Occupied bandwidth:

Data in the plots show that all sidebands between 50 & 100% for the authorized bandwidth are attenuated by at least 25dB. From 100 to 250% of the authorized bandwidth they are attenuated by at least 35 dB and beyond 250% $43 + \log(P_0)$ dB. The plot show the transmitter modulated with 15000 Hz(the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the un-modulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plots follow.

Microphone transmitter

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

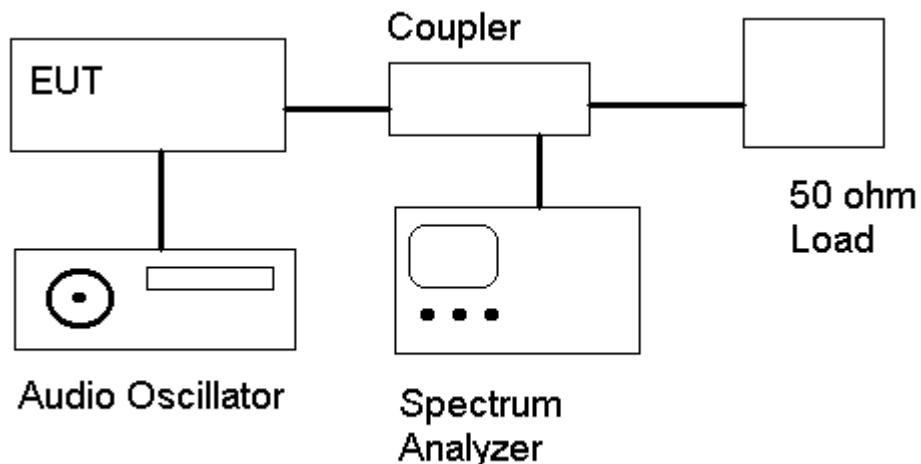

REQUIREMENT: 200kHz EMISSION BANDWIDTH

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

REPORT #: A\AudioTechnica_JFZ\1723UT4\1723UT4TestReport.doc

Page 5 of 11

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669


<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

OCCUPIED BANDWIDTH

NOTES:

1723ut4 occupied bandwidth

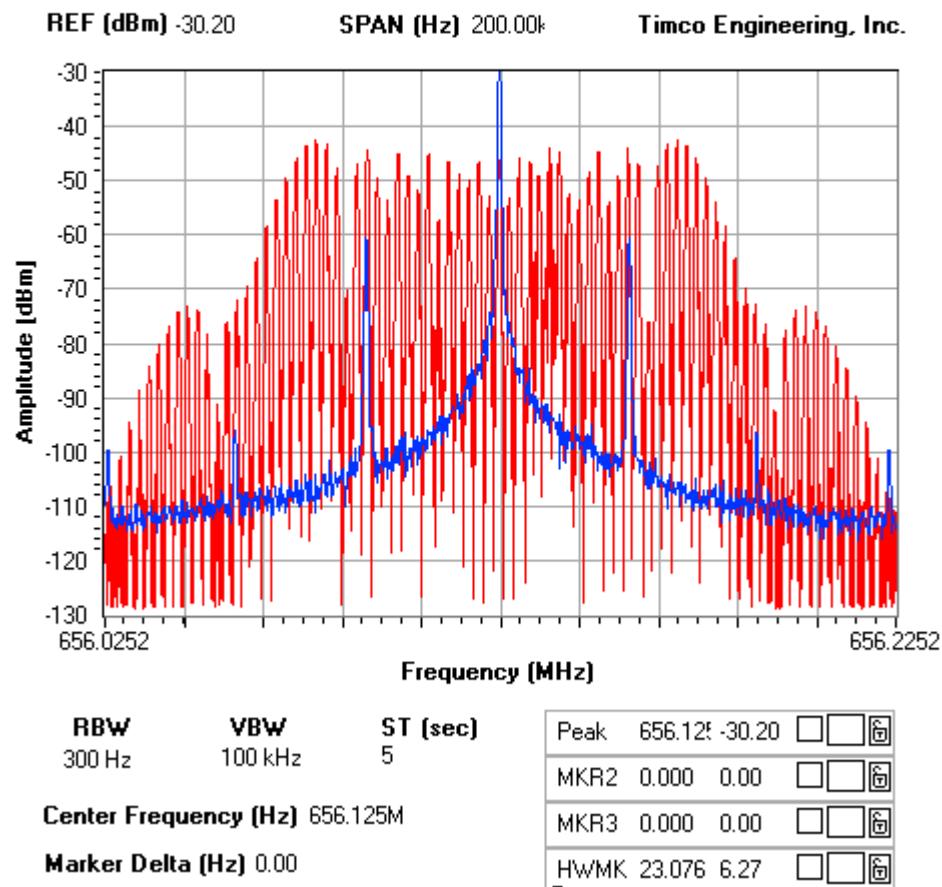

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

REPORT #: A\AudioTechnica_JFZ\1723UT4\1723UT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1051

Spurious emissions at antenna terminals (conducted):

Not Applicable no antenna connector.

2.1053(a)(b)

Field strength of spurious emissions:

NAME OF TEST:

RADIATED SPURIOUS EMISSIONS

REQUIREMENTS:

Emissions must be $43 + 10\log(P_0)$ dB below the mean power output of the transmitter.

$$43 + 10 \log(0.008) = 22.03 \text{ dB}$$

TEST DATA:

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 656.10 | V | 8.90 | 0 | -0.1 | 0 |
| 1312.20 | V | -49.80 | 1.06 | 4.2 | 55.46 |
| 1968.30 | V | -47.70 | 1.19 | 5.23 | 52.46 |
| 2624.40 | V | -53.70 | 1.31 | 6.95 | 56.86 |
| 3280.50 | V | -52.60 | 1.38 | 7.42 | 55.36 |
| 3936.60 | V | -35.50 | 1.44 | 7.55 | 38.19 |
| 4592.70 | V | -41.70 | 1.52 | 8.24 | 43.78 |
| 5248.80 | H | -60.70 | 1.65 | 8.05 | 63.1 |
| 5904.90 | V | -56.60 | 1.86 | 8.92 | 58.34 |
| 6561.10 | H | -58.90 | 1.96 | 8.95 | 60.71 |

TEST DATA:

| Emission Frequency MHz | Ant. Polarity | Corrected EUT Signal Reading | Coax Loss (dB) | Substitution Antenna (dBd) | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------------|----------------|----------------------------|------------------------|
| 678.40 | V | 8.90 | 0 | 0.06 | 0 |
| 1356.90 | V | -49.40 | 1.07 | 4.38 | 55.05 |
| 2035.40 | V | -53.50 | 1.21 | 5.36 | 58.31 |
| 2713.90 | V | -57.20 | 1.32 | 7.02 | 60.46 |
| 3392.40 | V | -55.40 | 1.39 | 7.49 | 58.26 |
| 4070.80 | V | -45.50 | 1.46 | 7.66 | 48.26 |
| 4749.30 | V | -52.20 | 1.56 | 8.05 | 54.67 |
| 5427.80 | H | -60.40 | 1.69 | 8.26 | 62.79 |
| 6106.30 | V | -54.00 | 1.91 | 8.99 | 55.88 |
| 6784.80 | H | -55.20 | 1.98 | 9.66 | 56.48 |

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

REPORT #: A\AudioTechnica_JFZ\1723UT4\1723UT4TestReport.doc

TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Method of Measuring Radiated Spurious Emissions

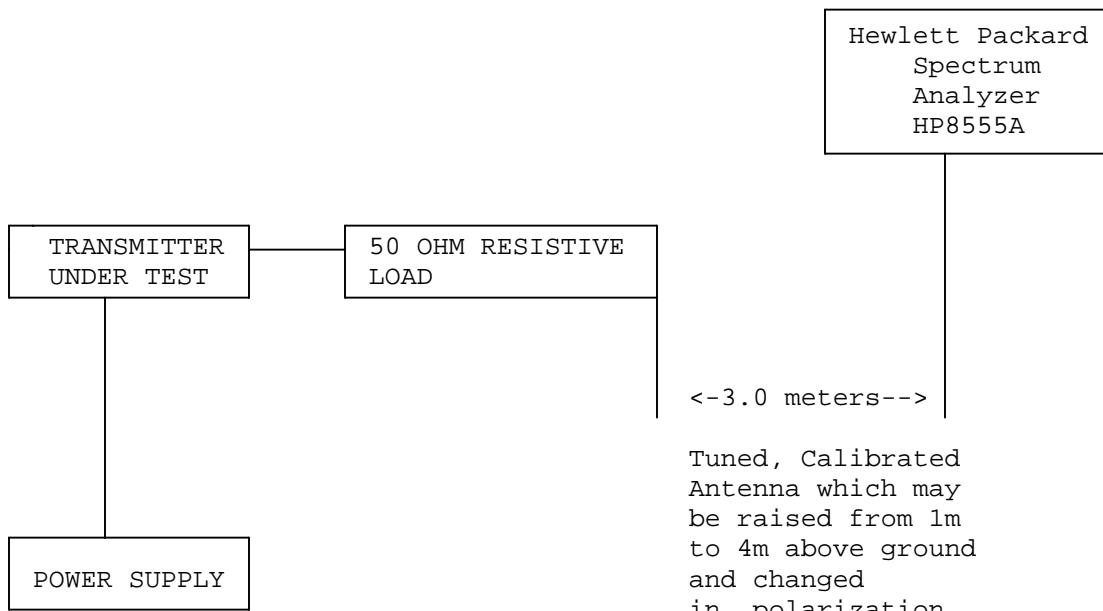

Equipment placed 80 cm above ground on a rotatable platform.

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 N.W. State Road 45, Newberry, FL 32669.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

REPORT #: A\AudioTechnica_JFZ\1723UT4\1723UT4TestReport.doc

Page 8 of 11

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1055 Frequency stability:
74.861(e)(4)

Temperature and voltage tests were performed to verify that the frequency remains within the .0050%,(50 ppm) (74.861 e.4) specification limit.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 656.125 294

| TEMPERATURE°C | FREQUENCY_MHz | PPM |
|----------------------|----------------------|------------|
| REFERENCE | 656.125 294 | |
| -30 | 656.125 18 | - 0.17 |
| -20 | 656.127 382 | + 3.18 |
| -10 | 656.128 23 | + 4.47 |
| 0 | 656.128 107 | + 4.29 |
| 10 | 656.127 300 | + 3.06 |
| 20 | 656.126 26 | + 1.47 |
| 30 | 656.125 294 | 0.00 |
| 40 | 656.124 705 | - 0.90 |
| 50 | 656.124 828 | - 0.71 |

Batt. Data **Batt. PPM**
656.125 287 - 0.01

RESULTS OF MEASUREMENTS: The test results indicates that the EUT meets the requirements.

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

REPORT #: A\AudioTechnica_JFZ\1723UT4\1723UT4TestReport.doc

Page 9 of 11

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

EMC Equipment List

| Device | Manufacturer | Model | Serial Number | Cal/Char Date | Due Date |
|--|-----------------|---------------|--------------------------|----------------|----------|
| 3/10-Meter OATS | TEI | N/A | N/A | Listed 3/27/04 | 3/26/07 |
| 3-Meter OATS | TEI | N/A | N/A | Listed 1/13/03 | 1/12/06 |
| AC Voltmeter | HP | 400FL | 2213A14499 | CAL 7/19/04 | 7/19/06 |
| Blue Tower Quasi-Peak Adapter | HP | 85650A | 2811A01279 | CAL 4/15/03 | 4/15/05 |
| Blue Tower RF Preselector | HP | 85685A | 2620A00294 | CAL 4/27/04 | 4/27/06 |
| Blue Tower Spectrum Analyzer | HP | 8568B | 2928A04729 2848A18049 | CAL 4/15/03 | 4/15/05 |
| Coaxial Cable #64 | Semflex Inc. | 60637 | Timco #64 | CHAR 1/24/02 | 1/24/04 |
| Dipole Antenna Kit | Electro-Metrics | TDA-30/1-4 | 152 | CAL 3/21/01 | 3/21/04 |
| Dipole Antenna Kit | Electro-Metrics | TDA-30/1-4 | 153 | CAL 9/26/02 | 9/26/05 |
| Frequency Counter | HP | 5385A | 2730A03025 | CAL 3/7/03 | 3/7/05 |
| Hygro-Thermometer | Extech | 445703 | 0602 | CAL 10/4/02 | 10/4/04 |
| Log-Periodic Antenna Measuring Tape-7.5M | Electro-Metrics | LPA-25 | 1122 | CAL 8/26/04 | 8/26/06 |
| Modulation Analyzer | Kraftixx | 7.5M PROFI | | CHAR 2/1/02 | 2/1/04 |
| Multimeter | HP | 8901A | 3435A06868 | CAL 9/5/01 | 9/5/03 |
| Silver Tower Preamplifier | HP | 8449B | 3008A01075 | CAL 3/22/04 | 3/22/06 |
| Silver Tower Quasi-Peak Adapter | HP | 85650A | 3303A01844 | CAL 3/22/04 | 3/22/06 |
| Silver Tower RF Preselector | HP | 85685A | 2926A00983 | CAL 3/22/04 | 3/22/06 |
| Silver Tower Spectrum Analyzer | HP | 8566B Opt 462 | 3552A22064 3638A08608 | CAL 3/22/04 | 3/22/06 |
| System One | Audio Precision | System One | SYS1-45868 | CHAR 4/25/02 | 4/25/04 |

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

REPORT #: A\AudioTechnica_JFZ\1723UT4\1723UT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

| | | | | | |
|--------------|-------------|-----------|------------|-------------|---------|
| Tan Tower | HP | 8449B-H02 | 3008A00372 | CAL 9/23/03 | 9/23/05 |
| Preamplifier | | | | | |
| Tan Tower | HP | 85650A | 3303A01690 | CAL 9/23/03 | 9/23/05 |
| Quasi-Peak | | | | | |
| Adapter | | | | | |
| Tan Tower RF | HP | 85685A | 3221A01400 | CAL 9/23/03 | 9/23/05 |
| Preselector | | | | | |
| Tan Tower | HP | 8566B Opt | 3138A07786 | CAL 9/23/03 | 9/23/05 |
| Spectrum | | 462 | 3144A20661 | | |
| Analyzer | | | | | |
| Temperature | Tenney | TTRC | 11717-7 | CHAR | 1/22/04 |
| Chamber | Engineering | | | 1/22/02 | |

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZT220D

REPORT #: A\AudioTechnica_JFZ\1723UT4\1723UT4TestReport.doc

Page 11 of 11