

# FCC Test Report

Product Name	Fixed Computer
Model No.	Z-7212,Z-7212(WOC),Z-7210
FCC ID.	JNF-Z-721x

Applicant	ZEBEX INDUSTRIES INC.
Address	B1F.-1, No. 207, Sec. 3, Beixin Rd., Xindian Dist,New Taipei City 23143, TAIWAN

Date of Receipt	Apr. 15, 2016
Issued Date	May 03, 2016
Report No.	1640343R-RFUSP01V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

# Test Report

Issued Date: May 03, 2016

Report No.: 1640343R-RFUSP01V00



Product Name	Fixed Computer
Applicant	ZEBEX INDUSTRIES INC.
Address	B1F.-1, No. 207, Sec. 3, Beixin Rd., Xindian Dist, New Taipei City 23143, TAIWAN
Manufacturer	ZEBEX INDUSTRIES INC.
Model No.	Z-7212,Z-7212(WOC),Z-7210
FCC ID.	JNF-Z-721x
EUT Rated Voltage	AC 100-240V, 50-60Hz
EUT Test Voltage	AC 120V/60Hz
Trade Name	ZEBEX
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2016 ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



( Senior Adm. Specialist / Joanne Lin )

Tested By :



( Engineer / Eason Chen )

Approved By :



( Director / Vincent Lin )

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. EUT Description.....	5
1.2. Operational Description.....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System .....	8
1.5. EUT Exercise Software .....	8
1.6. Test Facility .....	9
<b>2. CONDUCTED EMISSION .....</b>	<b>10</b>
2.1. Test Equipment.....	10
2.2. Test Setup .....	10
2.3. Limits.....	11
2.4. Test Procedure .....	11
2.5. Uncertainty .....	11
2.6. Test Result of Conducted Emission.....	12
<b>3. PEAK POWER OUTPUT .....</b>	<b>14</b>
3.1. Test Equipment.....	14
3.2. Test Setup .....	14
3.3. Limit .....	14
3.4. Test Procedure .....	14
3.5. Uncertainty .....	14
3.6. Test Result of Peak Power Output.....	15
<b>4. RADIATED EMISSION .....</b>	<b>17</b>
4.1. Test Equipment.....	17
4.2. Test Setup .....	17
4.3. Limits.....	18
4.4. Test Procedure .....	19
4.5. Uncertainty .....	20
4.6. Test Result of Radiated Emission.....	21
<b>5. RF ANTENNA CONDUCTED TEST .....</b>	<b>29</b>
5.1. Test Equipment.....	29
5.2. Test Setup .....	29
5.3. Limits.....	29
5.4. Test Procedure .....	29
5.5. Uncertainty .....	29
5.6. Test Result of RF Antenna Conducted Test.....	30
<b>6. BAND EDGE .....</b>	<b>32</b>
6.1. Test Equipment.....	32
6.2. Test Setup .....	32
6.3. Limit .....	33
6.4. Test Procedure .....	33
6.5. Uncertainty .....	33

6.6.	Test Result of Band Edge .....	34
<b>7.</b>	<b>CHANNEL NUMBER.....</b>	<b>50</b>
7.1.	Test Equipment .....	50
7.2.	Test Setup .....	50
7.3.	Limit .....	50
7.4.	Test Procedure .....	50
7.5.	Uncertainty .....	50
7.6.	Test Result of Channel Number.....	51
<b>8.</b>	<b>CHANNEL SEPARATION.....</b>	<b>53</b>
8.1.	Test Equipment .....	53
8.2.	Test Setup .....	53
8.3.	Limit .....	53
8.4.	Test Procedure .....	53
8.5.	Uncertainty .....	53
8.6.	Test Result of Channel Separation.....	54
<b>9.</b>	<b>DWELL TIME.....</b>	<b>58</b>
9.1.	Test Equipment .....	58
9.2.	Test Setup .....	58
9.3.	Limit .....	58
9.4.	Test Procedure .....	58
9.5.	Uncertainty .....	58
9.6.	Test Result of Dwell Time .....	59
<b>10.</b>	<b>OCCUPIED BANDWIDTH .....</b>	<b>63</b>
10.1.	Test Equipment .....	63
10.2.	Test Setup .....	63
10.3.	Limits.....	63
10.4.	Test Procedure .....	63
10.5.	Uncertainty .....	63
10.6.	Test Result of Occupied Bandwidth .....	64
<b>11.</b>	<b>EMI REDUCTION METHOD DURING COMPLIANCE TESTING .....</b>	<b>68</b>

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

**1. GENERAL INFORMATION**

**1.1. EUT Description**

Product Name	Fixed Computer
Trade Name	ZEBEX
Model No.	Z-7212,Z-7212(WOC),Z-7210
FCC ID.	JNF-Z-721x
Frequency Range	2402-2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / $\pi$ /4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	Printed on PCB Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
Power Cable	Shielded, 1.8m
Power Adapter	MFR: FSP GROUP INC., M/N: FSP050-DIBAN2 Input: AC 100-240V~1.5A, 50-60Hz Output: 12.0V $\equiv$ 4.16A Cable Out: Non-Shielded, 1.8m, with one ferrite core bonded.

**Antenna List**

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	ASKEY	TBTS-710 2.4G TBTS-710 5G	Printed on PCB	3.8dBi for 2.4 GHz

Note: The antenna of EUT conforms to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is a Fixed Computer with a built-in WLAN \ Bluetooth transceiver, this report for Bluetooth.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. Bluetooth operation was evaluated at both 1Mb/s and 3Mb/s data rates. 2Mb/s data rate was found, through pre-testing, to produce emissions similar to those for 3Mb/s.
5. The different of each model is shown as below:

Z-7212	Z-7212(WOC)	Z-7210
With 2D & With Camera	2D & w/o Camera	w/o 2D & w/o Camera
Fixed Computer	Fixed Computer	Fixed Computer

Test Mode	Mode 1: Transmit - 1Mbps (GFSK) Mode 2: Transmit - 3Mbps (8DPSK)
-----------	---


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 LCD Monitor	DELL	ST2320Lf	CN-0M2nn6-72872-22I-CA 1S	N/A
2 Notebook PC	DELL	Latitude E5440	FS9TK32	Non-Shielded, 0.8m
3 iPod nano	Apple	A1199	YM7089U5VQ5	N/A
4 iPod nano	Apple	A1199	YM706L7GVQ5	N/A
5 Microphone & Earphone	Ergotech	ET-E201	N/A	N/A
6 Modem	ACEEX	DM-1414	0102027550	Non-Shielded, 1.8m

Signal Cable Type	Signal cable Description
A HDMI Cable	Non-Shielded, 1.2m
B Micro USB to USB Cable	Non-Shielded, 0.6m, with one ferrite core bonded.
C USB Cable	Shielded, 1.2m
D Microphone & Earphone Cable	Non-Shielded, 1.5m
E Modem Cable	Shielded, 1.5m

### 1.4. Configuration of Tested System

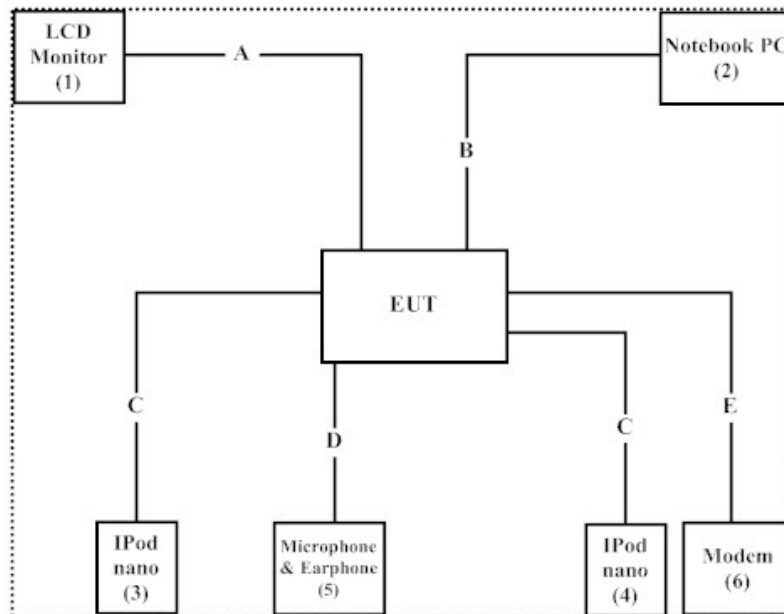

### 1.5. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute software “Microsoft Excel v2003” on the EUT.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

**1.6. Test Facility**

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation’s Web Site: <http://www.quietek.com/chinese/about/certificates.aspx?bval=5>  
 The address and introduction of Quietek Corporation’s laboratories can be founded in our Web site: <http://www.quietek.com/>

Site Description: File on  
 Federal Communications Commission  
 FCC Engineering Laboratory  
 7435 Oakland Mills Road  
 Columbia, MD 21046  
 Registration Number: 92195

Site Name: Quietek Corporation  
 Site Address: No.5-22, Ruishukeng,  
 Linkou Dist. New Taipei City 24451,  
 Taiwan, R.O.C.  
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789  
 E-Mail : [service@quietek.com](mailto:service@quietek.com)

FCC Accreditation Number: TW1014



## 2. Conducted Emission


### 2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2015	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2016	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2016	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar., 2016	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2016	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

### 2.2. Test Setup

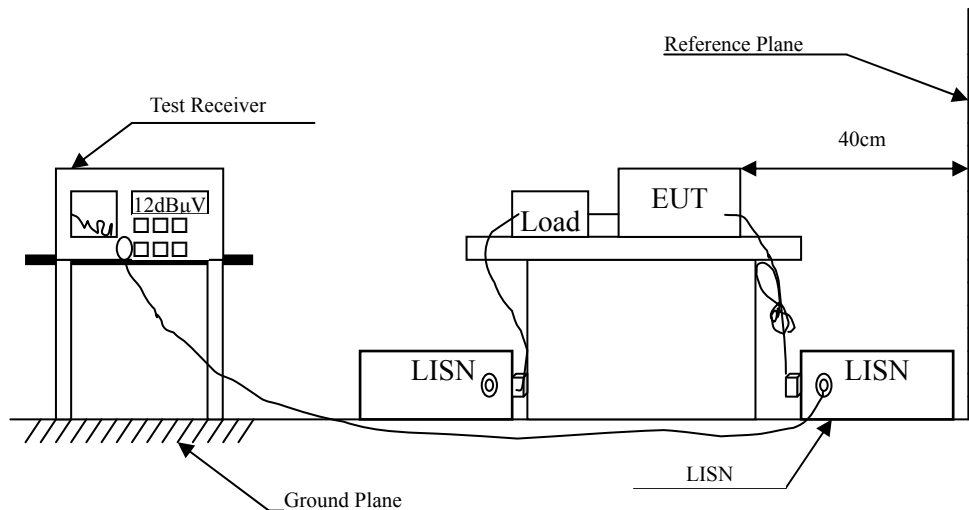

**2.3. Limits**

<b>FCC Part 15 Subpart C Paragraph 15.207 (dBµV) Limit</b>		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

**2.4. Test Procedure**

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

**2.5. Uncertainty**

± 2.26 dB

**2.6. Test Result of Conducted Emission**

Product : Fixed Computer  
 Test Item : Conducted Emission Test  
 Power Line : Line 1  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBµV	Measurement Level dBµV	Margin dB	Limit dBµV
<b>LINE 1</b>					
<b>Quasi-Peak</b>					
0.162	9.781	36.980	46.761	-18.896	65.657
0.271	9.780	22.190	31.970	-30.573	62.543
0.634	9.798	16.370	26.168	-29.832	56.000
1.150	9.848	17.310	27.158	-28.842	56.000
2.845	9.952	9.560	19.512	-36.488	56.000
15.994	10.165	20.350	30.515	-29.485	60.000
<b>Average</b>					
0.162	9.781	20.870	30.651	-25.006	55.657
0.271	9.780	7.790	17.570	-34.973	52.543
0.634	9.798	6.530	16.328	-29.672	46.000
1.150	9.848	10.450	20.298	-25.702	46.000
2.845	9.952	-0.560	9.392	-36.608	46.000
15.994	10.165	12.360	22.525	-27.475	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Fixed Computer  
 Test Item : Conducted Emission Test  
 Power Line : Line 2  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV	Margin dB	Limit dBμV
<b>LINE 2</b>					
<b>Quasi-Peak</b>					
0.166	9.832	34.040	43.872	-21.671	65.543
0.216	9.836	29.290	39.126	-24.988	64.114
0.255	9.839	25.000	34.839	-28.161	63.000
0.455	9.854	20.700	30.554	-26.732	57.286
1.134	9.907	15.840	25.747	-30.253	56.000
16.349	10.319	16.220	26.539	-33.461	60.000
<b>Average</b>					
0.166	9.832	15.010	24.842	-30.701	55.543
0.216	9.836	13.110	22.946	-31.168	54.114
0.255	9.839	9.760	19.599	-33.401	53.000
0.455	9.854	12.640	22.494	-24.792	47.286
1.134	9.907	9.000	18.907	-27.093	46.000
16.349	10.319	6.840	17.159	-32.841	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor


**3. Peak Power Output**

**3.1. Test Equipment**

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2016
X	Power Sensor	Anritsu	MA2411B/0738448	Jun., 2015

Note: 1. All equipments are calibrated every one year.  
 2. The test instruments marked by “X” are used to measure the final test results.

**3.2. Test Setup**

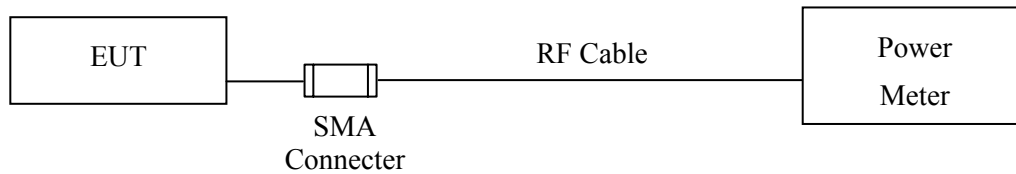

**3.3. Limit**

The maximum peak power shall be less 1Watt.

**3.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

**3.5. Uncertainty**

± 1.27 dB

**3.6. Test Result of Peak Power Output**

Product : Fixed Computer  
 Test Item : Peak Power Output  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	0.29	1 Watt= 30 dBm	Pass
Channel 39	2441.00	1.15	1 Watt= 30 dBm	Pass
Channel 78	2480.00	1.66	1 Watt= 30 dBm	Pass

Product : Fixed Computer  
 Test Item : Peak Power Output  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	-0.55	1 Watt= 30 dBm	Pass
Channel 39	2441.00	0.08	1 Watt= 30 dBm	Pass
Channel 78	2480.00	0.85	1 Watt= 30 dBm	Pass

#### 4. Radiated Emission

##### 4.1. Test Equipment

The following test equipments are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Magnetic Loop Antenna	Teseq	HLA6121/ 37133	Sep., 2015
	X	Bilog Antenna	Schaffner Chase	CBL6112B/ 2707	Jun., 2015
	X	EMI Test Receiver	R&S	ESCS 30/838251/ 001	Jun., 2015
	X	Coaxial Cable	QTK(Arnist)	RG 214/ LC003-RG	Jun., 2015
	X	Coaxial signal switch	Arnist	MP59B/ 6200798682	Jun., 2015


Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct., 2015
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar., 2016
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan., 2016
	X	Horn Antenna	TRC	AH-0801/95051	Aug., 2015
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan., 2016
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul., 2015
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul., 2015

- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
  2. The test instruments marked with "X" are used to measure the final test results.




4.2. Test Setup

sBelow 1GHz

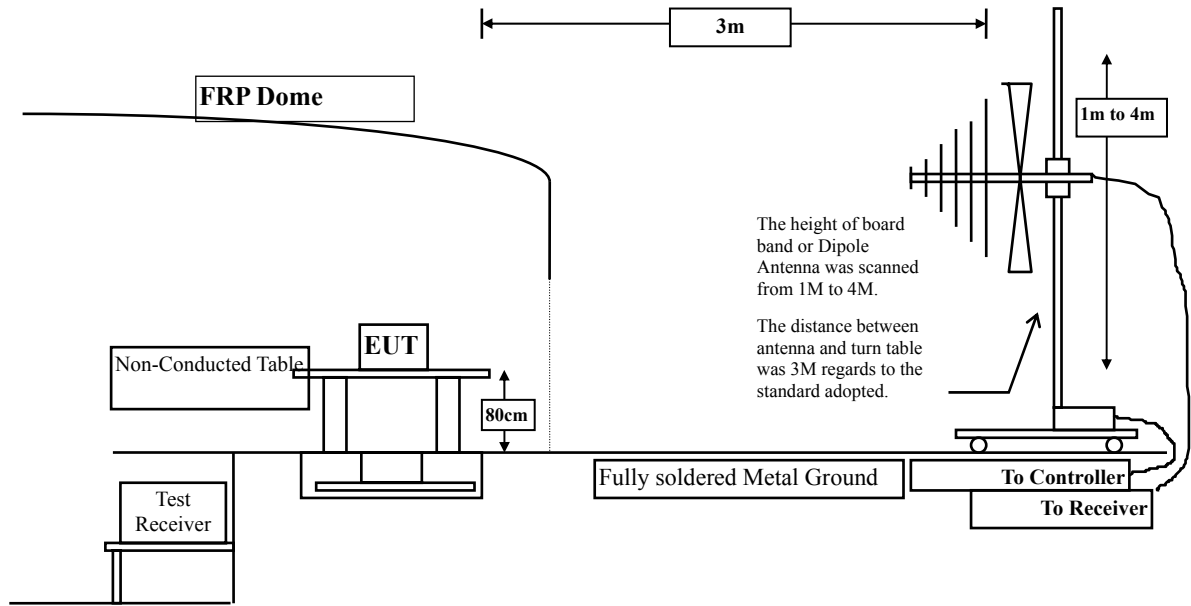

Above 1GHz

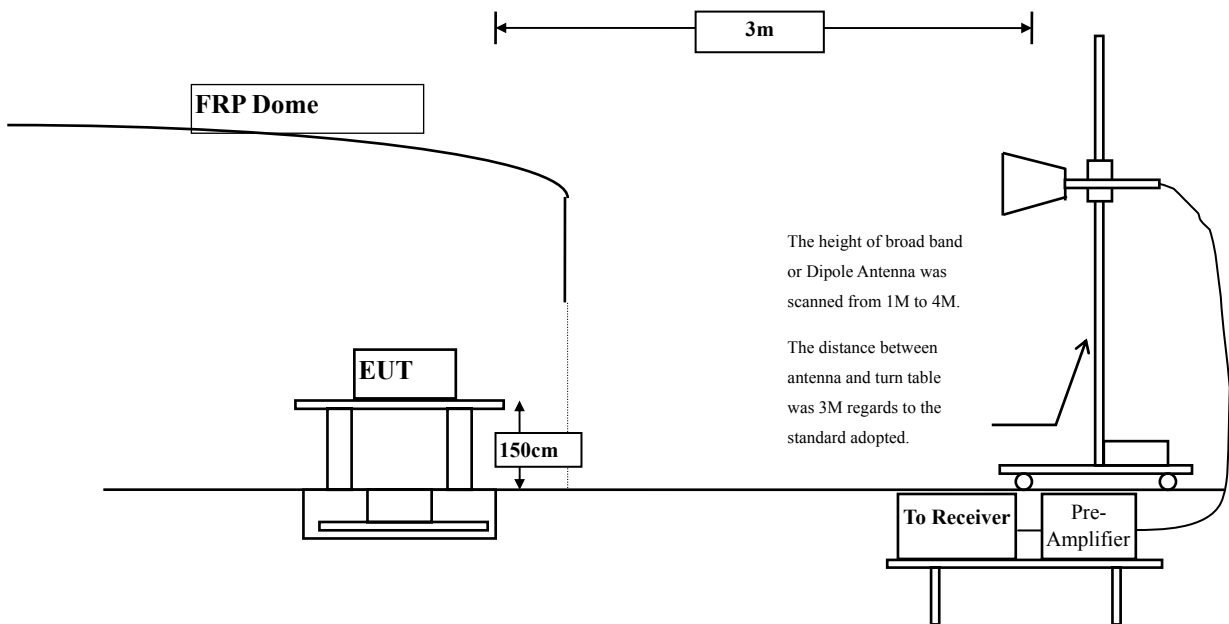

**4.3. Limits**

**➤ General Radiated Emission Limits**

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

<b>FCC Part 15 Subpart C Paragraph 15.209 Limits</b>		
Frequency MHz	uV/m @3m	dBµV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks:
1. RF Voltage (dBµV) = 20 log RF Voltage (uV)
  2. In the Above Table, the tighter limit applies at the band edges.
  3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

#### 4.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.249 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

#### 4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

**4.6. Test Result of Radiated Emission**

Product : Fixed Computer  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4804.000	3.327	33.250	36.577	-37.423	74.000
7206.000	10.136	33.950	44.086	-29.914	74.000
9608.000	13.706	35.290	48.996	-25.004	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4804.000	6.638	33.960	40.597	-33.403	74.000
7206.000	11.005	33.750	44.755	-29.245	74.000
9608.000	14.103	35.190	49.293	-24.707	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Fixed Computer  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4882.000	3.001	36.850	39.851	-34.149	74.000
7323.000	11.846	32.810	44.657	-29.343	74.000
9764.000	12.563	33.590	46.153	-27.847	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4882.000	5.713	36.660	42.374	-31.626	74.000
7323.000	12.727	33.080	45.808	-28.192	74.000
9764.000	13.028	34.190	47.218	-26.782	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Fixed Computer  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4960.000	2.760	36.100	38.860	-35.140	74.000
7440.000	12.567	33.170	45.736	-28.264	74.000
9920.000	13.456	34.780	48.236	-25.764	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4960.000	5.557	34.330	39.887	-34.113	74.000
7440.000	13.426	33.780	47.205	-26.795	74.000
9920.000	13.958	33.420	47.378	-26.622	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Fixed Computer  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)(2402MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4804.000	3.327	35.030	38.357	-35.643	74.000
7206.000	10.136	32.880	43.016	-30.984	74.000
9608.000	13.706	32.640	46.346	-27.654	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4804.000	6.638	35.130	41.767	-32.233	74.000
7206.000	11.005	32.440	43.445	-30.555	74.000
9608.000	14.103	33.060	47.163	-26.837	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Fixed Computer  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBµV	Measurement Level dBµV/m	Margin dB	Limit dBµV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4882.000	3.001	35.670	38.671	-35.329	74.000
7323.000	11.846	34.950	46.797	-27.203	74.000
9764.000	12.563	32.790	45.353	-28.647	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4882.000	5.713	35.770	41.484	-32.516	74.000
7323.000	12.727	33.620	46.348	-27.652	74.000
9764.000	13.028	33.470	46.498	-27.502	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Fixed Computer  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4960.000	2.760	33.890	36.650	-37.350	74.000
7440.000	12.567	34.120	46.686	-27.314	74.000
9920.000	13.456	34.670	48.126	-25.874	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4960.000	5.557	34.280	39.837	-34.163	74.000
7440.000	13.426	34.460	47.885	-26.115	74.000
9920.000	13.958	34.330	48.288	-25.712	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Fixed Computer  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
62.010	-12.187	49.832	37.645	-2.355	40.000
108.570	-7.562	44.484	36.922	-6.578	43.500
374.350	0.884	37.041	37.925	-8.075	46.000
500.450	2.035	38.448	40.483	-5.517	46.000
623.640	1.606	38.250	39.856	-6.144	46.000
800.180	6.417	34.484	40.901	-5.099	46.000
<b>Vertical</b>					
43.580	-10.919	49.508	38.589	-1.411	40.000
74.620	-7.726	46.612	38.886	-1.114	40.000
374.350	0.224	36.428	36.652	-9.348	46.000
499.480	-0.199	40.218	40.018	-5.982	46.000
623.640	0.376	42.969	43.345	-2.655	46.000
753.620	2.730	33.630	36.360	-9.640	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Fixed Computer  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
62.010	-12.187	50.059	37.872	-2.128	40.000
374.350	0.884	38.622	39.506	-6.494	46.000
500.450	2.035	38.767	40.802	-5.198	46.000
623.640	1.606	38.045	39.651	-6.349	46.000
749.740	3.963	34.971	38.934	-7.066	46.000
800.180	6.417	34.784	41.201	-4.799	46.000
<b>Vertical</b>					
43.580	-10.919	50.472	39.553	-0.447	40.000
74.620	-7.726	47.624	39.898	-0.102	40.000
499.480	-0.199	38.174	37.974	-8.026	46.000
623.640	0.376	41.228	41.604	-4.396	46.000
758.470	2.289	36.467	38.756	-7.244	46.000
872.930	0.014	36.669	36.683	-9.317	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.


**5. RF Antenna Conducted Test**

**5.1. Test Equipment**

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2016

Note: 1. All equipments are calibrated every one year.  
2. The test instruments Marked “X” are used to measure the final test results.

**5.2. Test Setup**

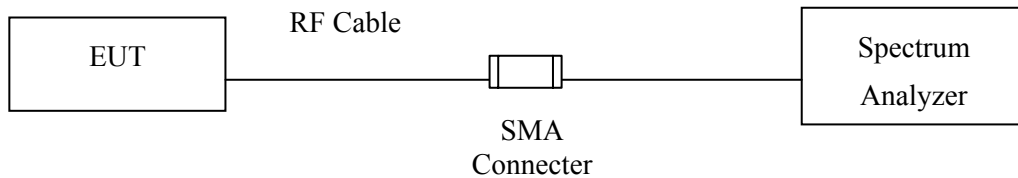

**5.3. Limits**

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**5.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.


**5.5. Uncertainty**

± 150Hz


### 5.6. Test Result of RF Antenna Conducted Test

Product : Fixed Computer  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)


**Figure Channel 00:**

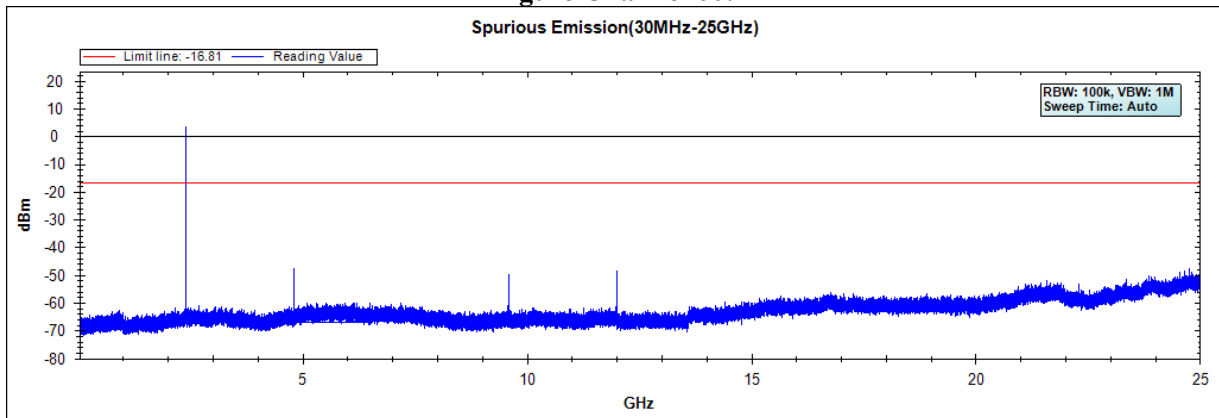

**Figure Channel 39:**

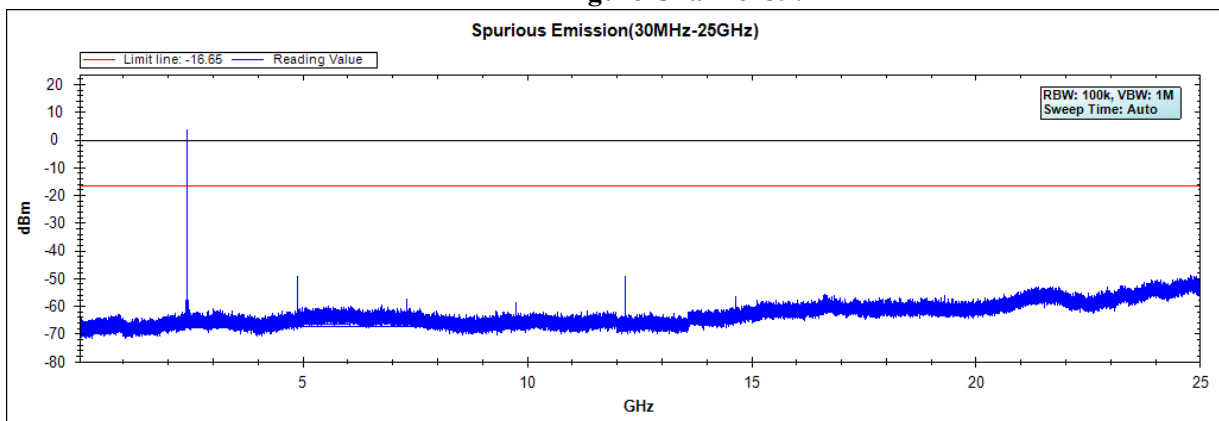


**Figure Channel 78:**

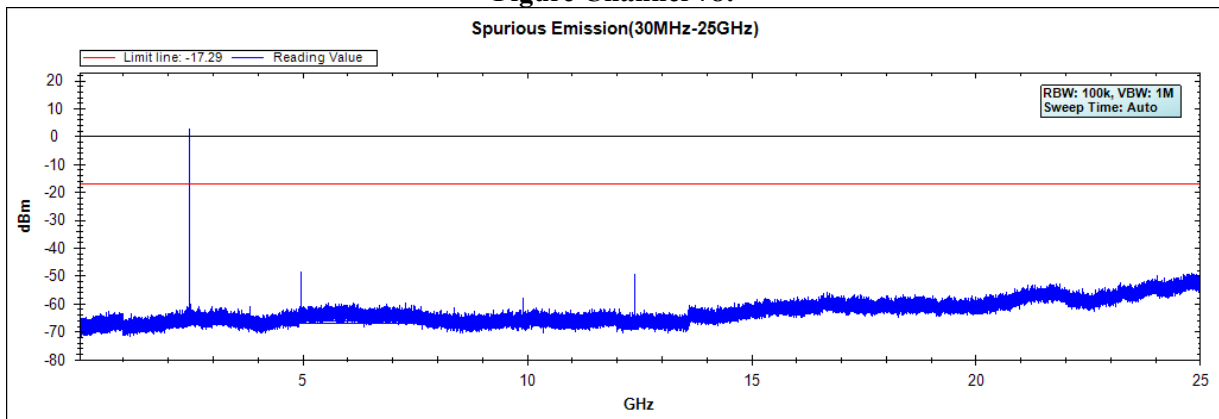


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Fixed Computer  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)


**Figure Channel 00:**

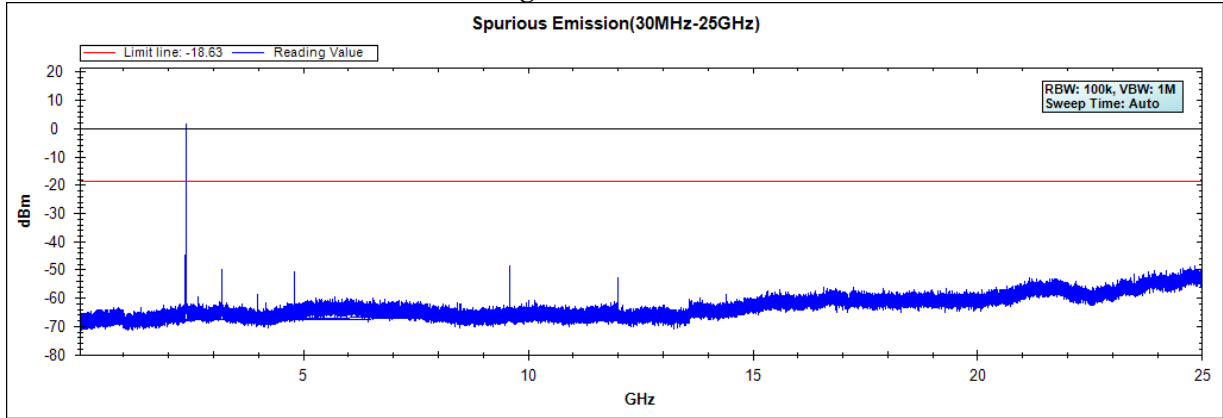

**Figure Channel 39:**

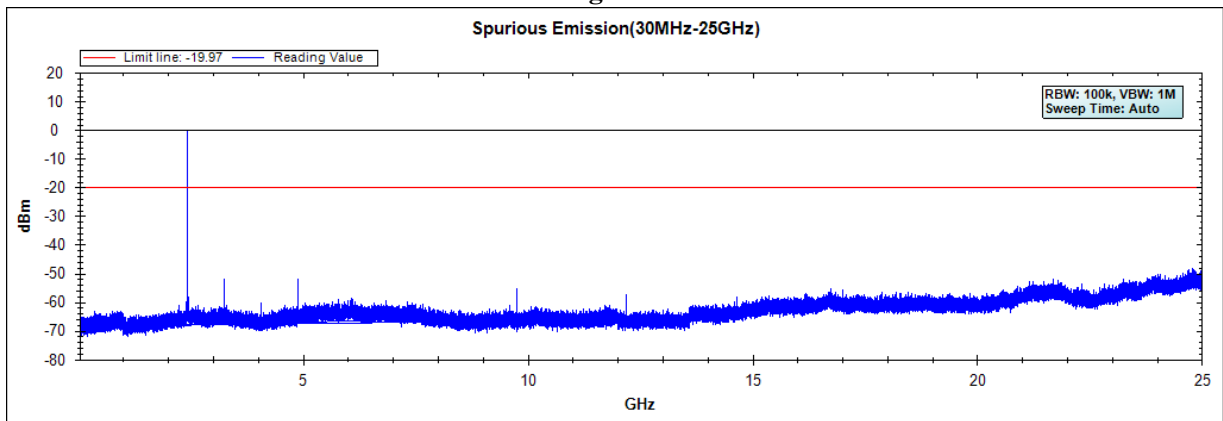

**Figure Channel 78:**

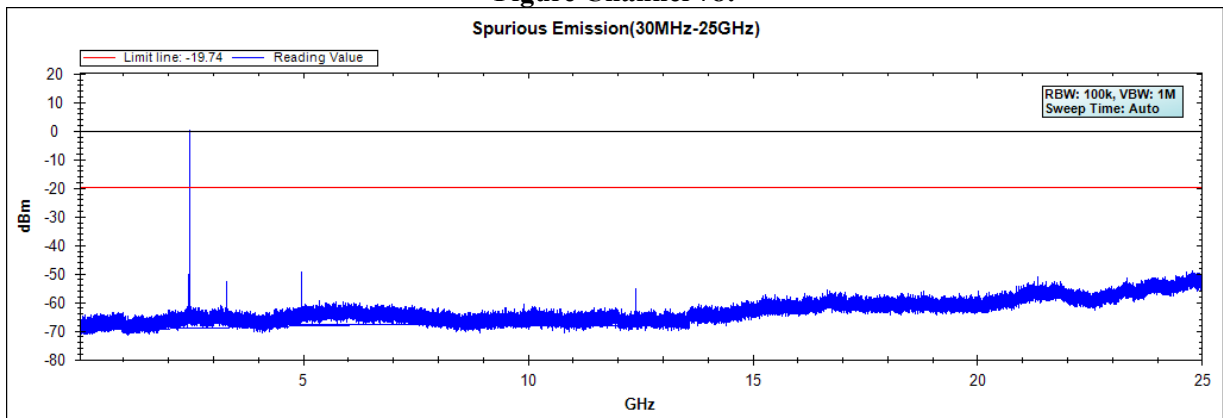

Note: The above test pattern is synthesized by multiple of the frequency range.

6. Band Edge

6.1. Test Equipment

RF Radiated Measurement:

The following test equipments are used during the band edge tests:


Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ CB # 8	X Spectrum Analyzer	R&S	FSP40/ 100339	Oct., 2015
	X Horn Antenna	ETS-Lindgren	3117/ 35205	Mar., 2016
	X Horn Antenna	Schwarzbeck	BBHA9170/209	Jan., 2016
	X Horn Antenna	TRC	AH-0801/95051	Aug., 2015
	X Pre-Amplifier	EMCI	EMC012630SE/980210	Jan., 2016
	X Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul., 2015
	X Pre-Amplifier	NARDA	DBL-1840N506/013	Jul., 2015

- Note:
1. All equipments are calibrated every one year.
  2. The test instruments marked by “X” are used to measure the final test results.

6.2. Test Setup

RF Radiated Measurement:

Above 1GHz

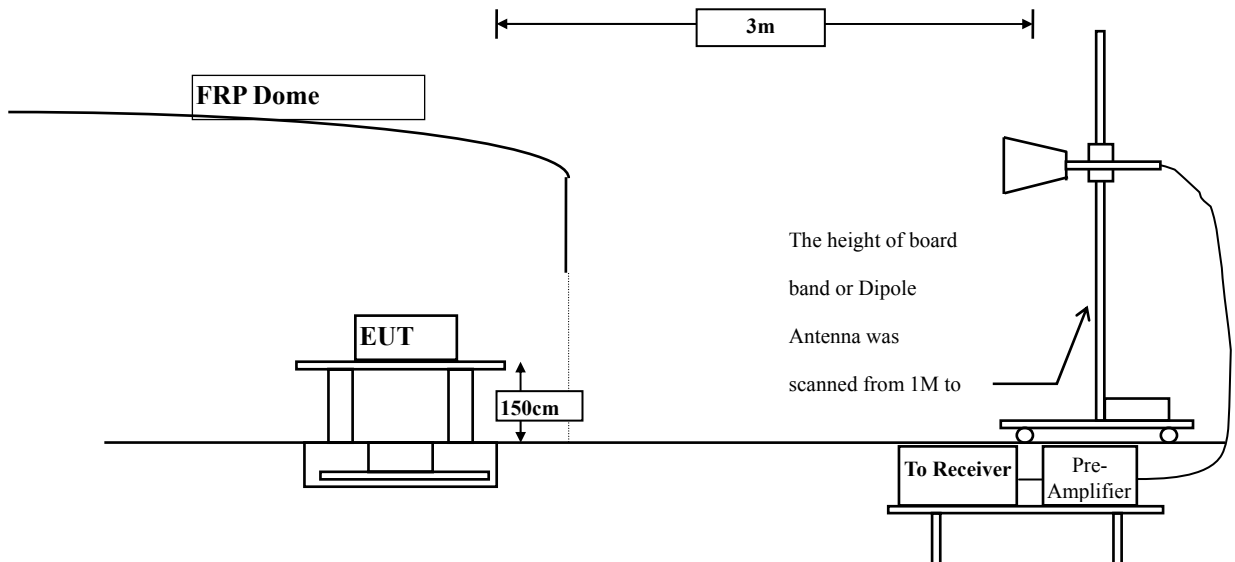

### **6.3. Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### **6.4. Test Procedure**

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

### **6.5. Uncertainty**

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz



### 6.6. Test Result of Band Edge

Product : Fixed Computer  
 Test Item : Hopping Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)

#### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Result
00 (Peak)	2389.420	-1.133	51.423	50.290	74.00	54.00	Pass
00 (Peak)	2390.000	-1.131	49.141	48.010	74.00	54.00	Pass
00 (Peak)	2400.000	-1.084	63.687	62.604	--	--	--
00 (Peak)	2411.159	-1.021	99.585	98.564	--	--	--
00 (Average)	2390.000	-1.131	29.103	27.972	74.00	54.00	Pass
00 (Average)	2400.000	-1.084	50.000	48.917	--	--	--
00 (Average)	2413.043	-1.009	99.430	98.421	--	--	--

Figure Channel 00: Horizontal (Peak)


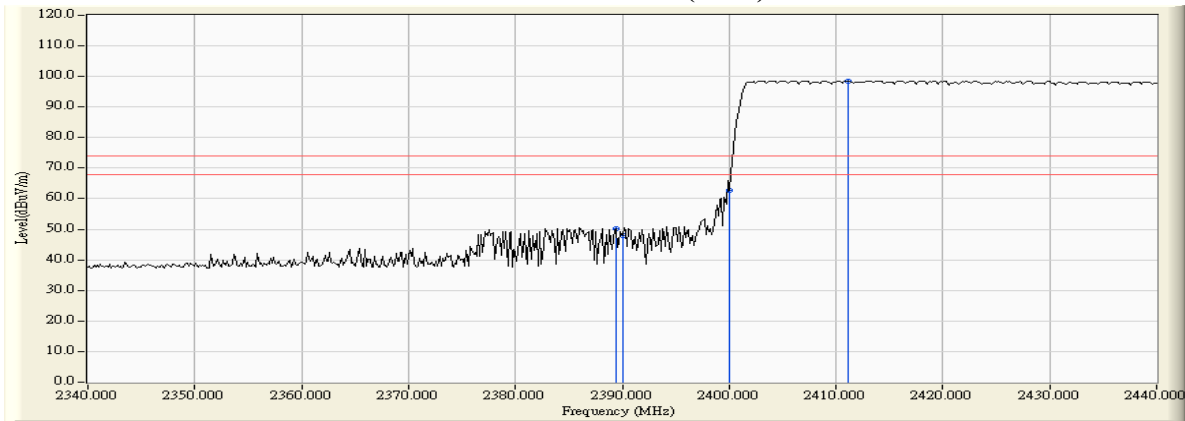


Figure Channel 00: Horizontal (Average)

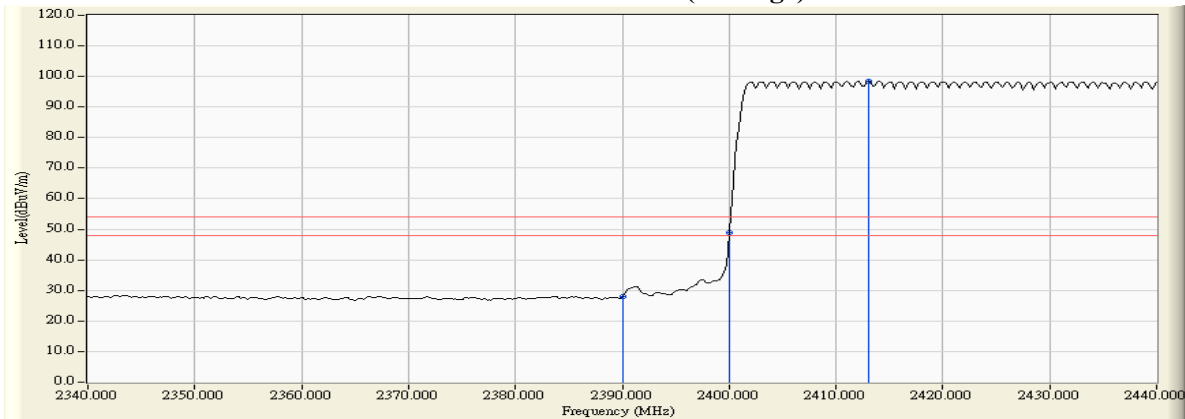

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Hopping Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)


**RF Radiated Measurement (VERTICAL):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2383.478	-1.695	52.034	50.339	74.00	54.00	Pass
00 (Peak)	2390.000	-1.725	50.910	49.185	74.00	54.00	Pass
00 (Peak)	2399.855	-1.732	70.442	68.709	--	--	--
00 (Peak)	2400.000	-1.733	64.327	62.595	--	--	--
00 (Peak)	2440.000	-1.549	100.701	99.152	--	--	--
00 (Average)	2390.000	-1.725	30.158	28.433	74.00	54.00	Pass
00 (Average)	2400.000	-1.733	49.648	47.916	--	--	--
00 (Average)	2440.000	-1.549	100.597	99.048	--	--	--

**Figure Channel 00: VERTICAL (Peak)**

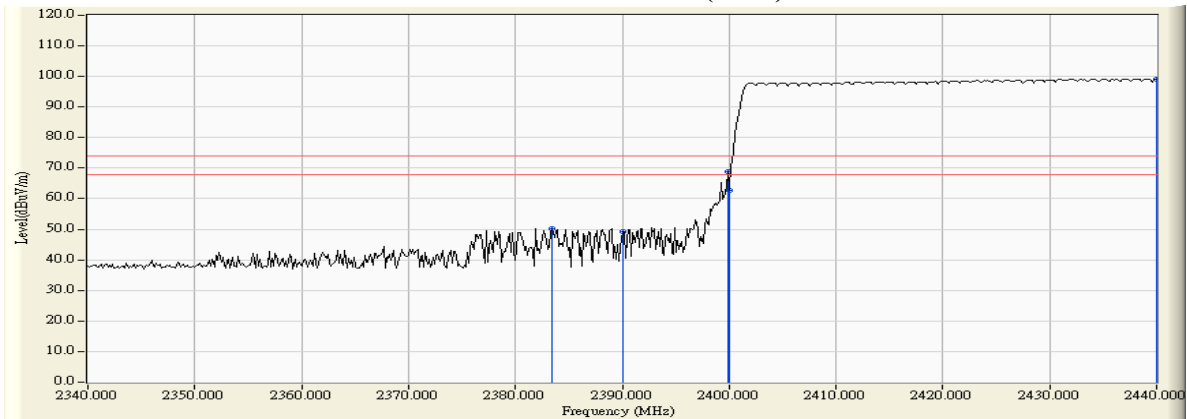

**Figure Channel 00: VERTICAL (Average)**

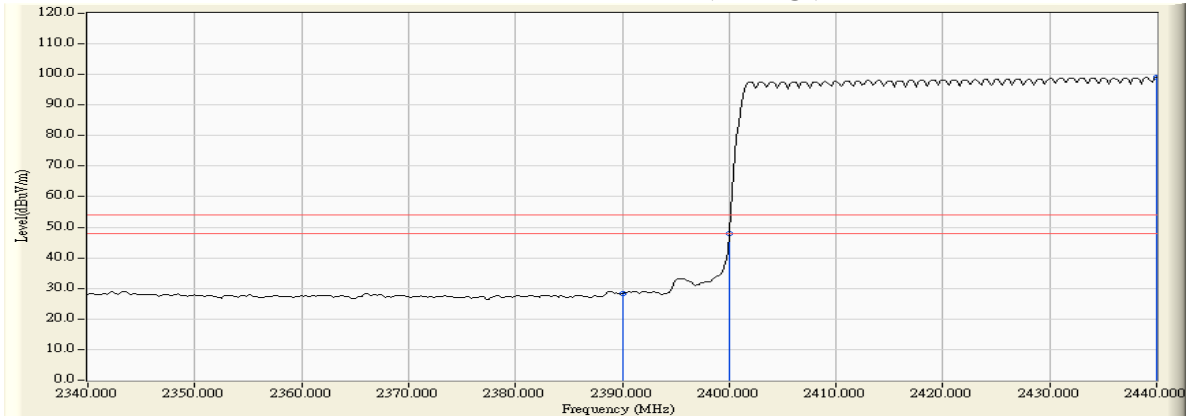

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*” means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Hopping Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2455.094	-0.739	100.965	100.226	--	--	Pass
78 (Peak)	2483.500	-0.558	54.092	53.534	74.00	54.00	Pass
78 (Peak)	2483.645	-0.557	56.649	56.092	74.00	54.00	Pass
78 (Average)	2443.935	-0.810	100.566	99.755	--	--	Pass
78 (Average)	2483.500	-0.558	34.522	33.964	74.00	54.00	Pass

**Figure Channel 78: Horizontal (Peak)**

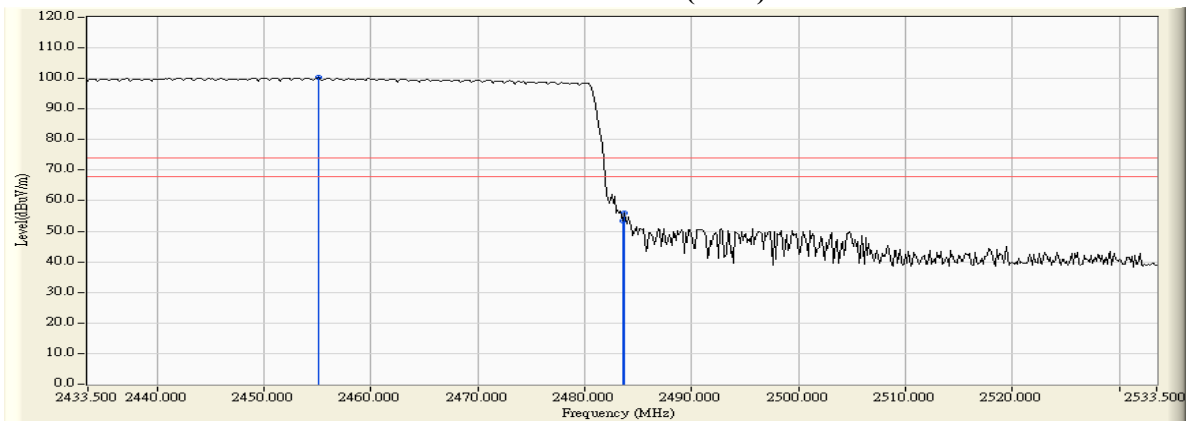

**Figure Channel 78: Horizontal (Average)**

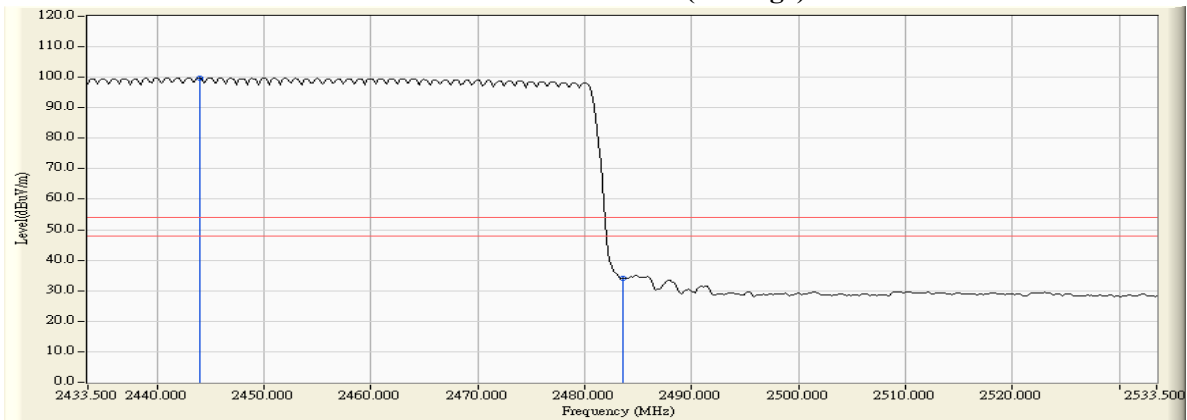

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Hopping Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)


**RF Radiated Measurement (VERTICAL):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2469.152	-1.385	103.030	101.646	--	--	Pass
78 (Peak)	2483.500	-1.305	53.868	52.563	74.00	54.00	Pass
78 (Peak)	2484.659	-1.298	54.988	53.690	74.00	54.00	Pass
78 (Average)	2470.022	-1.380	102.897	101.517	--	--	Pass
78 (Average)	2483.500	-1.305	35.323	34.018	74.00	54.00	Pass
78 (Average)	2485.094	-1.296	36.860	35.564	74.00	54.00	Pass

**Figure Channel 78: VERTICAL (Peak)**

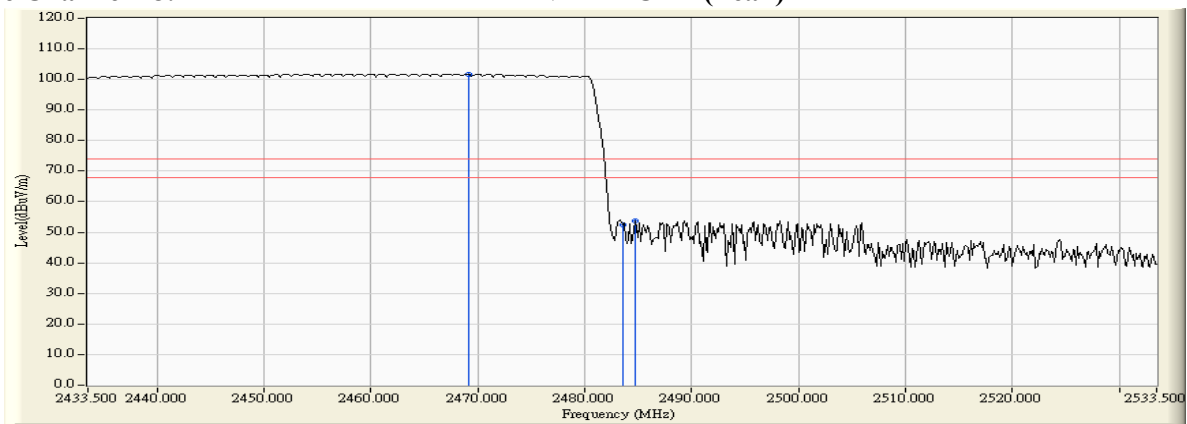

**Figure Channel 78: VERTICAL (Average)**

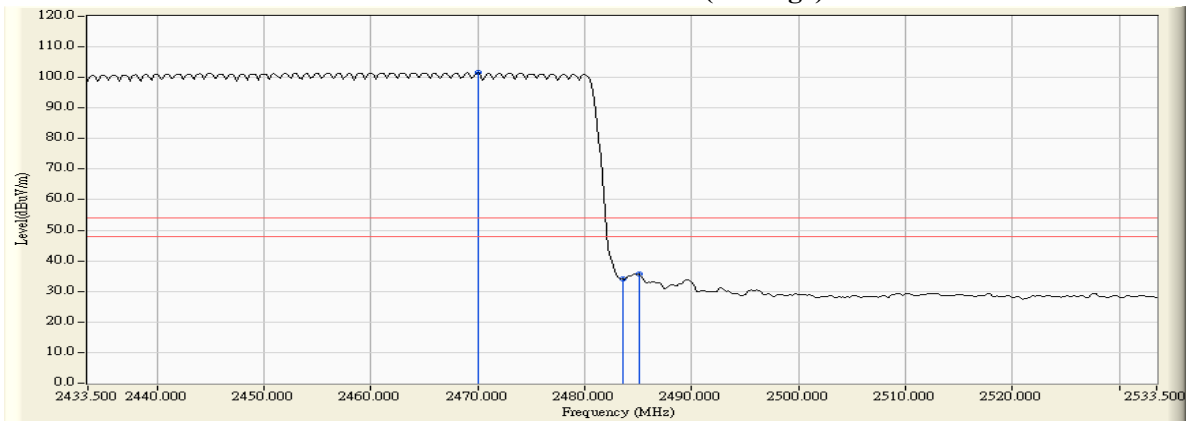

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Hopping Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2384.348	-1.153	58.024	56.871	74.00	54.00	Pass
00 (Peak)	2390.000	-1.131	50.720	49.589	74.00	54.00	Pass
00 (Peak)	2400.000	-1.084	71.646	70.563	--	--	--
00 (Peak)	2413.043	-1.009	101.014	100.005	--	--	--
00 (Average)	2384.203	-1.154	33.914	32.760	74.00	54.00	Pass
00 (Average)	2390.000	-1.131	31.094	29.963	74.00	54.00	Pass
00 (Average)	2400.000	-1.084	60.217	59.134	--	--	--
00 (Average)	2413.043	-1.009	98.642	97.633	--	--	--

**Figure Channel 00: Horizontal (Peak)**

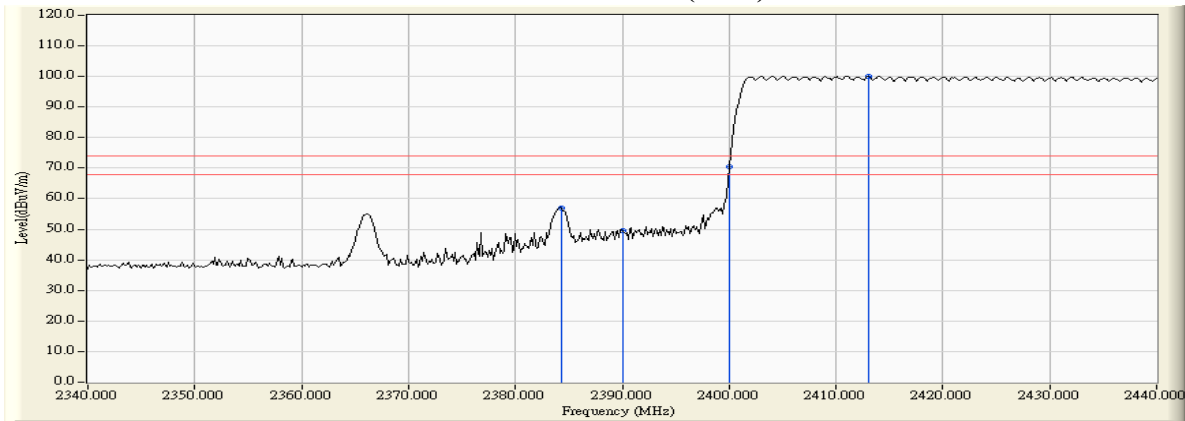

**Figure Channel 00: Horizontal (Average)**

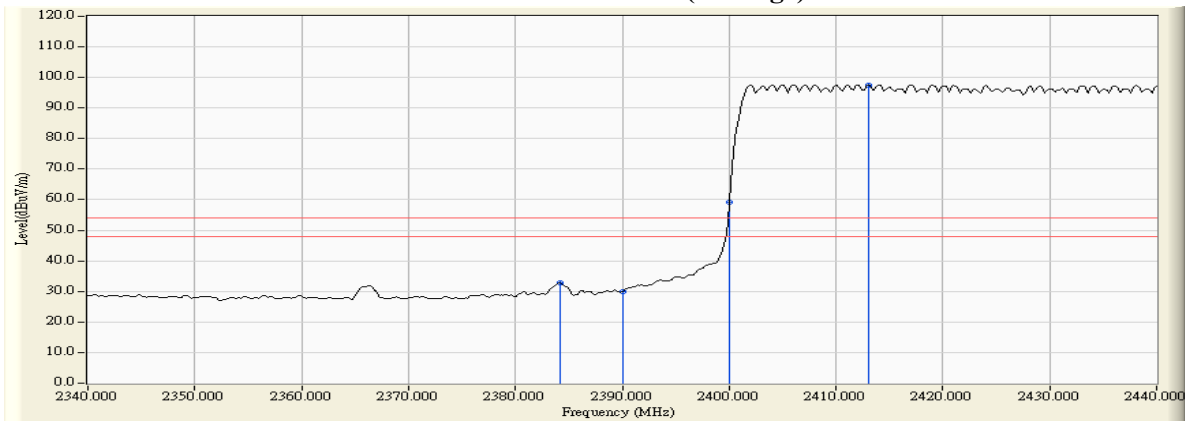

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Hopping Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)


**RF Radiated Measurement (VERTICAL):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2384.058	-1.697	58.598	56.901	74.00	54.00	Pass
00 (Peak)	2390.000	-1.725	49.082	47.357	74.00	54.00	Pass
00 (Peak)	2400.000	-1.733	71.150	69.418	--	--	--
00 (Peak)	2440.000	-1.549	102.051	100.502	--	--	--
00 (Average)	2384.203	-1.698	34.256	32.558	74.00	54.00	Pass
00 (Average)	2390.000	-1.725	31.460	29.735	74.00	54.00	Pass
00 (Average)	2400.000	-1.733	60.476	58.744	--	--	--
00 (Average)	2440.000	-1.549	99.940	98.391	--	--	--

**Figure Channel 00: VERTICAL (Peak)**

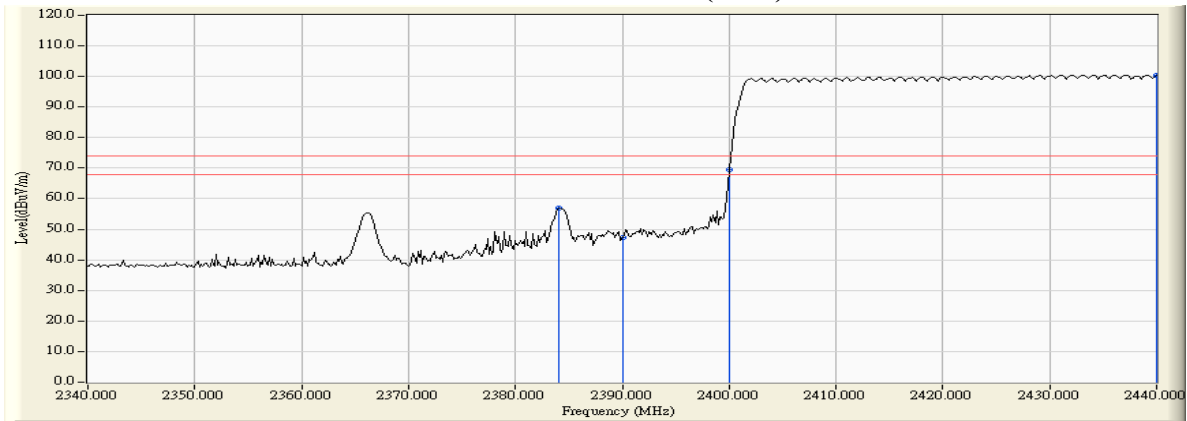

**Figure Channel 00: VERTICAL (Average)**

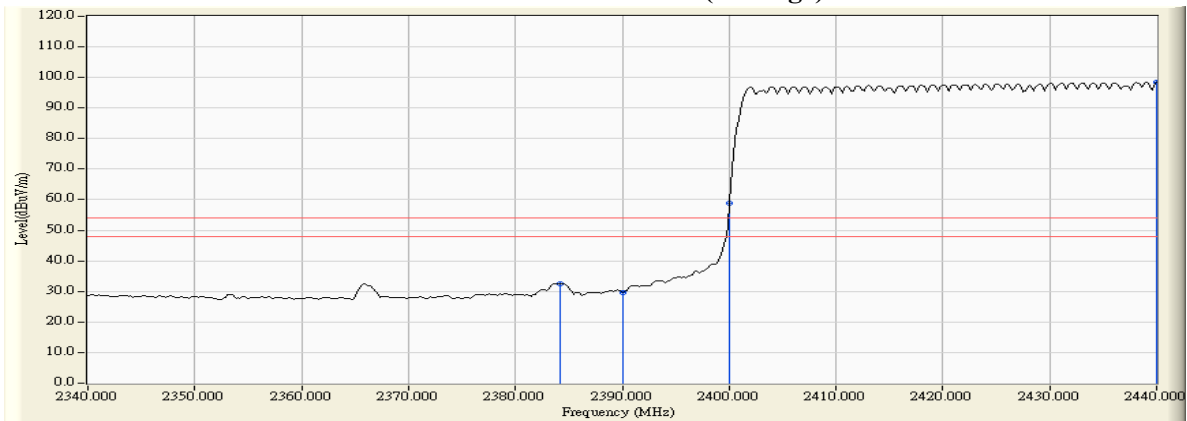

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Hopping Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2441.906	-0.824	102.099	101.275	--	--	Pass
78 (Peak)	2483.500	-0.558	51.455	50.897	74.00	54.00	Pass
78 (Peak)	2484.659	-0.550	57.270	56.719	74.00	54.00	Pass
78 (Average)	2442.920	-0.817	99.962	99.145	--	--	Pass
78 (Average)	2483.500	-0.558	38.730	38.172	74.00	54.00	Pass

**Figure Channel 78: Horizontal (Peak)**

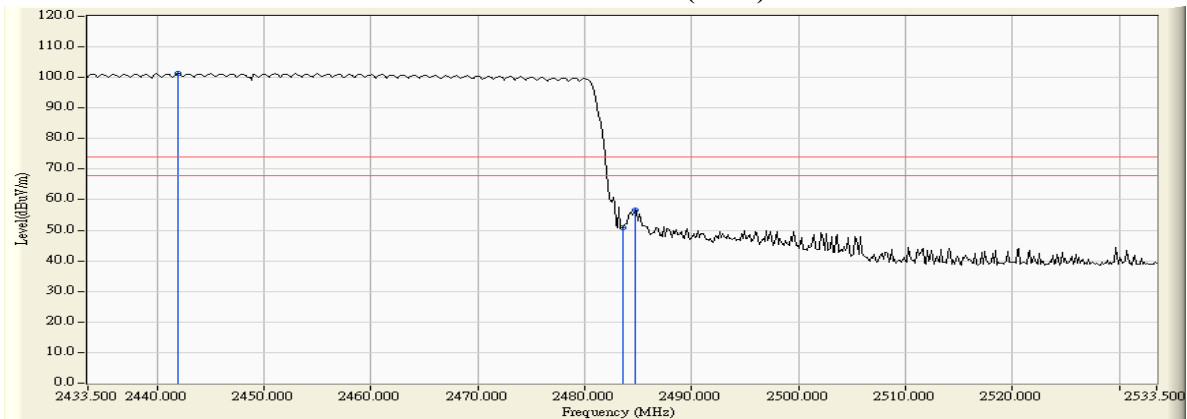

**Figure Channel 78: Horizontal (Average)**

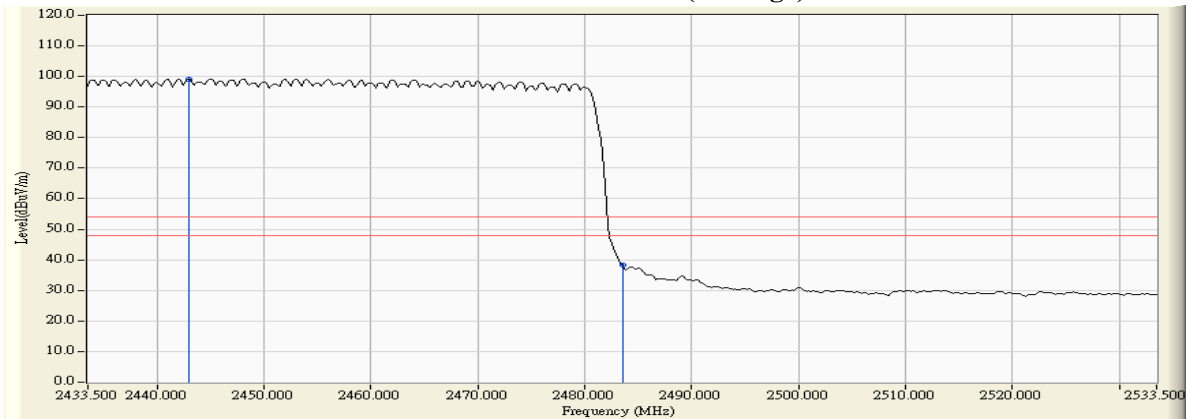

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Hopping Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)


**RF Radiated Measurement (VERTICAL):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2471.036	-1.374	104.237	102.863	--	--	Pass
78 (Peak)	2483.500	-1.305	54.598	53.293	74.00	54.00	Pass
78 (Peak)	2484.804	-1.297	60.472	59.174	74.00	54.00	Pass
78 (Average)	2469.007	-1.385	102.229	100.844	--	--	Pass
78 (Average)	2483.500	-1.305	41.272	39.967	74.00	54.00	Pass

**Figure Channel 78: VERTICAL (Peak)**

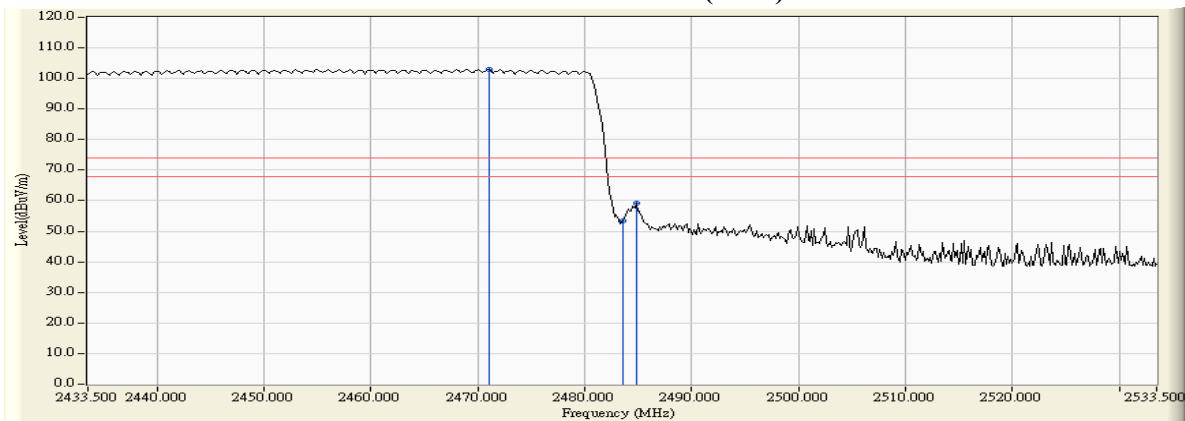

**Figure Channel 78: VERTICAL (Average)**

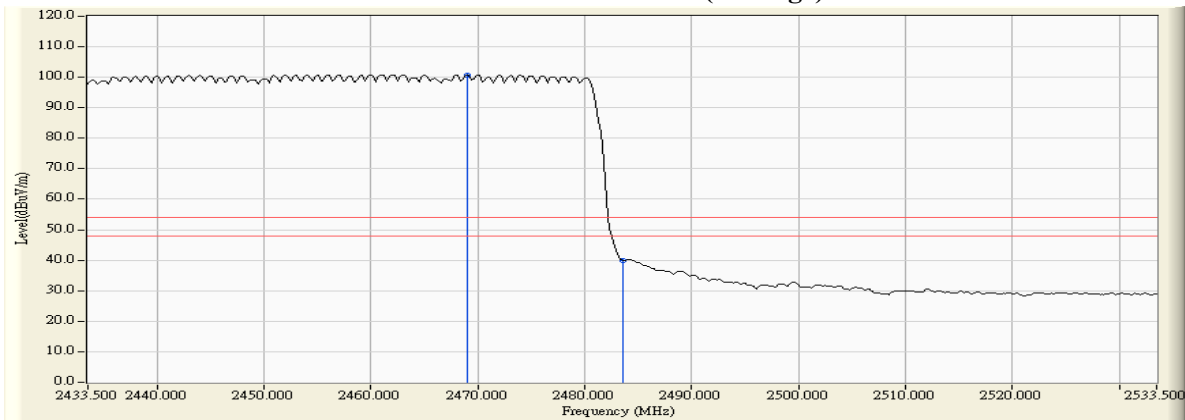

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.




Product : Fixed Computer  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Peak Limit (dBµV/m)	Average Limit (dBµV/m)	Result
00 (Peak)	2377.101	-1.181	50.915	49.734	74.00	54.00	Pass
00 (Peak)	2390.000	-1.131	38.800	37.669	74.00	54.00	Pass
00 (Peak)	2400.000	-1.084	70.451	69.368	--	--	--
00 (Peak)	2402.174	-1.072	99.595	98.523	--	--	--
00 (Average)	2388.986	-1.135	25.090	23.955	74.00	54.00	Pass
00 (Average)	2390.000	-1.131	24.996	23.865	74.00	54.00	Pass
00 (Average)	2400.000	-1.084	42.267	41.184	--	--	--
00 (Average)	2402.029	-1.073	85.972	84.900	--	--	--

**Figure Channel 00: Horizontal (Peak)**

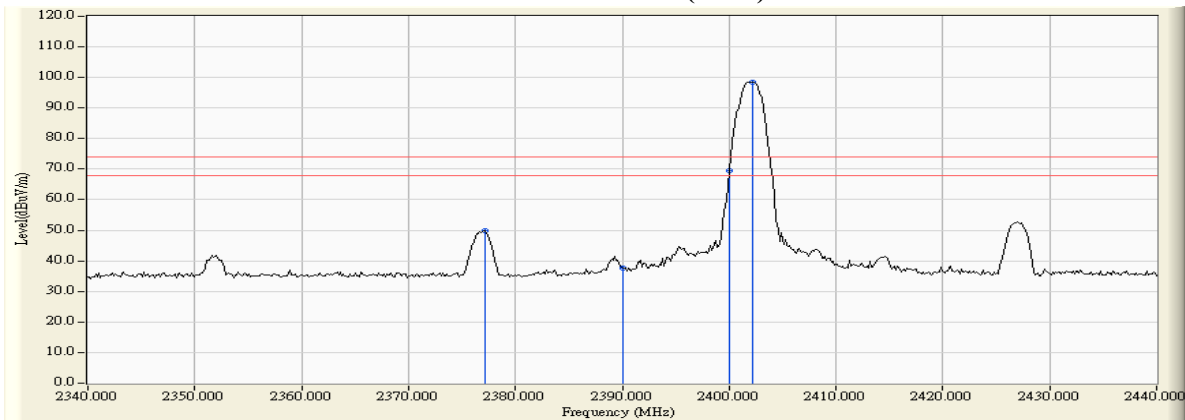

**Figure Channel 00: Horizontal (Average)**

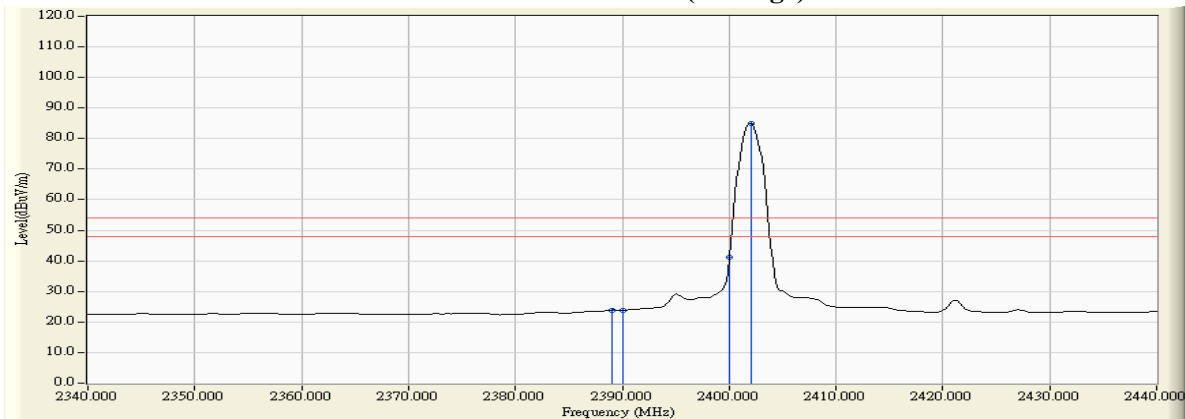

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)


**RF Radiated Measurement (VERTICAL):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2376.522	-1.663	48.558	46.896	74.00	54.00	Pass
00 (Peak)	2390.000	-1.725	37.938	36.213	74.00	54.00	Pass
00 (Peak)	2400.000	-1.733	68.083	66.351	--	--	--
00 (Peak)	2402.174	-1.729	96.559	94.831	--	--	--
00 (Average)	2372.754	-1.645	24.483	22.838	74.00	54.00	Pass
00 (Average)	2390.000	-1.725	24.294	22.569	74.00	54.00	Pass
00 (Average)	2400.000	-1.733	39.652	37.920	--	--	--
00 (Average)	2402.029	-1.729	82.917	81.188	--	--	--

**Figure Channel 00: VERTICAL (Peak)**

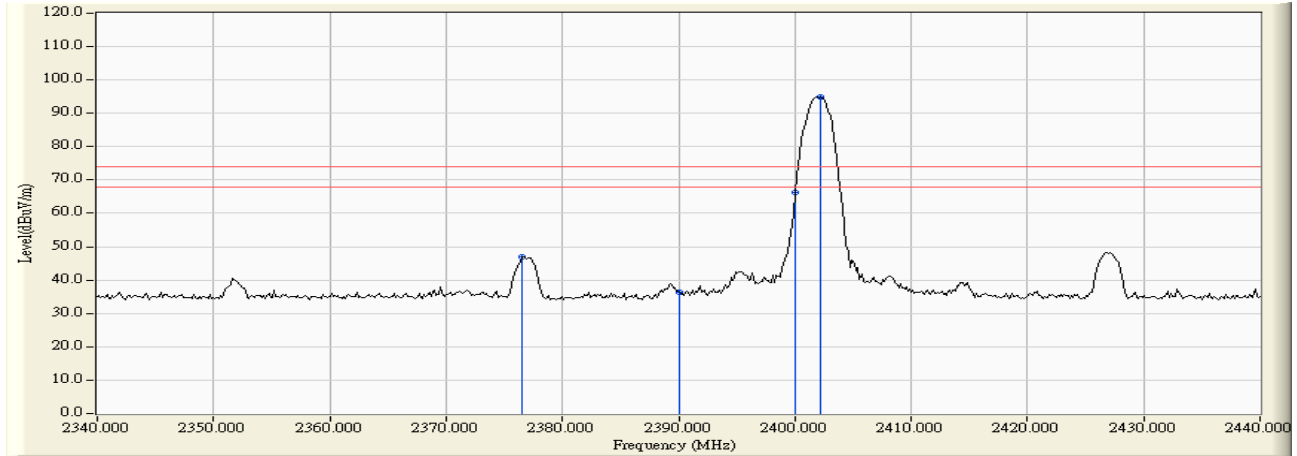

**Figure Channel 00: VERTICAL (Average)**

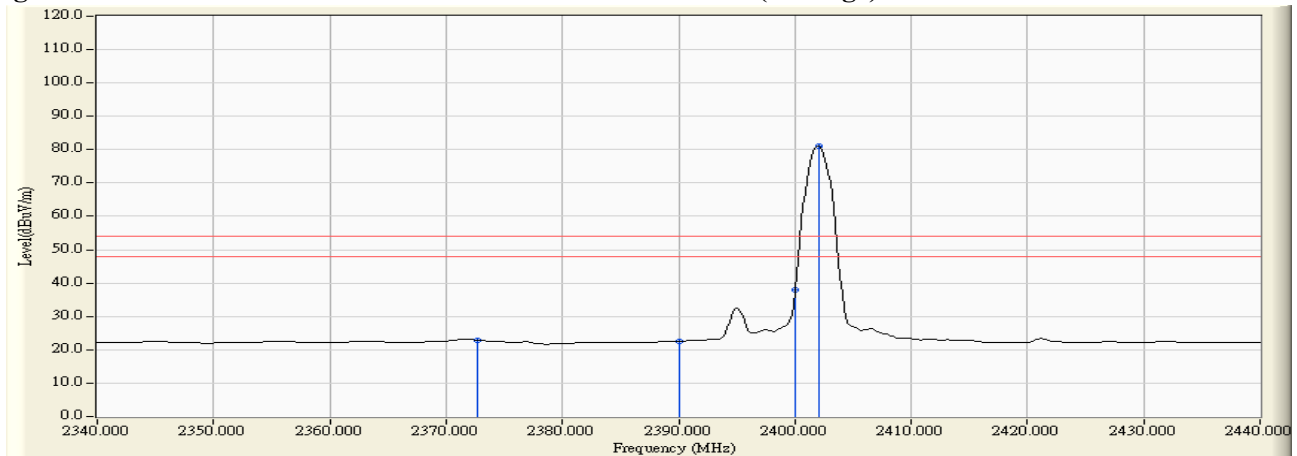

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2480.167	-0.579	100.604	100.025	--	--	Pass
78 (Peak)	2483.500	-0.558	47.082	46.524	74.00	54.00	Pass
78 (Peak)	2505.674	-0.507	51.756	51.249	74.00	54.00	Pass
78 (Average)	2480.022	-0.580	85.854	85.274	--	--	Pass
00 (Average)	2483.500	-0.558	30.350	29.792	74.00	54.00	Pass
78 (Average)	2483.935	-0.555	30.405	29.850	74.00	54.00	Pass

**Figure Channel 78: Horizontal (Peak)**

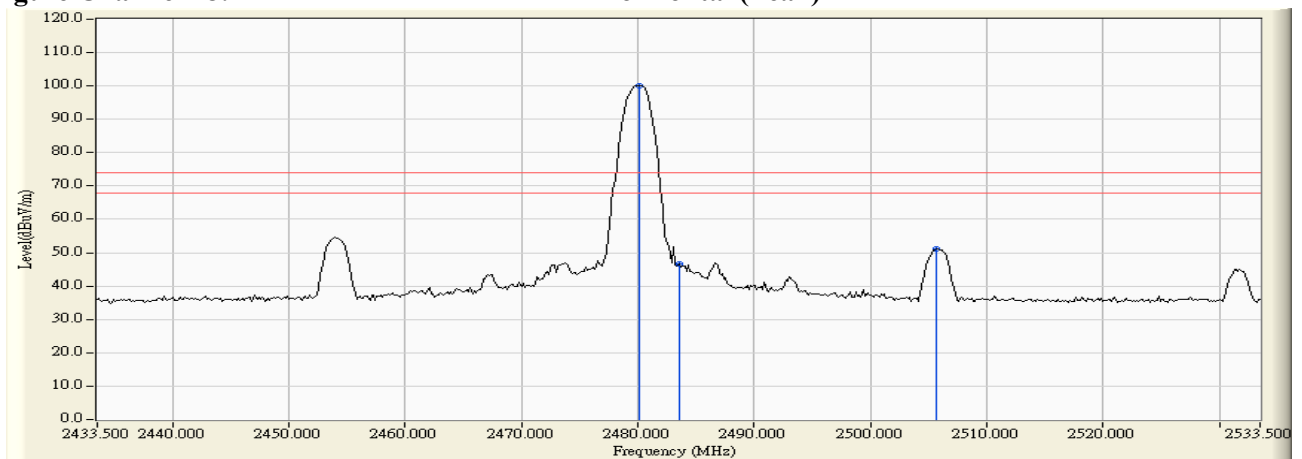

**Figure Channel 78: Horizontal (Average)**

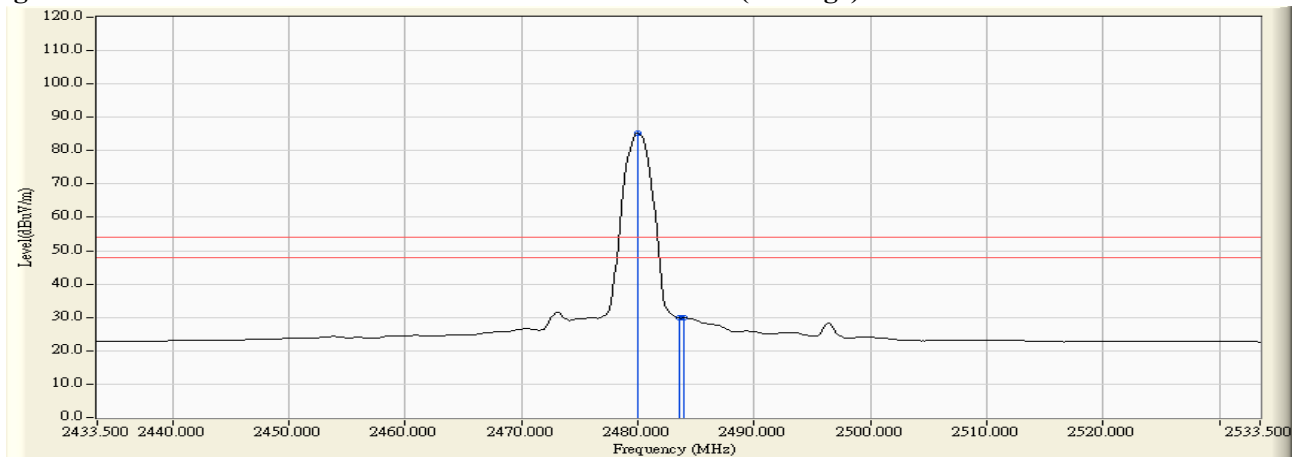

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)


**RF Radiated Measurement (VERTICAL):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2479.877	-1.325	94.231	92.906	--	--	Pass
78 (Peak)	2483.500	-1.305	40.973	39.668	74.00	54.00	Pass
78 (Peak)	2506.399	-1.227	45.105	43.878	74.00	54.00	Pass
78 (Average)	2480.022	-1.324	80.455	79.131	--	--	Pass
78 (Average)	2483.500	-1.305	27.098	25.793	74.00	54.00	Pass

**Figure Channel 78: VERTICAL (Peak)**

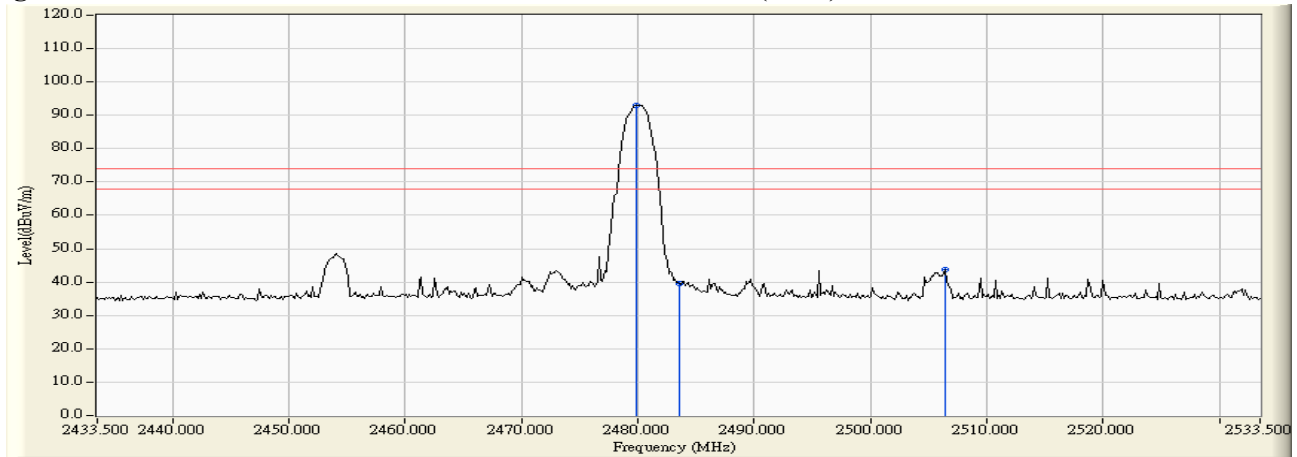

**Figure Channel 78: VERTICAL (Average)**

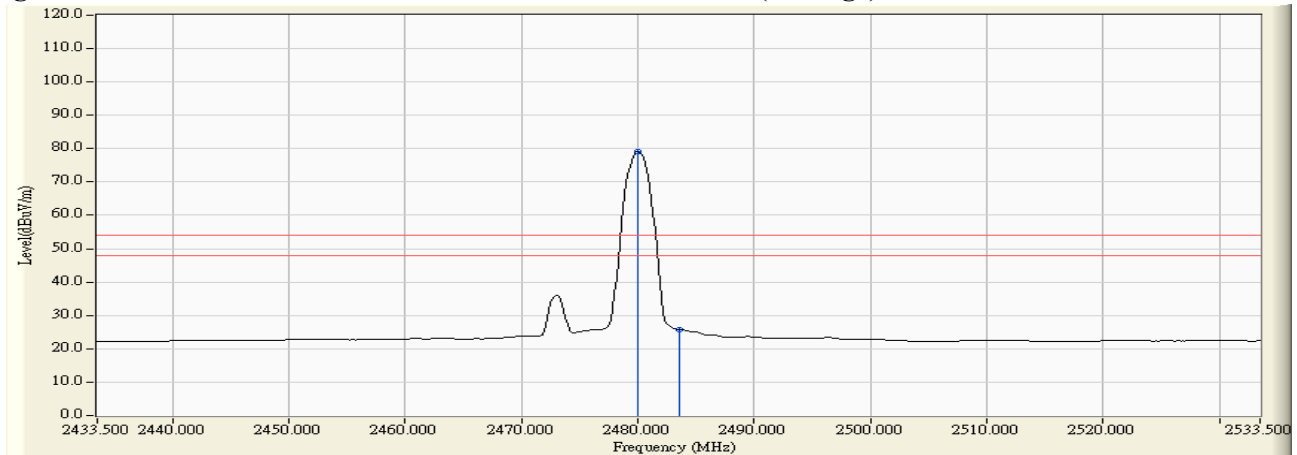

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2381.449	-1.164	57.954	56.790	74.00	54.00	Pass
00 (Peak)	2390.000	-1.131	41.613	40.482	74.00	54.00	Pass
00 (Peak)	2400.000	-1.084	71.775	70.692	--	--	--
00 (Peak)	2401.884	-1.073	100.524	99.451	--	--	--
00 (Average)	2390.000	-1.131	27.313	26.182	74.00	54.00	Pass
00 (Average)	2400.000	-1.084	49.956	48.873	--	--	--
00 (Average)	2402.029	-1.073	82.854	81.782	--	--	--

**Figure Channel 00: Horizontal (Peak)**

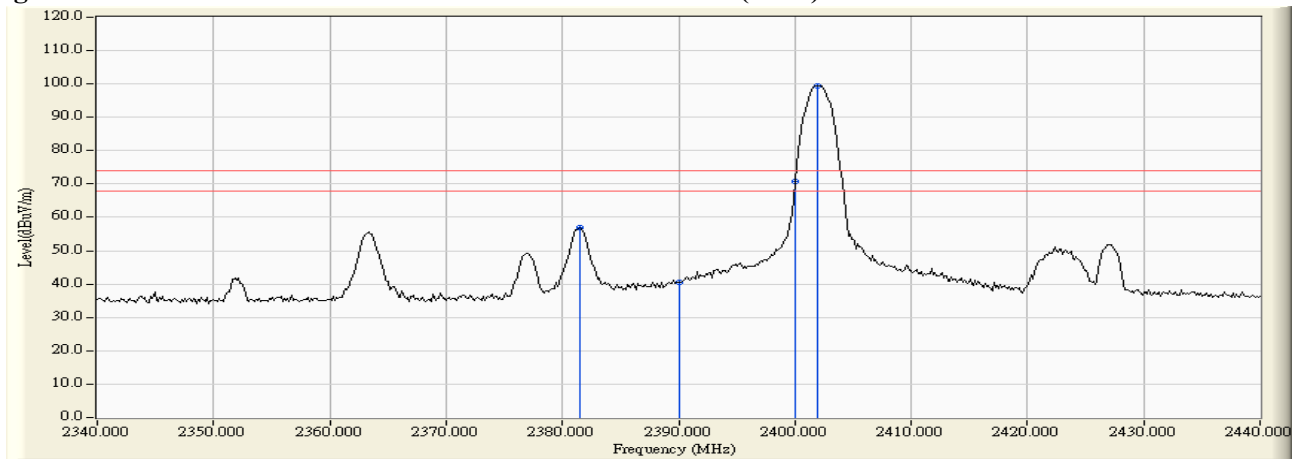

**Figure Channel 00: Horizontal (Average)**

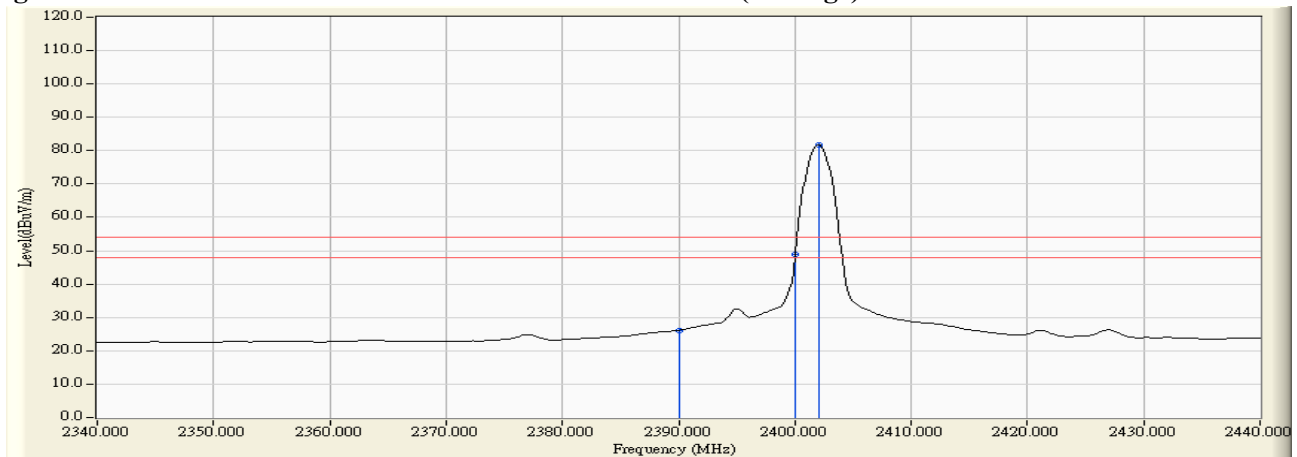

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)


**RF Radiated Measurement (VERTICAL):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2381.449	-1.685	55.282	53.597	74.00	54.00	Pass
00 (Peak)	2390.000	-1.725	40.253	38.528	74.00	54.00	Pass
00 (Peak)	2400.000	-1.733	68.466	66.734	--	--	--
00 (Peak)	2401.884	-1.729	97.320	95.591	--	--	--
00 (Average)	2390.000	-1.725	26.027	24.302	74.00	54.00	Pass
00 (Average)	2400.000	-1.733	48.224	46.492	--	--	--
00 (Average)	2402.029	-1.729	81.146	79.417	--	--	--

**Figure Channel 00: VERTICAL (Peak)**

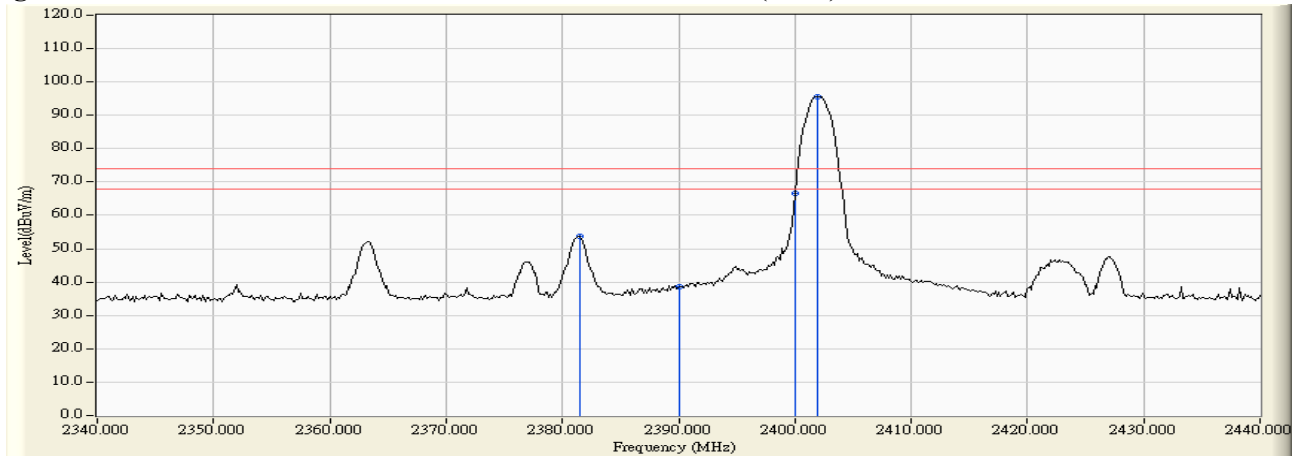

**Figure Channel 00: VERTICAL (Average)**

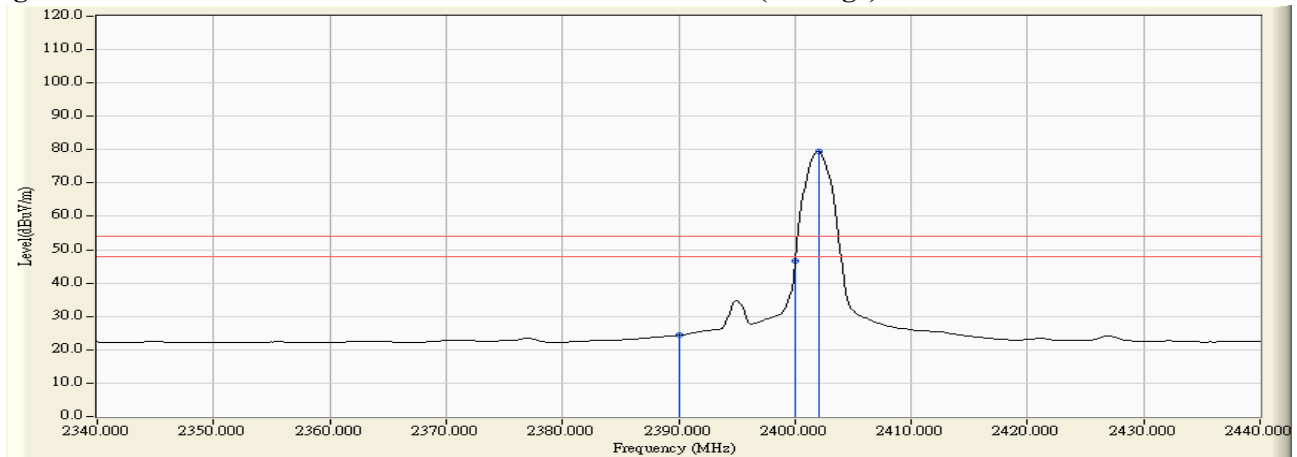

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2480.167	31.027	101.182	100.603	--	--	Pass
78 (Peak)	2483.500	31.050	54.827	54.269	74.00	54.00	Pass
78 (Average)	2480.022	-0.580	84.825	84.245	--	--	Pass
78 (Average)	2483.500	-0.558	34.455	33.897	74.00	54.00	Pass

**Figure Channel 78: Horizontal (Peak)**

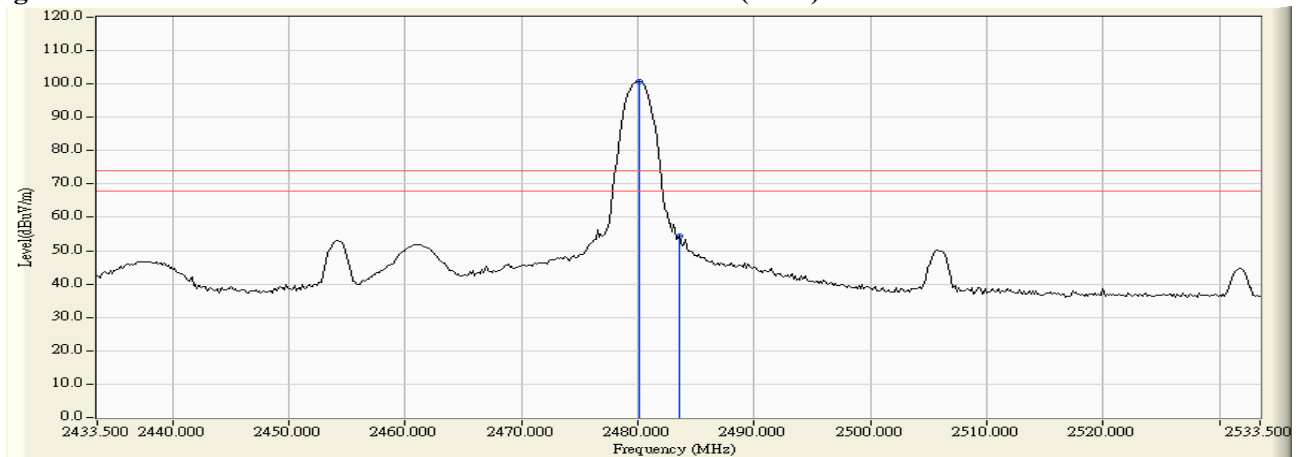

**Figure Channel 78: Horizontal (Average)**

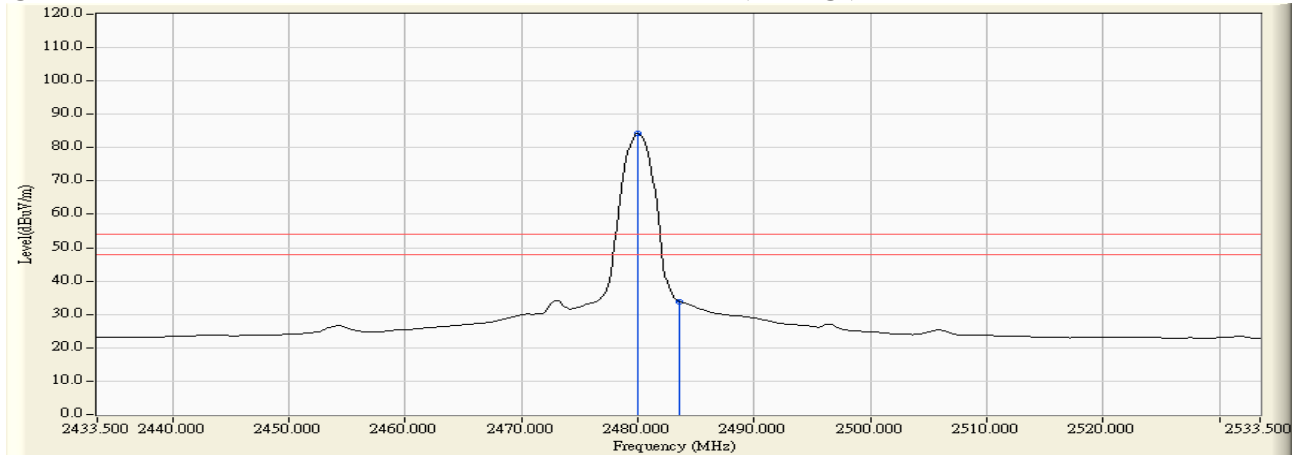

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*” means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Fixed Computer  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)


**RF Radiated Measurement (VERTICAL):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2480.167	-1.323	93.660	92.337	--	--	Pass
78 (Peak)	2483.500	-1.305	46.499	45.194	74.00	54.00	Pass
78 (Peak)	2483.790	-1.303	47.953	46.650	74.00	54.00	Pass
78 (Average)	2480.022	-1.324	78.000	76.676	--	--	Pass
78 (Average)	2483.500	-1.305	29.817	28.512	74.00	54.00	Pass

**Figure Channel 78: VERTICAL (Peak)**

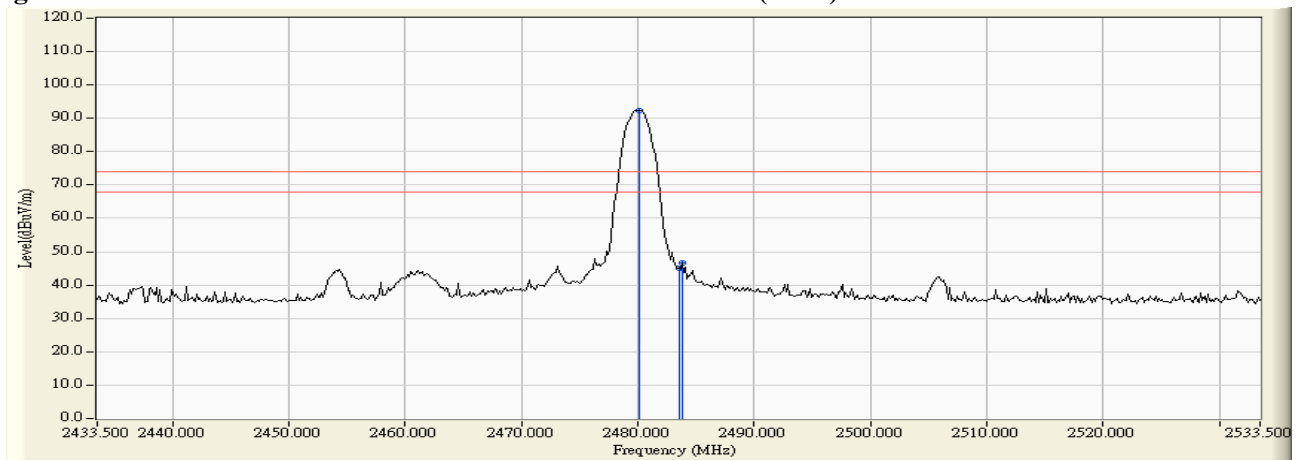

**Figure Channel 78: VERTICAL (Average)**

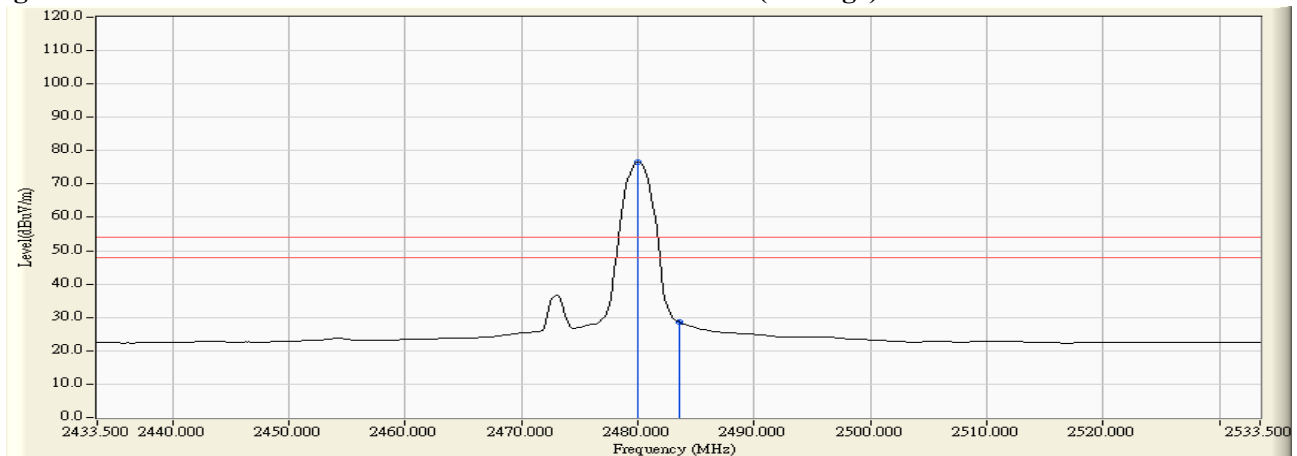

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.




**7. Channel Number**

**7.1. Test Equipment**

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2016

Note: 1. All equipments are calibrated every one year.  
 2. The test instruments marked by “X” are used to measure the final test results.

**7.2. Test Setup**

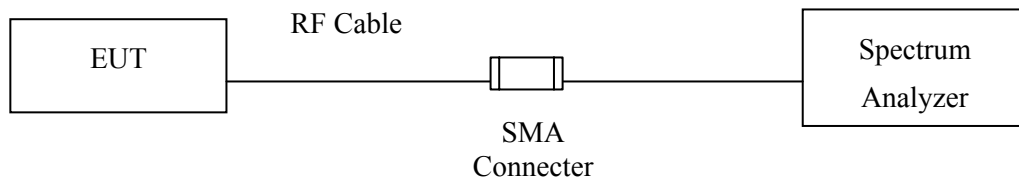

**7.3. Limit**

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

**7.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

**7.5. Uncertainty**


N/A

7.6. Test Result of Channel Number


Product : Fixed Computer  
 Test Item : Channel Number  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


2402-2421MHz

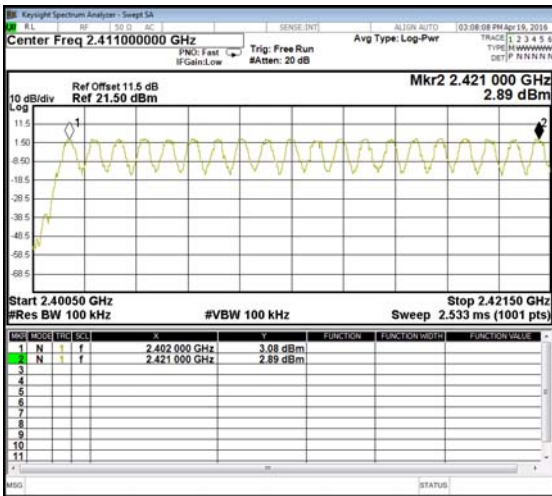


2422-2441MHz

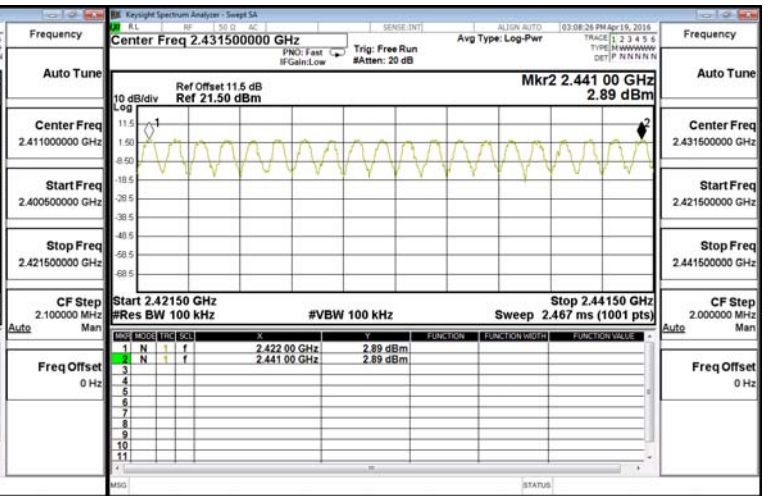

2442-2461MHz

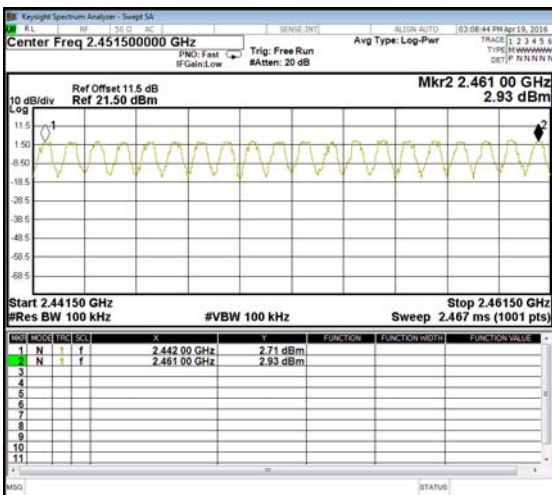


2462-2480MHz

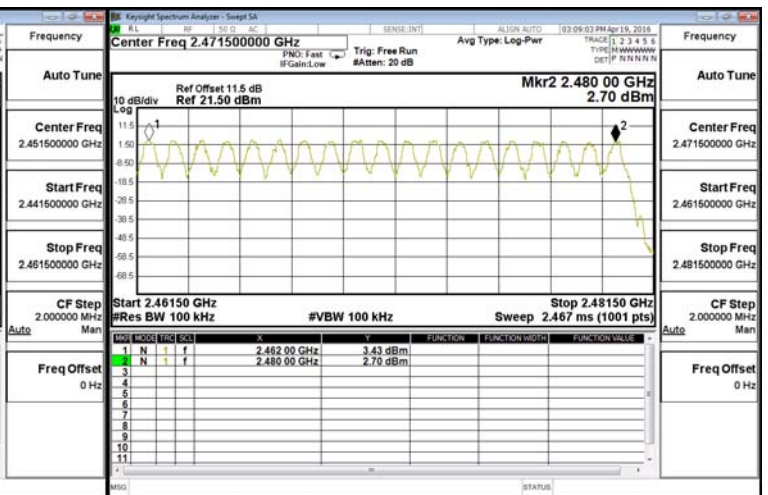


Product : Fixed Computer  
 Test Item : Channel Number  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


2402-2421MHz

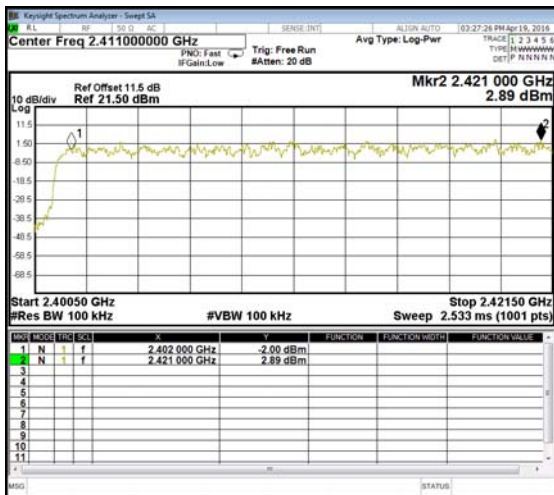


2422-2441MHz

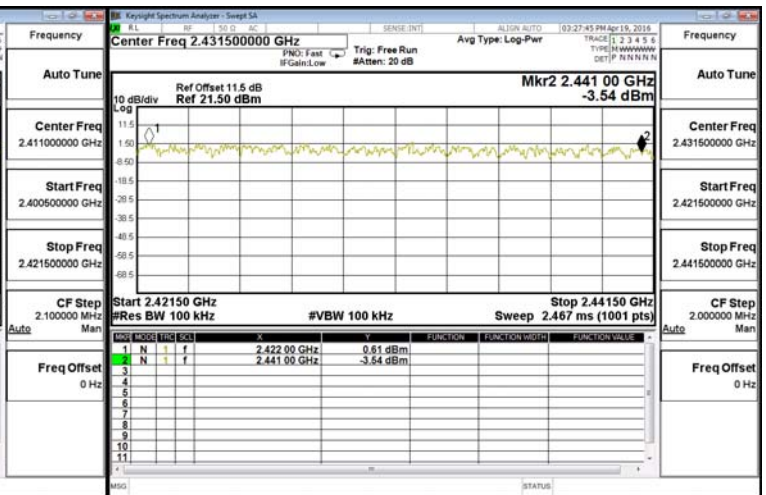

2442-2461MHz

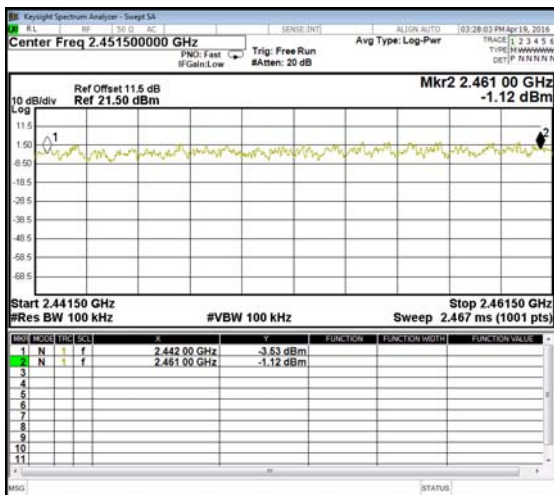

2462-2480MHz

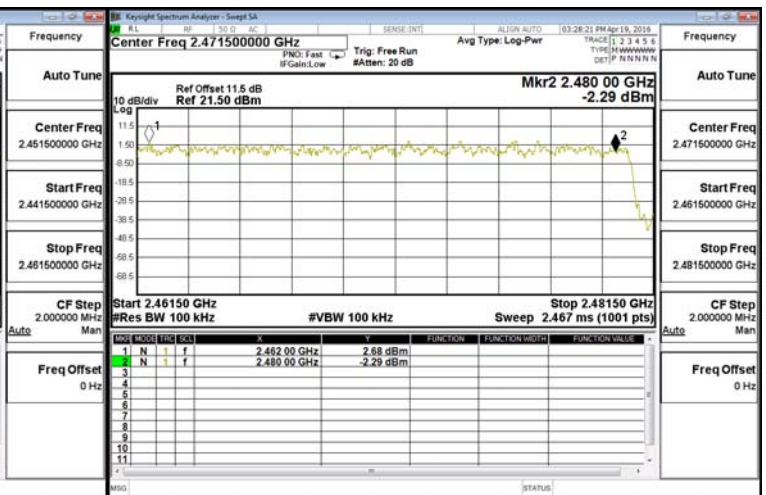


**8. Channel Separation**

**8.1. Test Equipment**

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2016

Note: 1. All equipments are calibrated every one year.  
 2. The test instruments mark by “X” are used to measure the final test results.

**8.2. Test Setup**

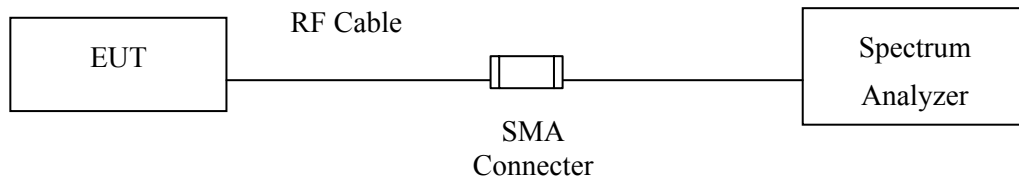

**8.3. Limit**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

**8.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

**8.5. Uncertainty**

± 150Hz


8.6. Test Result of Channel Separation

Product : Fixed Computer  
 Test Item : Channel Separation  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	740.0	Pass
39	2441	1000	>25 kHz	740.0	Pass
78	2480	1000	>25 kHz	740.0	Pass

NOTE: The 20dB Bandwidth is refer to section 10.


Channel 00 (2402MHz)

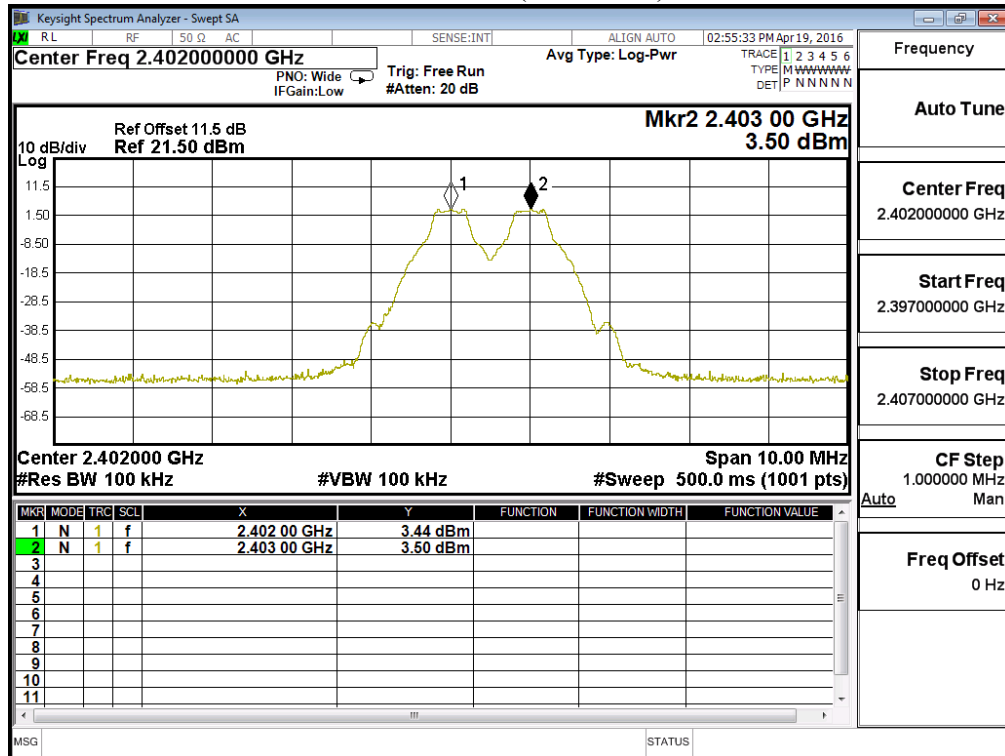

### Channel 39 (2441MHz)

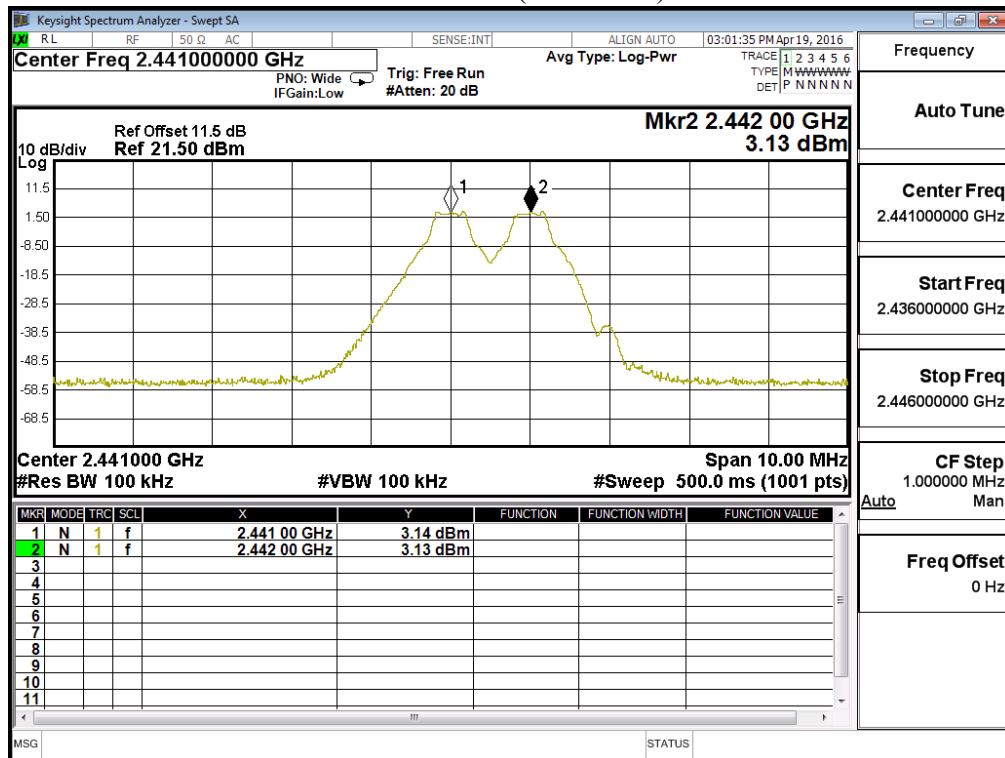

### Channel 78 (2480MHz)

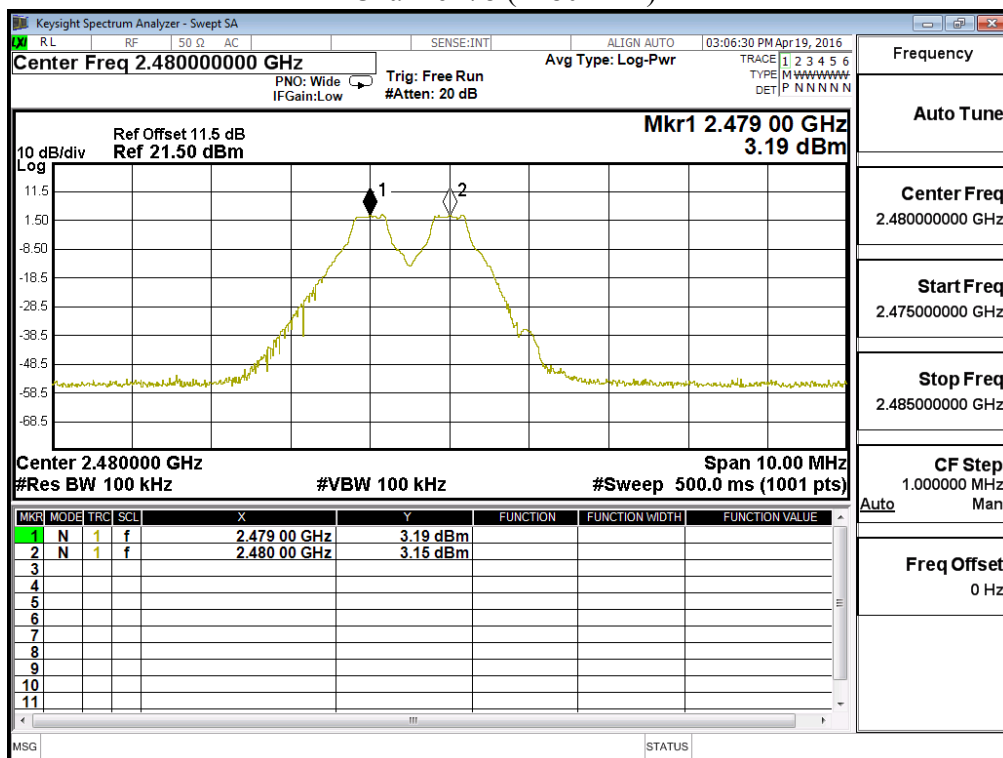


Product : Fixed Computer  
 Test Item : Channel Separation  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	946.7	Pass
39	2441	1000	>25 kHz	946.7	Pass
78	2480	1000	>25 kHz	953.3	Pass

NOTE: The 20dB Bandwidth is refer to section 10.


Channel 00 (2402MHz)

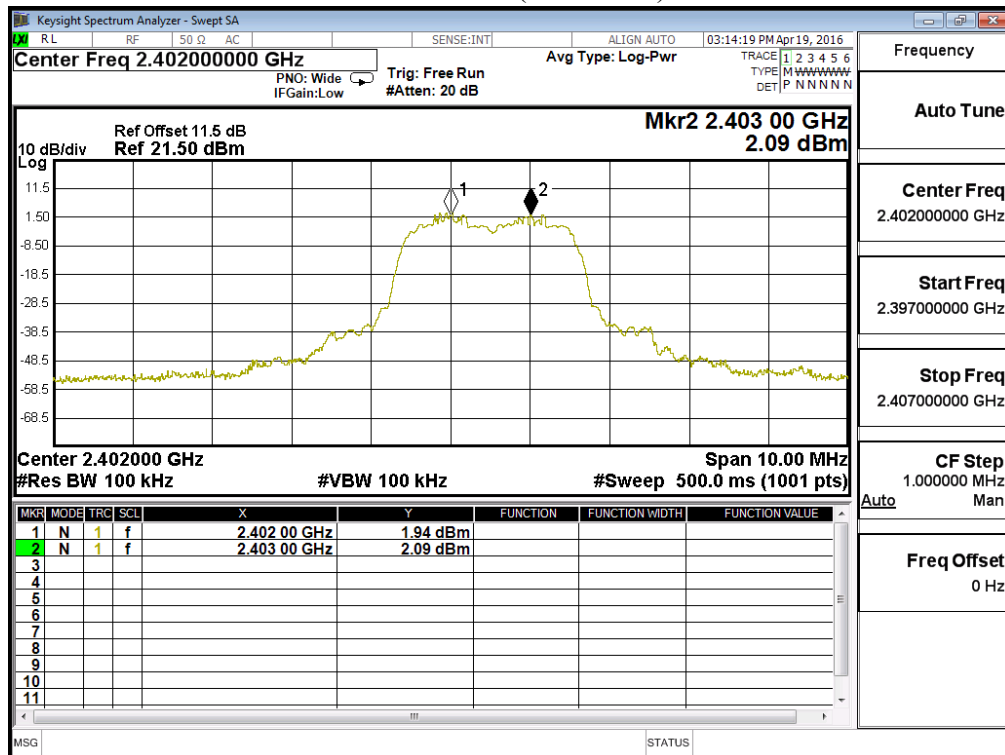

Channel 39 (2441MHz)

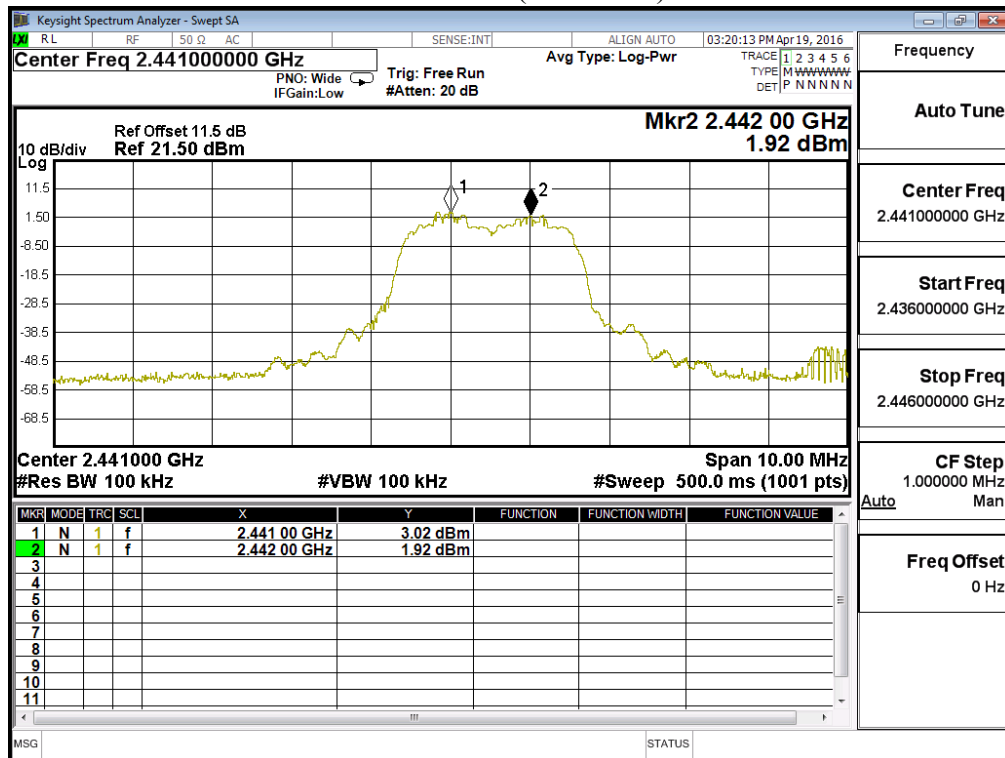

Channel 78 (2480MHz)

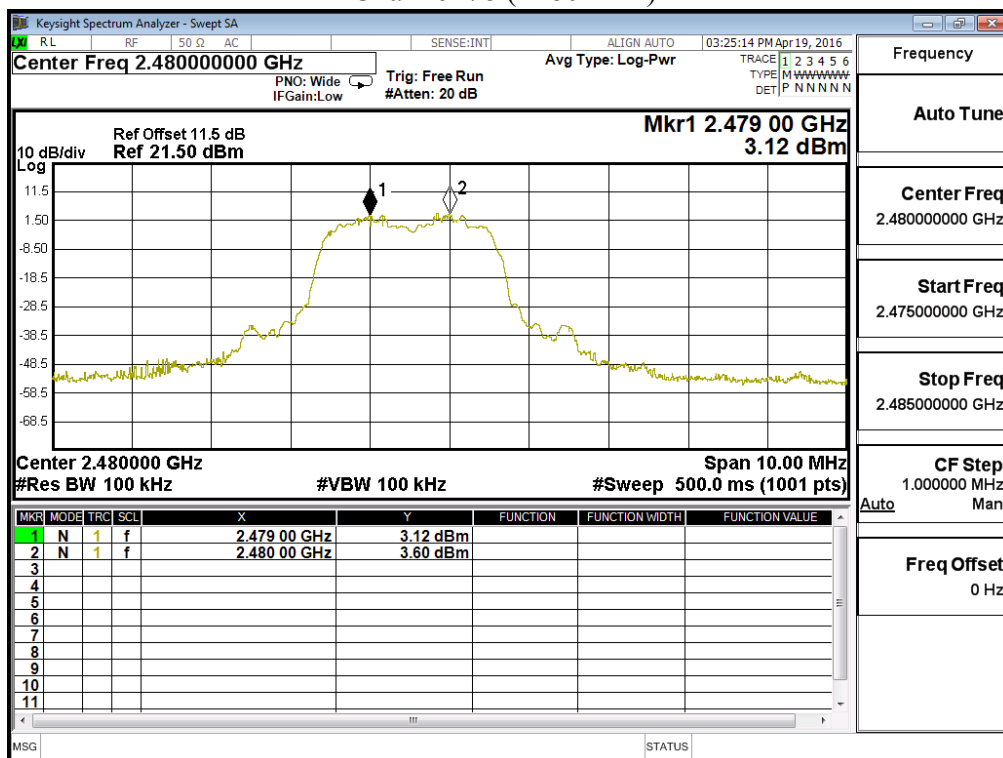




**9. Dwell Time**

**9.1. Test Equipment**

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2016

Note: 1. All equipments are calibrated every one year.  
 2. The test instruments marked by “X” are used to measure the final test results.

**9.2. Test Setup**

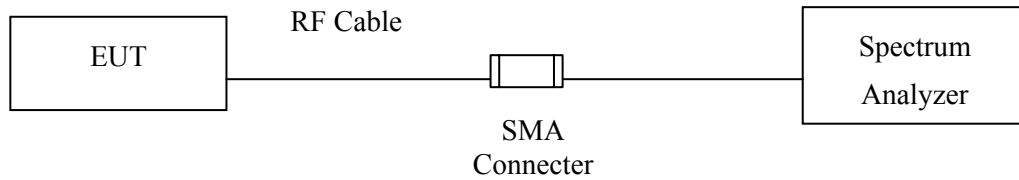

**9.3. Limit**

The dwell time shall be the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

**9.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

**9.5. Uncertainty**

± 25msec

### 9.6. Test Result of Dwell Time


Product : Fixed Computer  
 Test Item : Dwell Time  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (Channel 00,39,78 –DH5)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.887	13	50	0.75	0.300	0.4	Pass
2441	2.887	13	50	0.75	0.300	0.4	Pass
2480	2.887	13	50	0.75	0.300	0.4	Pass


Duty cycle = ((Time slot length(ms)\*Hopping of Number) / Sweep time (ms))

Dwell time = (Duty cycle /79) \* (79\*0.4)


CH 00 Time Interval between hops

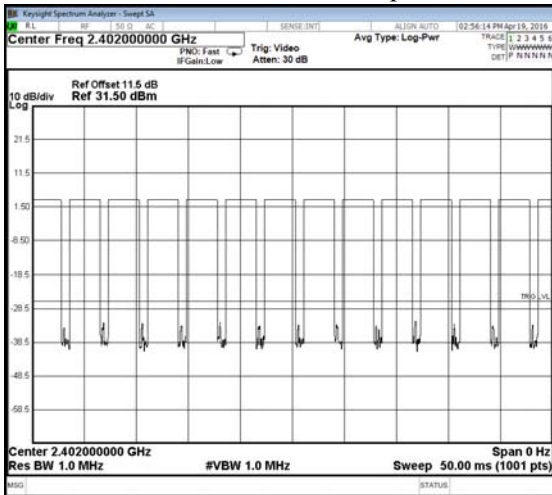


CH 00 Transmission Time

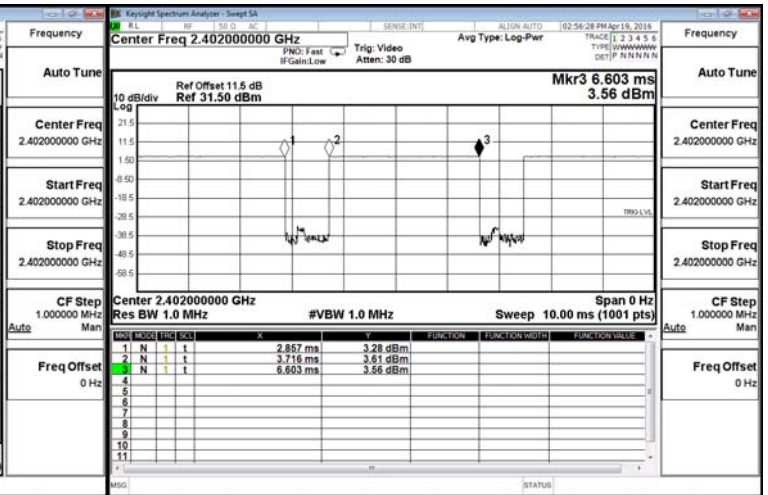

CH39 Time Interval between hops

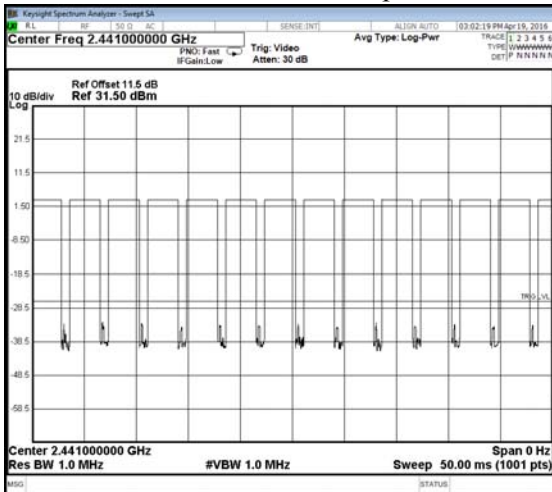


CH 39Transmission Time

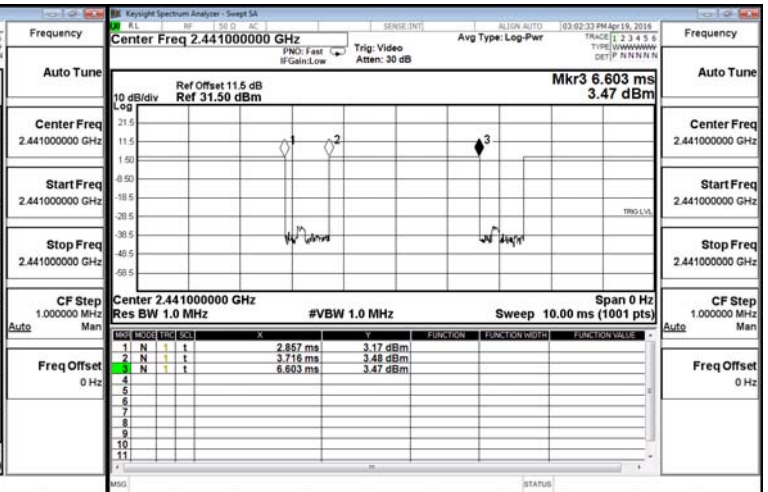

CH 78 Time Interval between hops

CH 78 Transmission Time

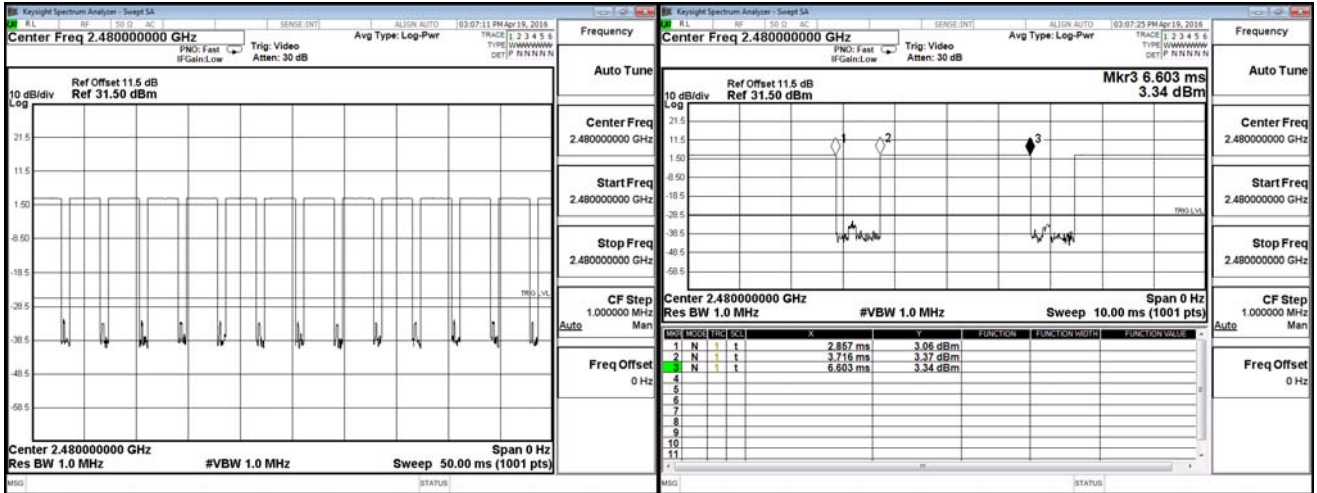

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


Product : Fixed Computer  
 Test Item : Dwell Time  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (Channel 00,39,78 –DH5)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.887	13	50	0.75	0.300	0.4	Pass
2441	2.887	13	50	0.75	0.300	0.4	Pass
2480	2.887	13	50	0.75	0.300	0.4	Pass


Duty cycle = ((Time slot length(ms)\*Hopping of Number) / Sweep time (ms))

Dwell time = (Duty cycle / 79) \* (79\*0.4)


CH 00 Time Interval between hops

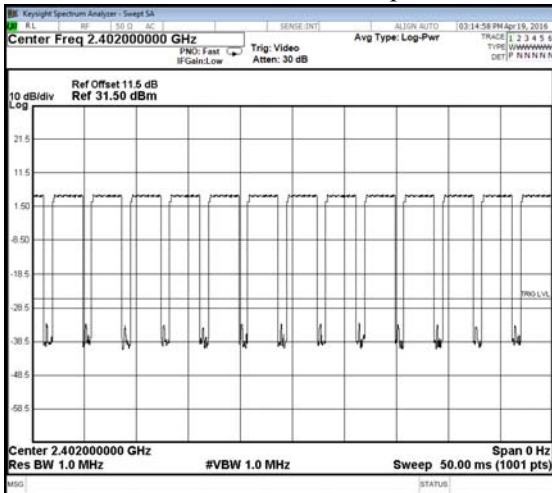


CH 00 Transmission Time

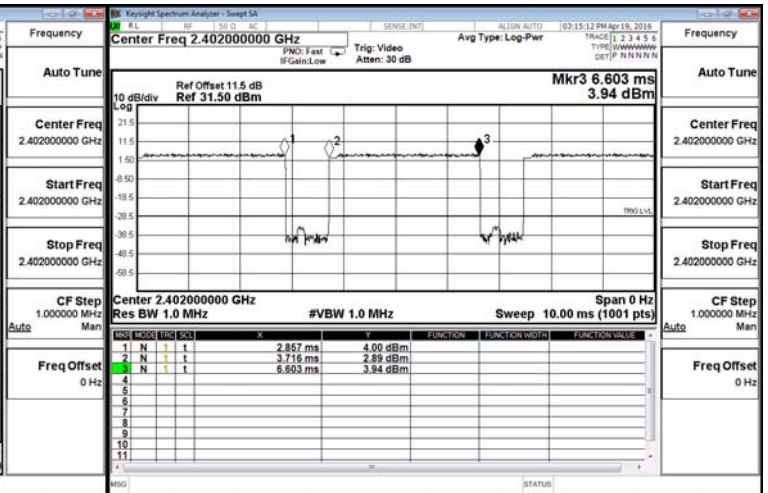

CH39 Time Interval between hops

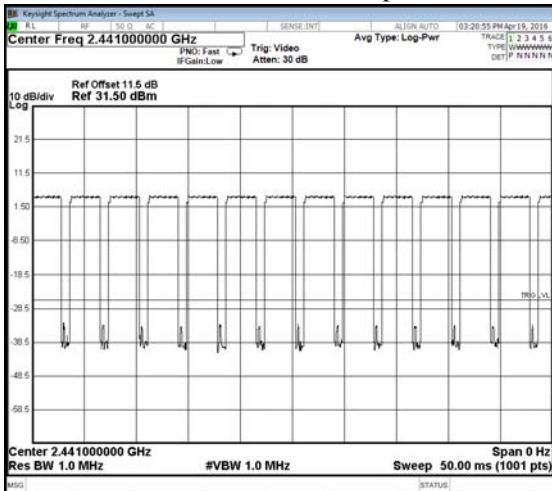


CH 39 Transmission Time

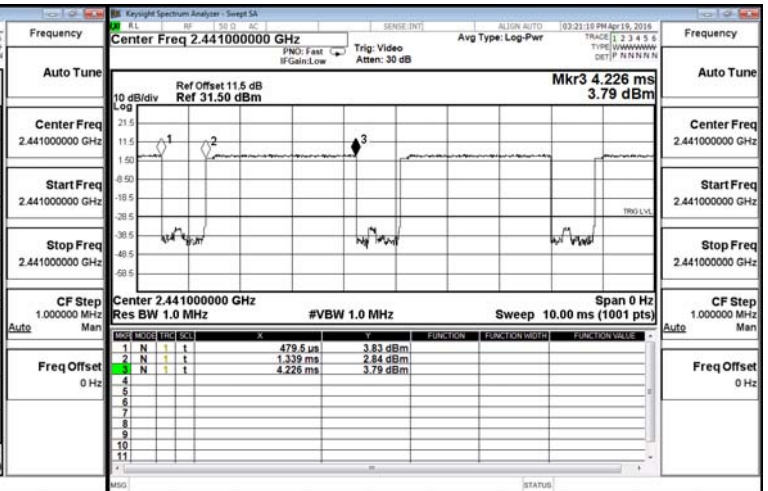

CH 78 Time Interval between hops

CH 78 Transmission Time

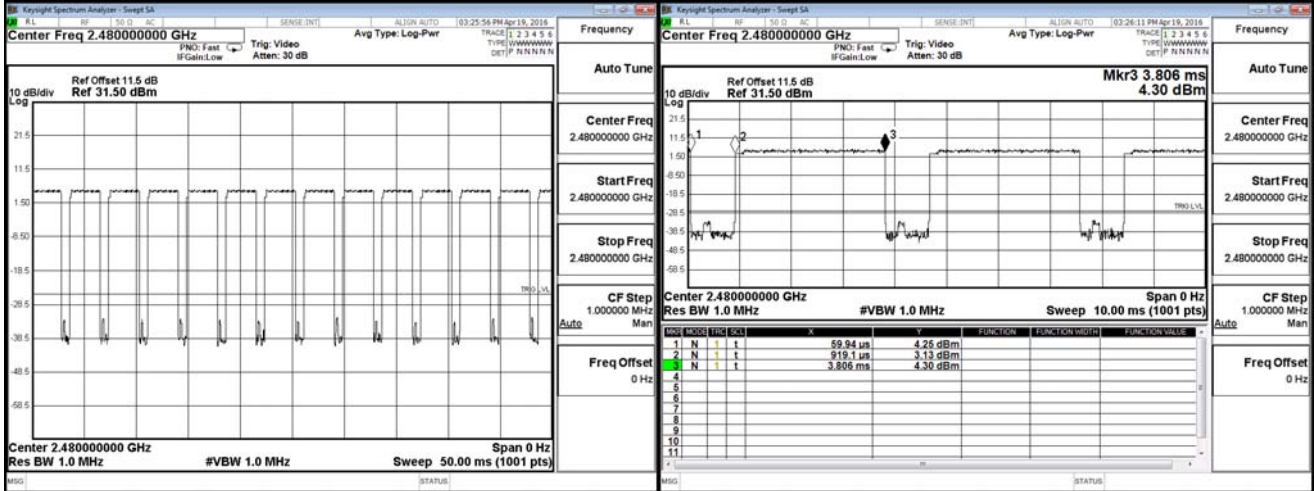

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


**10. Occupied Bandwidth**

**10.1. Test Equipment**

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2016

Note: 1. All equipments are calibrated every one year.  
2. The test instruments marked by “X” are used to measure the final test results.

**10.2. Test Setup**

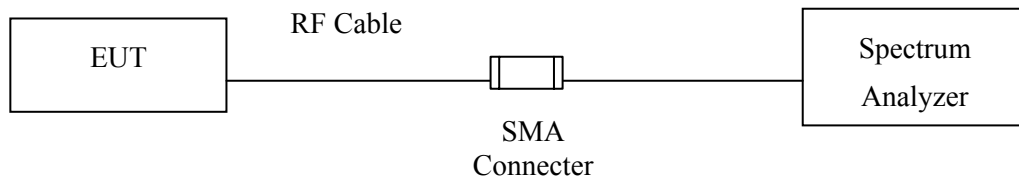

**10.3. Limits**

N/A

**10.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

**10.5. Uncertainty**

± 150Hz

### 10.6. Test Result of Occupied Bandwidth

Product : Fixed Computer  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1110	--	NA
39	2441	1110	--	NA
78	2480	1110	--	NA

Figure Channel 00:

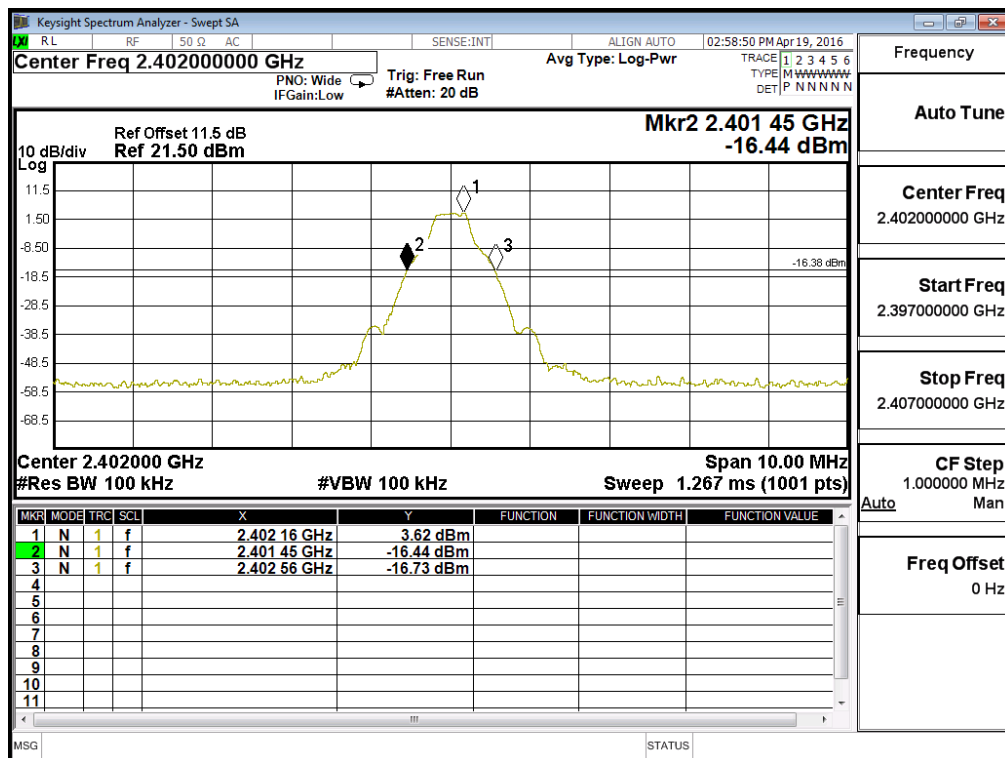


Figure Channel 39:


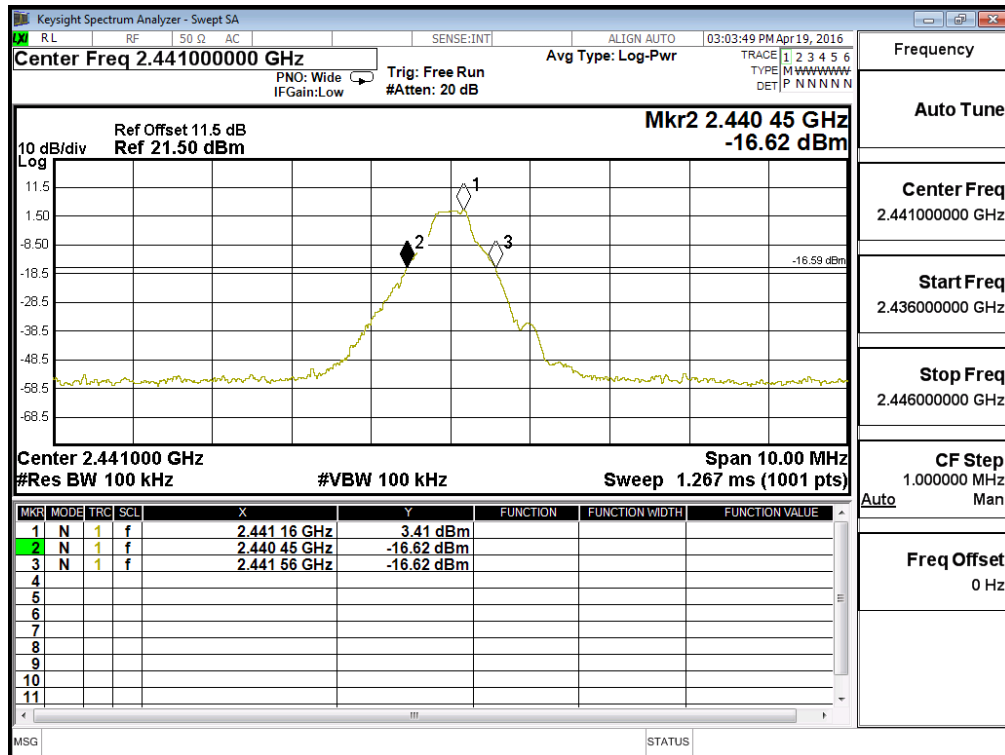


Figure Channel 78:



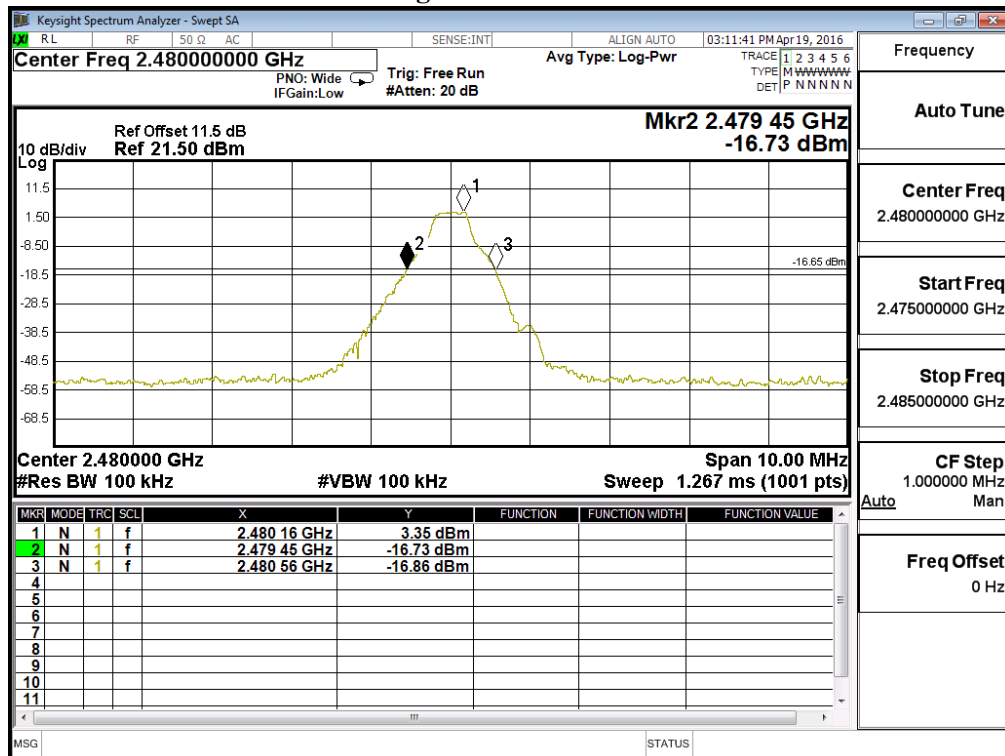

Product : Fixed Computer  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1420	--	NA
39	2441	1420	--	NA
78	2480	1430	--	NA

Figure Channel 00:

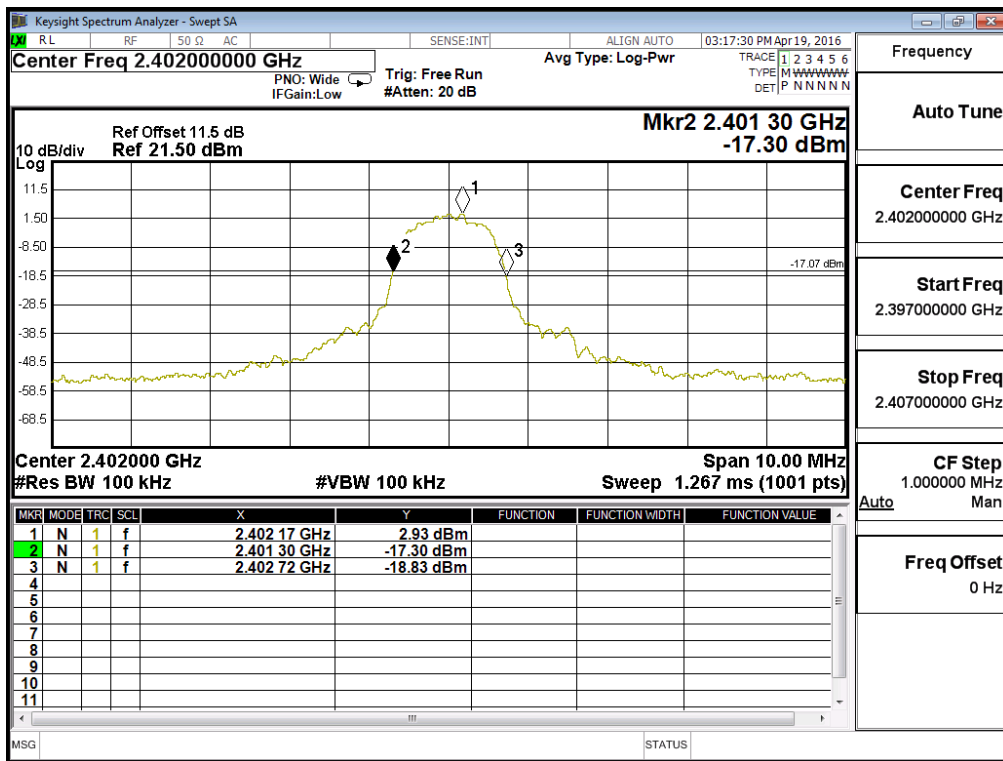


Figure Channel 39:


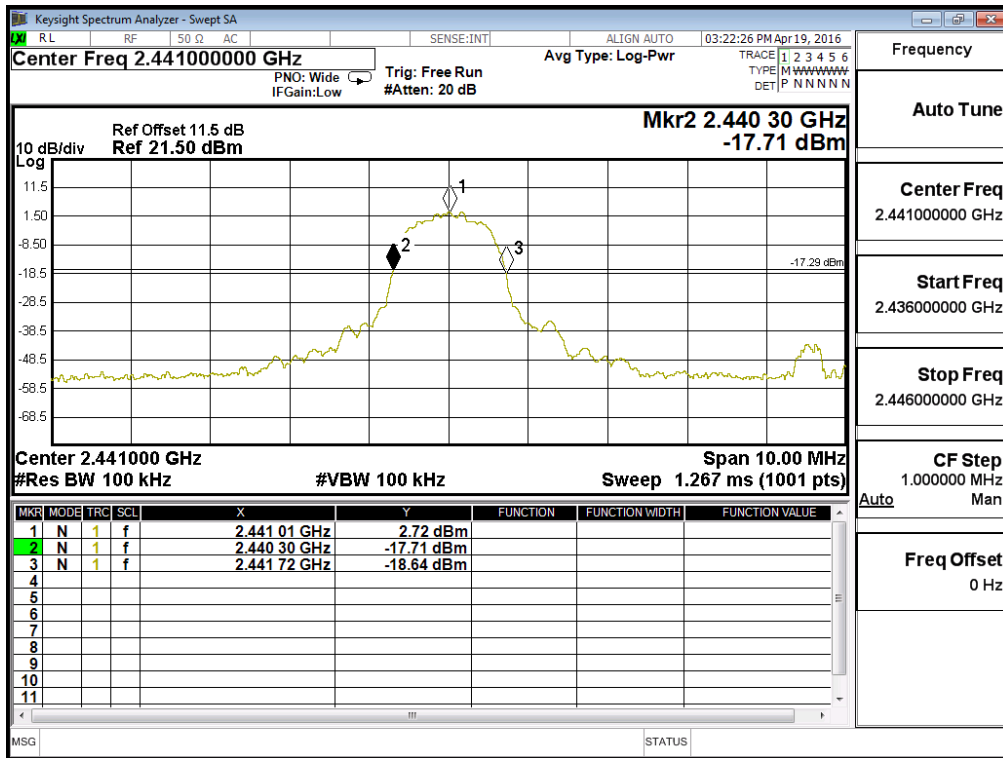


Figure Channel 78:

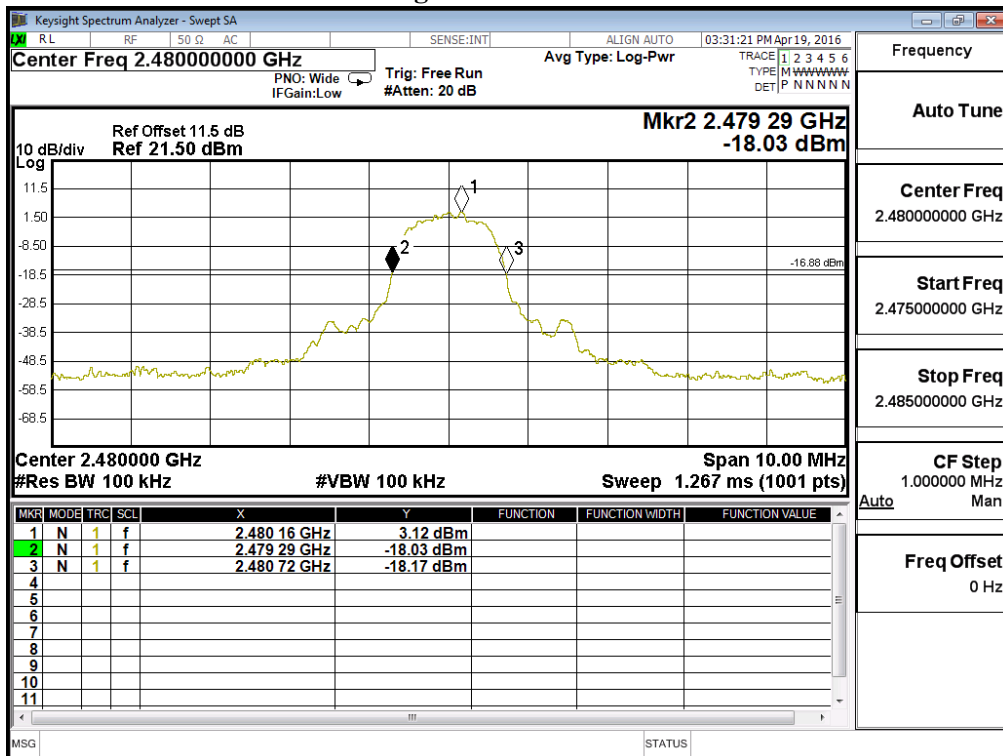

**11. EMI Reduction Method During Compliance Testing**

No modification was made during testing.

## Attachment 1: EUT Test Photographs

## Attachment 2: EUT Detailed Photographs