

RF Exposure Test Report

Report No.: SA191002E01

FCC ID: JNZPR0004

Test Model: PR0004

Received Date: Oct. 02, 2019

Test Date: Oct. 05 to Nov. 15, 2019

Issued Date: Dec. 02, 2019

Applicant: LOGITECH FAR EAST LTD.

Address: #2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 General Information	5
2.1 General Description of EUT	5
3 RF Exposure	6
3.1 Description of Support Units	6
3.1.1 Configuration of System under Test	6
3.2 Test Setup	7
3.3 Test Instruments	7
3.4 Limits for Maximum Permissible Exposure (MPE)	8
3.5 Test Point Description	8
4 Calculation Result of Maximum Conducted Power	9
5 Photographs of the Test Configuration	13

Release Control Record

Issue No.	Description	Date Issued
SA191002E01	Original release.	Dec. 02, 2019

1 Certificate of Conformity

Product: Powered Wireless Charging Pad

Brand: Logitech

Test Model: PR0004

Sample Status: ENGINEERING SAMPLE

Applicant: LOGITECH FAR EAST LTD.

Test Date: Oct. 05 to Nov. 15, 2019

Standards: FCC Part 2 (Section 2.1091)

FCC Part 1 (Section 1.1307(c) and (d), Section 1.1310)

KDB 680106 D01 RF Exposure Wireless Charging v03

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :

Vivian Huang

Vivian Huang / Specialist

, **Date:**

Dec. 02, 2019

Approved by :

Clark Lin

Clark Lin / Technical Manager

, **Date:**

Dec. 02, 2019

2 General Information

2.1 General Description of EUT

Product	Powered Wireless Charging Pad
Test Model	PR0004
Sample Status	ENGINEERING SAMPLE
Rating	DC 19V from power adapter
Operating Frequency	127.795 kHz
Antenna Type	Coil Antenna
Field Strength	80.14dBuV/m
Dimensions	85*85*13 mm
Accessory Device	Adapter x1
Data Cable Supplied	NA
Maximum Power Output from the Charging Coil	10W

Note:

1. The EUT may have a lot of colors for marketing requirement.
2. The EUT could be supplied with a power adapter as the following table:

Adapter No.	Brand	Model No.	Spec.	Color
1	logi	AD2103320	Input: 100-240V, 0.7A, 50/60Hz Output: 19V, 1.32A DC Cable: 1.5m	White
2	logi	AD2103320	Input: 100-240V, 0.7A, 50/60Hz Output: 19V, 1.32A DC Cable: 1.5m	Black

Note: From the above adapters, **Adapter 1** was selected as representative adapter for the test and its data was recorded in this report.

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 RF Exposure

3.1 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Loading 10W	NA	NA	NA	NA	Supplied by client(for RF Setup)
B.	Smart Phone	Apple	A2101	NA	NA	Supplied by client


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.5	No	0	Supplied by client

3.1.1 Configuration of System under Test


Charging Mode

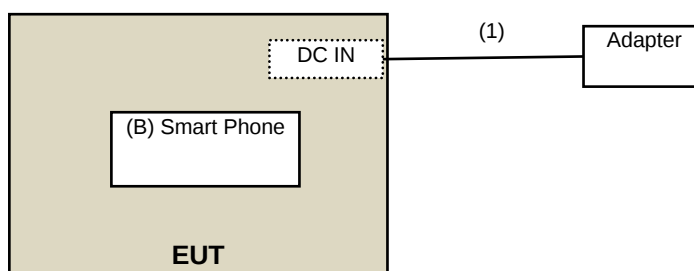

Standby Mode:

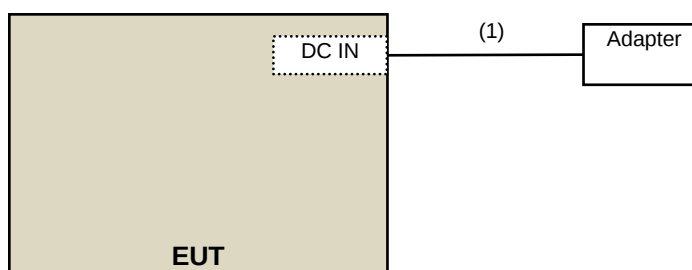

3.2 Test Setup

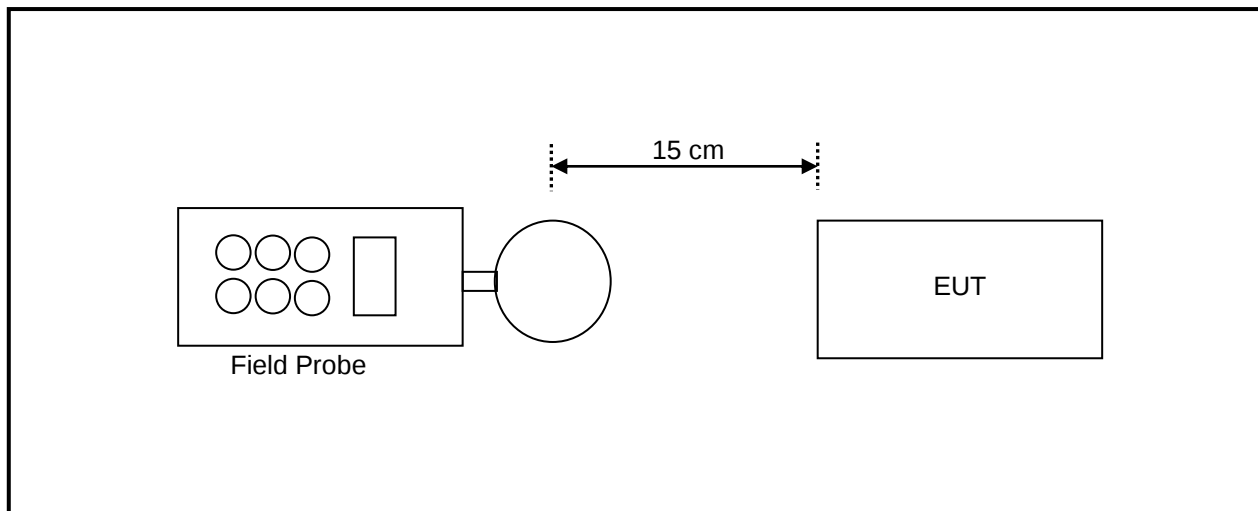

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device.

3.3 Test Instruments

Description	Brand	Model No.	Frequency Range	Calibrated Date	Calibrated Until
MagneticField Meter	NARDA	ELT-400	1 – 400kHz	Apr. 12, 2018	Apr. 11, 2020
Magnetic Probe	NARDA	HF-0191	27 – 1000MHz	Apr. 17, 2018	Apr. 16, 2020
Electric Field Meter	COMBINOVA	EFM 200	5Hz – 400kHz	Dec. 6, 2017	Dec. 5, 2019
E-Field Probe	NARDA	EF-0391	100kHz – 3GHz	Mar. 28, 2018	Mar. 27, 2020

- NOTE:** 1. The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

3.4 Limits for Maximum Permissible Exposure (MPE)

§ 1.1310 The criteria listed in table 1 shall be used to evaluate the environmental impact of human exposure to radiofrequency(RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of § 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density


NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

680106 D01 RF Exposure Wireless Charging App v03

The aggregate H-field strengths at 15 cm surrounding the device and above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

3.5 Test Point Description

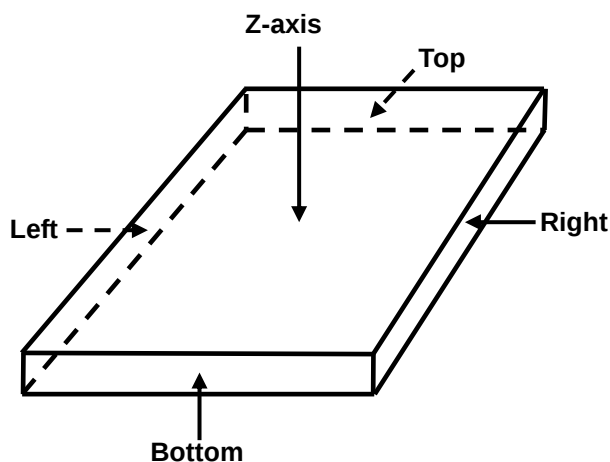

4 Calculation Result of Maximum Conducted Power

Charging Mode

Charging 10%

E-Field Measurement					
Distance	15cm				15cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	0.9600	0.7300	0.9200	0.6400	1.5400
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-613.0400	-613.2700	-613.0800	-613.3600	-612.4600
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-306.0400	-306.2700	-306.0800	-306.3600	-305.4600

H-Field Measurement					
Distance	15cm				15cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.1650	0.1510	0.1490	0.1590	0.7530
Max E-field (A/m)	0.1320	0.1208	0.1192	0.1272	0.6024
Limit (V/m)	1.63	1.63	1.63	1.63	1.63
Margin (V/m)	-1.4980	-1.5092	-1.5108	-1.5028	-1.0276
50 % Limit (V/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (V/m)	-0.6830	-0.6942	-0.6958	-0.6878	-0.2126

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging 50%

E-Field Measurement					
Distance	15cm				15cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	0.7100	0.5500	0.7200	0.5100	0.8200
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-613.2900	-613.4500	-613.2800	-613.4900	-613.1800
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-306.2900	-306.4500	-306.2800	-306.4900	-306.1800

H-Field Measurement					
Distance	15cm				15cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.1370	0.1360	0.1280	0.1400	0.6100
Max H-field (A/m)	0.1096	0.1088	0.1024	0.1120	0.4880
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5204	-1.5212	-1.5276	-1.5180	-1.1420
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7054	-0.7062	-0.7126	-0.7030	-0.3270

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging 90%

E-Field Measurement					
Distance	15cm				15cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	0.5300	0.4600	0.6100	0.4500	0.7100
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-613.4700	-613.5400	-613.3900	-613.5500	-613.2900
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-306.4700	-306.5400	-306.3900	-306.5500	-306.2900

H-Field Measurement					
Distance	15cm				15cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.1220	0.1280	0.1160	0.1200	0.5300
Max H-field (A/m)	0.0976	0.1024	0.0928	0.0960	0.4240
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5324	-1.5276	-1.5372	-1.5340	-1.2060
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7174	-0.7126	-0.7222	-0.7190	-0.3910

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Standby Mode

E-Field Measurement					
Distance	15cm				15cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	0.2200	0.2300	0.3300	0.3100	0.2500
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-613.7800	-613.7700	-613.6700	-613.6900	-613.7500
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-306.7800	-306.7700	-306.6700	-306.6900	-306.7500

H-Field Measurement					
Distance	15cm				15cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.0580	0.0600	0.0590	0.0600	0.2280
Max H-field (A/m)	0.0464	0.0480	0.0472	0.0480	0.1824
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5836	-1.5820	-1.5828	-1.5820	-1.4476
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7686	-0.7670	-0.7678	-0.7670	-0.6326

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

5 Photographs of the Test Configuration

Please refer to the attached file (Test Setup Photo).

--- END ---