

Report on the RF Testing of:

KYOCERA Corporation
Mobile Phone, Model: EB1017
FCC ID: JOYEB1017

In accordance with FCC Part 22 Subpart H

Prepared for: KYOCERA Corporation
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku
Yokohama-shi, Kanagawa, Japan
Phone: +81-45-943-6253 Fax: +81-45-943-6314



Japan

**Add value.
Inspire trust.**

COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-20154-0

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	17 JUL 2020

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

EXECUTIVE SUMMARY - Result: Complied

A sample(s) of this product was tested and the result above was confirmed in accordance with FCC Part 22 Subpart H.



Certificate #3686.03

DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.
This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

TÜV SÜD Japan Ltd.
Yonezawa Testing Center
5-4149-7 Hachimanpara,
Yonezawa-shi, Yamagata,
992-1128 Japan

Phone: +81 (0) 238 28 2881
Fax: +81 (0) 238 28 2888
www.tuv-sud.jp

Contents

1	Summary of Test	3
1.1	Modification history of the test report	3
1.2	Standards	3
1.3	Test methods	3
1.4	Deviation from standards	3
1.5	List of applied test(s) of the EUT	3
1.6	Test information	3
1.7	Test set up	3
1.8	Test period	3
2	Equipment Under Test	4
2.1	EUT information	4
2.2	Modification to the EUT	5
2.3	Variation of family model(s)	5
2.4	Description of test mode	5
3	Configuration of Equipment	6
3.1	Equipment used	6
3.2	System configuration	6
4	Test Result	7
4.1	Effective Radiated Power	7
4.2	Occupied Bandwidth	10
4.3	Band Edge Spurious and Harmonic at Antenna Terminals	14
4.4	Radiated Emissions and Harmonic Emissions	25
4.5	Frequency Stability	29
5	Measurement Uncertainty	31
6	Laboratory Information	32
	Appendix A. Test Equipment	33

1 Summary of Test

1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-20154-0	First Issue	Refer to the cover page

1.2 Standards

CFR47 FCC Part 22 Subpart H

1.3 Test methods

KDB 971168 D01 Power Meas License Digital Systems v03r01
ANSI/TIA/EIA-603-D-2010

1.4 Deviation from standards

None

1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
2.1046	Conducted Output Power	Conducted	PASS	*1
22.913(a)	Effective Radiated Power	Radiated	PASS	-
22.917(a) 2.1049	Occupied Bandwidth	Conducted	PASS	-
22.917(a) 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS	-
22.917(a) 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS	-
22.355 2.1055	Frequency Stability	Conducted	PASS	-

*1: Refer to RF Exposure Report (Test Report_SAR)

1.6 Test information

None

1.7 Test set up

Table-top

1.8 Test period

22-May-2020 - 3-July-2020

2 Equipment Under Test

2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Mobile Phone
Model number	EB1017
Serial number	N/A
Trade name	Kyocera
Number of sample(s)	1
EUT condition	Pre-Production
Power rating	Battery: DC 3.85 V
Size	(W) 73.0 × (D) 153.0 × (H) 8.9 mm
Environment	Indoor and Outdoor use
Terminal limitation	-20°C to 60°C
Hardware version	DMT1.5
Software version	0.040RE.0022.a
Firmware version	Not applicable
RF Specification	
Frequency of Operation	Up Link GSM850: 824.2-848.8 MHz WCDMA Band V: 826.4-846.6 MHz Down Link GSM850: 869.2-893.8 MHz WCDMA Band V: 871.4-891.6 MHz
Modulation type	GSM850: GMSK WCDMA Band V: QPSK, 16QAM
Emission designator	GSM850: 244KGXW WCDMA Band V: 4M17F9W
Effective Radiated Power (E.R.P.)	GSM850: 1.8621 W (32.7 dBm) WCDMA Band V: 0.1514 W (21.8 dBm)
Antenna type	Internal antenna
Antenna gain	GSM850: -5.3 dBi WCDMA Band V: -5.3 dBi

2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: EB1017, Serial Number: N/A			
0	As supplied by the applicant	Not Applicable	Not Applicable

2.3 Variation of family model(s)

2.3.1 List of family model(s)

Not applicable

2.3.2 Reason for selection of EUT

Not applicable

2.4 Description of test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	Channel	Frequency [MHz]
GSM850	128	824.2
	190	836.6
	251	848.8
WCDMA Band V	4132	826.4
	4183	836.6
	4233	846.6

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X-axis (GSM850, WCDMA Band V) and the worst case recorded. Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.

3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.2 System configuration” correspond to the list in “3.1 Equipment used”.

Cabling and setup(s) were taken into consideration and test data was taken under worse case condition.

3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Mobile Phone	KYOCERA	EB1017	N/A	JOYEB1017	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

4 Test Result

4.1 Effective Radiated Power

4.1.1 Measurement procedure

[FCC 22.913(a)]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Log periodic antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- Span = 1.5 times the OBW
- RBW = 1-5% of the expected OBW, not to exceed 1 MHz
- VBW $\geq 3 \times$ RBW
- Number of sweep points $\geq 2 \times$ span / RBW
- Sweep time = auto-couple
- Detector = RMS (power averaging)
- If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

- Test configuration

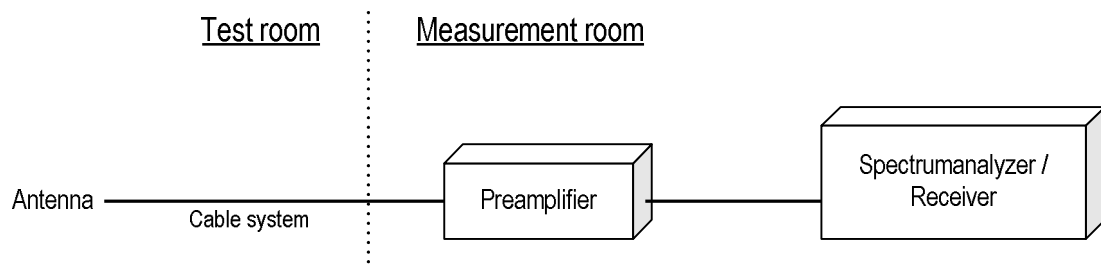



Japan

4.1.2 Calculation method

Result (ERP) = Ant. Input - Cable loss + Antenna Gain

Margin = Limit – Result (ERP)

Example:

Limit @ 836.6 MHz : 38.4 dBm

Ant. Input = 33.3 dBm Cable loss = 0.7 dB Ant. Gain = -10.7 dBd

Result = $33.3 - 0.7 + (-10.7) = 21.9$ dBm

Margin = $38.45 - 21.9 = 16.55$ dB

4.1.3 Limit

7 W (38.45 dBm)

4.1.4 Test data

Date : 22~23-May-2020
 Temperature : 19.7 [°C]
 Humidity : 53.3 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

Date : 29-May-2020
 Temperature : 21.0 [°C]
 Humidity : 40.4 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino

[GSM850]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	824.2	-12.9	40.0	0.8	-6.5	32.7	38.45	5.7
H	836.6	-14.8	38.3	0.8	-6.5	31.0	38.45	7.4
H	848.8	-16.8	36.7	0.8	-6.5	29.4	38.45	9.1

[WCDMA Band V]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	826.4	-14.5	29.0	0.8	-6.5	21.8	38.45	16.7
H	836.6	-15.5	28.4	0.8	-6.5	21.1	38.45	17.3
H	846.6	-16.7	27.4	0.8	-6.5	20.1	38.45	18.3

4.2 Occupied Bandwidth

4.2.1 Measurement procedure


[FCC 22.917(a), 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal. The spectrum analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth.

The spectrum analyzer is set to;

- a) RBW = 1-5% of the expected OBW & VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

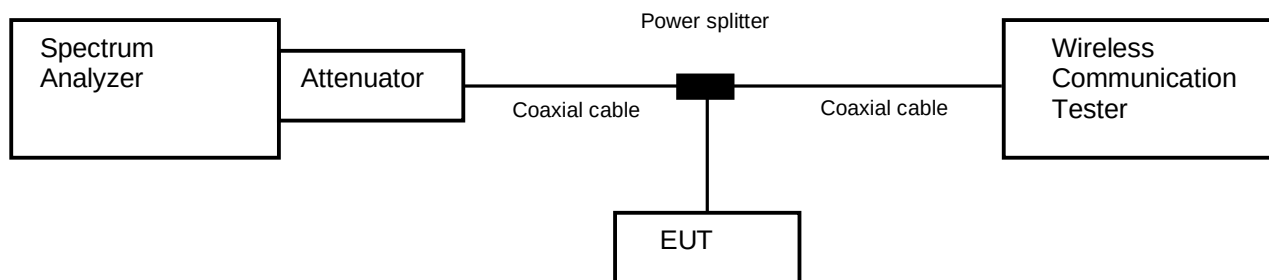

4.2.2 Limit

None

4.2.3 Measurement result

Date : 29-June-2020

Temperature : 23.4 [°C]

Humidity : 55.3 [%]

Test place : Shielded room No.4

Test engineer :


Kazunori Saito

Band	Channel	Frequency (MHz)	Test Result (kHz)
GSM850	128	824.2	243.5848
	190	836.6	243.7570
	251	848.8	244.3045
WCDMA Band V	4132	826.4	4172.6
	4183	836.6	4166.7
	4233	846.6	4165.5


4.2.4 Trace data

[GSM850]


Channel: 128

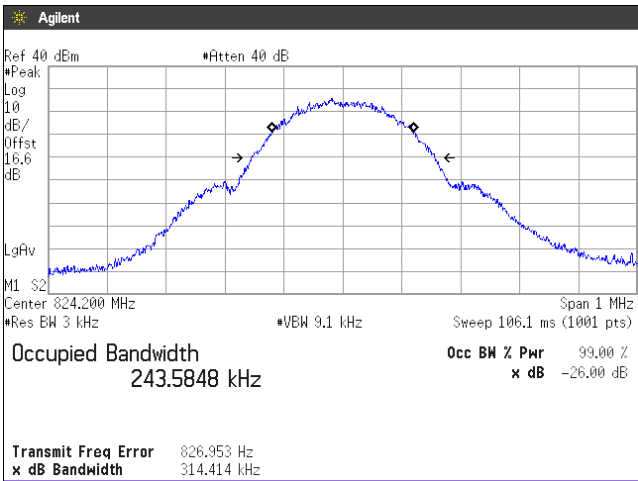


Channel: 190

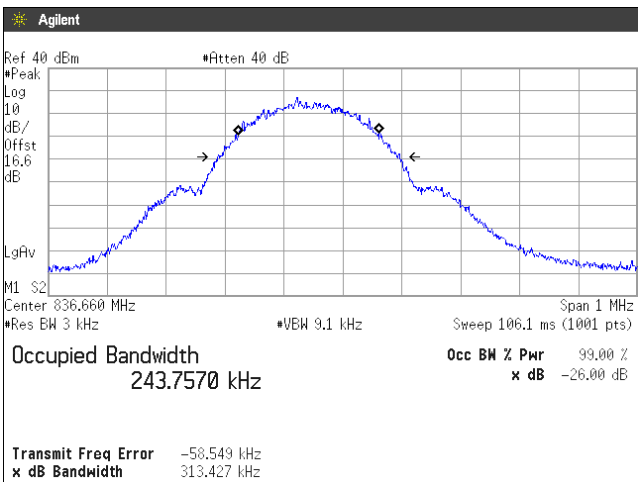


Channel: 251

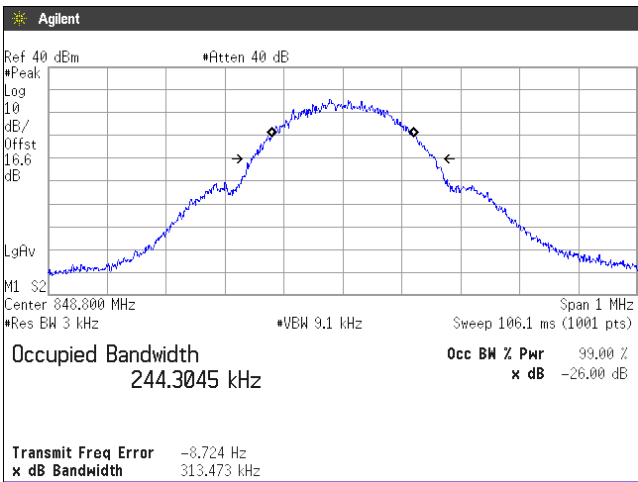


[WCDMA Band V]
Channel: 4132

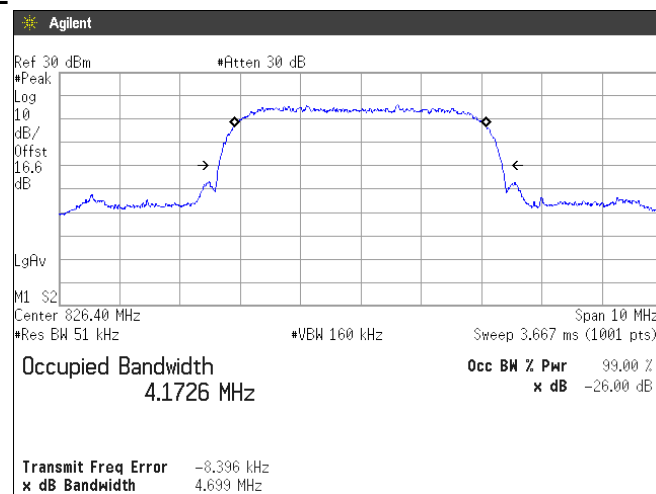

Channel: 4183

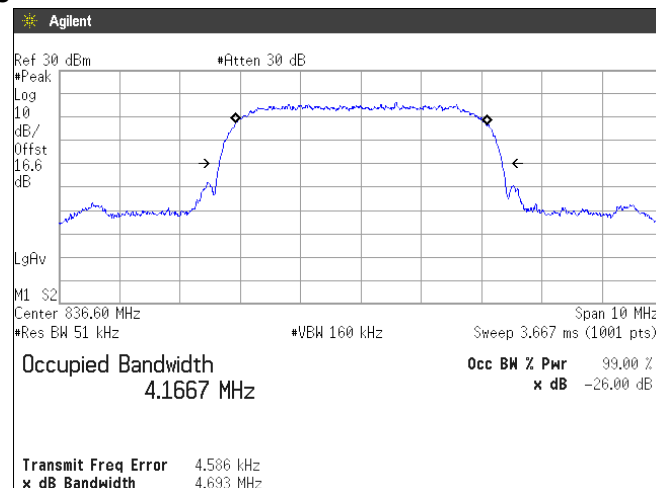

Channel: 4233

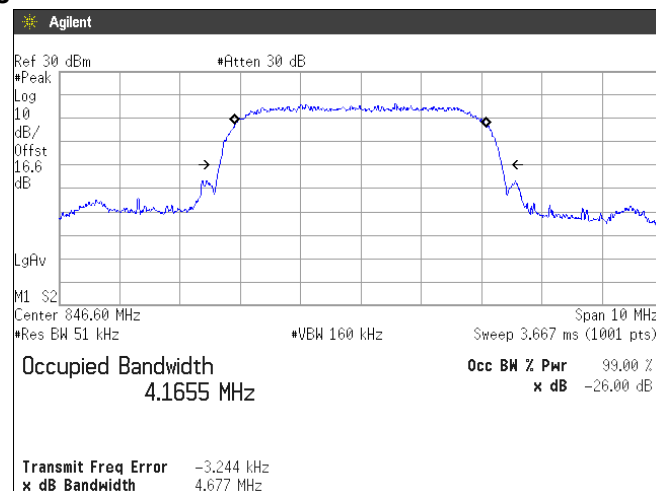

4.3 Band Edge Spurious and Harmonic at Antenna Terminals

4.3.1 Measurement procedure

[FCC 22.917(a), 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- a) Span was set large enough so as to capture all out of band emissions near the band edge
- b) $RBW \geq 1\%$ of the emission bandwidth or 2% of the emission bandwidth
- c) $VBW \geq 3 \times RBW$
- d) Detector = RMS
- e) Trace mode = Max hold
- f) Sweep time = auto-couple
- g) Number of sweep point $\geq 2 \times \text{span} / RBW$

<Spurious Emissions>

- a) $RBW = 1\text{MHz}$ & $VBW \geq 3 \times RBW$
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple
- e) Number of sweep point $\geq 2 \times \text{span} / RBW$

- Test configuration

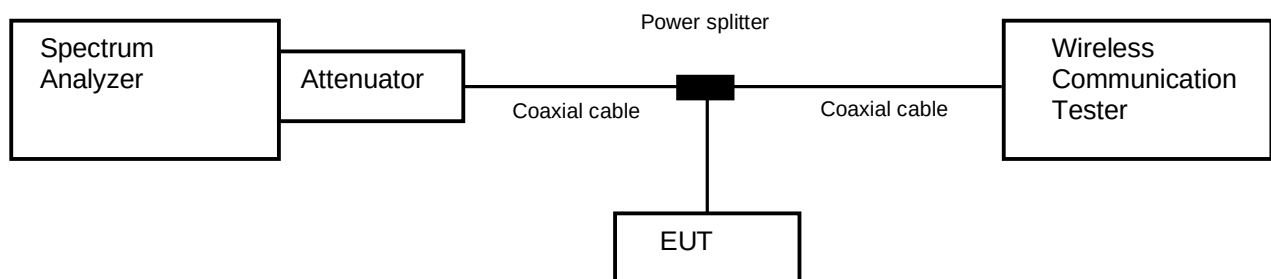

4.3.2 Limit

-13 dB or less

4.3.3 Measurement result

Date : 29-June-2020

Temperature : 23.4 [°C]

Humidity : 55.3 [%]

Test place : Shielded room No.4


Test engineer :

Kazunori Saito


Band	Channel	Frequency [MHz]	Limit [dB]	Results	
GSM850	128	824.2	-13.0	See the trace data	PASS
	190	836.6	-13.0	See the trace data	PASS
	251	848.8	-13.0	See the trace data	PASS
WCDMA Band V	4132	826.4	-13.0	See the trace data	PASS
	4183	836.6	-13.0	See the trace data	PASS
	4233	846.6	-13.0	See the trace data	PASS

4.3.4 Trace data

[GSM850]
(Band Edge)
Channel: 128

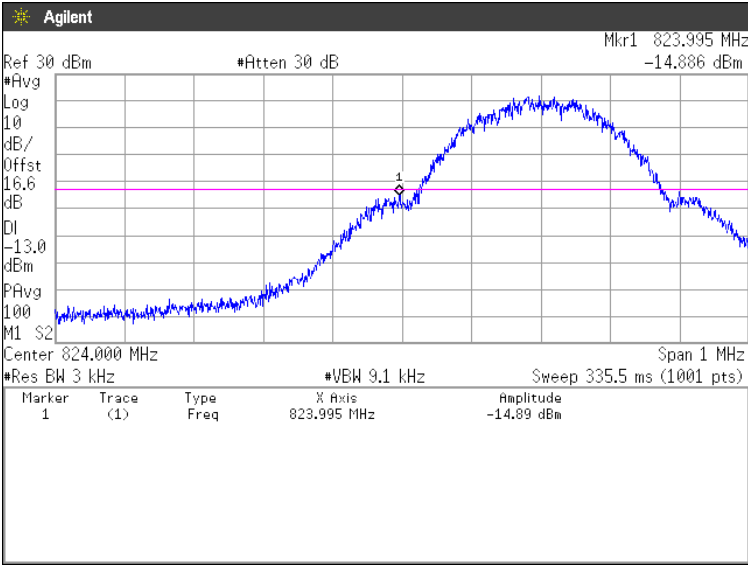


Channel: 251

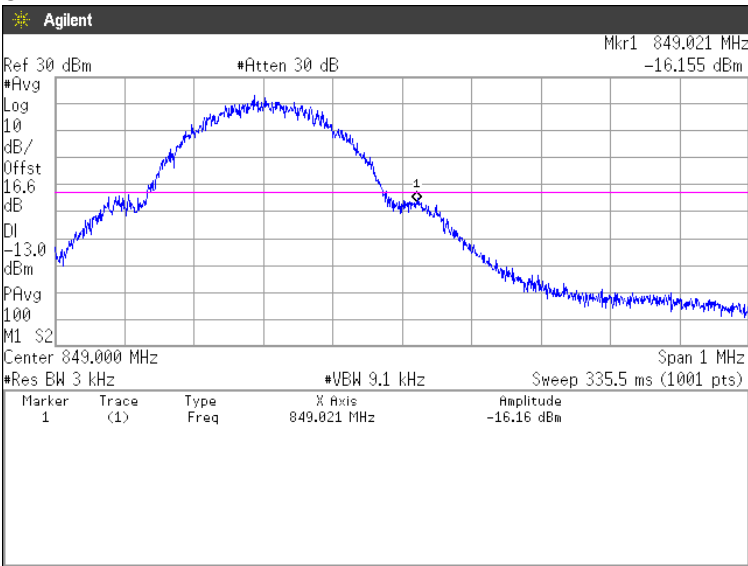


(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of conducted output power.


Channel: 128
30MHz-5GHz

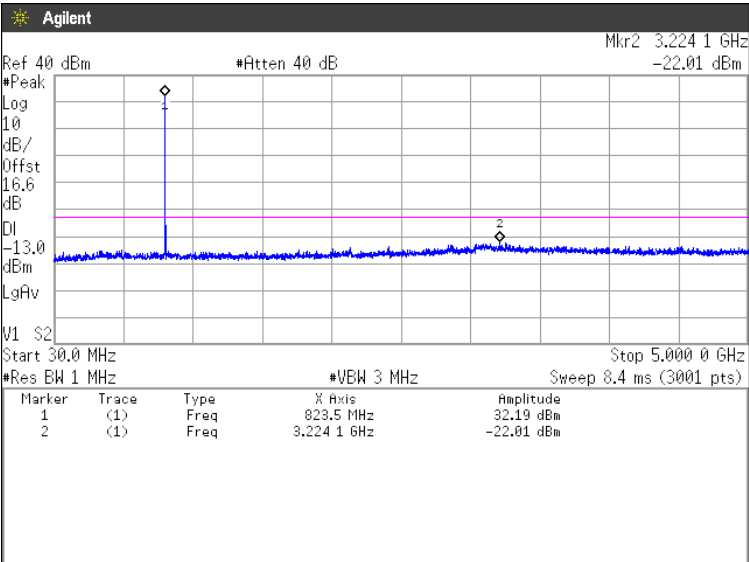


5GHz-10GHz

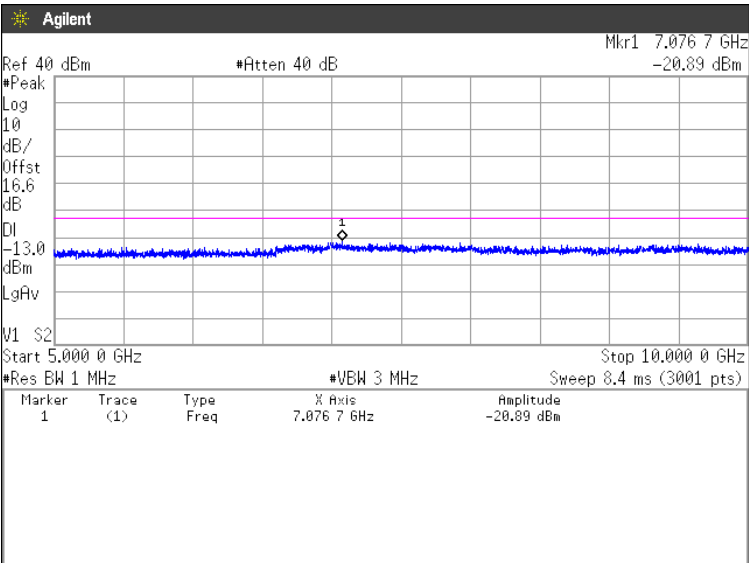


Channel: 190
30MHz-5GHz

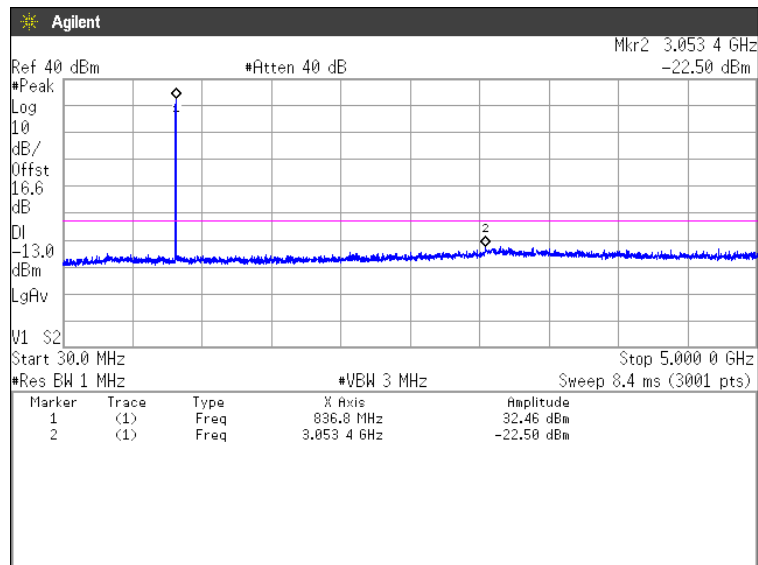


5GHz-10GHz

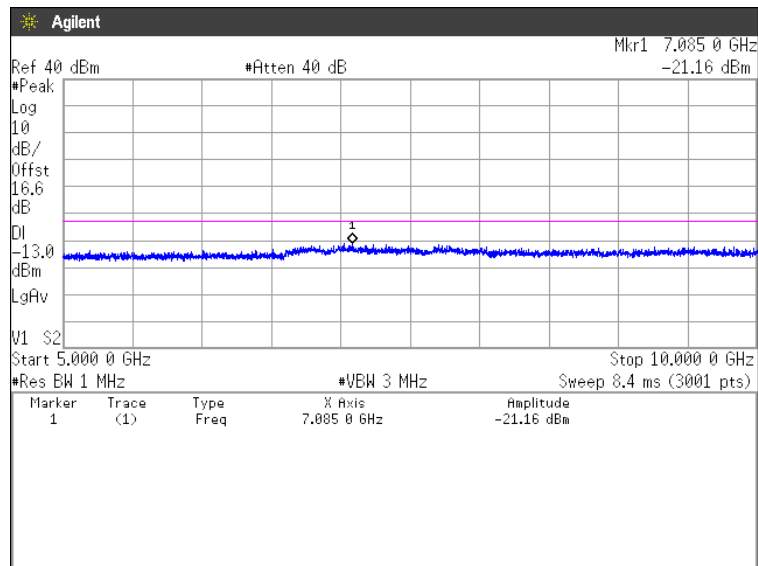

Channel: 251
30MHz-5GHz


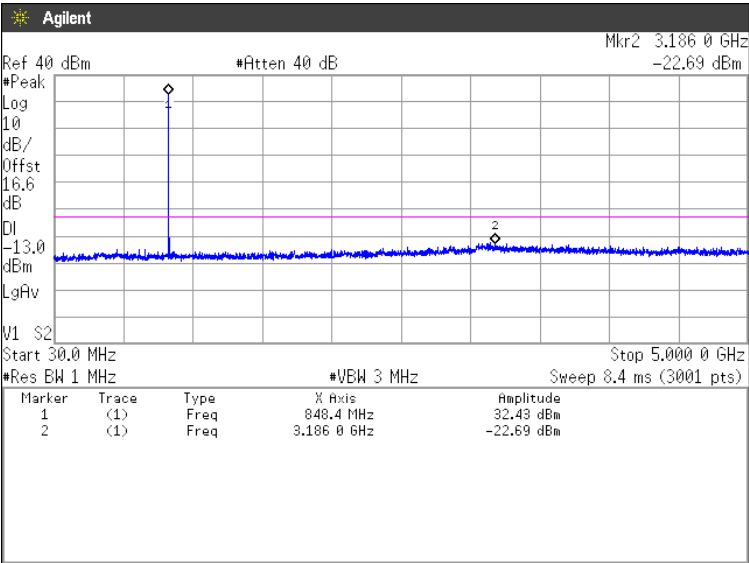


5GHz-10GHz

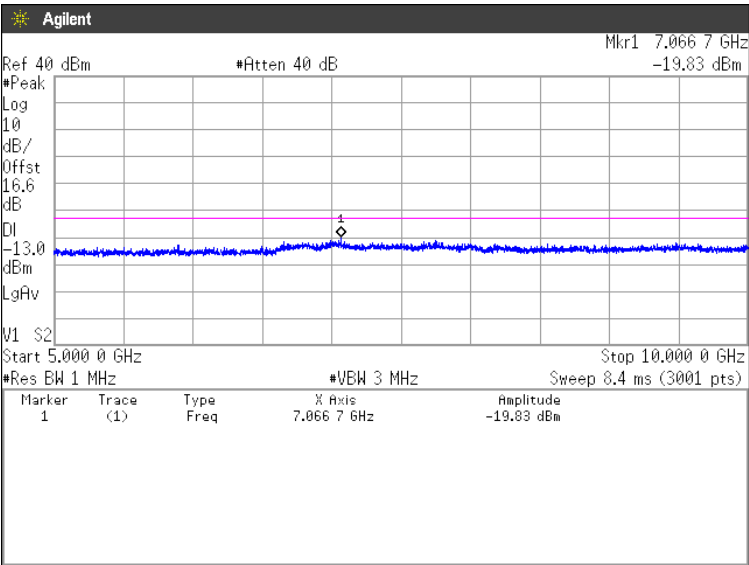

[WCDMA Band V]
(Band Edge)



Channel: 4132

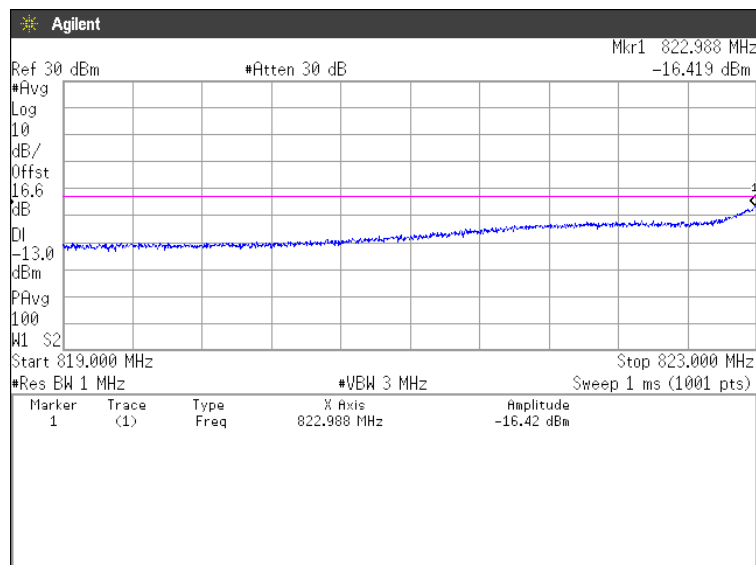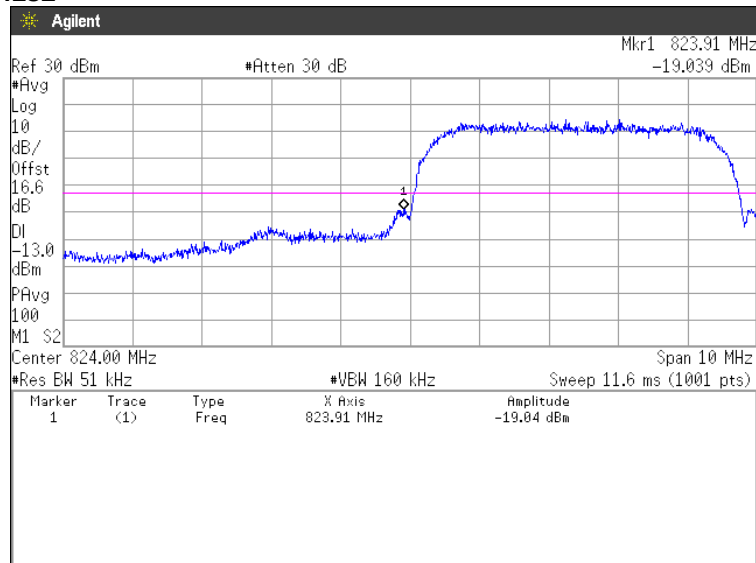



Japan

Channel: 4233

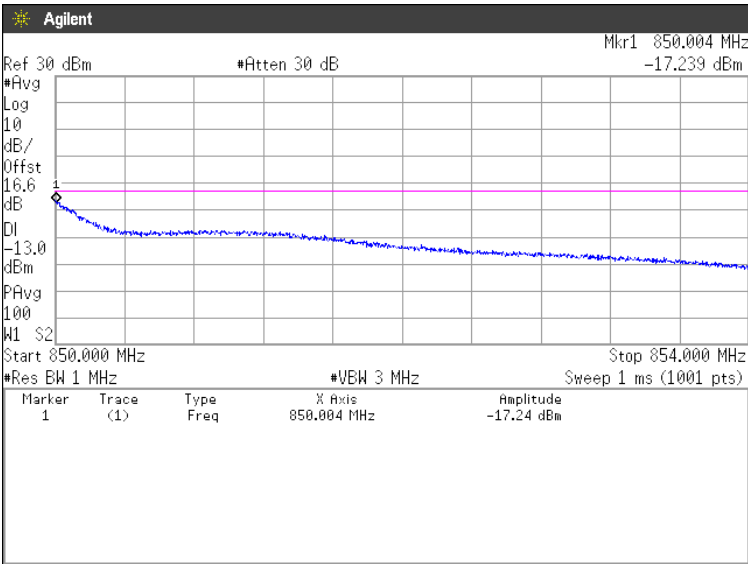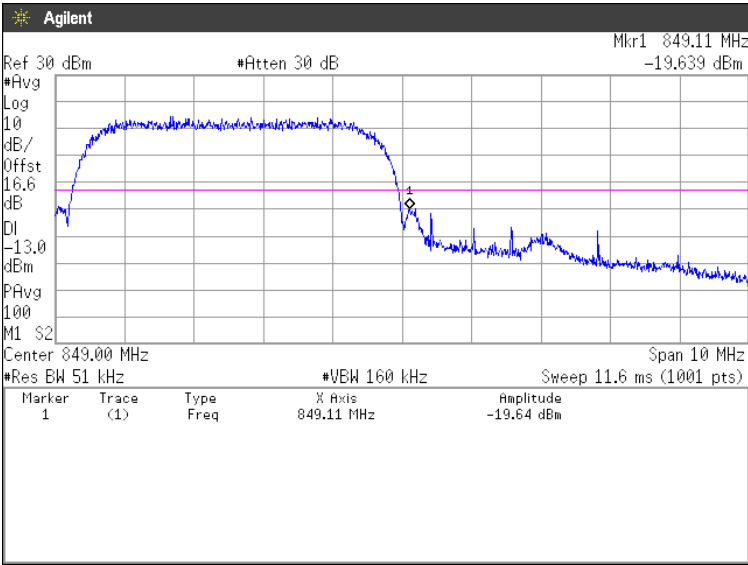


(Spurious Emissions)


Note: Conducted spurious test was measured in the worst case of conducted output power.

Channel: 4132


30MHz-5GHz

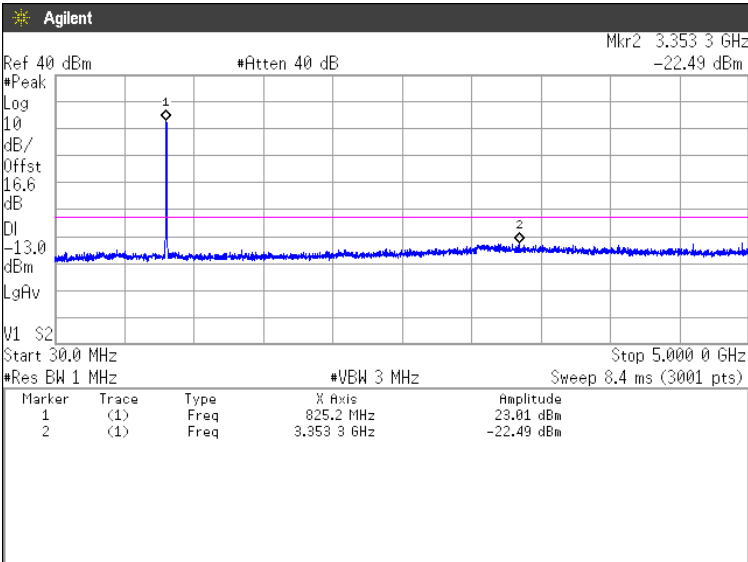


5GHz-10GHz

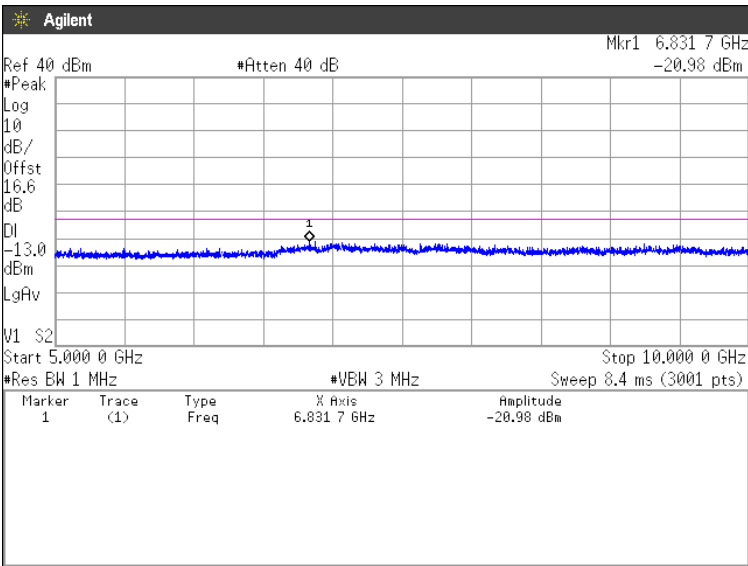


Channel: 4183
30MHz-5GHz

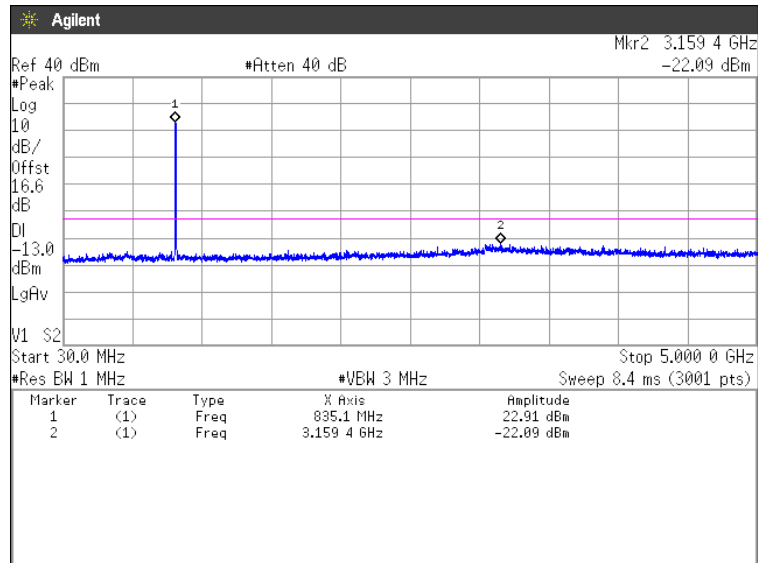


5GHz-10GHz

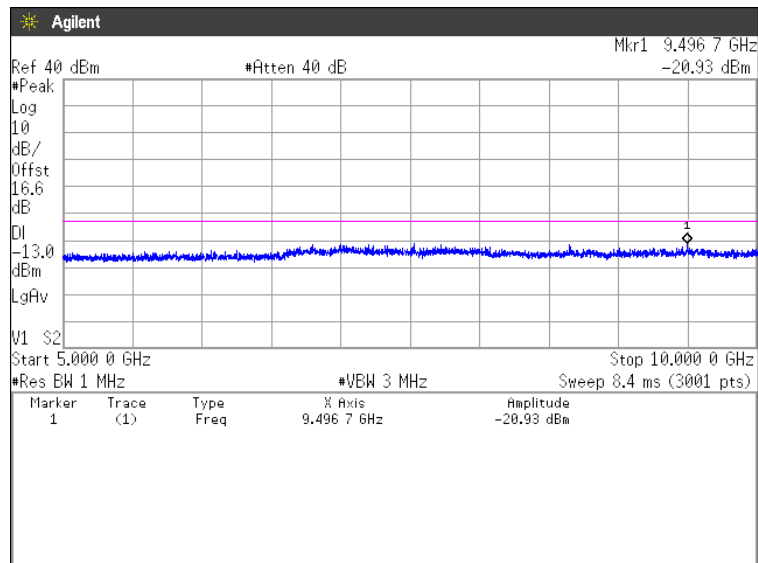

Channel: 4233
30MHz-5GHz

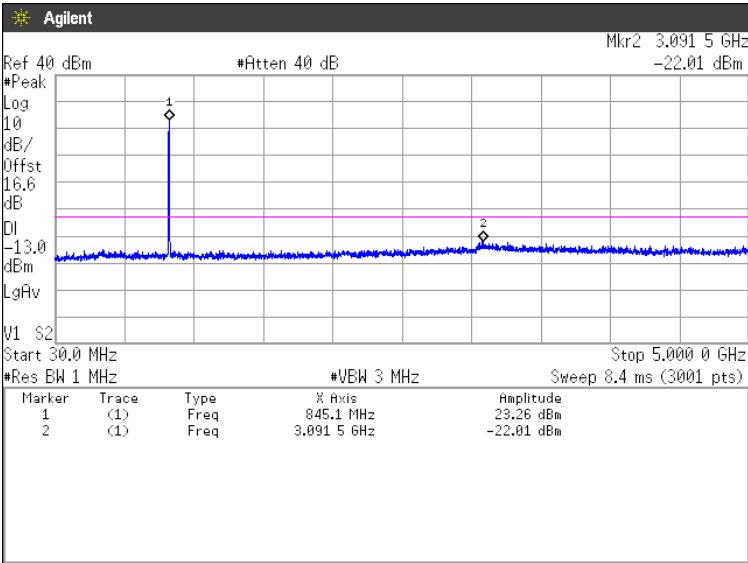

5GHz-10GHz

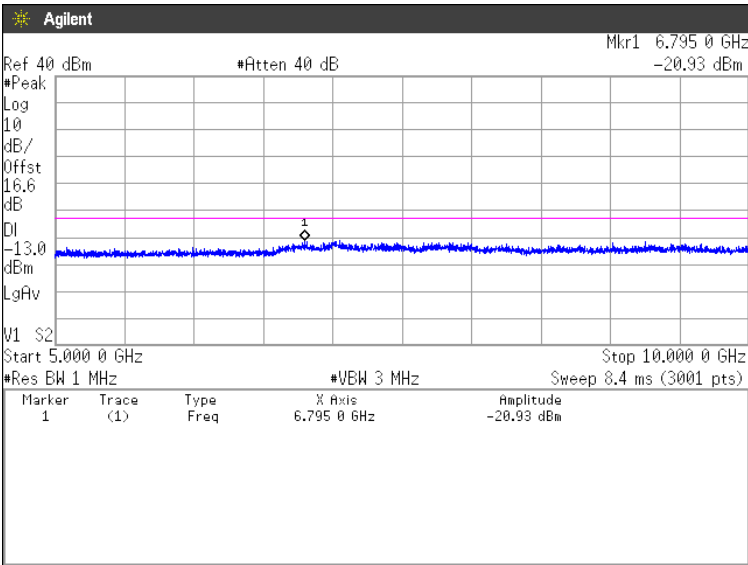

4.4 Radiated Emissions and Harmonic Emissions

4.4.1 Measurement procedure

[FCC 22.917(a), 2.1053]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) RBW = 100kHz for below 1GHz and 1MHz for above 1GHz / VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

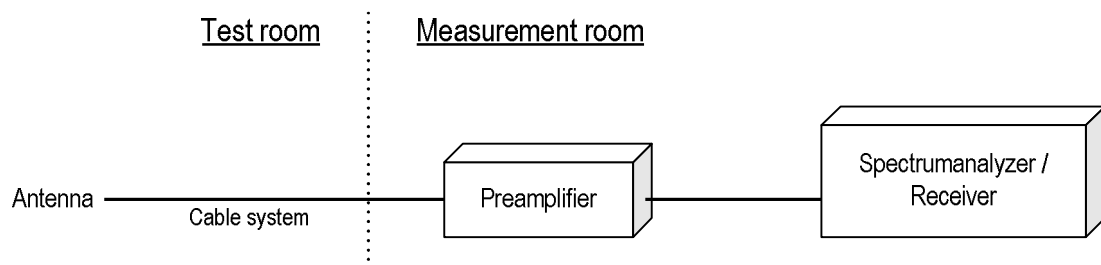



Japan

4.4.2 Calculation method

Result (ERP) = Ant. Input - Cable loss + Antenna Gain
Margin = Limit – Result (ERP)

Example:

Limit @ 1648.4 MHz : -13.0 dBm

Ant. Input = -56.4 dBm Cable loss = 1.0 dB Ant. Gain = 6.9 dBd

Result = -56.4 - 1.0 + 6.9 = -50.6 dBm

Margin = -13.0 - (-50.6) = 37.6 dB

4.4.3 Limit

-13 dBm or less

4.4.4 Test data

Date	: 26~27-May-2020	Test engineer	:	
Temperature	: 22.0 [°C]			
Humidity	: 63.4 [%]			
Test place	: 3m Semi-anechoic chamber			
				<u>Tadahiro Seino</u>
Date	: 27~28-May-2020	Test engineer	:	
Temperature	: 21.2 [°C]			
Humidity	: 56.8 [%]			
Test place	: 3m Semi-anechoic chamber			
				<u>Tadahiro Seino</u>
Date	: 29-May-2020	Test engineer	:	
Temperature	: 21.0 [°C]			
Humidity	: 40.4 [%]			
Test place	: 3m Semi-anechoic chamber			
				<u>Tadahiro Seino</u>
Date	: 1-June-2020	Test engineer	:	
Temperature	: 22.6 [°C]			
Humidity	: 54.0 [%]			
Test place	: 3m Semi-anechoic chamber			
				<u>Tadahiro Seino</u>

[GSM850]**(Channel: 128)**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1648.4	-55.2	-61.3	1.1	8.2	-54.2	-13.0	41.2
V	1648.4	-55.0	-58.9	1.1	8.2	-51.8	-13.0	38.8
H	2472.6	-54.7	-55.3	1.3	7.8	-48.8	-13.0	35.8
V	2472.6	-55.1	-52.8	1.3	7.8	-46.3	-13.0	33.3

(Channel: 190)

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1673.2	-55.1	-60.3	1.1	8.0	-53.4	-13.0	40.4
V	1673.2	-55.4	-59.1	1.1	8.0	-52.2	-13.0	39.2
H	2509.8	-55.1	-56.0	1.3	7.9	-49.4	-13.0	36.4
V	2509.8	-54.3	-52.1	1.3	7.9	-45.5	-13.0	32.5

(Channel: 251)

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1697.6	-55.2	-58.4	1.1	7.8	-51.6	-13.0	38.6
V	1697.6	-54.9	-58.1	1.1	7.8	-51.3	-13.0	38.3
H	2546.4	-54.9	-55.6	1.3	8.2	-48.8	-13.0	35.8
V	2546.4	-55.1	-55.8	1.3	8.2	-49.0	-13.0	36.0

[WCDMA Band V]
(Channel: 4132)

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1652.8	-54.6	-58.7	1.1	8.2	-51.6	-13.0	38.6

(Channel: 4183)

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1673.2	-55.2	-59.1	1.1	8.0	-52.2	-13.0	39.2

(Channel: 4233)

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1693.2	-55.1	-59.4	1.1	7.9	-52.6	-13.0	39.6


4.5 Frequency Stability

4.5.1 Measurement procedure

[FCC 22.355, 2.1055]

The EUT was placed inside of a constant temperature chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

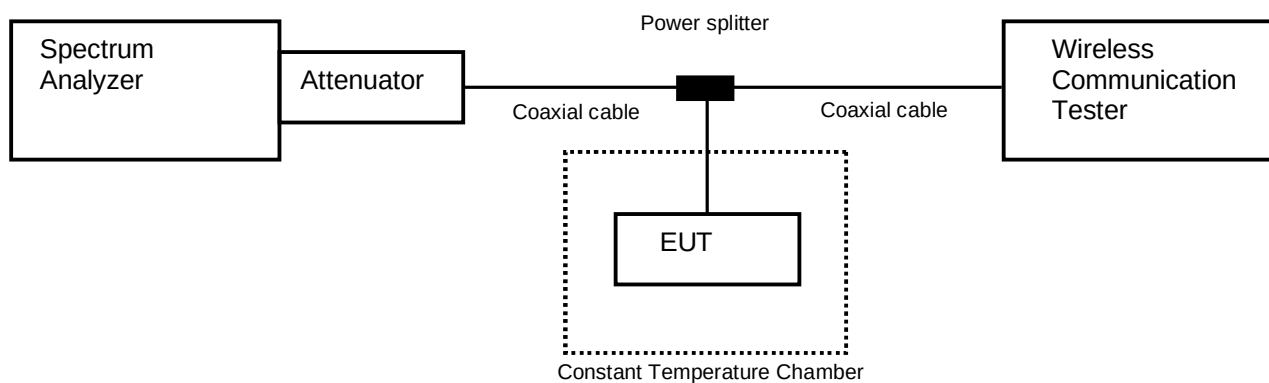

4.5.2 Limit

±2.5 ppm

4.5.3 Measurement result

Date : 2-July-2020
 Temperature : 23.6 [°C]
 Humidity : 62.5 [%]
 Test place : Shielded room No.4

Test engineer : Kazunori Saito

Date : 3-July-2020
 Temperature : 23.1 [°C]
 Humidity : 48.1 [%]
 Test place : Shielded room No.4

Test engineer : Kazunori Saito

[GSM850]
(Channel: 190)

Limit: $\pm 0.00025\% = \pm 2.5$ ppm					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.85	25(Ref.)	836,600,014	0.00000	± 2.5	Pass
	50	836,600,015	0.00209	± 2.5	Pass
	40	836,600,014	0.00005	± 2.5	Pass
	30	836,600,019	0.00637	± 2.5	Pass
	20	836,599,978	-0.04210	± 2.5	Pass
	10	836,600,014	-0.00011	± 2.5	Pass
	0	836,600,009	-0.00598	± 2.5	Pass
	-10	836,599,992	-0.02539	± 2.5	Pass
	-20	836,599,984	-0.03554	± 2.5	Pass
	-30	836,599,983	-0.03673	± 2.5	Pass
3.47	25	836,600,017	0.00448	± 2.5	Pass
4.24	25	836,600,008	-0.00644	± 2.5	Pass

[WCDMA Band V]
(Channel: 4183)

Limit: $\pm 0.00025\% = \pm 2.5$ ppm					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.85	25(Ref.)	836,599,982	0.00000	± 2.5	Pass
	50	836,599,985	0.00354	± 2.5	Pass
	40	836,599,989	0.00850	± 2.5	Pass
	30	836,599,984	0.00197	± 2.5	Pass
	20	836,599,984	0.00267	± 2.5	Pass
	10	836,599,987	0.00553	± 2.5	Pass
	0	836,599,986	0.00430	± 2.5	Pass
	-10	836,599,987	0.00515	± 2.5	Pass
	-20	836,599,985	0.00354	± 2.5	Pass
	-30	836,599,985	0.00354	± 2.5	Pass
3.47	25	836,599,985	0.00369	± 2.5	Pass
4.24	25	836,599,986	0.00406	± 2.5	Pass

Calculation:

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

5 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.
Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	± 3.8 dB
Conducted emission, AMN (150 kHz – 30 MHz)	± 3.4 dB
Radiated emission (9kHz – 30 MHz)	± 3.9 dB
Radiated emission (30 MHz – 1000 MHz)	± 4.9 dB
Radiated emission (1 GHz – 6 GHz)	± 4.6 dB
Radiated emission (6 GHz – 18 GHz)	± 4.9 dB
Radiated emission (18 GHz – 40 GHz)	± 5.8 dB
Radio Frequency	$\pm 1.4 \cdot 10^{-8}$
RF power, conducted	± 0.6 dB
Temperature	± 0.6 °C
Humidity	± 1.2 %
Voltage (DC)	± 0.4 %
Voltage (AC, <10kHz)	± 0.2 %

Judge	Measured value and standard limit value	
PASS	Standard limit value +Uncertainty -Uncertainty Measured value Even if it takes uncertainty into consideration, a standard limit value is fulfilled.	
	Standard limit value +Uncertainty -Uncertainty Measured value Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.	
FAIL	Standard limit value +Uncertainty -Uncertainty Measured value Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.	
	Standard limit value +Uncertainty -Uncertainty Measured value Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.	



Japan

6 Laboratory Information

Testing was performed and the report was issued at:

TÜV SÜD Japan Ltd. Yonezawa Testing Center

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan
Phone: +81-238-28-2881
Fax: +81-238-28-2888

Accreditation and Registration

A2LA

Certificate #3686.03

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada

ISED#: 4224A

VCCI Council

Registration number	Expiration date
A-0166	03-July-2021

Appendix A. Test Equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	31-Aug-2020	05-Aug-2019
Attenuator	Weinschel	56-10	J4180	31-Jul-2020	18-Jul-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX 104/1m	199120/4	31-Dec-2020	17-Dec-2019
Microwave cable	HUBER+SUHNER	SUCOFELX102/2m	802897/2	31-Dec-2020	18-Dec-2019
Power divider	ANRITSU	K240B	020205	31-Jul-2020	19-Jul-2019
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	30-Nov-2020	14-Nov-2019
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	31-Aug-2020	27-Aug-2019
Temperature and humidity chamber	ESPEC	PL1KP	14007261	30-Sep-2020	03-Sep-2019

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2020	25-Sep-2019
Spectrum analyzer	Agilent Technologies	E4447A	MY46180188	31-Mar-2021	27-Mar-2020
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	30-Sep-2020	26-Sep-2019
Preamplifier	SONOMA	310	372170	30-Sep-2020	26-Sep-2019
Biconical antenna	Schwarzbeck	VHBB9124/BBA9106	1344	31-Dec-2020	04-Dec-2019
Log periodic antenna	Schwarzbeck	VUSLP9111B	345	31-Aug-2020	27-Aug-2019
Attenuator	TOYO Connector	NA-PJ-6	N/A(S507)	31-Dec-2020	18-Dec-2019
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	31-Jul-2020	17-Jul-2019
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	31-Jan-2021	08-Jan-2020
Attenuator	AEROFLEX	26A-10	081217-08	31-Jan-2021	10-Jan-2020
Double ridged guide antenna	ETS LINDGREN	3117	00052315	30-Apr-2021	08-Apr-2020
Attenuator	HUBER+SUHNER	6803.17.B	N/A(2341)	31-Dec-2020	18-Dec-2019
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	31-Aug-2020	28-Aug-2019
Preamplifier	TSJ	MLA-1840-B03-35	1240332	31-Aug-2020	28-Aug-2019
Notch Filter	Micro-Tronics	BRM50706	003	31-Jul-2020	18-Jul-2019
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	31-Jul-2020	18-Jul-2019
RF power amplifier	R&K	CGA020M602-2633R	B40240	31-May-2021	15-May-2020
Microwave cable	HUBER+SUHNER	SUCOFELX102/2m	31648	31-Mar-2021	26-Mar-2020
Dipole antenna	Schwarzbeck	VHAP	1021	31-Aug-2020	15-Aug-2019
Dipole antenna	Schwarzbeck	UHAP	993	31-Aug-2020	15-Aug-2019
Double ridged guide antenna	ETS LINDGREN	3117	00218815	31-Dec-2020	16-Dec-2019
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	30-Nov-2020	14-Nov-2019
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	31-Aug-2020	27-Aug-2019
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	31-Jan-2021	08-Jan-2020
		SUCOFLEX104/1m	my24610/4	31-Jan-2021	08-Jan-2020
		SUCOFLEX104/8m	SN MY30031/4	31-Jan-2021	09-Jan-2020
		SUCOFLEX104	MY32976/4	31-Jan-2021	08-Jan-2020
		SUCOFLEX104/1.5m	MY19309/4	31-Jan-2021	08-Jan-2020
		SUCOFLEX104/7m	41625/6	31-Jan-2021	08-Jan-2020
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	31-May-2021	29-May-2020
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	31-May-2020	13-May-2019
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	31-May-2021	29-May-2020

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.