



Japan

TEST REPORT

Report number : JPD-TR-18164-0

Issue date : October 1, 2018

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part 24 Subpart E

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Mobile Phone
Model number	: JA28
FCC ID	: JOYJA28

Date of test : August 3, 20, 21, 24, 27, 2018

Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
5-4149-7, Hachimanpara, Yonezawa-shi,
Yamagata, 992-1128 Japan
Phone: +81-238-28-2881 Fax: +81-238-28-2888

Test results : Complied

Due to merger of TÜV SÜD Japan Ltd. and TÜV SÜD Zacta Ltd. on October 1st, 2018, this test report was issued by TÜV SÜD Japan Ltd.

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, ILAC-MRA, or any agency of the federal government.

Tested by : Tadahiro Seino Taiki Watanabe
Tadahiro Seino Taiki Watanabe

Approved by : Hiroaki Suzuki
Hiroaki Suzuki
Deputy Manager of RF Group



Table of contents

	Page
1. Summary of Test	4
1.1 Purpose of test	4
1.2 Standards	4
1.3 List of applied test to the EUT	4
1.4 Modification to the EUT by laboratory	4
2. Equipment Under Test	5
2.1 General Description of equipment	5
2.2 EUT information	5
2.3 Variation of the family model(s)	6
2.4 Description of Test mode	6
3. Configuration of equipment	7
3.1 Equipment(s) used	7
3.2 System configuration	7
4. Equivalent Isotropic Radiated Power	8
4.1 Measurement procedure	8
4.2 Calculation method	9
4.3 Limit	9
4.4 Test data	10
5. Peak to Average Ratio	11
5.1 Measurement procedure	11
5.2 Limit	11
5.3 Measurement result	11
5.4 Trace data	12
6. Occupied Bandwidth	13
6.1 Measurement procedure	13
6.2 Limit	13
6.3 Measurement result	13
6.4 Trace data	14
7. Band Edge Spurious and Harmonic at Antenna Terminals	15
7.1 Measurement procedure	15
7.2 Limit	15
7.3 Measurement result	15
7.4 Trace data	16
8. Radiated Emissions and Harmonic Emissions	20
8.1 Measurement procedure	20
8.2 Calculation method	21
8.3 Limit	21
8.4 Test data	22
9. Frequency Stability	23
9.1 Measurement procedure	23
9.2 Limit	23
9.3 Measurement result	24
10. Uncertainty of measurement	25



Japan

11. Laboratory Information26
Appendix A. Test equipment27

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 24 Subpart E.

1.2 Standards

CFR47 FCC Part 24 Subpart E

1.2.1 Test Methods

KDB 971168 D01 Power Meas License Digital Systems v03
ANSI/TIA/EIA-603-D-2010

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
2.1046	Conducted Output Power	Conducted	PASS ^{Note 1}
24.232(c)	Effective Radiated Power Equivalent Isotropic Radiated Power	Radiated	PASS
24.232(d)	Peak to Average Ratio	Conducted	PASS
24.238(a) 2.1049	Occupied Bandwidth	Conducted	PASS
24.238(a) 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS
24.238(a) 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS
24.235 2.1055	Frequency Stability	Conducted	PASS

Note 1: Refer to RF Exposure Report (Test Report_SAR)

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None



Japan

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Mobile Phone.

2.2 EUT information

Applicant	: KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	: Mobile Phone
Trade name	: Kyocera
Model number	: JA28
Serial number	: N/A
EUT condition	: Pre-Production
Power ratings	: Battery: DC 3.8V
Size	: (W) 48.0mm × (D) 14.0mm × (H) 138.0mm
Environment	: Indoor and Outdoor use
Operating environment	: Temperature: 5°C to 35°C Humidity: 35% to 85%
RF Specification	
Frequency of Operation	: Up Link GSM1900: 1850.2-1909.8MHz Down Link GSM1900: 1930.2-1989.8MHz
Modulation type	: GSM1900: GMSK
Emission designator	: GSM1900: 241KGXW
Equivalent Isotropic Radiated Power (E.I.R.P)	: GSM1900: 0.7943W (29.0dBm)
Antenna type	: Internal antenna
Antenna gain	: GSM1900: -1.1dBi



Japan

2.3 Variation of the family model(s)

Not applicable

2.4 Description of Test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	Channel	Frequency
GSM1900	512	1850.2MHz
	661	1880.0MHz
	810	1909.8MHz

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Z axis and the worst case recorded.

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	JA28	N/A	JOYJA28	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used".

4. Equivalent Isotropic Radiated Power

4.1 Measurement procedure [FCC 24.232(c)]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.


<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).
The frequency of the signal generator is adjusted to the measurement frequency.
Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) Span = 1.5 times the OBW
- b) RBW = 1-5% of the expected OBW, not to exceed 1MHz
- c) VBW $\geq 3 \times$ RBW
- d) Number of sweep points $\geq 2 \times$ span / RBW
- e) Sweep time = auto-couple
- f) Detector = RMS (power averaging)
- g) If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

- Test configuration

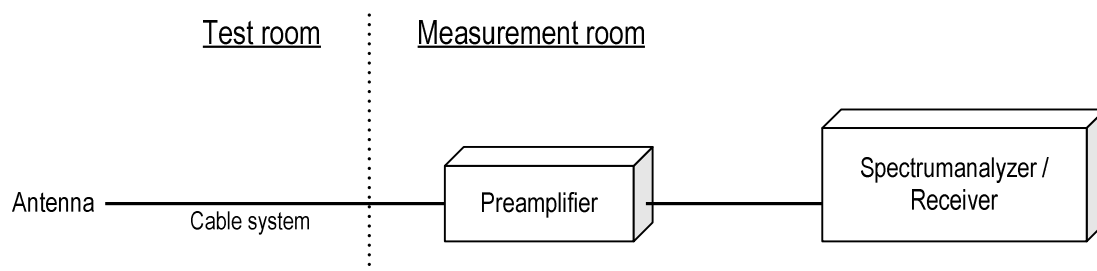



Japan

4.2 Calculation method

Result(EIRP) = Ant. Input - Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

Example:

Limit @ 1880MHz : 33.0dBm

Ant. Input = 19.3dBm Cable loss = 1.1dB Ant. Gain = 8.3dBi

Result = 19.3 - 1.1 + 8.3 = 26.5dBm

Margin = 33.0 - 26.5 = 6.5dB

4.3 Limit

2 W (33dBm)



Japan

4.4 Test data

Date : August 21, 2018
 Temperature : 24.1 [°C]
 Humidity : 60.1 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Taiki Watanabe

Date : August 27, 2018
 Temperature : 25.6 [°C]
 Humidity : 68.7 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino

[GSM1900]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
V	1850.2	-34.6	17.9	1.2	8.4	25.2	33.0	7.8
V	1880.0	-32.9	20.7	1.2	8.4	27.9	33.0	5.1
V	1909.8	-32.4	21.8	1.2	8.4	29.0	33.0	4.0

5. Peak to Average Ratio


5.1 Measurement procedure [FCC 24.232(d)]

The peak to average ratio was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) Span = 5MHz
- b) RBW = 1MHz
- c) VBW $\geq 3 \times$ RBW
- d) Detector = Peak / Average
- e) Sweep time = auto-couple
- f) Trace mode=Max hold

- Test configuration

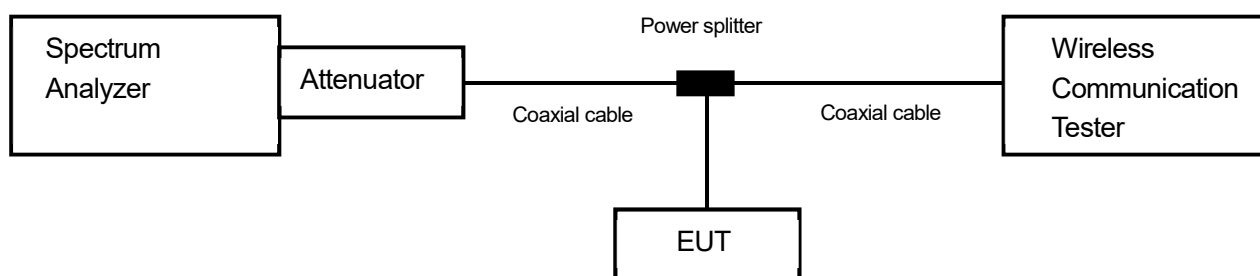

5.2 Limit

13dB or less


5.3 Measurement result

Date : August 3, 2018
 Temperature : 24.9 [°C]
 Humidity : 54.1 [%]
 Test place : Shielded room No.4


Test engineer :
 Tadahiro Seino

Mode	Channel	Frequency [MHz]	Peak to Average Power Ratio [dB]	Limit [dB]
GSM1900	512	1850.2	0.01	13.0
	661	1880.0	0.01	
	810	1909.8	0.04	


5.4 Trace data
[GSM1900]
Channel: 512

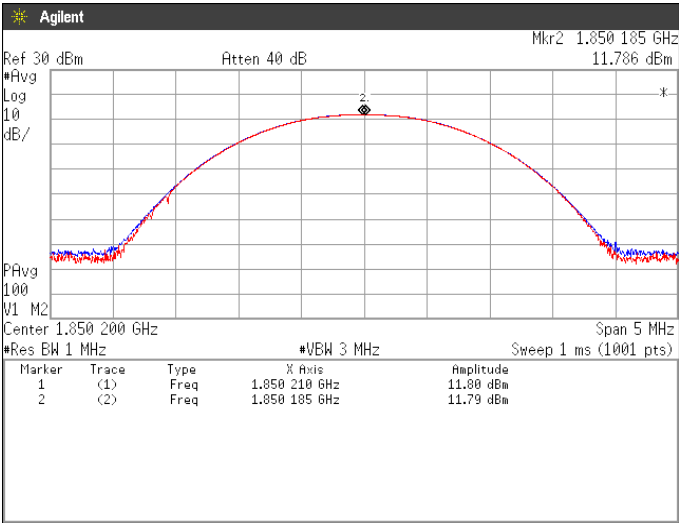

Channel: 661

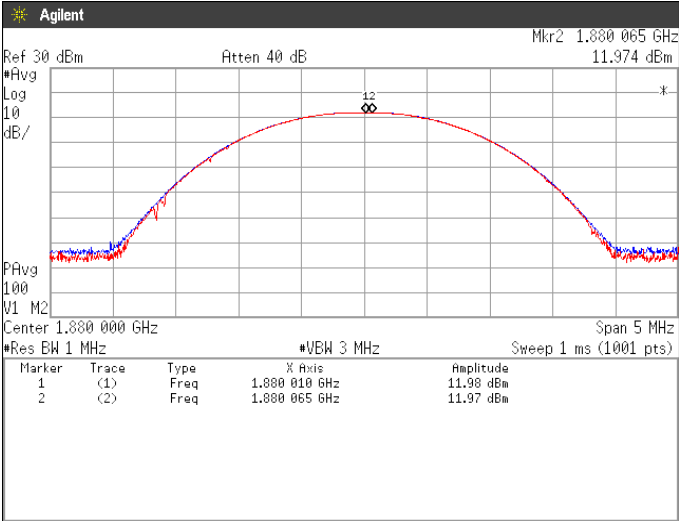

Channel: 810

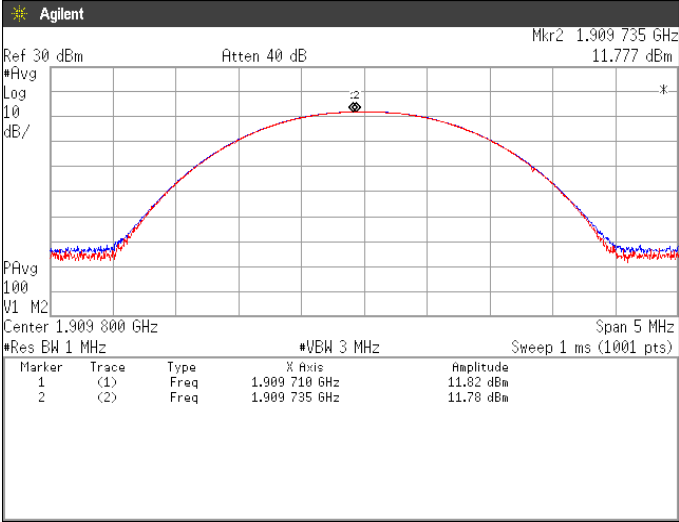

6. Occupied Bandwidth


6.1 Measurement procedure [FCC 24.238(a), 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) RBW = 1-5% of the expected OBW & VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

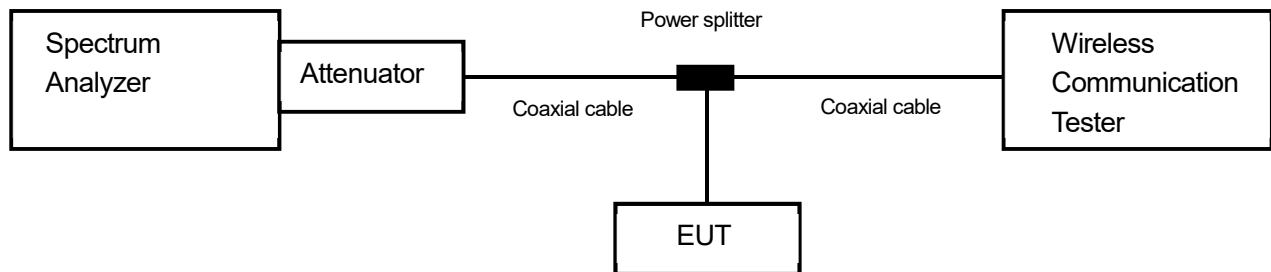

6.2 Limit

None


6.3 Measurement result

Date : August 3, 2018
 Temperature : 24.9 [°C]
 Humidity : 54.1 [%]
 Test place : Shielded room No.4


Test engineer :
 Tadahiro Seino

Band	Channel	Frequency (MHz)	Test Result (kHz)
GSM1900	512	1850.2	241.3905
	661	1880.0	239.6705
	810	1909.8	239.2128


6.4 Trace data
[GSM1900]
Channel: 512

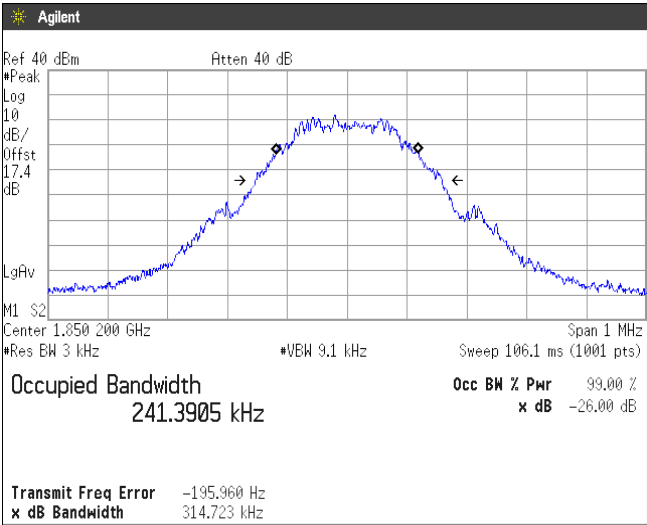

Channel: 661

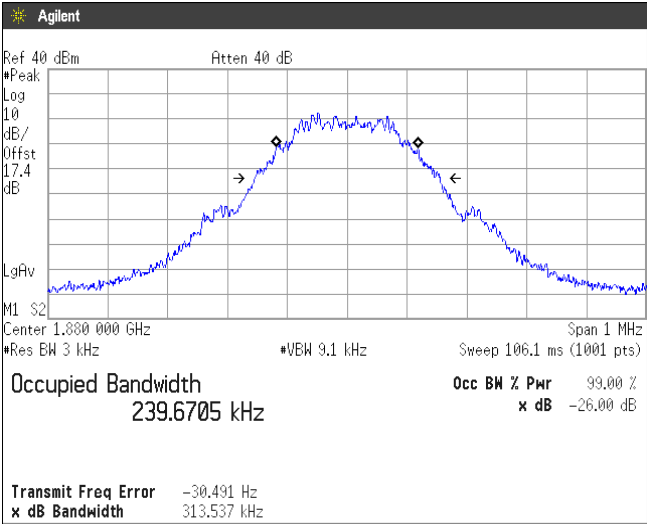

Channel: 810

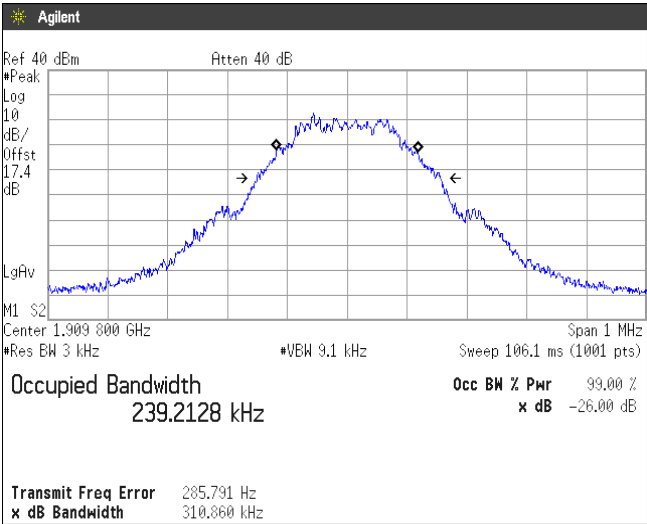

7. Band Edge Spurious and Harmonic at Antenna Terminals

7.1 Measurement procedure [FCC 24.238(a), 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- a) Span was set large enough so as to capture all out of band emissions near the band edge
- b) RBW $\geq 1\%$ of the emission bandwidth or 2% of the emission bandwidth
- c) VBW $\geq 3 \times$ RBW
- d) Detector = RMS
- e) Trace mode = Max hold
- f) Sweep time = auto-couple
- g) Number of sweep point $\geq 2 \times$ span / RBW

<Spurious Emissions>

- a) RBW = 1MHz & VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple
- e) Number of sweep point $\geq 2 \times$ span / RBW

- Test configuration

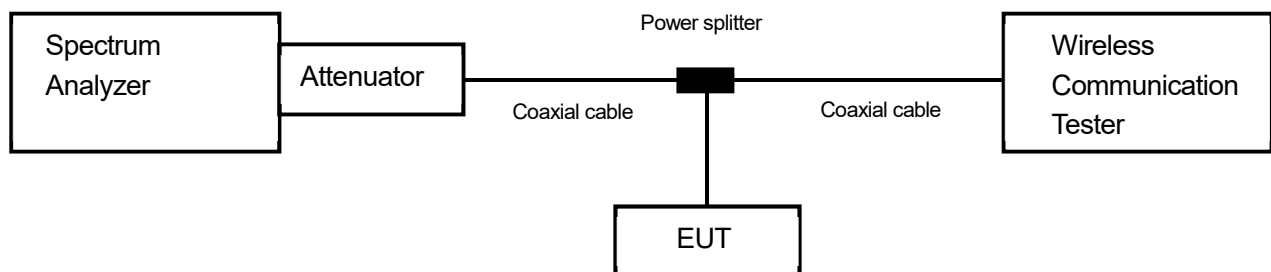

7.2 Limit

-13dBm or less

7.3 Measurement result


Date : August 3, 2018
 Temperature : 24.9 [°C]
 Humidity : 54.1 [%]
 Test place : Shielded room No.4

Test engineer : Tadahiro Seino


Band	Channel	Frequency [MHz]	Limit [dB]	Results	Results
GSM1900	512	1850.2	-13.0	See the trace data	PASS
	810	1909.8	-13.0	See the trace data	PASS

7.4 Trace data
[GSM1900]
(Band Edge)

Channel: 512




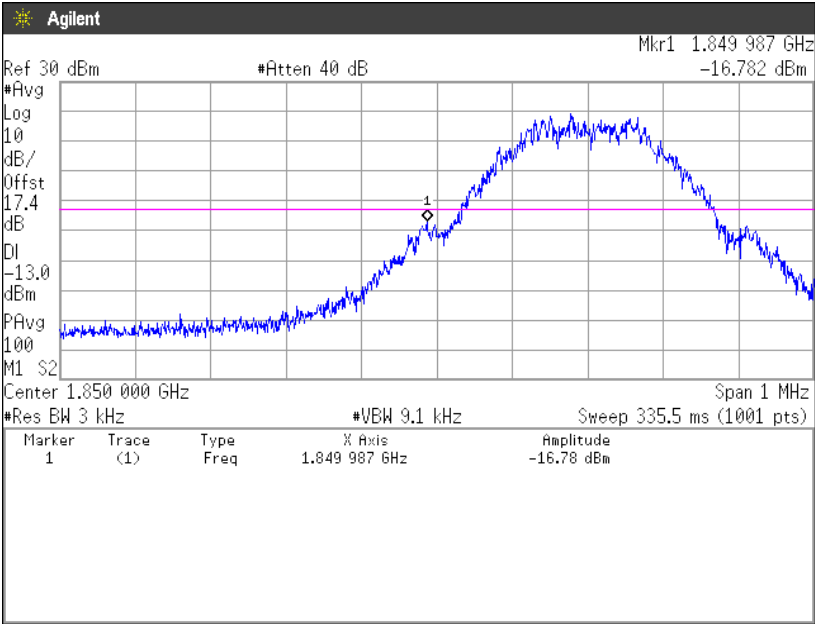


Channel: 810

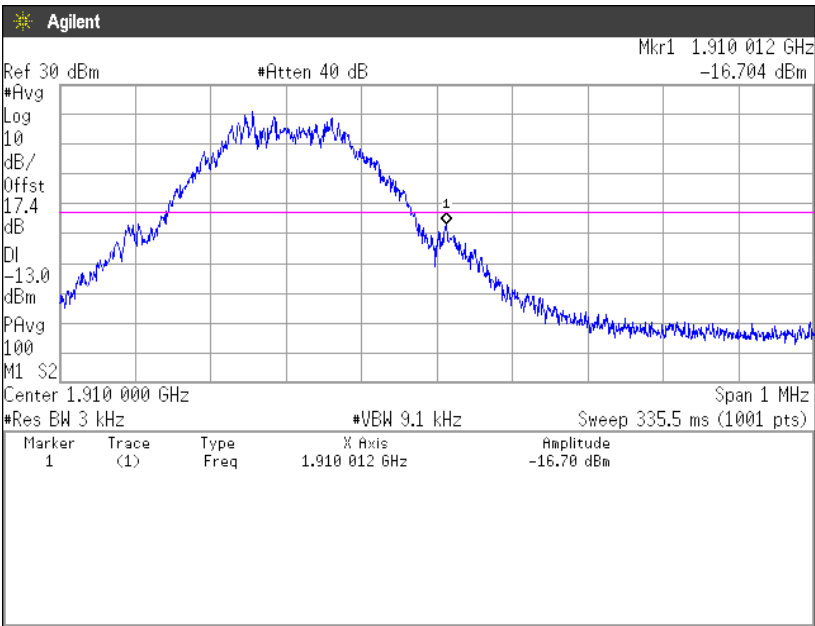


(Spurious Emissions)


Note: Conducted spurious test was measured in the worst case of conducted output power.

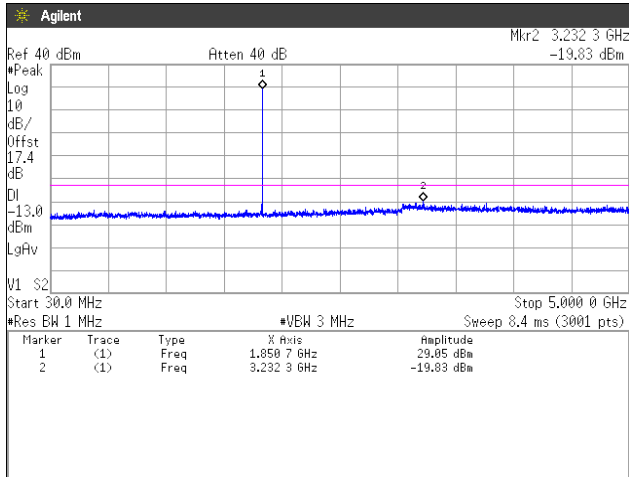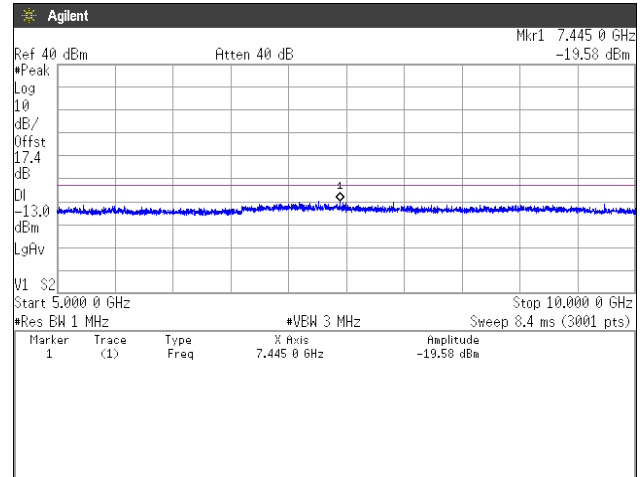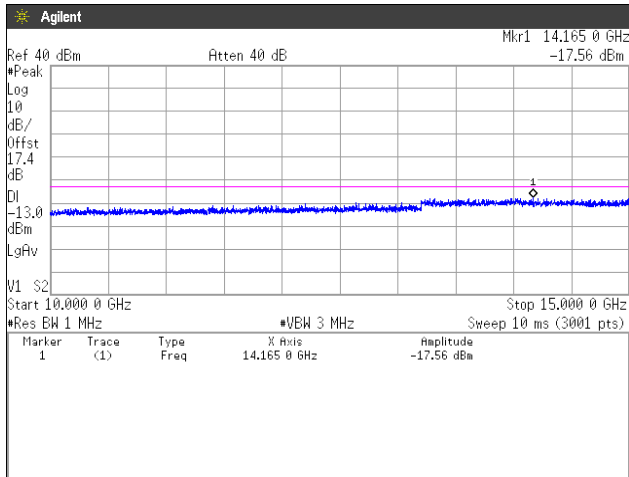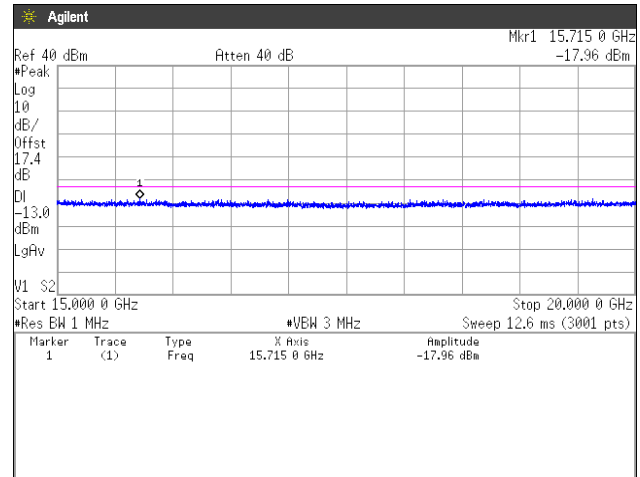Channel: 512**30MHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**


Channel: 661
30MHz-5GHz

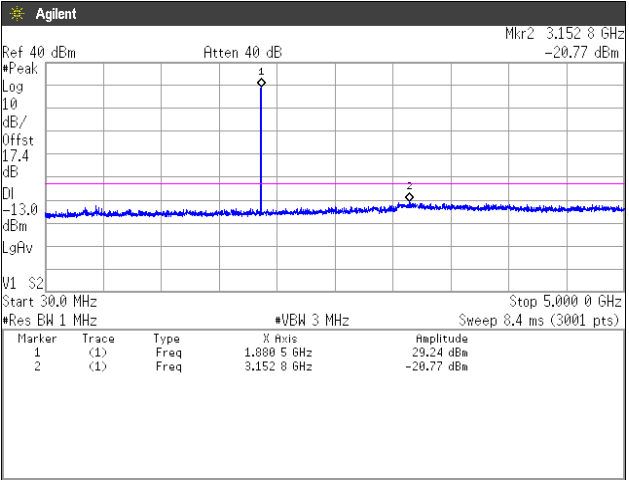


5GHz-10GHz

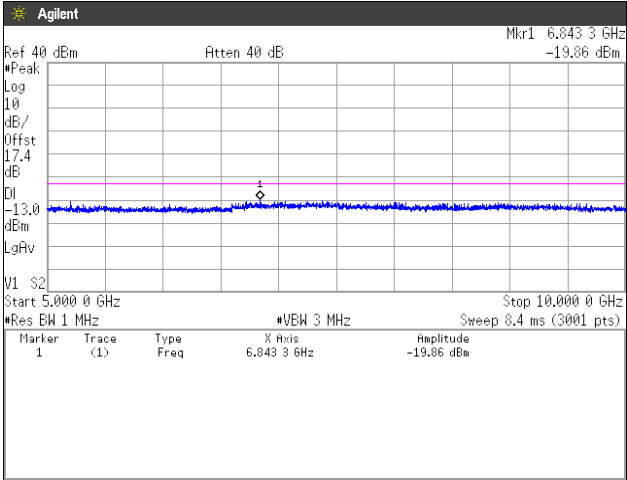

10GHz-15GHz

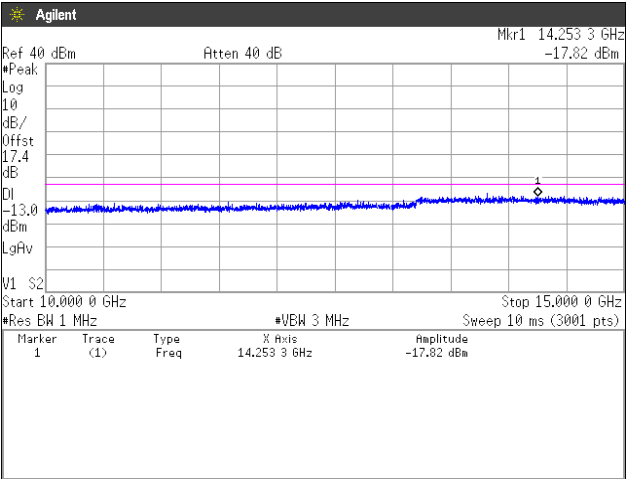


15GHz-20GHz

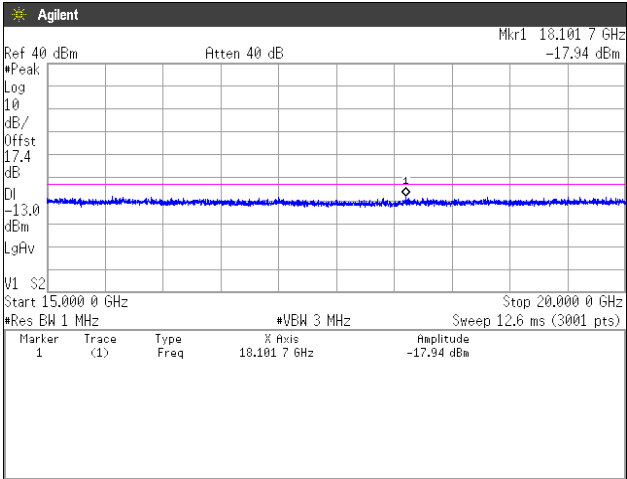




Japan


Channel: 810
30MHz-5GHz

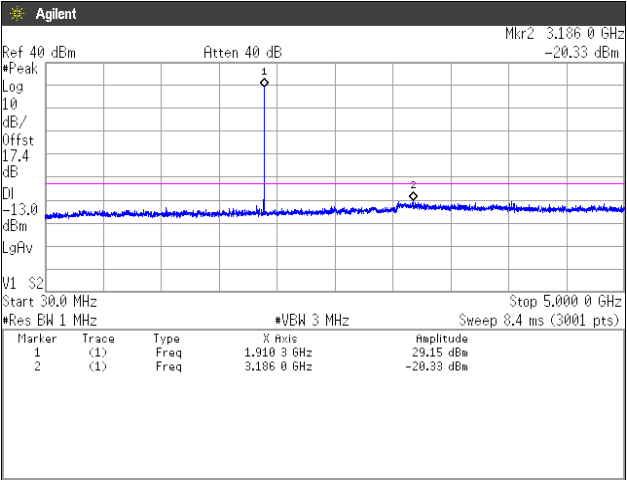


5GHz-10GHz

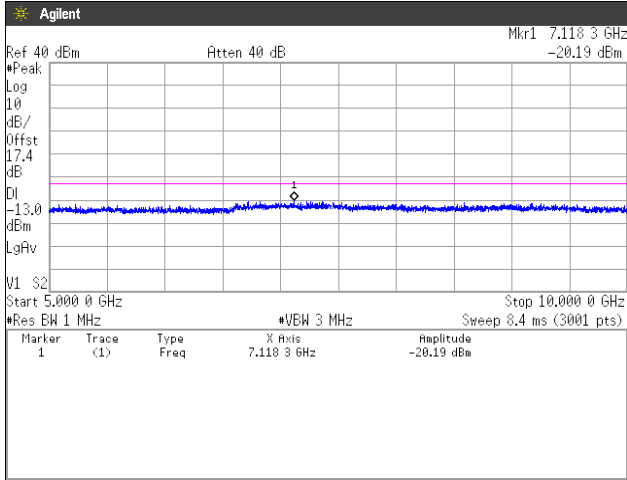

10GHz-15GHz

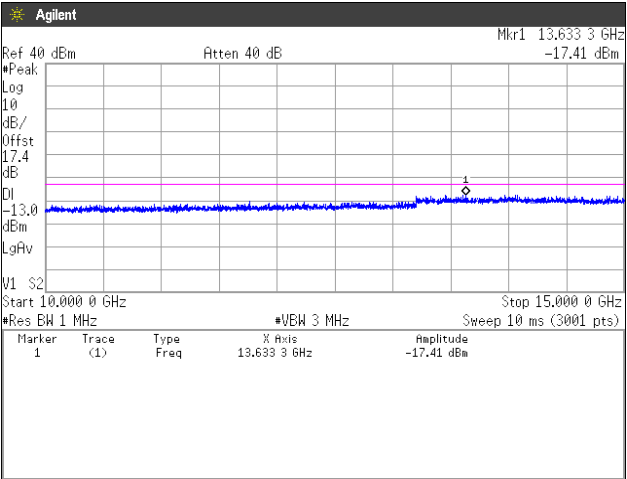

15GHz-20GHz

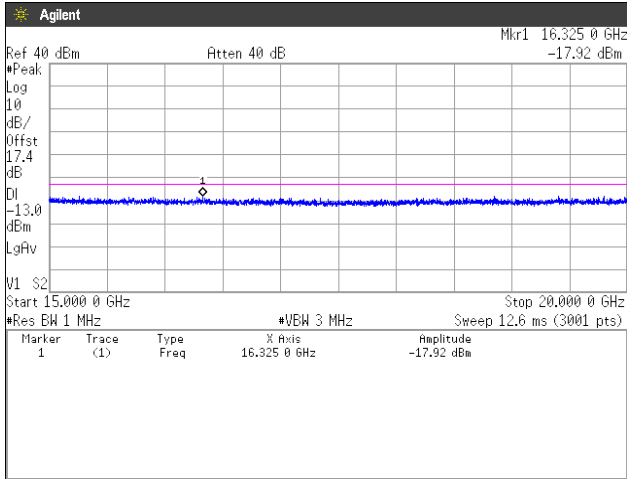

8. Radiated Emissions and Harmonic Emissions

8.1 Measurement procedure [FCC 24.238(a), 2.1053]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) RBW = 100kHz for below 1GHz and 1MHz for above 1GHz / VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

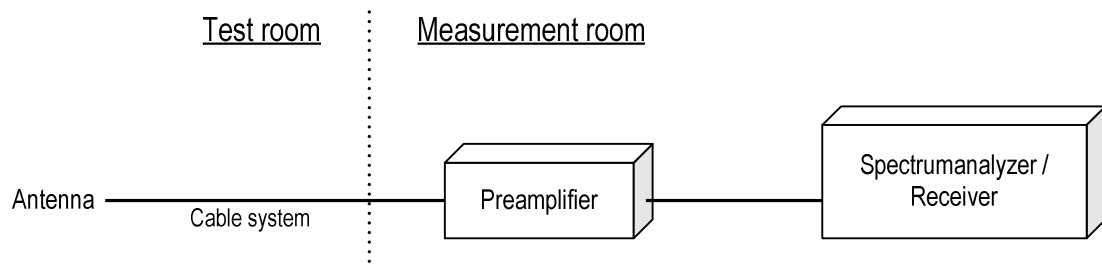



Japan

8.2 Calculation method

Result (EIRP) = Ant. Input - Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

Example:

Limit @ 3700.4MHz : -13.0dBm

Ant. Input = -55.6dBm Cable loss = 1.6dB Ant. Gain = 9.2dBi

Result = -55.6 - 1.6 + 9.2 = -49.3dBm

Margin = -13.0 - (-49.3) = 36.3dB

8.3 Limit

-13dBm or less

8.4 Test data

Date	:	August 21, 2018	Test engineer	:	_____
Temperature	:	24.1 [°C]			
Humidity	:	60.1 [%]			
Test place	:	3m Semi-anechoic chamber			Taiki Watanabe

Date	:	August 24, 2018	Test engineer	:	_____
Temperature	:	23.6 [°C]			
Humidity	:	53.6 [%]			
Test place	:	3m Semi-anechoic chamber			Tadahiro Seino

Date	:	August 27, 2018	Test engineer	:	_____
Temperature	:	25.6 [°C]			
Humidity	:	68.7 [%]			
Test place	:	3m Semi-anechoic chamber			Tadahiro Seino

[GSM1900] (Channel: 512)

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3700.4	-55.2	-60.0	1.6	9.5	-52.1	-13.0	39.1

(Channel: 661)

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-55.8	-61.0	1.7	9.4	-53.2	-13.0	40.2

(Channel: 810)


H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3819.6	-56.8	-68.0	1.7	9.3	-60.3	-13.0	47.3

9. Frequency Stability

9.1 Measurement procedure [FCC 24.235, 2.1055]

The EUT was placed inside of a constant temperature chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

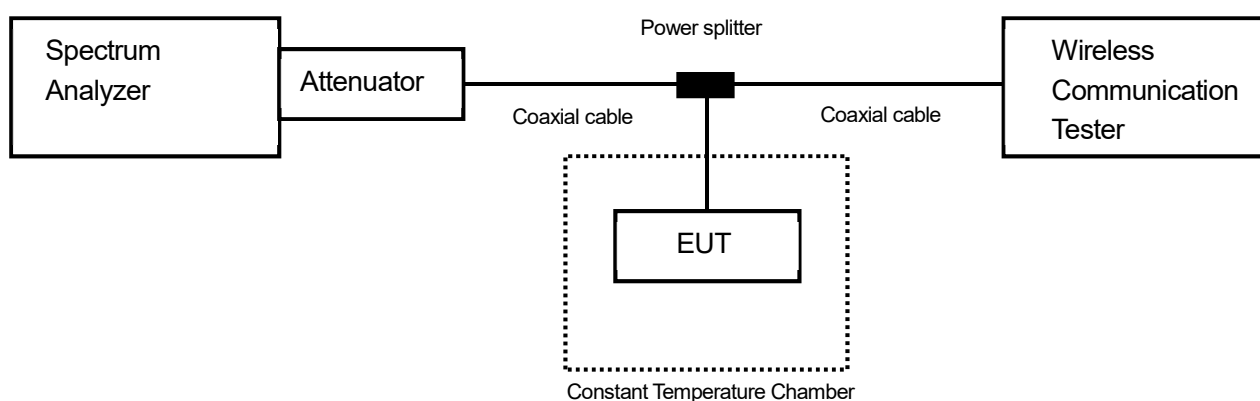

9.2 Limit

±2.5ppm

9.3 Measurement result

Date : August 20, 2018
 Temperature : 25.6 [°C]
 Humidity : 44.1 [%]
 Test place : Shielded room No.4

Test engineer : Tadahiro Seino

[GSM1900]

(Channel: 661)

Limit: $\pm 0.00025\% = \pm 2.5\text{ppm}$					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.80	25(Ref.)	1,880,000,019	0.00000	±2.5	Pass
	50	1,880,000,023	0.00237	±2.5	Pass
	40	1,880,000,018	-0.00039	±2.5	Pass
	30	1,880,000,000	-0.01002	±2.5	Pass
	20	1,880,000,017	-0.00077	±2.5	Pass
	10	1,880,000,018	-0.00005	±2.5	Pass
	0	1,880,000,017	-0.00086	±2.5	Pass
	-10	1,880,000,024	0.00294	±2.5	Pass
	-20	1,880,000,020	0.00084	±2.5	Pass
	-30	1,880,000,030	0.00622	±2.5	Pass
3.42	25	1,880,000,028	0.00513	±2.5	Pass
4.18	25	1,880,000,027	0.00429	±2.5	Pass

Calculation;

Frequency Tolerance (ppm) = $\frac{\text{Measurements Frequency (Hz)} - \text{Reference Frequency (Hz)}}{\text{Reference Frequency (Hz)}} \times 1000000$

10. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028-0011 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9kHz – 150kHz)	$\pm 3.8\text{dB}$
Conducted emission, AMN (150kHz – 30MHz)	$\pm 3.3\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 3.0\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.7\text{dB}$
Radiated emission (1GHz – 6GHz)	$\pm 4.9\text{dB}$
Radiated emission (6GHz – 18GHz)	$\pm 5.2\text{dB}$
Radiated emission (18GHz – 40GHz)	$\pm 5.8\text{dB}$



Japan

11. Laboratory Information

1. Location

Testing done by September 30th, 2018 was performed at:

Name: TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 Address: 5-4149-7, Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan
 Phone: +81-238-28-2881
 Fax: +81-238-28-2888

Testing done after October 1st, 2018 was performed and the test report was issued at:

Name: TÜV SÜD Japan Ltd. Yonezawa Testing Center
 Address: 5-4149-7, Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan
 Phone: +81-238-28-2881
 Fax: +81-238-28-2888

2. Accreditation and Registration

- 1) VLAC
Accreditation No.: VLAC-013
- 2) NVLAP
LAB CODE: 200306-0
- 3) BSMI
Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

4) Industry Canada

Site number	Facility	Expiration date
4224A-4	3m Semi-anechoic chamber	2020-11-27
4224A-5	10m Semi-anechoic chamber No.1	2020-11-27
4224A-6	10m Semi-anechoic chamber No.2	2019-12-14

5) VCCI Council

Registration number	Expiration date
A-0166	2019-07-03

Appendix A. Test equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	Jul. 31, 2019	Jul. 2, 2018
Attenuator	HUBER+SUHNER	6810.19.A	N/A(S450)	Jan. 31, 2019	Jan. 18, 2018
Microwave cable	HUBER+SUHNER	SUCOFLEX 104	199119/4	Dec. 31, 2018	Dec. 6, 2017
Power divider	ANRITSU	K240B	020205	Jul. 31, 2019	Jul. 12, 2018
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	Oct. 31, 2018	Oct. 13, 2017
Low temperature and humidity chamber	ESPEC	PL1KP	14007261	Dec. 31, 2018	Dec. 20, 2017

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	Sep. 30, 2018	Sep. 13, 2017
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Oct. 31, 2018	Oct. 19, 2017
Preamplifier	SONOMA	310	372170	Sep. 30, 2018	Sep. 12, 2017
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2155	Aug. 31, 2019	Aug. 6, 2018
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	Aug. 31, 2019	Aug. 6, 2018
Attenuator	TME	CFA-01NPJ-6	N/A(S275)	Jan. 31, 2019	Jan. 18, 2018
Attenuator	TME	CFA-01NPJ-3	N/A(S272)	Jan. 31, 2019	Jan. 18, 2018
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	Jan. 31, 2019	Jan. 18, 2018
Attenuator	AEROFLEX	26A-10	081217-08	Jan. 31, 2019	Jan. 18, 2018
Double ridged guide antenna	ETS LINDGREN	3117	00052315	Mar. 31, 2019	Mar. 14, 2018
Attenuator	Agilent Technologies	8491B	MY39268633	Mar. 31, 2019	Mar. 14, 2018
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	Aug. 31, 2018	Aug. 8, 2017
				Aug. 31, 2019	Aug. 24, 2018
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Aug. 31, 2018	Aug. 8, 2017
				Aug. 31, 2019	Aug. 24, 2018
Band rejection filter	Micro-Tronics	BRC50720	014	Dec. 31, 2018	Dec. 5, 2017
High Pass Filter	Wainwright	WHKX2.8/18G-6SS	1	Jul. 31, 2019	Jul. 12, 2018
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	Jul. 31, 2019	Jul. 31, 2018
RF power amplifier	R&K	CGA020M602-2633R	B40240	May 31, 2019	May 17, 2018
Microwave cable	HUBER+SUHNER	SUCOFELX102/2m	31648	Mar. 31, 2019	Mar. 1, 2018
Dipole antenna	Schwarzbeck	VHAP	1020	Aug. 31, 2019	Aug. 3, 2018
Dipole antenna	Schwarzbeck	UHAP	994	Aug. 31, 2019	Aug. 3, 2018
Double ridged guide antenna	EMCO	3115	00058532	Jan. 31, 2019	Jan. 18, 2018
Double ridged guide antenna	EMCO	3115	00052315	Mar. 31, 2019	Mar. 14, 2018
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	Oct. 31, 2018	Oct. 13, 2017
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	Jan. 31, 2019	Jan. 18, 2018
		SUCOFLEX104/1m	my24610/4	Jan. 31, 2019	Jan. 18, 2018
		SUCOFLEX104/8m	SN MY30031/4	Jan. 31, 2019	Jan. 18, 2018
		SUCOFLEX104	MY32976/4	Jan. 31, 2019	Jan. 18, 2018
		SUCOFLEX104/1.5m	SN MY19309/4	Jan. 31, 2019	Jan. 19, 2018
		SUCOFLEX104/7m	41625/6	Jan. 31, 2019	Jan. 19, 2018
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	May 31, 2019	May 21, 2018
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	May 31, 2019	May 22, 2018

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.