



TEST REPORT

Report number : Z071C-13466

Issue date : Dec 27, 2013

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part15 Subpart C

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Mobile Phone
Model number	: KYY22
FCC ID	: JOYKYY22

Date of test : December 19, 20 2013
 Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 4149-7 Hachimanpara 5-chome
 Yonezawa-shi Yamagata 992-1128 Japan
 Phone: +81-238-28-2880 Fax: +81-238-28-2888
 Test results : Complied

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.
 This test report must not be used by client to claim product certification, approval, or endorsement by
 NVLAP, NIST, or any agency of the federal government.

Tested by : Chiaki Kanno
 Chiaki Kanno

Tested by : Taiki Watanabe
 Taiki Watanabe

Authorized by : Hiroaki Suzuki
 Hiroaki Suzuki
 Manager of EMC Technical Department

NVLAP[®]
 NVLAP LAB CODE 200306-0

Table of contents

	Page
1. Summary of Test	3
1.1 Purpose of test.....	3
1.2 Standards	3
1.3 List of applied test to the EUT	3
1.4 Modification to the EUT by laboratory.....	3
2. Equipment Under Test	4
2.1 General Description of equipment.....	4
2.2 EUT information	4
2.3 Variation of the family model(s).....	5
2.4 Operating channels and frequencies	5
2.5 Description of Test mode	5
2.6 Operating mode	6
3. Configuration of equipment	7
3.1 Equipment(s) used.....	7
3.2 System configuration	7
4. Spurious Emissions - Radiated -.....	8
4.1 Measurement procedure.....	8
4.2 Calculation method.....	9
4.3 Limit.....	9
4.4 Test data.....	10
5. Restricted Band of Operation.....	11
5.1 Measurement procedure.....	11
5.2 Limit.....	11
5.3 Measurement Result.....	11
5.4 Test data.....	12
6. Antenna requirement	14
7. Uncertainty of measurement.....	15
8. Laboratory description	16
Appendix A. Test equipment	17

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart C.

1.2 Standards

CFR47 FCC Part 15 Subpart C

1.2.1 Test Methods

ANSI C63.4-2003, KDB558074

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
15.247(d) 15.205 15.209	Spurious Emissions	Radiated	PASS
15.247(d) 15.205 15.209	Restricted Bands of Operation	Radiated	PASS

*: Conducted test was to proceed at FCCID:JOYKYY21.

FCCID:JOYKYY22 was measured by applying only Radiated test.

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Mobile Phone.

2.2 EUT information

Applicant	:	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	:	Mobile Phone
Trade name	:	Kyocera
Model number	:	KYY22
Serial number	:	N/A
EUT condition	:	Pre-Production
Max. frequency	:	1.5GHz
Power ratings	:	Battery: DC 3.8V
Size	:	(W) 65.0 × (D) 11.0 × (H) 134.0 mm
Environment	:	Indoor and Outdoor use
Terminal limitation	:	-20°C to 60°C
RF Specification Protocol	:	Bluetooth 4.0 + EDR
Frequency range	:	2402MHz-2480MHz
Number of RF Channels	:	40 Channels
Modulation method/ Data rate	:	GFSK (1Mbps)
Channel separation	:	2MHz
Antenna type	:	Internal antenna
Antenna gain	:	0dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Operating channels and frequencies

Channel	Frequency [MHz]	Channel	Frequency [MHz]
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

2.5 Description of Test mode

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Tested Channel	Frequency [MHz]
Low	2402
Middle	2440
High	2480

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Tested Channel	Modulation Type	Data Rate
Low, Middle, High	GFSK	1Mbps

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Z axis and the worst case recorded.



Zacta

2.6 Operating mode

[Tx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode

Operating frequency: Channel Low: 2402MHz, Channel Middle: 2440MHz, Channel High: 2480MHz

- iii) Start test mode

[Rx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode

Operating frequency: Channel Low: 2402MHz, Channel Middle: 2440MHz, Channel High: 2480MHz

- iii) Start test mode

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	KYY22	N/A	JOYKYY22	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

Note1: Numbers assigned to equipment on this diagram correspond to the list in "3.1 Equipment(s) used".

4. Spurious Emissions - Radiated -

4.1 Measurement procedure

[FCC 247(d), 15.205, 15.209]

Test was applied by following conditions.

Test method	:	ANSI C63.4
Frequency range	:	9kHz to 25GHz
Test place	:	3m Semi-anechoic chamber
EUT was placed on	:	FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Antenna distance	:	3m
Test receiver setting	:	Below 1GHz
- Detector	:	Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	:	200Hz, 120kHz
Spectrum analyzer setting	:	Above 1GHz
- Peak	:	RBW=1MHz, VBW=1MHz, Span=0Hz, Sweep=auto
- Average	:	RBW=1MHz, VBW=10Hz, Span=0Hz, Sweep=auto Display mode=Linear

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna and Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane.

The EUT is Placed on a turntable, which is 0.8m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.


The EUT was set to operate with following conditions.

- No hopping [Channel Low: 2402MHz, Channel Middle: 2440MHz, Channel High: 2480MHz]

The test mode of EUT is as follows.

- Tx mode, Rx mode

- Test configuration

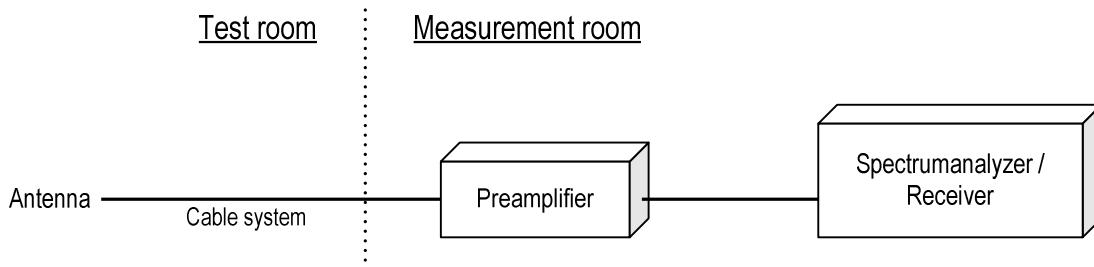

4.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant. factor + Cable system loss)

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant. factor + Cable system loss –Amp. Gain)

Margin = Limit – Emission level

4.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	300	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.

4.4 Test data

Date	:	Dec. 20, 2013	Test personnel	:	
Temperature	:	28.1 [°C]	Tested by	:	
Humidity	:	24.1 [%]			
Test place	:	3m Semi-anechoic chamber			<u>Taiki Watanabe</u>

Channel Low

No.	Frequency	(P)	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		PK	CAV		PK	CAV	PK	AV	PK	CAV	[cm]	[°]
1	4804.000	H	44.2	31.0	8.6	52.8	39.6	74.0	54.0	21.2	14.4	100.0	0.0
2	9608.000	V	43.8	30.4	16.8	60.6	47.2	74.0	54.0	13.4	6.8	116.0	149.0

Channel Middle

No.	Frequency	(P)	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		PK	CAV		PK	CAV	PK	AV	PK	CAV	[cm]	[°]
1	4880.000	H	44.3	31.2	9.0	53.3	40.2	74.0	54.0	20.7	13.8	100.0	0.0
2	9760.000	V	43.1	30.0	17.0	60.1	47.0	74.0	54.0	13.9	7.0	100.0	150.0

Channel High

No.	Frequency	(P)	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		PK	CAV		PK	CAV	PK	AV	PK	CAV	[cm]	[°]
1	4960.000	H	44.5	30.8	9.3	53.8	40.1	74.0	54.0	20.2	13.9	100.0	0.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

5. Restricted Band of Operation

5.1 Measurement procedure

[FCC 247(d), 15.205, 15.209]

Test was applied by following conditions.

Test method : ANSI C63.4
 Test place : 3m Semi-anechoic chamber
 EUT was placed on : FRP table / (W)2.0m × (D)1.0m × (H)0.8m
 Antenna distance : 3m

Spectrum analyzer setting
 - Peak : RBW=1MHz, VBW=1MHz, Span=Arbitrary setting, Sweep=auto
 - Average : RBW=1MHz, VBW=10Hz, Span=Arbitrary setting, Sweep=auto
 Display mode=Linear

Radiated emission measurements are performed at 3m distance with the broadband antenna (Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission.

The EUT is Placed on a turntable, which is 0.8m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.


The EUT was set to operate with following conditions.

- Channel Low: 2402MHz, Channel High: 2480MHz

The test mode of EUT is as follows.

- Tx mode

- Test configuration

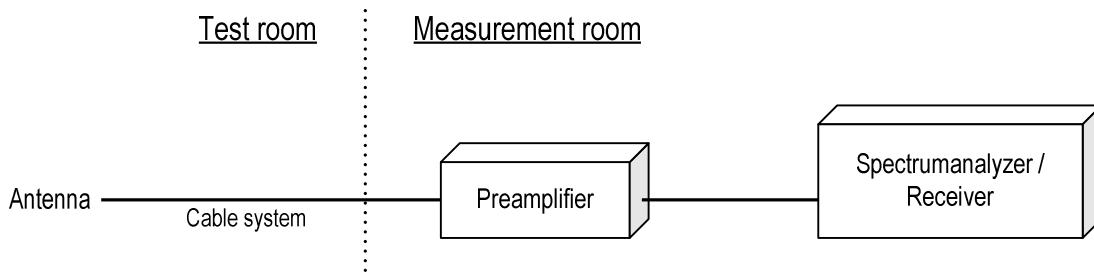

5.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

5.3 Measurement Result


Channel	Frequency [MHz]	Results Chart	Result
Low	2402	See the Trace Data	Pass
High	2480	See the Trace Data	Pass

5.4 Test data

Date : Dec. 19, 2013
 Temperature : 23.5 [°C]
 Humidity : 37.4 [%]
 Test place : 3m Semi-anechoic chamber


Test personnel :
 Tested by : Chiaki Kanno

Channel Low Horizontal Peak

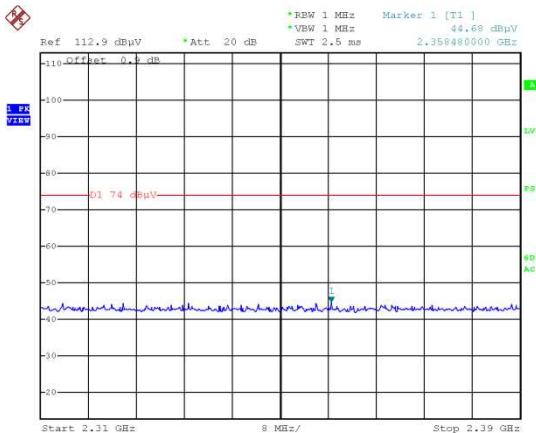


Date: 19.DEC.2013 09:03:56

Average

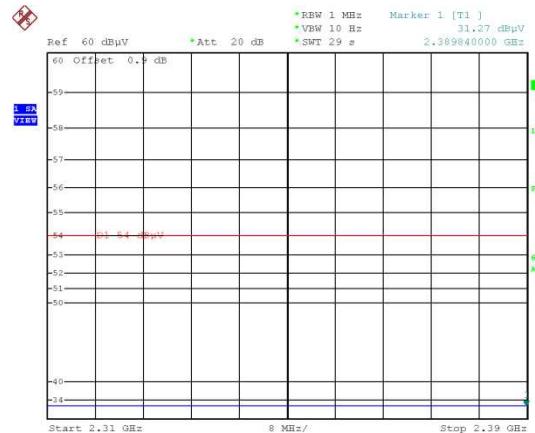


Date: 19.DEC.2013 09:05:57

Vertical Peak

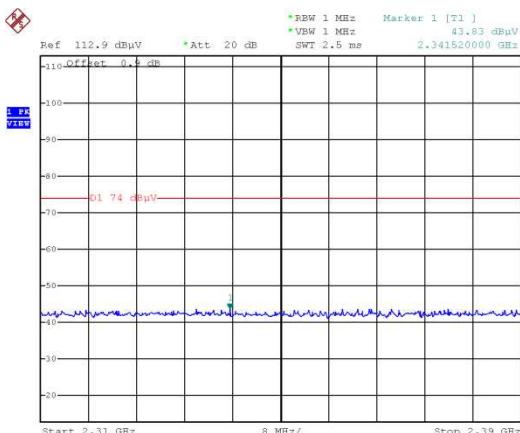


Date: 19.DEC.2013 09:11:38

Average

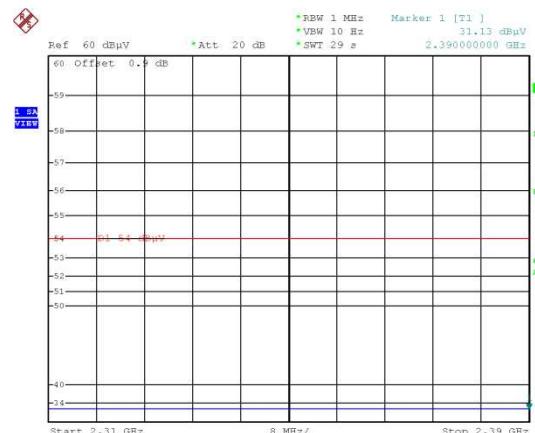


Date: 19.DEC.2013 09:12:54

Channel High Horizontal Peak

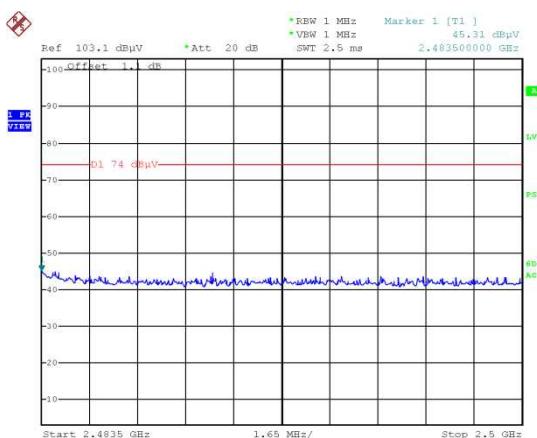


Date: 19.DEC.2013 09:29:25

Average

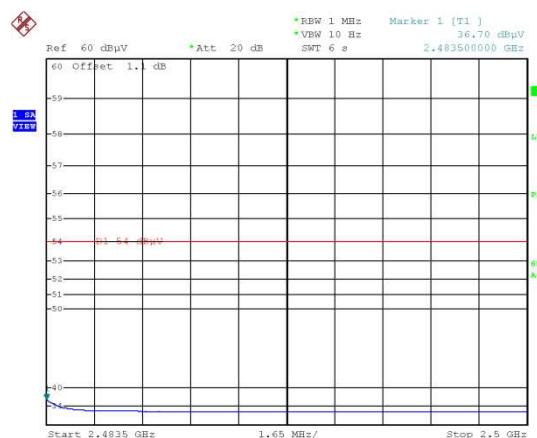


Date: 19.DEC.2013 09:30:06

Vertical Peak

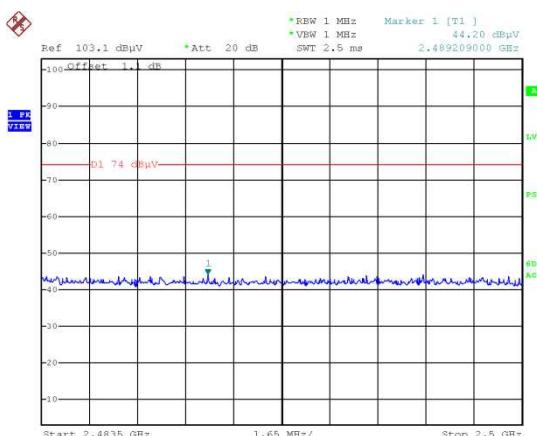

Date: 19.DEC.2013 09:32:24

Average

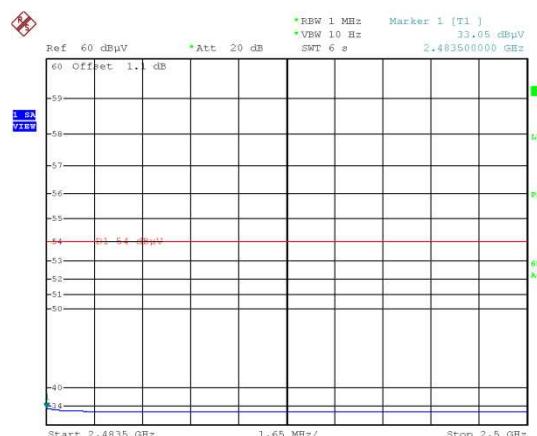

Date: 19.DEC.2013 09:33:04

6. Antenna requirement

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

7. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor k=2.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	±3.0dB
Radiated emission (9kHz – 30MHz)	±4.4dB
Radiated emission (30MHz – 1000MHz)	±4.5dB
Radiated emission (1000MHz – 26GHz)	±3.9dB

8. Laboratory description

1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan
 Phone: +81-238-28-2880 Fax: +81-238-28-2888

2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
3m Semi-anechoic chamber	VLAC-013			-	Jul. 3, 2015
10m Semi-anechoic chamber				VLAC-013	
Shielded room No.1	-	-	-	-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 2	91065	Oct.31, 2014
Site 3		
3m Semi-anechoic chamber	540072	Jan. 9, 2016
10m Semi-anechoic chamber		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 2	4224A-2	Jan. 23, 2015
Site 3	4224A-3	
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber	4224A-5	

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Expiry Date
Site 2	R-137	C-133	T-1221	Nov. 16, 2014 Nov. 28, 2014* (*:Telecom port)
Site 3	R-138	C-134	T-1222	
3m Semi-anechoic chamber	-	A-0166	A-0166	Jul. 3, 2015
10m Semi-anechoic chamber				
Shielded room No.1	-			

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory

Appendix A. Test equipment

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ECSI	100451	Nov. 2014	Nov. 16, 2013
Preamplifier	ANRITSU	MH648A	M96057	Jun. 2014	Jun. 12, 2013
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	892246/010	Sep. 2014	Sep. 14, 2012
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2155	May 2014	May 1, 2013
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	May 2014	May 1, 2013
Attenuator	TME	CFA-01NPJ-6	N/A (S275)	Jun. 2014	Jun. 6, 2013
Attenuator	TME	CFA-01NPJ-3	N/A (S272)	Jun. 2014	Jun. 6, 2013
Spectrum analyzer	Agilent Technologies	E4440A	US4432655	May 2014	May 14, 2013
Preamplifier	Agilent Technologies	8449B	3008A1008	Dec. 2014	Dec. 9, 2013
Double ridged guide antenna	EMCO	3115	4328	Jan. 2014	Jan. 21, 2013
Attenuator	AEROFLEX	40A-03	081217-20	Feb. 2014	Feb. 23, 2013
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170189	May 2015	May 2, 2013
Preamplifier	TSJ	MLA-1840-B03-35	1240332	May 2015	May 2, 2013
Notch filter	Micro-Tronics	BRM50702	045	Nov. 2014	Nov. 12, 2013
Microwave cable	SUHNER	SUCOFLEX104/9m	322083/4	May 2014	May 14, 2013
		SUCOFLEX104/9m	346316/4	Oct. 2014	Oct. 6, 2013
		SUCOFLEX104/1m	322084/4	Oct. 2014	Oct. 6, 2013
		SUCOFLEX104/1.5m	317226/4	Oct. 2014	Oct. 6, 2013
		SUCOFLEX104/7m	41625/6	Oct. 2014	Oct. 6, 2013
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-NSA)	May 2014	May 6, 2013
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-SVSWR)	May 2014	May 6, 2013