

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name: Pantech Co., Ltd.	Date of Issue: February 05, 2013
Address: Pantech Bldg, I-2, DMC, Sangam-dong, Mapo-gu, Seoul, 121-792, Korea	Location: HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea
	Test Report No.: HCTR1302FR08
	HCT FRN: 0005866421

FCC ID:	JYCORBIT
APPLICANT:	Pantech Co., Ltd.

FCC Model(s):	MHS291LVW
EUT Type:	Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§2 , §27
Tx Frequency:	1712.5 MHz – 1752.5 MHz (LTE – Band 4_5 MHz) 1715.0 MHz – 1750.0 MHz (LTE – Band 4_10 MHz) 1717.5 MHz – 1747.5 MHz (LTE – Band 4_15 MHz) 1720.0 MHz – 1745.0 MHz (LTE – Band 4_20 MHz) 782 MHz (LTE–Band 13_10 MHz)
Max. RF Output Power:	Band 4 (5 MHz) : 0.581 W (QPSK) (27.64 dBm) 0.638 W (16-QAM) (28.05 dBm) Band 4 (10 MHz) : 0.603 W (QPSK) (27.80 dBm) 0.624 W (16-QAM) (27.95 dBm) Band 4 (15 MHz) : 0.687 W (QPSK) (28.37 dBm) 0.687 W (16-QAM) (28.37 dBm) Band 4 (20 MHz) : 0.690 W (QPSK) (28.39 dBm) 0.697 W (16-QAM) (28.43 dBm) Band 13 (10MHz) : 0.144 W (QPSK) (21.57 dBm) 0.147 W (16-QAM) (21.68 dBm)
Emission Designator(s):	Band 4 (5 MHz) : 4M50G7D (QPSK) / 4M49W7D (16-QAM) Band 4 (10 MHz) : 8M98G7D (QPSK) / 8M96W7D (16-QAM) Band 4 (15 MHz) : 13M43G7D (QPSK) / 13M43W7D (16-QAM) Band 4 (20 MHz) : 17M91G7D (QPSK) / 17M87W7D (16-QAM) Band 13 (10MHz) : 8M98G7D (QPSK) / 8M98W7D (16-QAM)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)


Report prepared by
: Jae Chul Shin
Test engineer of RF Team


Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1302FR08	February 05, 2013	- First Approval Report

Table of Contents

1. GENERAL INFORMATION		4
2. INTRODUCTION		5
2.1. EUT DESCRIPTION.....		5
2.2. MEASURING INSTRUMENT CALIBRATION.....		5
2.3. TEST FACILITY		5
3. DESCRIPTION OF TESTS		6
3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....		6
3.2 OCCUPIED BANDWIDTH.		7
3.3 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz)		8
3.4 AWS – MOBILE FREQUENCY BLOCKS (1710 – 1755 MHz).....		8
3.5 PEAK-AVERAGE RATIO.		9
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		9
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE		10
4. LIST OF TEST EQUIPMENT		11
5. SUMMARY OF TEST RESULTS		12
6. SAMPLE CALCULATION		13
7. TEST DATA		14
7.1 CONDUCTED OUTPUT POWER		14
7.2 PEAK-TO-AVERAGE RATIO		18
7.3 OCCUPIED BANDWIDTH		19
7.4 CONDUCTED SPURIOUS EMISSIONS		19
7.4.1 BAND EDGE.....		19
7.5 EFFECTIVE RADIATED POWER OUTPUT		20
7.6 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT		21
7.7 RADIATED SPURIOUS EMISSIONS.....		23
7.7.1 RADIATED SPURIOUS EMISSIONS (Band 4)		23
7.7.2 RADIATED SPURIOUS EMISSIONS (Band 13)		27
7.7.2.1 RADIATED SPURIOUS EMISSIONS (1559 ~ 1610 MHz Band).....		27
7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE		28
7.8.1 FREQUENCY STABILITY (LTE Band 4).....		28
7.8.2 FREQUENCY STABILITY (LTE Band 13).....		32
8. TEST PLOTS.....		33

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT



MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: Pantech Co., Ltd.

Address: Pantech Bldg, I-2, DMC, Sangam-dong, Mapo-gu, Seoul, 121-792, Korea

FCC ID: JYCORBIT

Application Type: Certification

FCC Classification: Licensed Portable Transmitter (PCB)

FCC Rule Part(s): §2 , §27

EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN

FCC Model(s): MHS291LVW

Tx Frequency: 1712.5 MHz – 1752.5 MHz (LTE – Band 4_5 MHz)
1715.0 MHz – 1750.0 MHz (LTE – Band 4_10 MHz)
1717.5 MHz – 1747.5 MHz (LTE – Band 4_15 MHz)
1720.0 MHz – 1745.0 MHz (LTE – Band 4_20 MHz)
782 MHz (LTE–Band 13_10 MHz)

Max. Conducted Power:

Band 4 (5 MHz)	0.581 W (QPSK) (27.64 dBm) 0.638 W (16-QAM) (28.05 dBm)
Band 4 (10 MHz) :	0.603 W (QPSK) (27.80 dBm) 0.624 W (16-QAM) (27.95 dBm)
Band 4 (15 MHz)	0.687 W (QPSK) (28.37 dBm) 0.687 W (16-QAM) (28.37 dBm)
Band 4 (20 MHz) :	0.690 W (QPSK) (28.39 dBm) 0.697 W (16-QAM) (28.43 dBm)
Band 13 (10MHz) :	0.144 W (QPSK) (21.57 dBm) 0.147 W (16-QAM) (21.68 dBm)

Emission Designator(s):

Band 4 (5 MHz) :	4M50G7D (QPSK) / 4M49W7D (16-QAM)
Band 4 (10 MHz) :	8M98G7D (QPSK) / 8M96W7D (16-QAM)
Band 4 (15 MHz) :	13M43G7D (QPSK) / 13M43W7D (16-QAM)
Band 4 (20 MHz) :	17M91G7D (QPSK) / 17M87W7D (16-QAM)
Band 13 (10MHz) :	8M98G7D (QPSK) / 8M98W7D (16-QAM)

Date(s) of Tests: December 06, 2012 ~ February 01, 2013

Antenna Specification Manufacturer: KARAM SOLUTION

Antenna type: Built-in Antenna

Peak Gain: Band 4: -4.65 dBi

Band 13: -1.87 dBi

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT



2. INTRODUCTION

2.1. EUT DESCRIPTION

The Pantech Co., Ltd. MHS291LVW Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN consists of LTE 4 and 13.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

3. DESCRIPTION OF TESTS

3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-C-2004 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a positive peak detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$


Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

3.2 OCCUPIED BANDWIDTH.

Test set-up

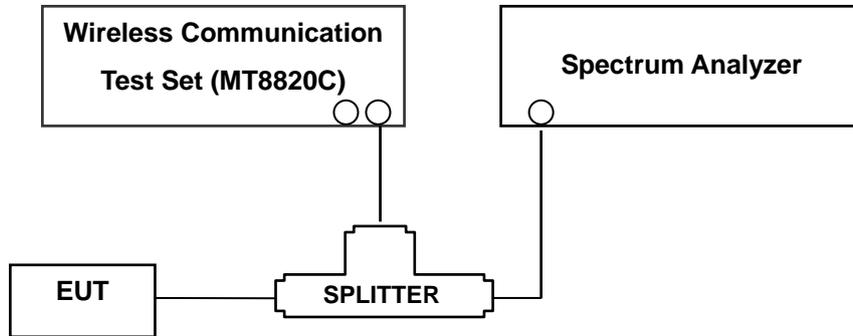

(Configuration of conducted Emission measurement)
Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

3.3 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz)

§27.5(b)

746–764 MHz and 776–794 MHz bands. The following frequencies are available for licensing pursuant to this part in the 746–764 MHz and 776–794 MHz bands:


- (1) Two paired channels of 1 megahertz each are available for assignment solely to Guard band managers. Block A: 746–747 MHz and 776–777 MHz. (2) Two paired channels of 2 megahertz each are available for assignment solely to Guard band managers. Block B: 762–764 MHz and 792–794 MHz. (3) Two paired channels of 5 megahertz each are available for assignment. Block C: 747–752 MHz and 777–782 MHz. (4) Two paired channels of 10 megahertz each are available for assignment. Block D: 752–762 MHz and 782–792 MHz.

§27.5(c)

Three paired channel blocks of 12 MHz each are available for assignment as follows : Block A: 698 – 704 MHz and 728 – 734 MHz ; Block B : 704 – 710 MHz and 734 – 740 MHz ; and Block C : 710 – 716 MHz and 740 – 746 MHz. Two unpaired channel blocks of 6 MHz each are available for assignment as follows : Block D : 716 – 722 MHz ; and Block E : 722- 728 MHz.

3.4 AWS – MOBILE FREQUENCY BLOCKS (1710 – 1755 MHz)

§27.5(h)

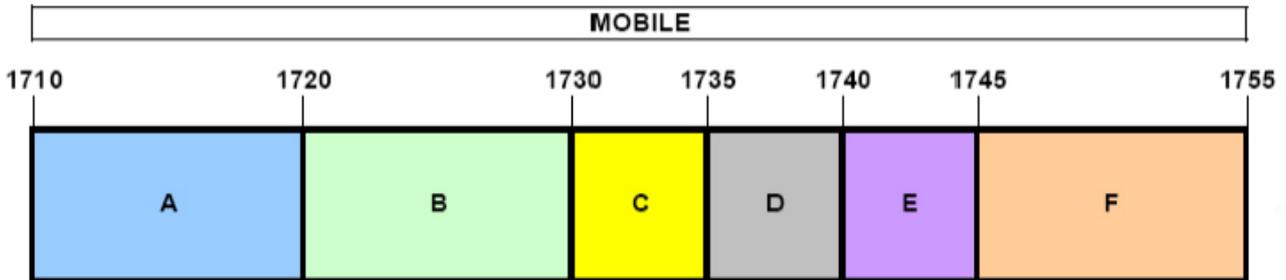

BLOCK 1: 1710 – 1720 MHz (A)

BLOCK 4: 1735 – 1740 MHz (D)

BLOCK 2: 1720 – 1730 MHz (B)

BLOCK 5: 1740 – 1745 MHz (E)

BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 6: 1745 – 1755 MHz (F)



3.5 PEAK-AVERAGE RATIO.

§27.50(d)(5)

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the – 13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 30 MHz to 26.5 GHz. A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.


NOTES: The analyzer plot offsets were determined by below conditions.

- For LTE Band4, total offset 27.1 dBm = 20 dBm attenuator + 6 dBm Divider + 1.1 dBm RF cables.
- For LTE Band 13, total offset 28.6 dBm = 20 dBm attenuator + 6 dBm Divider + 2.6 dBm RF cables.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

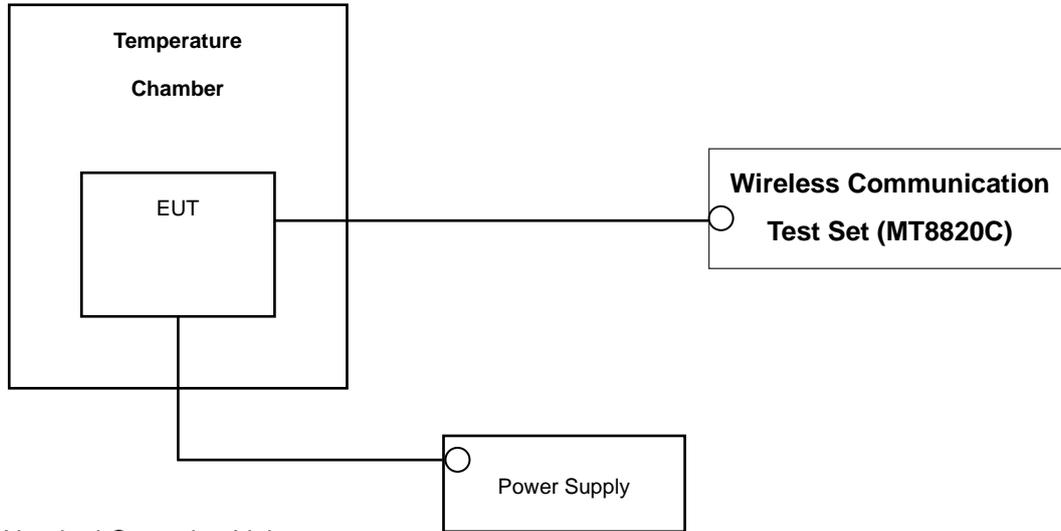

* Nominal Operating Voltage

Test Procedure

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
Agilent	E9327A/ Power Sensor	MY4442009	Annual	05/02/2013
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/11/2013
Wainwright	WHK1.2/15G-10EF/H.P.F	2	Annual	05/02/2013
Wainwright	WHK3.3/18G-10EF/H.P.F	1	Annual	05/02/2013
Hewlett Packard	11667B / Power Splitter	10126	Annual	11/07/2013
Digital	EP-3010/ Power Supply	3110117	Annual	11/07/2013
Schwarzbeck	UHAP/ Dipole Antenna	557	Biennial	03/11/2013
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	03/11/2013
Korea Engineering	KR-1005L / Chamber	KRAB05063-3CH	Annual	11/07/2013
Schwarzbeck	BBHA 9120D/ Horn Antenna	296	Biennial	02/20/2014
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	05/02/2013
WEINSCHTEL	ATTENUATOR	BR0592	Annual	11/07/2013
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	Annual	06/11/2013
Anritsu	MT8820C/ Radio Communication Analyser	6200951754	Annual	08/24/2013

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 27.53(h)(1)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 27.53(h)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	$< 43 + 10 \log_{10}(P[\text{Watts}])$ at Band Edge and for all-of-band emissions		PASS
27.50(d)(5)	Peak-Average Ratio	$< 13 \text{ dB}$		PASS
2.1046	Conducted Output Power	N/A		PASS
2.1055, 27.54	Frequency stability / variation of ambient temperature	$< 2.5 \text{ ppm}$		PASS
27.50(b)(3),(c)(3)	Effective Radiated Power (Band 13)	$< 3 \text{ Watts max. ERP}$	RADIATED	PASS
27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	$< 1 \text{ Watts max. EIRP}$		PASS
2.1053, 27.53(h), 27.53(g)	Undesirable Out-of-Band Emissions	$< 43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS
2.1053, 27.53(e)	Undesirable Emissions in the 1559 – 1610 MHz band	$< -40\text{dBm/MHz EIRP (wideband)}$ $< -50\text{dBm EIRP (narrowband)}$		PASS

6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
LTE	23230	782	-10.59	37.59	-10.52	1.53	H	0.358	25.54

ERP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (**ERP**).

B. Emission Designator

QPSK Modulation

Emission Designator = 8M95G7D

LTE BW = 8.95 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Amplitude/Angle Modulated

16QAM Modulation

Emission Designator = 8M94W7D

LTE BW = 8.94 MHz

D = Amplitude/Angle Modulated


7 = Quantized/Digital Info

W = Combination (Audio/Data)

7. TEST DATA

7.1 CONDUCTED OUTPUT POWER

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

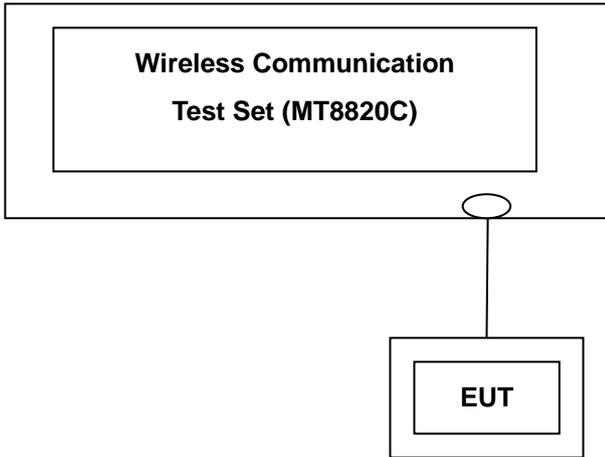

Test Result

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 4	5	1712.5	19975	1	0	23.14	22.29
				1	12	23.02	22.10
				1	24	23.11	22.27
				12	6	22.31	21.21
				25	0	22.30	21.15
		1732.5	20175	1	0	23.17	22.30
				1	12	23.13	22.08
				1	24	23.22	22.25
				12	6	22.33	21.28
				25	0	22.20	21.24
		1752.5	20375	1	0	22.97	22.05
				1	12	23.10	22.29
				1	24	23.10	22.21
				12	6	22.19	21.19
				25	0	22.23	21.11

LTE Conducted Average Output Powers (LTE Band 4_5 MHz)

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 4	10	1715.0	20000	1	0	23.30	22.30
				1	24	23.21	22.22
				1	49	23.27	22.35
				25	12	22.30	21.23
				50	0	22.26	21.21
		1732.5	20175	1	0	23.35	22.45
				1	24	23.24	22.22
				1	49	23.20	22.20
				25	12	22.39	21.23
				50	0	22.33	21.31
		1750.0	20350	1	0	23.01	21.96
				1	24	23.30	22.29
				1	49	22.98	22.22
				25	12	22.06	21.11
				50	0	21.96	21.07

LTE Conducted Average Output Powers (LTE Band 4_10 MHz)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 4	15	1717.5	20025	1	0	23.22	22.27
				1	37	23.26	22.29
				1	74	23.15	22.22
				36	18	22.24	21.18
				75	0	22.27	21.17
		1732.5	20175	1	0	23.17	22.35
				1	37	23.17	22.17
				1	74	23.23	22.27
				36	18	22.21	21.22
				75	0	22.24	21.24
		1747.5	20325	1	0	23.15	22.15
				1	37	23.12	22.09
				1	74	23.07	22.28
				36	18	22.00	21.03
				75	0	21.92	20.95

LTE Conducted Average Output Powers (LTE Band 4_15 MHz)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 4	20	1720.0	20050	1	0	23.25	22.30
				1	49	23.25	22.22
				1	99	23.18	22.25
				50	25	22.26	21.21
				100	0	22.31	21.33
		1732.5	20175	1	0	23.18	22.31
				1	49	23.19	22.14
				1	99	23.07	22.09
				50	25	22.25	21.25
				100	0	22.13	21.15
	1745.0	20300	1	0	23.18	22.33	
			1	49	23.00	22.03	
			1	99	23.05	22.28	
			50	25	21.79	20.88	
			100	0	21.90	20.92	

LTE Conducted Average Output Powers (LTE Band 4_20 MHz)

Band	Band Width (MHz)	Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
						QPSK	16-QAM
Band 13	10	782.0	23230	1	0	23.08	22.08
				1	24	23.02	22.04
				1	49	23.05	22.07
				25	12	21.74	20.70
				50	0	21.74	20.66

LTE Conducted Average Output Powers (LTE Band 13_10 MHz)

Note : Detecting mode is average.

7.2 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Band 4	5 MHz	1732.5	QPSK	25	0	7.31
			16-QAM	25	0	9.06
	10 MHz	1732.5	QPSK	50	0	7.31
			16-QAM	50	0	8.32
	15 MHz	1732.5	QPSK	75	0	7.26
			16-QAM	75	0	8.54
20 MHz	1732.5	QPSK	100	0	7.66	
		16-QAM	100	0	8.90	

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Band 13	10 MHz	782.0	QPSK	50	0	7.56
			16-QAM	50	0	8.20

- Plots of the EUT's Peak- to- Average Ratio are shown Page 39 ~ 43

7.3 OCCUPIED BANDWIDTH

Band	Band Width (MHz)	Frequency (Mhz)	Modulation	Resource Block Size	Resource Block Offset	Data (RB 1 : KHz / RB 25,50,75,100 : MHz)
Band 4	5	1732.5	QPSK	25	0	4.5006
			16-QAM	25	0	4.4879
	10	1732.5	QPSK	50	0	8.9752
			16-QAM	50	0	8.9633
	15	1732.5	QPSK	75	0	13.4250
			16-QAM	75	0	13.4290
20	1732.5	QPSK	100	0	17.9140	
		16-QAM	100	0	17.8680	

Band	Band Width (MHz)	Frequency (Mhz)	Modulation	Resource Block Size	Resource Block Offset	Data (RB 1 : KHz / RB 25,50,75,100 : MHz)
Band 13	10	782	QPSK	50	0	8.9822
			16-QAM	50	0	8.9781

- Plots of the EUT's Occupied Bandwidth are shown Page 34 ~ 38

7.4 CONDUCTED SPURIOUS EMISSIONS

- Plots of the EUT's Conducted Spurious Emissions are shown Page 59 ~ 71

7.4.1 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 44 ~ 58

7.5 EFFECTIVE RADIATED POWER OUTPUT

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
782.0	10 MHz	QPSK	-26.82	33.02	-10.62	0.83	V	0.144	21.57
		16-QAM	-26.71	33.13	-10.62	0.83	V	0.147	21.68

Effective Radiated Power Data (LTE Band 13_10 MHz)

Note: Worst case is 1 resource block.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 1 MHz BW signals, a peak detector is used, with RBW = VBW = 1 MHz. For 10 MHz BW signals, a peak detector is used, with RBW = VBW = 10 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

7.6 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1712.5	5 MHz	QPSK	-12.41	19.43	9.56	1.35	H	0.581	27.64
		16-QAM	-12.00	19.84	9.56	1.35	H	0.638	28.05
1732.5		QPSK	-13.38	18.48	9.66	1.34	H	0.479	26.80
		16-QAM	-13.12	18.74	9.66	1.34	H	0.508	27.06
1752.5		QPSK	-14.26	17.48	9.75	1.40	H	0.383	25.83
		16-QAM	-13.98	17.76	9.75	1.40	H	0.408	26.11

Effective Radiated Power Data (LTE Band 4_5 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1715.0	10 MHz	QPSK	-12.47	19.55	9.57	1.32	H	0.603	27.80
		16-QAM	-12.32	19.70	9.57	1.32	H	0.624	27.95
1732.5		QPSK	-13.85	18.01	9.66	1.34	H	0.430	26.33
		16-QAM	-13.69	18.17	9.66	1.34	H	0.446	26.49
1750.0		QPSK	-13.96	17.57	9.74	1.40	H	0.390	25.91
		16-QAM	-13.78	17.75	9.74	1.40	H	0.406	26.09

Effective Radiated Power Data (LTE Band 4_10 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1717.5	15 MHz	QPSK	-13.99	18.00	9.58	1.31	H	0.424	26.27
		16-QAM	-13.65	18.34	9.58	1.31	H	0.458	26.61
1732.5		QPSK	-11.81	20.05	9.66	1.34	H	0.687	28.37
		16-QAM	-11.82	20.04	9.66	1.34	H	0.685	28.36
1747.5		QPSK	-11.77	19.94	9.73	1.35	H	0.679	28.32
		16-QAM	-11.72	19.99	9.73	1.35	H	0.687	28.37

Effective Radiated Power Data (LTE Band 4_15 MHz)

Note: Worst case is 1 resource block.

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1720.0	20 MHz	QPSK	-12.36	19.40	9.59	1.33	H	0.583	27.66
		16-QAM	-12.44	19.32	9.59	1.33	H	0.573	27.58
1732.5		QPSK	-12.90	18.96	9.66	1.34	H	0.535	27.28
		16-QAM	-12.39	19.47	9.66	1.34	H	0.601	27.79
1745.0		QPSK	-11.88	19.99	9.72	1.32	H	0.690	28.39
		16-QAM	-11.84	20.03	9.72	1.32	H	0.697	28.43

Effective Radiated Power Data (LTE Band 4_20 MHz)

Note: Worst case is 1 resource block.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 1 MHz BW signals, a peak detector is used, with RBW = VBW = 1 MHz. For 10 MHz BW signals, a peak detector is used, with RBW = VBW = 10 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

7.7 RADIATED SPURIOUS EMISSIONS

7.7.1 RADIATED SPURIOUS EMISSIONS (Band 4)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 28.05 dBm = 0.638 W
- ▣ MODULATION SIGNAL: 5 MHz 16-QAM
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: - (43 + 10 log₁₀ (W)) = - 41.05 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19975 (1712.5)	3425.0	-48.95	12.38	-55.45	2.04	V	-45.11	-75.16
	5137.5	-48.57	12.86	-48.24	2.71	H	-38.09	-68.14
	6850.0	-53.05	12.35	-46.78	3.22	H	-37.65	-67.70
20175 (1732.5)	3465.0	-44.92	12.38	-51.13	1.97	V	-40.72	-70.77
	5197.5	-50.96	12.97	-50.74	2.70	H	-40.47	-70.52
	6930.0	-47.26	12.15	-40.17	3.27	H	-31.29	-61.34
20375 (1752.5)	3505.0	-49.11	12.32	-54.81	2.11	V	-44.60	-74.65
	5257.5	-54.21	13.11	-54.59	2.80	H	-44.28	-74.33
	7010.0	-49.67	11.89	-42.01	3.14	H	-33.26	-63.31

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 27.95 dBm = 0.624 W
- ▣ MODULATION SIGNAL: 10 MHz 16-QAM
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: - (43 + 10 log₁₀ (W)) = - 40.95 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20000 (1715.00)	3430.00	-45.26	12.38	-51.76	2.04	H	-41.42	-71.37
	5145.00	-51.46	12.87	-51.02	2.71	V	-40.86	-70.81
	6860.00	-51.75	12.32	-45.56	3.24	V	-36.48	-66.43
20175 (1732.50)	3465.00	-47.02	12.38	-53.23	1.97	H	-42.82	-72.77
	5197.50	-50.75	12.97	-50.53	2.70	H	-40.26	-70.21
	6930.00	-46.75	12.15	-39.66	3.27	H	-30.78	-60.73
20350 (1750.00)	3500.00	-50.85	12.32	-56.60	2.11	H	-46.39	-76.34
	5250.00	-52.45	13.08	-52.78	2.82	H	-42.52	-72.47
	7000.00	-49.55	11.92	-42.58	2.99	H	-33.65	-63.60

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 28.37 dBm = 0.687 W
- ▣ MODULATION SIGNAL: 15 MHz 16-QAM
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: - (43 + 10 log₁₀ (W)) = - 41.37 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20025 (1717.5)	3435.0	-45.08	12.39	-51.59	2.04	H	-41.24	-72.01
	5152.5	-52.32	12.84	-51.95	2.70	V	-41.81	-72.58
	6870.0	-51.30	12.30	-45.05	3.25	V	-36.00	-66.77
20175 (1732.5)	3465.0	-49.94	12.38	-56.15	1.97	H	-45.74	-76.51
	5197.5	-50.49	12.97	-50.27	2.70	H	-40.00	-70.77
	6930.0	-48.49	12.15	-41.40	3.27	H	-32.52	-63.29
20325 (1747.5)	3495.0	-54.62	12.33	-60.35	2.04	H	-50.06	-80.83
	5242.5	-51.70	13.06	-51.81	2.80	V	-41.55	-72.32
	6990.0	-51.44	11.96	-44.22	3.24	H	-35.50	-66.27

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 28.43 dBm = 0.697 W
- ▣ MODULATION SIGNAL: 20 MHz 16-QAM
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: - (43 + 10 log₁₀ (W)) = - 41.43 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20050 (1720.0)	3440.0	-46.90	12.39	-53.43	2.04	V	-43.08	-73.61
	5160.0	-52.71	12.89	-52.41	2.69	V	-42.21	-72.74
	6880.0	-51.14	12.27	-44.43	3.24	H	-35.40	-65.93
20175 (1732.5)	3465.0	-50.57	12.38	-56.78	1.97	V	-46.37	-76.90
	5197.5	-50.92	12.97	-50.70	2.70	V	-40.43	-70.96
	6930.0	-47.69	12.15	-40.60	3.27	H	-31.72	-62.25
20300 (1745.0)	3490.0	-44.02	12.33	-49.75	2.04	V	-39.46	-69.99
	5235.0	-51.19	13.06	-51.28	2.80	H	-41.02	-71.55
	6980.0	-49.19	11.99	-42.00	3.23	H	-33.24	-63.77

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

7.7.2 RADIATED SPURIOUS EMISSIONS (Band 13)

- ▣ OPERATING FREQUENCY : 782.00 MHz
- ▣ MEASURED OUTPUT POWER: 21.68 dBm = 0.147 W
- ▣ MODULATION SIGNAL: 10 MHz 16-QAM
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: - (43 + 10 log₁₀ (W)) = - 34.68 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23230 (782.00)	2346.00	-42.13	7.75	-45.33	1.68	V	-39.26	-60.94
	3128.00	-	-	-	-	-	-	-
	3910.00	-	-	-	-	-	-	-

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

7.7.2.1 RADIATED SPURIOUS EMISSIONS (1559 ~ 1610 MHz Band)

- ▣ OPERATING FREQUENCY : 782.00 MHz
- ▣ MODULATION SIGNAL: 10 MHz 16-QAM
- ▣ DISTANCE: 3 meters
- ▣ WIDEBAND EMISSION LIMIT: - 40 dBm/MHz


FREQUENCY (MHz)	EMISSION TYPE	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	MARGIN (dB)
1564.3	WIDEBAND	-52.89	6.81	-59.32	1.11	H	-53.62	-75.30

7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.8.1 FREQUENCY STABILITY (LTE Band 4)


- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.8 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.800	+20(Ref)	1732 499 995	0	0.000 000	0.000
100%		-30	1732 499 997	2.49	0.000 000	0.001
100%		-20	1732 499 998	3.36	0.000 000	0.002
100%		-10	1732 499 997	1.76	0.000 000	0.001
100%		0	1732 499 996	1.34	0.000 000	0.001
100%		+10	1732 499 993	-1.60	0.000 000	-0.001
100%		+30	1732 499 991	-4.03	0.000 000	-0.002
100%		+40	1732 499 993	-1.93	0.000 000	-0.001
100%		+50	1732 499 994	-0.43	0.000 000	0.000
115%	4.370	+20	1732 499 996	0.83	0.000 000	0.000
Batt. Endpoint	3.500	+20	1732 500 001	6.09	0.000 000	0.004

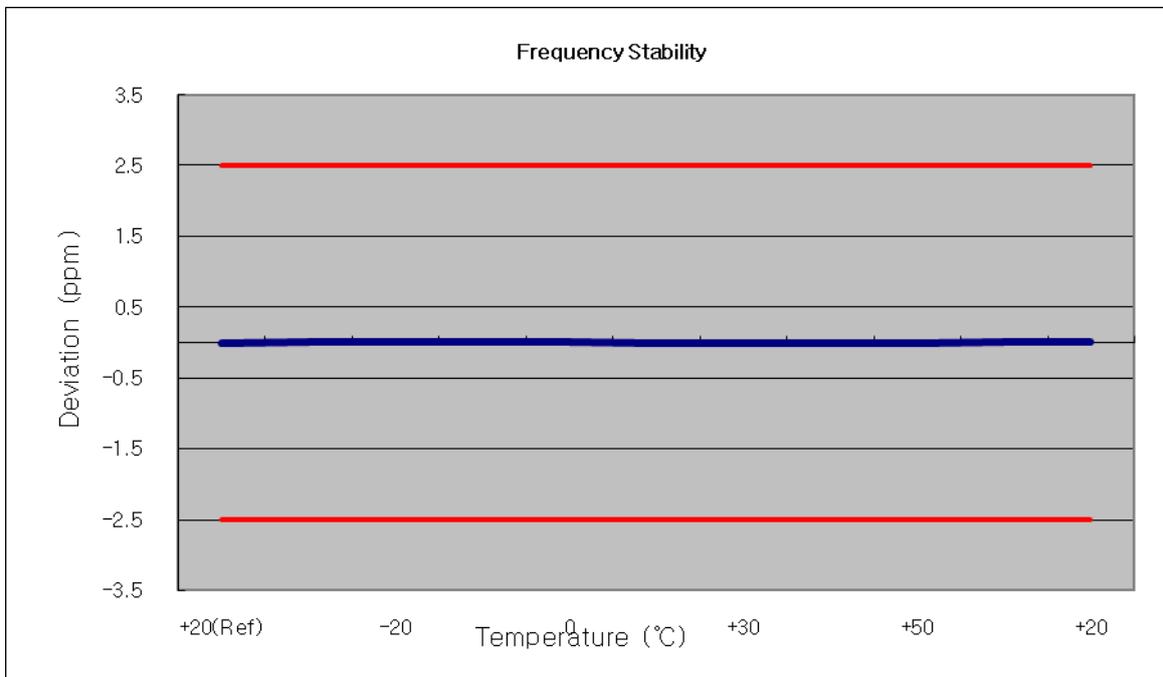


- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.8 VDC
- ▣ DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.800	+20(Ref)	1732 500 005	0	0.000 000	0.000
100%		-30	1732 499 997	-8.84	-0.000 001	-0.005
100%		-20	1732 500 001	-4.64	0.000 000	-0.003
100%		-10	1732 499 998	-7.74	0.000 000	-0.004
100%		0	1732 500 001	-4.45	0.000 000	-0.003
100%		+10	1732 500 002	-3.79	0.000 000	-0.002
100%		+30	1732 500 005	-0.13	0.000 000	0.000
100%		+40	1732 500 016	10.06	0.000 001	0.006
100%		+50	1732 500 005	-0.74	0.000 000	0.000
115%		4.370	+20	1732 500 003	-2.26	0.000 000
Batt. Endpoint	3.500	+20	1732 500 003	-2.56	0.000 000	-0.001

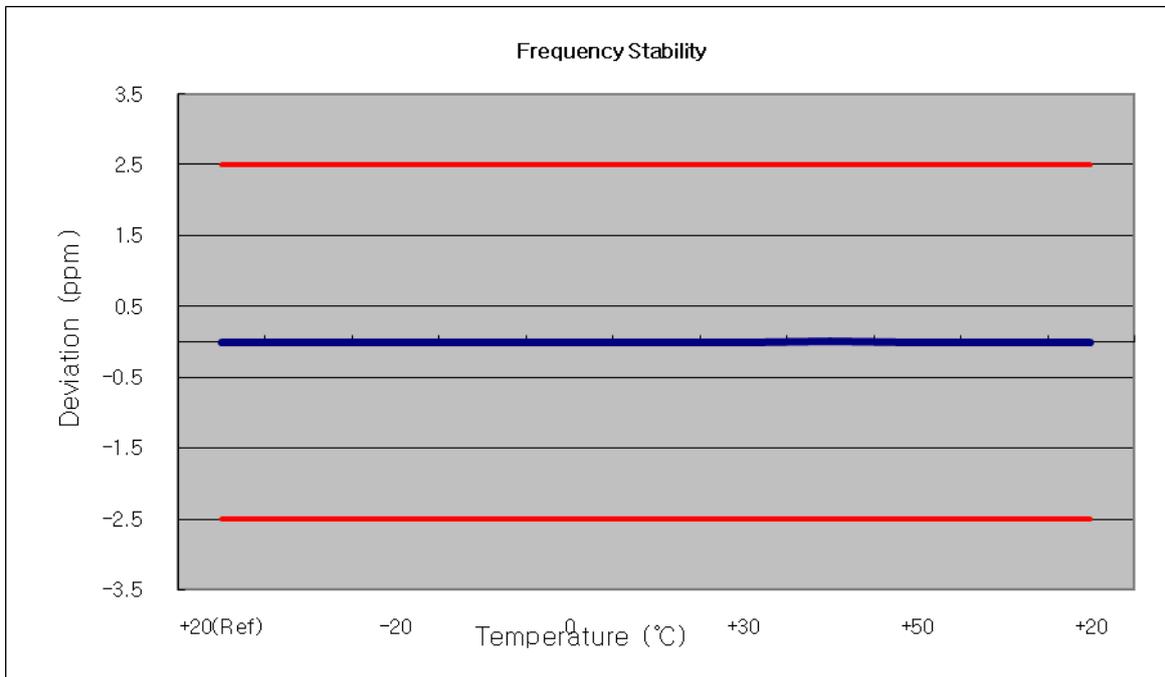


- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.8 VDC
- ▣ DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.800	+20(Ref)	1732 500 000	0	0.000 000	0.000
100%		-30	1732 499 997	-2.63	0.000 000	-0.002
100%		-20	1732 500 001	1.07	0.000 000	0.001
100%		-10	1732 499 999	-1.33	0.000 000	-0.001
100%		0	1732 500 003	3.10	0.000 000	0.002
100%		+10	1732 500 003	2.86	0.000 000	0.002
100%		+30	1732 500 002	1.89	0.000 000	0.001
100%		+40	1732 500 006	5.87	0.000 000	0.003
100%		+50	1732 500 006	5.71	0.000 000	0.003
115%		4.370	+20	1732 500 005	4.68	0.000 000
Batt. Endpoint	3.500	+20	1732 500 005	5.15	0.000 000	0.003

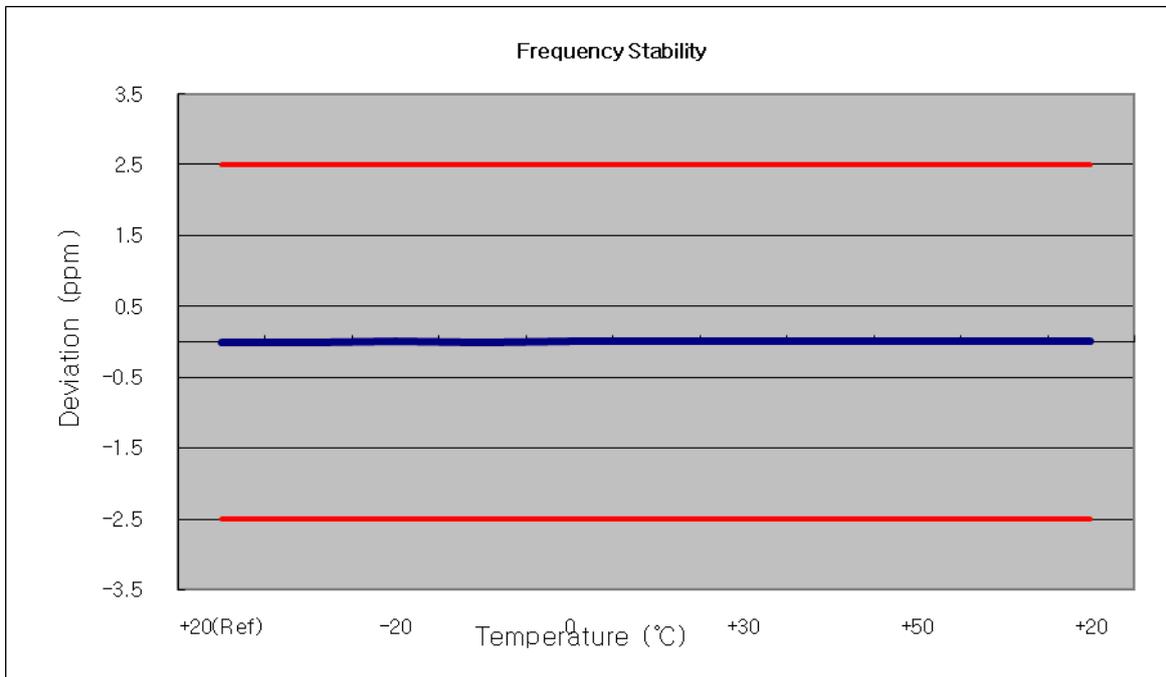

- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.8 VDC
- ▣ DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.800	+20(Ref)	1732 499 992	0	0.000 000	0.000
100%		-30	1732 500 002	10.37	0.000 001	0.006
100%		-20	1732 499 989	-3.36	0.000 000	-0.002
100%		-10	1732 499 991	-0.63	0.000 000	0.000
100%		0	1732 499 991	-1.13	0.000 000	-0.001
100%		+10	1732 499 993	1.09	0.000 000	0.001
100%		+30	1732 499 991	-1.17	0.000 000	-0.001
100%		+40	1732 499 990	-1.59	0.000 000	-0.001
100%		+50	1732 499 995	2.69	0.000 000	0.002
115%		4.370	+20	1732 499 995	2.52	0.000 000
Batt. Endpoint	3.500	+20	1732 499 997	4.61	0.000 000	0.003

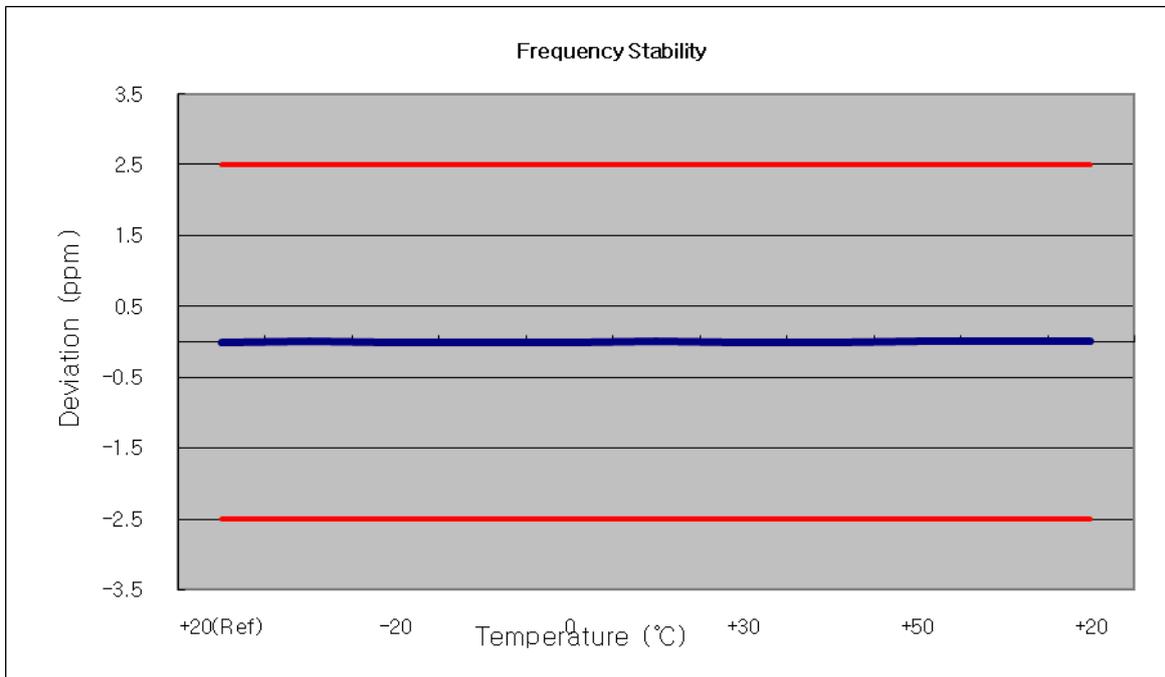

7.8.2 FREQUENCY STABILITY (LTE Band 13)

- ▣ OPERATING FREQUENCY: 782,000,000 Hz
- ▣ CHANNEL: 23230 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.8 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.800	+20(Ref)	782 000 001	0	0.000 000	0.000
100%		-30	782 000 000	-1.59	0.000 000	-0.002
100%		-20	782 000 001	-0.63	0.000 000	-0.001
100%		-10	782 000 001	-0.04	0.000 000	0.000
100%		0	782 000 002	0.11	0.000 000	0.000
100%		+10	781 999 998	-2.95	0.000 000	-0.004
100%		+30	782 000 000	-1.50	0.000 000	-0.002
100%		+40	782 000 000	-1.86	0.000 000	-0.002
100%		+50	781 999 997	-4.55	-0.000 001	-0.006
115%	4.370	+20	782 000 000	-1.40	0.000 000	-0.002
Batt. Endpoint	3.500	+20	781 999 998	-3.43	0.000 000	-0.004

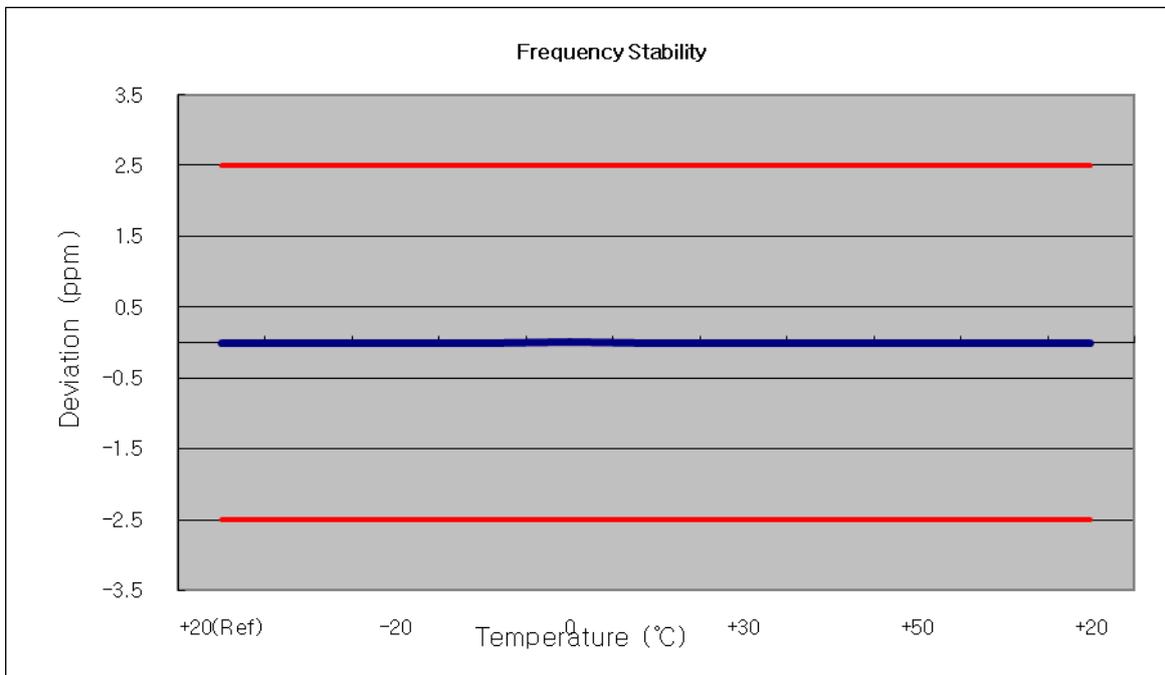





8. TEST PLOTS

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT


BAND 4. Occupied Bandwidth Plot (20175ch_5 MHz_QPSK_RB Size 25)

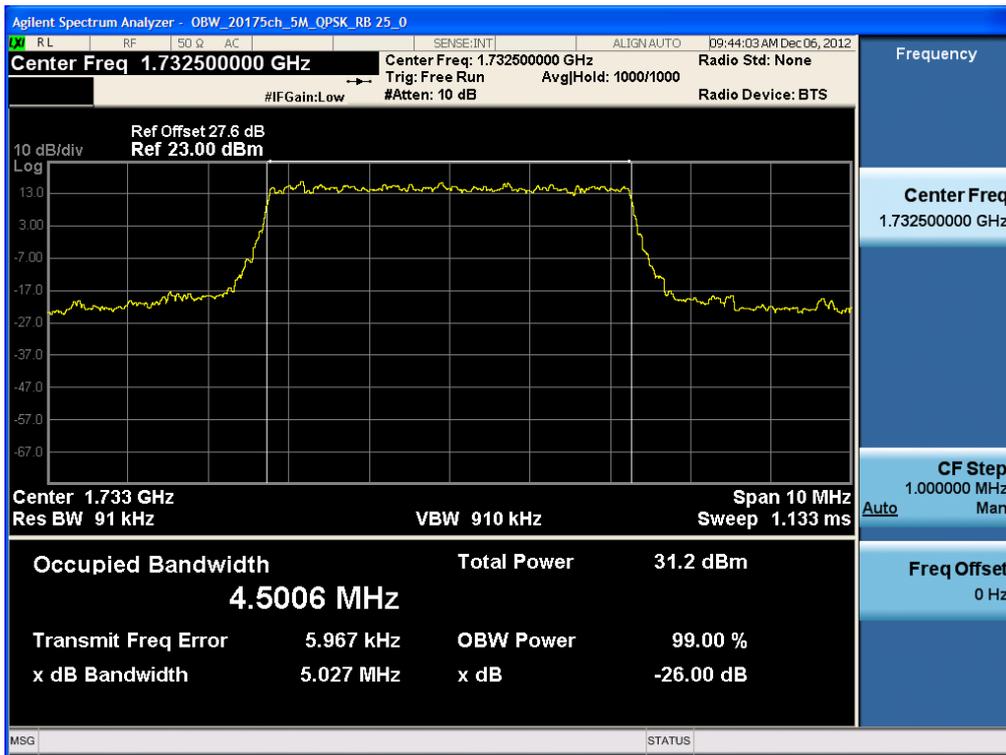


BAND 4. Occupied Bandwidth Plot (20175ch_5 MHz_16-QAM_RB 25)

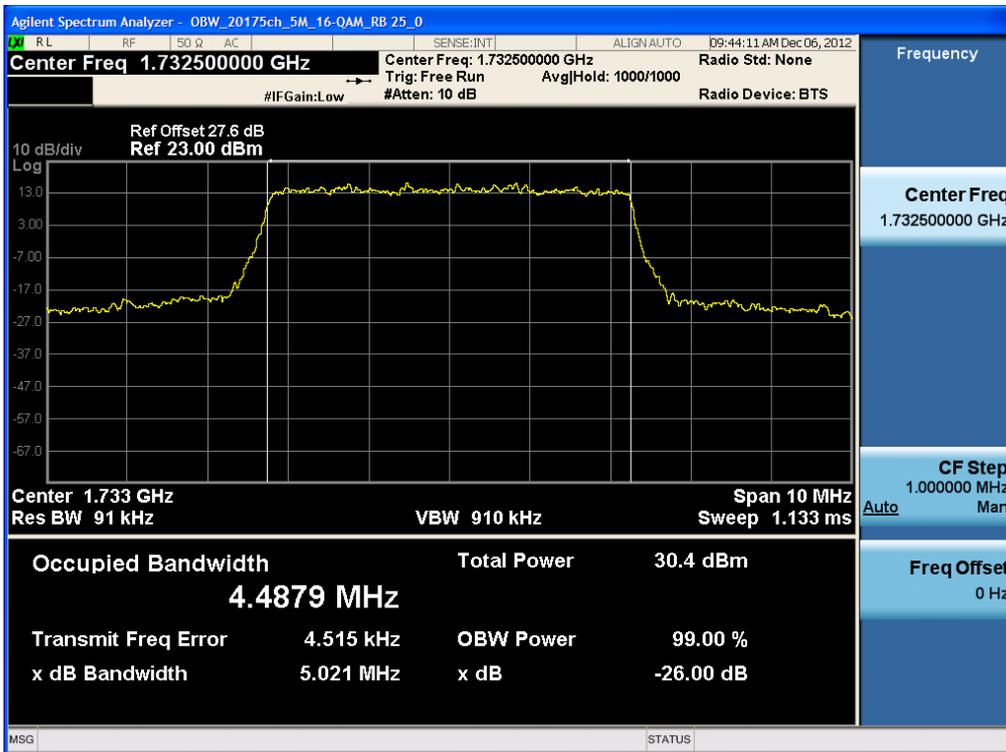

BAND 4. Occupied Bandwidth Plot (20175ch_10 MHz_QPSK_RB 50)

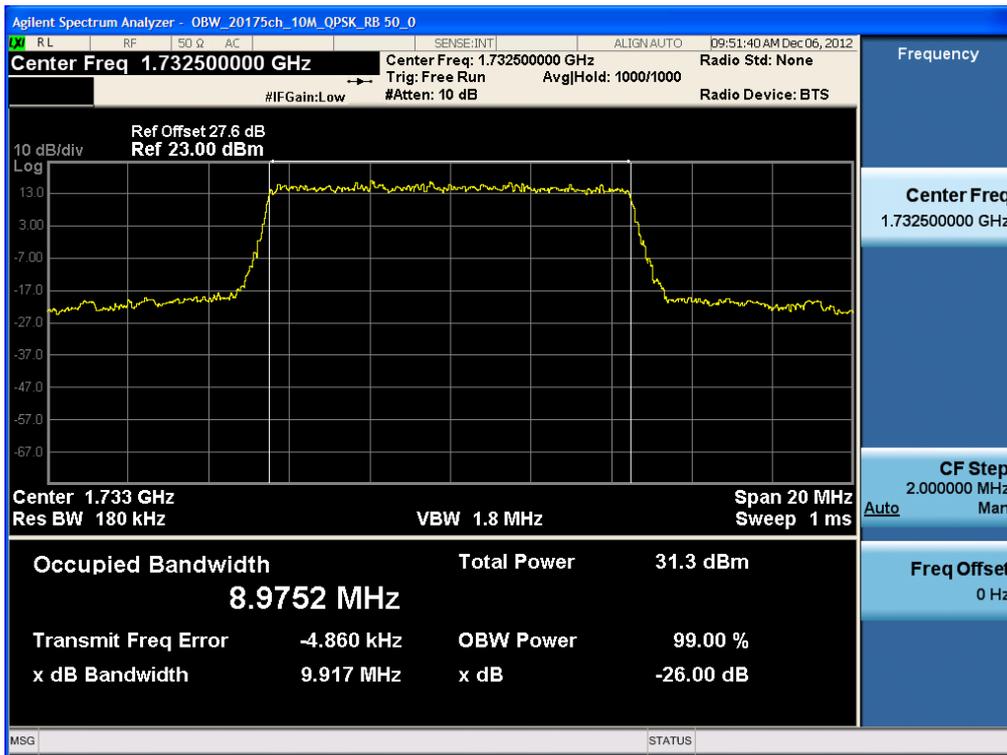

BAND 4. Occupied Bandwidth Plot (20175ch_10 MHz_16-QAM_RB 50)

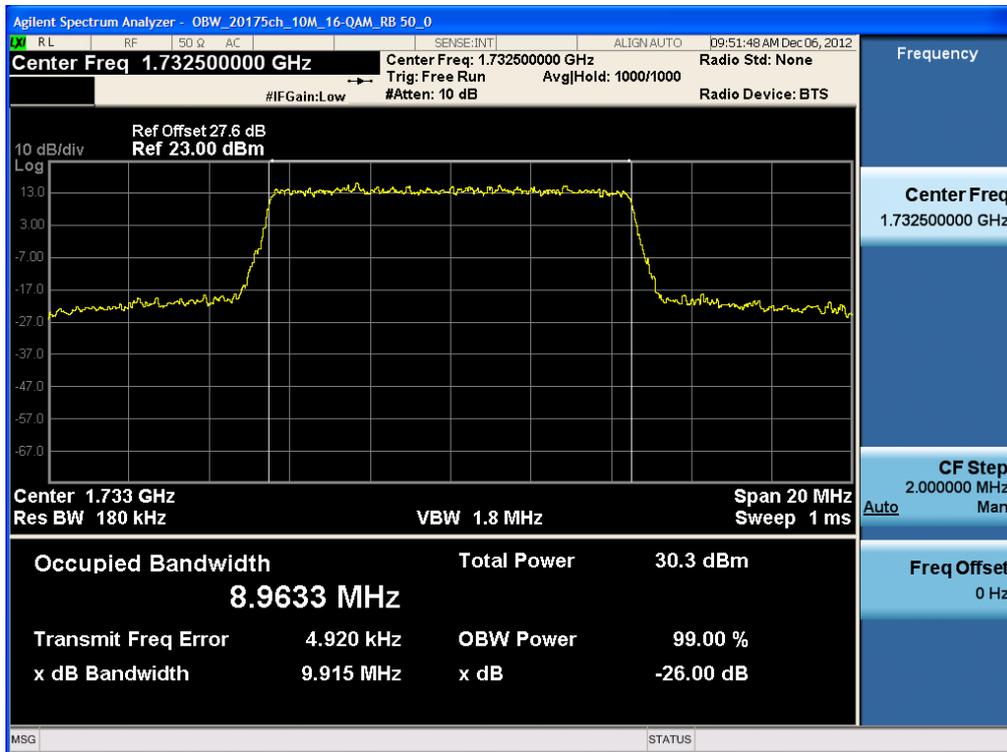


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT
---------------------------------	-------------------------------------	--	---------------------


BAND 4. Occupied Bandwidth Plot (20175ch_15 MHz_QPSK_RB Size 75)

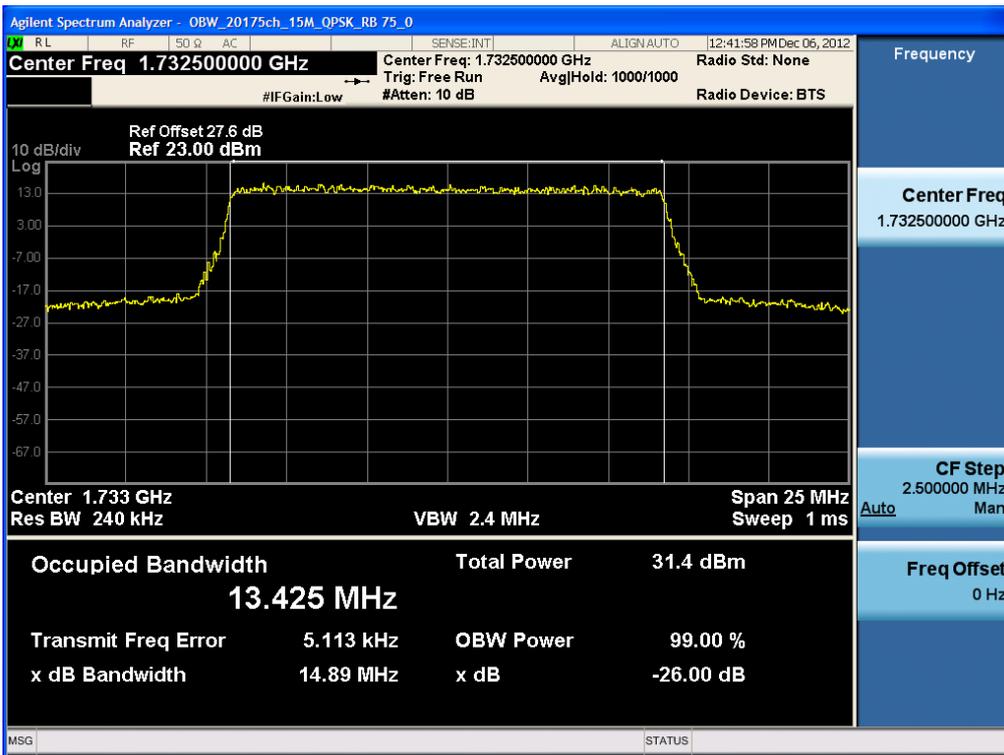


BAND 4. Occupied Bandwidth Plot (20175ch_15 MHz_16-QAM_RB 75)

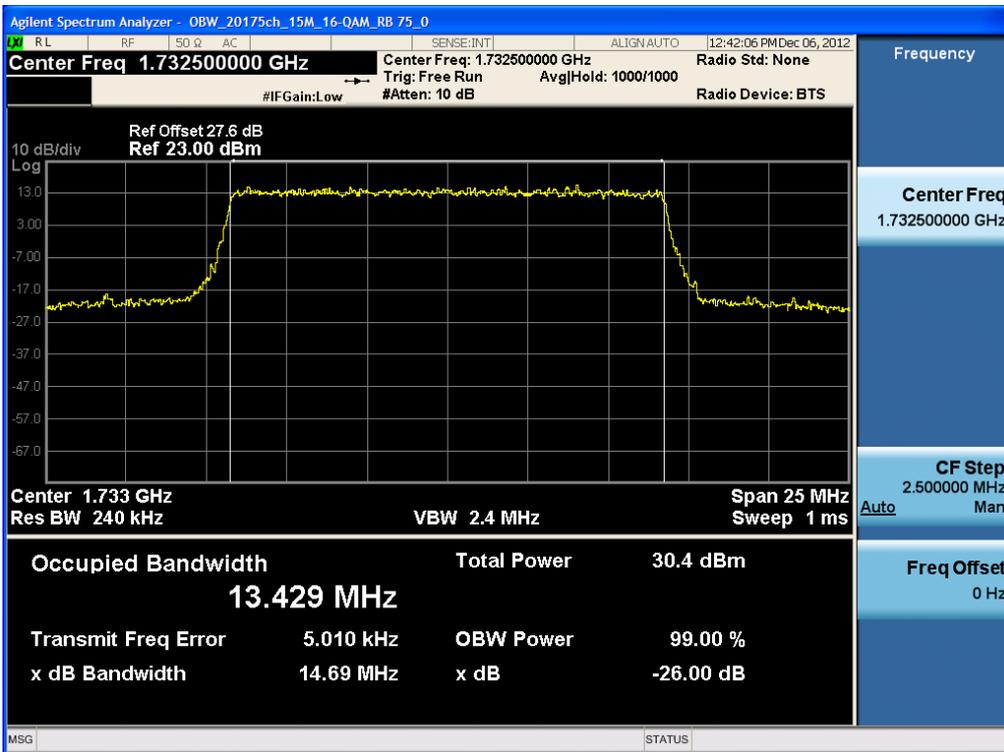

BAND 4. Occupied Bandwidth Plot (20175ch_20 MHz_QPSK_RB 100)

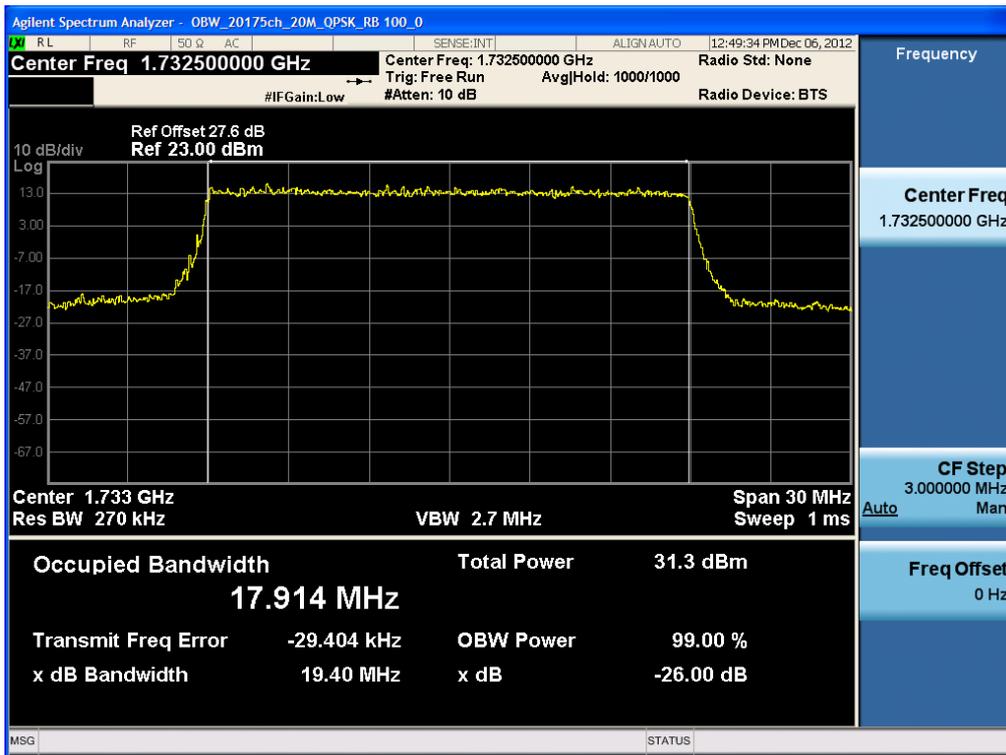

BAND 4. Occupied Bandwidth Plot (20175ch_20 MHz_16-QAM_RB 100)

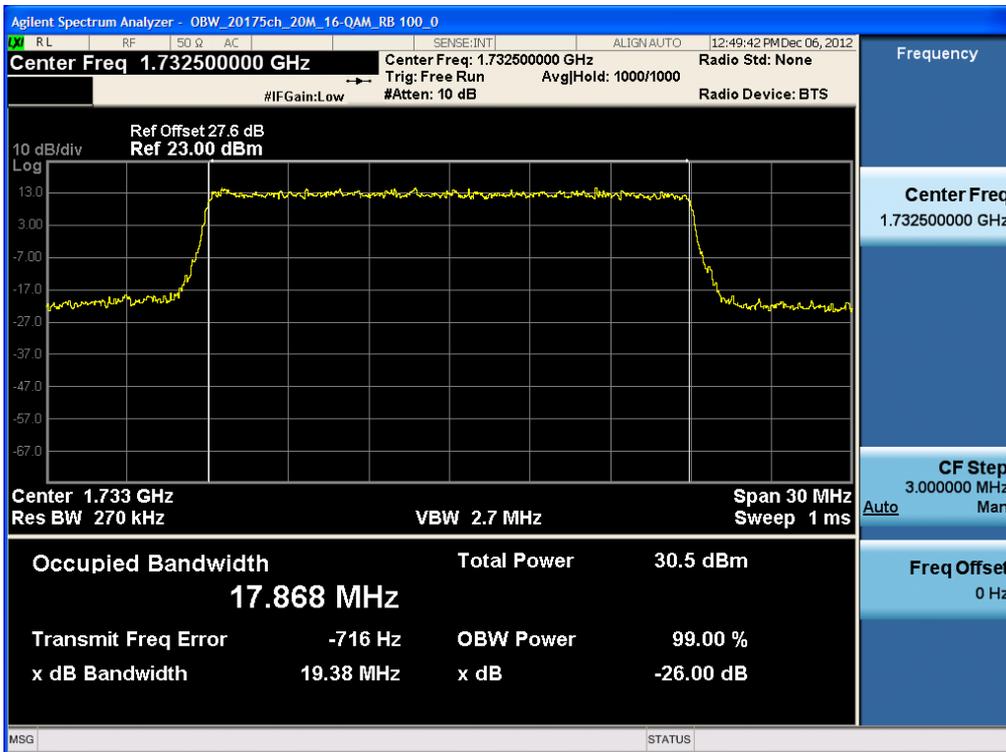


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT
---------------------------------	-------------------------------------	--	---------------------

BAND 13. Occupied Bandwidth Plot (23230ch_10 MHz_QPSK_RB 50)

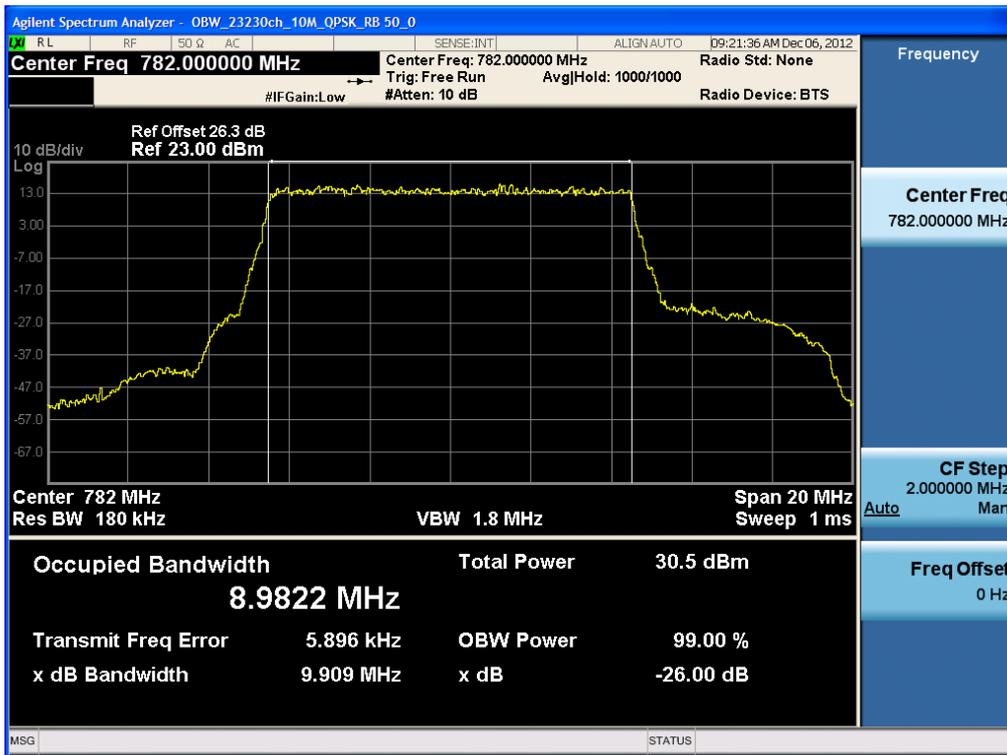

BAND 13. Occupied Bandwidth Plot (23230ch_10 MHz_16-QAM_RB 50)

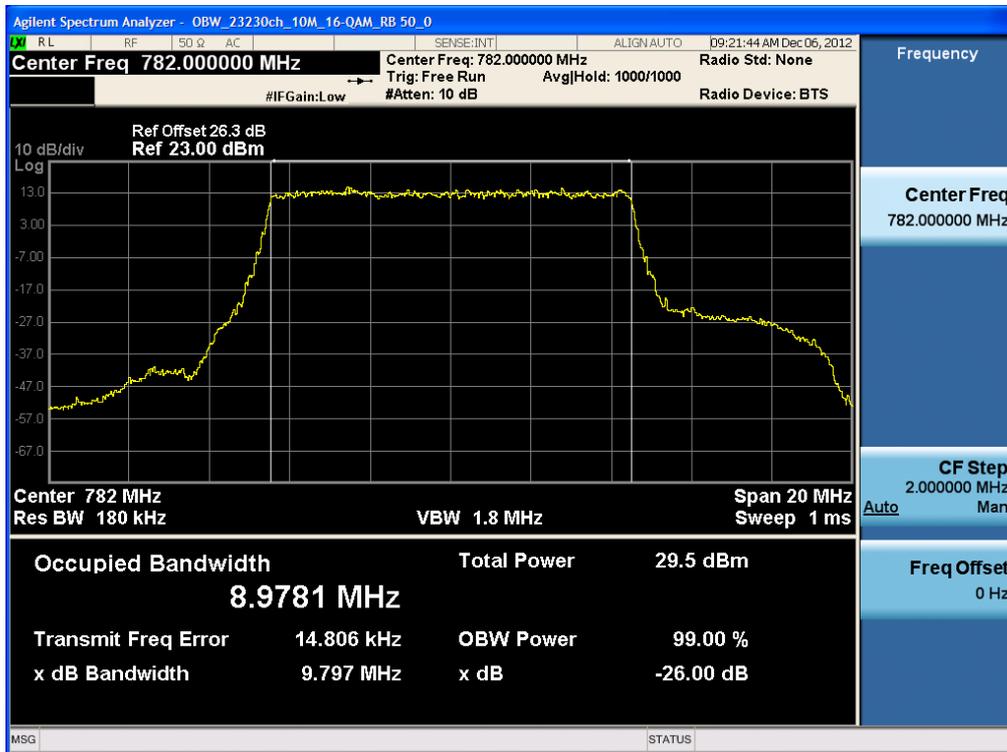


FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT
---------------------------------	-------------------------------------	--	---------------------

BAND 4. PAR Plot (20175ch_5 MHz_QPSK_RB 25)

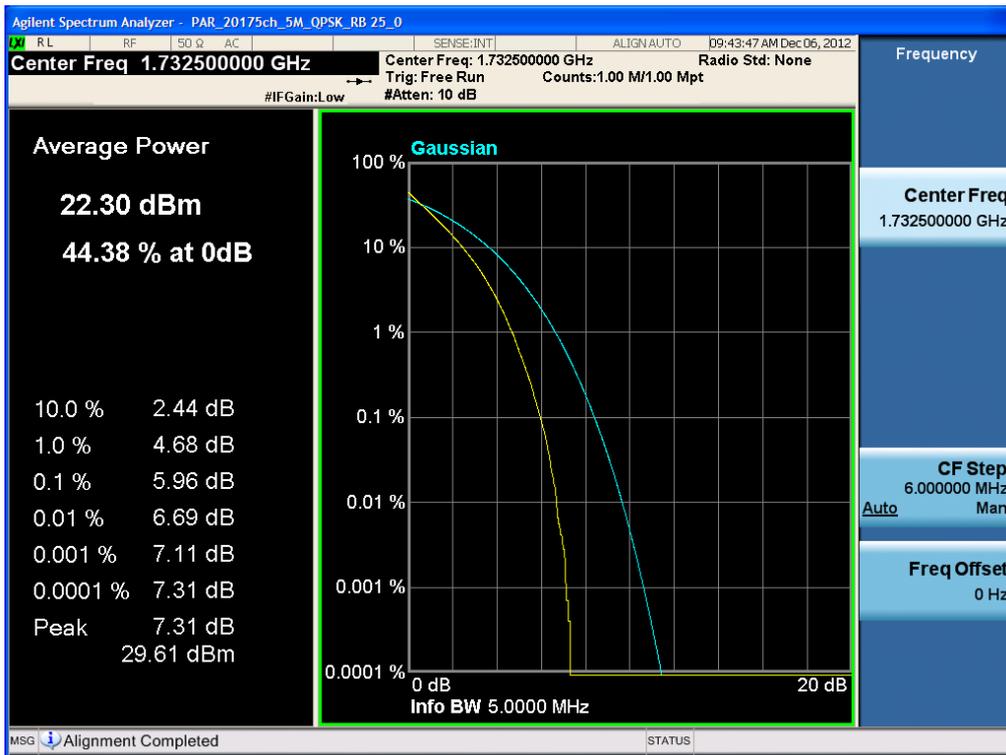


BAND 4. PAR Plot (20175ch_5 MHz_16-QAM_RB 25)




FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. PAR Plot (20175ch_10 MHz_QPSK_RB 50)

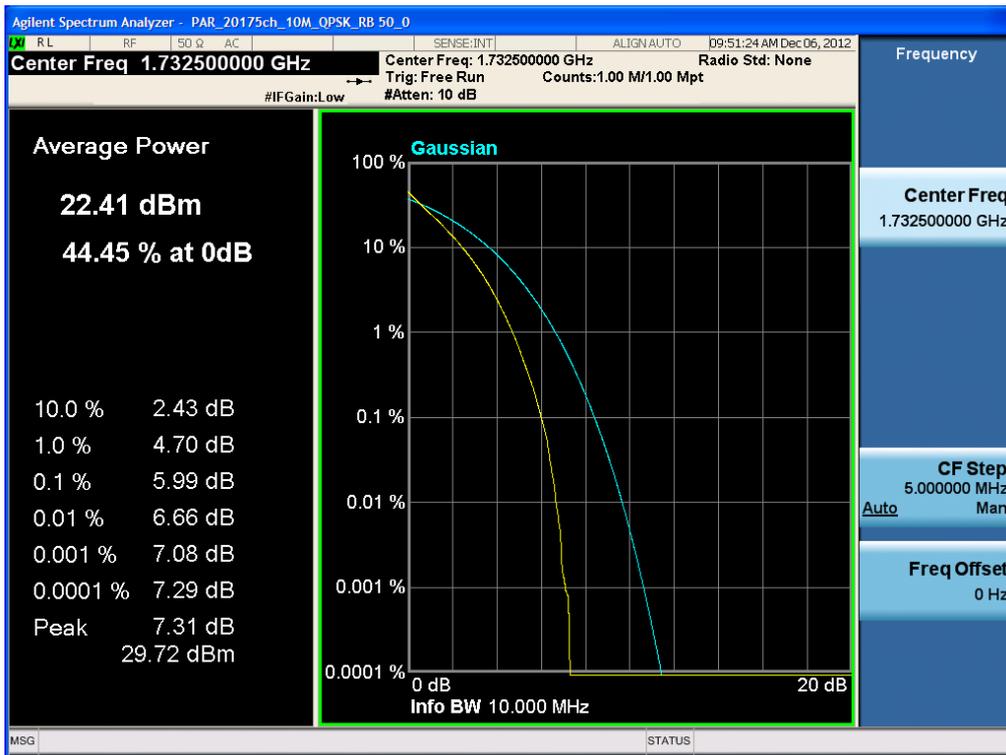


BAND 4. PAR Plot (20175ch_10 MHz_16-QAM_RB 50)

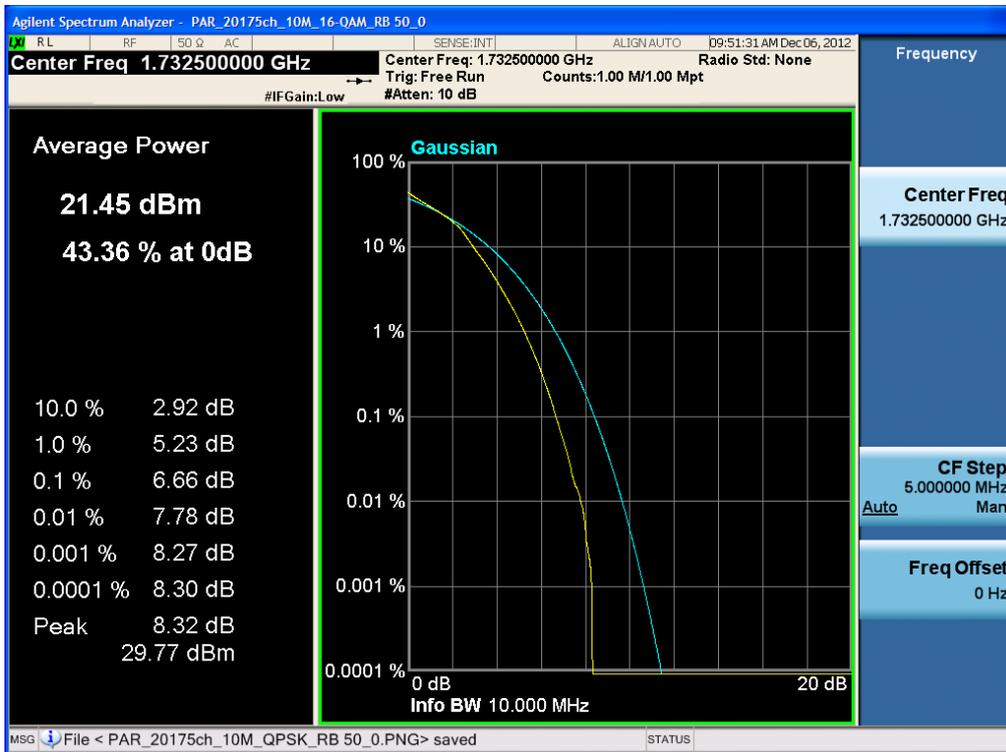


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. PAR Plot (20175ch_15 MHz_QPSK_RB 75)

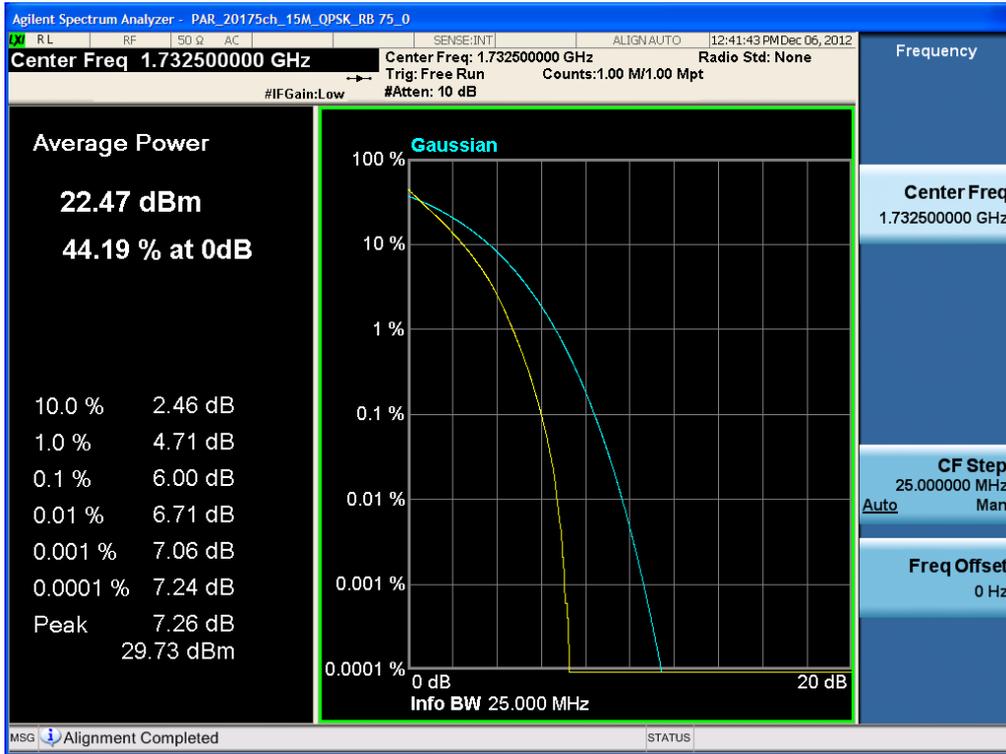

BAND 4. PAR Plot (20175ch_15 MHz_16-QAM_RB 75)

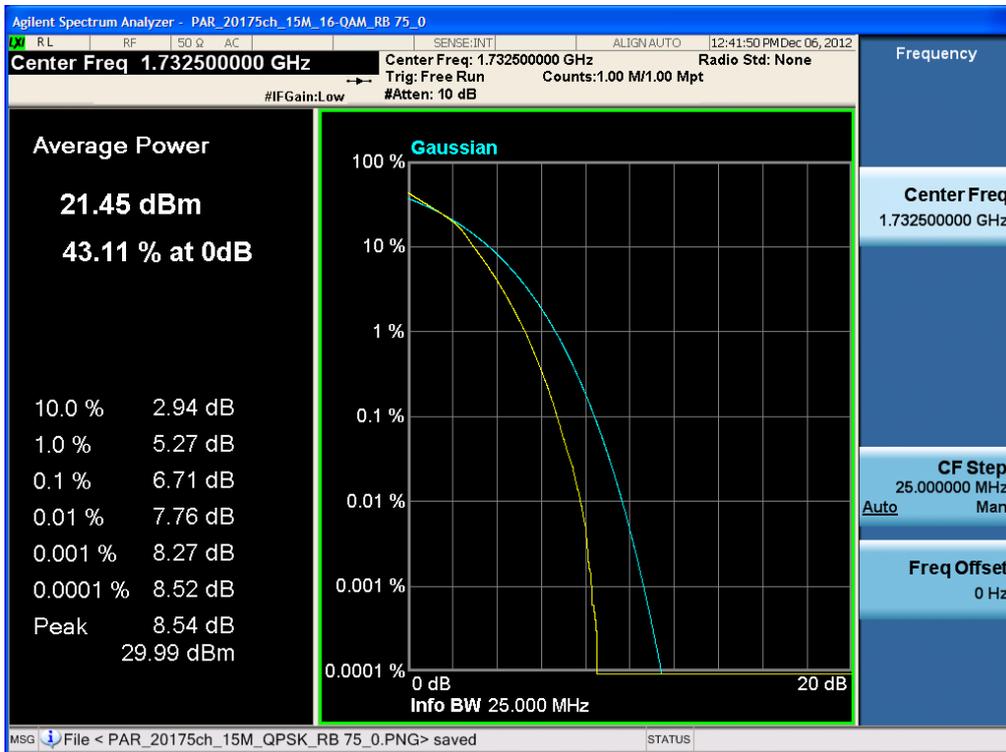


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT
---------------------------------	-------------------------------------	--	---------------------

BAND 4. PAR Plot (20175ch_20 MHz_QPSK_RB 100)

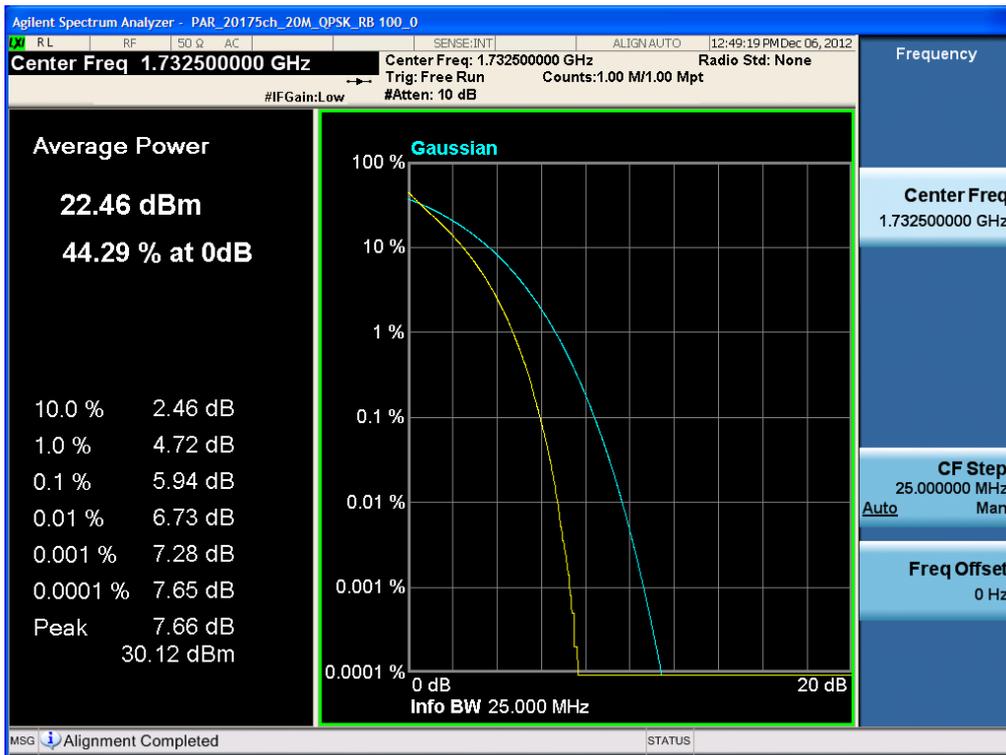


BAND 4. PAR Plot (20175ch_20 MHz_16-QAM_RB 100)

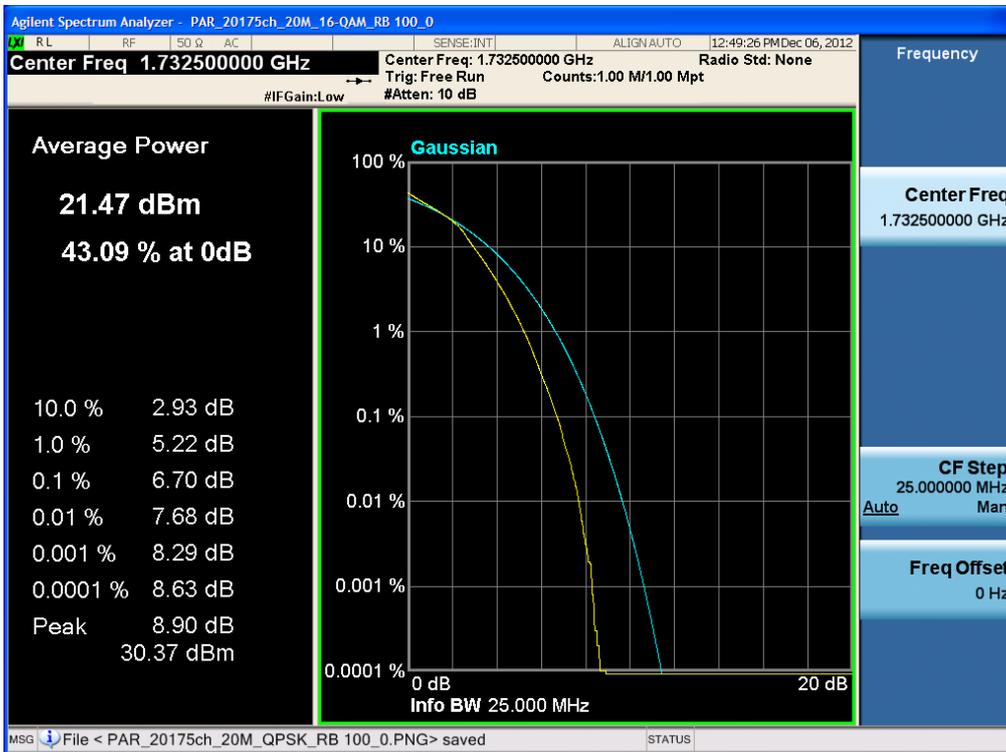

BAND 13. PAR Plot (23230ch_10 MHz_QPSK_RB 50)




BAND 13. PAR Plot (23230ch_10 MHz_16-QAM_RB 50)

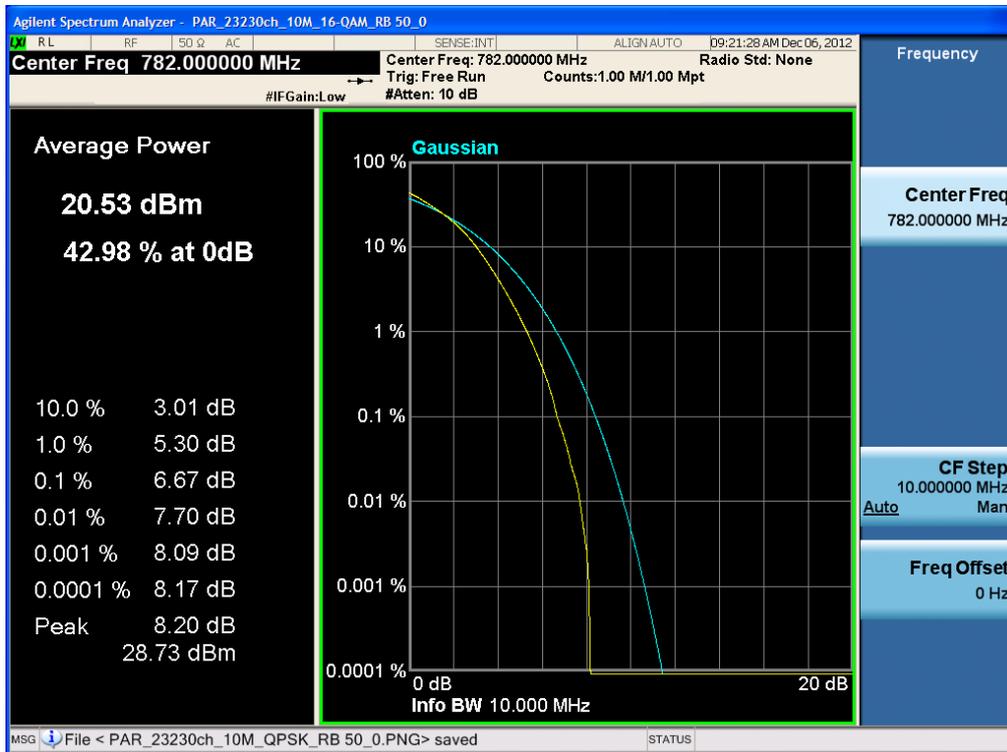

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Low Band Edge Plot (19975ch_5 MHz_QPSK_RB 1_0)

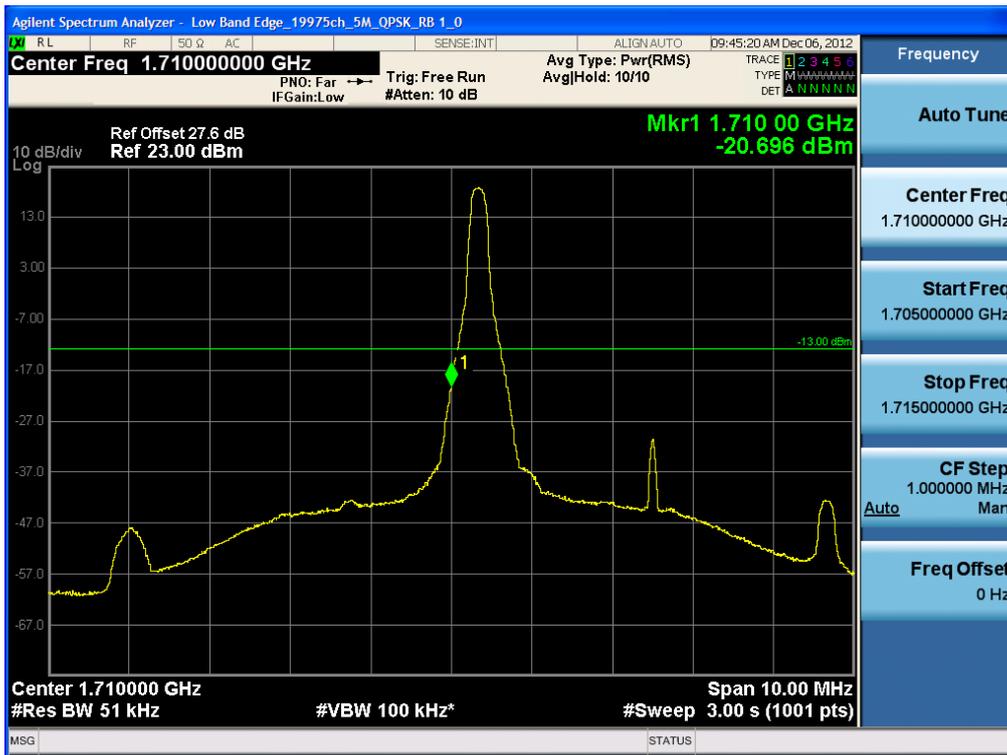

BAND 4. Low Band Edge Plot (19975ch_5 MHz_QPSK_RB 25_0)




FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Low Extended Band Edge Plot (19975_5 MHz_QPSK_RB 25_0)




BAND 4. Low Band Edge Plot (20000ch_10 MHz_QPSK_RB 1_0)

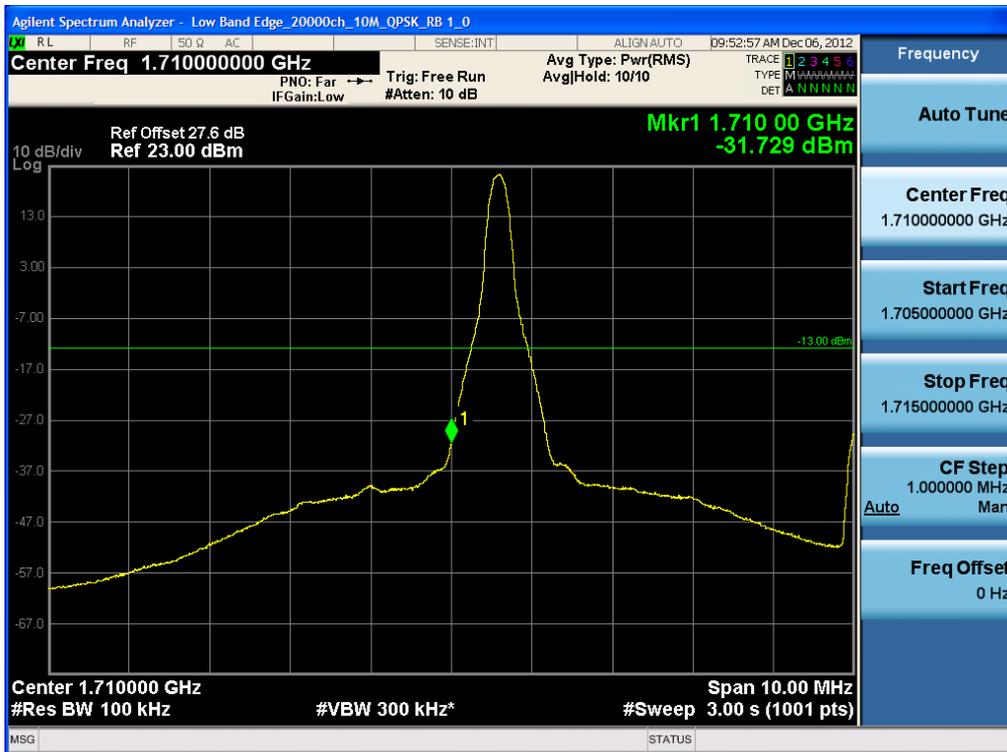


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Low Band Edge Plot (20000ch_10 MHz_QPSK_RB 50_0)

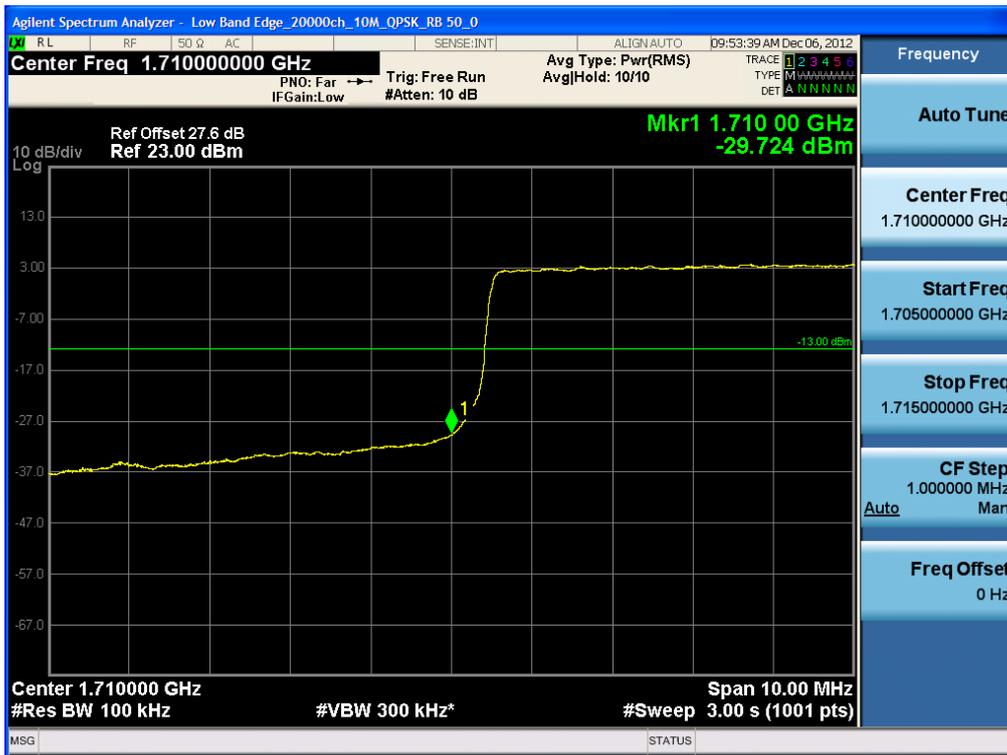


BAND 4. Low Extended Band Edge (20000ch_10 MHz_QPSK_RB 50_0)

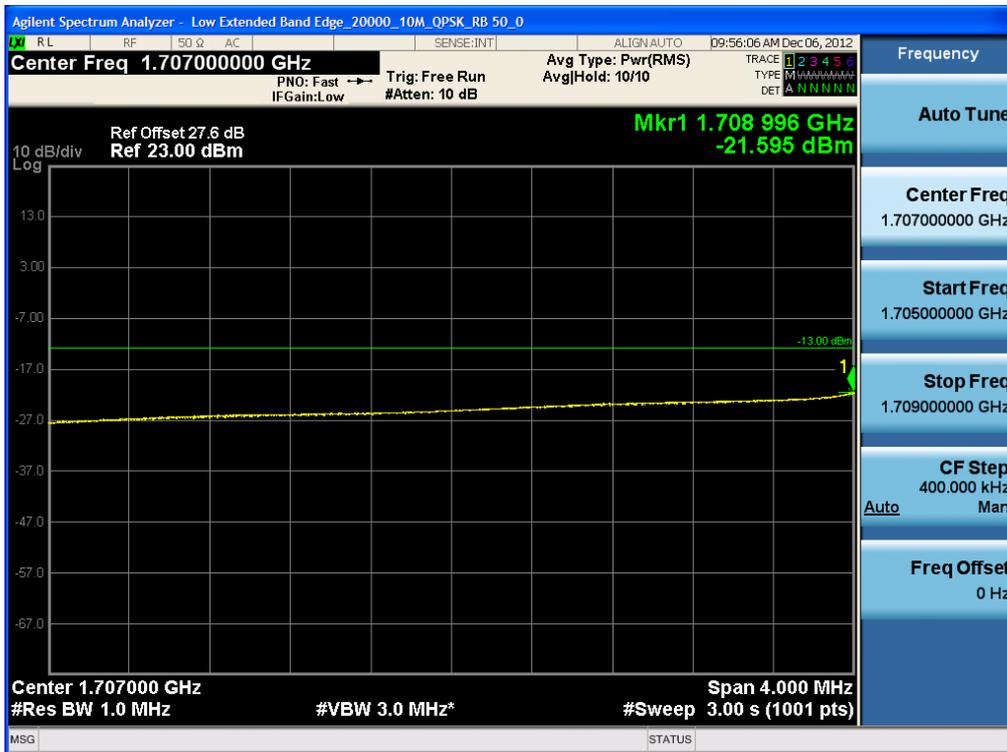


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Low Band Edge Plot (20025ch_15 MHz_QPSK_RB 1_0)

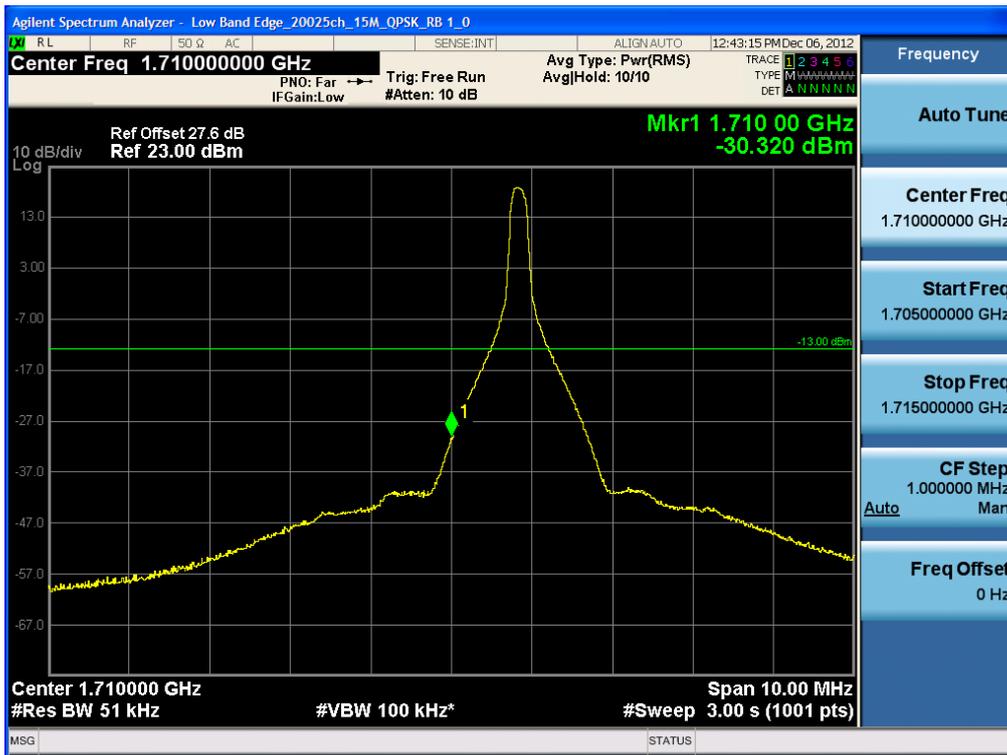

BAND 4. Low Band Edge Plot (20025ch_15 MHz_QPSK_RB 25_0)

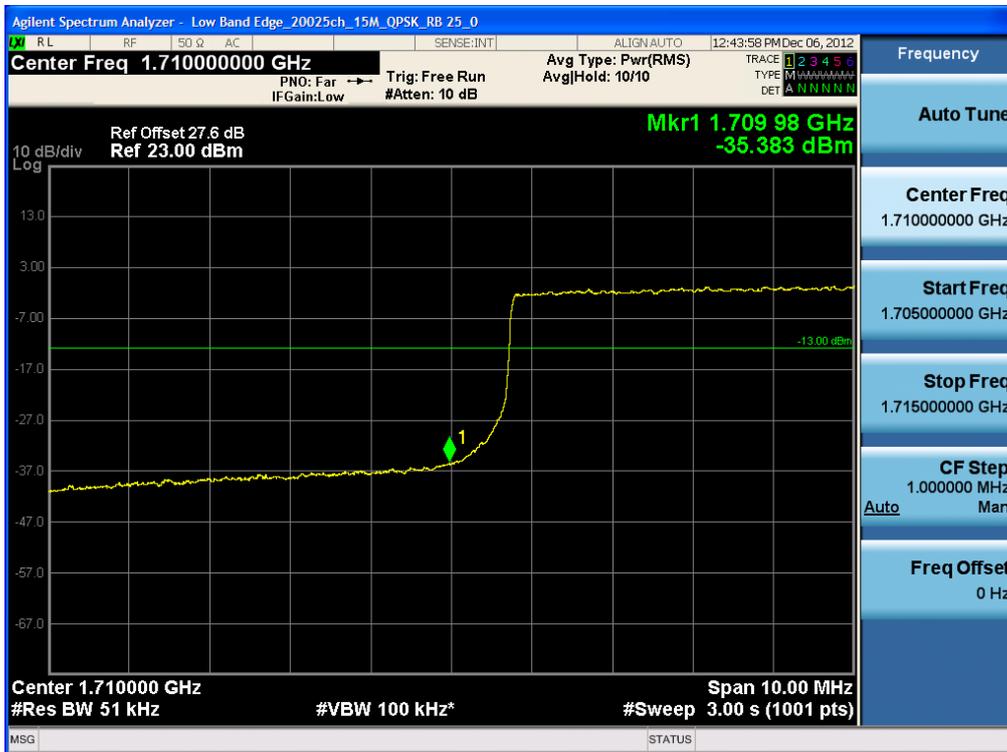


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Low Extended Band Edge Plot (20025_15 MHz_QPSK_RB 25_0)



BAND 4. Low Band Edge Plot (20050ch_20 MHz_QPSK_RB 1_0)

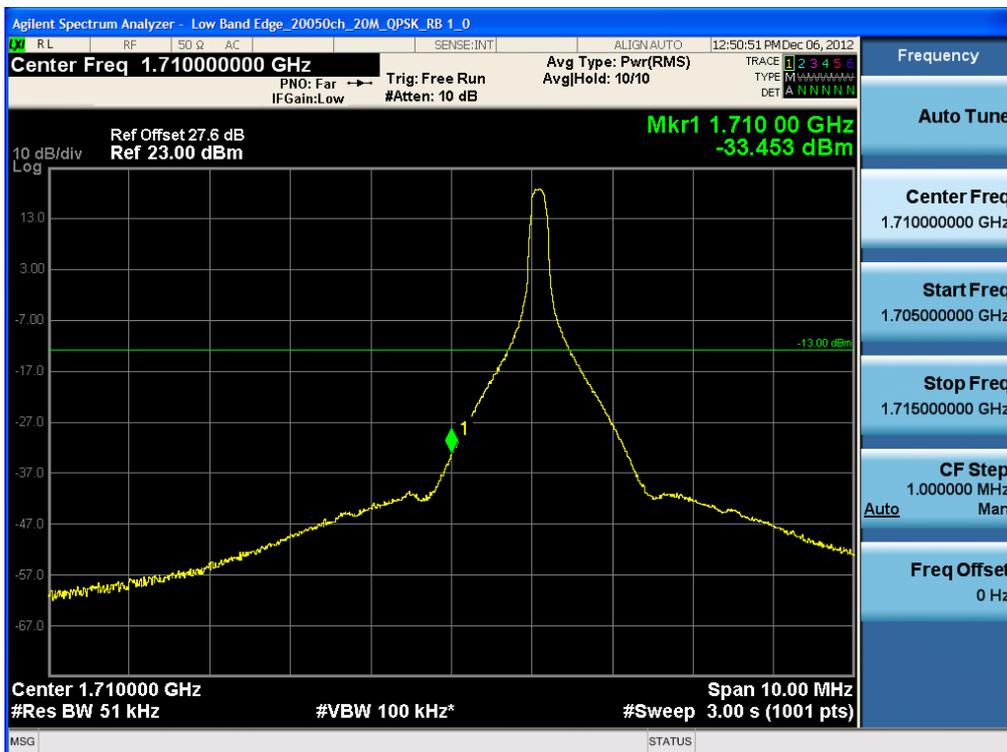

FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT
---------------------------------	-------------------------------------	--	---------------------

BAND 4. Low Band Edge Plot (20050ch_20 MHz_QPSK_RB 25_0)



BAND 4. Low Extended Band Edge (20050ch_20 MHz_QPSK_RB 25_0)

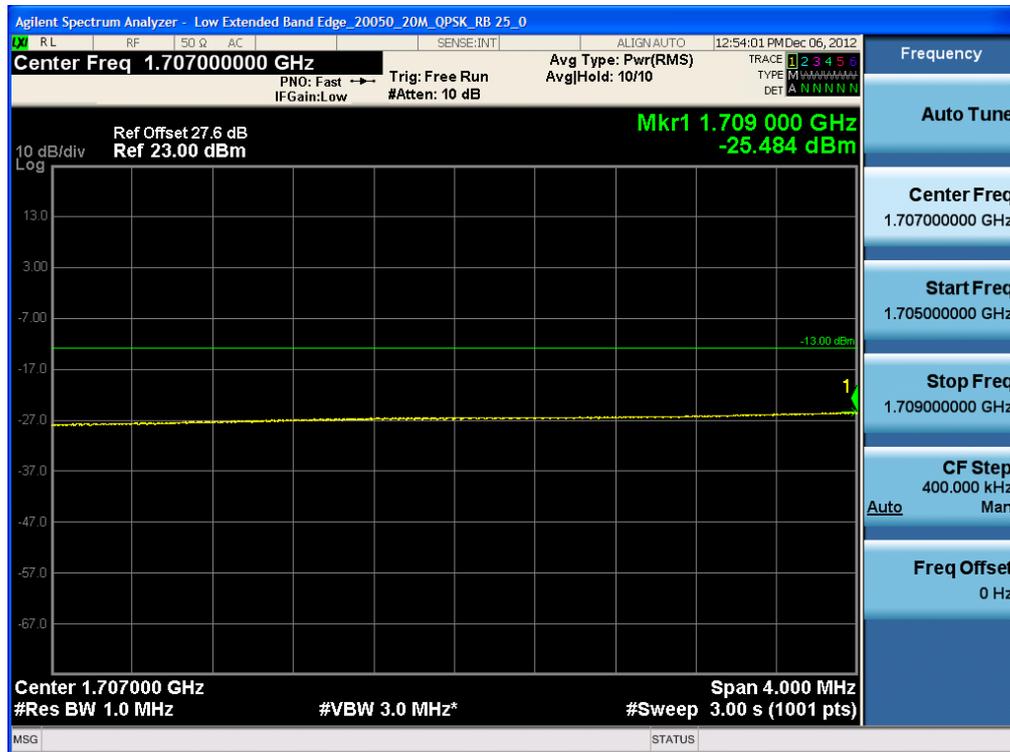

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. High Band Edge Plot (20375ch_5 MHz_QPSK_RB 1_24)




BAND 4. High Band Edge Plot (20375ch_5 MHz_QPSK_RB 25_0)




FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. High Extended Band Edge Plot (20375ch_5 MHz_QPSK_RB 25_0)

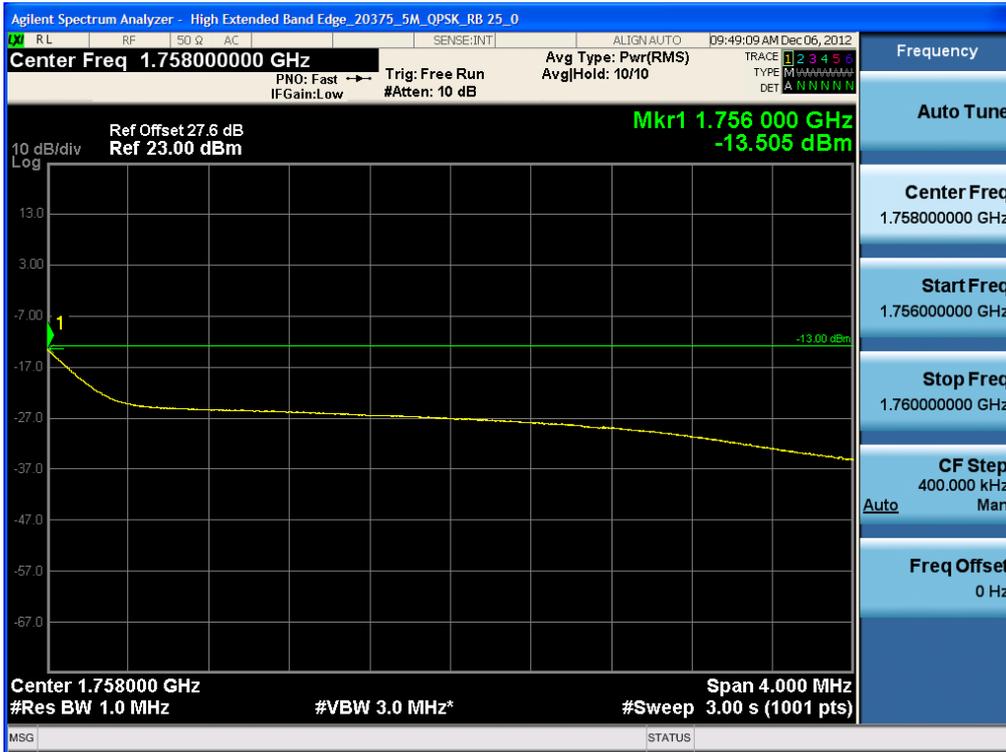

BAND 4. High Band Edge Plot (20350ch_10 MHz_QPSK_RB 1_49)

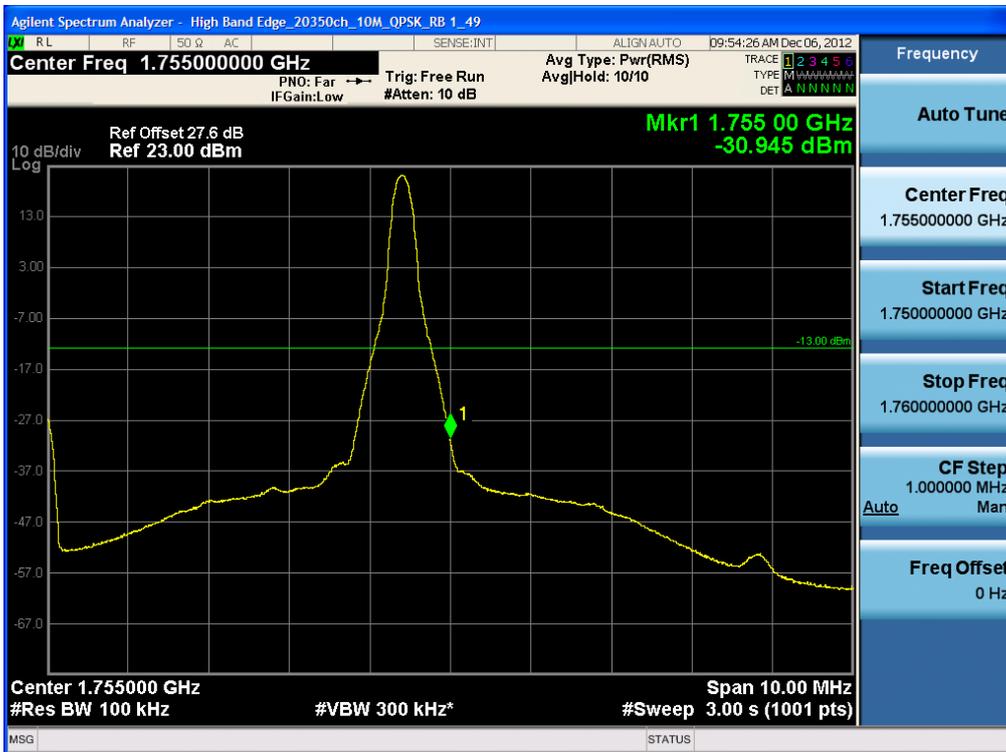


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. High Band Edge Plot (20350ch_10 MHz_QPSK_RB 50_0)




BAND 4. High Extended Band Edge Plot (20350ch_10 MHz_QPSK_RB 50_0)

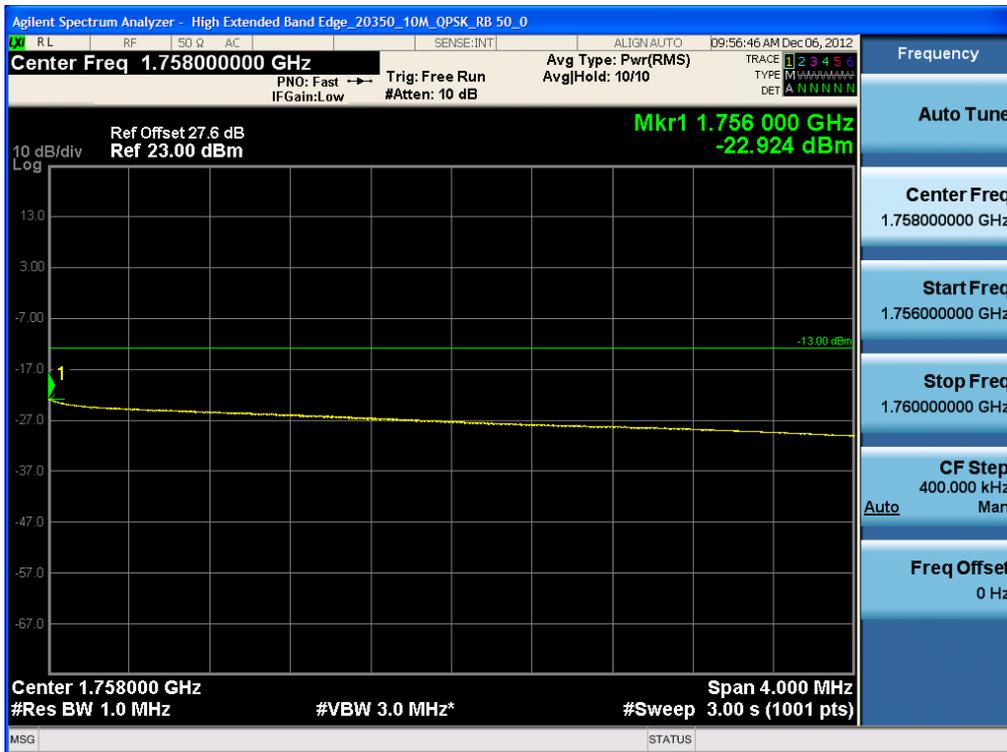

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. High Band Edge Plot (20325ch_15 MHz_QPSK_RB 1_24)

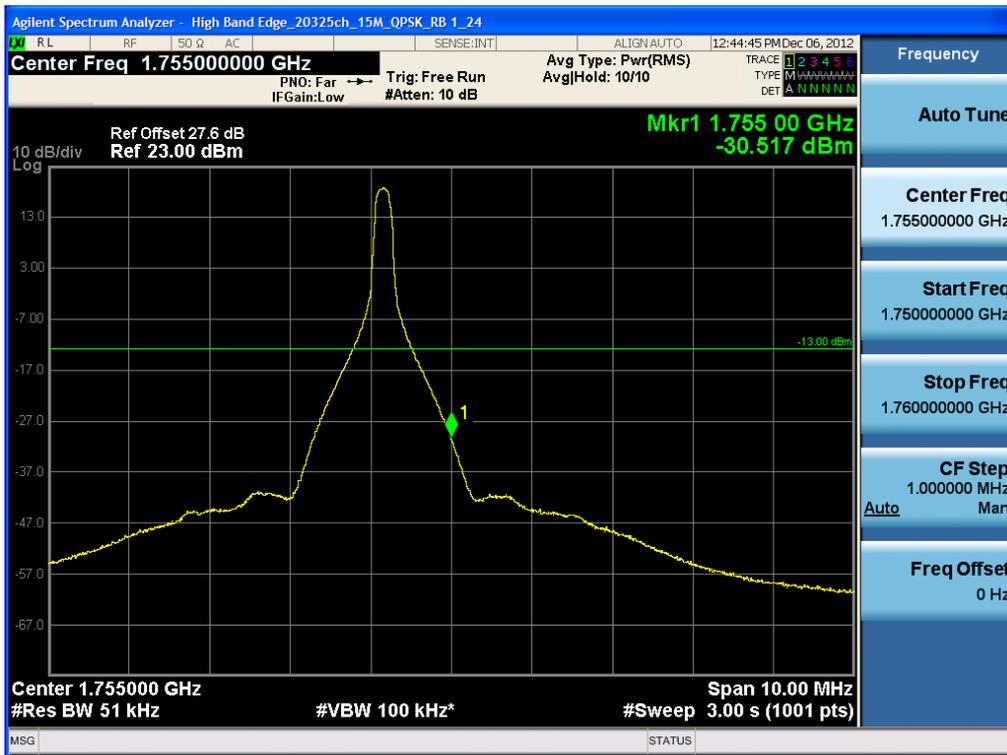

BAND 4. High Band Edge Plot (20325ch_15 MHz_QPSK_RB 25_0)




FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. High Extended Band Edge Plot (20325ch_15 MHz_QPSK_RB 25_0)



BAND 4. High Band Edge Plot (20300ch_20 MHz_QPSK_RB 1_24)

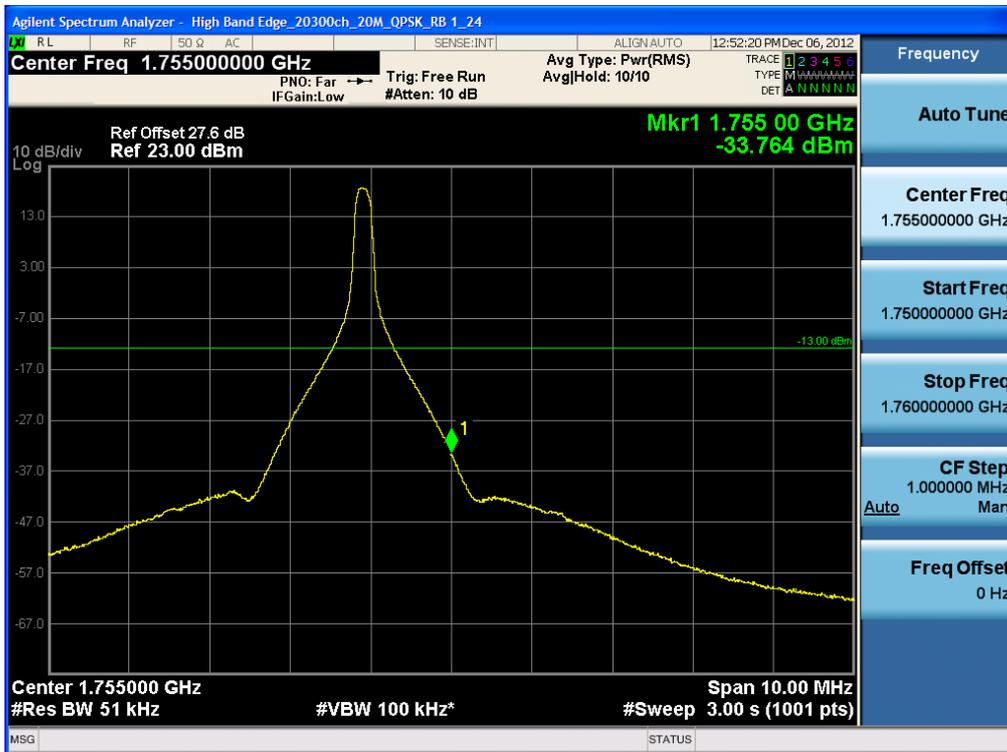


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. High Band Edge Plot (20300ch_20 MHz_QPSK_RB 25_0)




BAND 4. High Extended Band Edge Plot (20300ch_20 MHz_QPSK_RB 25_0)

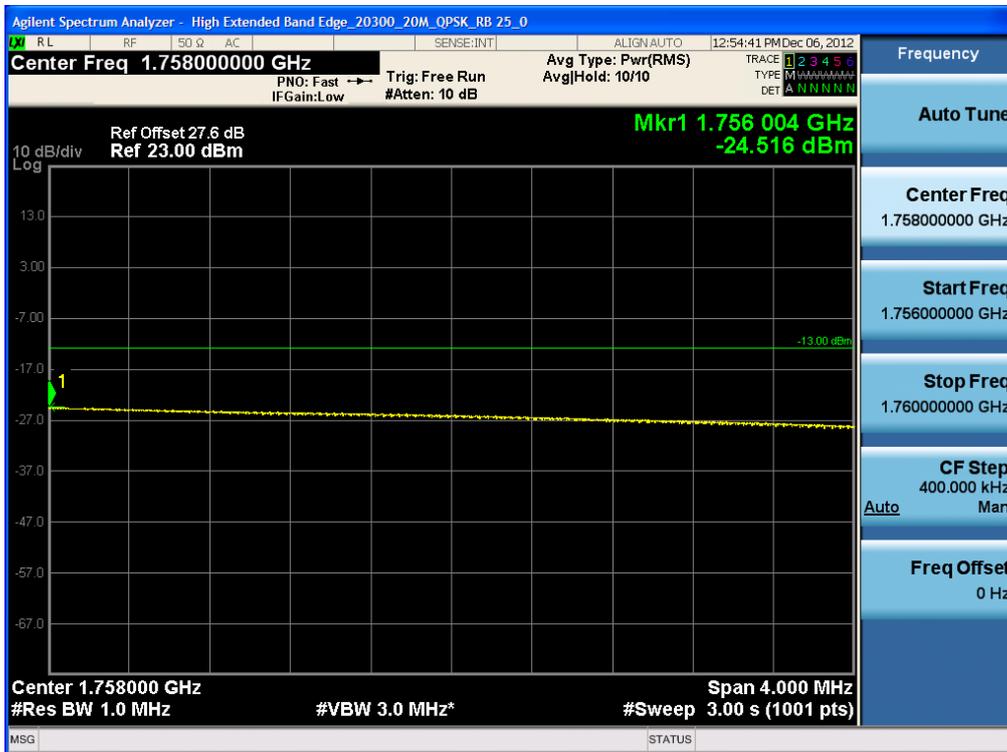


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 13. Low Band Edge Plot (23230ch_10 MHz_QPSK_RB 1_0)

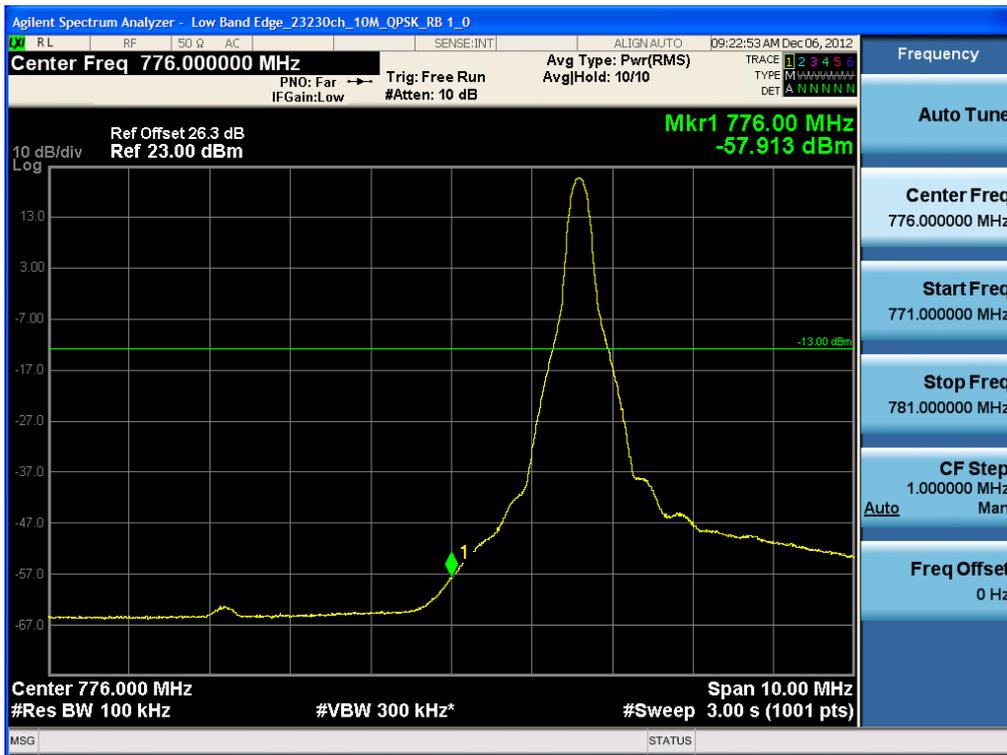


BAND 13. Low Band Edge Plot (23230ch_10 MHz_QPSK_RB 50_0)

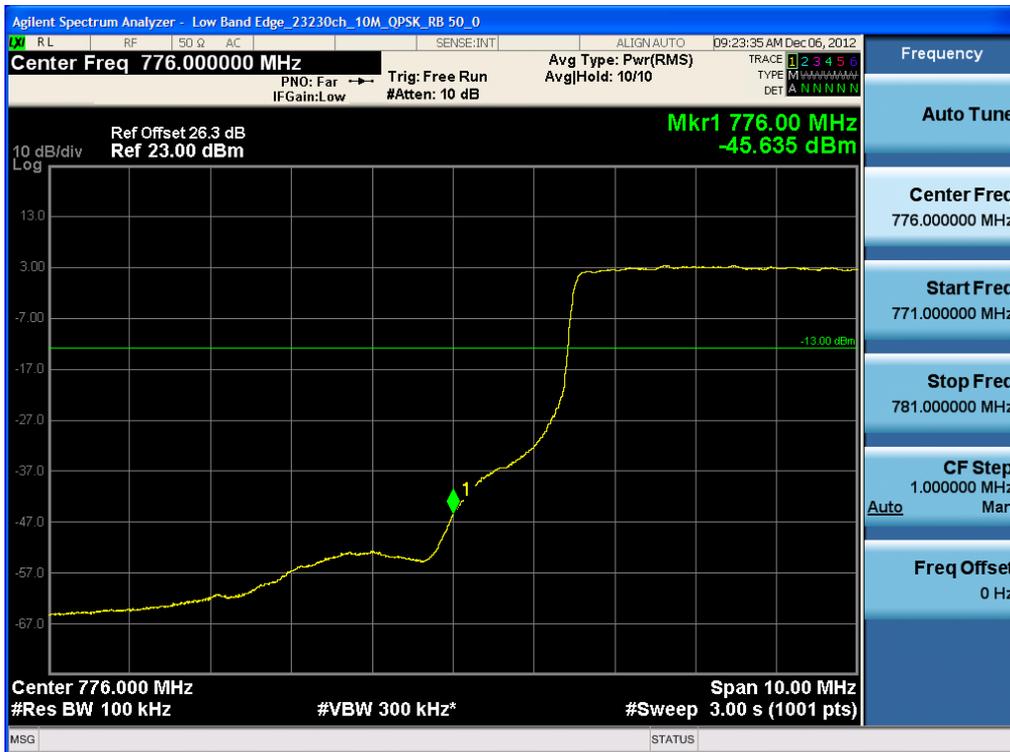


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 13. Low Extended Band Edge Plot (23230ch_10 MHz_QPSK_RB 25_0)

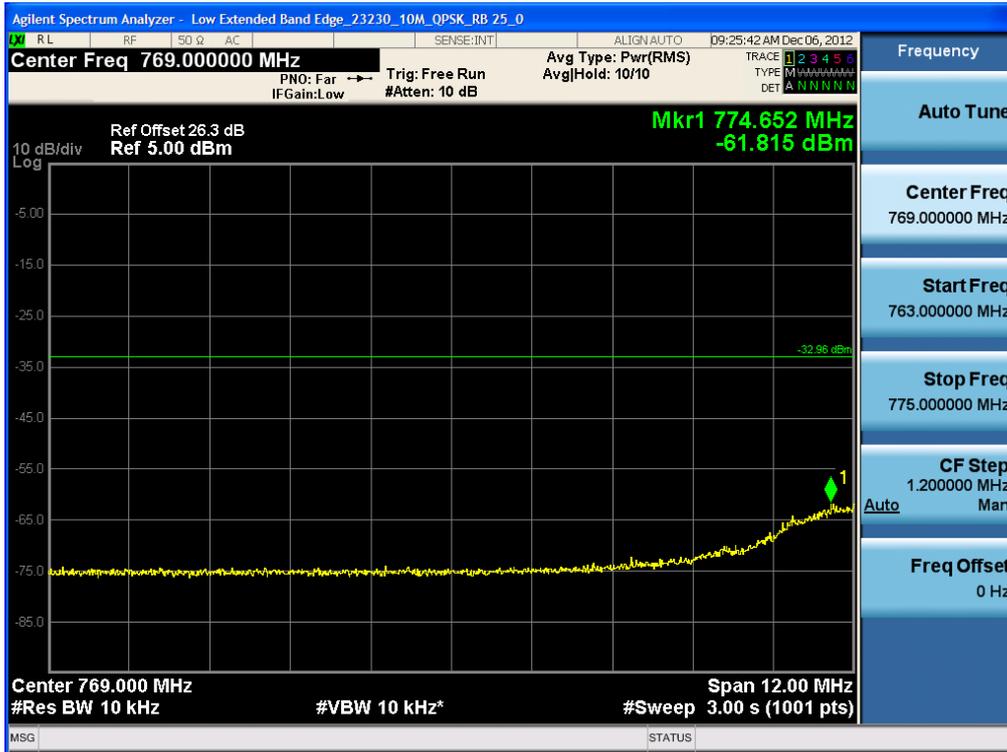

BAND 13. High Band Edge Plot (23230ch_10 MHz_QPSK_RB 1_49)

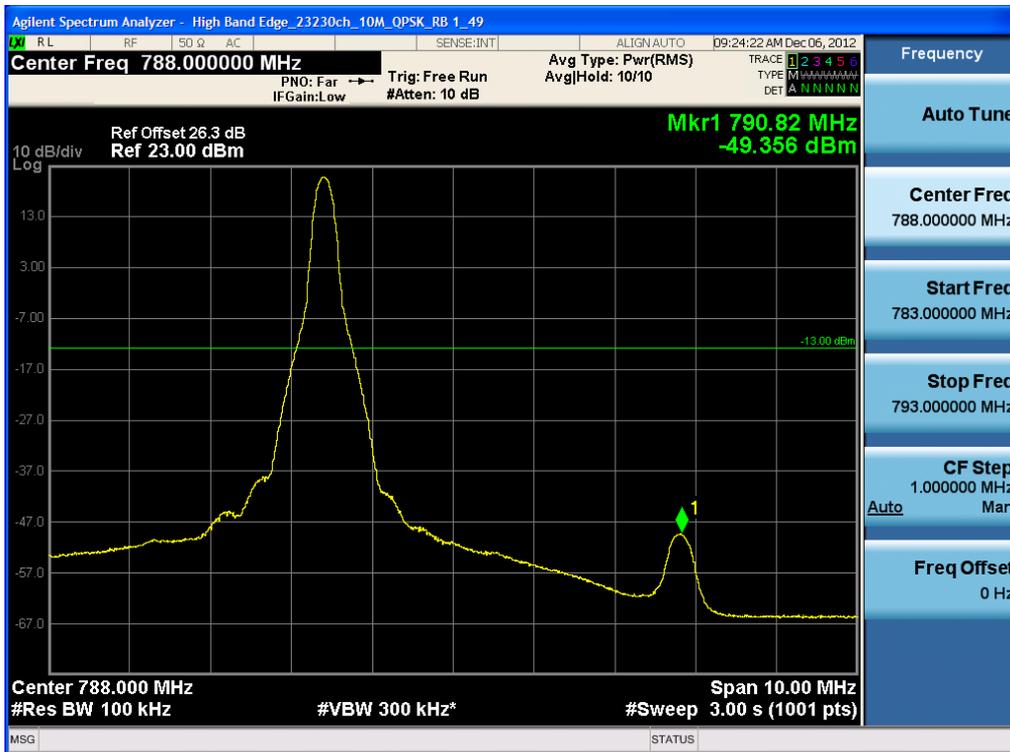


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 13. High Band Edge Plot (23230ch_10 MHz_QPSK_RB 50_0)




BAND 13. High Extended Band Edge Plot (23230ch_10 MHz_QPSK_RB 25_0)

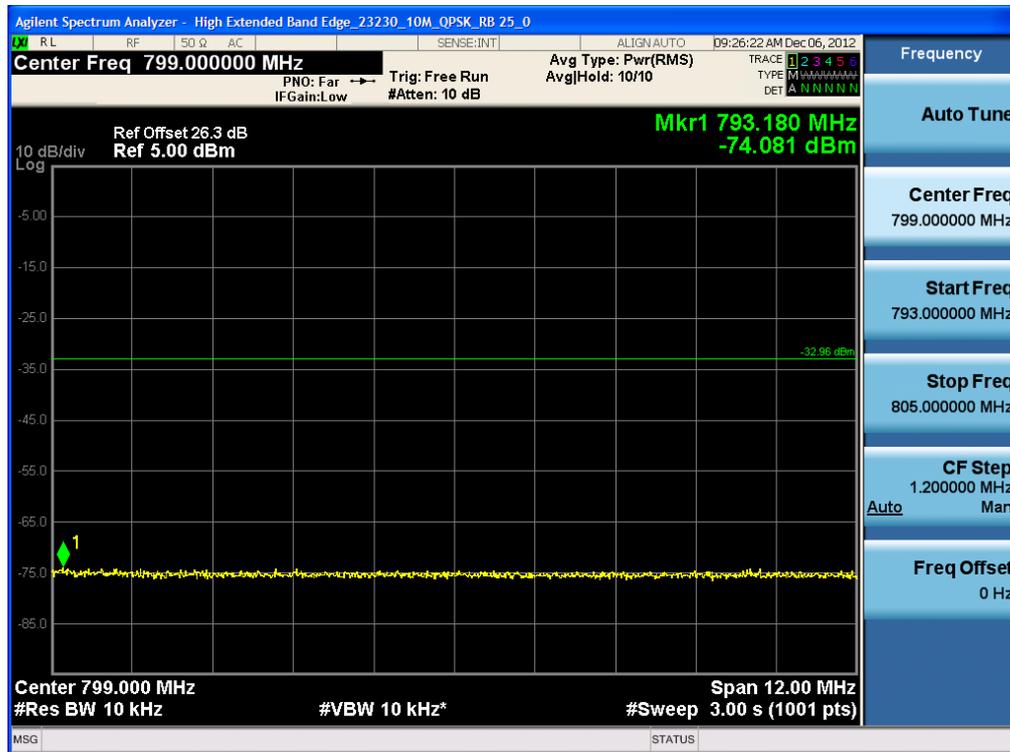


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Conducted Spurious Plot_1 (19975ch_5 MHz_QPSK_RB 1_0)

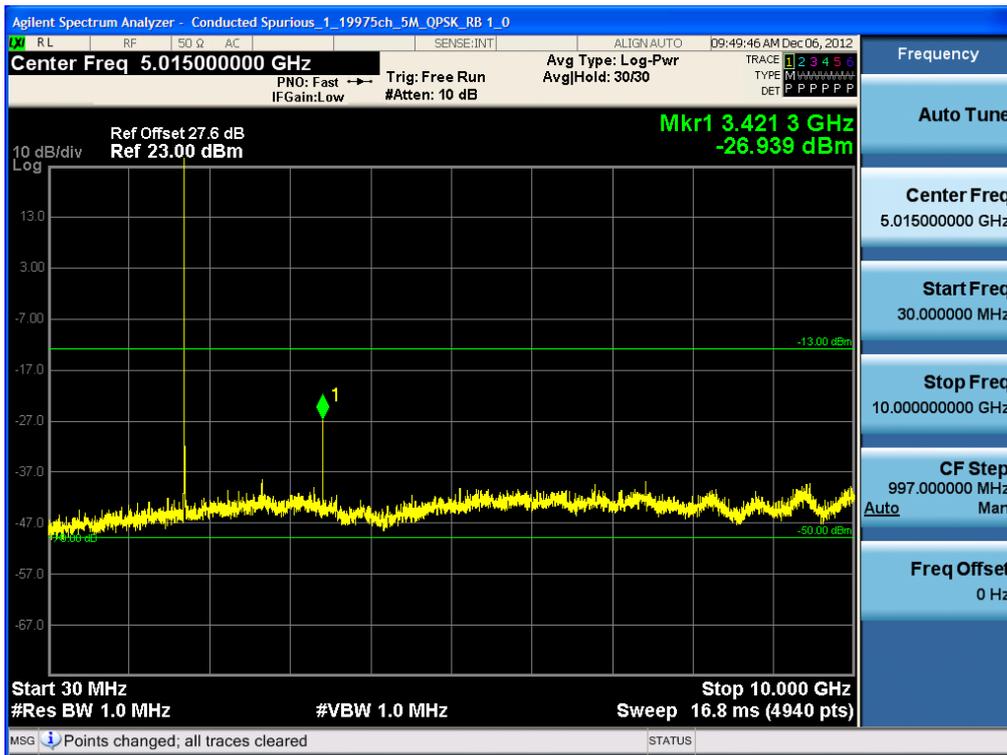


BAND 4. Conducted Spurious Plot_2 (19975ch_5 MHz_QPSK_RB 1_0)

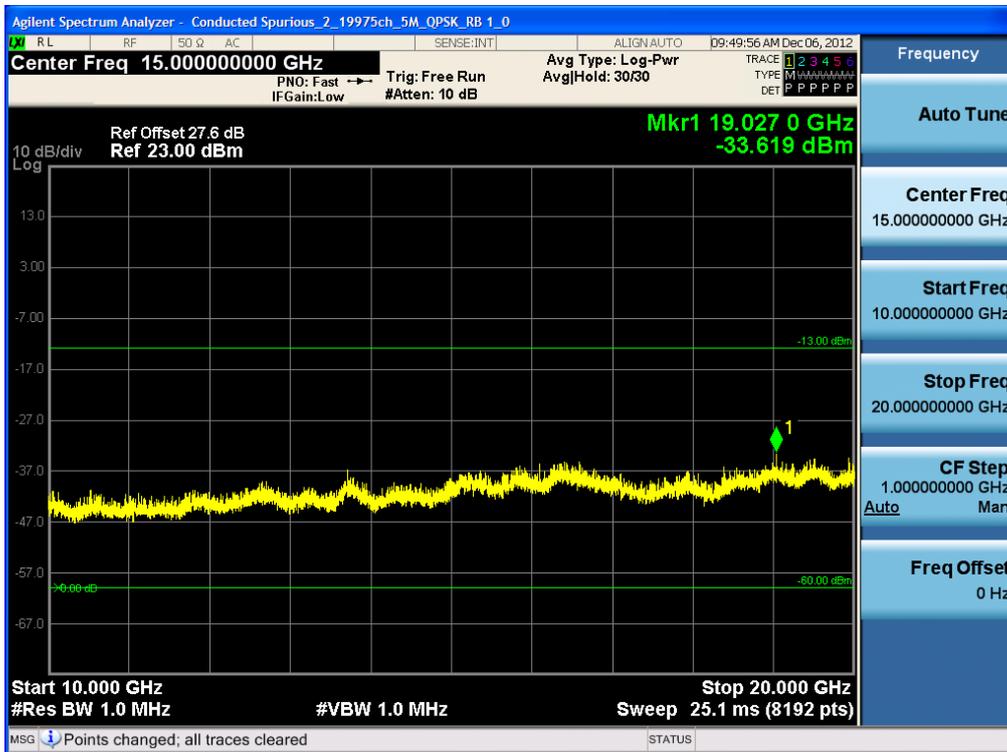


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Conducted Spurious Plot_1 (20175ch_5 MHz_QPSK_RB 1_24)

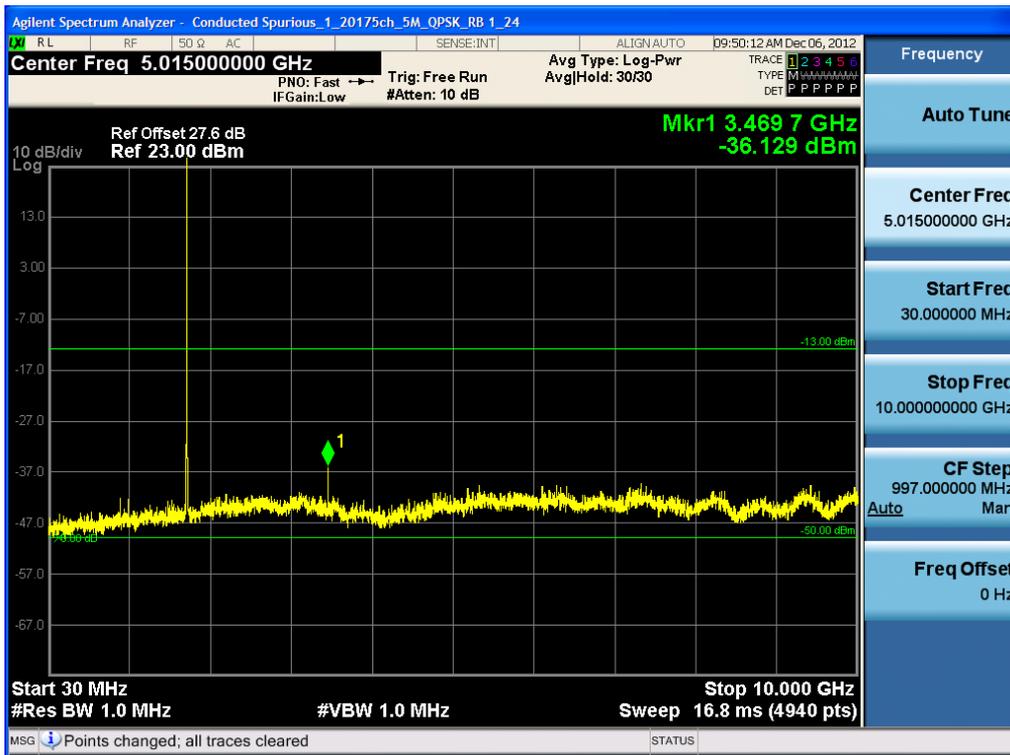


BAND 4. Conducted Spurious Plot_2 (20175ch_5 MHz_QPSK_RB 1_24)

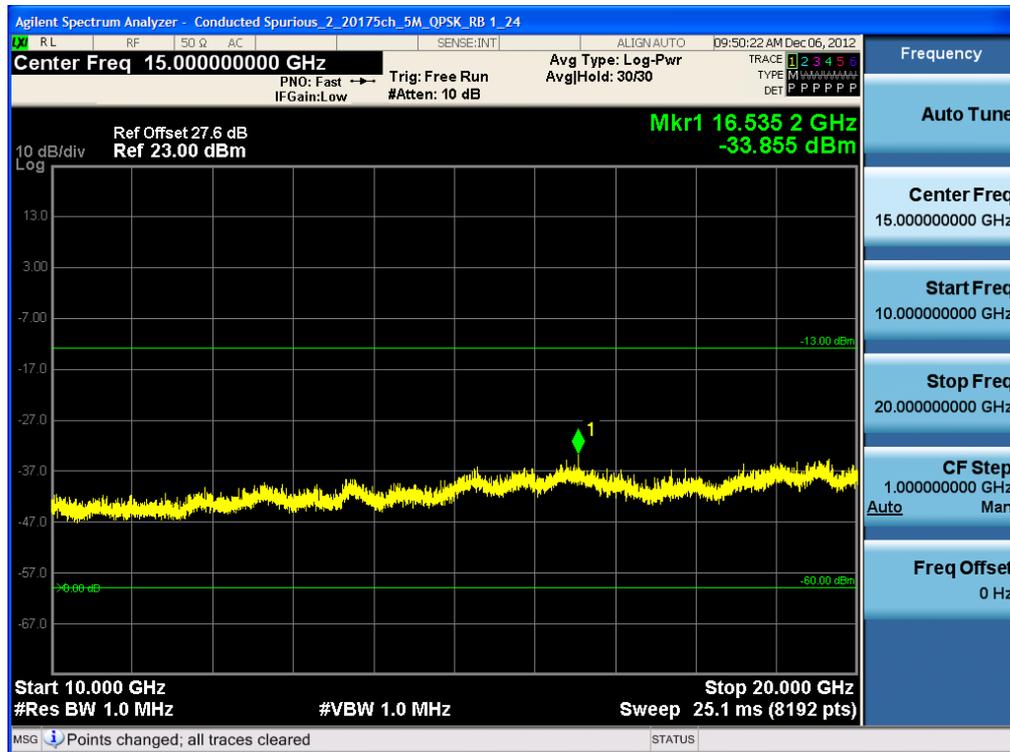

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Conducted Spurious Plot_1 (20375ch_5 MHz_QPSK_RB 1_24)

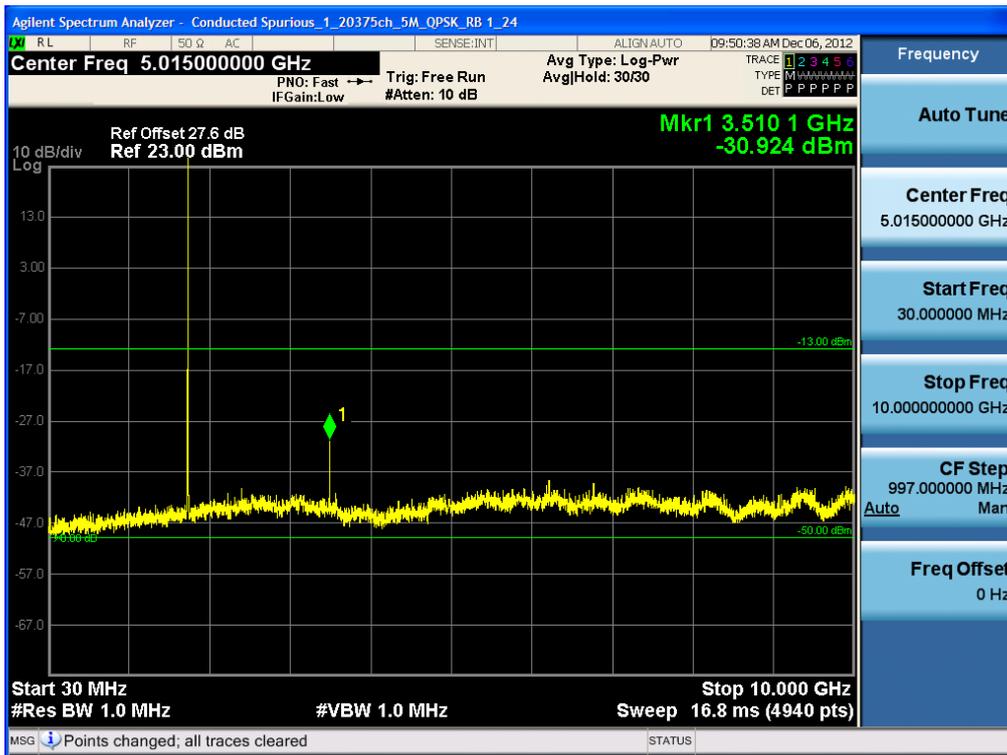


BAND 4 . Conducted Spurious Plot_2 (20375ch_5 MHz_QPSK_RB 1_24)




FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Conducted Spurious Plot_1 (20000ch_10 MHz_QPSK_RB 1_0)

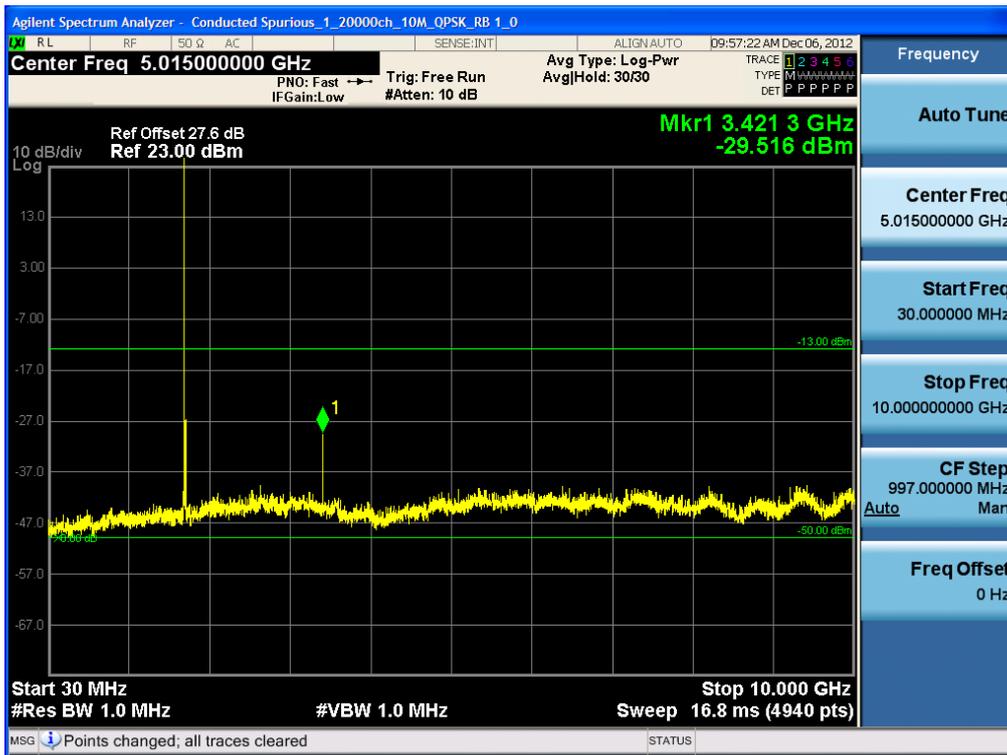

BAND 4. Conducted Spurious Plot_2 (20000ch_10 MHz_QPSK_RB 1_0)

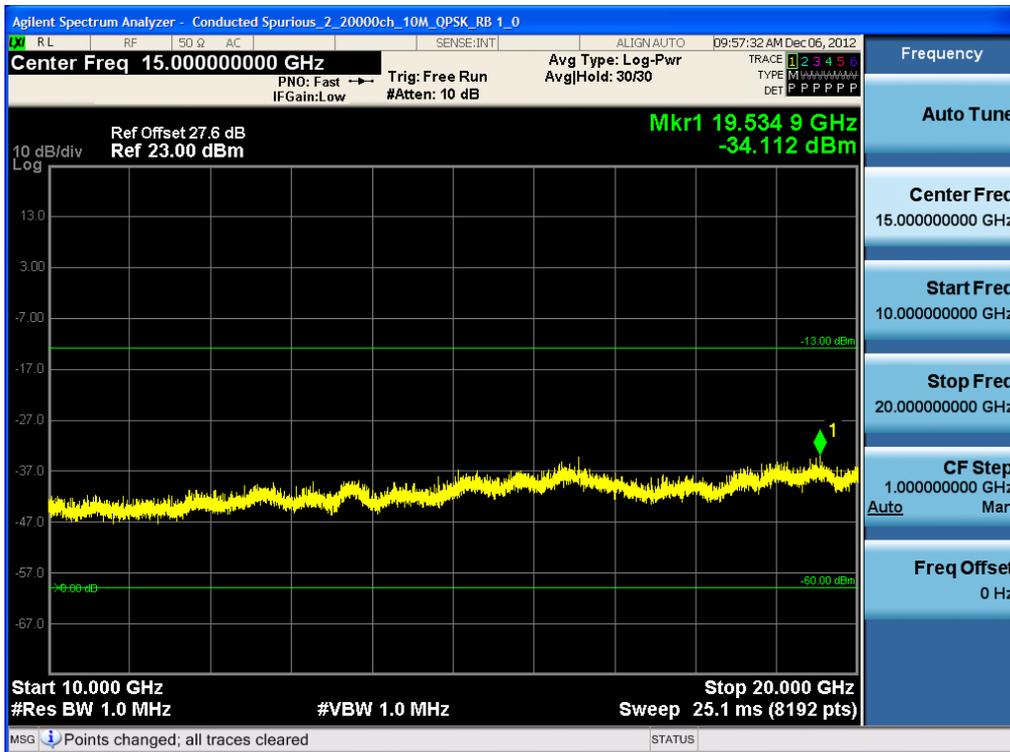


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT
---------------------------------	-------------------------------------	--	---------------------

BAND 4. Conducted Spurious Plot_1 (20175ch_10 MHz_QPSK_RB 1_0)

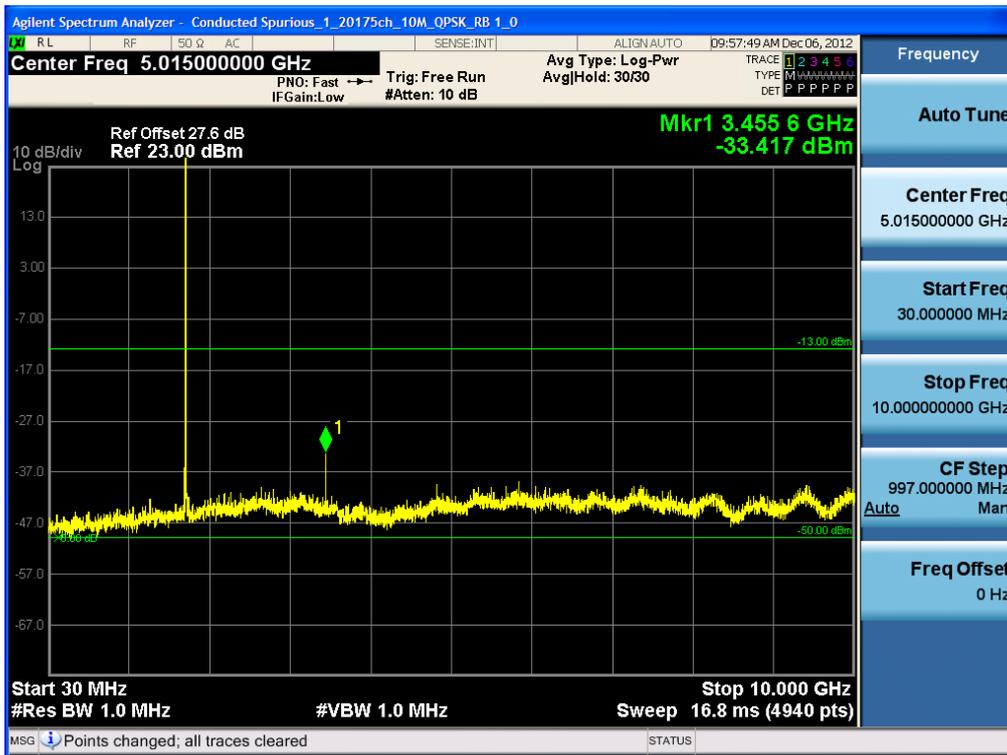


BAND 4. Conducted Spurious Plot_2 (20175ch_10 MHz_QPSK_RB 1_0)

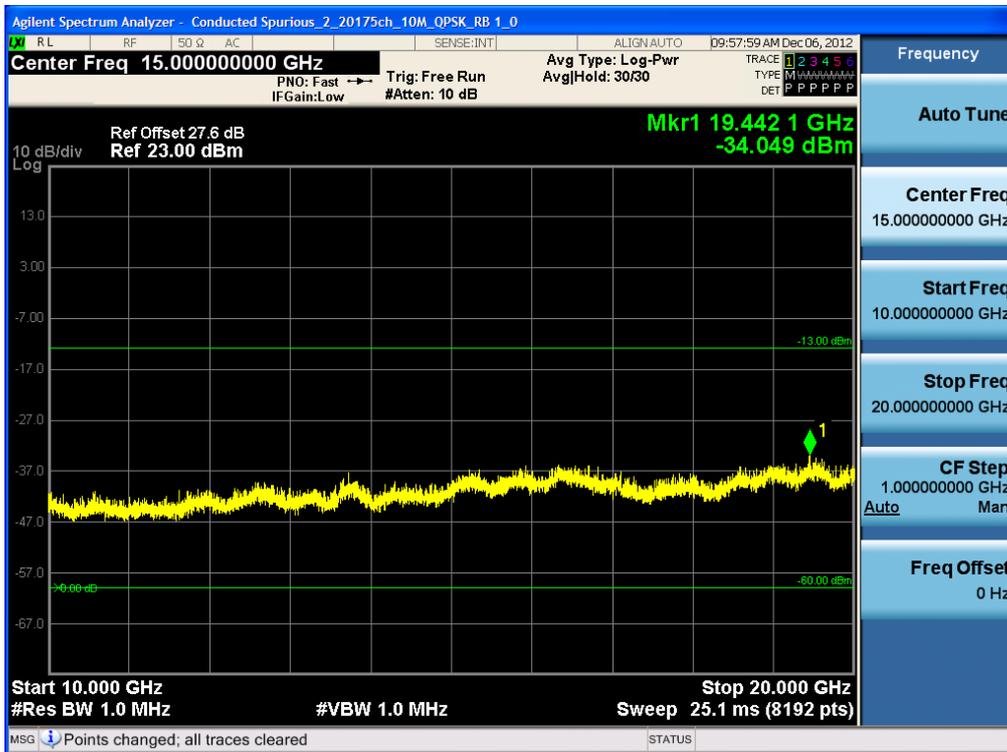


FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Conducted Spurious Plot_1 (20350ch_10 MHz_QPSK_RB 1_0)

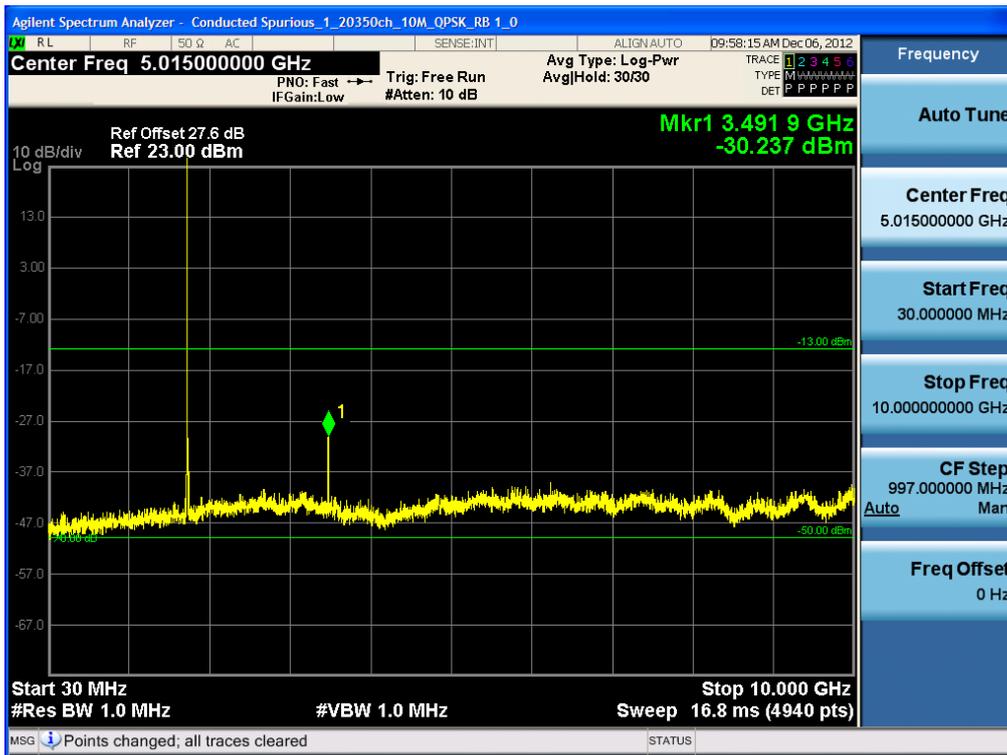


BAND 4. Conducted Spurious Plot_2 (20350ch_10 MHz_QPSK_RB 1_0)

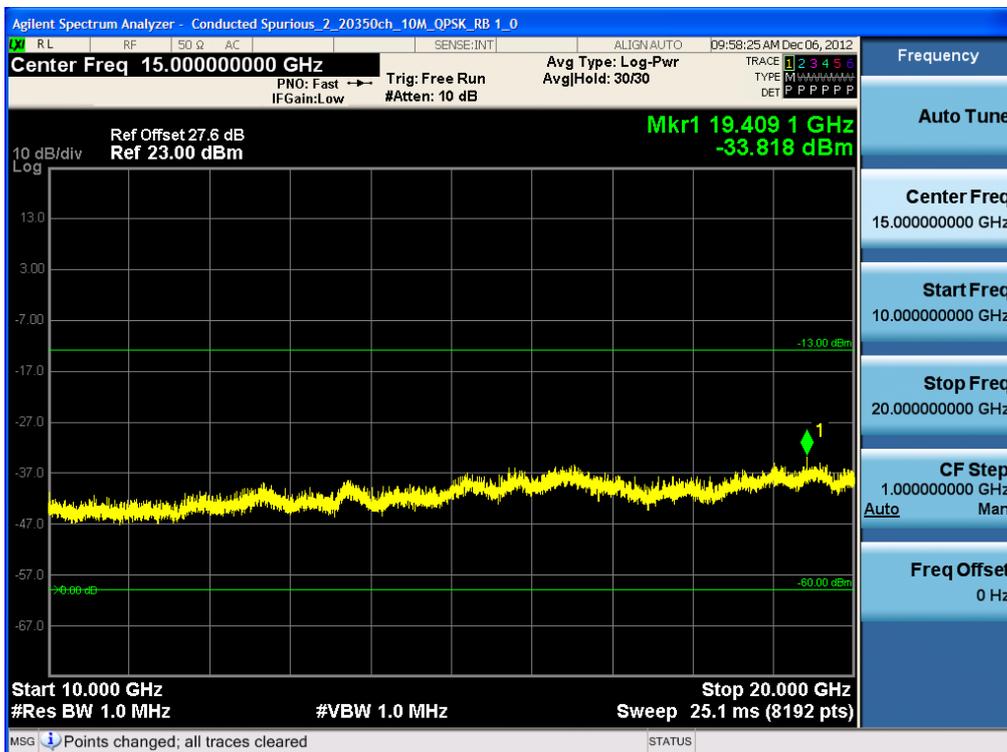

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Conducted Spurious Plot_1 (20025ch_15 MHz_QPSK_RB 1_0)

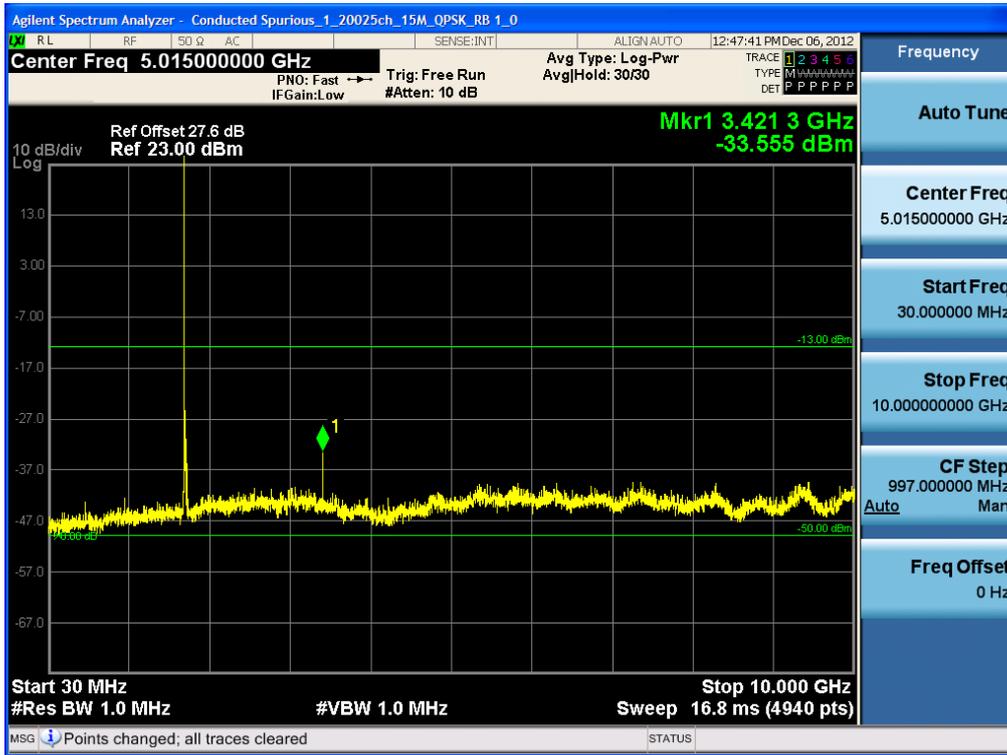


BAND 4. Conducted Spurious Plot_2 (20025ch_15 MHz_QPSK_RB 1_0)




FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Conducted Spurious Plot_1 (20175ch_15 MHz_QPSK_RB 1_74)

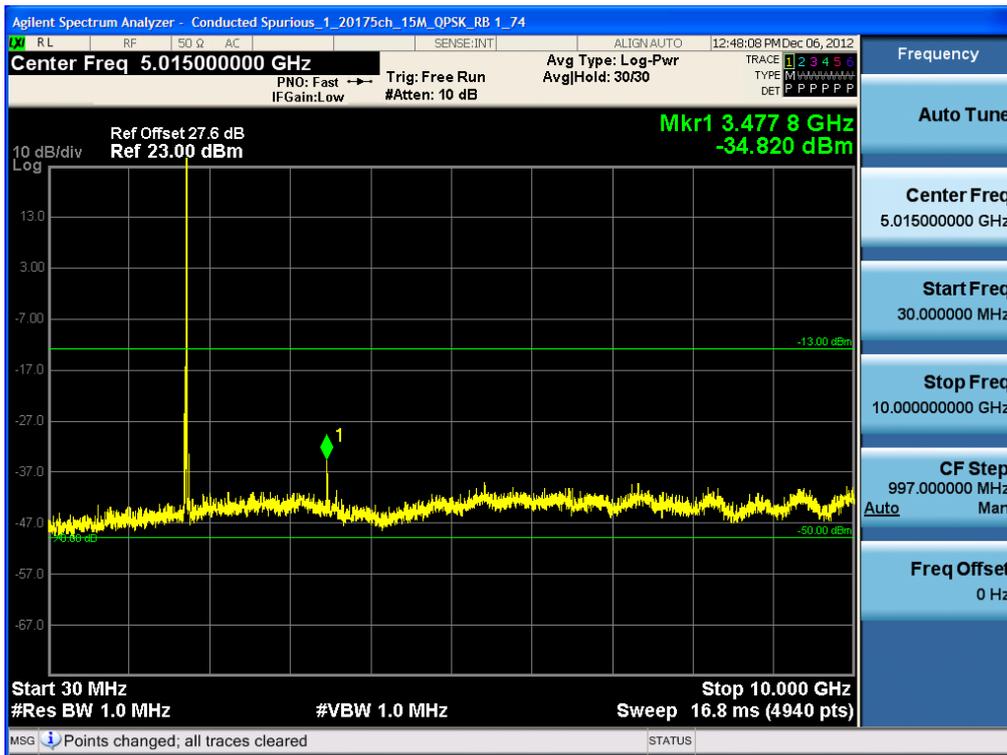

BAND 4. Conducted Spurious Plot_2 (20175ch_15 MHz_QPSK_RB 1_74)

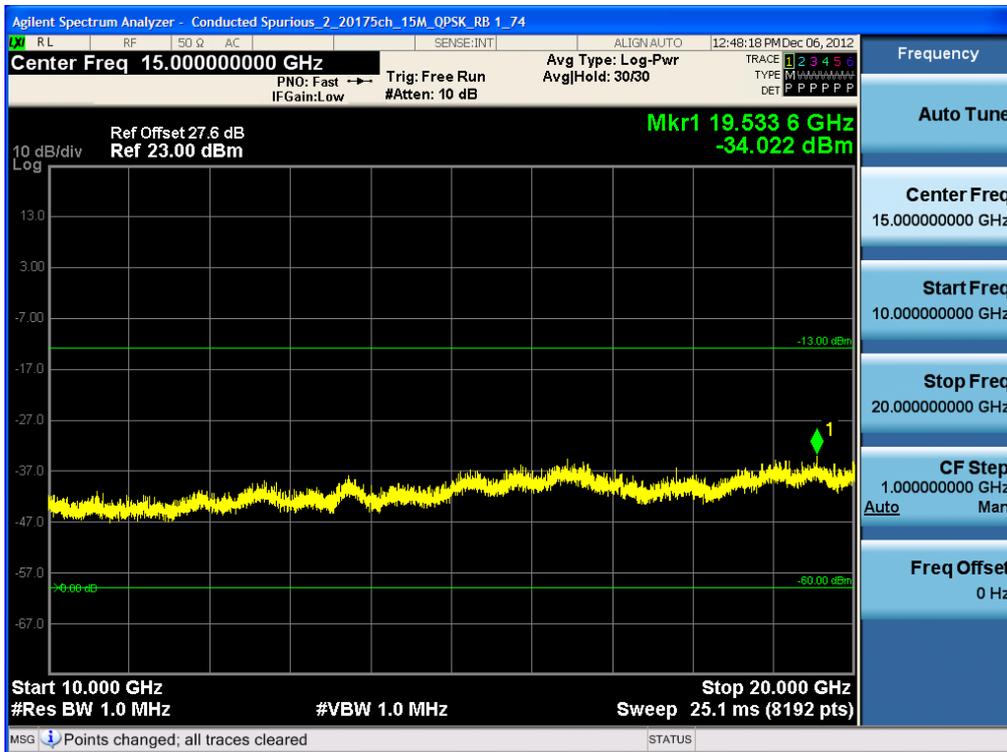


FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT
---------------------------------	-------------------------------------	--	---------------------

BAND 4. Conducted Spurious Plot_1 (20325ch_15 MHz_QPSK_RB 1_0)

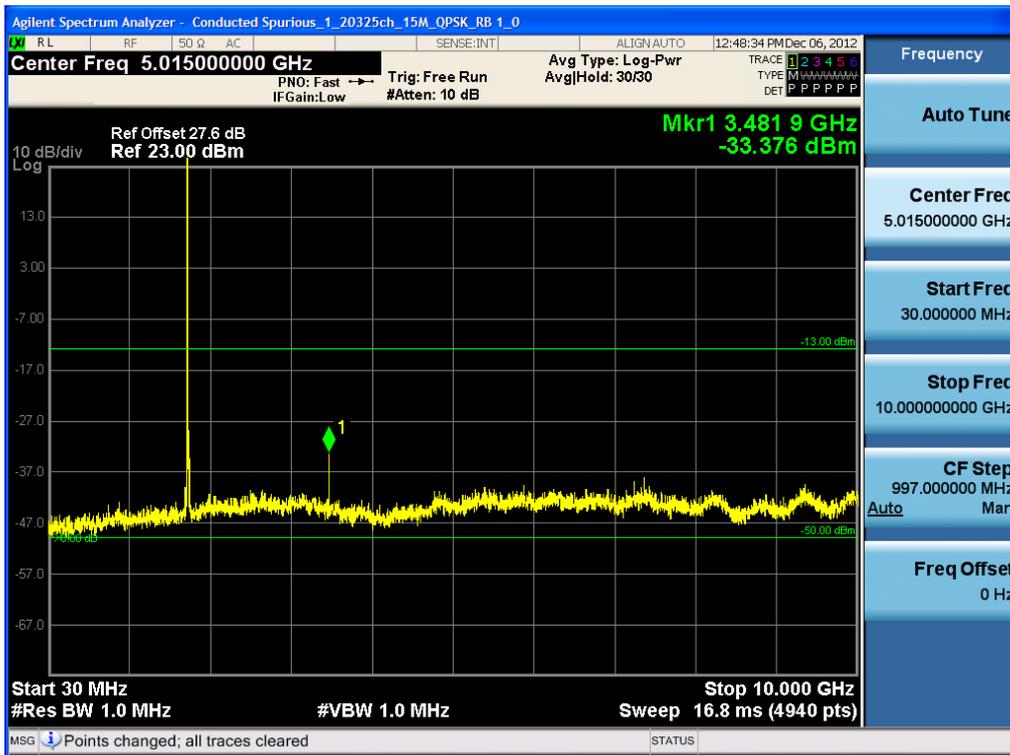


BAND 4 . Conducted Spurious Plot_2 (20325ch_15 MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Conducted Spurious Plot_1 (20050ch_20 MHz_QPSK_RB 1_0)

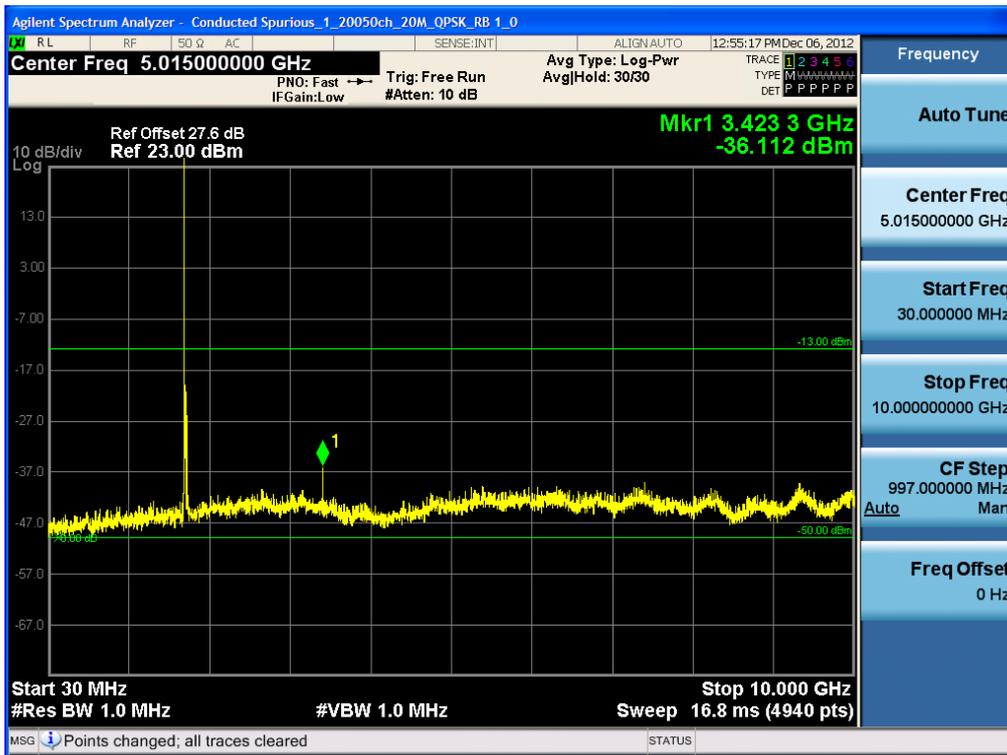


BAND 4. Conducted Spurious Plot_2 (20050ch_20 MHz_QPSK_RB 1_0)




FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Conducted Spurious Plot_1 (20175ch_20 MHz_QPSK_RB 1_0)

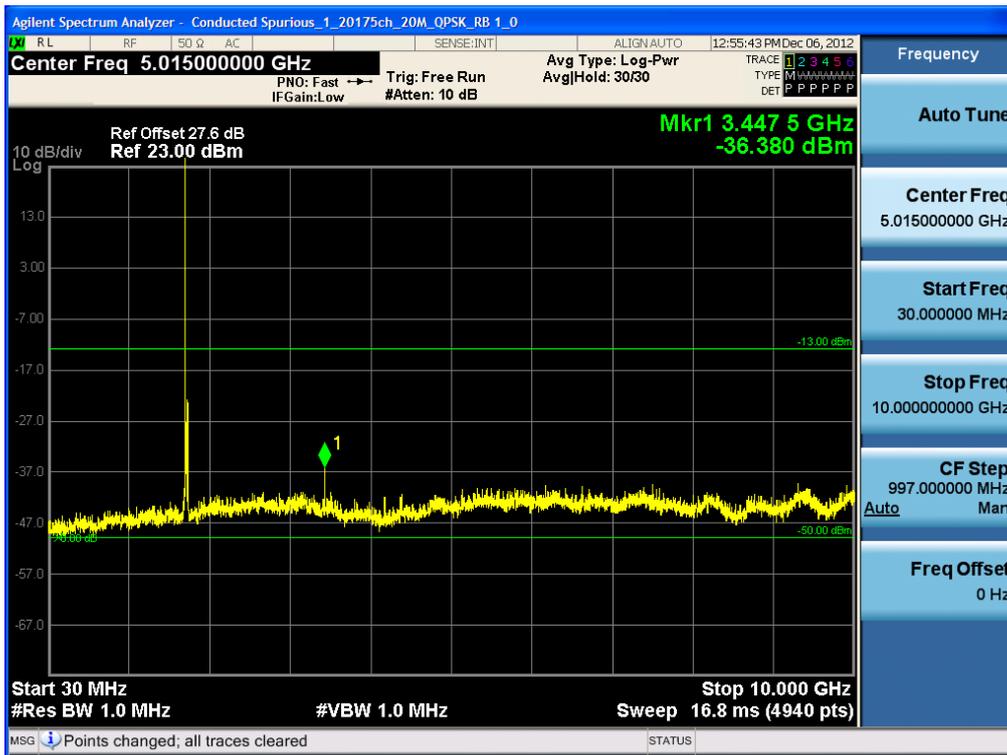


BAND 4. Conducted Spurious Plot_2 (20175ch_20 MHz_QPSK_RB 1_0)

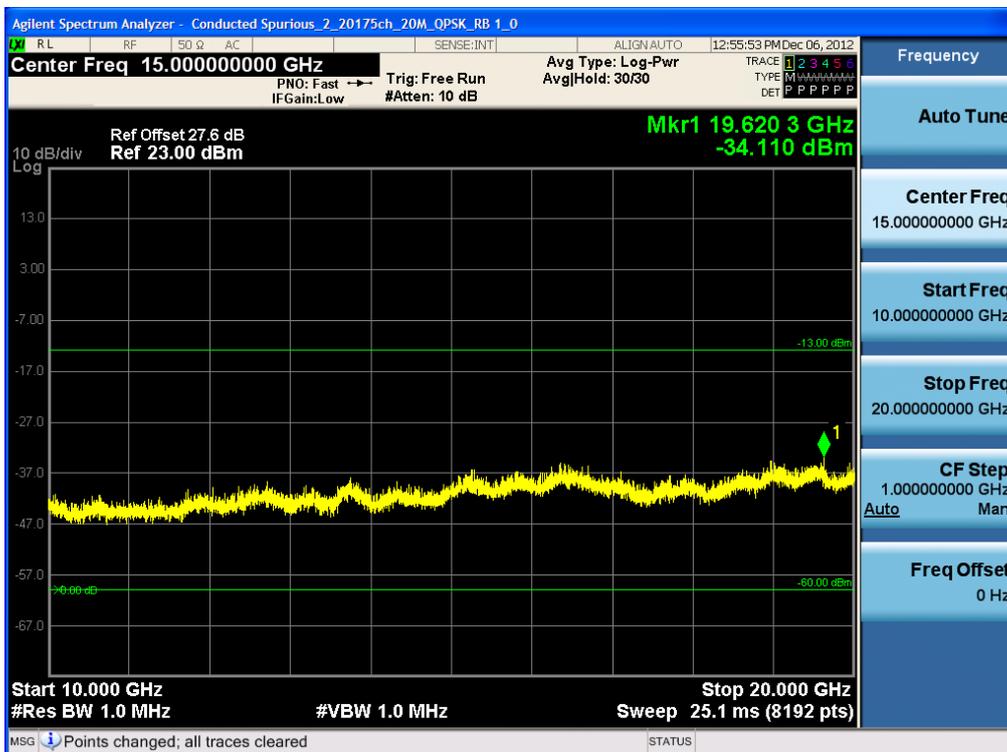

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 4. Conducted Spurious Plot_1 (20300ch_20 MHz_QPSK_RB 1_0)

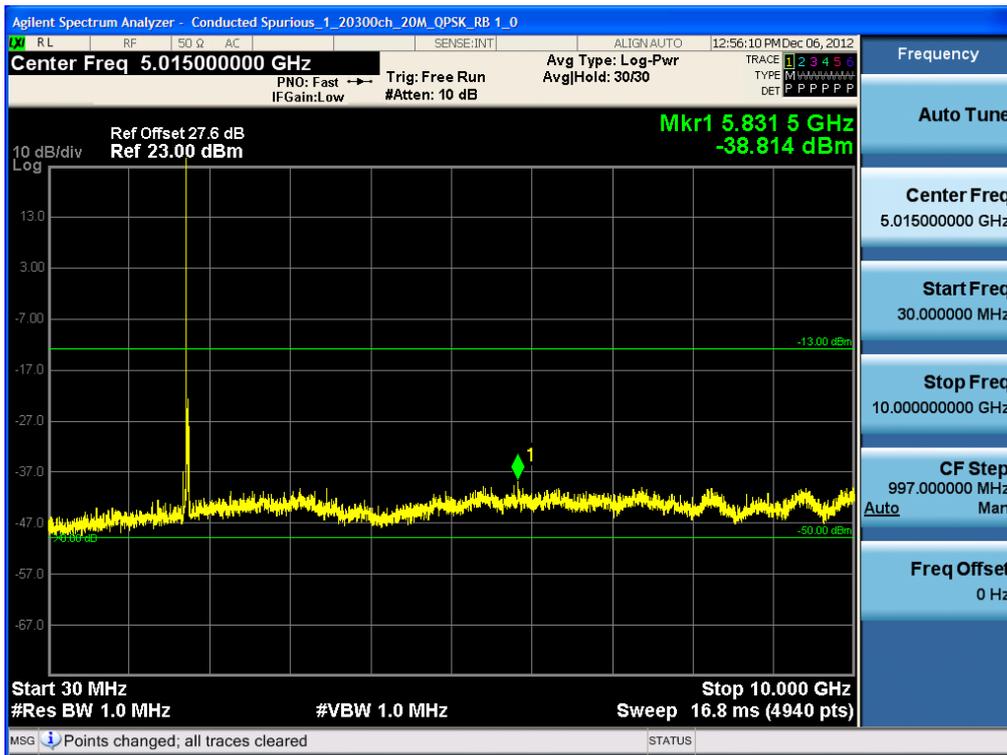

BAND 4. Conducted Spurious Plot_2 (20300ch_20 MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT

BAND 13. Conducted Spurious Plot_1 (23230ch_10MHz_QPSK_RB 1_0)



BAND 13. Conducted Spurious Plot_2 (23230ch_10MHz_QPSK_RB 1_0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1302FR08	Date of Issue: February 05, 2013	EUT Type: Cellular/PCS CDMA, GSM, WCDMA and LTE Portable Router with WLAN	FCC ID: JYCORBIT
---------------------------------	-------------------------------------	--	---------------------