

	Date(s) of Evaluation 08/30-31, 09/09-10, 11/23, 2010	Test Report Serial No. 082310K66-T1041-S90U	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date November 24, 2010	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

DECLARATION OF COMPLIANCE - SAR RF EXPOSURE EVALUATION (FCC/IC)

Test Lab Information		CELLTECH LABS INC.	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada			
Test Lab Accreditation(s)		ISO 17025 (A2LA Test Lab Certificate No. 2470.01)				
Applicant Information		VERTEX STANDARD CO., LTD.	4-8-8 Nakameguro, Meguro-ku, Tokyo 153-8664 Japan			
Application Type(s)		FCC	TCB Certification	IC	CB Certification	
Standard(s) Applied		FCC	47 CFR §2.1093	IC	Health Canada Safety Code 6	
Procedure(s) Applied		FCC	OET Bulletin 65, Supplement C	FCC	KDB 447498 D01v04	
		FCC	Occupational PTT Test Reduction Draft Considerations (v 07 15 10 Jul 29 2010)			
		FCC	KDB Inquiry Track No. 743809	IC	RSS-102 Issue 4	
		IEEE	1528-2003	IEC	62209-1:2005	
Device Classification(s)		FCC	Licensed Non-Broadcast Transmitter Held to Face (TNF) - FCC Part 90			
		IC	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz) - RSS-119 Issue 10			
Device Identifier(s)		FCC ID:	K6610944720	IC	511B-10944720	
Device Model(s)		VX-459-G7-5 (16-Key LCD)	VX-454-G7-5 (4-Key LCD)	VX-451-G7-5 (Non LCD)		
Test Sample S/N	VX-459-G7-5	01000005 (Identical Prototype)	Hardware Rev.	CS2094701	Firmware Rev. 0.31	
	VX-454-G7-5	0L000009 (Identical Prototype)	Hardware Rev.	CS2094701	Firmware Rev. 0.31	
	VX-451-G7-5	0L000008 (Identical Prototype)	Hardware Rev.	CS2094701	Firmware Rev. 0.31	
Device Description		Portable FM UHF Push-To-Talk (PTT) Radio Transceiver				
Date of Sample Receipt		August 23, 2010 (VX-459-G7-5) & November 22, 2010 (VX-451-G7-5, VX-454-G7-5)				
Date(s) of SAR Evaluations		Aug. 30-31 & Sept. 9-10 (VX-459-G7-5), Nov. 23, 2010 (VX-451-G7-5, VX-454-G7-5)				
Transmitter Frequency Range		450.0 - 512.0 MHz				
Manuf. Rated Output Power		5 Watts Conducted		Manuf. Tolerance Specification	+/- 0.25 dB (5.3 W)	
RF Output Power Level(s) Tested		VX-459-G7-5	450.0 MHz	37.16 dBm	5.20 Watts	Average Conducted
			460.0 MHz	37.16 dBm	5.20 Watts	Average Conducted
			470.0 MHz	37.23 dBm	5.28 Watts	Average Conducted
			484.0 MHz	37.24 dBm	5.30 Watts	Average Conducted
			498.0 MHz	37.26 dBm	5.32 Watts	Average Conducted
			512.0 MHz	37.24 dBm	5.30 Watts	Average Conducted
		VX-454-G7-5	498.0 MHz	37.25 dBm	5.31 Watts	Average Conducted
VX-451-G7-5	498.0 MHz	37.25 dBm	5.31 Watts	Average Conducted		
Antenna Type(s) Tested		Detachable Whip (A)	P/N: ATU-16D	450 - 470 MHz	Nc = 3	Length: 145 mm
		Detachable Whip (B)	P/N: ATU-16F	470 - 512 MHz	Nc = 4	Length: 138 mm
Battery Type(s) Tested		Li-Ion Standard (a)	7.4 V		1170 mAh	P/N: FNB-V112LI
		Li-Ion Extended (b)	7.4 V		2400 mAh	P/N: FNB-V113LI
Body-worn Accessories Tested		Belt-Clip (contains metal)				P/N: CLIP-20
Audio Accessories Tested		Over-the-Head Single-muff Headset P/N: VH-215S (Audio Accessory Category #1)				
		Earpiece Mic with Palm PTT P/N: VH-120S ((Audio Accessory Category #2)				
		Speaker-Microphone P/N: MH-45B4B (Audio Accessory Category #3)				
Max. SAR Level(s) Evaluated		Face-held	4.93 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exp.
		Body-worn	6.65 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exp.
FCC/IC Spatial Peak SAR Limit		Head/Body	8.0 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exp.
Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada Safety Code 6 for the Occupational / Controlled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 4, IEEE Standard 1528-2003 and IEC International Standard 62209-1:2005. All measurements were performed in accordance with the SAR system manufacturer recommendations.						
I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.						
This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.						
The results and statements contained in this report pertain only to the device(s) evaluated.						
Test Report Approved By				Sean Johnston	Lab Manager	Celltech Labs Inc.


Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 1 of 117

 Celltech Testing and Engineering Services Ltd	Date(s) of Evaluation 08/30-31, 09/09-10, 11/23, 2010	Test Report Serial No. 082310K66-T1041-S90U	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date November 24, 2010	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

TABLE OF CONTENTS


1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS	4
4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ($f < 0.5$ GHz)	5
5.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	5
6.0 NO. OF TEST CHANNELS (N_c)	6
7.0 MANUFACTURER'S DISCLOSED ACCESSORY LISTING	6
8.0 SAR MEASUREMENT SUMMARY	7
SAR MEASUREMENT SUMMARY (CONT.)	8
SAR MEASUREMENT SUMMARY (CONT.)	9
SAR MEASUREMENT SUMMARY (CONT.)	10
9.0 SAR SCALING (TUNE-UP TOLERANCE)	11
10.0 FLUID DIELECTRIC PARAMETERS	12
FLUID DIELECTRIC PARAMETERS (CONT.)	13
11.0 DETAILS OF SAR EVALUATION	14
12.0 SAR EVALUATION PROCEDURES	14
13.0 SYSTEM PERFORMANCE CHECK	15
14.0 SIMULATED EQUIVALENT TISSUES	16
15.0 SAR LIMITS	16
16.0 ROBOT SYSTEM SPECIFICATIONS	17
17.0 PROBE SPECIFICATION (ET3DV6)	18
18.0 BARSKI PLANAR PHANTOM	18
19.0 DEVICE HOLDER	18
20.0 TEST EQUIPMENT LIST	19
21.0 MEASUREMENT UNCERTAINTIES	20
22.0 REFERENCES	21
APPENDIX A - SAR MEASUREMENT DATA	22
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	65
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	76
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	85
APPENDIX E - DIPOLE CALIBRATION	114
APPENDIX F - PROBE CALIBRATION	115
APPENDIX G - BARSKI PLANAR PHANTOM CERTIFICATE OF CONFORMITY	116
APPENDIX H - OCCUPATIONAL PTT TEST REDUCTION DRAFT CONSIDERATIONS	117

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			

 Celltech <small>Technical and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Revision History			
Revision No.	Description	Implemented By	Release Date
1.0	Initial Release	Jon Hughes	October 19, 2010
1.1	Corrected Device Model Descriptions (Pg.1)	Jon Hughes	November 24, 2010
	Added SAR evaluations for the alternate keypad models VX-451-G7-5, VX-454-G7-5 (per FCC KDB Inquiry Tracking #743809)		

TEST REPORT SIGN-OFF			
DEVICE TESTED BY	REPORT PREPARED BY	QA REVIEW BY	REPORT APPROVED BY
Scott Kulifaj	Scott Kulifaj	Jon Hughes	Sean Johnston

 Celltech Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	  ilac-MRA ACCREDITED
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

1.0 INTRODUCTION

This measurement report demonstrates that the Vertex Standard Co., Ltd. Portable FM UHF PTT Radio Transceiver (FCC ID: K6610944720 & IC: 511B-10944720) complies with the SAR (Specific Absorption Rate) RF exposure requirements FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C 01-01 (see reference [3]), IC RSS-102 Issue 4 (see reference [4]), IEEE Standard 1528-2003 (see reference [5]) and IEC Standard 62209-1:2005 (see reference [6]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (joystick), and remote control is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses a controller with a built in VME-bus computer.

3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS

Measured RF Conducted Output Power Levels					
Radio Model	Test Frequency	Mode	dBm	Watts	Method
VX-459-G7-5	450.0 MHz	CW	37.16	5.20	Average Conducted
	460.0 MHz	CW	37.16	5.20	Average Conducted
	470.0 MHz	CW	37.23	5.28	Average Conducted
	484.0 MHz	CW	37.24	5.30	Average Conducted
	498.0 MHz	CW	37.26	5.32	Average Conducted
	512.0 MHz	CW	37.24	5.30	Average Conducted
VX-454-G7-5	498.0 MHz	CW	37.25	5.31	Average Conducted
VX-451-G7-5	498.0 MHz	CW	37.25	5.31	Average Conducted

Notes

1. The test channels were selected in accordance with the procedures specified in FCC KDB 447498 Section 6(c) (see reference [7]).
2. The RF conducted output power levels of the DUT were measured by Celltech prior to the SAR evaluations using a Gigatronics 8652A Universal Power Meter at the external antenna connector of the radio in accordance with FCC 47 CFR 82.1046 (see reference [14]) and IC RSS-Gen (see reference [15]).

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720	 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver		Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5	
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 117		

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

6.0 NO. OF TEST CHANNELS (N_c)

Antenna Part No.	Antenna Freq. Range	Test Freq. Range	N_c	Test Frequencies
ATU-16D (Ant. A)	450 - 470 MHz	450.0 - 470.0 MHz	3	450.0, 460.0, 470.0 MHz
ATU-16F (Ant. B)	470 - 512 MHz	470.0 - 512.0 MHz	4	470.0, 484.0, 498.0, 512.0 MHz
Note: The number of test channels (N_c) were calculated in accordance with the procedures specified in FCC KDB 447498 Section 6) c) (see reference [7]).				

7.0 MANUFACTURER'S DISCLOSED ACCESSORY LISTING

Part No.	Description		Accessory Type
ATU-16D	Whip Antenna (450-470 MHz)	Antenna	
ATU-16F	Whip Antenna (470-512 MHz)		
FNB-V112LI	Li-ion Battery Pack (1170 mAh)	Battery	
FNB-V113LI	Li-ion Battery Pack (2400 mAh)		
CLIP-20	Belt-Clip (Contains Metal)	Body-worn	
VH-115S	Behind-the-Head Headset w/ Boom-Mic		
VH-215S	Over-the-Head Single-muff Headset	Headset (Audio Accessory Category 1)	
VC-25	Over-the-Head VOX Headset		
VH-120S	Earpiece Mic with Palm PTT		
VH-130S	Earpiece with Palm-Mic & PTT	Earpiece (Audio Accessory Category 2)	
MH-37A4B	Earpiece Microphone		
MH-360S	Compact Speaker-Microphone		
MH-450S	Speaker-Microphone	Speaker-Microphone (Audio Accessory Category 3)	
MH-45B4B	Noise-Canceling Speaker-Microphone		

Notes:

1. Manufacturer's disclosed accessory listing information provided by Vertex Standard Co., Ltd.

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 6 of 117	

 Celltech Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

8.0 SAR MEASUREMENT SUMMARY

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver		Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 7 of 117		

 Celltech Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

BODY-WORN SAR EVALUATION RESULTS (with DEFAULT AUDIO ACCESSORIES BY CATEGORY)

C	Test Date(s): September 09-10, 2010			1	2	3	4	5	6			
R	Antenna P/N (Freq. Range)	Test Freq. (MHz)	Conducted Power (W)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
				AUDIO ACC. CATEGORY 1		AUDIO ACC. CATEGORY 2		AUDIO ACC. CATEGORY 3				
				Headset P/N: VH-215S		Earpiece P/N: VH-120S		Speaker-Mic P/N: MH-45B4B				
				Std. Battery FNB-V112LI (a)		Std. Battery FNB-V112LI (a)		Std. Battery FNB-V112LI (a)				
				100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f			
				SAR Drift dB	50% + droop	SAR Drift dB	50% + droop	SAR Drift dB	50% + droop			
1	ATU-16D (450-470 MHz) Antenna A	450.0	5.20	N/A			N/A		N/A			
2		460.0	5.20	N/A			N/A		N/A			
3		470.0	5.28	A1	9.12	4.56	A2	8.85	4.43	A3	8.33	4.17
4					-0.206	4.78		0.232	-		-0.207	4.37
5	ATU-16F (470-512 MHz) Antenna B	470.0	5.28	N/A			N/A		N/A			
6		484.0	5.30	A5	9.35	4.68	A8	10.1	5.05	N/A		
7					-0.153	4.85		-0.180	5.25			
8		498.0	5.32	A4	11.7	5.85	A7	11.3	5.65	A10	10.5	5.25
9					-0.409	6.45		-0.436	6.25		-0.343	5.70
10		512.0	5.30	A6	8.22	4.11	A9	7.81	3.91	N/A		
11					-0.407	4.52		-0.347	4.23			
SAR LIMITS				BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY				
500 mg/cm ² 10g/1000g		1000 mg/cm ² 10g/1000g		0.0001 W/cm ² 10g/1000g		0.0001 W/cm ² 10g/1000g		0.0001 W/cm ² 10g/1000g				

100

Notes					
Test Mode = CW (Unmodulated Continuous Wave)		DUT Distance to Phantom	Antenna Distance to Phantom		
Phantom = Barski Planar Phantom		2.0 cm	radio to phantom	2.5 cm	Base to phantom
Audio accessories do not contain any built-in radiating element		1.8 cm	battery to phantom	2.8 cm	Tip to phantom
Body-worn Accessory = Belt-Clip (P/N: CI IP-20)	A1-A10 denotes the corresponding Audio Accessory SAR Plot # as shown in Appendix A				

Test Procedures applied per “ECC Occupational PTT Test Reduction *Draft Considerations*” (see reference [8] and Appendix H).

1. The SAR evaluations commenced at the highest output power channel (highlighted in yellow) per antenna band.
2. Preliminary evaluations were performed in order to select the default accessory, per audio accessory category (see manufacturer's disclosed accessory listing, Section 7.0), expected to result in the highest SAR, with respect to changes in RF characteristics and exposure conditions, based on similar construction and operating requirements (see Appendix D for photographs of the manufacturer's disclosed accessory options).
3. Based on the SAR measured in the body-worn test sequence (without audio accessory) if the SAR for the antenna (ATU-16D), body-worn accessory and battery combination(s) applicable to an audio accessory is/are $> 4.0 \text{ W/kg}$, test that audio accessory using the highest body-worn SAR combination and channel configuration applicable to the audio accessory (C2R4, C4R3, C6R4).
4. Based on the SAR measured in the body-worn test sequence (without audio accessory) if the SAR for the antenna (ATU-16F), body-worn accessory and battery combination(s) applicable to an audio accessory is/are $> 4.0 \text{ W/kg}$, test that audio accessory using the highest body-worn SAR combination and channel configuration applicable to the audio accessory (C2R9, C4R9, C6R9).
5. If the SAR measured for an audio accessory combination is $> 6.0 \text{ W/kg}$ (C2R9, C4R9), test that audio accessory on the required immediately adjacent channels (C2R7, C2R11, C4R7, C4R11).
6. Remaining required channels were not evaluated based on the highest SAR channel(s) and/or adjacent channel(s) were $< 7.0 \text{ W/kg}$.
7. When test reduction applies, the slots for such configurations are denoted with N/A (Not Applicable).

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720	 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver		Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 117	

 Celltech Testing and Engineering Services Ltd	Date(s) of Evaluation 08/30-31, 09/09-10, 11/23, 2010	Test Report Serial No. 082310K66-T1041-S90U	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date November 24, 2010	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

ADDITIONAL SAR EVALUATIONS - RADIO MODELS VX-451-G7-5 (4-Key LCD), VX-454-G7-5 (No LCD)

C	Test Date(s): November 23, 2010				1	2	3	4	5	6			
R	Test Type	Radio Model	Test Freq. (MHz)	Cond. Power (W)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
R	FACE	VX-451-G7-5	498.0	5.31	NO AUDIO ACCESSORIES		AUDIO ACC. CATEGORY 1		AUDIO ACC. CATEGORY 2				
					Antenna B (P/N: ATU-16F)		Antenna B (P/N: ATU-16F)		Antenna B (P/N: ATU-16F)				
					Ext. Battery FNB-V113LI (b)		Std. Battery FNB-V112LI (a)		Std. Battery FNB-V112LI (a)				
		VX-454-G7-5	498.0	5.31	Audio Accessory N/A		Headset P/N: VH-215S		Earpiece P/N: VH-120S				
					100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f			
					SAR Drift dB	50% + droop	SAR Drift dB	50% + droop	SAR Drift dB	50% + droop			
1	FACE	VX-451-G7-5	498.0	5.31	F6*	9.24	4.62	N/A		N/A			
2						-0.217	4.86	N/A		N/A			
3		VX-454-G7-5	498.0	5.31	F7*	9.19	4.60	N/A		N/A			
4						-0.307	4.93	N/A		N/A			
5	BODY	VX-451-G7-5	498.0	5.31	B10*	11.5	5.75	N/A		N/A			
6						-0.247	6.09	N/A		N/A			
7		VX-454-G7-5	498.0	5.31	B11*	11.4	5.70	N/A		N/A			
8						-0.413	6.27	N/A		N/A			
9		VX-451-G7-5	498.0	5.31	N/A		A11*	11.5	5.75	N/A			
10					N/A			-0.367	6.26	N/A			
11		VX-454-G7-5	498.0	5.31	N/A		A12*	10.9	5.45	N/A			
12					N/A			-0.375	5.94	N/A			
13		VX-451-G7-5	498.0	5.31	N/A		A13*	N/A		11.0 5.50			
14					N/A			N/A		-0.359 5.97			
15		VX-454-G7-5	498.0	5.31	N/A		A14*	N/A		10.5 5.25			
16					N/A			N/A		-0.370 5.72			
SAR LIMITS				HEAD / BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY					
FCC 47 CFR 2.1093		HC Safety Code 6		8.0 W/kg		1g averaging		Occupational / Controlled					

Notes

The SAR evaluations were performed based on the following guidance/instructions provided by the FCC per KDB Inquiry Tracking No. 743809:
 1) for "VX-451-G7-5" and "VX-454-G7-5" please amend filing to include held-to-face / head SAR for antenna & battery that gave highest SAR for VX-459-G7-5 (Celltech: C4R9 Pg. 7).
 - if SAR for VX-451-G7-5 or VX-454-G7-5 is more than 15 % higher than VX-459-G7-5 for that antenna & battery, please contact FCC Lab for other guidance; else amend report and submit to TCB. (Celltech: the above SAR measurement results are not more than 15 % higher)
 2) for "VX-451-G7-5" and "VX-454-G7-5" please amend filing to include body "without audio accessories and body "default audio by categ" SAR for combinations / configurations that gave SAR > 6 W/kg for VX-459-G7-5 (Celltech: C2R12 Pg.8, C2R9 & C4R9 Pg. 9).
 - if SAR for VX-451-G7-5 or VX-454-G7-5 is more than 15 % higher than VX-459-G7-5 for that combination / configuration, please contact FCC Lab for other guidance; else amend report and submit to TCB. (Celltech: the above SAR measurement results are not more than 15 % higher)

Test Mode = CW (Unmodulated Continuous Wave)	DUT Distance to Phantom		Antenna Distance to Phantom		
Phantom = Barski Planar Phantom	2.0 cm		radio to phantom		2.5 cm
Audio accessories do not contain any built-in radiating element	1.8 cm		battery to phantom		2.8 cm
Body-worn Accessory = Belt-Clip (P/N: CLIP-20)	* denotes the corresponding SAR Plot # as shown in Appendix A		Tip to phantom		

Applicant: Vertex Standard Co., Ltd.	FCC ID: K6610944720	IC: 511B-10944720	
DUT Type: Portable UHF PTT Radio Transceiver	Models: VX-451-G7-5	VX-454-G7-5	VX-459-G7-5
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		
	Page 10 of 117		

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

9.0 SAR SCALING (TUNE-UP TOLERANCE)

SAR LEVELS SCALED TO KENWOOD MAXIMUM TOLERANCE SPECIFICATION

Test Config.	Freq. (MHz)	Antenna Part No.	Battery Part No.	Conducted Power (W)	SAR Level 1g (W/kg)	Scale to 5.3 W (5 W + 0.25 dB)	Scaled SAR 1g (W/kg)
Face-held	470	ATU-16D (a)	FNB-V113LI (b)	5.28	2.98	+0.017 dB	2.99
Body-worn	450	ATU-16D (a)	FNB-V112LI (a)	5.20	4.58	+0.083 dB	4.67
Body-worn	460	ATU-16D (a)	FNB-V112LI (a)	5.20	4.58	+0.083 dB	4.67
Body-worn	470	ATU-16D (a)	FNB-V112LI (a)	5.28	4.86	+0.017 dB	4.88
Body-worn	470	ATU-16D (a)	FNB-V113LI (b)	5.28	4.53	+0.017 dB	4.55
Body-worn	470	ATU-16F (b)	FNB-V112LI (a)	5.28	4.26	+0.017 dB	4.28
Body-worn	470	ATU-16D (a)	FNB-V112LI (a)	5.28	4.78	+0.017 dB	4.80
Body-worn	470	ATU-16D (a)	FNB-V112LI (a)	5.28	4.43	+0.017 dB	4.45
Body-worn	470	ATU-16D (a)	FNB-V112LI (a)	5.28	4.37	+0.017 dB	4.39

Notes:

1. The SAR levels reported are based on 50% PTT duty factor including SAR droop.
2. The far right-hand column denotes the corresponding SAR Plot # (see Appendix A).
3. The scaled SAR levels are below the FCC/IC Occupational SAR Limit of 8.0 W/kg.

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 11 of 117

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

FLUID DIELECTRIC PARAMETERS (CONT.)

Test Date	Fluid Type	Ambient Temp.	Fluid Temp.	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Aug 30	450 Head	22.0 °C	22.0 °C	≥ 15 cm	101.1 kPa	35%	1000
	450 Body	22.0 °C	22.0 °C	≥ 15 cm	101.1 kPa	35%	1000
Aug 31	450 Body	23.0 °C	22.5 °C	≥ 15 cm	101.1 kPa	35%	1000
Sep 09	450 Body	23.0 °C	23.0 °C	≥ 15 cm	101.1 kPa	35%	1000
Sep 10	450 Head	22.0 °C	22.0 °C	≥ 15 cm	101.1 kPa	35%	1000
	450 Body	24.0 °C	23.0 °C	≥ 15 cm	101.1 kPa	35%	1000
Nov 23	450 Head	20.0 °C	20.4 °C	≥ 15 cm	101.1 kPa	40%	1000
	450 Body	20.0 °C	20.2 °C	≥ 15 cm	101.1 kPa	40%	1000

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard	
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5				
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.								

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

11.0 DETAILS OF SAR EVALUATION

1. The number of test frequencies and the test channels evaluated for SAR were selected in accordance with the procedures described in FCC KDB 447498 Section 6) c) (see reference [7]).
2. The DUT was evaluated for SAR in accordance with the procedures described in FCC Occupational PTT Test Reduction *Draft* Considerations (see reference [8] and Appendix H).
3. The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
4. The SAR droop of the DUT was measured by the DASY4 system for the duration of the SAR evaluations. The measured SAR droop was added to the measured SAR levels to report scaled SAR levels as shown in the SAR test data tables. A SAR-versus-Time power droop evaluation was performed in the test configuration that reported the maximum measured SAR level. See Appendix A (SAR Test Plots) for SAR-versus-Time power droop evaluation plot.
5. The fluid temperature was measured prior to and after the SAR evaluations. The fluid temperature remained within +/-2°C during the SAR evaluations.
6. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
7. The DUT was tested at the maximum conducted output power level preset by the manufacturer in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.

12.0 SAR EVALUATION PROCEDURES

- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
 - c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
 - d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
 A 1g and 10g spatial peak SAR was determined as follows:
 - e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
 - f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
 - g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			



Date(s) of Evaluation
08/30-31, 09/09-10, 11/23, 2010

Test Report Serial No.
082310K66-T1041-S90U

Test Report Revision No.
Rev. 1.1 (2nd Release)



Test Report Issue Date
November 24, 2010

Description of Test(s)
Specific Absorption Rate


RF Exposure Category
Occupational (Controlled)

13.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations, daily system checks were performed with a planar phantom and SPEAG 450 MHz dipole (see Appendix B) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [5]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 398 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the SAR system manufacturer's dipole calibration target SAR value (see Appendix E for system manufacturer's dipole calibration procedures).

SYSTEM PERFORMANCE CHECK EVALUATIONS

Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. (MHz)	SPEAG Target	Meas.	Dev.	SPEAG Target	Meas.	Dev.	SPEAG Target	Meas.	Dev.					
Aug 30	Body 450	1.78 $\pm 10\%$	1.83	+2.8%	56.7 $\pm 5\%$	55.5	-2.1%	0.94 $\pm 5\%$	0.90	-4.3%	1000	22.0	22.0	≥ 15	35	101.1
Aug 31	Body 450	1.78 $\pm 10\%$	1.85	+3.9%	56.7 $\pm 5\%$	56.8	+0.2%	0.94 $\pm 5\%$	0.90	-4.3%	1000	23.0	22.5	≥ 15	35	101.1
Sep 09	Body 450	1.78 $\pm 10\%$	1.81	+1.7%	56.7 $\pm 5\%$	57.4	+1.2%	0.94 $\pm 5\%$	0.92	-2.1%	1000	23.0	23.0	≥ 15	35	101.1
Sep 10	Body 450	1.78 $\pm 10\%$	1.83	+2.8%	56.7 $\pm 5\%$	57.7	+1.8%	0.94 $\pm 5\%$	0.92	-2.1%	1000	24.0	23.0	≥ 15	35	101.1
Nov 23	Body 450	1.78 $\pm 10\%$	1.78	0.0%	56.7 $\pm 5\%$	59.2	+4.4%	0.94 $\pm 5\%$	0.90	-4.3%	1000	20.0	20.2	≥ 15	40	101.1
Notes	1.	The target SAR values are the measured values from the SAR system manufacturer's dipole calibration (see Appendix E).														
	2.	The target dielectric parameters are the nominal values from the SAR system manufacturer's dipole calibration (see Appendix E).														
	3.	The fluid temperature was measured prior to and after the system performance check evaluations. The fluid temperature remained within $\pm 2^\circ\text{C}$ during the system performance check evaluations.														
	4.	The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).														

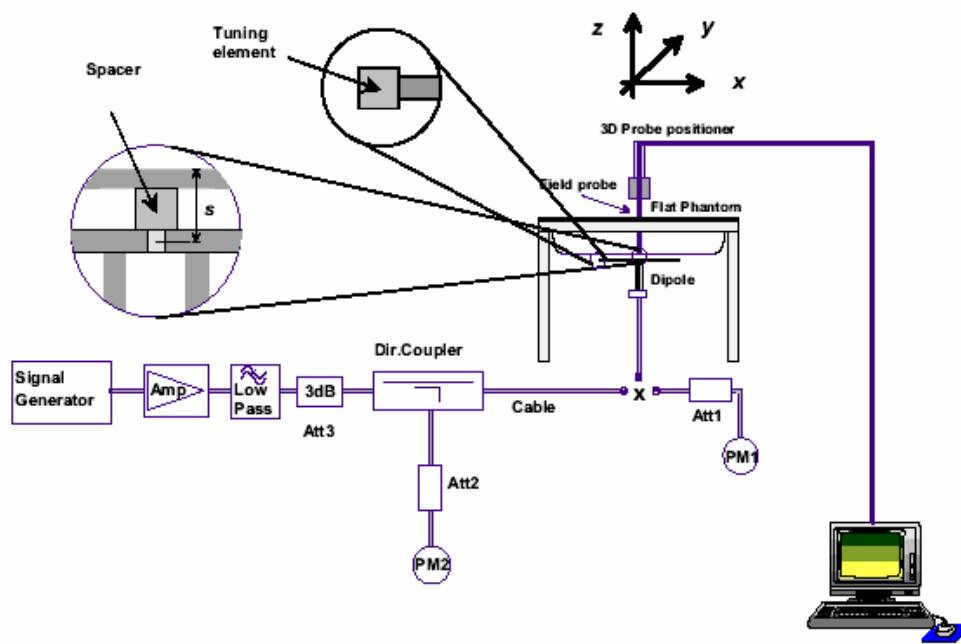

System Performance Check Measurement Setup (IEEE Standard 1528-2003)

SPEAG 450 MHz Validation Dipole Setup

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720			IC:	511B-10944720		Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5				
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 15 of 117	

	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

14.0 SIMULATED EQUIVALENT TISSUES

The simulated equivalent tissue recipes in the table below are derived from the SAR system manufacturer's suggested recipes in the DASY4 manual (see references [11] and [12]) in accordance with the procedures and requirements specified in IEEE Standard 1528-2003 (see reference [5]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz HEAD	450 MHz BODY
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

15.0 SAR LIMITS

SAR RF EXPOSURE LIMITS		
FCC 47 CFR 2.1093	General Population	Occupational
Spatial Average (averaged over the whole body)	0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)	1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.		
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.		
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.		

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 16 of 117

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	  ilac-MRA ACCREDITED
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

16.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44 Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Evaluation Phantom</u>	
Type	Barski Planar Phantom
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 70 liters
<u>Validation Phantom</u>	
Type	Barski Planar Phantom
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 70 liters

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver		Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 17 of 117		

 Celltech Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

17.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy \pm 8%)	
Frequency:	10 MHz to $>$ 6 GHz; Linearity: \pm 0.2 dB (30 MHz to 3 GHz)	
Directivity:	\pm 0.2 dB in head tissue (rotation around probe axis) \pm 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to $>$ 100 mW/g; Linearity: \pm 0.2 dB	
Surface Detect:	\pm 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	

18.0 BARSKI PLANAR PHANTOM

The Barski Planar Phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table. The planar phantom was used for the DUT SAR evaluations and the system performance check evaluations. See Appendix G for dimensions and specifications of the Barski Planar Phantom.

19.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. For evaluations of larger devices a Plexiglas platform is attached to the device holder.

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver		Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 18 of 117	

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

21.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION									
Uncertainty Component	IEEE 1528 Section	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value ±% (1g)	Uncertainty Value ±% (10g)	V_i or V_{eff}
Measurement System									
Probe Calibration (450 MHz)	E.2.1	6.65	Normal	1	1	1	6.65	6.65	∞
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect	E.2.3	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measured)	E.3.3	4.3	Normal	1	0.64	0.43	2.8	1.8	∞
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measured)	E.3.3	3.7	Normal	1	0.6	0.49	2.2	1.8	∞
Combined Standard Uncertainty				RSS			11.56	11.18	
Expanded Uncertainty (95% Confidence Interval)				k=2			23.12	22.36	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003									

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720			IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5				
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 20 of 117	

 Celltech <small>Technical and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

22.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 4: March 2010.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] IEC International Standard 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."
- [7] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01 v04: November 2009.
- [8] Federal Communications Commission - "Occupational PTT Test Reduction *Draft* Considerations": Version 07 15 10.
- [9] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.
- [10] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 21 Application Note, SAR Sensitivities: Sept. 2005.
- [11] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 16 Application Note, Head Tissue Recipe: Sept. 2005.
- [12] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [13] ISO/IEC 17025 - "General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025:2005)."
- [14] Federal Communications Commission - "Measurements Required: RF Power Output"; Rule Part 47 CFR §2.1046.
- [15] Industry Canada - "General Requirements and Information for the Certification of Radiocommunication Equipment", Radio Standards Specification RSS-Gen Issue 2: June 2007.

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 08/30/2010

System Performance Check - 450 MHz Dipole - Body

DUT: Dipole D450V3; Asset: 00217; Serial: 1068; Calibration: 01/18/2010

Ambient Temp: 22.0°C; Fluid Temp: 22.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 398 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used: $f = 450$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 450 MHz Dipole

Head d=15mm Pin=398mW 2/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.79 mW/g


Head d=15mm Pin=398mW 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.8 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 1.83 mW/g; SAR(10 g) = 1.22 mW/g

Maximum value of SAR (measured) = 1.94 mW/g

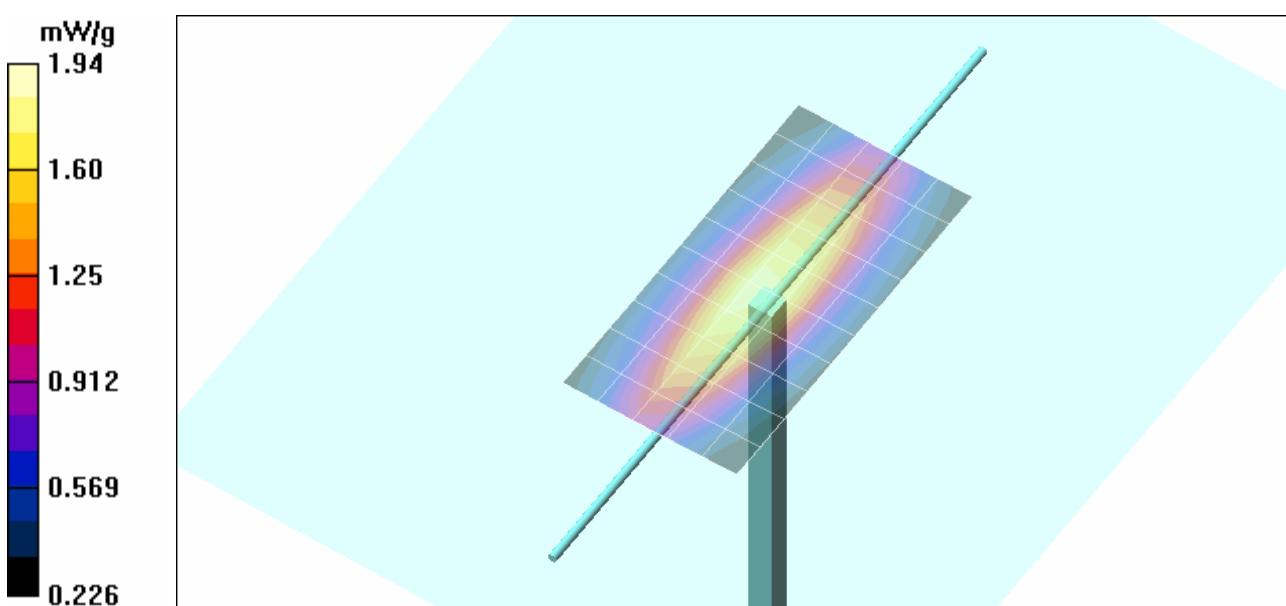

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 66 of 117


 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Z-Axis Scan

450 MHz System Performance Check SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

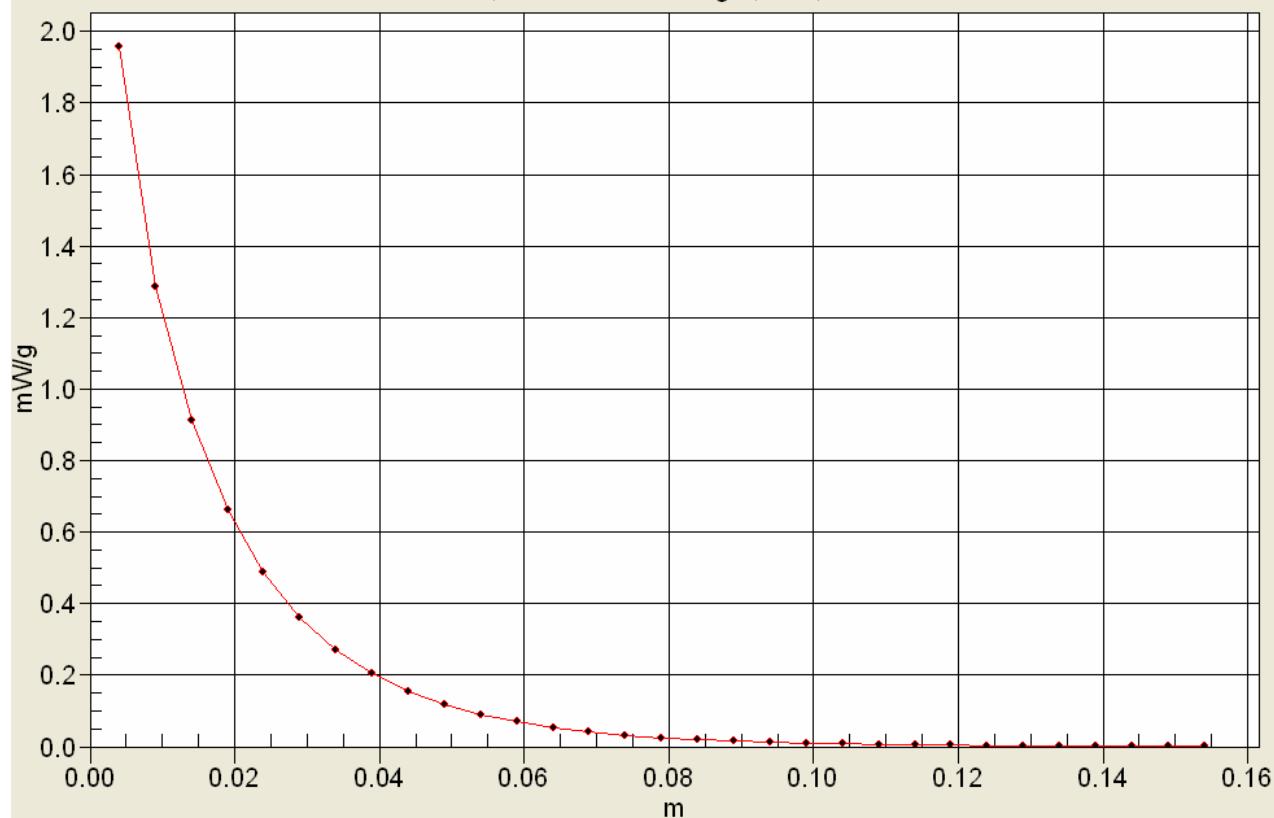

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 08/31/2010

System Performance Check - 450 MHz Dipole - Body

DUT: Dipole D450V3; Asset: 00217; Serial: 1068; Calibration: 01/18/2010

Ambient Temp: 23.0°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 398 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used: $f = 450$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 56.8$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 450 MHz Dipole

Head d=15mm Pin=398mW 2/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.87 mW/g


Head d=15mm Pin=398mW 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.0 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 1.85 mW/g; SAR(10 g) = 1.23 mW/g


Maximum value of SAR (measured) = 1.96 mW/g

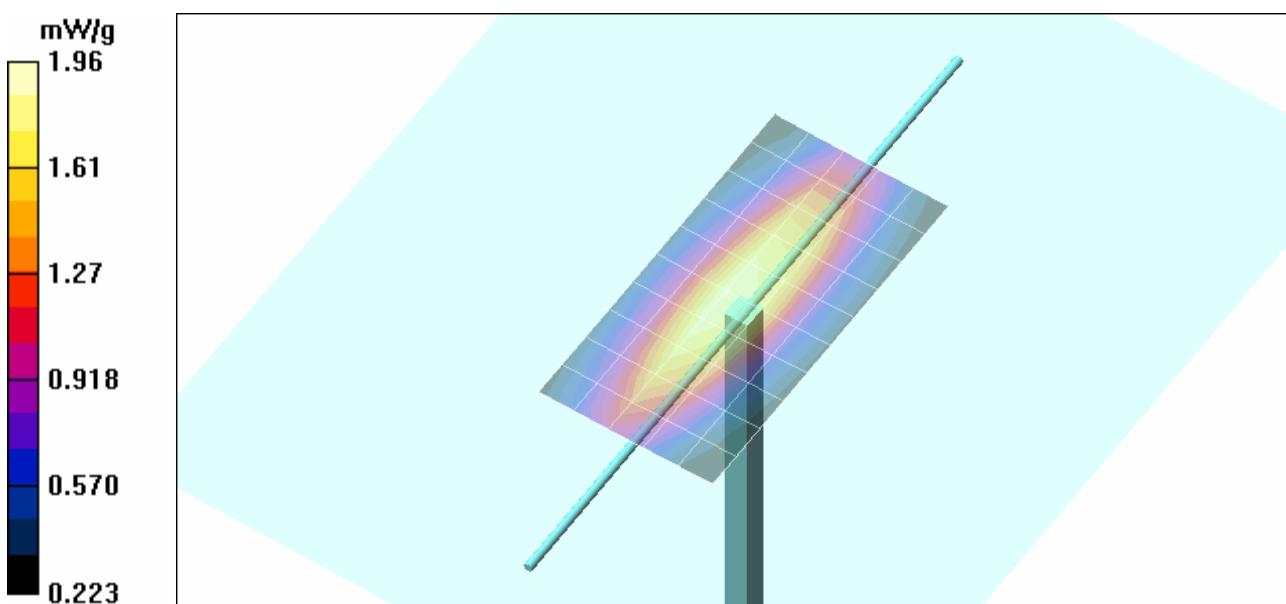

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 68 of 117

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Z-Axis Scan

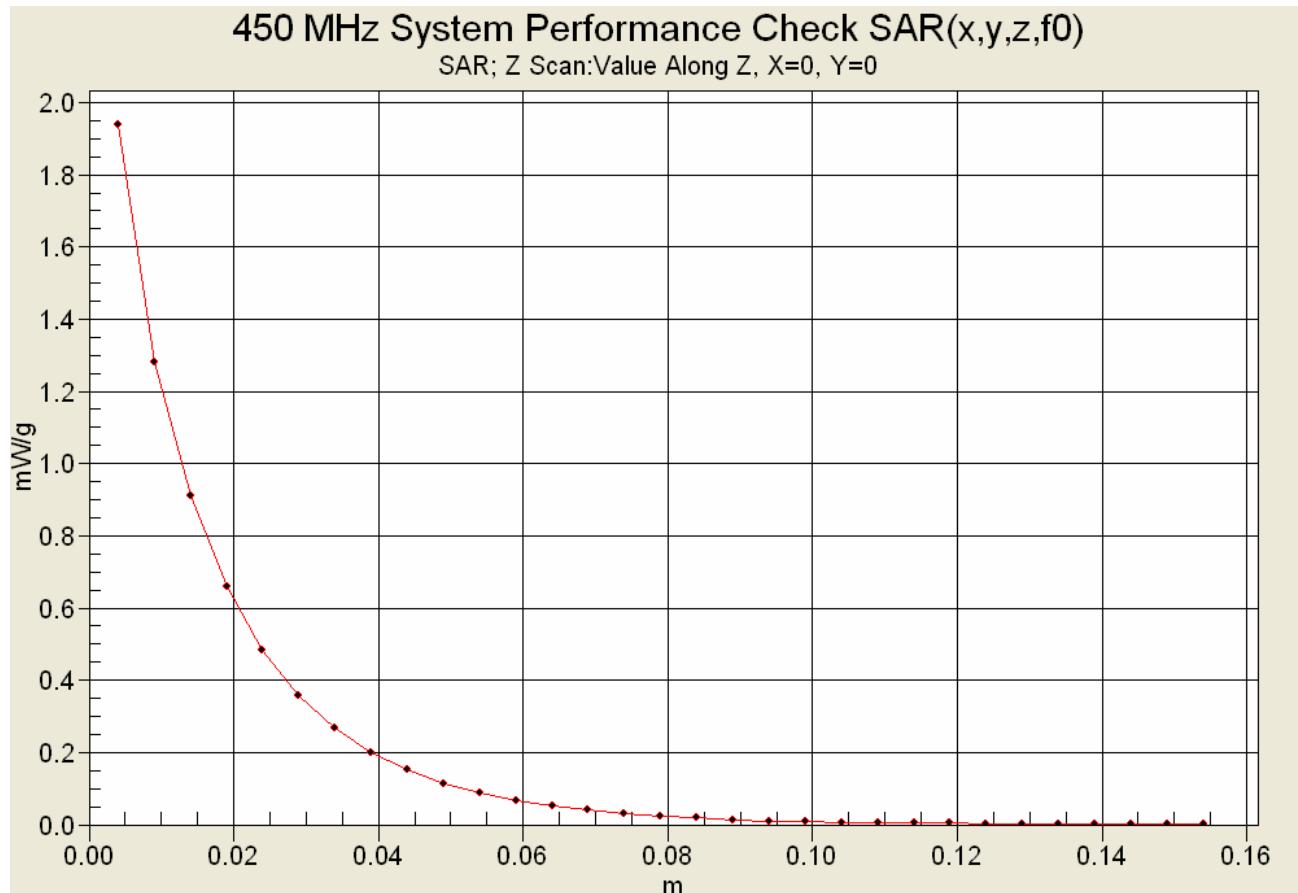

 Celltech Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	  ILAC-MRA ACREDITED
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/09/2010

System Performance Check - 450 MHz Dipole - Body

DUT: Dipole D450V3; Asset: 00217; Serial: 1068; Calibration: 01/18/2010

Ambient Temp: 23.0°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 398 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used: $f = 450$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 57.4$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 450 MHz Dipole

Head d=15mm Pin=398mW 2/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.86 mW/g


Head d=15mm Pin=398mW 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 44.8 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 2.89 W/kg

SAB(1 g) = 1.81 mW/g; SAB(10 g) = 1.23 mW/g


Maximum value of SAB (measured) = 1.92 mW/g

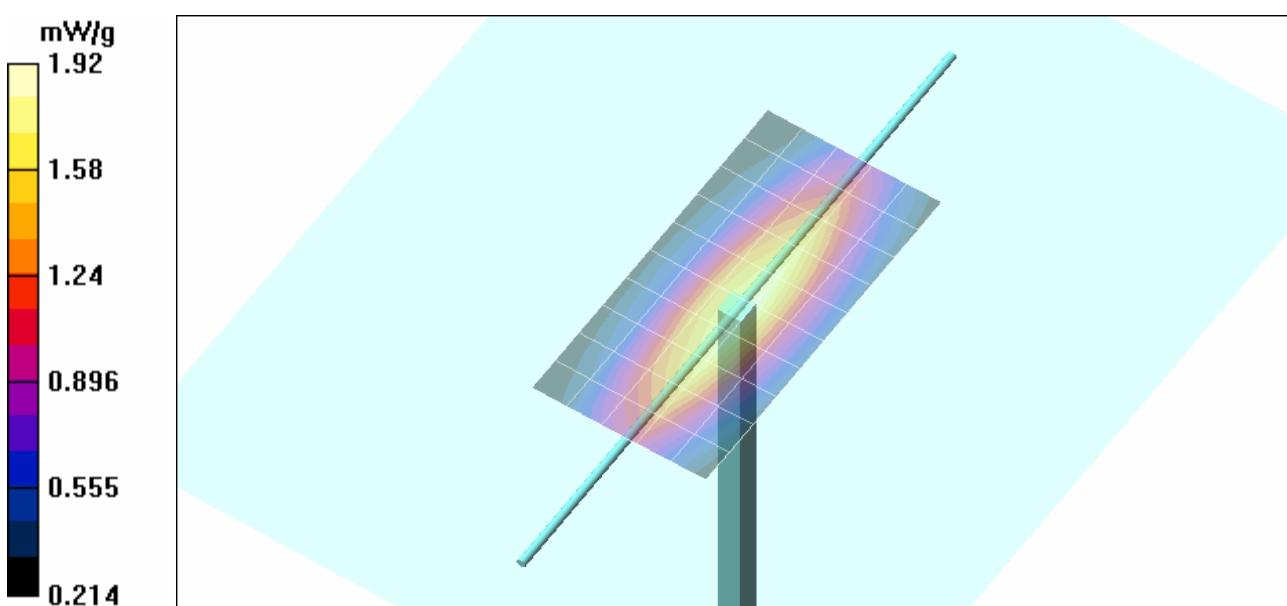

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver		Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 70 of 117			

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Z-Axis Scan

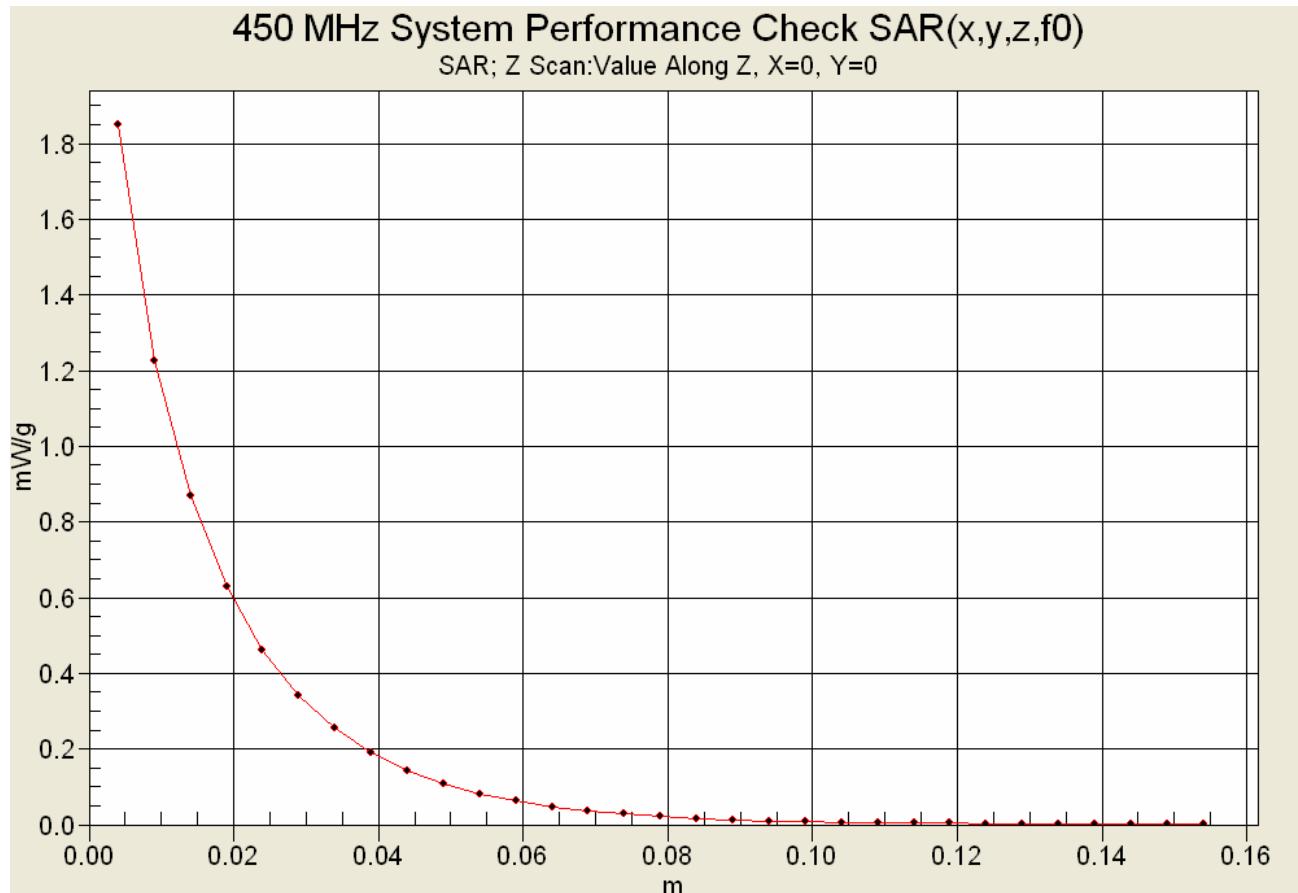

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 11/23/2010

System Performance Check - 450 MHz Dipole - Body

DUT: Dipole D450V3; Asset: 00217; Serial: 1068; Calibration: 01/18/2010

Ambient Temp: 20.0°C; Fluid Temp: 20.2°C; Barometric Pressure: 101.1 kPa; Humidity: 40%

Communication System: CW

Forward Conducted Power: 398 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used: $f = 450$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 59.2$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 450 MHz Dipole

Head d=15mm Pin=398mW 2/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.86 mW/g


Head d=15mm Pin=398mW 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 44.4 V/m; Power Drift = 0.015 dB


Peak SAR (extrapolated) = 2.82 W/kg

SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.19 mW/g

Maximum value of SAR (measured) = 1.89 mW/g

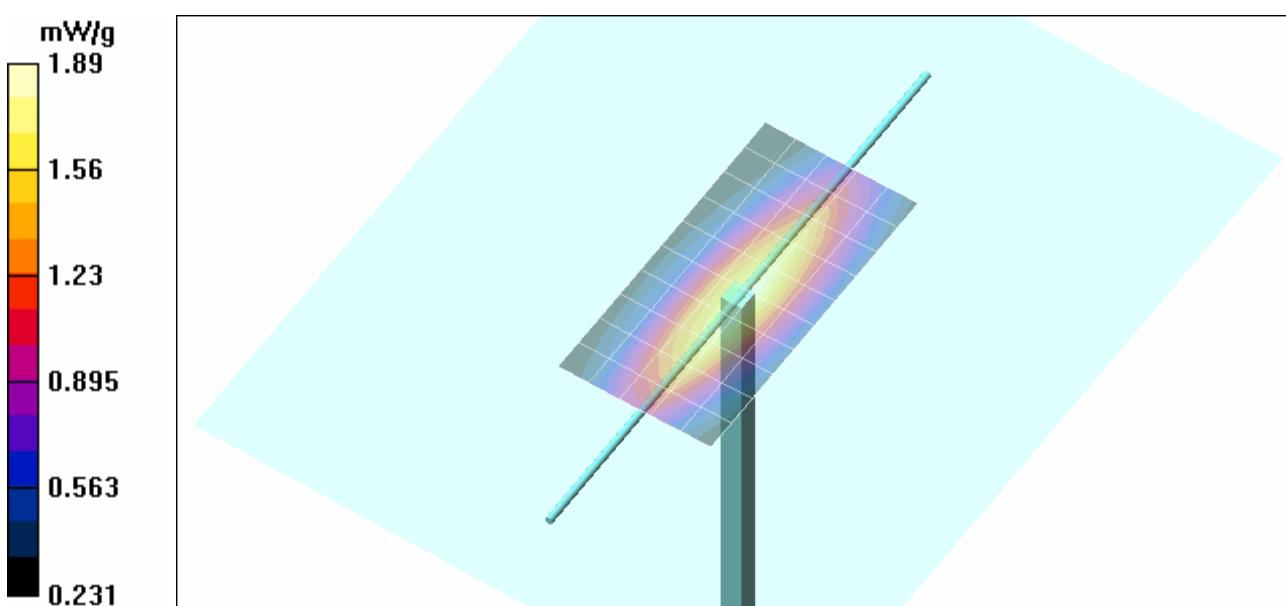

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 74 of 117

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver		Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5		
2010 Celtech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.					Page 76 of 117	

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

450 MHz Body

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

30/Aug/2010

Frequency (GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	57.70	0.93	56.80	0.81
0.3600	57.60	0.93	56.91	0.81
0.3700	57.50	0.93	56.57	0.83
0.3800	57.40	0.93	56.10	0.82
0.3900	57.30	0.93	55.39	0.85
0.4000	57.20	0.93	56.04	0.85
0.4100	57.10	0.93	56.24	0.84
0.4200	57.00	0.94	55.40	0.85
0.4300	56.90	0.94	55.76	0.87
0.4400	56.80	0.94	55.34	0.89
0.4500	56.70	0.94	55.47	0.90
0.4600	56.66	0.94	55.59	0.90
0.4700	56.62	0.94	54.85	0.90
0.4800	56.58	0.94	54.76	0.92
0.4900	56.54	0.94	54.57	0.92
0.5000	56.51	0.94	54.74	0.93
0.5100	56.47	0.94	54.75	0.93
0.5200	56.43	0.95	54.47	0.95
0.5300	56.39	0.95	54.55	0.96
0.5400	56.35	0.95	54.07	0.95
0.5500	56.31	0.95	54.20	0.95

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 77 of 117

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

450 MHz Head

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

30/Aug/2010

Frequency (GHz)

FCC_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	46.26	0.74
0.3600	44.58	0.87	46.47	0.74
0.3700	44.46	0.87	45.21	0.76
0.3800	44.34	0.87	45.77	0.76
0.3900	44.22	0.87	45.52	0.77
0.4000	44.10	0.87	45.19	0.79
0.4100	43.98	0.87	45.69	0.79
0.4200	43.86	0.87	44.60	0.80
0.4300	43.74	0.87	44.15	0.80
0.4400	43.62	0.87	44.05	0.82
0.4500	43.50	0.87	43.53	0.83
0.4600	43.45	0.87	44.03	0.84
0.4700	43.40	0.87	43.69	0.86
0.4800	43.34	0.87	43.23	0.85
0.4900	43.29	0.87	43.41	0.86
0.5000	43.24	0.87	42.90	0.87
0.5100	43.19	0.87	43.08	0.89
0.5200	43.14	0.88	43.00	0.89
0.5300	43.08	0.88	42.25	0.89
0.5400	43.03	0.88	42.79	0.90
0.5500	42.98	0.88	42.37	0.91

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 78 of 117

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

450 MHz Body

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

31/Aug/2010

Frequency (GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	57.70	0.93	57.38	0.83
0.3600	57.60	0.93	56.96	0.82
0.3700	57.50	0.93	58.33	0.85
0.3800	57.40	0.93	56.33	0.84
0.3900	57.30	0.93	56.70	0.87
0.4000	57.20	0.93	56.97	0.86
0.4100	57.10	0.93	56.29	0.86
0.4200	57.00	0.94	55.79	0.87
0.4300	56.90	0.94	56.04	0.90
0.4400	56.80	0.94	56.38	0.90
0.4500	56.70	0.94	56.80	0.90
0.4600	56.66	0.94	55.74	0.92
0.4700	56.62	0.94	55.91	0.92
0.4800	56.58	0.94	55.42	0.94
0.4900	56.54	0.94	55.51	0.94
0.5000	56.51	0.94	55.63	0.95
0.5100	56.47	0.94	55.79	0.94
0.5200	56.43	0.95	55.16	0.98
0.5300	56.39	0.95	54.83	0.99
0.5400	56.35	0.95	54.75	0.98
0.5500	56.31	0.95	54.64	0.99

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 79 of 117

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

450 MHz Body

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

09/Sep/2010

Frequency (GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	57.70	0.93	58.77	0.84
0.3600	57.60	0.93	58.57	0.84
0.3700	57.50	0.93	58.33	0.86
0.3800	57.40	0.93	58.35	0.88
0.3900	57.30	0.93	57.90	0.88
0.4000	57.20	0.93	57.53	0.88
0.4100	57.10	0.93	57.96	0.87
0.4200	57.00	0.94	57.90	0.91
0.4300	56.90	0.94	57.79	0.91
0.4400	56.80	0.94	57.37	0.92
0.4500	56.70	0.94	57.35	0.92
0.4600	56.66	0.94	56.82	0.92
0.4700	56.62	0.94	56.60	0.92
0.4800	56.58	0.94	56.95	0.93
0.4900	56.54	0.94	56.98	0.95
0.5000	56.51	0.94	56.54	0.97
0.5100	56.47	0.94	56.07	0.97
0.5200	56.43	0.95	56.47	0.98
0.5300	56.39	0.95	56.50	0.98
0.5400	56.35	0.95	56.45	0.98
0.5500	56.31	0.95	56.18	1.00

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 80 of 117

	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

450 MHz Body

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

10/Sep/2010

Frequency (GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	57.70	0.93	58.62	0.86
0.3600	57.60	0.93	57.83	0.86
0.3700	57.50	0.93	57.84	0.86
0.3800	57.40	0.93	57.67	0.88
0.3900	57.30	0.93	57.05	0.88
0.4000	57.20	0.93	57.21	0.89
0.4100	57.10	0.93	56.96	0.90
0.4200	57.00	0.94	57.22	0.89
0.4300	56.90	0.94	57.64	0.90
0.4400	56.80	0.94	57.24	0.92
0.4500	56.70	0.94	57.70	0.92
0.4600	56.66	0.94	56.86	0.93
0.4700	56.62	0.94	56.74	0.95
0.4800	56.58	0.94	56.41	0.94
0.4900	56.54	0.94	56.27	0.95
0.5000	56.51	0.94	56.50	0.97
0.5100	56.47	0.94	56.28	0.98
0.5200	56.43	0.95	56.30	0.97
0.5300	56.39	0.95	56.18	0.98
0.5400	56.35	0.95	56.48	1.00
0.5500	56.31	0.95	56.11	0.99

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 81 of 117

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

450 MHz Head

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

10/Sep/2010

Frequency (GHz)

FCC_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	46.53	0.75
0.3600	44.58	0.87	46.68	0.77
0.3700	44.46	0.87	45.98	0.77
0.3800	44.34	0.87	46.61	0.79
0.3900	44.22	0.87	46.65	0.79
0.4000	44.10	0.87	46.14	0.80
0.4100	43.98	0.87	45.72	0.82
0.4200	43.86	0.87	45.09	0.82
0.4300	43.74	0.87	44.96	0.82
0.4400	43.62	0.87	44.33	0.85
0.4500	43.50	0.87	44.84	0.85
0.4600	43.45	0.87	44.84	0.87
0.4700	43.40	0.87	44.05	0.85
0.4800	43.34	0.87	44.09	0.87
0.4900	43.29	0.87	43.60	0.87
0.5000	43.24	0.87	43.77	0.87
0.5100	43.19	0.87	43.38	0.90
0.5200	43.14	0.88	43.63	0.91
0.5300	43.08	0.88	43.24	0.92
0.5400	43.03	0.88	42.93	0.93
0.5500	42.98	0.88	42.63	0.92

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 82 of 117

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

450 MHz Head

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

23/Nov/2010

Frequency (GHz)

FCC_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	47.11	0.73
0.3600	44.58	0.87	47.03	0.74
0.3700	44.46	0.87	46.41	0.74
0.3800	44.34	0.87	46.04	0.76
0.3900	44.22	0.87	45.57	0.77
0.4000	44.10	0.87	45.27	0.77
0.4100	43.98	0.87	45.91	0.79
0.4200	43.86	0.87	45.75	0.80
0.4300	43.74	0.87	45.53	0.82
0.4400	43.62	0.87	44.83	0.81
0.4500	43.50	0.87	44.56	0.83
0.4600	43.45	0.87	44.61	0.83
0.4700	43.40	0.87	44.32	0.85
0.4800	43.34	0.87	43.97	0.83
0.4900	43.29	0.87	44.43	0.85
0.5000	43.24	0.87	43.84	0.88
0.5100	43.19	0.87	43.44	0.87
0.5200	43.14	0.88	43.55	0.89
0.5300	43.08	0.88	43.31	0.89
0.5400	43.03	0.88	43.00	0.89
0.5500	42.98	0.88	42.94	0.91

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver	Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 84 of 117

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX E - DIPOLE CALIBRATION

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver		Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 114 of 117		



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Celltech**

Certificate No: **D450V3-1068_Jan10**

CALIBRATION CERTIFICATE

Object **D450V3 - SN: 1068**

Calibration procedure(s) **QA CAL-15.v5**
Calibration Procedure for dipole validation kits below 800 MHz

Calibration date: **January 18, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ET3DV6 (LF)	SN: 1507	03-Jul-09 (No. ET3-1507_Jul09)	Jul-10
DAE4	SN: 654	04-May-09 (No. DAE4-654_May09)	May-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

Calibrated by: **Jeton Kastrati** **Laboratory Technician**

i.V. (Signature)

Approved by: **Katja Pokovic** **Technical Manager**

K.P. (Signature)

Issued: January 20, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TS	tissue simulating liquid
ConF	sensitivity in TS / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TS:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TS parameters:* The measured TS parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	ELI4 Flat Phantom	Shell thickness: 2 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Area Scan Resolution	$dx, dy = 15$ mm	
Zoom Scan Resolution	$dx, dy, dz = 5$ mm	
Frequency	450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.87 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	44.2 ± 6 %	0.86 mho/m ± 6 %
Head TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	398 mW input power	1.87 mW / g
SAR normalized	normalized to 1W	4.70 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	4.76 mW / g ± 18.1 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	398 mW input power	1.25 mW / g
SAR normalized	normalized to 1W	3.14 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	3.17 mW / g ± 17.6 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.7	0.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.1 ± 6 %	0.90 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	398 mW input power	1.78 mW / g
SAR normalized	normalized to 1W	4.47 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	4.58 mW / g ± 18.1 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	398 mW input power	1.19 mW / g
SAR normalized	normalized to 1W	2.99 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	3.06 mW / g ± 17.6 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	57.5 Ω - 5.9 $j\Omega$
Return Loss	-21.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	54.8 Ω - 9.3 $j\Omega$
Return Loss	-20.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.350 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 16, 2009

DASY5 Validation Report for Head TSL

Date/Time: 1/18/2010 10:59:37 AM

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450

Medium parameters used: $f = 450$ MHz; $\sigma = 0.86$ mho/m; $\epsilon_r = 44.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(6.66, 6.66, 6.66); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Head/d=15mm, Pin=398mW/Area Scan (41x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.99 mW/g


Head/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.2 V/m; Power Drift = -0.020 dB


Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.87 mW/g; SAR(10 g) = 1.25 mW/g

Maximum value of SAR (measured) = 2 mW/g

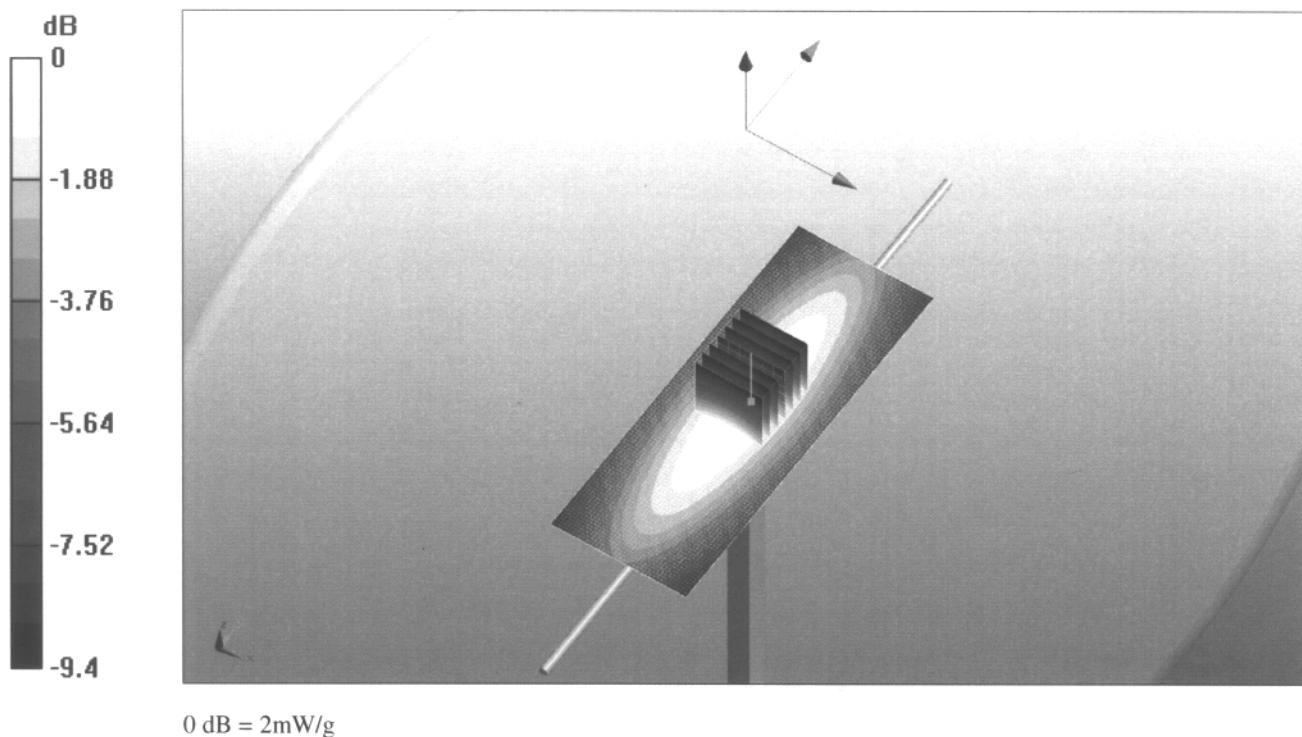

Impedance Measurement Plot for Head TSL

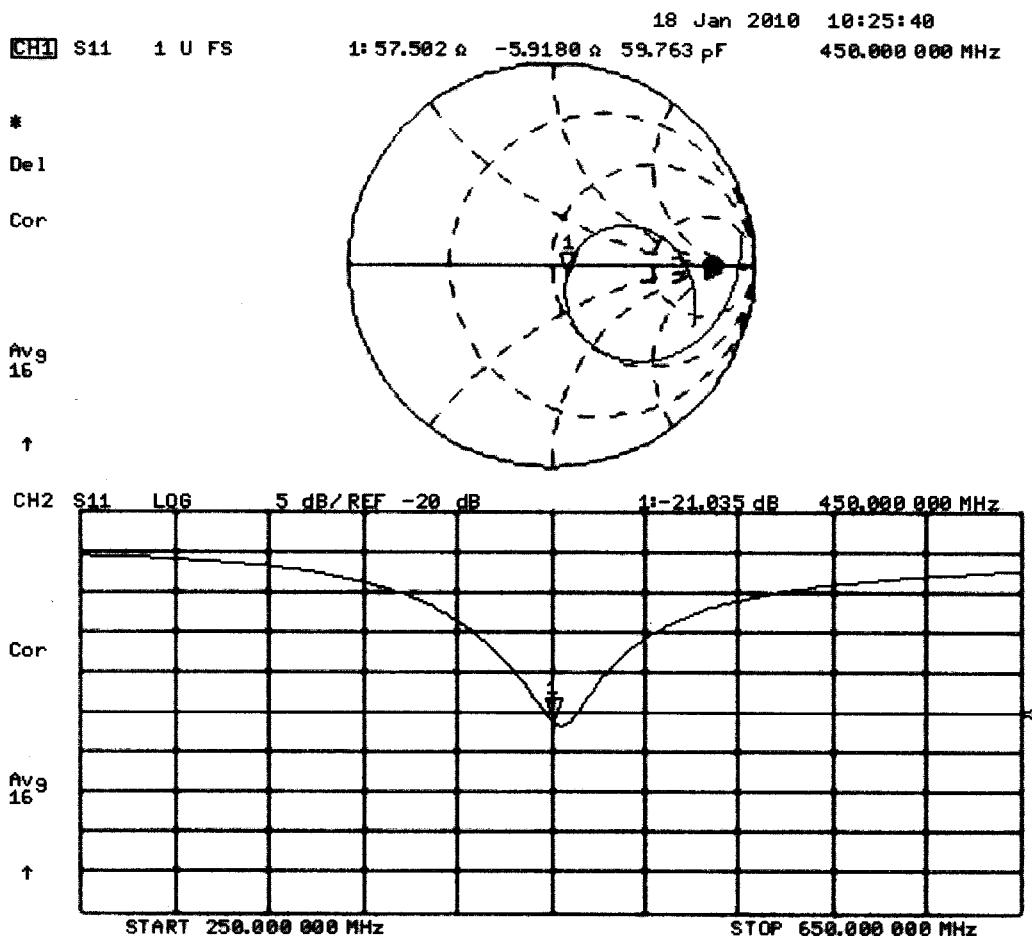

DASY5 Validation Report for Body TSL

Date/Time: 1/18/2010 1:24:11 PM

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450

Medium parameters used: $f = 450$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(7.11, 7.11, 7.11); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Body/d=15mm, Pin=398mW/Area Scan (61x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.9 mW/g


Body/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.4 V/m; Power Drift = -0.034 dB


Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.19 mW/g

Maximum value of SAR (measured) = 1.9 mW/g

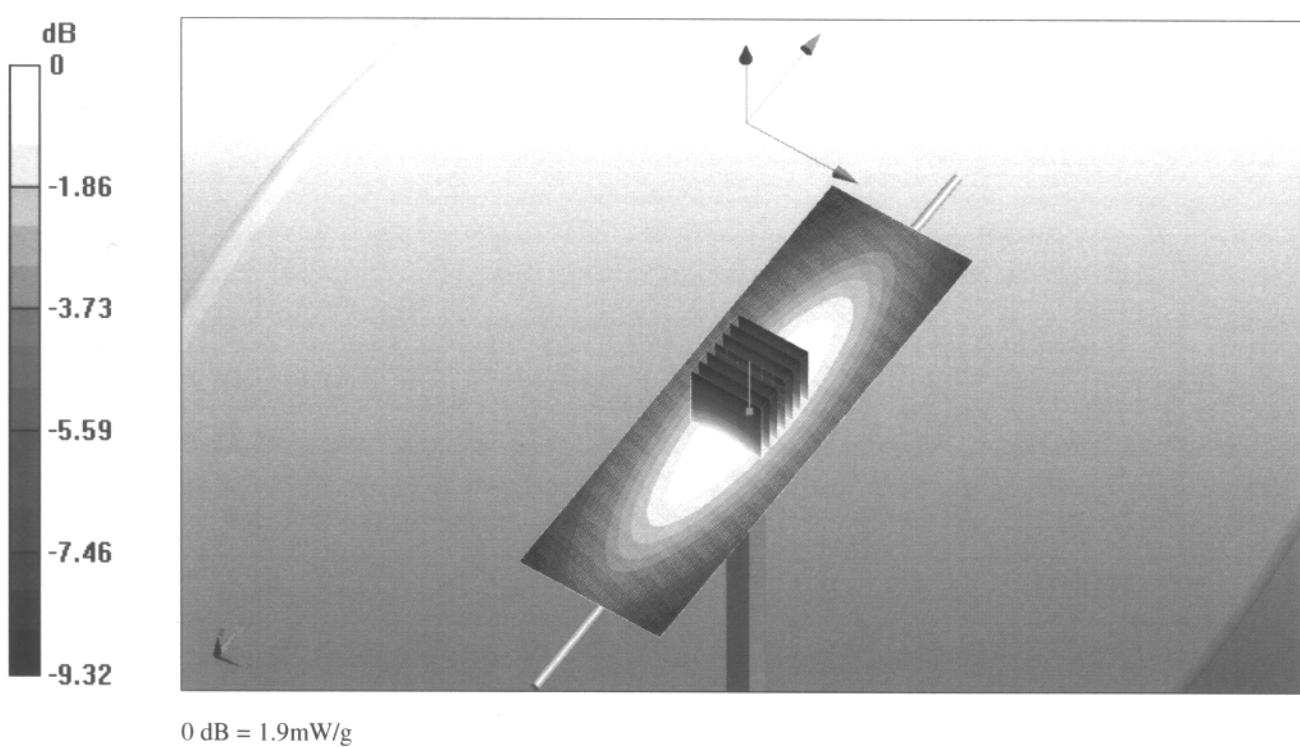

Impedance Measurement Plot for Body TSL

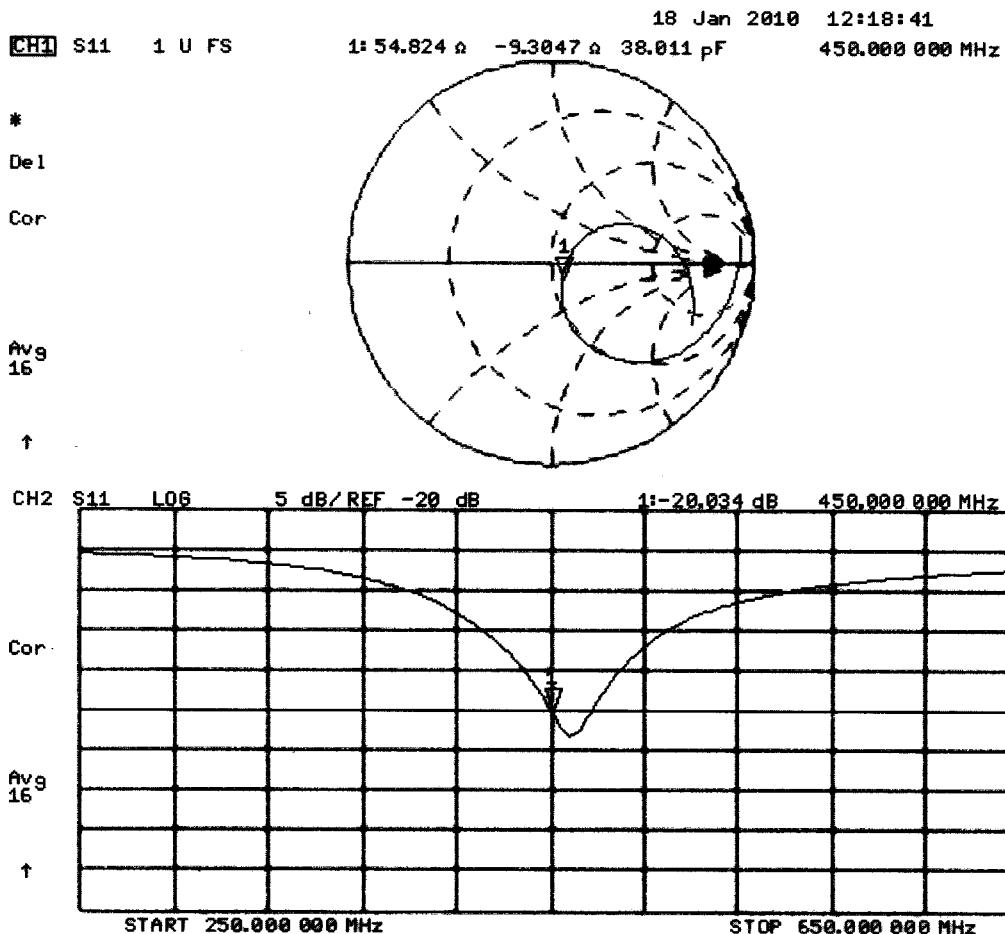

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX F - PROBE CALIBRATION

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610944720		IC:	511B-10944720		 Vertex Standard
DUT Type:	Portable UHF PTT Radio Transceiver		Models:	VX-451-G7-5	VX-454-G7-5	VX-459-G7-5		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 115 of 117	



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **Celltech**

Certificate No: **ET3-1590_Jul10**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-12.v8, QA CAL-23.v3 and QA CAL-25.v2
Calibration procedure for dosimetric E-field probes**

Calibration date: **July 15, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10
DAE4	SN: 660	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check: Oct10

Calibrated by	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: July 15, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- $NORM_{x,y,z}$: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). $NORM_{x,y,z}$ are only intermediate values, i.e., the uncertainties of $NORM_{x,y,z}$ does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORM_{x,y,z} * frequency_response$ (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCPx,y,z$: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- $A_{x,y,z}$; $B_{x,y,z}$; $C_{x,y,z}$; $VR_{x,y,z}$: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to $NORM_{x,y,z} * ConvF$ whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1590

Manufactured: March 19, 2001
Last calibrated: July 16, 2009
Recalibrated: July 15, 2010

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ET3DV6 SN:1590

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (μ V/(V/m) ²) ^A	1.86	2.06	1.77	\pm 10.1%
DCP (mV) ^B	91.4	92.4	83.5	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc ^E (k=2)
10000	CW	0.00	X Y Z	0.00 0.00 0.00	0.00 0.00 0.00	1.00 1.00 1.00	300.0 300.0 300.0	\pm 1.5%

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E-field uncertainty inside TSL (see Pages 5 and 6)

^B Numerical linearization parameter: uncertainty not required.

^C Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ET3DV6 SN:1590**Calibration Parameter Determined in Head Tissue Simulating Media**

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	43.5 ± 5%	0.87 ± 5%	7.25	7.25	7.25	0.20	2.19 ± 13.3%
835	± 50 / ± 100	41.5 ± 5%	0.90 ± 5%	6.27	6.27	6.27	0.32	2.49 ± 11.0%
900	± 50 / ± 100	41.5 ± 5%	0.97 ± 5%	6.12	6.12	6.12	0.27	2.86 ± 11.0%

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band

DASY/EASY - Parameters of Probe: ET3DV6 SN:1590


Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	$\pm 50 / \pm 100$	$56.7 \pm 5\%$	$0.94 \pm 5\%$	7.73	7.73	7.73	0.13	$2.06 \pm 13.3\%$
835	$\pm 50 / \pm 100$	$55.2 \pm 5\%$	$0.97 \pm 5\%$	6.33	6.33	6.33	0.22	$3.60 \pm 11.0\%$
900	$\pm 50 / \pm 100$	$55.0 \pm 5\%$	$1.05 \pm 5\%$	6.15	6.15	6.15	0.28	$2.94 \pm 11.0\%$

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

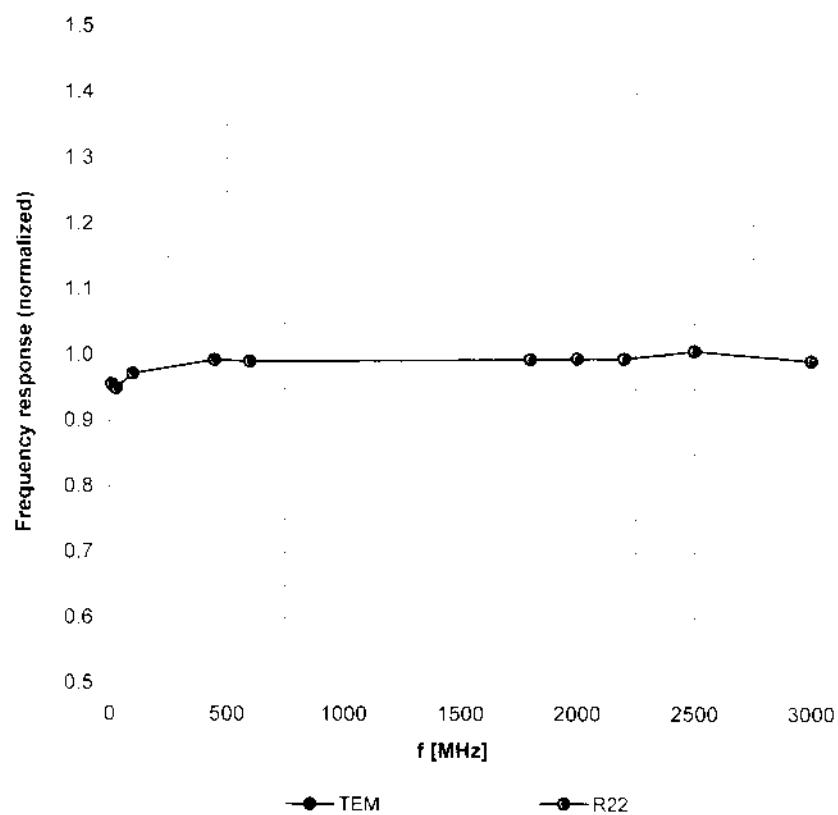



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

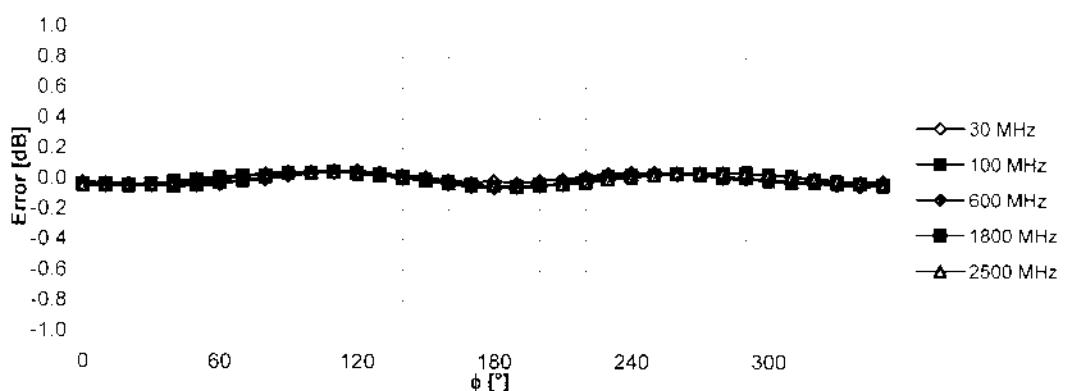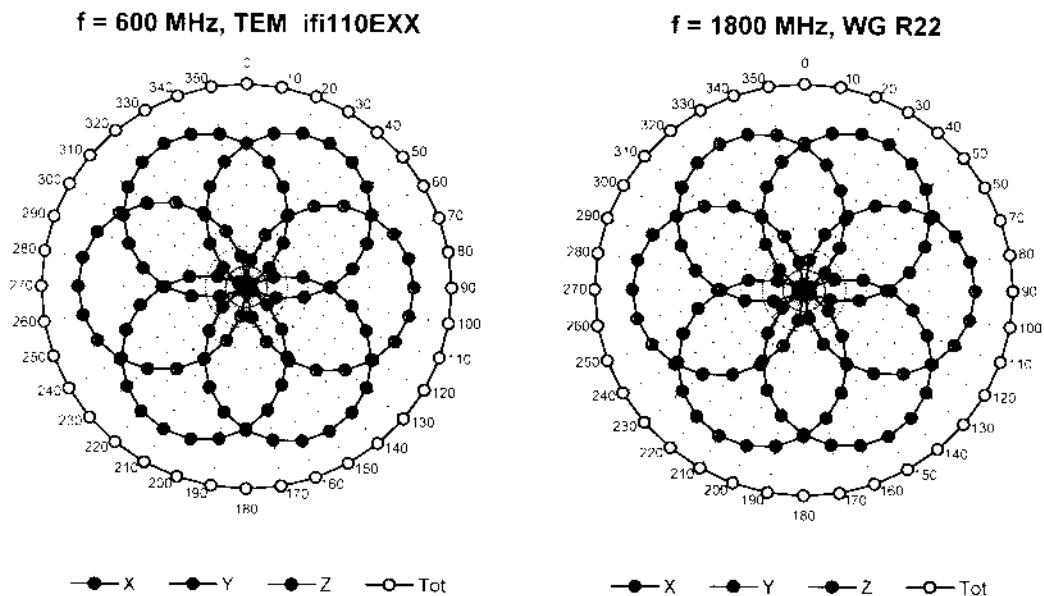


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$
(Waveguide R22, $f = 1800$ MHz)

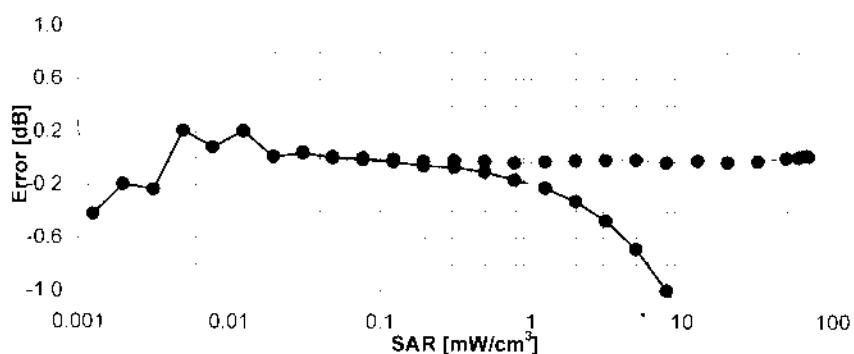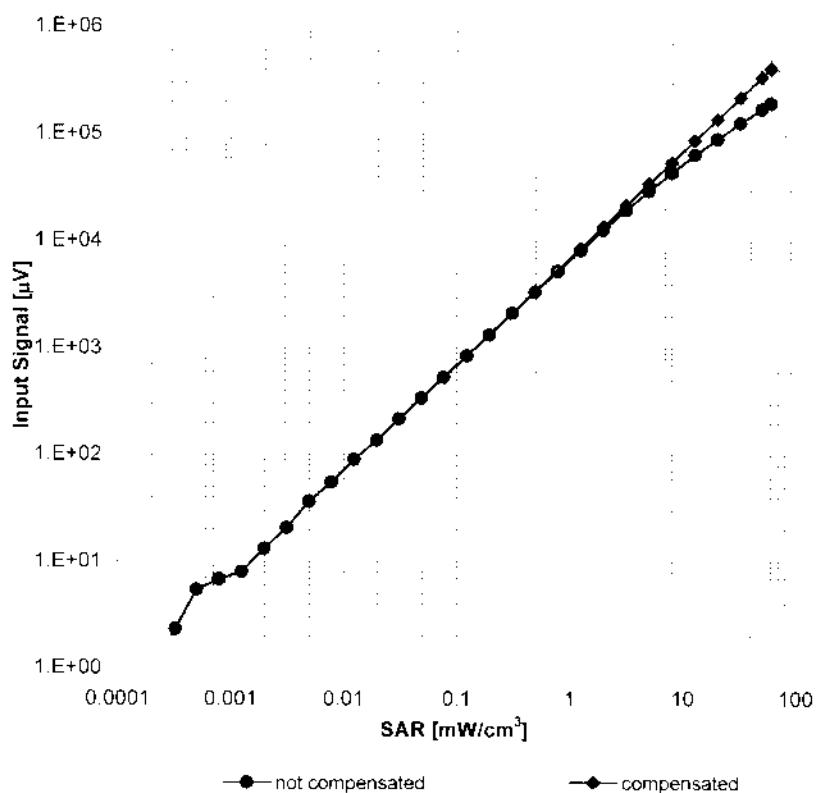


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

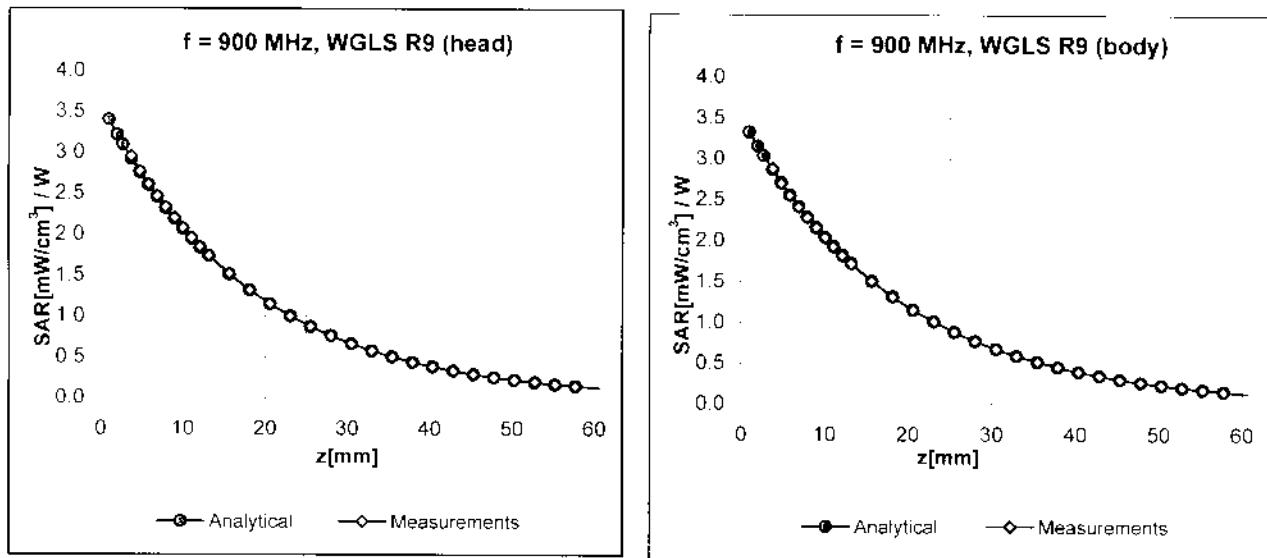

Deviation from Isotropy in HSL

Error (ϕ, θ), f = 900 MHz

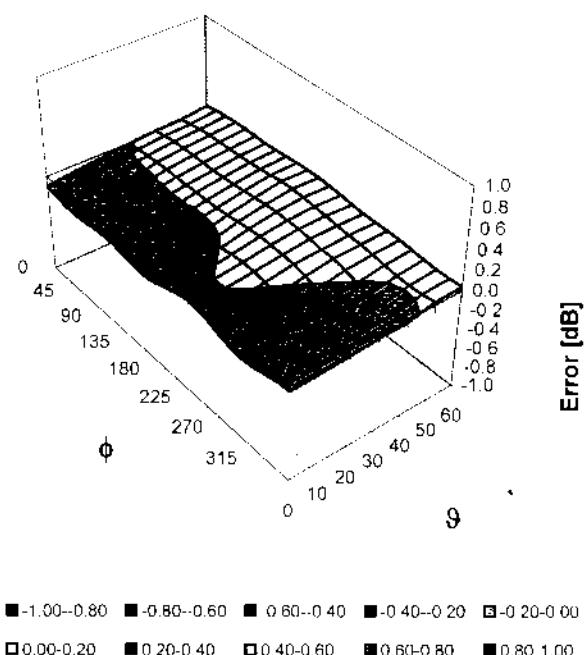

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX G - BARSKI PLANAR PHANTOM CERTIFICATE OF CONFORMITY

2378 Westlake Road
Kelowna, B.C. Canada
V1Z-2V2



Ph. # 250-769-6848
Fax # 250-769-6334
E-mail: barskiind@shaw.ca
Web: www.bcfiberglass.com

FIBERGLASS FABRICATORS

Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01

Date: June 16, 2003

Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity < 5 Loss Tangent < 0.05

Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: 

Daniel Chailler



Fiberglass Planar Phantom - Top View



Fiberglass Planar Phantom - Front View




Fiberglass Planar Phantom - Back View



Fiberglass Planar Phantom - Bottom View

Dimensions of Fiberglass Planar Phantom

(Manufactured by Barski Industries Ltd. - Unit# 03-01)

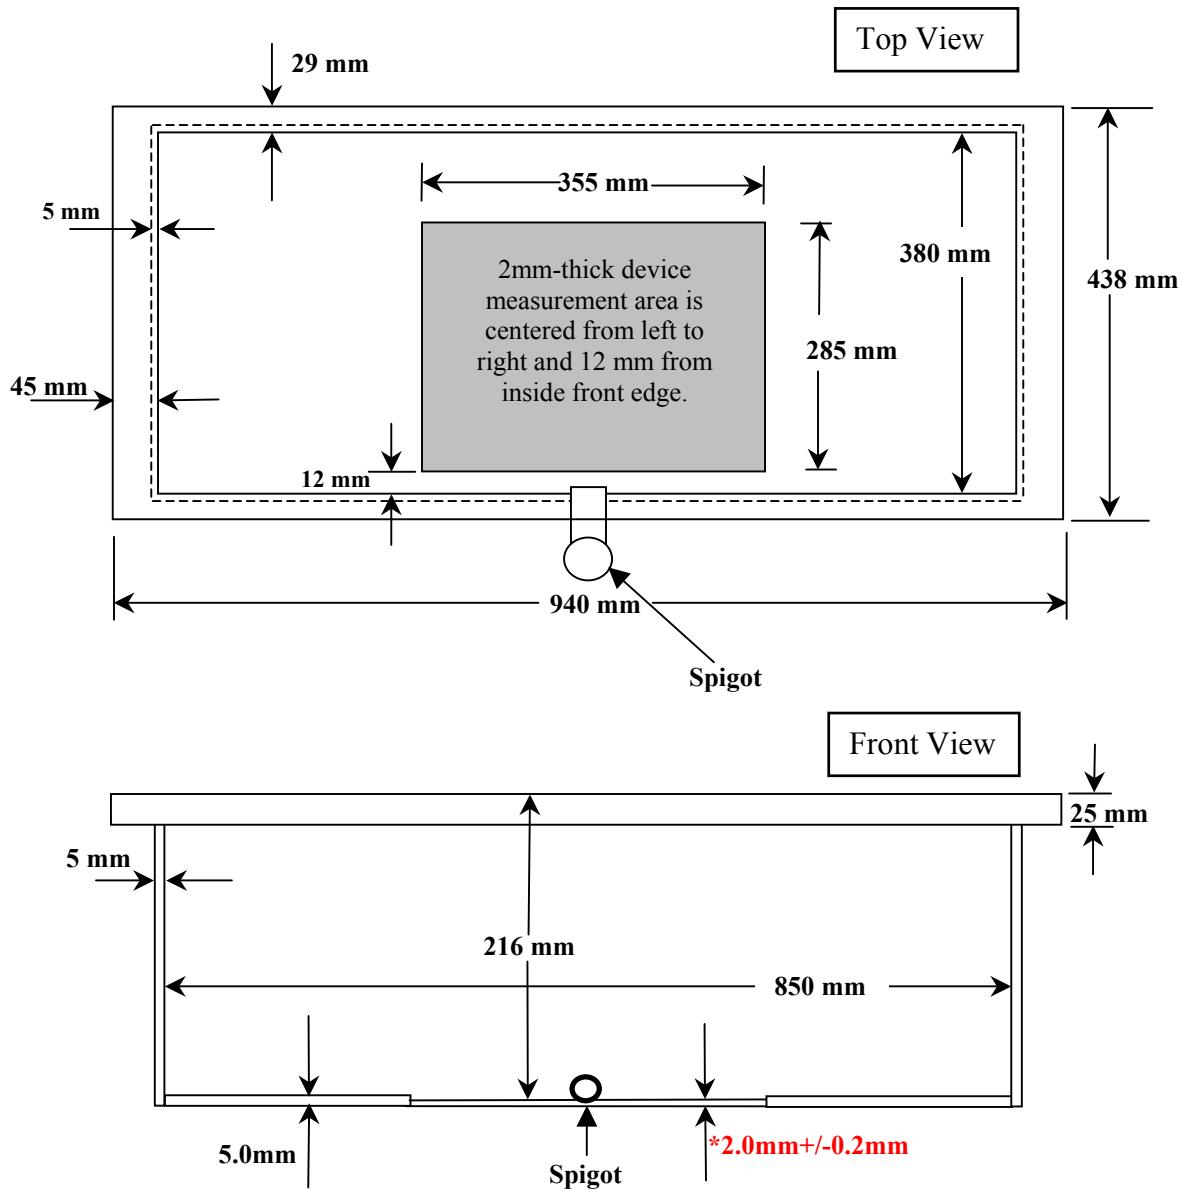

Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.
This drawing is not to scale.

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> 08/30-31, 09/09-10, 11/23, 2010	<u>Test Report Serial No.</u> 082310K66-T1041-S90U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> November 24, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX H - OCCUPATIONAL PTT TEST REDUCTION DRAFT CONSIDERATIONS

Occupational PTT Test Reduction *Draft* Considerations

Head SAR Test Considerations

Passive body-worn and audio accessories generally do not apply to the head SAR of PTT devices. Head SAR is measured with the front of the device at 2.5 cm parallel to a flat phantom. When the front of the device has a contour or non-uniform surface with > 1.0 cm variation, the average distance of such variations is used to establish the 2.5 cm test separation from the phantom.

- A) Start with a standard battery supplied with the device by default to measure the head SAR of each antenna on the highest output power channel, according to the test channels required by KDB 447498 (6)(c) and in the frequency range covered by the antenna within each device operating frequency band.¹
 - 1) When multiple standard batteries are supplied with a device, the battery with the highest capacity is considered the default battery for making head SAR measurements.
- B) When the head SAR of an antenna tested on the highest output power channel using the default battery is ≤ 4.0 W/kg, testing of the required immediately adjacent channel(s) is not necessary. When the head SAR of an antenna tested on the highest output power channel using the default battery is ≤ 3.5 W/kg, testing of all other required channels is not necessary. For the remaining channels that require testing, the exclusion of 4.0 W/kg for the required immediately adjacent channels and 3.5 W/kg for subsequent remaining channels may be applied recursively with respect to the highest output power channel among the remaining channels. When the head SAR of an antenna tested on the highest output power channel using the default battery is > 4.0 W/kg, head SAR should be measured for that antenna on the required immediately adjacent channels and on all required channels if the highest SAR channel or an adjacent channel is > 6.0 W/kg.
- C) For antennas of the same type and construction, with similar SAR distributions, operating within the same device operating frequency band, if the frequency range of an antenna (A) is fully within the frequency range of another antenna (B) and the highest SAR for antenna (A) is ≤ 4.0 W/kg or ≤ 6.0 W/kg and at least 25% lower than the highest SAR measured for antenna (B) within the device operating frequency band, further head SAR tests are not necessary for antenna (A).²
- D) When the highest SAR for all antennas tested using the default battery is ≤ 4.0 W/kg, according to the above test sequences, test additional batteries using the antenna and channel configuration that resulted in the highest SAR among all antennas tested with the default battery. Testing of additional batteries for other antennas is unnecessary.
 - 1) When the SAR tested with an additional battery using the antenna and channel configuration that resulted in the highest SAR from the default battery is > 6.0 W/kg, test that battery on the highest SAR channel of each antenna.
 - a) If the SAR measured on the highest SAR channel of an antenna using an additional battery is > 6.0 W/kg, test that additional battery and antenna combination on the required immediately adjacent channels and on all required channels if the highest SAR channel or an adjacent channel is > 7.0 W/kg.
- E) When the highest SAR of an antenna tested using the default battery is > 4.0 W/kg³ test additional batteries on the channel that resulted in the highest SAR for that antenna when tested with the standard default battery.
 - 1) If the SAR of an antenna tested with the default battery or an additional battery using the highest SAR channel is > 6.0 W/kg, test that battery and antenna combination on the required immediately adjacent channels and on all required channels if the highest SAR channel or an adjacent channel is > 7.0 W/kg.
 - 2) An antenna tested using the default battery with highest SAR ≤ 4.0 W/kg⁴ does not need to be tested using additional batteries.
- F) Report the measured head SAR in formats similar to the following:

¹ The test channel selection criteria in IEEE 1528-2003 may be considered when the number of channels required is greater than or equal to that required by KDB 447498 and the measured maximum output power for the closest channels between the channel selection schemes are within $\frac{1}{2}$ dB.

² The highest SAR is determined according to the SAR measured on the highest output power channel and all required adjacent and remaining channels. Also note that the procedures must be applied in sequence, from A) – F).

³ D) and E) are mutually exclusive. For item D), all SAR must be ≤ 4.0 W/kg. For Item E), the SAR for some antennas could be ≤ 4.0 W/kg when others are > 4.0 W/kg.

⁴ See footnote 3.

Example for Illustration Only					
Head SAR – in front of the face					
Antenna (MHz)	Measured	Ch. Freq. (MHz)	Battery		
			Default	I: Model #	II: Model #
A (470 – 490)	Power (W)	470.5			
		480.0			
		489.5			
	SAR (W/kg)	470.5			
		480.0			
		489.5			
B (420 – 450)	Power (W)	420.5			
		430.0			
		440.0			
		449.5			
	SAR (W/kg)	420.5			
		430.0			
		440.0			
		449.5			
C (450 – 465)	Power (W)	450.5			
		464.5			
	SAR (W/kg)	450.5			
		464.5			
D (465 – 470)	Power (W)	467.5			
	SAR (W/kg)	467.5			
Reported SAR values have already been scaled by the applicable duty factor Antenna, battery and accessory specifications are explained in the product descriptions section When test reduction applies, the slots for such configurations are left blank <i>(Need to confirm this table layout works)</i>					

Body SAR Test Considerations for Body-worn Accessories

Body SAR is measured with the device placed in a body-worn accessory, positioned against a flat phantom, representative of the normal operating conditions expected by users, without any audio accessory. Since audio accessories, including any default audio accessories supplied with the device, may be designed to operate with a subset of the combination of antennas, batteries and body-worn accessories, to simplify the test selection sequences for audio accessories, body-worn accessories are tested without audio accessory. All sides of the device that may be positioned using a body-worn accessory facing the user must be considered for SAR compliance.

- A) Start with a standard battery supplied with the device by default and a standard body-worn accessory, also supplied with the device by default, to measure the body SAR of each antenna on the highest output power channel, according to the test channels required by KDB 447498 (6)(c) and in the frequency range covered within each device operating frequency band.⁵
 - 1) When multiple default batteries and/or default body-worn accessories are supplied with a device, for testing purposes, the thinnest standard battery with the highest capacity and the standard body-worn accessory expected to result in the highest SAR based on its construction and exposure conditions are considered the default battery and default body-worn accessory for body SAR measurements.
- B) When the body SAR of an antenna tested on the highest output power channel using the default battery and default body-worn accessory is ≤ 4.0 W/kg, testing of the required immediately adjacent channel(s) is not necessary. When the body SAR of an antenna tested on the highest output power channel using the default battery and default body-worn accessory is ≤ 3.5 W/kg, testing of all other required channels is not necessary. For the remaining channels that require testing, the exclusion of 4.0 W/kg for the required immediately adjacent channels and 3.5 W/kg for subsequent remaining channels may be applied recursively with respect to the highest output power channel among the remaining channels. When the body SAR of an antenna tested on the highest output power channel using the default battery and default body-worn accessory is > 4.0 W/kg, body SAR should be measured for that antenna on the required immediately adjacent channels and on all required channels if the highest SAR channel or an adjacent channel is > 6.0 W/kg using the default battery and default body-worn accessory.
- C) For antennas of the same type and construction, with similar SAR distributions, operating within the same device operating frequency band, if the frequency range of an antenna (A) is fully within the frequency range of another antenna (B) and the highest SAR for antenna (A) is ≤ 4.0 W/kg or ≤ 6.0 W/kg and at least 25% lower than the highest SAR measured for antenna (B) within the device operating frequency band, further body SAR tests are not necessary for antenna (A).⁶
- D) When the highest SAR for all antennas tested using the default battery and default body-worn accessory is ≤ 4.0 W/kg, according to the above test sequences, test additional batteries using the antenna and channel configuration that resulted in the highest SAR among all antennas tested with the default battery and default body-worn accessory. Testing of additional batteries with the default body-worn accessory for other antennas is unnecessary.
 - 1) For batteries with similar construction, test only the battery that is expected to result in the highest SAR. This is generally determined by the smallest antenna separation distance provided by the body-worn accessory, between the device and the user, with the applicable side(s) of the device facing the user.
 - 2) When the SAR tested with an additional battery using the antenna, default body-worn accessory and channel configuration that resulted in the highest SAR is > 6.0 W/kg, test that battery with the default body-worn accessory on the highest SAR channel of each applicable antenna.
 - a) If the SAR measured on the highest SAR channel of an antenna tested using an additional battery and the default body-worn accessory is > 6.0 W/kg, test that additional battery, antenna and default body-worn accessory combination on the required immediately adjacent channels and on all required channels if the highest SAR channel or an adjacent channel is > 7.0 W/kg.
- E) When the highest SAR of an antenna tested using the default battery and default body-worn accessory is > 4.0 W/kg,⁷ test additional batteries on the channel that resulted in the highest SAR for that antenna when tested using the default battery and default body-worn accessory.
 - 1) For batteries with similar construction, test only the battery that is expected to result in the highest SAR. This is generally determined by the smallest antenna separation distance provided by the body-worn accessory, between the device and the user, with the applicable side(s) of the device facing the user.

⁵ See footnote 1.

⁶ See footnote 2.

⁷ See footnote 3.

2) If the SAR of an antenna tested with the default battery or an additional battery and the default body-worn accessory using the highest SAR channel is $> 6.0 \text{ W/kg}$, test that battery, antenna and default body-worn accessory on the required immediately adjacent channels and on all required channels if the highest SAR channel or an adjacent channel is $> 7.0 \text{ W/kg}$.

3) An antenna tested using the default battery and default body-worn accessory with highest SAR $\leq 4.0 \text{ W/kg}$ ⁸ does not need to be tested using additional batteries when such batteries provide a minimum separation distance, between the device and the user, greater than or equal to that established by the default battery.

F) Report the measured body SAR in formats similar to the following for the default body-worn accessory:

Example for Illustration Only					
Body-worn Accessory 1: <i>Model Number</i>			Default Audio Accessory I: <i>Model Number</i>		
Antenna (MHz)	Measured	Ch. Freq. (MHz)	Battery		
			Standard	I	II
A (470 – 490)	Power (W)	470.5			
		480.0			
		489.5			
	SAR (W/kg)	470.5			
		480.0			
		489.5			
B (420 – 450)	Power (W)	420.5			
		430.0			
		440.0			
		449.5			
	SAR (W/kg)	420.5			
		430.0			
		440.0			
		449.5			
C (450 – 465)	Power (W)	450.5			
		464.5			
	SAR (W/kg)	450.5			
		464.5			
D (465 – 470)	Power (W)	467.5			
	SAR (W/kg)	467.5			
<p>Reported SAR values have already been scaled by the applicable duty factor Antenna, battery and accessory specifications are explained in the product descriptions section When test reduction applies, the slots for such configurations are left blank <i>(Need to confirm this table layout works)</i></p>					

G) Repeat the above test sequence for the additional body-worn accessories by replacing the “default body-worn” accessory with each “additional body-worn accessory”.

1) For body-worn accessories with similar construction and operating configurations, test only the body-worn accessory within the group that is expected to result in the highest SAR. This is typically determined by the smallest antenna separation distance provided by the body-worn accessory, between the device and the user, with the applicable side(s) of the device facing the user. Similarities in construction and operating configurations for batteries and body-worn accessories must be clearly explained in the SAR report.

⁸ See footnote 3.

Body SAR Test Considerations for Audio Accessories with Integral Antenna

Audio accessories with an integral radiating element (antenna) must be tested separately from those without any primary radiating element. An audio accessory with a built-in antenna that enables the (main) antenna on the (PTT) device to be disconnected from its output while the audio accessory is in use should be tested using the highest capacity default battery. When transmission from the (main) antenna on the (PTT) device is disabled while the audio accessory is transmitting using its integral antenna, body-worn accessories for the device are not expected to influence the SAR of the audio accessory. In addition, different body-worn accessories or attachments are generally used for audio accessories with an integral antenna, which must be tested according to the way these are attached to the user during normal operation. Body SAR is measured with the audio accessory positioned against a flat phantom representative of the normal operating and exposure conditions expected by users. All sides of the device that may be positioned against the user must be considered for SAR compliance.

- A) The audio accessory is tested on the highest output power channel, according to the test channels required by KDB 447498 (6)(c) and in the frequency range covered by the antenna on the audio accessory within each device operating frequency band to measure body SAR.⁹
- B) When the body SAR of an audio accessory tested on the highest output power channel is ≤ 4.0 W/kg, testing of the required immediately adjacent channel(s) is not necessary. When the body SAR of an audio accessory tested on the highest output power channel using the default battery is ≤ 3.5 W/kg, testing of all other required channels is not necessary. For the remaining channels that require testing, the exclusion of 4.0 W/kg for the required immediately adjacent channels and 3.5 W/kg for subsequent remaining channels may be applied recursively with respect to the highest output power channel among the remaining channels. When the body SAR of an audio accessory tested on the highest output power channel is > 4.0 W/kg, body SAR should be measured on the required immediately adjacent channels and on all required channels if the highest SAR channel or an adjacent channel is > 7.0 W/kg.
- C) For audio accessories of the same type and construction, including the antenna, with similar SAR distributions, operating within the same device operating frequency band, if the (antenna) frequency range of an audio accessory (A) is fully within the (antenna) frequency range of another audio accessory (B) and the highest SAR for accessory (A) is ≤ 4.0 W/kg or ≤ 6.0 W/kg and at least 25% lower than the highest SAR measured for accessory (B) within the device operating frequency band, further body SAR tests are not necessary for audio accessory (A)
- D) Report the measured body SAR in formats similar to the following for the audio accessory:

Example for Illustration Only			
Body SAR – audio accessories with integral antenna			
Audio Accessory (MHz)	Measured	Ch. Freq. (MHz)	SAR (W/kg)
A: Model # (470 – 490)	Power (W)	470.5	
		480.0	
		489.5	
	SAR (W/kg)	470.5	
		480.0	
		489.5	
B: Model # (450 – 465)	Power (W)	450.5	
		464.5	
	SAR (W/kg)	450.5	
		464.5	

Reported SAR values have already been scaled by the applicable duty factor
Antenna, battery and accessory specifications are explained in the product descriptions section
When test reduction applies, the slots for such configurations are left blank
(*Need to confirm this table layout works*)

⁹ See footnote 1.

Body SAR Test Considerations for Audio Accessories without Built-in Antenna

For audio accessories that do not have any built-in radiating element, the antenna, battery and body-worn accessory combinations that are applicable to each audio accessory must be clearly identified in a format similar to the following, with the applicable combinations requiring testing highlighted to facilitate reviewing the results.

Example for Illustration Only												
Antenna (1 – 5)	Battery											
	a				b				c			
	Body-worn				Body-worn				Body-worn			
Audio Accessory	A	B	C	D	A	B	C	D	A	B	C	D
I	1, 2, 3, 4, 5	N/A	1, 3, 4, 5	N/A	3, 4, 5	1, 2, 3, 4, 5	2, 3	N/A	N/A	2, 4	1, 2, 3, 4, 5	1, 4
II	1, 2, 3, 4	1, 2, 3, 4, 5	N/A	1, 2, 3, 4, 5	N/A	N/A	1, 2, 3, 4, 5	2, 5	3, 5	1, 2, 3, 4, 5	N/A	N/A
III	2, 3, 4, 5	N/A	2, 3, 4, 5	2, 5	1, 3, 4, 5	1, 3, 5	N/A	1, 2, 3, 4, 5	1, 2, 3, 4, 5	N/A	2, 3, 4	1, 2, 3, 4, 5

In this example, audio accessories only work with the subset of antenna, battery and body-worn accessory combinations identified in the table, where N/A indicates the audio accessory (I, II or III) and/or the battery (a, b, or c) is not supported or applicable for the body-worn accessory. The antenna numbers listed for each body-worn accessory and battery combination identify the antennas supported or applicable for that body-worn accessory.

The possible combinations are highly dependent on the design and implementation of an individual device and the applicable antenna and accessory combinations. The above table must be adapted accordingly for the specific product and accessory combinations in use. The combinations require testing should be highlighted.

(Need to confirm this table layout works)

- A) For audio accessories with similar construction and operating requirements, test only the audio accessory within the group that is expected to result in the highest SAR, with respect to changes in RF characteristics and exposure conditions for the combination. If it is unclear which audio accessory within a group of similar accessories is expected to result in the highest SAR, good engineering judgment or preliminary testing should be applied to select the accessory that is expected to result in the highest SAR. Similarities in construction and operating configurations must be clearly explained in the SAR report.
- B) Based on the SAR measured in the body-worn test sequence, without audio accessory, if the SAR for the antenna, body-worn accessory and battery combination(s) applicable to an audio accessory are all ≤ 4.0 W/kg, SAR tests for that audio accessory is not necessary.
- C) Based on the SAR measured in the body-worn test sequence, without audio accessory, if the SAR for the antenna, body-worn accessory and battery combination(s) applicable to an audio accessory is/are > 4.0 W/kg, test that audio accessory using the highest body-worn SAR combination and channel configuration applicable to the audio accessory.
- D) If the SAR measured for an audio accessory combination is > 6.0 W/kg, test that audio accessory on the required immediately adjacent channels and on all required channels if the highest SAR channel or an adjacent channel is > 7.0 W/kg, using the highest body-worn SAR combination applicable to that audio accessory.
- E) If the SAR measured for an audio accessory is > 7.0 W/kg and it is one of the accessories within a group of similar audio accessories, test all other audio accessories within that group of similar audio accessories using the 7.0 W/kg audio accessory test combination.
 - 1) If the highest SAR for a similar audio accessory is > 7.0 W/kg, test that audio accessory on all required channels using that combination of antenna, battery and body-worn accessory.
- F) Report the measured body SAR for audio accessories in formats similar to the following

Example for Illustration Only						
Audio Accessory I: Model Number						
Antenna (MHz)	Measured	Ch. Freq. (MHz)	Battery (a – c) & Body-Worn (1 – 5) Combinations			
			c/1	c/2	c/3	b/4
A (470 – 490)	Power (W)	470.5				
		480.0				
		489.5				
	SAR (W/kg)	470.5				
		480.0				
		489.5				
B (420 – 450)	Power (W)	420.5				
		430.0				
		440.0				
		449.5				
	SAR (W/kg)	420.5				
		430.0				
		440.0				
		449.5				
C (450 – 465)	Power (W)	450.5				
		464.5				
	SAR (W/kg)	450.5				
		464.5				
D (465 – 470)	Power (W)	467.5				
	SAR (W/kg)	467.5				
Reported SAR values have already been scaled by the applicable duty factor Antenna, battery and accessory specifications are explained in the product descriptions section When test reduction applies, the slots for such configurations are left blank <i>(Need to confirm this table layout works)</i>						

General Reporting Procedures

All SAR values should be reported as measured, with the applicable duty factor taken into consideration. Adjustments made to account for tune-up tolerances should be considered separately, apart from the reported SAR summary results. SAR adjustments for tune-up tolerances are only needed for the highest reported SAR and SAR results that are within the tune-up tolerance range from the SAR limit, with respect to the power applied during testing for the individual channels, to determine compliance.