


# TEST REPORT

Report Reference No.....	CHTW24050029	Report Verification:	
Project No. ....	SHT2402046704W		
FCC ID.....	K6630703X30		
Applicant's name.....	YAESU MUSEN CO., LTD.		
Address .....	Omori Bellport D building 3F, 6-26-3 Minamioi, Shinagawa-ku, Tokyo 140-0013 Japan		
Test item description .....	Class-H DSC GPS Transceiver		
Trade Mark .....	-		
Model/Type reference .....	HX891BT		
Listed Model(s) .....	-		
Standard.....	IEC 62238:2003		
Date of receipt of test sample.....	Mar.27, 2024		
Date of testing.....	Mar.28, 2024 - May.07, 2024		
Date of issue.....	May.16, 2024		
Result .....	PASS		
Compiled by			
(Position+printedname+signature) ...:	File administrators Caspar Chen		
Supervised by			
(Position+printedname+signature) ...:	Project Engineer Caspar Chen		
Approved by			
(Position+printedname+signature) ...:	RF Manager Xu yang		
Testing Laboratory Name .....	Shenzhen Huatongwei International Inspection Co., Ltd		
Address .....	Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China		

## Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely correspond to the test sample.*

## Contents

<b>1. TEST STANDARDS AND REPORT VERSION</b>	<b>4</b>
1.1. Test Standards	4
1.2. Report version information	4
<b>2. TEST DESCRIPTION</b>	<b>5</b>
<b>3. SUMMARY</b>	<b>7</b>
3.1. Client Information	7
3.2. Product description	7
3.3. Radio Specification Description <sup>*1</sup>	7
3.4. Testing laboratory information	8
<b>4. TEST CONFIGURATION</b>	<b>9</b>
4.1. Test frequency list	9
4.2. EUT operation mode	9
4.3. Support unit used in test configuration and system	9
4.4. Environmental conditions	10
4.5. Statement of the measurement uncertainty	11
4.6. Equipments Used during the Test	12
<b>5. TEST CONDITIONS AND RESULTS</b>	<b>13</b>
5.1. Environmental Requirement	13
5.1.1. Vibration test	13
5.1.2. Dry heat	13
5.1.3. Damp heat	14
5.1.4. Low temperature	14
5.2. Transmitter Requirement	15
5.2.1. Frequency error	15
5.2.2. Carrier Power (Conducted)	16
5.2.3. Frequency Deviation	17
5.2.4. Sensitivity of the modulator, including microphone	19
5.2.5. Audio frequency response	20
5.2.6. Audio frequency harmonic distortion of the emission	21
5.2.7. Adjacent Channel Power	22
5.2.8. Conducted spurious emissions conveyed to the antenna	23
5.2.9. Transient frequency behaviour of the transmitter	24
5.2.10. Residual modulation of the transmitter	25
5.2.11. Frequency error (demodulated DSC signal)	26
5.2.12. Modulation index for DSC	27
5.2.13. Modulation rate for DSC	28
5.2.14. Testing of generated call sequences	29
5.3. Receiver for Radiotelephone Requirement	30
5.3.1. Harmonic distortion and rated audio frequency output power	30
5.3.2. Audio frequency response	31
5.3.3. Maximum Usable Sensitivity	32
5.3.4. Co-channel rejection	33
5.3.5. Adjacent channel selectivity	34
5.3.6. Spurious Response Rejection	35
5.3.7. Intermodulation response	36
5.3.8. Blocking or Desensitization	37
5.3.9. Conducted spurious emissions	38

5.3.10.	Receiver noise and hum level	39
5.3.11.	Squelch operation	40
5.3.12.	Squelch hysteresis	41
5.3.13.	Multiple watch characteristic	42
<b>5.4.</b>	<b>Receiver for DSC decoder Requirement</b>	<b>43</b>
5.4.1.	Maximum usable sensitivity	43
5.4.2.	Co-channel rejection	44
5.4.3.	Adjacent channel selectivity	45
5.4.4.	Spurious response and blocking immunity	46
5.4.5.	Intermodulation response	47
5.4.6.	Dynamic range	48
5.4.7.	Spurious emissions	49
5.4.8.	Verification of correct decoding of various types of DSC calls	50
5.4.9.	Reaction to VTS and AIS channel management DSC transmissions	51
5.4.10.	Simultaneous reception	52
<b>6.</b>	<b><u>TEST SETUP PHOTOS</u></b>	<b>53</b>
<b>7.</b>	<b><u>EXTERNAL AND INTERNAL PHOTOS</u></b>	<b>54</b>
<b>8.</b>	<b><u>APPENDIX REPORT</u></b>	<b>54</b>

## **1. TEST STANDARDS AND REPORT VERSION**

### **1.1. Test Standards**

The tests were performed according to following standards:

[IEC 62238:2003](#)-Maritime navigation and radiocommunication equipment and systems –VHF radiotelephone equipment incorporating Class "D" Digital Selective Calling (DSC) – Methods of testing and required test results

### **1.2. Report version information**

Revision No.	Date of issue	Description
N/A	2024-05-16	Original

## 2. TEST DESCRIPTION

Test item	Standards requirement (IEC62238)	Result	Test Engineer
<b>Environmental Requirement</b>			
Vibration test	Sub-clause 7.4	Pass	Xiangyu Wei
Temperature tests	Dry heat	Sub-clause 7.5	Pass
	Damp heat	Sub-clause 7.5	Pass
	Low temperature	Sub-clause 7.5	Pass
<b>Transmitter Requirement</b>			
Frequency error	Sub-clause 8.1	Pass	Xiangyu Wei
Carrier power	Sub-clause 8.2	Pass	Xiangyu Wei
Frequency deviation	Sub-clause 8.3	Pass	Xiangyu Wei
Sensitivity of the modulator, including microphone	Sub-clause 8.4	Pass	Xiangyu Wei
Audio frequency response	Sub-clause 8.5	Pass	Xiangyu Wei
Audio frequency harmonic distortion of the emission	Sub-clause 8.6	Pass	Xiangyu Wei
Adjacent channel power	Sub-clause 8.7	Pass	Xiangyu Wei
Conducted spurious emissions conveyed to the antenna	Sub-clause 8.8	Pass	Xiangyu Wei
Transient frequency behaviour of the transmitter	Sub-clause 8.9	Pass	Xiangyu Wei
Residual modulation of the transmitter	Sub-clause 8.10	Pass	Xiangyu Wei
Frequency error (DSC signal)	Sub-clause 8.11	Pass	Xiangyu Wei
Modulation index for DSC	Sub-clause 8.12	Pass	Xiangyu Wei
Modulation rate for DSC	Sub-clause 8.13	Pass	Xiangyu Wei
Testing of generated call sequences	Sub-clause 8.14	Pass	Xiangyu Wei
<b>Receiver for Radiotelephone Requirement</b>			
Harmonic distortion and rated audio frequency output power	Sub-clause 9.1	Pass	Xiangyu Wei
Audio frequency response	Sub-clause 9.2	Pass	Xiangyu Wei
Maximum usable sensitivity	Sub-clause 9.3	Pass	Xiangyu Wei
Co-channel rejection	Sub-clause 9.4	Pass	Xiangyu Wei
Adjacent channel selectivity	Sub-clause 9.5	Pass	Xiangyu Wei
Spurious response rejection	Sub-clause 9.6	Pass	Xiangyu Wei
Intermodulation response	Sub-clause 9.7	Pass	Xiangyu Wei
Blocking or desensitization	Sub-clause 9.8	Pass	Xiangyu Wei
Spurious emissions	Sub-clause 9.9	Pass	Xiangyu Wei
Receiver residual noise level	Sub-clause 9.10	Pass	Xiangyu Wei
Squelch operation	Sub-clause 9.11	Pass	Xiangyu Wei
Squelch hysteresis	Sub-clause 9.12	Pass	Xiangyu Wei

Multiple watch characteristic	Sub-clause 9.13	Pass	Xiangyu Wei
<b>Receiver for DSC decoder Requirement</b>			
Maximum usable sensitivity	Sub-clause 10.1	Pass	Xiangyu Wei
Co-channel rejection	Sub-clause 10.2	Pass	Xiangyu Wei
Adjacent channel selectivity	Sub-clause 10.3	Pass	Xiangyu Wei
Spurious response and blocking immunity	Sub-clause 10.4	Pass	Xiangyu Wei
Intermodulation response	Sub-clause 10.5	Pass	Xiangyu Wei
Dynamic range	Sub-clause 10.6	Pass	Xiangyu Wei
Spurious emissions	Sub-clause 10.7	Pass	Xiangyu Wei
Verification of correct decoding of various types of DSC calls	Sub-clause 10.8	Pass	Xiangyu Wei
Reaction to VTS and AIS channel management DSC transmissions	Sub-clause 10.9	Pass	Xiangyu Wei
Simultaneous reception	Sub-clause 10.10	Pass	Xiangyu Wei

### 3. SUMMARY

#### 3.1. Client Information

Applicant:	YAESU MUSEN CO., LTD.
Address:	Omori Bellport D building 3F, 6-26-3 Minamioi, Shinagawa-ku, Tokyo 140-0013 Japan
Manufacturer:	YAESU MUSEN CO., LTD.
Address:	Omori Bellport D building 3F, 6-26-3 Minamioi, Shinagawa-ku, Tokyo 140-0013 Japan

#### 3.2. Product description

Main unit information:	
Name of EUT:	Class-H DSC GPS Transceiver
Trade mark:	-
Mode No.:	HX891BT
Listed Model(s):	-
Power supply:	DC 7.4V from battery
Hardware Version:	207980B
Software Version:	V1.00

#### 3.3. Radio Specification Description <sup>\*1</sup>

Operation Frequency Range:	TX:156.050MHz to 157.425MHz RX:156.050MHz to 162.000MHz	
Rated Output Power:	<input checked="" type="checkbox"/> High Power: 6W <input checked="" type="checkbox"/> Low Power: 1W	
Modulation Type:	Analog:	FM
	Digital Data(DSC):	AFSK
Channel Separation:	Analog:	<input checked="" type="checkbox"/> 25kHz
	Digital Data(DSC):	<input checked="" type="checkbox"/> 25kHz
Emission Designator: <sup>*2</sup>	Analog:	16K0G3E
	Digital Data(DSC):	16K0G2B
Antenna Type:	1/4λ Helical whip	

##### Note:

(1) <sup>\*1</sup> This information is provided by this applicant.

(2) <sup>\*2</sup> According to FCC Part 2.202 requirements, the Necessary Bandwidth is calculated as follows:

- For FM Voice Modulation

Channel Spacing = 25 KHz, D = 5KHz max, K = 1, M = 3KHz

Bn = 2M + 2DK = 2\*3 + 2\*5\*1 = **16 KHz**

Emission designation: 16K0G3E

- Digital Data(DSC)

Channel Spacing = 25 KHz, D = 5KHz max, K = 1, M = 3KHz

Bn = 2M + 2DK = 2\*3 + 2\*5\*1 = **16 KHz**

Emission designation: 16K0G2B

### 3.4. Testing laboratory information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China	
Connect information:	Tel: 86-755-26715499 E-mail: <a href="mailto:cs@szhtw.com.cn">cs@szhtw.com.cn</a> <a href="http://www.szhtw.com.cn">http://www.szhtw.com.cn</a>	
Qualifications	Type	Accreditation Number
	FCC Registration Number	762235
	FCC Designation Number	CN1181

## 4. TEST CONFIGURATION

### 4.1. Test frequency list

Mode	Modulation	Operation Frequency Range	Test Frequency (MHz)	
Analog	FM	Tx: 156.050MHz to 157.425MHz Rx: 156.050MHz to 162.000MHz	CH <sub>L</sub>	Tx: 156.050(CH1001) Rx: 156.050(CH1001)
			CH <sub>M</sub>	Tx: 156.800(CH16) Rx: 156.800(CH16)
			CH <sub>H</sub>	Tx: 157.425(CH88) Rx: 162.000(CH28)
			CH <sub>M1</sub>	Tx: 156.525(CH70) Rx: 156.525(CH70)

### 4.2. EUT operation mode

Test mode	Transmitting	Receiving	Power level	
			High	Low
TX-AWH	✓		✓	
TX-AWL	✓			✓
TX-DSC	✓		✓	
RX-AW		✓		
RX-DSC		✓		

✓ : is operation mode.

### 4.3. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?				
<input checked="" type="checkbox"/> No				
Item	Equipment	Trade Name	Model No.	Other specification
1				
2				

#### 4.4. Environmental conditions

Normal Condition	Temperature	15 °C to 35 °C	
	Relative humidity	20 % to 75 %.	
	Voltage	<input type="checkbox"/> Mains voltage	Nominal mains voltage
		<input type="checkbox"/> Lead-acid battery	1.1 * the nominal voltage of the battery
		<input checked="" type="checkbox"/> Other	the normal test voltage shall be that declared by the equipment provider
Extreme Condition	Temperature	<input type="checkbox"/> -15 °C and +55 °C for equipment intended for mounting below deck	
		<input checked="" type="checkbox"/> -20 °C and +55 °C for equipment intended for mounting above deck.	
		<input type="checkbox"/> -10 °C to +55 °C for Base stations for indoor/controlled climate conditions	
	Voltage	<input type="checkbox"/> Mains voltage	± 10 %* the nominal mains voltage
		<input checked="" type="checkbox"/> Secondary battery power sources	1,3 and 0,9 multiplied by the nominal voltage of the battery
		<input type="checkbox"/> Other	For equipment using other power sources, the extreme test voltages shall be as stated by the manufacturer.

Normal Condition	$V_N$ =nominal Voltage	DC 7.40V
	$T_N$ =normal Temperature	25 °C
Extreme Condition	$V_L$ =lower Voltage	DC 6.66V
	$T_L$ =lower Temperature	-20 °C
	$V_H$ =higher Voltage	DC 9.62V
	$T_H$ =higher Temperature	55 °C

#### 4.5. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	RF frequency	0.06ppm
2	RF power, conducted	0.66dB
3	Adjacent channel power	1.57dB
4	Conducted spurious emission	1.68dB
5	Maximum Useable Sensitivity	1.03dB
6	Co-channel Rejection	1.88dB
7	Adjacent Channel Selectivity	1.79dB
8	Spurious Response Rejection	2.41dB
9	Blocking or Desensitization	2.28dB
10	Intermodulation Response Rejection	2.87dB
11	Temperature	1°C
12	Humidity	5%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

#### 4.6. Equipments Used during the Test

● RF Conducted test item							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Spectrum Analyzer	Agilent	HTWE0286	N9020A	MY50510187	2023/08/22	2024/08/21
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2023/08/22	2024/08/21
●	RF Communication Test Set	HP	HTWE0038	8920A	3813A10206	2023/08/22	2024/08/21
●	Digital intercom communication tester	Aeroflex	HTWE0255	3920B	1001682041	2023/08/22	2024/08/21
●	RF Control Unit	Tonscend	HTWE0294	JS0806-2	N/A	2023/08/22	2024/08/21
●	Filter-VHF	Microwave	HTWE0309	N26460M1	498702	2023/08/22	2024/08/21
●	Filter-UHF	Microwave	HTWE0311	N25155M2	498704	2023/08/22	2024/08/21
●	Attenuator	JFW	HTWE0292	50FH-030-100	N/A	2023/05/15	2024/05/14
●	Attenuator	Eastsheep	HTWE0387	NCP-20-3-100W	/	2023/05/15	2024/05/14
●	Attenuator	Eastsheep	HTWE0388	NCP-10-3-100W	/	2023/05/15	2024/05/14
●	High Pass Filter	RFSYS	HTWE0390-05	RFSYS-GTA10	200615-1-04	2023/05/15	2024/05/14
●	Filter-UHF	Microwave	HTWE0310	N26460M1	498703 DC1808	2023/05/15	2024/05/14
●	Filter-VHF	Microwave	HTWE0312	N25155M2	498704 DC1808	2023/05/15	2024/05/14
●	Test software	HTW	N/A	Radio ATE	N/A	N/A	N/A

● Auxiliary Equipment							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Climate chamber	ESPEC	HTWS0715	GPL-2	N/A	2023/08/21	2024/08/20
●	DC Power Supply	Gwinstek	HTWE0274	SPS-2415	GER835793	N/A	N/A

## 5. TEST CONDITIONS AND RESULTS

### 5.1. Environmental Requirement

#### 5.1.1. Vibration test

##### TEST RESULT

Passed  Not Applicable

##### TEST DATA

Refer to the below test data

Temp (°C)	Voltage (V)	Vibration Frequency (Hz)	Test item	Test mode	Test Channel	Measured data	Limit	Result
T <sub>N</sub>	V <sub>N</sub>	2.5~100	Frequency Error	TX-AWH	CH <sub>M</sub>	0.028	±1.5kHz	Pass
			Carrier power	TX-AWH	CH <sub>M</sub>	37.29	36.28~39.28dBm	Pass
			Maximum usable sensitivity	RX-AW	CH <sub>L</sub>	30.79	≥20dB	Pass
					CH <sub>M</sub>	30.67		
					CH <sub>H</sub>	30.72		
			DSC receiver	RX-DSC	CH <sub>M1</sub>	0.005	≤10 <sup>-2</sup>	Pass

#### 5.1.2. Dry heat

##### TEST RESULT

Passed  Not Applicable

##### TEST DATA

Refer to the below test data

Temp (°C)	Voltage (V)	Test item	Test mode	Test Channel	Measured data	Limit	Result
55	V <sub>N</sub>	Frequency Error	TX-AWH	CH <sub>M</sub>	0.031	±1.5kHz	Pass
		Carrier power	TX-AWH	CH <sub>M</sub>	37.31	36.28~39.28dBm	Pass
		Maximum usable sensitivity	RX-AW	CH <sub>L</sub>	30.75	≥20dB	Pass
				CH <sub>M</sub>	30.73		
				CH <sub>H</sub>	30.68		
		DSC receiver	RX-DSC	CH <sub>M1</sub>	0.003	≤10 <sup>-2</sup>	Pass

### 5.1.3. Damp heat

#### TEST RESULT

Passed  Not Applicable

#### TEST DATA

Refer to the below test data

Temp (°C)	Voltage (V)	Humidity (%)	Test item	Test mode	Test Channel	Measured data	Limit	Result
40	V <sub>N</sub>	93	Frequency Error	TX-AWH	CH <sub>M</sub>	0.033	±1.5kHz	Pass
			Carrier power	TX-AWH	CH <sub>M</sub>	37.28	36.28~39.28dBm	Pass
			Maximum usable sensitivity	RX-AW	CH <sub>L</sub>	30.76	≥20dB	Pass
					CH <sub>M</sub>	30.63		
					CH <sub>H</sub>	30.59		
			DSC receiver	RX-DSC	CH <sub>M1</sub>	0.006	≤10 <sup>-2</sup>	Pass

### 5.1.4. Low temperature

#### TEST RESULT

Passed  Not Applicable

#### TEST DATA

Refer to the below test data

Temp (°C)	Voltage (V)	Test item	Test mode	Test Channel	Measured data	Limit	Result
-15	V <sub>N</sub>	Frequency Error	TX-AWH	CH <sub>M</sub>	0.035	±1.5kHz	Pass
		Carrier power	TX-AWH	CH <sub>M</sub>	37.26	36.28~39.28dBm	Pass
		Maximum usable sensitivity	RX-AW	CH <sub>L</sub>	30.77	≥20dB	Pass
				CH <sub>M</sub>	30.64		
				CH <sub>H</sub>	30.67		
		DSC receiver	RX-DSC	CH <sub>M1</sub>	0.004	≤10 <sup>-2</sup>	Pass

## 5.2. Transmitter Requirement

### 5.2.1. Frequency error


The frequency error is the difference between the measured carrier frequency and its nominal value.

#### LIMIT

IEC 62238 Sub-clause 8.1.3

The frequency error shall be within  $\pm 1,5$  kHz.

#### TEST CONFIGURATION

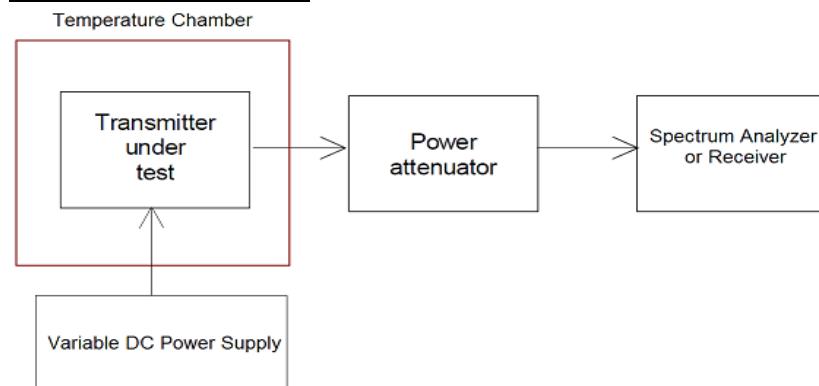

#### TEST PROCEDURE

1. The test conditions.

normal condition  Extreme conditions

2. Refer to IEC 62238 Sub-clause 8.1.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed  Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.2.2. Carrier Power (Conducted)

The carrier power is the mean power delivered to the artificial antenna during one radio frequency cycle in the absence of modulation. The rated output power is the carrier power declared by the manufacturer.

#### LIMIT

IEC 62238 Sub-clause 8.2.3

Normal test conditions:

The rated output power of the equipment shall be between 6 W and 25 W.

With the output power switch set at maximum, the carrier power shall be within  $\pm 1,5$  dB of the rated output power under normal test conditions. The output power shall never however exceed 25 W.

With the output power switch set at minimum the carrier power shall remain between 0,1 W and 1 W.

The maximum continuous transmission time shall be between 5 min and 6 min.


Extreme test conditions:

With the output power switch set at maximum, the carrier power shall remain between 6 W and 25 W and be within +2 dB, -3 dB of the rated output power under extreme conditions. The output power shall never however exceed 25 W.

With the output power switch set at minimum the carrier power shall remain between 0,1 W and 1 W.

The maximum continuous transmission time shall be between 5 min and 6 min.

#### TEST CONFIGURATION

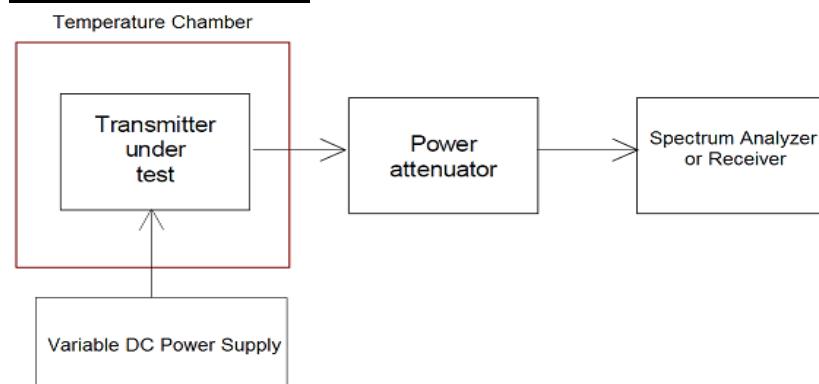

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 8.2.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.2.3. Frequency Deviation

For the purpose of the present document, the frequency deviation is the difference between the instantaneous frequency of the modulated radio frequency signal and the carrier frequency.

#### LIMIT

IEC 62238 Sub-clause 8.3.3

The maximum permissible frequency deviation shall be:

25 kHz channels:  $\pm 5$  kHz.


12,5 kHz channels:  $\pm 2,5$  kHz.

between 3,0 kHz/2,55 kHz and 6,0 kHz: shall not exceed the frequency deviation at a modulation frequency of 3,0 kHz/2,55 kHz.

At 6,0 kHz the deviation shall be not more than 30,0 % of the maximum permissible frequency deviation.

between 6,0 kHz and a frequency equal to the channel separation for which the equipment is intended shall not exceed that given by a linear representation of the frequency deviation (dB) relative to the modulation frequency, starting at the 6,0 kHz limit and having a slope of -14,0 dB per octave.

These limits are illustrated in figure 1.

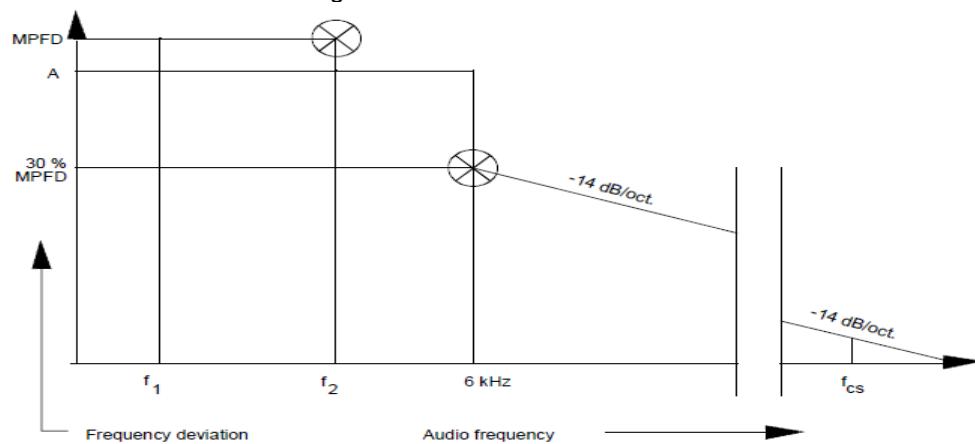

NOTE:  
 Abbreviations:  
 $f_1$  lowest appropriate frequency  
 $f_2$  3,0 kHz (for 25 kHz channel separation), or  
 2,55 kHz (for 12,5 kHz channel separation)  
 $MPFD$  Maximum Permissible Frequency Deviation, clause 8.3.2.1  
 $A$  measured frequency deviation at  $f_2$   
 $f_{cs}$  frequency equal to channel separation


Figure 1: Frequency deviation

#### TEST PROCEDURE

1. The test conditions.
 

normal condition  Extreme conditions
2. Refer to IEC 62238 Sub-clause 8.3.2 for the measurement method.

#### TEST CONFIGURATION

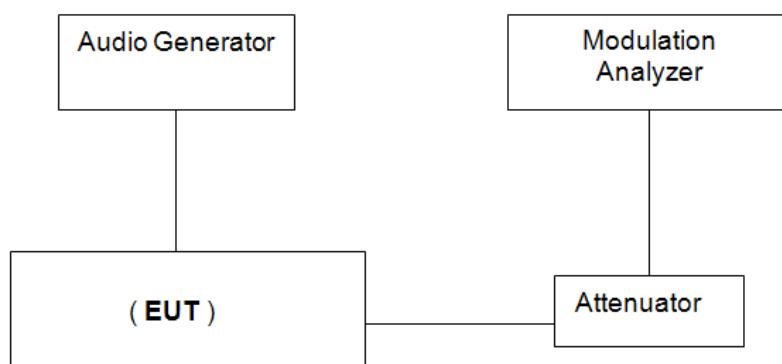

**TEST MODE**

Refer to the section 4.2

**TEST RESULT**

Passed       Not Applicable

**TEST DATA**

Refer to the appendix report on the section 8

### 5.2.4. Sensitivity of the modulator, including microphone

This characteristic expresses the capability of the transmitter to produce sufficient modulation when an audio frequency signal corresponding to the normal mean speech level is applied to the microphone.

#### LIMIT


IEC 62238 Sub-clause 8.4.3

The resulting frequency deviation shall be between  $\pm 1,5$  kHz and  $\pm 3$  kHz.

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 8.4.2 for the measurement method.

#### TEST CONFIGURATION

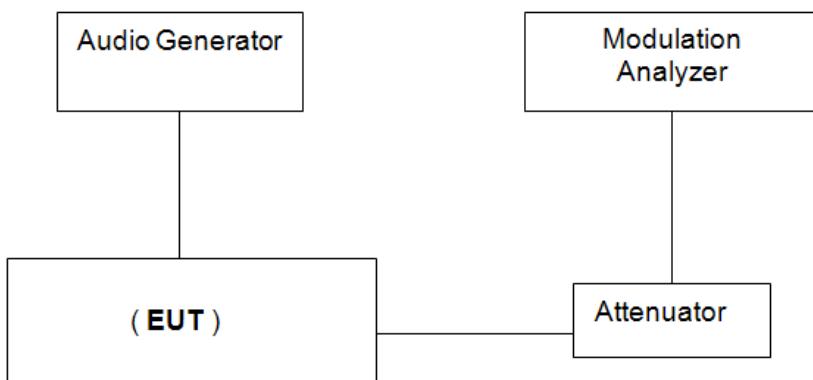

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.2.5. Audio frequency response

The audio frequency response is the frequency deviation of the transmitter as a function of the modulating frequency.

#### LIMIT

IEC 62238 Sub-clause 8.5.3

The audio frequency response shall be within +1 dB and -3 dB of a 6 dB/octave line passing through the reference point (see figure 2). The upper limit frequency shall be 2,55 kHz for 12,5 kHz channels.


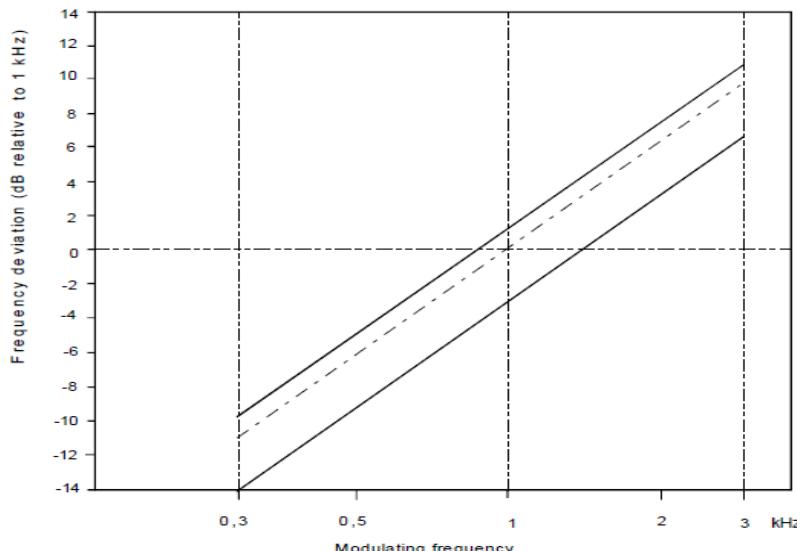


Figure 2: Audio frequency response

#### TEST CONFIGURATION

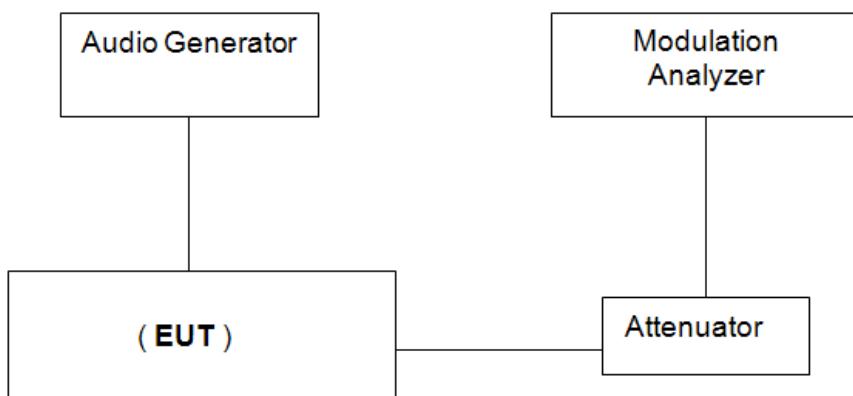

#### TEST PROCEDURE

1. The test conditions.
 

normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 8.5.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.2.6. Audio frequency harmonic distortion of the emission


The harmonic distortion of the emission modulated by an audio frequency signal is defined as the ratio, expressed as a percentage, of the root mean square (rms) voltage of all the harmonic components of the fundamental modulation frequency to the total rms voltage of the modulation signal after linear demodulation

#### LIMIT

IEC 62238 Sub-clause 8.6.3

The harmonic distortion shall not exceed 10 %.

#### TEST CONFIGURATION

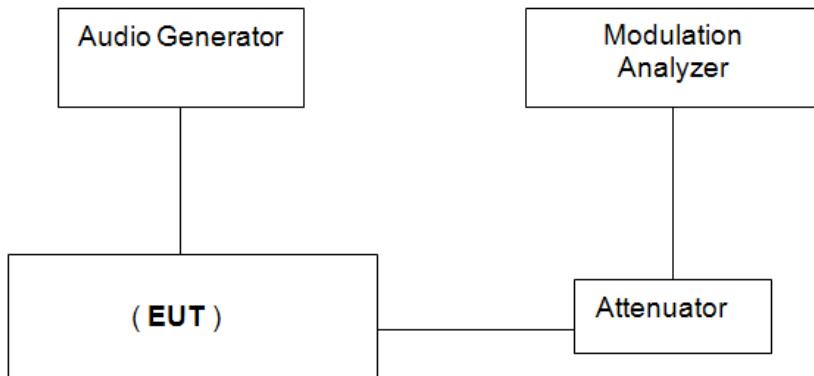

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 8.6.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.2.7. Adjacent Channel Power

The adjacent channel power is that part of the total power output of a transmitter under defined conditions of modulation, which falls within a specified passband centred on the nominal frequency of either of the adjacent channels. This power is the sum of the mean power produced by the modulation, hum and noise of the transmitter.

#### LIMIT


IEC 62238 Sub-clause 8.7.3

The adjacent channel power shall not exceed a value of:

25 kHz channel: 70 dB below the carrier power of the transmitter without any need to be below 0,2  $\mu$ W.

12 kHz channel: 60 dB below the carrier power of the transmitter without any need to be below 0,2  $\mu$ W.

#### TEST CONFIGURATION

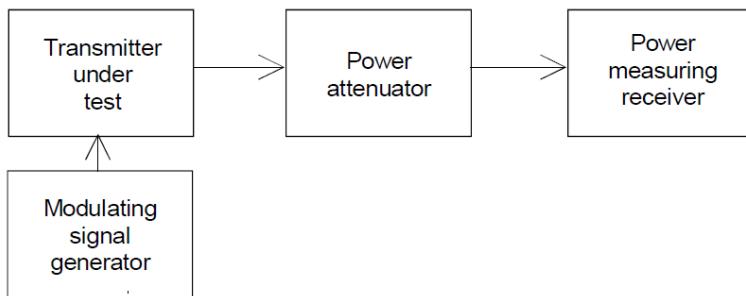

#### TEST PROCEDURE

1. The test conditions.

normal condition  Extreme conditions

2. Refer to IEC 62238 Sub-clause 8.7.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed  Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.2.8. Conducted spurious emissions conveyed to the antenna


Conducted spurious emissions are emissions on a frequency or frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out of band emissions.

#### LIMIT

IEC 62238 Sub-clause 8.8.3

The power of any conducted spurious emission on any discrete frequency shall not exceed  $0,25\mu\text{W}(-36\text{dBm})$ .

#### TEST CONFIGURATION

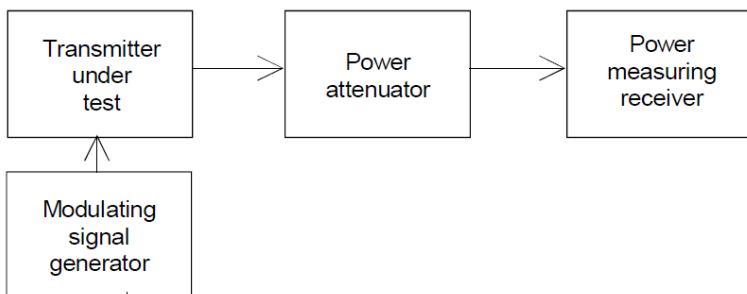

#### TEST PROCEDURE

1. The test conditions.

normal condition  Extreme conditions

2. Refer to IEC 62238 Sub-clause 8.8.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed  Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.2.9. Transient frequency behaviour of the transmitter

The residual modulation of the transmitter is the ratio, in decibels, of the demodulated radiofrequency signal in the absence of wanted modulation, to the modulated radiofrequency signal produced when the normal test modulation is applied.


#### LIMIT

IEC 62238 Sub-clause 8.9.3

During the period of time  $t_1$  and  $t_3$  the frequency difference shall not exceed the value of one channel separation. The frequency difference, after the end of  $t_2$ , shall be within the limit of the frequency error of  $\pm 1,5$  kHz.

During the period of time  $t_2$  the frequency difference shall not exceed the value of half a channel separation. Before the start of  $t_3$  the frequency difference shall be within the limit of the frequency error of  $\pm 1,5$  kHz.

#### TEST CONFIGURATION

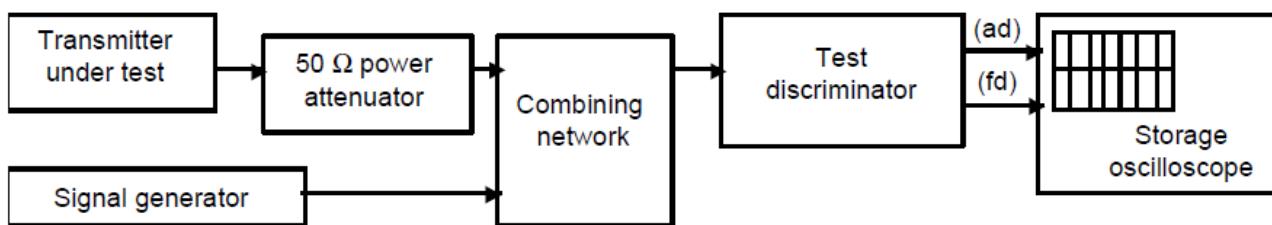

#### TEST PROCEDURE

1. The test conditions.  
 normal condition  Extreme conditions
2. Refer to IEC 62238 Sub-clause 8.9.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed  Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.2.10. Residual modulation of the transmitter


The residual modulation of the transmitter is the ratio, in dB, of the demodulated RF signal in the absence of wanted modulation, to the demodulated RF signal produced when the normal test modulation is applied.

#### LIMIT

IEC 62238 Sub-clause 8.10.3

The residual modulation shall not exceed -40 dB on either 25 kHz or 12,5 kHz channels.

#### TEST CONFIGURATION

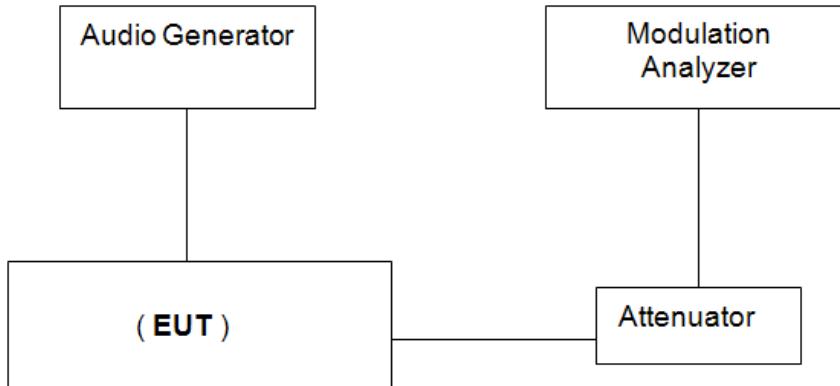

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 8.10.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.2.11. Frequency error (demodulated DSC signal)


The frequency error for the B- and the Y-state is the difference between the measured frequency from the demodulator and the nominal values.

#### LIMIT

IEC 62238 Sub-clause 8.11.3

The measured frequency from the demodulator at any time for the B-state shall be within  $2\ 100\ Hz \pm 10\ Hz$  and for the Y-state within  $1\ 300\ Hz \pm 10\ Hz$ .

#### TEST CONFIGURATION

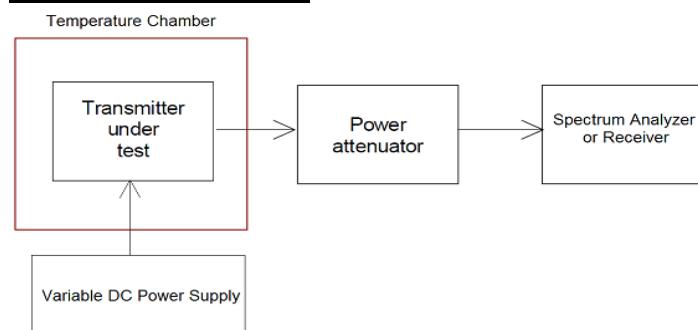

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 8.11.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.2.12. Modulation index for DSC


This test measures the modulation index in the B and Y states.

#### LIMIT

IEC 62238 Sub-clause 8.12.3

The modulation index shall be  $2,0 \pm 10\%$ .

#### TEST CONFIGURATION

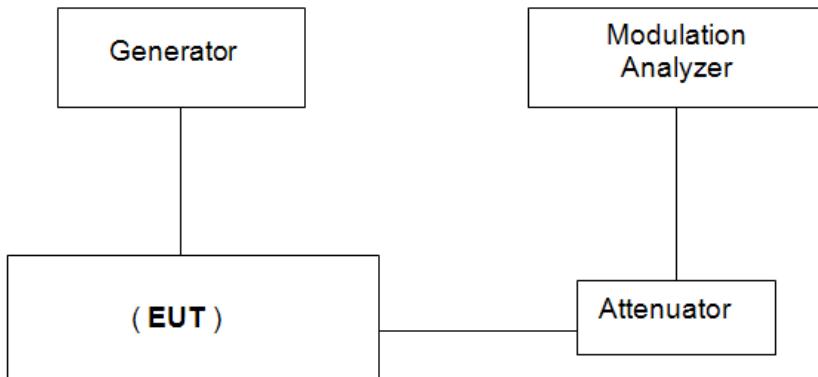

#### TEST PROCEDURE

1. The test conditions.

normal condition  Extreme conditions

2. Refer to IEC 62238 Sub-clause 8.12.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed  Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.2.13. Modulation rate for DSC


The modulation rate is the bit stream speed measured in bit/s.

#### LIMIT

IEC 62238 Sub-clause 8.13.3

The frequency shall be  $600 \text{ Hz} \pm 30 \text{ ppm}$  corresponding to a modulation rate of 1 200 baud.

#### TEST CONFIGURATION

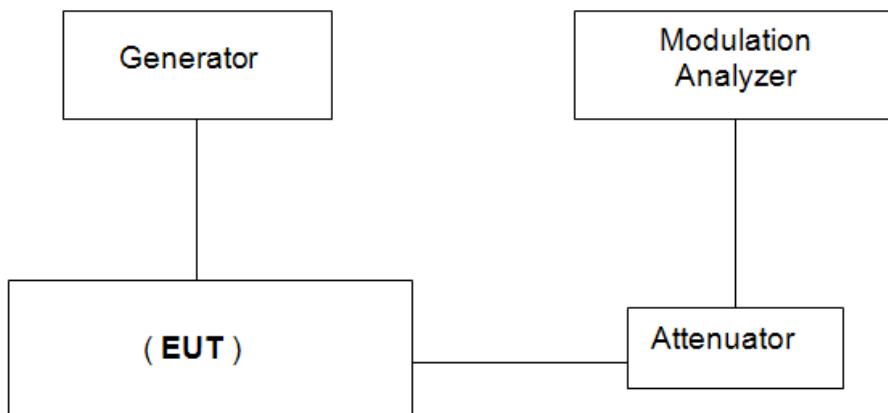

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 8.13.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.2.14. Testing of generated call sequences

Generated call sequences are calls which comply with the requirements of ITU-R Recommendation M.493-10.

#### Requirement

IEC 62238 Sub-clause 8.14.3

The requirements of ITU-R Recommendation M.493-14 regarding message composition and content shall be met.

The generated calls shall be analyzed with the calibrated apparatus for correct configuration of the signal format, including time diversity. It shall be verified that, after transmission of a DSC call, the transmitter re-tunes to the original channel. However, in the case of a distress call, the transmitter shall tune to channel 16 and automatically select the maximum power. The telecommands used and the channels tested for switching shall be stated in the test report.

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.3. Receiver for Radiotelephone Requirement

#### 5.3.1. Harmonic distortion and rated audio frequency output power

The harmonic distortion at the receiver output is defined as the ratio, expressed as a percentage, of the total rms voltage of all the harmonic components of the modulation audio frequency to the total rms voltage of the signal delivered by the receiver.

The rated audio frequency output power is the value stated by the manufacturer to be the maximum power available at the output, for which all the requirements of the present document are met.


#### LIMIT

IEC 62238 Sub-clause 9.1.3

- 2 W in a loudspeaker;
- 1 mW in the handset earphone.

The harmonic distortion shall not exceed 10 %.

#### TEST CONFIGURATION

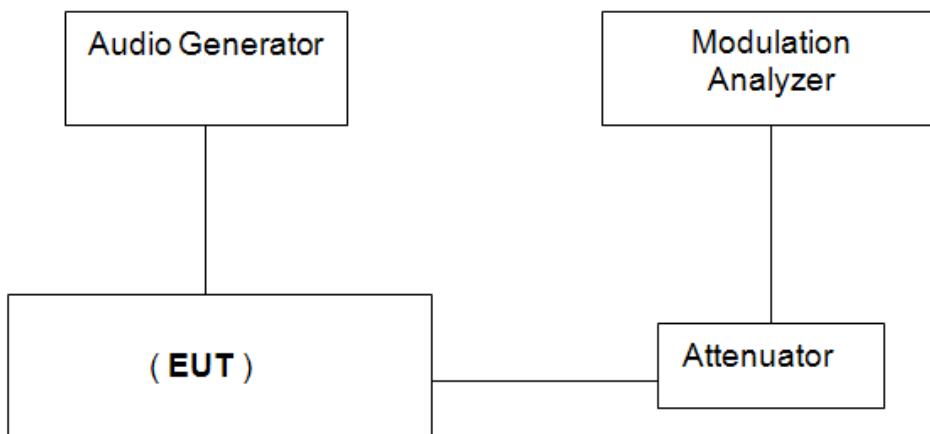

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 9.1.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.3.2. Audio frequency response

The audio frequency response is the variation in the receiver's audio frequency output level as a function of the modulating frequency of a received radio frequency signal modulated with constant deviation.

#### LIMIT

IEC 62238 Sub-clause 9.2.3

The audio frequency response shall not deviate by more than +1 dB or -3 dB from a characteristic giving the output level as a function of the audio frequency, decreasing by 6 dB per octave and passing through the measured point at 1 kHz (figure 5).

Certified Intrinsically Safe equipment need not comply with the limits below 700 Hz.


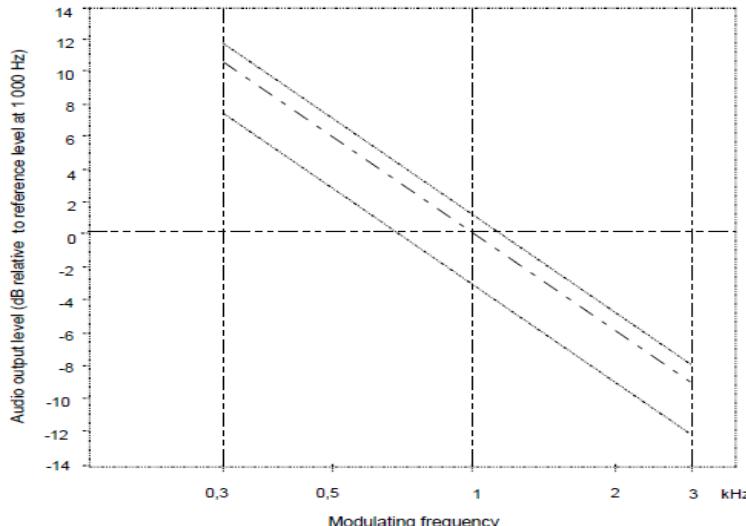


Figure 5: Audio frequency response

#### TEST CONFIGURATION

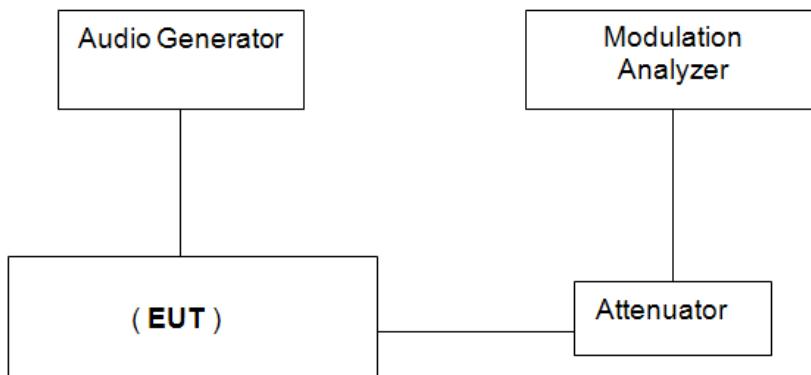

#### TEST PROCEDURE

1. The test conditions.
 

normal condition  Extreme conditions
2. Refer to IEC 62238 Sub-clause 9.2.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed  Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.3.3. Maximum Usable Sensitivity

The maximum usable sensitivity of the receiver is the minimum level of the signal (emf) at the nominal frequency of the receiver which, when applied to the receiver input with normal test modulation (clause 6.4), will produce:


- in all cases, an audio frequency output power of at least 50 % of the rated output power (clause 9.1); and
- a SINAD ratio of 20 dB, measured at the receiver output through a psophometric telephone filtering network such as described in ITU-T Recommendation O.41 [6].

#### LIMIT

IEC 62238 Sub-clause 9.3.3

The maximum usable sensitivity for either 25 kHz or 12,5 kHz channels shall not exceed +6 dB $\mu$ V (emf) under normal test conditions and +12 dB $\mu$ V (emf) under extreme test conditions.

#### TEST CONFIGURATION

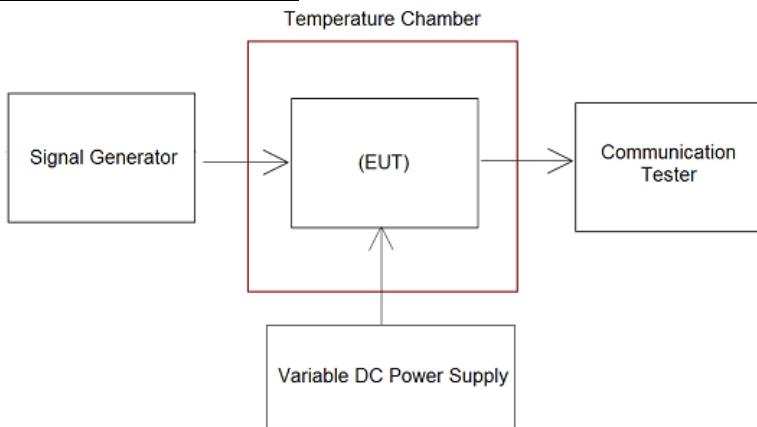

#### TEST PROCEDURE

1. The test conditions.

normal condition  Extreme conditions

2. Refer to IEC 62238 Sub-clause 9.3.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed  Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.3.4. Co-channel rejection


The co-channel rejection is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted modulated signal, both signals being at the nominal frequency of the receiver.

#### LIMIT

IEC 62238 Sub-clause 9.4.3

The co-channel rejection ratio, at any frequency of the unwanted signal within the specified range, shall be between: -10 dB and 0 dB.

#### TEST CONFIGURATION

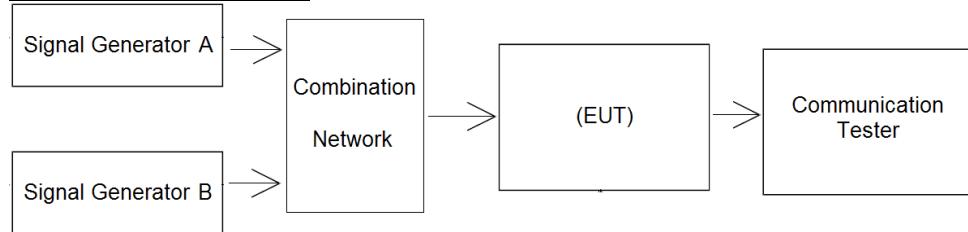

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions

2. Refer to IEC 62238 Sub-clause 9.4.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.3.5. Adjacent channel selectivity


The adjacent channel selectivity is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted modulated signal which differs in frequency from the wanted signal by the nominal channel spacing.

#### LIMIT

IEC 62238 Sub-clause 9.5.3

The adjacent channel selectivity shall be not less than 70 dB under normal test conditions and not less than 60 dB under extreme test conditions.

#### TEST CONFIGURATION

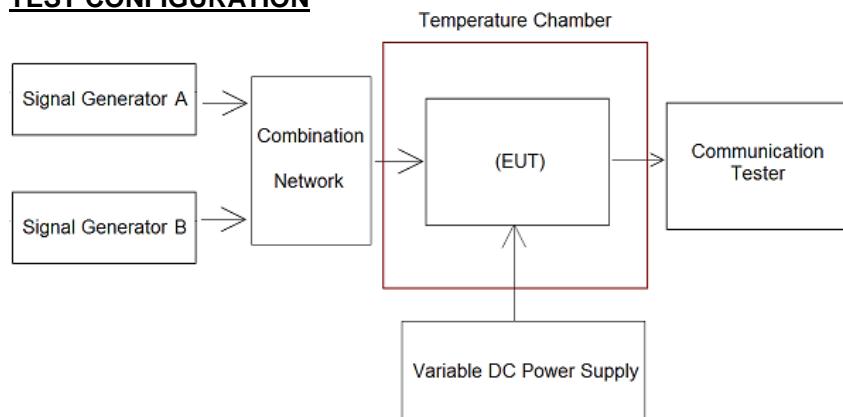

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 9.5.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.3.6. Spurious Response Rejection


The spurious response rejection is a measure of the capability of the receiver to discriminate between the wanted modulated signal at the nominal frequency and an unwanted signal at any other frequency at which a response is obtained.

#### LIMIT

IEC 62238 Sub-clause 9.6.3

At any frequency separated from the nominal frequency of the receiver by more than 25 kHz, the spurious response rejection ratio shall be not less than 70 dB.

#### TEST CONFIGURATION

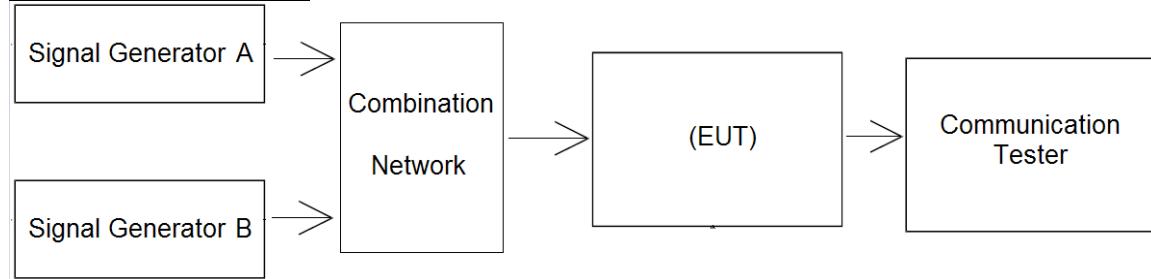

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 9.6.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.3.7. Intermodulation response


The intermodulation response is a measure of the capability of a receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of two or more unwanted signals with a specific frequency relationship to the wanted signal frequency.

#### LIMIT

IEC 62238 Sub-clause 9.7.3

The intermodulation response ratio shall not be less than 68 dB.

#### TEST CONFIGURATION

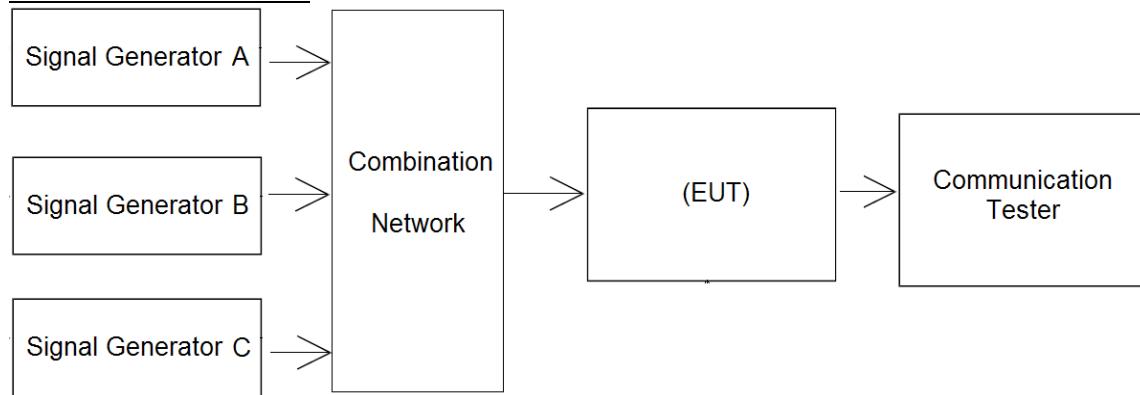

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 9.7.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.3.8. Blocking or Desensitization


Blocking is a change (generally a reduction) in the wanted output power of the receiver or a reduction of the SINAD ratio due to an unwanted signal on another frequency.

#### LIMIT

IEC 62238 Sub-clause 9.8.3

The blocking level for any frequency within the specified ranges, shall be not less than 90 dB $\mu$ V (emf), except at frequencies on which spurious responses are found

#### TEST CONFIGURATION

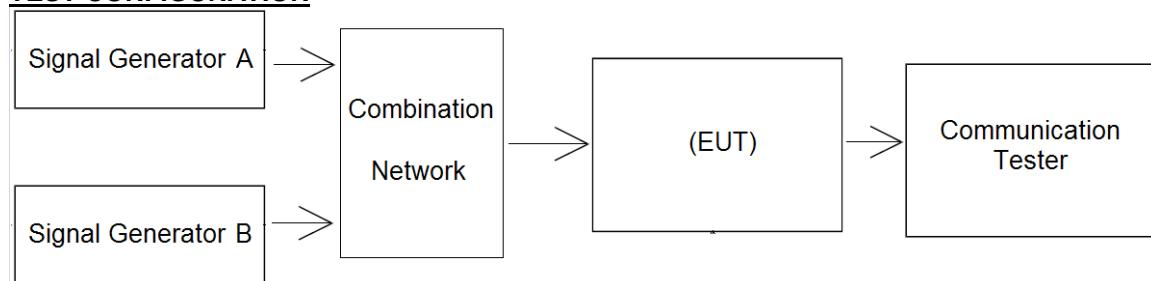

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions

2. Refer to IEC 62238 Sub-clause 9.8.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.3.9. Conducted spurious emissions


Conducted spurious emissions from the receiver are components at any frequency, present at the receiver input port.

#### LIMIT

IEC 62238 Sub-clause 9.9.3

The power of any spurious radiation shall not exceed 2 nw(-57dBm) at any frequency in the range between 9 kHz and 2 GHz.

#### TEST CONFIGURATION

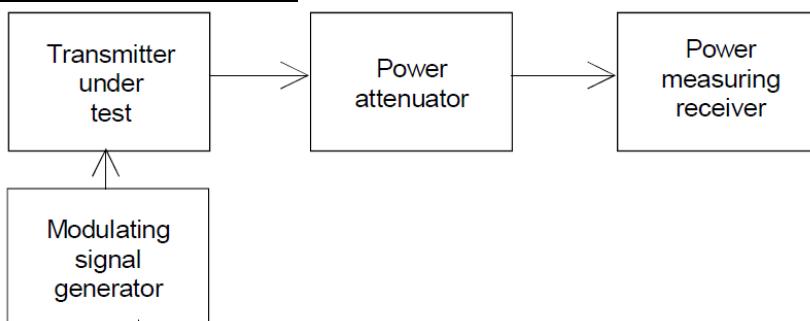

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 9.9.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.3.10. Receiver noise and hum level


The receiver noise and hum level is defined as the ratio, in dB, of the audio frequency power of the noise and hum resulting from spurious effects of the power supply system or from other causes, to the audio frequency power produced by a high frequency signal of average level, modulated by the normal test modulation and applied to the receiver input.

#### LIMIT

IEC 62238 Sub-clause 9.10.3

The receiver noise and hum level shall not exceed -40 dB, relative to the modulated signal.

#### TEST CONFIGURATION

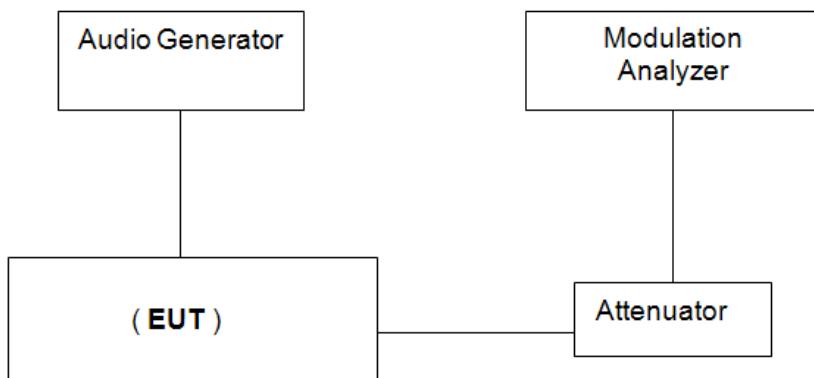

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 9.10.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.3.11. Squelch operation

The purpose of the squelch facility is to mute the receiver audio output signal when the level of the signal at the receiver input is less than a given value.

#### LIMIT


IEC 62238 Sub-clause 9.11.3

Under the conditions specified in a) clause 9.11.2, the audio frequency output power shall not exceed -40 dB relative to the rated output power.

Under the conditions specified in b) clause 9.11.2, the input level shall not exceed +6 dB $\mu$ V (emf) and the SINAD ratio shall be at least 20 dB.

Under the conditions specified in c) clause 9.11.2, the input signal shall not exceed +6 dB $\mu$ V (emf) when the control is set at maximum.

#### TEST CONFIGURATION

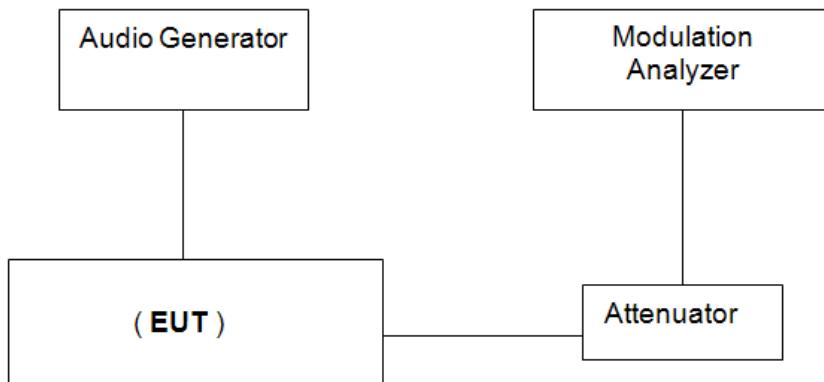

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 9.11.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.3.12. Squelch hysteresis


Squelch hysteresis is the difference in dB between the receiver input signal levels at which the squelch opens and closes.

#### LIMIT

IEC 62238 Sub-clause 9.12.3

The squelch hysteresis shall be between 3 dB and 6 dB.

#### TEST CONFIGURATION

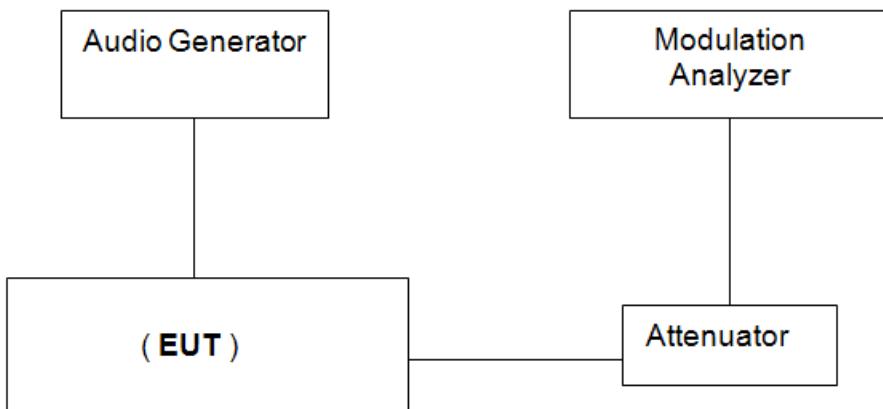

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 9.12.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.3.13. Multiple watch characteristic

The scanning period is the time between the start of two successive samples of the priority channel in the absence of a signal on that channel.

#### LIMIT


IEC 62238 Sub-clause 9.13.3

The scanning period shall not exceed 2 s.

The dwell time on the priority channel shall not exceed 150 ms.

The dwell time on the additional channel shall be between 850 ms and 2 s as indicated by the time of the gap between two output bursts.

#### TEST CONFIGURATION

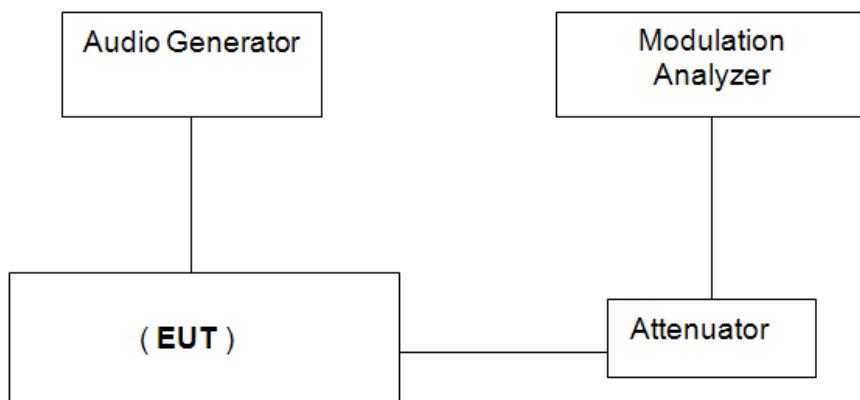

#### TEST PROCEDURE

1. The test conditions.

normal condition  Extreme conditions

2. Refer to IEC 62238 Sub-clause 9.13.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed  Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

## 5.4. Receiver for DSC decoder Requirement

### 5.4.1. Maximum usable sensitivity


The maximum usable sensitivity of the receiver is the minimum level of the signal (e.m.f.) at the nominal frequency of the receiver which when applied to the receiver input with a test modulation will produce a bit error ratio of  $10^{-2}$

#### LIMIT

IEC 62238 Sub-clause 10.1.3

The bit error ratio shall be equal to or less than  $10^{-2}$

#### TEST CONFIGURATION

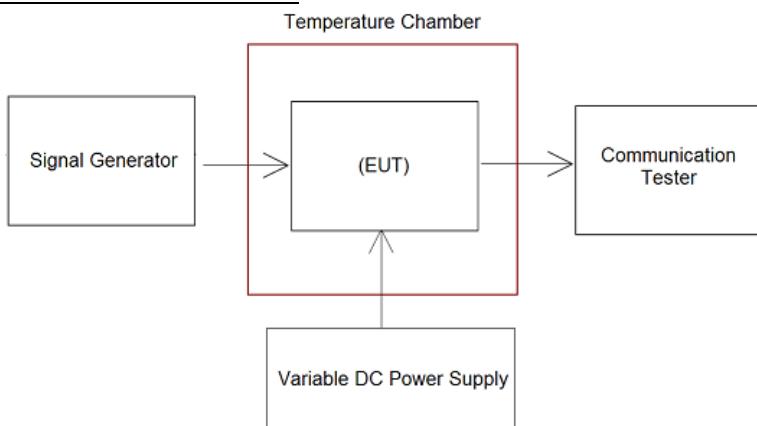

#### TEST PROCEDURE

1. The test conditions.

normal condition  Extreme conditions

2. Refer to IEC 62238 Sub-clause 10.1.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed  Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.4.2. Co-channel rejection


The co-channel rejection is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted modulated signal, both signals being at the nominal frequency of the receiver.

#### LIMIT

IEC 62238 Sub-clause 10.2.3

The bit error ratio shall be equal to or less than  $10^{-2}$ .

#### TEST CONFIGURATION

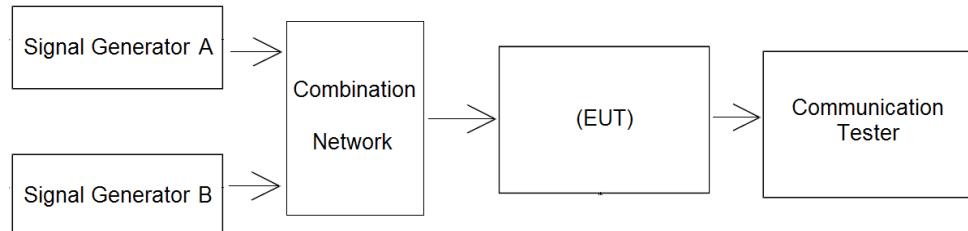

#### TEST PROCEDURE

1. The test conditions.

normal condition  Extreme conditions

2. Refer to IEC 62238 Sub-clause 10.2.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed  Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.4.3. Adjacent channel selectivity


The adjacent channel selectivity is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted modulated signal which differs in frequency from the wanted signal by 25 kHz.

#### LIMIT

IEC 62238 Sub-clause 10.3.3

The bit error ratio shall be equal to or less than  $10^{-2}$

#### TEST CONFIGURATION

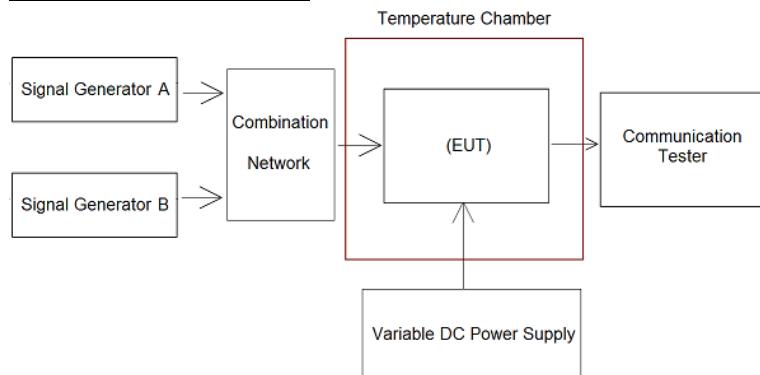

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC61138 Sub-clause 10.3.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

#### 5.4.4. Spurious response and blocking immunity


The spurious response and blocking immunity is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted modulated signal with frequencies outside the pass band of the receiver.

##### LIMIT

IEC 62238 Sub-clause 10.4.3

The bit error ratio shall be equal to or less than  $10^{-2}$

##### TEST CONFIGURATION

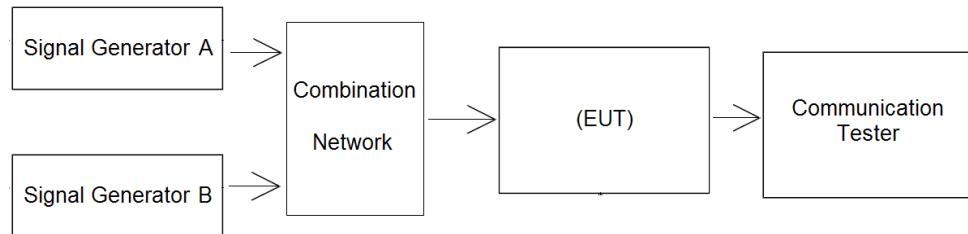

##### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 10.4.2 for the measurement method

##### TEST MODE

Refer to the section 4.2

##### TEST RESULT

Passed       Not Applicable

##### TEST DATA

Refer to the appendix report on the section 8

### 5.4.5. Intermodulation response


The intermodulation response is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of two or more unwanted signals with a specific frequency relationship to the wanted signal frequency.

#### LIMIT

IEC 62238 Sub-clause 10.5.3

The bit error ratio shall be equal to or less than  $10^{-2}$

#### TEST CONFIGURATION

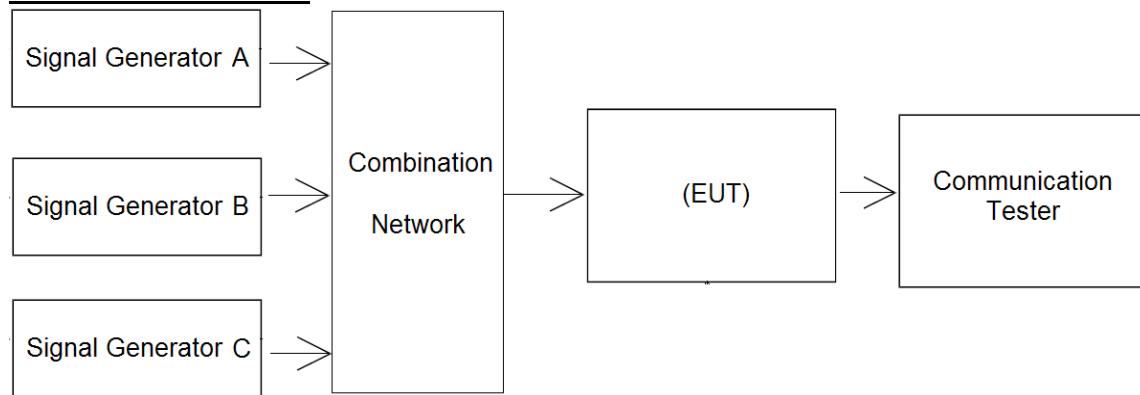

#### TEST PROCEDURE

1. The test conditions.

normal condition  Extreme conditions

2. Refer to IEC 62238 Sub-clause 10.5.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed  Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

#### 5.4.6. Dynamic range


The dynamic range of the equipment is the range from the minimum to the maximum level of a radio frequency input signal at which the bit error ratio in the output of the decoder does not exceed a specified value.

##### Limit

IEC 62238 Sub-clause 10.6.3

The bit error ratio shall be equal to or less than  $10^{-2}$ .

#### TEST CONFIGURATION

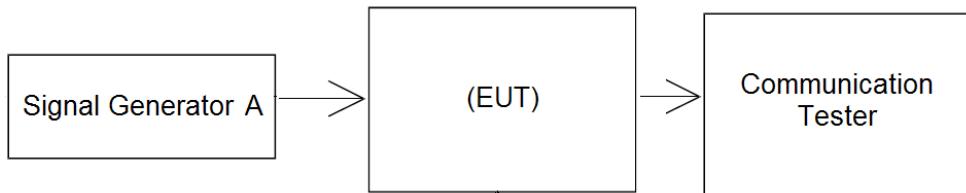

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions

2. Refer to IEC 62238 Sub-clause 10.6.2 for the measurement method

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

### 5.4.7. Spurious emissions

Spurious emissions from the receiver are components at any frequency, present at the receiver input port.


The level of spurious emissions shall be measured as the power level at the antenna.

#### Limit

IEC 62238 Sub-clause 10.7.3

The power of any spurious emission shall not exceed 2 nW at any frequency in the range between 9 kHz and 2 GHz.

#### TEST CONFIGURATION

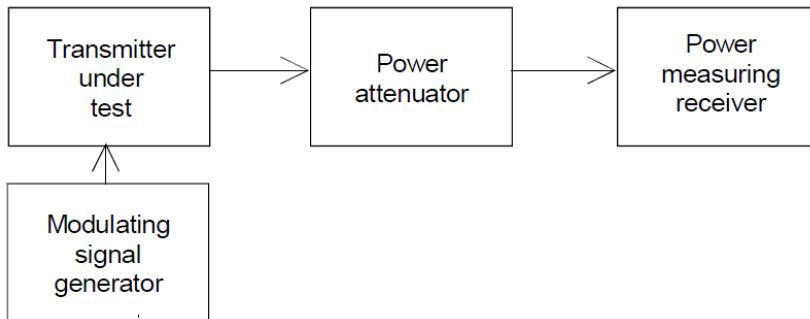

#### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 10.7.2 for the measurement method.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

#### 5.4.8. Verification of correct decoding of various types of DSC calls

DSC call sequences are calls that comply with ITU-R Recommendation M.493-14.

##### Requirement

The requirements of ITU-R Recommendation M.493-14 regarding message composition and content shall be met.

The decoded call sequences at the output of the receiver shall be examined for correct technical format, including error-check characters.

When receiver measurements are made by use of a printer or a computer, a check shall be made to ensure accordance between printer output and display indication.

It shall be verified that the equipment is capable of switching to a channel identified in the DSC call.

##### TEST MODE

Refer to the section 4.2

##### TEST RESULT

Passed       Not Applicable

##### TEST DATA

Refer to the appendix report on the section 8

### 5.4.9. Reaction to VTS and AIS channel management DSC transmissions

VTS and AIS channel management DSC transmissions are any DSC transmissions that are in accordance with Recommendation ITU-R M.825 or M.1371.

#### Requirement

The equipment shall not sound an alarm, display a message ( an accurate, informative display is permissible but not required), transmit a response or suggest a transmitted response, lock up, or require operator intervention.

#### TEST MODE

Refer to the section 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST DATA

Refer to the appendix report on the section 8

#### 5.4.10. Simultaneous reception


Simultaneous reception is the ability of the unit to correctly receive DSC traffic and radiotelephony traffic at the same time.

##### Limit

IEC 62238 Sub-clause 10.10.3

The bit error ratio shall be equal to or less than  $10^{-2}$

##### TEST CONFIGURATION

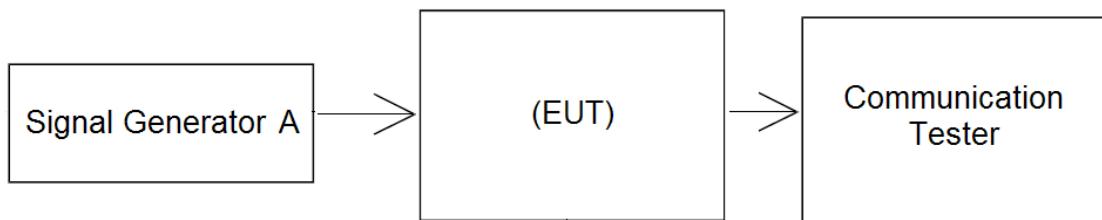

##### TEST PROCEDURE

1. The test conditions.  
 normal condition       Extreme conditions
2. Refer to IEC 62238 Sub-clause 10.10.2 for the measurement method.

##### TEST MODE

Refer to the section 4.2

##### TEST RESULT

Passed       Not Applicable

##### TEST DATA

Refer to the appendix report on the section 8

## 6. TEST SETUP PHOTOS



## **7. EXTERNAL AND INTERNAL PHOTOS**

Reference to the test report No.: CHTW24050028

## **8. APPENDIX REPORT**

**Appendix A: Frequency Error**


Operation Mode	Test conditions		Frequency Error (kHz) CH <sub>M</sub>	Limit (kHz)	Result
	Temperature	Voltage			
TX-AWH	T <sub>N</sub>	V <sub>N</sub>	0.023	±1.5	PASS
TX-AWH	T <sub>L</sub>	V <sub>L</sub>	0.031	±1.5	PASS
TX-AWH	T <sub>H</sub>	V <sub>H</sub>	0.032	±1.5	PASS
TX-AWL	T <sub>N</sub>	V <sub>N</sub>	0.026	±1.5	PASS
TX-AWL	T <sub>L</sub>	V <sub>L</sub>	0.035	±1.5	PASS
TX-AWL	T <sub>H</sub>	V <sub>H</sub>	0.034	±1.5	PASS

**Appendix B: Carrier power**

Operation Mode	Temperature	Voltage	Test Channel	Measured power (dBm)	Rated power(W)	Difference (dB)	Limit (dB)	Result
TX-AWH	T <sub>N</sub>	V <sub>N</sub>	CH <sub>L</sub>	37.56	6.00	-0.22	±1.5	PASS
TX-AWH	T <sub>N</sub>	V <sub>N</sub>	CH <sub>M</sub>	37.59	6.00	-0.19	±1.5	PASS
TX-AWH	T <sub>N</sub>	V <sub>N</sub>	CH <sub>H</sub>	37.53	6.00	-0.25	±1.5	PASS
TX-AWH	T <sub>L</sub>	V <sub>L</sub>	CH <sub>M</sub>	37.18	6.00	-0.60	-3 ~ +2	PASS
TX-AWH	T <sub>H</sub>	V <sub>H</sub>	CH <sub>M</sub>	38.22	6.00	0.44	-3 ~ +2	PASS
TX-AWL	T <sub>N</sub>	V <sub>N</sub>	CH <sub>L</sub>	29.63	1.00	-0.37	±1.5	PASS
TX-AWL	T <sub>N</sub>	V <sub>N</sub>	CH <sub>M</sub>	29.62	1.00	-0.38	±1.5	PASS
TX-AWL	T <sub>N</sub>	V <sub>N</sub>	CH <sub>H</sub>	29.59	1.00	-0.41	±1.5	PASS
TX-AWL	T <sub>L</sub>	V <sub>L</sub>	CH <sub>M</sub>	29.65	1.00	-0.35	-3 ~ +2	PASS
TX-AWL	T <sub>H</sub>	V <sub>H</sub>	CH <sub>M</sub>	29.64	1.00	-0.36	-3 ~ +2	PASS

## Appendix C: Frequency Deviation

Modulation Frequency (kHz)	Frequency Deviation (kHz)	Limit (kHz)	Result	Modulation Frequency (kHz)	Frequency Deviation (kHz)	Limit (kHz)	Result
	TX-AWH				TX-AWL		
	CH <sub>M</sub>				CH <sub>M</sub>		
0.30	4.560	5.00	PASS	0.30	4.562	5.00	PASS
0.40	4.735	5.00	PASS	0.40	4.732	5.00	PASS
0.50	4.898	5.00	PASS	0.50	4.915	5.00	PASS
0.60	4.906	5.00	PASS	0.60	4.919	5.00	PASS
0.70	4.881	5.00	PASS	0.70	4.898	5.00	PASS
0.80	4.813	5.00	PASS	0.80	4.843	5.00	PASS
0.90	4.769	5.00	PASS	0.90	4.806	5.00	PASS
1.00	4.727	5.00	PASS	1.00	4.762	5.00	PASS
1.20	4.624	5.00	PASS	1.20	4.660	5.00	PASS
1.40	4.546	5.00	PASS	1.40	4.564	5.00	PASS
1.60	4.504	5.00	PASS	1.60	4.543	5.00	PASS
1.80	4.517	5.00	PASS	1.80	4.557	5.00	PASS
2.00	4.550	5.00	PASS	2.00	4.586	5.00	PASS
2.20	4.541	5.00	PASS	2.20	4.567	5.00	PASS
2.40	4.461	5.00	PASS	2.40	4.467	5.00	PASS
2.55	4.389	5.00	PASS	2.55	4.409	5.00	PASS
2.60	4.378	5.00	PASS	2.60	4.380	5.00	PASS
2.80	4.230	5.00	PASS	2.80	4.207	5.00	PASS
3.00	4.054	5.00	PASS	3.00	4.000	5.00	PASS
3.00	4.054	4.10	PASS	3.00	4.000	4.00	PASS
3.50	3.277	4.10	PASS	3.50	3.226	4.00	PASS
4.00	0.068	4.10	PASS	4.00	0.072	4.00	PASS
4.50	0.074	4.10	PASS	4.50	0.077	4.00	PASS
5.00	0.072	4.10	PASS	5.00	0.066	4.00	PASS
6.00	0.070	4.10	PASS	6.00	0.078	4.00	PASS
6.00	0.070	1.50	PASS	6.00	0.078	1.50	PASS
7.00	0.071	1.05	PASS	7.00	0.073	1.05	PASS
8.00	0.076	0.77	PASS	8.00	0.082	0.77	PASS
9.00	0.071	0.58	PASS	9.00	0.080	0.58	PASS
10.00	0.068	0.46	PASS	10.00	0.075	0.46	PASS
11.00	0.067	0.37	PASS	11.00	0.090	0.37	PASS
12.00	0.082	0.30	PASS	12.00	0.082	0.30	PASS
14.00	0.071	0.21	PASS	14.00	0.083	0.21	PASS
16.00	0.070	0.15	PASS	16.00	0.080	0.15	PASS
18.00	0.069	0.12	PASS	18.00	0.072	0.12	PASS
20.00	0.074	0.09	PASS	20.00	0.071	0.09	PASS
22.00	0.066	0.07	PASS	22.00	0.067	0.07	PASS
24.00	0.055	0.06	PASS	24.00	0.053	0.06	PASS
25.00	0.048	0.05	PASS	25.00	0.041	0.05	PASS

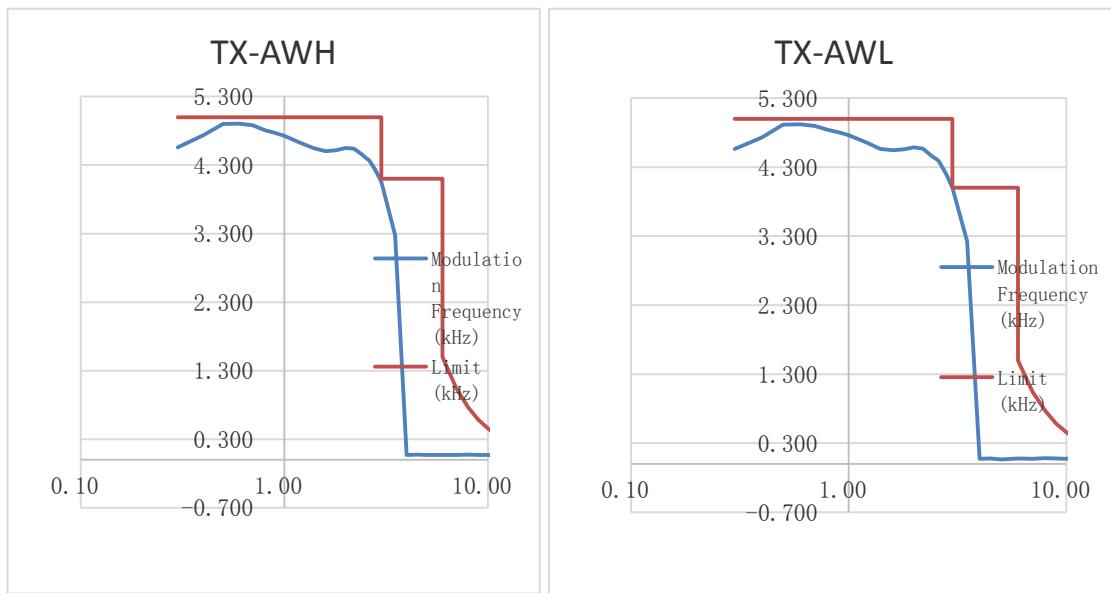
**Appendix C: Frequency Deviation****TEST PLOT RESULT**

**Appendix D: Sensitivity of the modulaotr, including microphone**

Operation Mode	Test Channel	Modulated Frequency (kHz)	Measured (kHz)	Limit(kHz)	Result
TX-AWH	CH <sub>M</sub>	1.0	2.8	±2.5~ ±4.5	PASS
TX-AWH	CH <sub>M</sub>	0.3	2.9	±2.5~ ±4.5	PASS
TX-AWH	CH <sub>M</sub>	0.5	3.9	±2.5~ ±4.5	PASS

**Appendix E: Audio frequency response**

Frequency (KHz )	Frequency Deviation (KHz)	1KHz Reference Deviation (KHz)	Audio Frequency Response (dB)
	TX-AWH		
	CH <sub>M</sub>		
0.3	0.21	1.00	-13.59
0.4	0.30	1.00	-10.53
0.5	0.43	1.00	-7.26
0.6	0.57	1.00	-4.93
0.7	0.68	1.00	-3.37
0.8	0.79	1.00	-2.04
0.9	0.89	1.00	-0.97
1	1.00	1.00	0.00
1.2	1.20	1.00	1.59
1.4	1.40	1.00	2.90
1.6	1.59	1.00	4.03
1.8	1.78	1.00	4.99
2	1.95	1.00	5.80
2.2	2.05	1.00	6.23
2.55	2.11	1.00	6.50
2.4	2.25	1.00	7.06
2.6	2.25	1.00	7.06
2.7	2.25	1.00	7.06
2.8	2.25	1.00	7.06
3	2.39	1.00	7.58

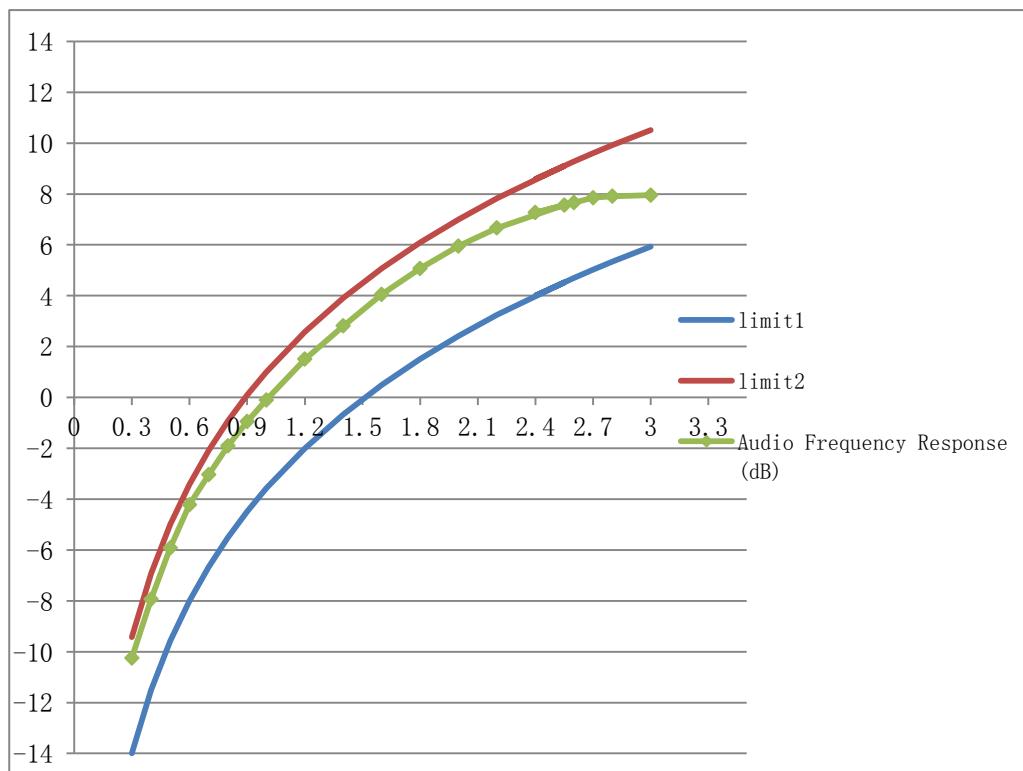**Appendix E: Audio frequency response****TEST PLOT RESULT**


**Appendix F: Audio frequency harmonic distortion of the emission**

Operation Mode	Temperature (°C)	Voltage (V)	Modulated Frequency (kHz)	Test Channel	Measured (%)	Limit (%)	Result
TX-AWH	T <sub>N</sub>	V <sub>N</sub>	0.3	CH <sub>M</sub>	5.5	≤10	PASS
			0.5	CH <sub>M</sub>	3.6	≤10	PASS
			1.0	CH <sub>M</sub>	2.3	≤10	PASS
TX-AWL	T <sub>N</sub>	V <sub>N</sub>	0.3	CH <sub>M</sub>	5.2	≤10	PASS
			0.5	CH <sub>M</sub>	4.8	≤10	PASS
			1.0	CH <sub>M</sub>	3.4	≤10	PASS



**Appendix G: Adjacent Channel Power**

Operation Mode	Test Channel	Test Channel	Measurement Power (dBc)	Limit (dB)	Result
TX-AWH	CH <sub>M</sub>	Lower adjacent	-70.96	≤-70	PASS
TX-AWH	CH <sub>M</sub>	Upper adjacent	-70.68	≤-70	PASS

## Appendix H: Conducted spurious emissions conveyed to the antenna

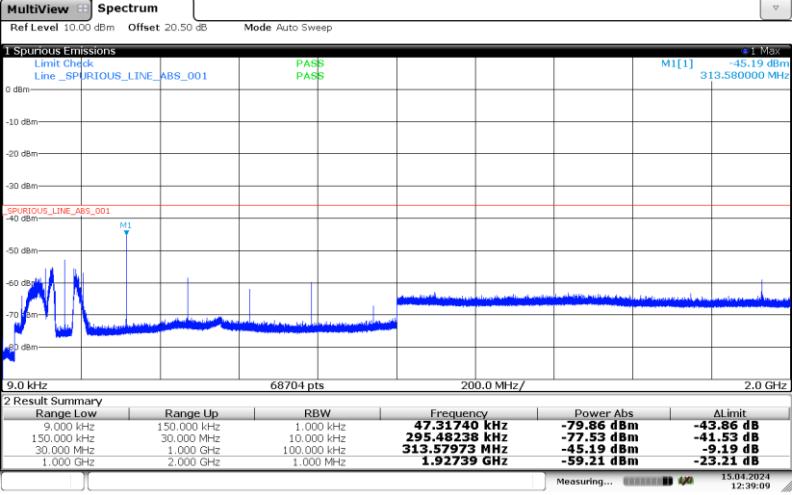Operation Mode	Test Channel	TEST PLOT RESULT																																				
TX-AWH	CH <sub>M</sub>	 <p><b>1 Spurious Emissions</b></p> <table border="1"> <thead> <tr> <th>Line</th> <th>Limit Check</th> <th>Pass</th> </tr> </thead> <tbody> <tr> <td>Line_SPURIOUS_LINE_ABS_001</td> <td>PASS</td> <td>PASS</td> </tr> </tbody> </table> <p><b>2 Result Summary</b></p> <table border="1"> <thead> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>AI Limit</th> </tr> </thead> <tbody> <tr> <td>9.000 kHz</td> <td>150.000 kHz</td> <td>1.000 kHz</td> <td><b>47.31740 kHz</b></td> <td><b>-79.86 dBm</b></td> <td><b>-43.86 dB</b></td> </tr> <tr> <td>150.000 kHz</td> <td>30.000 MHz</td> <td>10.000 kHz</td> <td><b>295.974 GHz</b></td> <td><b>-79.86 dBm</b></td> <td><b>-43.86 dB</b></td> </tr> <tr> <td>50.000 MHz</td> <td>1.000 GHz</td> <td>100.000 kHz</td> <td><b>313.57973 MHz</b></td> <td><b>-45.19 dBm</b></td> <td><b>-9.19 dB</b></td> </tr> <tr> <td>1.000 GHz</td> <td>2.000 GHz</td> <td>1.000 MHz</td> <td><b>1.92739 GHz</b></td> <td><b>-59.21 dBm</b></td> <td><b>-23.21 dB</b></td> </tr> </tbody> </table> <p>Date: 15 APR 2024 12:39:09</p>	Line	Limit Check	Pass	Line_SPURIOUS_LINE_ABS_001	PASS	PASS	Range Low	Range Up	RBW	Frequency	Power Abs	AI Limit	9.000 kHz	150.000 kHz	1.000 kHz	<b>47.31740 kHz</b>	<b>-79.86 dBm</b>	<b>-43.86 dB</b>	150.000 kHz	30.000 MHz	10.000 kHz	<b>295.974 GHz</b>	<b>-79.86 dBm</b>	<b>-43.86 dB</b>	50.000 MHz	1.000 GHz	100.000 kHz	<b>313.57973 MHz</b>	<b>-45.19 dBm</b>	<b>-9.19 dB</b>	1.000 GHz	2.000 GHz	1.000 MHz	<b>1.92739 GHz</b>	<b>-59.21 dBm</b>	<b>-23.21 dB</b>
Line	Limit Check	Pass																																				
Line_SPURIOUS_LINE_ABS_001	PASS	PASS																																				
Range Low	Range Up	RBW	Frequency	Power Abs	AI Limit																																	
9.000 kHz	150.000 kHz	1.000 kHz	<b>47.31740 kHz</b>	<b>-79.86 dBm</b>	<b>-43.86 dB</b>																																	
150.000 kHz	30.000 MHz	10.000 kHz	<b>295.974 GHz</b>	<b>-79.86 dBm</b>	<b>-43.86 dB</b>																																	
50.000 MHz	1.000 GHz	100.000 kHz	<b>313.57973 MHz</b>	<b>-45.19 dBm</b>	<b>-9.19 dB</b>																																	
1.000 GHz	2.000 GHz	1.000 MHz	<b>1.92739 GHz</b>	<b>-59.21 dBm</b>	<b>-23.21 dB</b>																																	

## Appendix I: Transient frequency behaviour of the transmitter

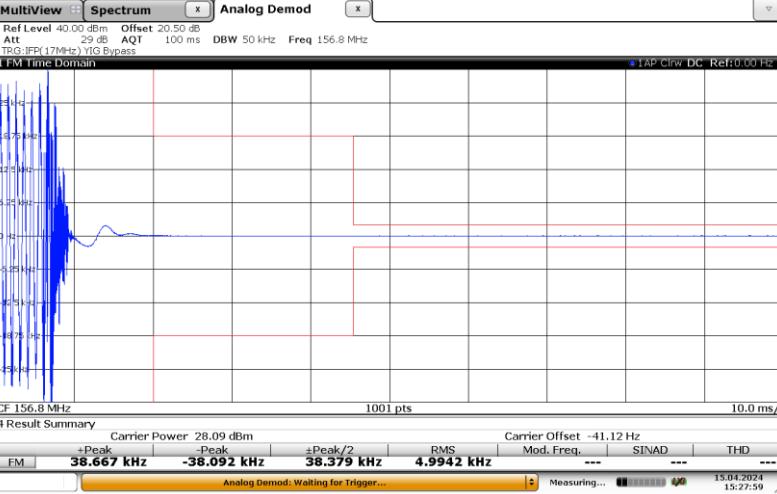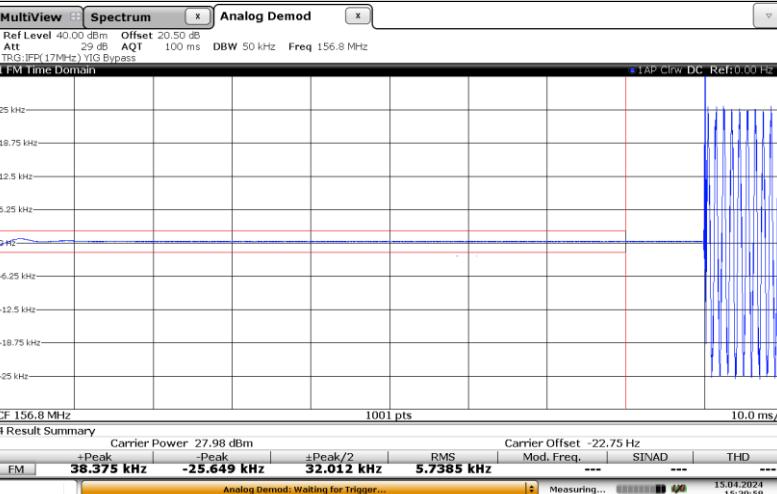Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT																				
TX-AWH	FM	CHM	 <p>4 Result Summary</p> <table border="1"> <tr> <td>Carrier Power</td> <td>28.09 dBm</td> <td>Carrier Offset</td> <td>-41.12 Hz</td> </tr> <tr> <td>+Peak</td> <td>38.667 kHz</td> <td>-Peak</td> <td>-38.092 kHz</td> </tr> <tr> <td>+Peak/2</td> <td>38.379 kHz</td> <td>RMS</td> <td>4.9942 kHz</td> </tr> <tr> <td>Mod. Freq.</td> <td>---</td> <td>SINAD</td> <td>---</td> </tr> <tr> <td>THD</td> <td>---</td> <td></td> <td></td> </tr> </table> <p>FM</p> <p>Date: 15 APR 2024 15:27:58</p>	Carrier Power	28.09 dBm	Carrier Offset	-41.12 Hz	+Peak	38.667 kHz	-Peak	-38.092 kHz	+Peak/2	38.379 kHz	RMS	4.9942 kHz	Mod. Freq.	---	SINAD	---	THD	---		
Carrier Power	28.09 dBm	Carrier Offset	-41.12 Hz																				
+Peak	38.667 kHz	-Peak	-38.092 kHz																				
+Peak/2	38.379 kHz	RMS	4.9942 kHz																				
Mod. Freq.	---	SINAD	---																				
THD	---																						
TX-AWH	FM	CHM	 <p>4 Result Summary</p> <table border="1"> <tr> <td>Carrier Power</td> <td>27.98 dBm</td> <td>Carrier Offset</td> <td>-22.75 Hz</td> </tr> <tr> <td>+Peak</td> <td>38.375 kHz</td> <td>-Peak</td> <td>-25.649 kHz</td> </tr> <tr> <td>+Peak/2</td> <td>32.012 kHz</td> <td>RMS</td> <td>5.7385 kHz</td> </tr> <tr> <td>Mod. Freq.</td> <td>---</td> <td>SINAD</td> <td>---</td> </tr> <tr> <td>THD</td> <td>---</td> <td></td> <td></td> </tr> </table> <p>FM</p> <p>Date: 15 APR 2024 15:30:58</p>	Carrier Power	27.98 dBm	Carrier Offset	-22.75 Hz	+Peak	38.375 kHz	-Peak	-25.649 kHz	+Peak/2	32.012 kHz	RMS	5.7385 kHz	Mod. Freq.	---	SINAD	---	THD	---		
Carrier Power	27.98 dBm	Carrier Offset	-22.75 Hz																				
+Peak	38.375 kHz	-Peak	-25.649 kHz																				
+Peak/2	32.012 kHz	RMS	5.7385 kHz																				
Mod. Freq.	---	SINAD	---																				
THD	---																						

**Appendix J: Residual modulation of the transmitter**

Operation Mode	Test Channel	Measured (dB)	Limit(dB)	Result
TX-AWH	CH <sub>M</sub>	-43.63	≤-40	PASS

**Appendix K: Frequency error (demodulated DSC signal)**

Operation Mode	Test conditions		Frequency Error (Hz)	Limit (Hz)	Result
	Temperature	Voltage			
TX-B	$T_N$	$V_N$	2101.56	$2100 \pm 10$	PASS
TX-B	$T_L$	$V_L$	2101.95	$2100 \pm 10$	PASS
TX-B	$T_H$	$V_H$	2101.84	$2100 \pm 10$	PASS
TX-Y	$T_N$	$V_N$	1301.10	$1300 \pm 10$	PASS
TX-Y	$T_L$	$V_L$	1301.53	$1300 \pm 10$	PASS
TX-Y	$T_H$	$V_H$	1301.68	$1300 \pm 10$	PASS

**Appendix L: Modulation index for DSC**

Operation Mode	Test Channel	Modulation index	Limit	Result
TX-B	CH <sub>M1</sub>	1.91	2.0± 10%	PASS
TX-Y	CH <sub>M1</sub>	1.91	2.0± 10%	PASS

**Appendix M: Modulation rate for DSC**

Operation Mode	Test Channel	Modulation rate (Hz)	Limit	Result
TX-(B+Y)	CH <sub>M1</sub>	599.997	600Hz ± 30 ppm	PASS

**Appendix N: Testing of generated call sequences**

Call Sent	Received without error	Telecommand 1	Telecommand 2
Distress	Yes	100	126
All Ships Urgency	Yes	100	126
All Ships Safety	Yes	110	126
Individual Routine	Yes	110	126
Group Routine	Yes	100	126


## Appendix O: Harmonic distortion and rated audio frequency output power

Harmonic distortion								
Operation Mode	Temperature (°C)	Voltage (V)	Signals Level (dB $\mu$ V)	Modulated Frequency (kHz)	Test Frequency	Measured (%)	Limit (%)	Result
RX-AW	T <sub>N</sub>	V <sub>N</sub>	60	0.3	CH <sub>M</sub>	4.5	≤10	PASS
				0.5	CH <sub>M</sub>	3.1	≤10	PASS
				1.0	CH <sub>M</sub>	7.9	≤10	PASS
			100	0.3	CH <sub>M</sub>	3.5	≤10	PASS
				0.5	CH <sub>M</sub>	2.3	≤10	PASS
				1.0	CH <sub>M</sub>	8.3	≤10	PASS

rated audio frequency output power			
Test Channel	Measured (W)	Limit (W)	Result
CH <sub>M</sub>	2.368	≥2	PASS

**Appendix P:Audio frequency response**

RX-AW:CH <sub>M</sub>			
Frequency (kHz )	Output Level(V)	Reference Level at 1kHz (V)	Audio Frequency Response(dB)
0.3	1.1520	0.3824	9.58
0.4	0.9371	0.3824	7.79
0.5	0.8170	0.3824	6.59
0.6	0.6810	0.3824	5.01
0.7	0.5784	0.3824	3.59
0.8	0.5209	0.3824	2.68
0.9	0.4579	0.3824	1.57
1	0.4049	0.3824	0.50
1.2	0.3371	0.3824	-1.09
1.4	0.2957	0.3824	-2.23
1.6	0.2632	0.3824	-3.25
1.8	0.2274	0.3824	-4.51
2	0.2093	0.3824	-5.24
2.2	0.1802	0.3824	-6.53
2.55	0.1661	0.3824	-7.24
2.4	0.1690	0.3824	-7.10
2.6	0.1557	0.3824	-7.81
2.7	0.1452	0.3824	-8.41
2.8	0.1404	0.3824	-8.70
3	0.1238	0.3824	-9.80

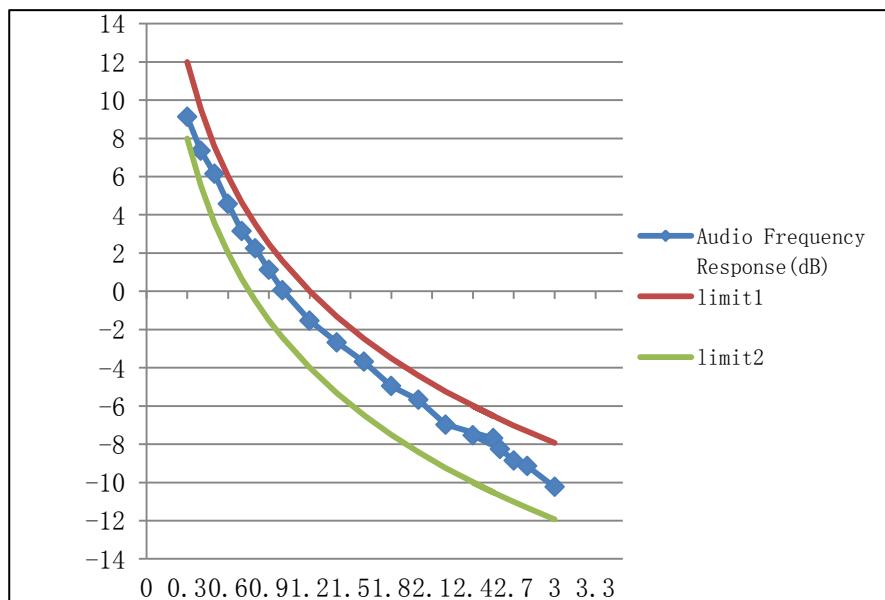**Appendix P:Audio frequency response****TEST PLOT RESULT**

**Appendix Q: Maximum Usable Sensitivity(Conducted)**

Operation Mode	Temperature	Voltage	Test Channel	Measured (dB $\mu$ V)	Limit (dB $\mu$ V)	Result
RX-AW	$T_N$	$V_N$	$CH_M$	-7.0	$\leq +6.0$	PASS
RX-AW	$T_L$	$V_L$	$CH_M$	-7.1	$\leq +12.0$	PASS
RX-AW	$T_H$	$V_H$	$CH_M$	-7.0	$\leq +12.0$	PASS

**Appendix R: Co-Channel Rejection**

Operation Mode	Test Channel	Measurement Offset (kHz)	SG B – SG A	Limit (dB)	Result
			(dB)		
RX-AW	CH <sub>M</sub>	-3	-1.3	-10 ~ 0	PASS
RX-AW	CH <sub>M</sub>	0	-3.0	-10 ~ 0	PASS
RX-AW	CH <sub>M</sub>	3	-6.5	-10 ~ 0	PASS

**Appendix S: Adjacent Channel Selectivity**

Operation Mode	Test Condition		Test Channel	Measurement Position	SGB–SGA (dB)	Limit (dB)	Result
	Temperature	Voltage					
RX-AW	T <sub>N</sub>	V <sub>N</sub>	CH <sub>M</sub>	Lower adjacent	76.9	≥70	PASS
RX-AW	T <sub>N</sub>	V <sub>N</sub>	CH <sub>M</sub>	Upper adjacent	76.1	≥70	PASS
RX-AW	T <sub>L</sub>	V <sub>L</sub>	CH <sub>M</sub>	Lower adjacent	74.6	≥60	PASS
RX-AW	T <sub>L</sub>	V <sub>L</sub>	CH <sub>M</sub>	Upper adjacent	76.6	≥60	PASS
RX-AW	T <sub>H</sub>	V <sub>H</sub>	CH <sub>M</sub>	Lower adjacent	77.3	≥60	PASS
RX-AW	T <sub>H</sub>	V <sub>H</sub>	CH <sub>M</sub>	Upper adjacent	77.9	≥60	PASS

**Appendix T: Suprious Response Rejection**

Operation Mode	Test Channel	Detect Frequency (MHz)	SG B – SG A (dB)	Limit (dB)	Result
RX-AW	CH <sub>M</sub>	166.790	105.6	≥70	PASS
RX-AW	CH <sub>M</sub>	206.750	106.8	≥70	PASS
RX-AW	CH <sub>M</sub>	256.700	108.8	≥70	PASS
RX-AW	CH <sub>M</sub>	266.690	108.6	≥70	PASS


**Appendix U: Intermodulation Response**

Operation Mode	Test Channel	Measurement Offset (kHz)		SG B/C – SG A (dB)	Limit(dB)	Result
		SG B	SG C			
RX-AW	CH <sub>M</sub>	-50	-100	69.3	≥68	PASS
RX-AW	CH <sub>M</sub>	-25	-50	69.2	≥68	PASS
RX-AW	CH <sub>M</sub>	25	50	69.6	≥68	PASS
RX-AW	CH <sub>M</sub>	50	100	69.4	≥68	PASS

**Appendix V: Blocking or Desensitization**

Operation Mode	Test Channel	Measurement Offset (MHz)	SG B – SG A (dB)	Limit (dB)	Result
RX-AW	CH <sub>M</sub>	-10	104.7	≥90	PASS
RX-AW	CH <sub>M</sub>	-5	102.9	≥90	PASS
RX-AW	CH <sub>M</sub>	-2	97.6	≥90	PASS
RX-AW	CH <sub>M</sub>	-1	98.5	≥90	PASS
RX-AW	CH <sub>M</sub>	1	101.6	≥90	PASS
RX-AW	CH <sub>M</sub>	2	102.9	≥90	PASS
RX-AW	CH <sub>M</sub>	5	102.6	≥90	PASS
RX-AW	CH <sub>M</sub>	10	102.3	≥90	PASS

## Appendix W: Conducted Spurious radiations

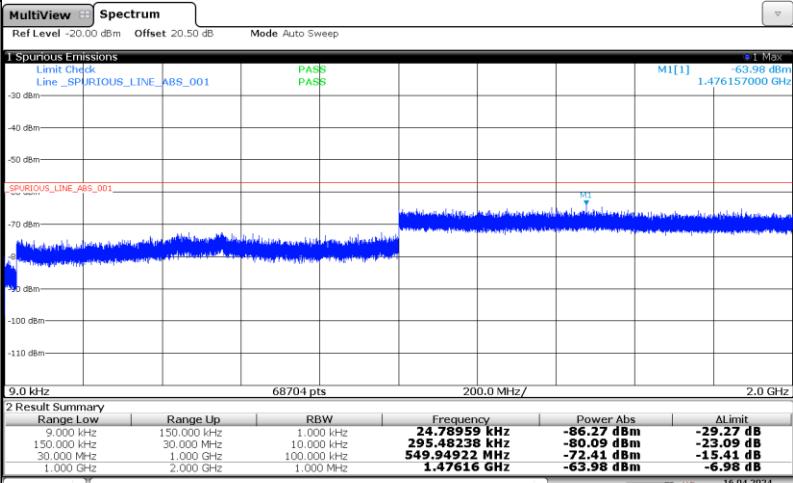Operation Mode	Test Channel	TEST PLOT RESULT																																																																						
RX-AW	CH <sub>M</sub>	<p><b>MultiView</b>  <b>Spectrum</b></p> <p>Ref Level -20.00 dBm Offset 20.50 dB Mode Auto Sweep</p> <p>1 Spurious Emissions</p> <table border="1"> <thead> <tr> <th>Line Check</th> <th>Line_SPIURIOUS_LINE_ABS_001</th> <th>PASS</th> <th>PASS</th> </tr> </thead> <tbody> <tr> <td>-30 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>-40 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>-50 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>-60 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>-70 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>-80 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>-90 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>-100 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>-110 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>9.0 kHz 68704 pts 200.0 MHz/ 2.0 GHz</p> <p>2 Result Summary</p> <table border="1"> <thead> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>Alimit</th> </tr> </thead> <tbody> <tr> <td>9.000 kHz</td> <td>150.000 kHz</td> <td>1.000 kHz</td> <td><b>24.7859 KHZ</b></td> <td><b>-86.27 dBm</b></td> <td><b>-29.27 dB</b></td> </tr> <tr> <td>150.000 kHz</td> <td>30.000 MHz</td> <td>10.000 kHz</td> <td><b>295.4922 MHz</b></td> <td><b>-86.27 dBm</b></td> <td><b>-29.27 dB</b></td> </tr> <tr> <td>30.000 MHz</td> <td>1.000 GHz</td> <td>100.000 kHz</td> <td><b>549.94922 MHz</b></td> <td><b>-72.41 dBm</b></td> <td><b>-15.41 dB</b></td> </tr> <tr> <td>1.000 GHz</td> <td>2.000 GHz</td> <td>1.000 MHz</td> <td><b>1.47616 GHz</b></td> <td><b>-63.98 dBm</b></td> <td><b>-6.98 dB</b></td> </tr> </tbody> </table> <p>Date: 16.APR.2024 11:31:41 Measuring... 16.04.2024 11:31:41</p> 	Line Check	Line_SPIURIOUS_LINE_ABS_001	PASS	PASS	-30 dBm				-40 dBm				-50 dBm				-60 dBm				-70 dBm				-80 dBm				-90 dBm				-100 dBm				-110 dBm				Range Low	Range Up	RBW	Frequency	Power Abs	Alimit	9.000 kHz	150.000 kHz	1.000 kHz	<b>24.7859 KHZ</b>	<b>-86.27 dBm</b>	<b>-29.27 dB</b>	150.000 kHz	30.000 MHz	10.000 kHz	<b>295.4922 MHz</b>	<b>-86.27 dBm</b>	<b>-29.27 dB</b>	30.000 MHz	1.000 GHz	100.000 kHz	<b>549.94922 MHz</b>	<b>-72.41 dBm</b>	<b>-15.41 dB</b>	1.000 GHz	2.000 GHz	1.000 MHz	<b>1.47616 GHz</b>	<b>-63.98 dBm</b>	<b>-6.98 dB</b>
Line Check	Line_SPIURIOUS_LINE_ABS_001	PASS	PASS																																																																					
-30 dBm																																																																								
-40 dBm																																																																								
-50 dBm																																																																								
-60 dBm																																																																								
-70 dBm																																																																								
-80 dBm																																																																								
-90 dBm																																																																								
-100 dBm																																																																								
-110 dBm																																																																								
Range Low	Range Up	RBW	Frequency	Power Abs	Alimit																																																																			
9.000 kHz	150.000 kHz	1.000 kHz	<b>24.7859 KHZ</b>	<b>-86.27 dBm</b>	<b>-29.27 dB</b>																																																																			
150.000 kHz	30.000 MHz	10.000 kHz	<b>295.4922 MHz</b>	<b>-86.27 dBm</b>	<b>-29.27 dB</b>																																																																			
30.000 MHz	1.000 GHz	100.000 kHz	<b>549.94922 MHz</b>	<b>-72.41 dBm</b>	<b>-15.41 dB</b>																																																																			
1.000 GHz	2.000 GHz	1.000 MHz	<b>1.47616 GHz</b>	<b>-63.98 dBm</b>	<b>-6.98 dB</b>																																																																			

**Appendix X: Receiver noise and hum level**

Operation Mode	Test Channel	Measured (dB)	Limit (dB)	Result
RX-AW	CH <sub>M</sub>	-41.34	≤-40	PASS

**Appendix Y:Squelch operation**

Under the conditions specified in a)

RX-AW			
Test Channel	Measured (dB)	Limit (dB)	Result
CH <sub>M</sub>	-42.79	≤-40	PASS

Under the conditions specified in b)

RX-AW			
Test Channel	Measured (dB $\mu$ V)	Limit (dB)	Result
CH <sub>M</sub>	4.10	≤+6.0	PASS

RX-AW			
Test Channel	Measured SINAD (dB)	Limit (dB $\mu$ V)	Result
CH <sub>M</sub>	22.58	≥20	PASS

Under the conditions specified in c)

RX-AW			
Test Channel	Measured (dB $\mu$ V)	Limit (dB $\mu$ V)	Result
CH <sub>M</sub>	4.6	≤+6.0	PASS

**Appendix Z:Squelch hysteresis**

RX-AW			
Test Channel	Measured (dB)	Limit (dB)	Result
CH <sub>M</sub>	4.76	3~6	PASS

**Appendix AA:Multiple watch characteristic**

Scanning Period:

Operation Mode	Test Condition		Test Channel	Measured(s)	Limit (s)	Result
	Temperature ( °C )	Voltage (V )				
RX-AW	T <sub>N</sub>	V <sub>N</sub>	CH <sub>M</sub>	1.23	≤2	PASS
	T <sub>L</sub>	V <sub>L</sub>	CH <sub>M</sub>	1.36	≤2	PASS
	T <sub>H</sub>	V <sub>H</sub>	CH <sub>M</sub>	1.22	≤2	PASS

Dwell Time:

Operation Mode	Test Condition		Test Channel	Measured(ms)	Limit (ms)	Result
	Temperature ( °C )	Voltage (V )				
RX-AW	T <sub>N</sub>	V <sub>N</sub>	CH <sub>M</sub>	103	150	PASS
	T <sub>L</sub>	V <sub>L</sub>	CH <sub>M</sub>	91	150	PASS
	T <sub>H</sub>	V <sub>H</sub>	CH <sub>M</sub>	113	150	PASS

Dwell time on the additional channel:

Operation Mode	Test Condition		Test Channel	Measured(s)	Limit (s)	Result
	Temperature ( °C )	Voltage (V )				
RX-AW	T <sub>N</sub>	V <sub>N</sub>	CH <sub>M</sub>	1.33	0.85~2	PASS
	T <sub>L</sub>	V <sub>L</sub>	CH <sub>M</sub>	1.22	0.85~2	PASS
	T <sub>H</sub>	V <sub>H</sub>	CH <sub>M</sub>	1.39	0.85~2	PASS

**Appendix AB: Maximum Usable Sensitivity**

Operation Mode	Temperature	Voltage	Test Channel	Measured (error ratio)	Limit (error ratio)	Result
RX-DSC	$T_N$	$V_N$	$CH_{M1}$	0.003	$\leq 10^{-2}$	PASS
RX-DSC	$T_L$	$V_L$	$CH_{M1}$	0.003	$\leq 10^{-2}$	PASS
RX-DSC	$T_H$	$V_H$	$CH_{M1}$	0.002	$\leq 10^{-2}$	PASS

**Appendix AC: Co-Channel Rejection**

Operation Mode	Test Channel	Measurement Offset (kHz)	Measured (error ratio)	Limit (error ratio)	Result
RX-DSC	CH <sub>M1</sub>	-3	0.004	$\leq 10^{-2}$	PASS
RX-DSC	CH <sub>M1</sub>	0	0.003	$\leq 10^{-2}$	PASS
RX-DSC	CH <sub>M1</sub>	3	0.006	$\leq 10^{-2}$	PASS

**Appendix AD: Adjacent channel selectivity**

Operation Mode	Test Condition		Test Channel	Measurement Position	Measured (error ratio)	Limit (error ratio)	Result
	Temperature	Voltage					
RX-DSC	T <sub>N</sub>	V <sub>N</sub>	CH <sub>M1</sub>	Lower adjacent	0.005	$\leq 10^{-2}$	PASS
RX-DSC	T <sub>N</sub>	V <sub>N</sub>	CH <sub>M1</sub>	Upper adjacent	0.004	$\leq 10^{-2}$	PASS
RX-DSC	T <sub>L</sub>	V <sub>L</sub>	CH <sub>M1</sub>	Lower adjacent	0.005	$\leq 10^{-2}$	PASS
RX-DSC	T <sub>L</sub>	V <sub>L</sub>	CH <sub>M1</sub>	Upper adjacent	0.003	$\leq 10^{-2}$	PASS
RX-DSC	T <sub>H</sub>	V <sub>H</sub>	CH <sub>M1</sub>	Lower adjacent	0.003	$\leq 10^{-2}$	PASS
RX-DSC	T <sub>H</sub>	V <sub>H</sub>	CH <sub>M1</sub>	Upper adjacent	0.007	$\leq 10^{-2}$	PASS

### Appendix AE: Spurious response and blocking immunity

Spurious response:

Operation Mode	Test Channel	Spurious Frequency (MHz)	Measured (error ratio)	Limit (error ratio)	Result
RX-DSC	CH <sub>M1</sub>	166.515	0.006	$\leq 10^{-2}$	PASS
		206.475	0.005		
		256.425	0.004		
		266.415	0.004		

Blocking immunity:

Operation Mode	Test Channel	Measurement Offset (MHz)	Measured (error ratio)	Limit (error ratio)	Result
RX-DSC	CH <sub>M1</sub>	-10	0.001	$\leq 10^{-2}$	PASS
		-5	0.002		
		-2	0.004		
		-1	0.005		
		1	0.005		
		2	0.006		
		5	0.003		
		10	0.003		

**Appendix AF: Intermodulation response**

Operation Mode	Test Channel	Measurement Offset (kHz)		Measured (error ratio)	Limit (error ratio)	Result
		SG B	SG C			
RX-DSC	CH <sub>M1</sub>	-50	-100	0.005	$\leq 10^{-2}$	PASS
		50	100	0.003	$\leq 10^{-2}$	PASS

**Appendix AG: Dynamic range**

Operation Mode	Test Channel	Measured (error ratio)	Limit (error ratio)	Result
RX-DSC	CH <sub>M1</sub>	0.003	$\leq 10^{-2}$	PASS

## Appendix AH: spurious emissions

Operation Mode	Test Channel	TEST PLOT RESULT																																														
RX-DSC	CH <sub>M1</sub>	<p><b>Spectrum</b></p> <p>Ref Level -20.00 dBm Offset 20.50 dB Mode Auto Sweep</p> <p>1 Spurious Emissions</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Limit Check</th> <th>Line_Spurious_Line_ABS_001</th> <th>PASS</th> <th>PASS</th> <th>M1[1]</th> <th>1.476157000 GHz</th> <th>-63.98 dBm</th> </tr> </thead> <tbody> <tr> <td>SPURIOUS_LINE_ABS_001</td> <td>Line_Spurious_Line_ABS_001</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>2 Result Summary</p> <table border="1"> <thead> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>ΔLimit</th> </tr> </thead> <tbody> <tr> <td>9.000 kHz</td> <td>150.000 kHz</td> <td>1.000 kHz</td> <td><b>24.78959 kHz</b></td> <td><b>-86.27 dBm</b></td> <td><b>-29.27 dB</b></td> </tr> <tr> <td>150.000 kHz</td> <td>30.000 MHz</td> <td>10.000 kHz</td> <td><b>255.44922 MHz</b></td> <td><b>-80.41 dBm</b></td> <td><b>-23.41 dB</b></td> </tr> <tr> <td>30.000 MHz</td> <td>1.000 GHz</td> <td>100.000 kHz</td> <td><b>549.94922 MHz</b></td> <td><b>-72.41 dBm</b></td> <td><b>-15.41 dB</b></td> </tr> <tr> <td>1.000 GHz</td> <td>2.000 GHz</td> <td>1.000 MHz</td> <td><b>1.47616 GHz</b></td> <td><b>-63.98 dBm</b></td> <td><b>-6.98 dB</b></td> </tr> </tbody> </table> <p>Date: 16.APR.2024 11:31:41</p> <p>Measuring... 16.04.2024 11:31:41</p>	Line	Limit Check	Line_Spurious_Line_ABS_001	PASS	PASS	M1[1]	1.476157000 GHz	-63.98 dBm	SPURIOUS_LINE_ABS_001	Line_Spurious_Line_ABS_001							Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit	9.000 kHz	150.000 kHz	1.000 kHz	<b>24.78959 kHz</b>	<b>-86.27 dBm</b>	<b>-29.27 dB</b>	150.000 kHz	30.000 MHz	10.000 kHz	<b>255.44922 MHz</b>	<b>-80.41 dBm</b>	<b>-23.41 dB</b>	30.000 MHz	1.000 GHz	100.000 kHz	<b>549.94922 MHz</b>	<b>-72.41 dBm</b>	<b>-15.41 dB</b>	1.000 GHz	2.000 GHz	1.000 MHz	<b>1.47616 GHz</b>	<b>-63.98 dBm</b>	<b>-6.98 dB</b>
Line	Limit Check	Line_Spurious_Line_ABS_001	PASS	PASS	M1[1]	1.476157000 GHz	-63.98 dBm																																									
SPURIOUS_LINE_ABS_001	Line_Spurious_Line_ABS_001																																															
Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit																																											
9.000 kHz	150.000 kHz	1.000 kHz	<b>24.78959 kHz</b>	<b>-86.27 dBm</b>	<b>-29.27 dB</b>																																											
150.000 kHz	30.000 MHz	10.000 kHz	<b>255.44922 MHz</b>	<b>-80.41 dBm</b>	<b>-23.41 dB</b>																																											
30.000 MHz	1.000 GHz	100.000 kHz	<b>549.94922 MHz</b>	<b>-72.41 dBm</b>	<b>-15.41 dB</b>																																											
1.000 GHz	2.000 GHz	1.000 MHz	<b>1.47616 GHz</b>	<b>-63.98 dBm</b>	<b>-6.98 dB</b>																																											

**Appendix AI: Verification of correct decoding of various types of DSC calls**

Call Sent	Received (Y or N)	Telecommand 1	Telecommand 2
Distress	Y	100	126
All Ships Distress Ack	Y	100	126
All Ships Distress Relay	Y	110	126
All Ships Urgency	Y	100	126
All Ships Safety	Y	110	126
Individual Urgency	Y	100	126
Individual Safety	Y	110	126
Individual Routine	Y	110	126
Group Routine	Y	100	126

Function Check	Result
Confirm that the decoded call sequences at the output of the receiver have been examined for correct technical format, including error check characteristics.	Yes
Errors found:	No
Confirm that the checks have been made to ensure accordance between printer output and display	Yes
Errors found:	No
It has been verified that the equipment is capable of switching to a channel identified in the DSC call:	Yes

**Appendix AJ: Reaction to VTS and AIS channel management DSC transmissions**

Function Check	Received (Y or N)
Not sound an alarm	Y
Not display a message (An accurate informative display is permissible but not required)	Y
Not transmit a response	Y
Not suggest a transmitted response	Y
Not lock up	Y
Not require operator intervention	Y

**Appendix AK: Simultaneous reception**

Operation Mode	Test Channel	Measured SINAD(dB)	Limit (dB)	Result
RX-AW	CH <sub>M</sub>	22.38	≥20	PASS

Operation Mode	Test Channel	Measured (error ratio)	Limit ((error ratio))	Result
RX-DSC	CH <sub>M1</sub>	0.004	≤10 <sup>-2</sup>	PASS

-----End of Report-----