


# TEST REPORT

## For EMC

Report Reference No.....	CHTW24050031	Report verification : 
Project No.....	SHT2402046704W	
FCC ID .....	K6630703X30	
Applicant's name .....	YAESU MUSEN CO., LTD.	
Address.....	Omori Bellport D building 3F, 6-26-3 Minamioi, Shinagawa-ku, Tokyo 140-0013 Japan	
Test item description .....	Class-H DSC GPS Transceiver	
Trade Mark .....	-	
Model/Type reference.....	HX891BT	
Listed Model(s) .....	-	
Standard .....	IEC60945:2002	
Date of receipt of test sample.....	Mar.27, 2024	
Date of testing.....	Mar.28, 2024 - May.07, 2024	
Date of issue.....	May.16, 2024	
Result.....	PASS	
Compiled by ( position+printed name+signature)...	File administrators Caspar Chen	
Supervised by ( position+printed name+signature)...	Project Engineer Caspar Chen	
Approved by (position+printed name+signature)....	RF Manager Xu Yang	
Testing Laboratory Name .....	Shenzhen Huatongwei International Inspection Co., Ltd.	
Address.....	Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China	
<b>Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.</b>		
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.		
<i>The test report merely corresponds to the test sample.</i>		

## Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	3
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	4
<u>3.</u>	<u>SUMMARY</u>	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	EUT operation mode	6
3.4.	Support unit used in test configuration and system	6
<u>4.</u>	<u>TEST ENVIRONMENT</u>	7
4.1.	Address of the test laboratory	7
4.2.	Environmental conditions	7
4.3.	Statement of the measurement uncertainty	7
4.4.	Equipments Used during the Test	8
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	10
5.1.	EMISSION	10
5.1.1.	Conducted Emissions	10
5.1.2.	Radiated Emission	11
5.2.	IMMUNITY	15
5.2.1.	Conducted radio frequency disturbance	16
5.2.2.	Radiated radio frequencies	17
5.2.3.	Power supply transients	18
5.2.4.	Power supply variations and failure	19
5.2.5.	Electrostatic Discharge	20
5.3.	Environmental Test	23
5.3.1.	Dry heat	23
5.3.2.	Damp heat	23
5.3.3.	Low temperature	24
5.3.4.	Vibration	24
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	25
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	26

## 1. **Test standards and Report version**

### 1.1. **Test Standards**

The tests were performed according to following standards:

[IEC60945:2002](#)—Maritime navigation and radiocommunication equipment and systems -General requirements  
-Methods of testing and required test result

### 1.2. **Report version**

Version No.	Date of issue	Description
N/A	2024-05-16	Original

## 2. Test Description

Emission			
Test item	Standards requirement (ETSI EN 300 698)	Result	Test Engineer
Conducted emissions	Sub-clause 9.2	N/A	-
Radiated emissions	Sub-clause 9.3	Pass	Yifan Wang
Immunity			
Test item	Standards requirement (ETSI EN 300 698)	Result	Test Engineer
Conducted radio frequency disturbance	Sub-clause 10.3	N/A	-
Radiated disturbance	Sub-clause 10.4	Pass	Jianjun Liang
Power supply transients	Sub-clause 10.7	N/A	-
Power supply variations and failure	Sub-clause 10.8	N/A	-
Electrostatic discharge	Sub-clause 10.9	Pass	Jian Li
Environmental Test			
Test item	Standards requirement (ETSI EN 300 698)	Result	Test Engineer
Dry heat	Sub-clause 8.2	Pass	Yifan Wang
Damp heat	Sub-clause 8.3	Pass	Yifan Wang
Low temperature	Sub-clause 8.4	Pass	Yifan Wang
Vibration	Sub-clause 8.7	Pass	Yifan Wang

Note: The measurement uncertainty is not included in the test result.

### 3. Summary

#### 3.1. Client Information

Applicant:	YAESU MUSEN CO., LTD.
Address:	Omori Bellport D building 3F, 6-26-3 Minamioi, Shinagawa-ku, Tokyo 140-0013 Japan
Manufacturer:	YAESU MUSEN CO., LTD.
Address:	Omori Bellport D building 3F, 6-26-3 Minamioi, Shinagawa-ku, Tokyo 140-0013 Japan

#### 3.2. Product Description

Main unit		
Name of EUT:	Class-H DSC GPS Transceiver	
Trade mark:	-	
Mode No.:	HX891BT	
Listed Model(s):	-	
Power supply:	DC 7.4V from battery	
Hardware Version:	207980B	
Software Version:	V1.00	
RF Specification		
Operation Frequency Range:	TX:156.050MHz to 157.425MHz RX:156.050MHz to 162.000MHz	
Rated Output Power:	<input checked="" type="checkbox"/> High Power: 6W <input checked="" type="checkbox"/> Low Power: 1W	
Modulation Type:	Analog:	FM
	Digital Data(DSC):	AFSK
Channel Separation:	Analog:	<input checked="" type="checkbox"/> 25kHz
	Digital Data(DSC):	<input checked="" type="checkbox"/> 25kHz
Emission Designator: * <sup>1</sup>	Analog:	16K0G3E
	Digital Data(DSC):	16K0G2B
Antenna Type:	1/4λ Helical whip	

Note:

(1) \*<sup>1</sup> According to FCC Part 2.202 requirements, the Necessary Bandwidth is calculated as follows:

- For FM Voice Modulation  
Channel Spacing = 25 KHz, D = 5KHz max, K = 1, M = 3KHz  
 $Bn = 2M + 2DK = 2*3 + 2*5*1 = 16 \text{ KHz}$   
Emission designation: 16K0G3E
- Digital Data(DSC)  
Channel Spacing = 25 KHz, D = 5KHz max, K = 1, M = 3KHz  
 $Bn = 2M + 2DK = 2*3 + 2*5*1 = 16 \text{ KHz}$   
Emission designation: 16K0G2B

### 3.3. EUT operation mode

Test mode	Transmitting	Receiving	Power level	
			High	Low
TX-AWH	√		√	
TX-AWL	√			√
RX-AW		√		

### 3.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?			
✓ No			
Item	Equipment	Trade Name	Model No.
1			
2			

## 4. Test Environment

### 4.1. Address of the test laboratory

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China	
Connect information:	Tel: 86-755-26715499 E-mail: <a href="mailto:cs@szhtw.com.cn">cs@szhtw.com.cn</a> <a href="http://www.szhtw.com.cn">http://www.szhtw.com.cn</a>	
Qualifications	Type	Accreditation Number
	FCC Registration Number	762235
	FCC Designation Number	CN1181

### 4.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity	55 %
Air Pressure	989 hPa

### 4.3. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	Radiated Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz
2	Radio frequency electromagnetic field 80-6000MHz	12.3%
3	Electrostatic Discharge	-
4	Temperature	1°C
5	Humidity	5%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

#### 4.4. Equipments Used during the Test

● Radiated Emission-9kHz~30MHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/4/6	2026/4/5
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2023/08/22	2024/08/21
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2024/04/08	2027/04/07
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated Emission-30MHz~1GHz 3M							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/4/6	2026/4/5
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2023/08/22	2024/08/21
●	Ultra-Broadband Antenna	SCHWARZBEC K	HTWE0119	VULB9163	546	2023/2/22	2026/2/21
●	Pre-Amplifier	SCHWARZBEC K	HTWE0295	BBV 9742	/	2023/5/25	2024/5/24
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated emission-Above 1GHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2023/4/17	2026/4/16
●	Spectrum Analyzer	R&S	<a href="#">HTWE0098</a>	FSP40	100597	2023/08/22	2024/08/21
●	Horn Antenna	SCHWARZBEC K	HTWE0126	BBHA 9120D	1011	2023/2/14	2026/2/13
●	Horn Antenna	SCHWARZBEC K	HTWE0103	BBHA9170	BBHA9170472	2023/2/20	2026/2/19
●	Broadband Pre-amplifier	SCHWARZBEC K	HTWE0201	BBV 9718	9718-248	2023/5/25	2024/5/24
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Electrostatic Discharge							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	ESD Simulator	EM TEST	HTWE0500	esd NX30.1	11971	2023/5/26	2024/5/25

● Radio Frequency Electromagnetic Field							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Anechoic Chamber	CRT	HTWE0418	8.0*5.0*4.0 m	CRTSAC845	2023/3/18	2028/3/17
●	Signal Generator	R&S	HTWE0276	SMB100A	114360	2023/5/23	2024/5/22
●	Amplifier	R&S	HTWE0277	BBA150-BC500	102664	2023/6/5	2024/6/4
●	Amplifier	R&S	<a href="#">HTWE0395</a>	BBA150 D400	104197	2023/6/5	2024/6/4
●	Amplifier	R&S	HTWE0396	BBA150 E400	104198	2023/6/5	2024/6/4

●	Power Head	R&S	HTWE0278	NRP18A	101010	2023/5/23	2024/5/22
●	Power Head	R&S	HTWE0389	NRP18A	101386	2024/03/14	2025/03/13
●	Transmit Antenna	Schwarzbeck	HTWE0280	STLP9129	00044	2023/8/25	2024/8/24
●	Field Probe	ETS-LINDGREN	HTWE0321	HI-6153	00130812	2023/11/17	2024/11/16
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

### ● Auxiliary Equipment

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
○	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2023/08/25	2024/08/24
●	RF Communication Test Set	HP	HTWE0038	8920A	3813A10206	2023/08/22	2024/08/21
○	Digital intercom communication tester	Aeroflex	HTWE0255	3920B	1001682041	2023/08/22	2024/08/21
○	Audio analyzer	R&S	HTWE3008	UPV	101371	2023/09/29	2024/09/28

## 5. Test conditions and Results

### 5.1. EMISSION


#### 5.1.1. Conducted Emissions

##### LIMIT

Please refer to IEC60945 Clause 9.1, Table 5

Conducted emissions (9.2)	10 kHz – 150 kHz	63 mV – 0,3 mV (96 dB $\mu$ V – 50 dB $\mu$ V)
	150 kHz – 350 kHz	1 mV – 0,3 mV (60 dB $\mu$ V – 50 dB $\mu$ V)
	350 kHz – 30 MHz	0,3 mV (50 dB $\mu$ V)

#### TEST CONFIGURATION

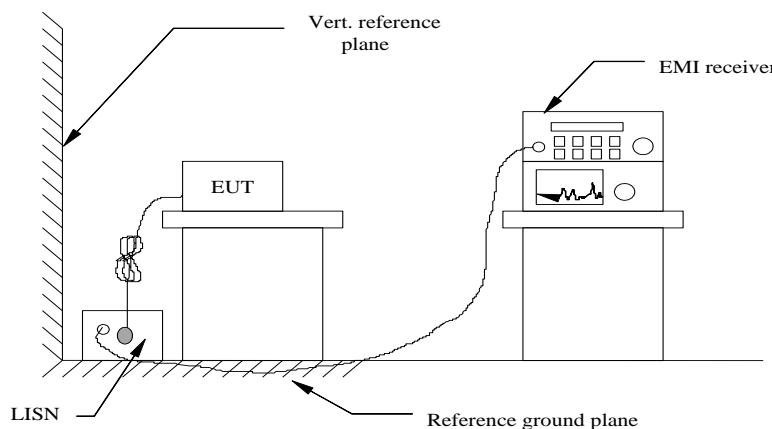

#### TEST PROCEDURE

Please refer to IEC60945 Clause 9.2.2 for the measurement methods

#### TEST MODE:

Please reference to the section 3.3

#### TEST RESULTS

Passed       Not Applicable

## 5.1.2. Radiated Emission


### LIMIT

Please refer to IEC60945 Clause 9.1, Table 5


Radiated emissions (9.3)	150 kHz – 300 kHz 300 kHz – 30 MHz 30 MHz – 2 GHz 156 MHz – 165 MHz	10 mV/m – 316 $\mu$ V/m (80 dB $\mu$ V/m – 52 dB $\mu$ V/m) 316 $\mu$ V/m – 50 $\mu$ V/m (52 dB $\mu$ V/m – 34 dB $\mu$ V/m) 500 $\mu$ V/m (54 dB $\mu$ V/m) except for 16 $\mu$ V/m (24 dB $\mu$ V/m) quasi-peak or 32 $\mu$ V/m (30 dB $\mu$ V/m) peak
--------------------------	--	--

### TEST CONFIGURATION

- below 30MHz:

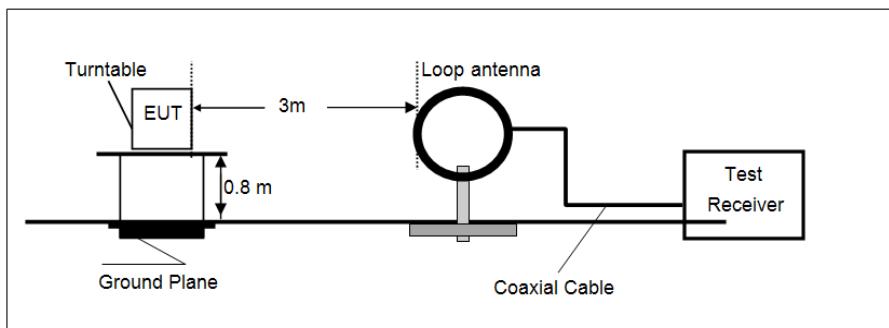

- Above 30MHz

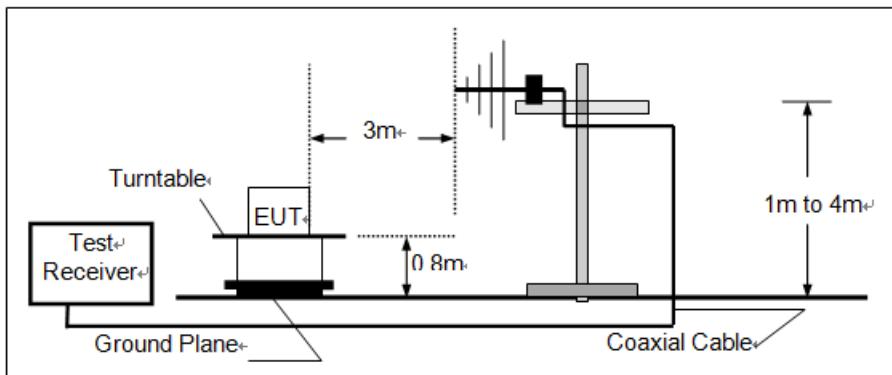

### TEST PROCEDURE

Please refer to IEC60945 Clause 9.3.2 for the measurement methods


### TEST MODE:

Please refer to the Clause 3.3


### TEST RESULTS

Passed       Not Applicable

RX-AW mode

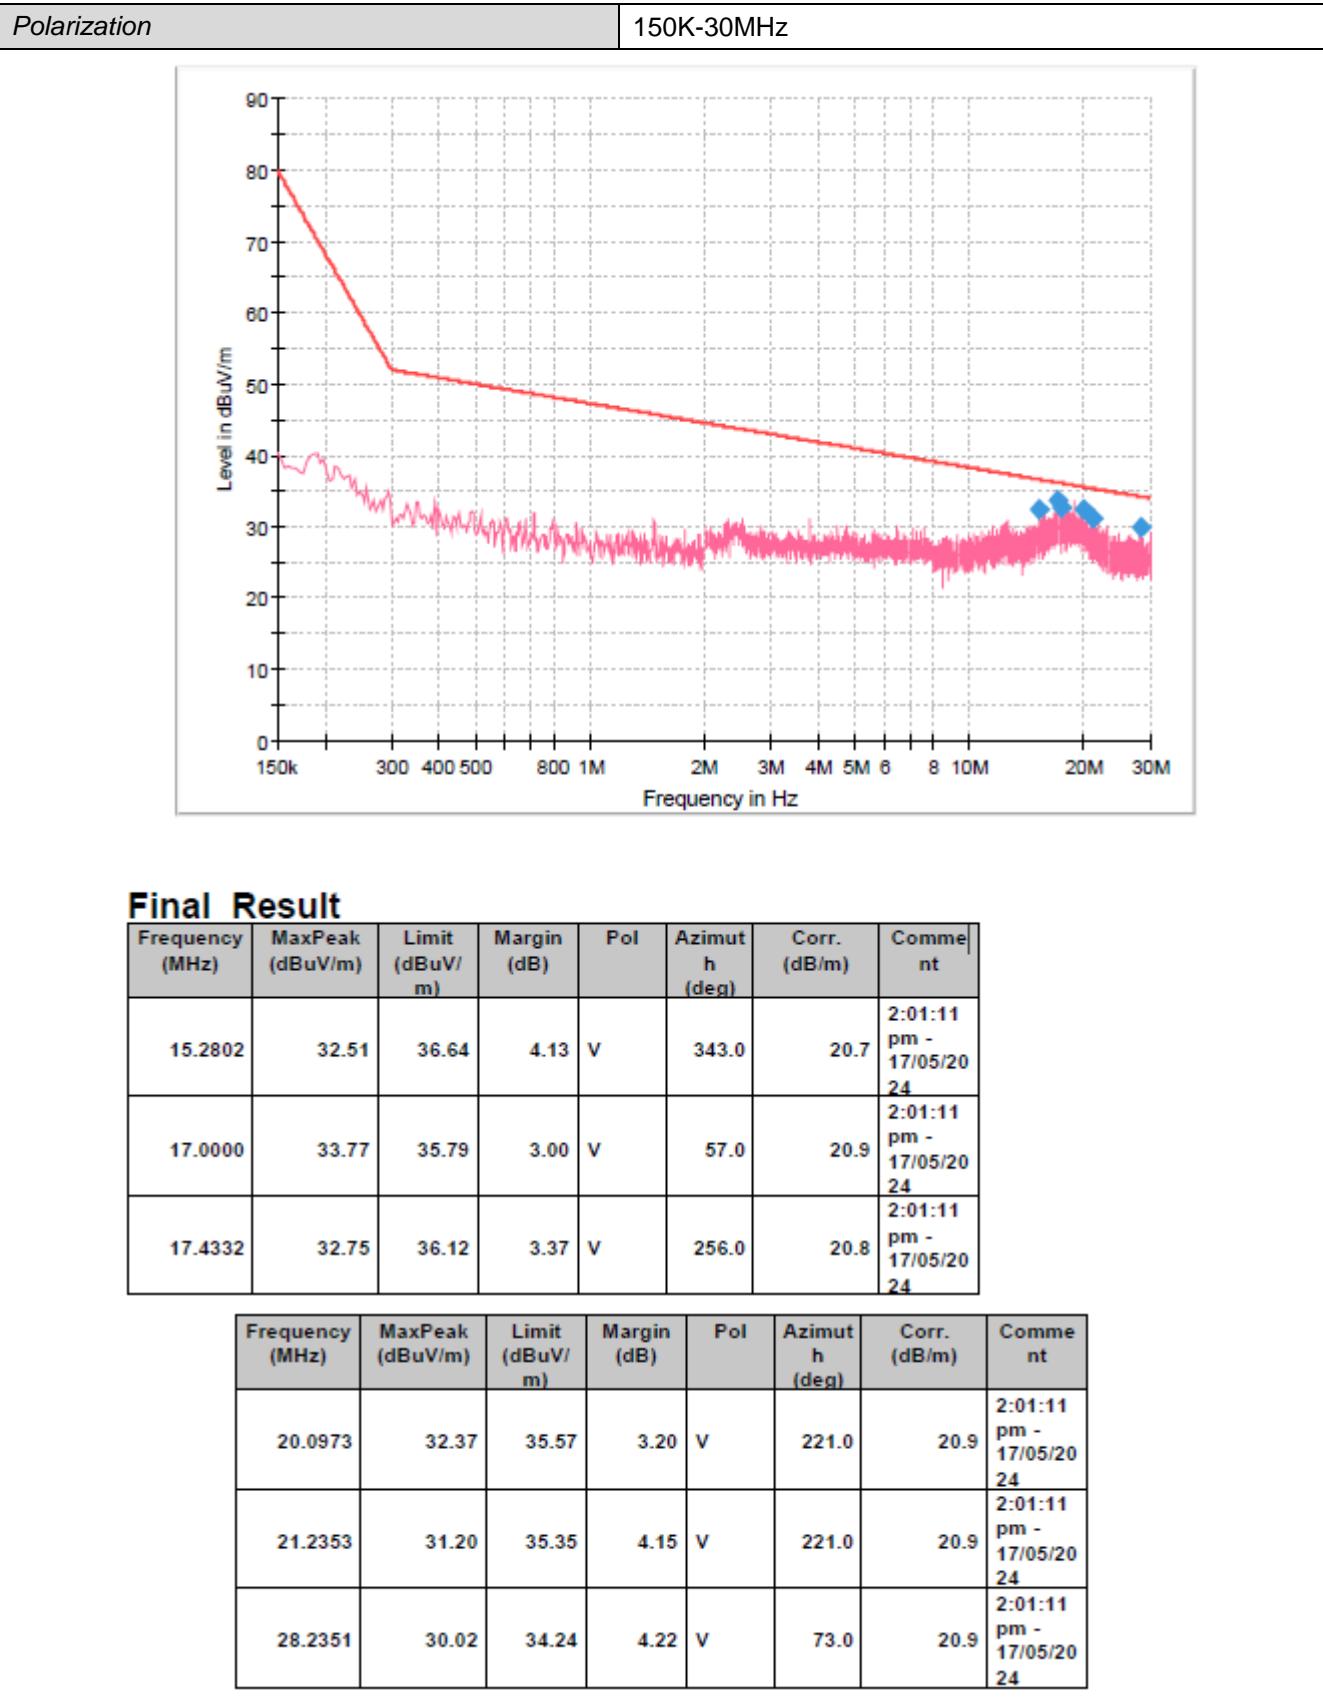


RX-AW mode

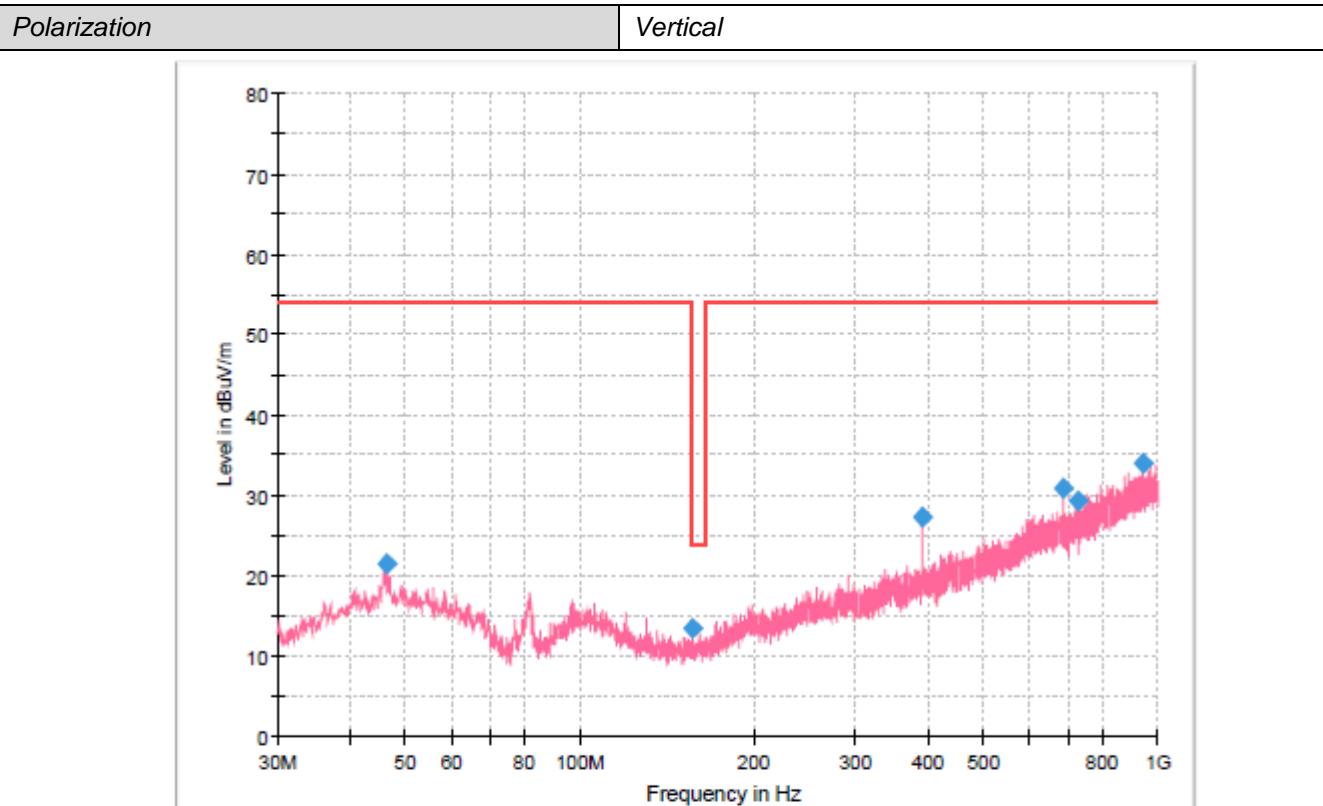

### Final Result


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.2475	21.51	54.00	32.49	100.0	V	285.0	-8.8
157.0700	13.30	24.00	10.70	100.0	V	178.0	-13.8
391.3250	27.18	54.00	26.82	100.0	V	178.0	-4.8
687.5388	30.79	54.00	23.21	100.0	V	222.0	2.1
728.4000	29.33	54.00	24.67	100.0	V	103.0	3.1
945.3163	33.97	54.00	20.03	100.0	V	222.0	7.1

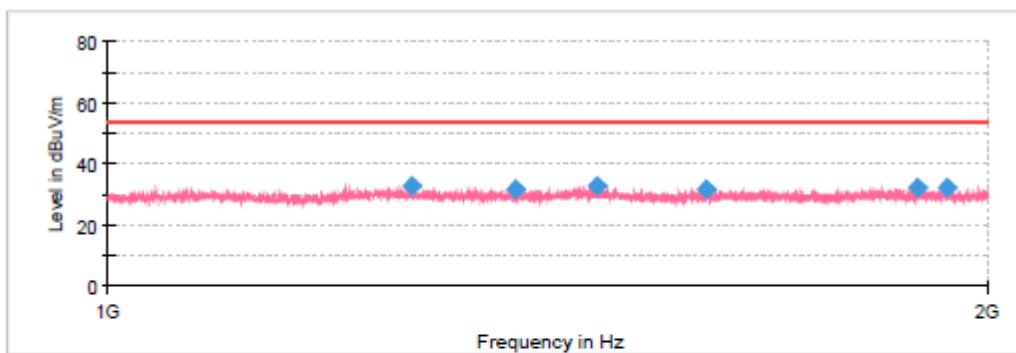

### Final Result


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1270.0000	32.74	---	54.00	21.26	150.0	V	151.0	-13.3
1379.0000	31.90	---	54.00	22.10	150.0	V	302.0	-13.0
1469.8750	33.00	---	54.00	21.00	150.0	V	283.0	-13.2
1601.2500	31.71	---	54.00	22.29	150.0	V	261.0	-13.7
1893.3750	32.14	---	54.00	21.86	150.0	V	338.0	-12.7
1938.0000	32.34	---	54.00	21.66	150.0	V	315.0	-12.5

RX-AW mode

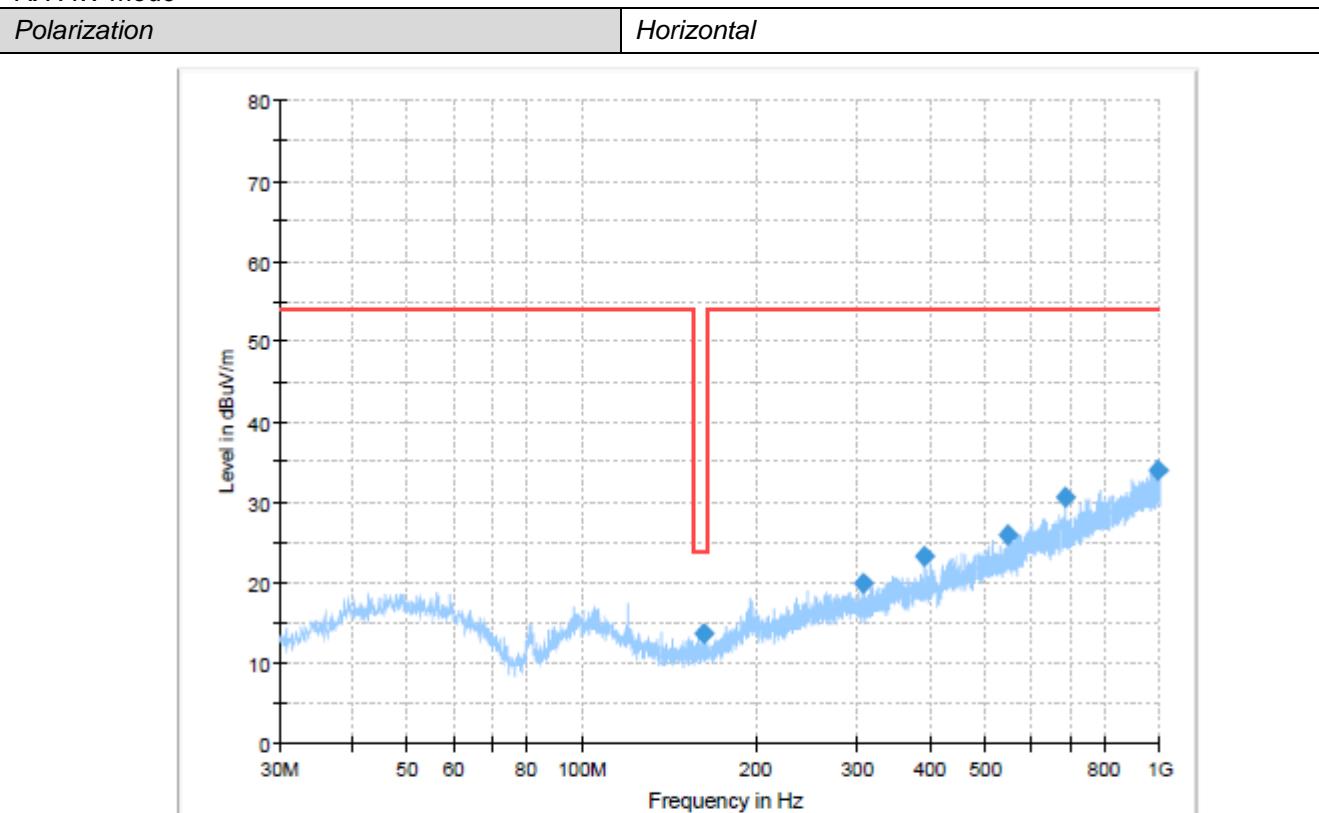

### Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
163.2538	13.61	24.00	10.39	300.0	H	161.0	-13.6
308.0263	19.90	54.00	34.10	100.0	H	255.0	-7.4
391.3250	23.21	54.00	30.79	100.0	H	71.0	-4.8
545.4338	25.90	54.00	28.10	100.0	H	10.0	-1.1
687.5388	30.70	54.00	23.30	100.0	H	306.0	2.1
990.7850	33.93	54.00	20.07	300.0	H	294.0	8.0

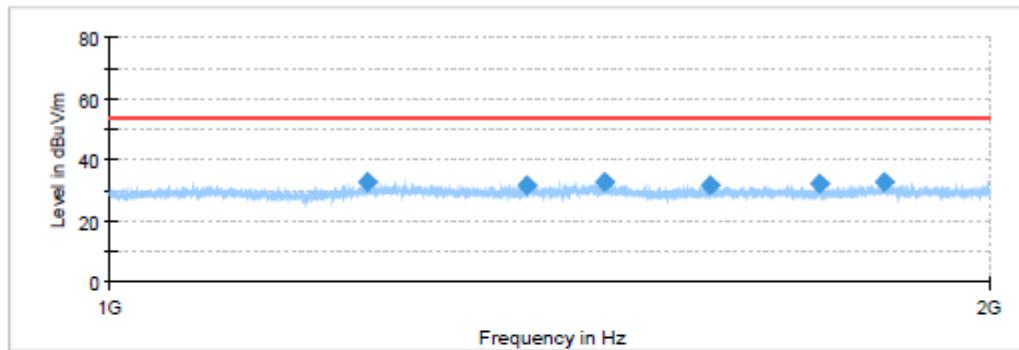

### Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1224.7500	32.99	---	54.00	21.01	150.0	H	18.0	-13.7
1389.3750	31.88	---	54.00	22.12	150.0	H	338.0	-13.0
1476.0000	32.81	---	54.00	21.19	150.0	H	182.0	-13.2
1604.0000	31.92	---	54.00	22.08	150.0	H	114.0	-13.7
1747.8750	32.26	---	54.00	21.74	150.0	H	64.0	-13.4
1840.3750	32.66	---	54.00	21.34	150.0	H	305.0	-13.0

## 5.2. IMMUNITY

### Performance criteria

No change of the actual operational states of the test objects is allowed. However, temporary change is allowed during the power supply failure test.

In addition, the following generic acceptance criteria for compliance were in force during the EMC immunity testing:


- Performance Criterion A: (For continuous phenomena): The EUT shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed as defined in the relevant equipment standard and in the technical specification published by the manufacturer.
- Performance Criterion B: (For transient phenomena): The EUT shall continue to operate as intended after the tests. No degradation of performance or loss of function is allowed as defined in the technical specification published by the manufacturer. During the test, degradation or loss of function or performance which is self-recoverable is, however, allowed but no change of actual operating state or stored data is allowed.
- Performance Criterion C: Temporary degradation or loss of function or performance is allowed during and after the test, provided the function is selfrecoverable, or can be restored by the operation of the controls as defined in the relevant equipment standard and in the technical specification published by the manufacturer.

### 5.2.1. Conducted radio frequency disturbance

#### PERFORMANCE CRITERION

Performance criterion: A.

#### TEST CONFIGURATION

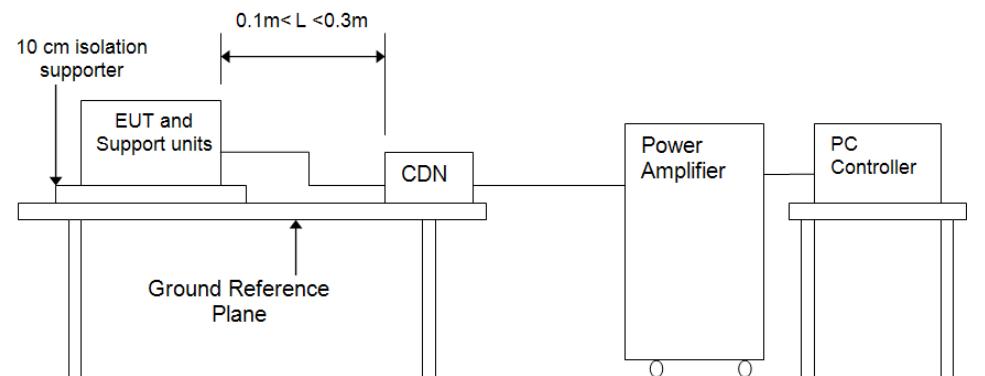

#### TEST PROCEDURE

Please refer to IEC60945 Clause 10.3.2 for the measurement methods

#### TEST MODE

Please reference to the section 3.3

#### TEST RESULTS


Passed       Not Applicable

## 5.2.2. Radiated radio frequencies

### PERFORMANCE CRITERION

Criteria A

### TEST CONFIGURATION

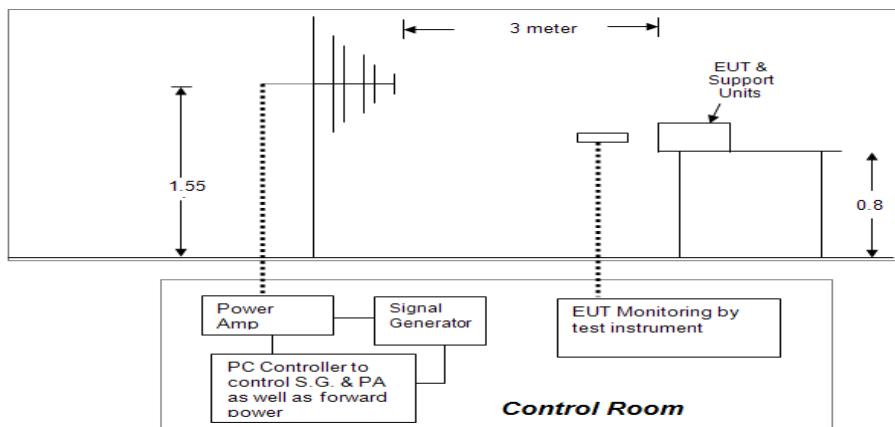

### TEST PROCEDURE

Please refer to IEC60945 Clause 10.4.2 for the measurement methods

### TEST MODE

Please reference to the section 3.3

### TEST RESULTS

Passed       Not Applicable

Please refer to the below test data:

Test mode	All modes					
Frequency	Level	Modulation	Antenna Polarization	EUT Face	Observations (Performance Criterion)	Result
80 MHz-2 GHz	10 V/m	400 Hz sine wave, 80 % AM, 1 % increment, dwell time=3seconds	V	Front	A	Pass
			H		A	Pass
			V	Rear	A	Pass
			H		A	Pass
			V	Left	A	Pass
			H		A	Pass
			V	Right	A	Pass
			H		A	Pass
			V	Top	A	Pass
			H		A	Pass
			V	Bottom	A	Pass
			H		A	Pass


Remark: A: No degradation in performance of the EUT was observed.

### 5.2.3. Power supply transients

#### PERFORMANCE CRITERION

Criteria B

#### TEST CONFIGURATION

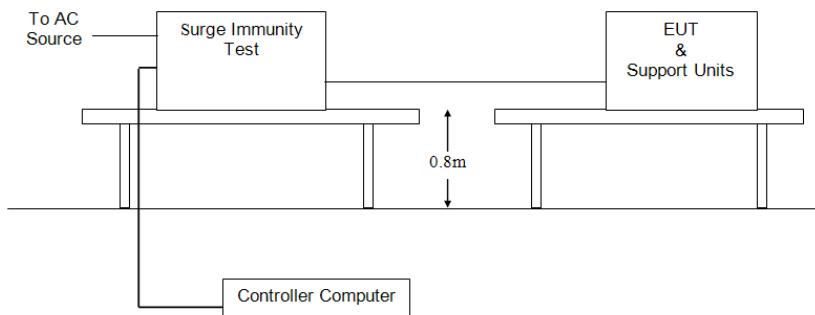

#### TEST PROCEDURE

Please refer to IEC60945 Clause 10.6.2 for the measurement methods

#### TEST MODE

Please reference to the section 3.3

#### TEST RESULTS

Passed       Not Applicable

**Note: EUT belongs to DC power supply**


### 5.2.4. Power supply variations and failure

#### **PERFORMANCE CRITERION**

Criteria A for Power supply variations

Criteria C for Power supply failure

#### **TEST CONFIGURATION**

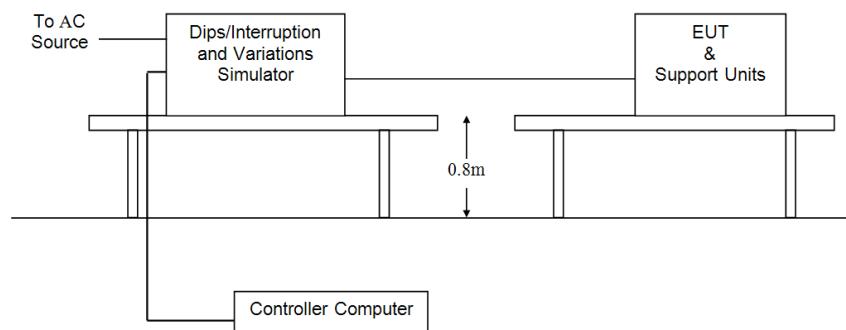

#### **TEST PROCEDURE**

Please refer to IEC60945 Clause 10.7.3 and 10.8.3 for the measurement methods

#### **TEST MODE**

Please reference to the section 3.3

#### **TEST RESULTS**

Passed       Not Applicable


**Note:EUT belongs to DC power supply**

### 5.2.5. Electrostatic Discharge

#### PERFORMANCE CRITERION

Criteria B

#### TEST CONFIGURATION

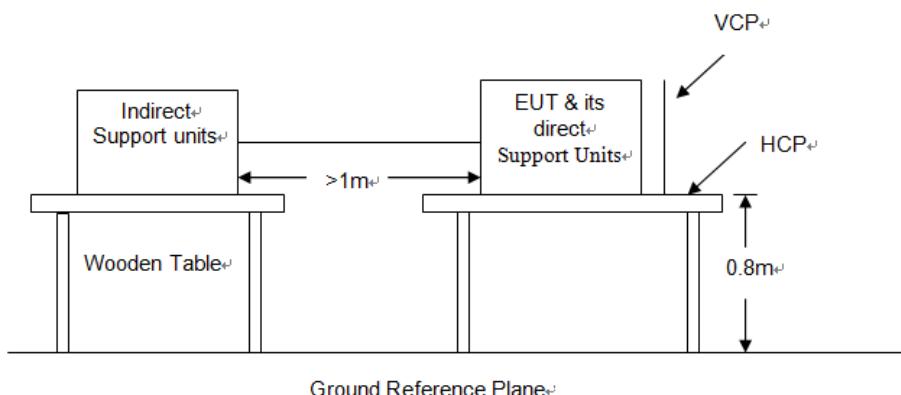

#### TEST PROCEDURE

Please refer to IEC60945 Clause 10.9.2 for the measurement methods

##### Contact Discharge:

The ESD generator is held perpendicular to the surface to which the discharge is applied and the tip of the discharge electrode touch the surface of EUT. Then turn the discharge switch. The generator is then re-triggered for a new single discharge and repeated at least 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

##### Air Discharge:

Air discharge is used where contact discharge can't be applied. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated at least 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

##### Indirect discharge for horizontal coupling plane:

At least 10 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT.

##### Indirect discharge for vertical coupling plane:

At least 10 single discharges shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

#### TEST MODE

Please reference to the section 3.3

#### TEST RESULTS

Passed

Not Applicable

Test mode	All modes			
<b>Direct discharge</b>				
Type of discharge	Discharge voltage (kV)	Observations Performance	CriteriaLevel	Result
Contact discharge	$\pm 2$	No degradation in performance of the EUT was observed (A)	B	Pass
	$\pm 4$	B	B	
Air discharge	$\pm 2$	B	B	
	$\pm 4$	B	B	
	$\pm 8$	B	B	
<b>Indirect discharge</b>				
Type of discharge	Discharge voltage (kV)	Observations Performance	CriteriaLevel	Result
HCP (6 sides)	$\pm 2$	B	B	Pass
	$\pm 4$	B	B	
VCP (4 sides)	$\pm 2$	B	B	
	$\pm 4$	B	B	


#### Description of Discharge Point

Contact discharge:



Air discharge:



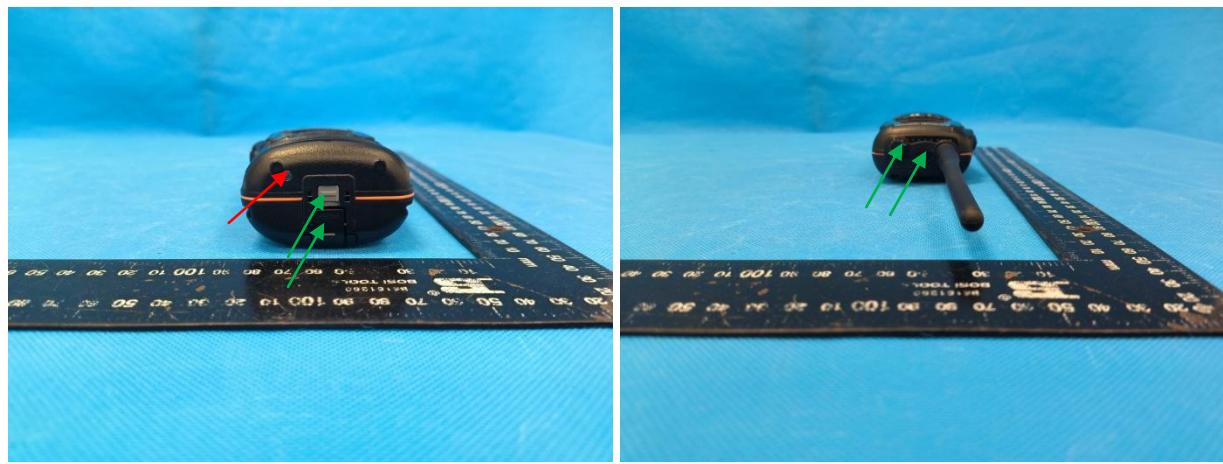

## 5.3. Environmental Test

### 5.3.1. Dry heat

#### TEST METHOD

Storage Test: The EUT shall be placed in a chamber at normal room temperature and relative humidity. The temperature shall then be raised to and maintained at  $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$ , for a period of 10 h to 16 h. At the end of the test, the EUT shall be returned to normal environmental conditions and then subjected to a performance check.

Functional test: The EUT shall be placed in a chamber at normal room temperature and relative humidity. The EUT and, if appropriate, any climatic control devices with which it is provided shall then be switched on. The temperature shall then be raised to and maintained at  $+55^{\circ}\text{C} \pm 3^{\circ}\text{C}$ . At the end of a soak period of 10 h to 16 h at  $+55^{\circ}\text{C} \pm 3^{\circ}\text{C}$ , the EUT shall be subjected to a performance test and check.

The temperature of the chamber shall be maintained at  $+55^{\circ}\text{C} \pm 3^{\circ}\text{C}$  during the whole performance test period. At the end of the test, the EUT shall be returned to normal environmental conditions.

#### TEST RESULTS

Passed       Not Applicable

No degradation of performance or loss of function was observed.

### 5.3.2. Damp heat

#### TEST METHOD

Functional test: The EUT shall be placed in a chamber at normal room temperature and relative humidity. The temperature shall then be raised to  $+40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , and the relative humidity raised to  $93\% \pm 3\%$  over a period of  $3\text{ h} \pm 0,5\text{ h}$ . These conditions shall be maintained for a period of 10 h to 16 h. Any climatic control devices provided in the EUT may be switched on at the conclusion of this period.

The EUT shall be switched on 30 min later, or after such period as agreed by the manufacturer, and shall be kept operational for at least 2 h during which period the EUT shall be subjected to a performance check as specified in the relevant equipment standard. The temperature and relative humidity of the chamber shall be maintained as specified during the whole test period. At the end of the test period and with the EUT still in the chamber, the chamber shall be brought to room temperature in not less than 1 h. At the end of the test the EUT shall be returned to normal environmental conditions.

#### TEST RESULTS

Passed       Not Applicable

No degradation of performance or loss of function was observed.

### 5.3.3. Low temperature

#### TEST METHOD

Functional test: The EUT shall be subject to the conditions specified for portable equipment except that the temperature of the chamber shall be reduced to, and maintained at  $-15^{\circ}\text{C} \pm 3^{\circ}\text{C}$ . The EUT shall be switched on 30 min later, or after such period as agreed by the manufacturer, and shall be kept operational for at least 2 h during which period the EUT shall be subjected to a performance check test and check

#### TEST RESULTS

Passed       Not Applicable

No degradation of performance or loss of function was observed.

### 5.3.4. Vibration

#### TEST METHOD

The EUT, complete with any shock and vibration absorbers with which it is provided, shall be fastened to the vibration table by its normal means of support and in its normal attitude. The EUT may be resiliently suspended to compensate for weight not capable of being withstood by the vibration table. Provision may be made to reduce or nullify any adverse effect on EUT performance which might be caused by the presence of an electromagnetic field due to the vibration unit.

The EUT shall be subjected to sinusoidal vertical vibration at all frequencies between:

– 2 Hz to 5 Hz and up to 13,2 Hz with an excursion of  $\pm 1 \text{ mm} \pm 10\%$

(7 m/s<sub>2</sub> maximum acceleration at 13,2 Hz);

– above 13,2 Hz and up to 100 Hz with a constant maximum acceleration of 7 m/s<sub>2</sub>.

The frequency sweep rate shall be 0,5 octaves/min in order to allow the detection of resonances in any part of the EUT as mounted.

A resonance search shall be carried out throughout the test. During the resonance search the EUT shall be externally observed, by unaided visual and aural means, for obvious signs of any resonances of components or sub-assemblies, that may affect the integrity of the EUT. Such observations shall be recorded in the test report. If any resonance, as measured by a sensor fixed to the outside of the EUT at the location where obvious signs of resonance have been observed, has a magnitude ratio  $\leq 5$  measured relative to the surface where the EUT is fastened, the EUT shall be subjected to a vibration endurance test at each resonant frequency at the vibration level specified in the test with a duration of 2 h. When resonant frequencies with magnitude ratios  $\leq 5$  are harmonically related, only the fundamental frequency shall be tested. If no resonance with a magnitude ratio  $\leq 5$  occurs, the endurance test shall be carried out at one single observed frequency. If no resonance occurred, the endurance test shall be carried out at a frequency of 30 Hz. Performance check(s) shall be carried out at least once during each endurance test period, and once before the end of each endurance test period.



#### TEST RESULTS

Passed       Not Applicable


No degradation of performance or loss of function was observed.

## 6. Test Setup Photos

Radiated Emission

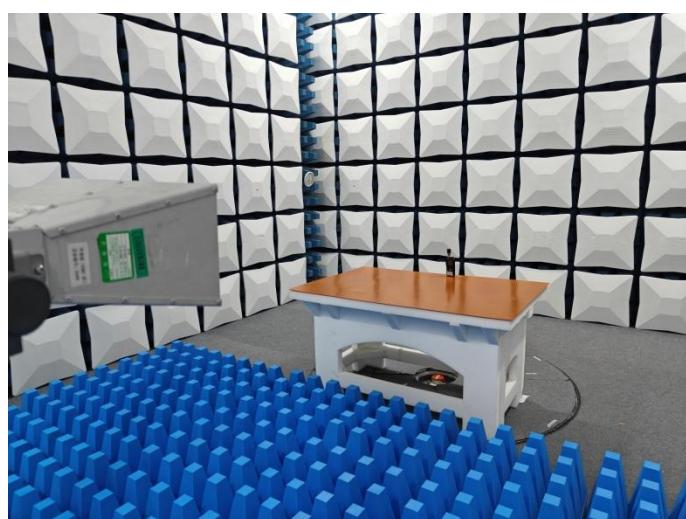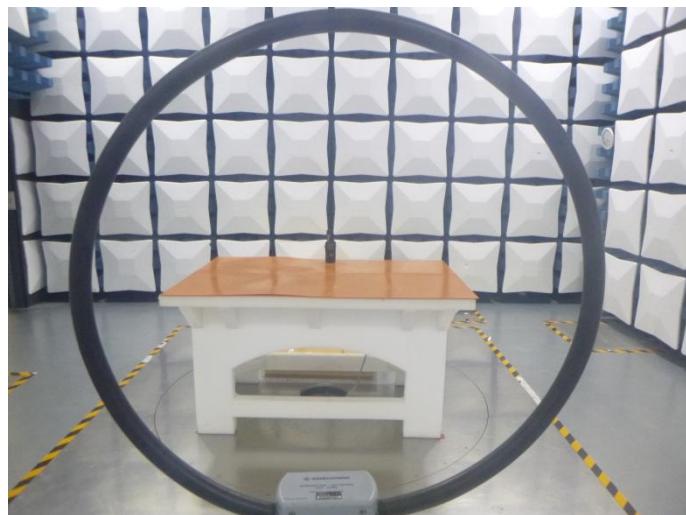

Electrostatic Discharge

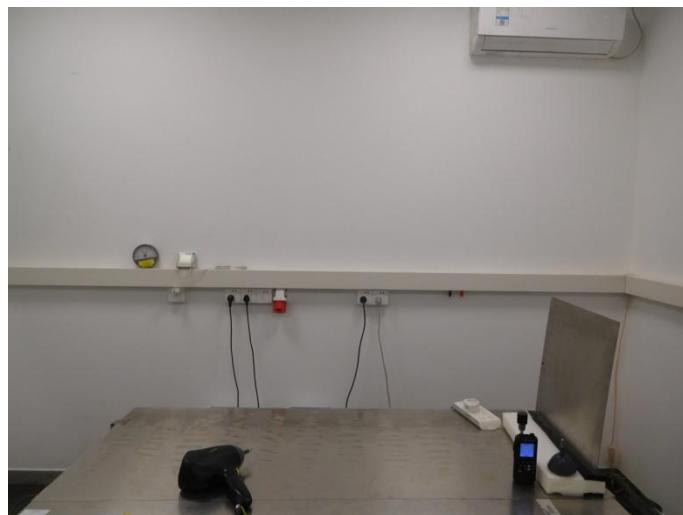

Radiated disturbance



## **7. External and Internal Photos of the EUT**

Reference to the test report No.: CHTW24050028

-----End of Report-----