



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

T R A N S M I T T E R C E R T I F I C A T I O N

of

FCC ID: K66VX-5500L

MODEL: VX-5500L

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part(s) 90, 90.210

DATE OF REPORT: April 22, 2003

ON THE BEHALF OF THE APPLICANT:

Vertex Standard Co., Ltd.

AT THE REQUEST OF:

P.O. UPS 03/27/2003

Vertex Standard USA Inc.
10900 Walker Street
Cypress, CA 90630

Attention of:

Mikio Maruya, Executive Vice President
(800) 255-9237; FAX: (800) 477-9237
(714) 827-7600; FAX: -8100
m.maruya@vxstdusa.com
Chip Margelli
c.margelli@vxstdusa.com

SUPERVISED BY:



Morton Flom, P. Eng.

LIST OF EXHIBITS
(FCC **CERTIFICATION** (TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Vertex Standard Co., Ltd.

FCC ID: K66VX-5500L

BY APPLICANT:

1. LETTER OF AUTHORIZATION	x
2. IDENTIFICATION DRAWINGS, 2.1033(c) (11)	
<input checked="" type="checkbox"/> LABEL	
<input checked="" type="checkbox"/> LOCATION OF LABEL	
<input checked="" type="checkbox"/> COMPLIANCE STATEMENT	
<input checked="" type="checkbox"/> LOCATION OF COMPLIANCE STATEMENT	
3. PHOTOGRAPHS, 2.1033(c) (12)	x
4. DOCUMENTATION: 2.1033(c)	
(3) USER MANUAL	x
(9) TUNE UP INFO	x
(10) SCHEMATIC DIAGRAM	x
(10) CIRCUIT DESCRIPTION	x
BLOCK DIAGRAM	x
PARTS LIST	x
ACTIVE DEVICES	x
5. PART 90.203(e) & (g) ATTESTATION	x
6. REQUEST FOR CONFIDENTIALITY	x
7. MPE REPORT	x

BY M.F.A. INC.

A. TESTIMONIAL & STATEMENT OF CERTIFICATION
B. STATEMENT OF QUALIFICATIONS

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c) (14)	Rule Summary	6
	Standard Test Conditions and Engineering Practices	7
2.1046(a)	Carrier Output Power (Conducted)	8
2.1046(a)	ERP Carrier Power (Radiated)	10
2.1051	Unwanted Emissions (Transmitter Conducted)	11
2.1053(a)	Field Strength of Spurious Radiation	25
2.1049(c) (1)	Emission Masks (Occupied Bandwidth)	29
2.1047(a)	Audio Low Pass Filter (Voice Input)	42
2.1047(a)	Audio Frequency Response	45
2.1047(b)	Modulation Limiting	47
2.1055(a) (1)	Frequency Stability (Temperature Variation)	49
2.1055(b) (1)	Frequency Stability (Voltage Variation)	52
2.202(g)	Necessary Bandwidth and Emission Bandwidth	53

PAGE NO.

1 of 53.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a) TEST REPORT

b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d0340025

d) Client: Vertex Standard USA Inc.
10900 Walker Street
Cypress, CA 90630

e) Identification: VX-5500L
FCC ID: K66VX-5500L
EUT Description: Low Band VHF FM Transceiver

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: April 22, 2003
EUT Received: March 27, 2003

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:


Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO.

2 of 53.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

90, 90.210, Confidentiality

Sub-part 2.1033

(c) (1): NAME AND ADDRESS OF APPLICANT:Vertex Standard Co., Ltd.
4-8-8 Nakameguro, Meguro-Ku
Tokyo 153-8644 JapanMANUFACTURER:

Applicant

(c) (2): FCC ID: K66VX-5500LMODEL NO: VX-5500L(c) (3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c) (4): TYPE OF EMISSION: 16K0F3E(c) (5): FREQUENCY RANGE, MHz: 37 to 50(c) (6): POWER RATING, Watts: 30 to 70
 Switchable Variable N/A

FCC GRANT NOTE:

BK- The output power is continuously variable from the value listed in this entry to 40%-45% of the value listed.

(c) (7): MAXIMUM POWER RATING, Watts: 300DUT RESULTS:Passes Fails

PAGE NO.

3 of 53.

INFORMATION FOR PUSH-TO-TALK DEVICES

Type and number of antenna to be used for this device:
(1), $\frac{1}{2}$ Wave

Maximum antenna gain for antenna indicated above:
0 dBd

Can this device sustain continuous operation with respect to its hardware capabilities and allowable operating functions?
No, 50% Duty Cycle

Other hardware or operating restrictions that could limit a person's RF Exposure:

See manual

Source-based time-averaging (see 2.1093 of rules) applicable to reduce the average output power:

N/A

If device has headset and belt-clip accessories that would allow body-worn operations, what is the minimum separation distance between the antenna and the user's body in this operating configuration?

N/A

Can device access wire-line services to make phone calls, either directly or through an operator?

No

Can specific operating instructions be given to users to eliminate any potential RF Exposure concerns for both front-of-the-face and body-worn operating configurations?

See manual


Other applicable information the applicant may provide that can serve as effective means for ensuring RF Exposure compliance:

See manual

PAGE NO.

4 of 53.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.

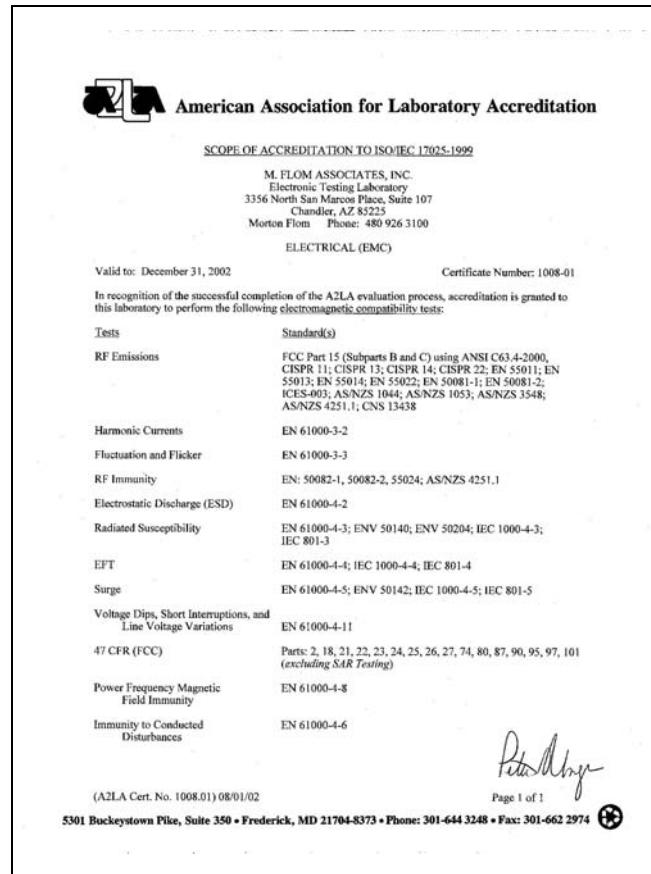

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not be covered by this laboratory's A2LA accreditation.

PAGE NO. 5 of 53.

Subpart 2.1033 (continued)

(c) (8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = 12
COLLECTOR VOLTAGE, Vdc = 13.8
SUPPLY VOLTAGE, Vdc = 13.8

(c) (9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c) (10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c) (11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c) (12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c) (13): DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
x N/A

(c) (14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

6 of 53.

Sub-part

2.1033(c) (14) : TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- ____ 21 - Domestic Public Fixed Radio Services
- ____ 22 - Public Mobile Services
- ____ 22 Subpart H - Cellular Radiotelephone Service
- ____ 22.901(d) - Alternative technologies and auxiliary services
- ____ 23 - International Fixed Public Radiocommunication services
- ____ 24 - Personal Communications Services
- ____ 74 Subpart H - Low Power Auxiliary Stations
- ____ 80 - Stations in the Maritime Services
- ____ 80 Subpart E - General Technical Standards
- ____ 80 Subpart F - Equipment Authorization for Compulsory Ships
- ____ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- ____ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- ____ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- ____ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- ____ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- ____ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- ____ 80 Subpart X - Voluntary Radio Installations
- ____ 87 - Aviation Services
- ____ x 90 - Private Land Mobile Radio Services
- ____ 94 - Private Operational-Fixed Microwave Service
- ____ 95 Subpart A - General Mobile Radio Service (GMRS)
- ____ 95 Subpart C - Radio Control (R/C) Radio Service
- ____ 95 Subpart D - Citizens Band (CB) Radio Service
- ____ 95 Subpart E - Family Radio Service
- ____ 95 Subpart F - Interactive Video and Data Service (IVDS)
- ____ 97 - Amateur Radio Service
- ____ 101 - Fixed Microwave Services

PAGE NO.

7 of 53.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 8 of 53.
NAME OF TEST: Carrier Output Power (Conducted)
SPECIFICATION: 47 CFR 2.1046(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS
(Worst case)

FREQUENCY OF CARRIER, MHz = 43.500, 37.000, 50.000
 AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

POWER SETTING	R. F. POWER, WATTS
Low	30
High	70


PERFORMED BY:  David Lee

PAGE NO.

9 of 53.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
 TEST 2: FREQUENCY STABILITY

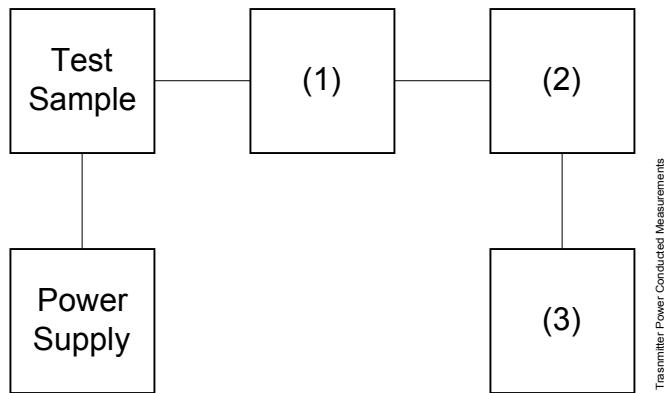

Asset Description (as applicable)	s/n
(1) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(2) <u>POWER METERS</u>	
i00014 HP 435A	1733A05836
i00039 HP 436A	2709A26776
i00020 HP 8901A POWER MODE	2105A01087
(3) <u>FREQUENCY COUNTER</u>	
i00042 HP 5383A	1628A00959
i00019 HP 5334B	2704A00347
i00020 HP 8901A FREQUENCY MODE	2105A01087

PAGE NO.

10 of 53.

NAME OF TEST:

ERP Carrier Power (Radiated)


SPECIFICATION:

TIA/EIA 603A (Substitution Method)

2.2.17.1 Definition: The average radiated power of a licensed device is the equivalent power required, when delivered to a half-wave dipole or horn antenna, to produce at a distant point the same average received power as produced by the licensed device.

2.2.17.2 Method of Measurement:

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

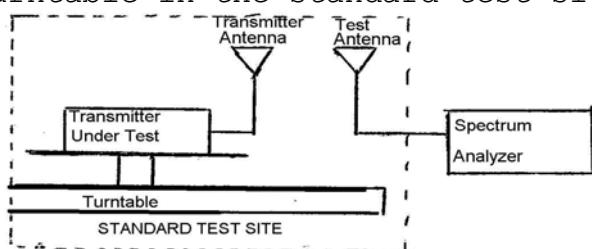

b) Raise and lower the test antenna from 1m to 6 m with the transmitter facing the antenna and record the highest received signal in dB as LVL.

c) Repeat step b) for seven additional readings at 45° interval positions of the turntable.

d) Replace the transmitter under test with a half-wave or horn vertically polarized antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power and record the path loss in dB or LOSS.

e) Calculate the average radiated output power from the readings in step c) and d) by the following:

$$\text{average radiated power} = 10 \log_{10} \sum 10(\text{LVL} - \text{LOSS})/10 \text{ (dBm)}$$

	RESULTS					
	37.0 MHz		43.5 MHz		50.0 MHz	
	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db
0°	43.6	0.9	38.0	-2.8	34.5	-4.2
45°	43.0	0.9	34.4	-2.8	35.1	-4.2
90°	43.5	0.9	34.0	-2.8	33.6	-4.2
135°	43.2	0.9	34.5	-2.8	35.7	-4.2
180°	44.2	0.9	34.2	-2.8	34.7	-4.2
225°	43.5	0.9	32.5	-2.8	33.3	-4.2
270°	43.4	0.9	33.9	-2.8	33.8	-4.2
315°	43.5	0.9	34.3	-2.8	37.5	-4.2

	37.0 MHz	43.5 MHz	50.0 MHz
Av. Radiated Power:	42.59 dbm	37.38 dbm	38.98 dbm

PAGE NO. 11 of 53.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: 47 CFR 2.1051

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
 - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz	= 43.500, 37.000, 50.000
SPECTRUM SEARCHED, GHz	= 0 to 10 x F _c
MAXIMUM RESPONSE, Hz	= 2820
ALL OTHER EMISSIONS	= ≥ 20 dB BELOW LIMIT



PERFORMED BY:


David Lee

PAGE NO.

12 of 53.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
 TEST B. OUT-OF-BAND SPURIOUS

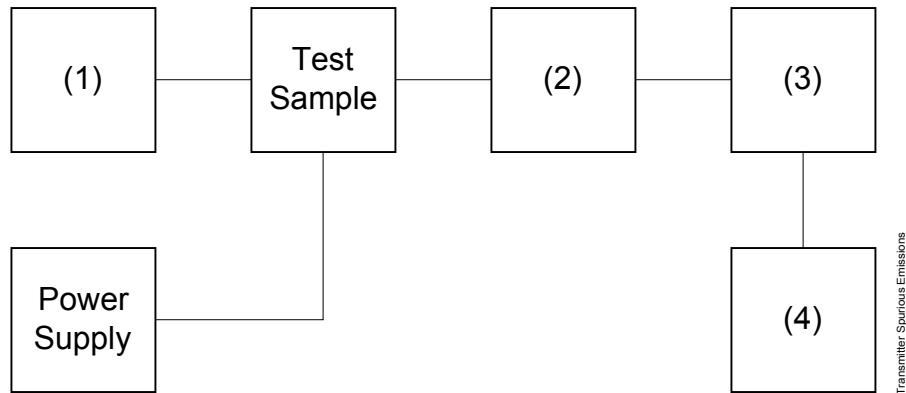

Asset Description (as applicable)	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126 Eagle TNF-1	100-250
i00125 Eagle TNF-1	50-60
i00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467
i00029 HP 8563E	3213A00104

PAGE NO.

13 of 53.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH
 LIMIT(S), dBc: -(43+10xLOG P) = -57.8 (30 Watts)
 -(43+10xLOG P) = -61.5 (70 Watts)

STATE: 1:Low Power g0330169: 2003-Mar-31 Mon 11:08:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
37.000000	74.210000	-55.5	≤-97.2	-35.5
37.000000	81.508333	-54.7	≤-97.2	-34.7
37.000000	110.870833	-56	≤-97.2	-36
37.000000	138.566667	-55.2	≤-97.2	-35.2
37.000000	147.926667	-55.7	≤-97.2	-35.7
37.000000	185.106667	-54.5	≤-97.2	-34.5
37.000000	189.208333	-54.5	≤-97.2	-34.5
37.000000	222.181667	-55	≤-97.2	-35
37.000000	242.783333	-54.8	≤-97.2	-34.8
37.000000	251.900000	-54.3	≤-97.2	-34.3
37.000000	259.036667	-54	≤-97.2	-34
37.000000	295.824167	-55.3	≤-97.2	-35.3
37.000000	319.225000	-54.5	≤-97.2	-34.5
37.000000	332.833333	-54.7	≤-97.2	-34.7
37.000000	348.691667	-54.5	≤-97.2	-34.5
37.000000	369.885833	-53.5	≤-97.2	-33.5
37.000000	406.840000	-54.3	≤-97.2	-34.3
37.000000	426.008333	-52.2	≤-97.2	-32.2
37.000000	443.767500	-54.2	≤-97.2	-34.2
37.000000	471.791667	-54	≤-97.2	-34
37.000000	478.483333	-54.5	≤-97.2	-34.5
37.000000	480.858333	-54.5	≤-97.2	-34.5
37.000000	517.824167	-55	≤-97.2	-35
37.000000	522.616667	-54.2	≤-97.2	-34.2
37.000000	554.978333	-53.5	≤-97.2	-33.5
37.000000	594.341667	-53.5	≤-97.2	-33.5
37.000000	612.716667	-53.3	≤-97.2	-33.3
37.000000	650.525000	-53.7	≤-97.2	-33.7
37.000000	685.175000	-53.8	≤-97.2	-33.8
37.000000	718.216667	-54.3	≤-97.2	-34.3
37.000000	751.216667	-53.5	≤-97.2	-33.5
37.000000	798.283333	-54.2	≤-97.2	-34.2
37.000000	842.416667	-54	≤-97.2	-34
37.000000	874.450000	-53.5	≤-97.2	-33.5
37.000000	898.783333	-53.3	≤-97.2	-33.3
37.000000	971.425000	-54.2	≤-97.2	-34.2
37.000000	1038.475000	-54	≤-97.2	-34
37.000000	1092.508333	-53.2	≤-97.2	-33.2
37.000000	1144.066667	-53.7	≤-97.2	-33.7
37.000000	1200.025000	-54	≤-97.2	-34
37.000000	1214.550000	-53.7	≤-97.2	-33.7
37.000000	1238.383333	-53.8	≤-97.2	-33.8
37.000000	1259.875000	-53.2	≤-97.2	-33.2
37.000000	1321.516667	-54.2	≤-97.2	-34.2

PAGE NO. 14 of 53.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

STATE: 1:Low Power (CONTINUED) g0330169: 2003-Mar-31 Mon 11:08:00				
FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
37.000000	1371.516667	-53.8	≤-97.2	-33.8
37.000000	1421.975000	-54.2	≤-97.2	-34.2
37.000000	1499.841667	-54.2	≤-97.2	-34.2
37.000000	1519.958333	-53.8	≤-97.2	-33.8
37.000000	1572.708333	-53.5	≤-97.2	-33.5
37.000000	1645.533333	-53.2	≤-97.2	-33.2
37.000000	1691.408333	-53.3	≤-97.2	-33.3
37.000000	1729.583333	-53.5	≤-97.2	-33.5
37.000000	1790.950000	-53.2	≤-97.2	-33.2
37.000000	1800.800000	-53.8	≤-97.2	-33.8
37.000000	1862.900000	-53	≤-97.2	-33
37.000000	1883.433333	-53.5	≤-97.2	-33.5
37.000000	1910.333333	-54	≤-97.2	-34
37.000000	1982.883333	-53.3	≤-97.2	-33.3

PERFORMED BY:

David Lee



PAGE NO.

15 of 53.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH
 LIMIT(S), dBc: -(43+10xLOG P) = -57.8 (30 Watts)
 -(43+10xLOG P) = -61.8 (70 Watts)

STATE: 1:Low Power g0330166: 2003-Mar-31 Mon 10:52:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
43.500000	86.910833	-55.5	≤-98	-35.5
43.500000	93.608333	-55.3	≤-98	-35.3
43.500000	102.266667	-54.2	≤-98	-34.2
43.500000	130.505833	-55.5	≤-98	-35.5
43.500000	162.075000	-54.5	≤-98	-34.5
43.500000	173.937500	-54.8	≤-98	-34.8
43.500000	179.033333	-54.7	≤-98	-34.7
43.500000	216.475000	-54.8	≤-98	-34.8
43.500000	217.500000	-61	≤-98	-41
43.500000	261.190000	-55	≤-98	-35
43.500000	282.425000	-55	≤-98	-35
43.500000	304.525000	-55.2	≤-98	-35.2
43.500000	320.050000	-55	≤-98	-35
43.500000	348.175833	-53.7	≤-98	-33.7
43.500000	380.958333	-54.2	≤-98	-34.2
43.500000	391.576667	-54.2	≤-98	-34.2
43.500000	399.150000	-53	≤-98	-33
43.500000	434.862500	-55.2	≤-98	-35.2
43.500000	456.758333	-53.5	≤-98	-33.5
43.500000	478.439167	-54.7	≤-98	-34.7
43.500000	492.966667	-54.2	≤-98	-34.2
43.500000	498.233333	-54.2	≤-98	-34.2
43.500000	521.791667	-53.7	≤-98	-33.7
43.500000	537.466667	-54.3	≤-98	-34.3
43.500000	564.825000	-54.2	≤-98	-34.2
43.500000	609.158333	-54.5	≤-98	-34.5
43.500000	644.250000	-53.3	≤-98	-33.3
43.500000	652.541667	-54	≤-98	-34
43.500000	703.458333	-54	≤-98	-34
43.500000	763.633333	-53.7	≤-98	-33.7
43.500000	794.708333	-53.7	≤-98	-33.7
43.500000	827.750000	-53	≤-98	-33
43.500000	848.100000	-53.3	≤-98	-33.3
43.500000	851.441667	-53.8	≤-98	-33.8
43.500000	948.741667	-53.7	≤-98	-33.7
43.500000	963.541667	-53.5	≤-98	-33.5
43.500000	998.191667	-53.7	≤-98	-33.7
43.500000	999.975000	-54.2	≤-98	-34.2
43.500000	1049.791667	-53.7	≤-98	-33.7
43.500000	1147.641667	-53.3	≤-98	-33.3
43.500000	1154.100000	-53.7	≤-98	-33.7
43.500000	1231.233333	-53.5	≤-98	-33.5
43.500000	1255.750000	-53.5	≤-98	-33.5
43.500000	1322.341667	-53.8	≤-98	-33.8

PAGE NO.

16 of 53.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

STATE: 1:Low Power CONTINUED g0330166 : 2003-Mar-31 Mon 10:52:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
43.500000	1366.658333	-54.2	≤-98	-34.2
43.500000	1415.375000	-52.8	≤-98	-32.8
43.500000	1443.516667	-53.3	≤-98	-33.3
43.500000	1456.941667	-52.3	≤-98	-32.3
43.500000	1483.433333	-53.5	≤-98	-33.5
43.500000	1531.325000	-53.2	≤-98	-33.2
43.500000	1549.241667	-54.3	≤-98	-34.3
43.500000	1614.366667	-54.2	≤-98	-34.2
43.500000	1652.541667	-53.3	≤-98	-33.3
43.500000	1667.850000	-53.2	≤-98	-33.2
43.500000	1738.200000	-53.2	≤-98	-33.2
43.500000	1796.816667	-53	≤-98	-33
43.500000	1820.966667	-52.8	≤-98	-32.8
43.500000	1845.533333	-53.7	≤-98	-33.7
43.500000	1878.116667	-53.8	≤-98	-33.8
43.500000	1929.033333	-53.5	≤-98	-33.5
43.500000	1981.691667	-53.3	≤-98	-33.3

PERFORMED BY:

David Lee



PAGE NO.

17 of 53.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH
 LIMIT(S), dBc: -(43+10xLOG P) = -57.8 (30 Watts)
 -(43+10xLOG P) = -61.8 (70 Watts)

STATE: 1:Low Power g0330171: 2003-Mar-31 Mon 11:28:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
50.000000	99.875833	-56.2	≤-97.3	-36.2
50.000000	149.980833	-55.7	≤-97.3	-35.7
50.000000	151.125000	-54.2	≤-97.3	-34.2
50.000000	180.591667	-54.5	≤-97.3	-34.5
50.000000	199.805833	-55.2	≤-97.3	-35.2
50.000000	228.575000	-54.3	≤-97.3	-34.3
50.000000	250.074167	-55.5	≤-97.3	-35.5
50.000000	264.366667	-54.8	≤-97.3	-34.8
50.000000	299.908333	-55.2	≤-97.3	-35.2
50.000000	344.250000	-54.3	≤-97.3	-34.3
50.000000	350.207500	-55.2	≤-97.3	-35.2
50.000000	385.541667	-53.3	≤-97.3	-33.3
50.000000	399.970833	-53.3	≤-97.3	-33.3
50.000000	412.533333	-53.8	≤-97.3	-33.8
50.000000	449.929167	-54.3	≤-97.3	-34.3
50.000000	462.166667	-54.3	≤-97.3	-34.3
50.000000	499.750833	-55.3	≤-97.3	-35.3
50.000000	512.716667	-54.2	≤-97.3	-34.2
50.000000	550.157500	-54.2	≤-97.3	-34.2
50.000000	570.508333	-54.2	≤-97.3	-34.2
50.000000	599.801667	-54.3	≤-97.3	-34.3
50.000000	634.625000	-53.8	≤-97.3	-33.8
50.000000	650.119167	-53.8	≤-97.3	-33.8
50.000000	656.575000	-54.3	≤-97.3	-34.3
50.000000	699.985833	-54.2	≤-97.3	-34.2
50.000000	722.433333	-52.2	≤-97.3	-32.2
50.000000	750.225000	-54.3	≤-97.3	-34.3
50.000000	762.350000	-54.2	≤-97.3	-34.2
50.000000	787.650000	-54	≤-97.3	-34
50.000000	822.250000	-53.3	≤-97.3	-33.3
50.000000	882.791667	-53.8	≤-97.3	-33.8
50.000000	908.408333	-53.3	≤-97.3	-33.3
50.000000	957.950000	-53.7	≤-97.3	-33.7
50.000000	1024.175000	-53.5	≤-97.3	-33.5
50.000000	1076.925000	-52.3	≤-97.3	-32.3
50.000000	1100.525000	-53.7	≤-97.3	-33.7
50.000000	1170.233333	-53.2	≤-97.3	-33.2
50.000000	1243.241667	-52.8	≤-97.3	-32.8
50.000000	1254.283333	-54	≤-97.3	-34
50.000000	1333.891667	-53.8	≤-97.3	-33.8
50.000000	1354.100000	-53.3	≤-97.3	-33.3
50.000000	1364.641667	-53.3	≤-97.3	-33.3
50.000000	1386.366667	-53.2	≤-97.3	-33.2
50.000000	1428.850000	-54.3	≤-97.3	-34.3

PAGE NO.

18 of 53.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

STATE: 1:Low Power CONTINUED g0330171: 2003-Mar-31 Mon 11:28:00				
FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
50.000000	1458.775000	-54	≤-97.3	-34
50.000000	1507.216667	-53.5	≤-97.3	-33.5
50.000000	1538.016667	-53.7	≤-97.3	-33.7
50.000000	1551.900000	-54.3	≤-97.3	-34.3
50.000000	1630.408333	-53.5	≤-97.3	-33.5
50.000000	1644.891667	-53.3	≤-97.3	-33.3
50.000000	1683.983333	-53.3	≤-97.3	-33.3
50.000000	1700.525000	-53.8	≤-97.3	-33.8
50.000000	1785.725000	-53.5	≤-97.3	-33.5
50.000000	1809.233333	-53	≤-97.3	-33
50.000000	1830.316667	-53	≤-97.3	-33
50.000000	1864.916667	-53.5	≤-97.3	-33.5
50.000000	1925.091667	-53	≤-97.3	-33
50.000000	1963.450000	-53.3	≤-97.3	-33.3

PERFORMED BY:

David Lee



PAGE NO.

19 of 53.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH
 LIMIT(S), dBc: -(43+10xLOG P) = -57.8 (30 Watts)
 -(43+10xLOG P) = -61.8 (70 Watts)

STATE: 2:High Power g0330168: 2003-Mar-31 Mon 11:05:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
37.000000	74.266667	-54.1	≤-98.3	-34.1
37.000000	110.970833	-55	≤-98.3	-35
37.000000	112.166667	-54.1	≤-98.3	-34.1
37.000000	148.246667	-55.3	≤-98.3	-35.3
37.000000	177.750000	-54	≤-98.3	-34
37.000000	184.811667	-55	≤-98.3	-35
37.000000	221.774167	-54.8	≤-98.3	-34.8
37.000000	235.175000	-53	≤-98.3	-33
37.000000	253.458333	-53.5	≤-98.3	-33.5
37.000000	259.063333	-54.3	≤-98.3	-34.3
37.000000	295.833333	-54.8	≤-98.3	-34.8
37.000000	332.755000	-53.5	≤-98.3	-33.5
37.000000	350.025000	-54	≤-98.3	-34
37.000000	369.941667	-54.1	≤-98.3	-34.1
37.000000	375.825000	-52.5	≤-98.3	-32.5
37.000000	406.860833	-54.5	≤-98.3	-34.5
37.000000	443.900833	-53.6	≤-98.3	-33.6
37.000000	452.316667	-52.5	≤-98.3	-32.5
37.000000	481.063333	-54.5	≤-98.3	-34.5
37.000000	499.016667	-53.1	≤-98.3	-33.1
37.000000	506.208333	-54	≤-98.3	-34
37.000000	518.040833	-54.8	≤-98.3	-34.8
37.000000	554.880833	-54.5	≤-98.3	-34.5
37.000000	571.150000	-53.5	≤-98.3	-33.5
37.000000	620.050000	-53.3	≤-98.3	-33.3
37.000000	658.500000	-53.6	≤-98.3	-33.6
37.000000	704.833333	-52	≤-98.3	-32
37.000000	734.533333	-53.1	≤-98.3	-33.1
37.000000	753.733333	-53.1	≤-98.3	-33.1
37.000000	801.716667	-53.6	≤-98.3	-33.6
37.000000	827.658333	-53.6	≤-98.3	-33.6
37.000000	871.333333	-53	≤-98.3	-33
37.000000	879.766667	-53.3	≤-98.3	-33.3
37.000000	935.266667	-52.5	≤-98.3	-32.5
37.000000	952.175000	-52.8	≤-98.3	-32.8
37.000000	999.291667	-52.3	≤-98.3	-32.3
37.000000	1023.625000	-53	≤-98.3	-33
37.000000	1094.891667	-52.3	≤-98.3	-32.3
37.000000	1112.350000	-52.8	≤-98.3	-32.8
37.000000	1201.858333	-52.5	≤-98.3	-32.5
37.000000	1221.333333	-53.1	≤-98.3	-33.1
37.000000	1248.325000	-53.5	≤-98.3	-33.5
37.000000	1312.716667	-53.3	≤-98.3	-33.3
37.000000	1333.891667	-53.1	≤-98.3	-33.1

PAGE NO.

20 of 53.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

STATE: 2:High Power CONTINUED g0330168: 2003-Mar-31 Mon 11:05:00				
FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
37.000000	1359.508333	-53.6	≤-98.3	-33.6
37.000000	1410.700000	-53.1	≤-98.3	-33.1
37.000000	1476.191667	-53.5	≤-98.3	-33.5
37.000000	1509.325000	-53.5	≤-98.3	-33.5
37.000000	1585.908333	-52.8	≤-98.3	-32.8
37.000000	1619.500000	-54	≤-98.3	-34
37.000000	1653.275000	-53	≤-98.3	-33
37.000000	1707.400000	-53	≤-98.3	-33
37.000000	1794.708333	-53.1	≤-98.3	-33.1
37.000000	1824.908333	-53	≤-98.3	-33
37.000000	1849.608333	-53.5	≤-98.3	-33.5
37.000000	1941.683333	-53.3	≤-98.3	-33.3
37.000000	1989.208333	-51.8	≤-98.3	-31.8

PERFORMED BY:

David Lee



PAGE NO.

21 of 53.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH
 LIMIT(S), dBc: -(43+10xLOG P) = -57.8 (30 Watts)
 -(43+10xLOG P) = -61.8 (70 Watts)

STATE: 2:High Power g0330165: 2003-Mar-31 Mon 10:44:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
43.500000	76.925000	-54	≤-98.3	-34
43.500000	87.156667	-55	≤-98.3	-35
43.500000	101.991667	-54	≤-98.3	-34
43.500000	116.016667	-54.1	≤-98.3	-34.1
43.500000	130.285833	-55.5	≤-98.3	-35.5
43.500000	140.125000	-54.1	≤-98.3	-34.1
43.500000	157.125000	-53.8	≤-98.3	-33.8
43.500000	174.092500	-54.5	≤-98.3	-34.5
43.500000	188.841667	-54.1	≤-98.3	-34.1
43.500000	217.382500	-54.5	≤-98.3	-34.5
43.500000	239.208333	-54.3	≤-98.3	-34.3
43.500000	260.870833	-55	≤-98.3	-35
43.500000	281.600000	-53.5	≤-98.3	-33.5
43.500000	289.850000	-53.6	≤-98.3	-33.6
43.500000	304.362500	-54.5	≤-98.3	-34.5
43.500000	337.558333	-53.3	≤-98.3	-33.3
43.500000	347.915833	-54.8	≤-98.3	-34.8
43.500000	363.358333	-54.1	≤-98.3	-34.1
43.500000	391.365000	-54	≤-98.3	-34
43.500000	418.491667	-53.1	≤-98.3	-33.1
43.500000	434.814167	-54.1	≤-98.3	-34.1
43.500000	449.425000	-54	≤-98.3	-34
43.500000	478.499167	-53.8	≤-98.3	-33.8
43.500000	501.166667	-53.5	≤-98.3	-33.5
43.500000	522.099167	-54.5	≤-98.3	-34.5
43.500000	557.766667	-53.6	≤-98.3	-33.6
43.500000	565.650000	-54	≤-98.3	-34
43.500000	597.000000	-53.6	≤-98.3	-33.6
43.500000	604.283333	-52.8	≤-98.3	-32.8
43.500000	609.116667	-54	≤-98.3	-34
43.500000	650.800000	-53.8	≤-98.3	-33.8
43.500000	652.355000	-54	≤-98.3	-34
43.500000	711.158333	-53.3	≤-98.3	-33.3
43.500000	774.175000	-53.5	≤-98.3	-33.5
43.500000	840.675000	-53.5	≤-98.3	-33.5
43.500000	857.033333	-53.3	≤-98.3	-33.3
43.500000	923.441667	-52.5	≤-98.3	-32.5
43.500000	939.666667	-53.1	≤-98.3	-33.1
43.500000	997.275000	-53.3	≤-98.3	-33.3
43.500000	1049.475000	-52.8	≤-98.3	-32.8
43.500000	1092.691667	-53.8	≤-98.3	-33.8
43.500000	1120.691667	-53.1	≤-98.3	-33.1
43.500000	1198.233333	-51.3	≤-98.3	-31.3
43.500000	1280.500000	-53.1	≤-98.3	-33.1

PAGE NO.

22 of 53.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

STATE: 2:High Power g0330165: 2003-Mar-31 Mon 10:44:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
43.500000	1311.341667	-52.6	≤-98.3	-32.6
43.500000	1355.841667	-53.8	≤-98.3	-33.8
43.500000	1389.666667	-53.8	≤-98.3	-33.8
43.500000	1420.416667	-53.5	≤-98.3	-33.5
43.500000	1472.616667	-54	≤-98.3	-34
43.500000	1521.791667	-53.5	≤-98.3	-33.5
43.500000	1598.191667	-53.3	≤-98.3	-33.3
43.500000	1609.966667	-53.1	≤-98.3	-33.1
43.500000	1655.841667	-52.5	≤-98.3	-32.5
43.500000	1682.150000	-52.3	≤-98.3	-32.3
43.500000	1703.916667	-53.1	≤-98.3	-33.1
43.500000	1788.841667	-53.3	≤-98.3	-33.3
43.500000	1817.758333	-52.6	≤-98.3	-32.6
43.500000	1869.133333	-53.5	≤-98.3	-33.5
43.500000	1921.791667	-52.8	≤-98.3	-32.8
43.500000	1947.958333	-53	≤-98.3	-33

PERFORMED BY:

David Lee



PAGE NO.

23 of 53.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH
 LIMIT(S), dBc: -(43+10xLOG P) = -57.8 (30 Watts)
 -(43+10xLOG P) = -61.8 (70 Watts)

STATE: 2:High Power g0330170: 2003-Mar-31 Mon 11:20:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
50.000000	99.903333	-55.3	≤-98.3	-35.3
50.000000	119.683333	-54.3	≤-98.3	-34.3
50.000000	149.865833	-54.1	≤-98.3	-34.1
50.000000	190.308333	-53.6	≤-98.3	-33.6
50.000000	199.770000	-54.5	≤-98.3	-34.5
50.000000	237.375000	-54.1	≤-98.3	-34.1
50.000000	250.142500	-53.8	≤-98.3	-33.8
50.000000	254.741667	-52.6	≤-98.3	-32.6
50.000000	300.005833	-55.1	≤-98.3	-35.1
50.000000	302.725000	-53.5	≤-98.3	-33.5
50.000000	348.650000	-53.8	≤-98.3	-33.8
50.000000	350.185000	-54	≤-98.3	-34
50.000000	390.950000	-53.8	≤-98.3	-33.8
50.000000	399.809167	-54.1	≤-98.3	-34.1
50.000000	421.700000	-54	≤-98.3	-34
50.000000	449.985833	-53.5	≤-98.3	-33.5
50.000000	499.813333	-54	≤-98.3	-34
50.000000	538.291667	-53.6	≤-98.3	-33.6
50.000000	549.819167	-53.8	≤-98.3	-33.8
50.000000	561.891667	-53.1	≤-98.3	-33.1
50.000000	600.009167	-53.5	≤-98.3	-33.5
50.000000	628.850000	-53.5	≤-98.3	-33.5
50.000000	650.241667	-54.5	≤-98.3	-34.5
50.000000	655.841667	-53.3	≤-98.3	-33.3
50.000000	696.358333	-52.8	≤-98.3	-32.8
50.000000	700.066667	-54	≤-98.3	-34
50.000000	732.700000	-54	≤-98.3	-34
50.000000	750.433333	-53.6	≤-98.3	-33.6
50.000000	777.475000	-53.6	≤-98.3	-33.6
50.000000	812.533333	-52.6	≤-98.3	-32.6
50.000000	848.233333	-53	≤-98.3	-33
50.000000	877.291667	-53.3	≤-98.3	-33.3
50.000000	912.808333	-52.3	≤-98.3	-32.3
50.000000	930.408333	-52.3	≤-98.3	-32.3
50.000000	963.633333	-52.6	≤-98.3	-32.6
50.000000	1015.466667	-52.8	≤-98.3	-32.8
50.000000	1047.500000	-53.3	≤-98.3	-33.3
50.000000	1108.683333	-52.3	≤-98.3	-32.3
50.000000	1126.558333	-52.8	≤-98.3	-32.8
50.000000	1149.791667	-53.3	≤-98.3	-33.3
50.000000	1205.566667	-53	≤-98.3	-33
50.000000	1272.250000	-52.5	≤-98.3	-32.5
50.000000	1299.383333	-54	≤-98.3	-34
50.000000	1300.800000	-53.6	≤-98.3	-33.6

PAGE NO.

24 of 53.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

STATE: 2:High Power CONTINUED		g0330170: 2003-Mar-31 Mon 11:20:00		
FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
50.000000	1371.058333	-53.6	≤-98.3	-33.6
50.000000	1443.516667	-52.8	≤-98.3	-32.8
50.000000	1502.500000	-53.6	≤-98.3	-33.6
50.000000	1517.300000	-53.6	≤-98.3	-33.6
50.000000	1598.833333	-52.3	≤-98.3	-32.3
50.000000	1601.675000	-52.5	≤-98.3	-32.5
50.000000	1650.575000	-53.6	≤-98.3	-33.6
50.000000	1678.116667	-53.1	≤-98.3	-33.1
50.000000	1723.533333	-53.6	≤-98.3	-33.6
50.000000	1757.583333	-52.6	≤-98.3	-32.6
50.000000	1843.425000	-53	≤-98.3	-33
50.000000	1850.616667	-53.5	≤-98.3	-33.5
50.000000	1897.683333	-52.8	≤-98.3	-32.8
50.000000	1930.316667	-52.3	≤-98.3	-32.3
50.000000	1953.550000	-51.8	≤-98.3	-31.8
			≤-98.3	

PERFORMED BY:

David Lee



PAGE NO. 25 of 53.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth 100 kHz (<1 GHz), 1 MHZ (> 1GHz).
 - 2) Video Bandwidth \geq 3 times Resolution Bandwidth, or 30 kHz (22.917)
 - 3) Sweep Speed \leq 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

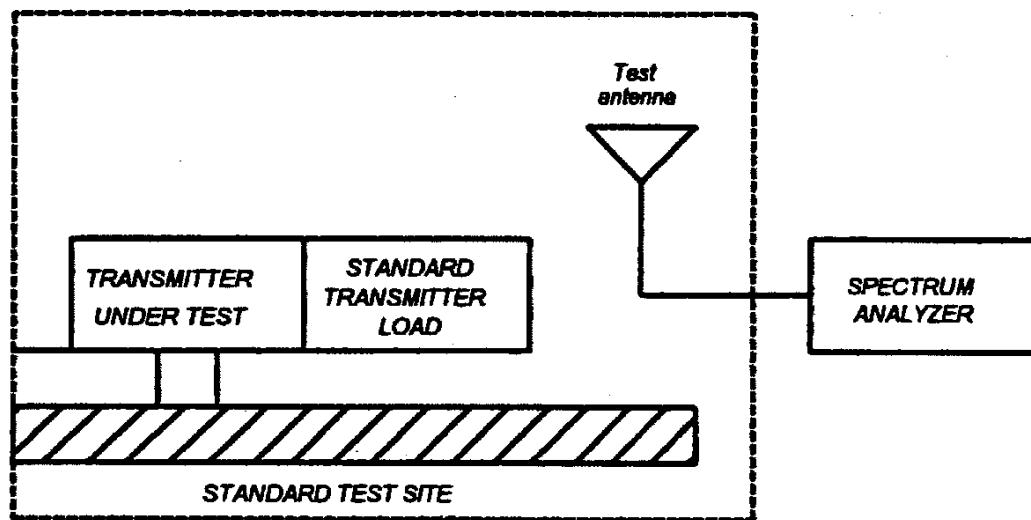

PAGE NO.


26 of 53.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).

E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.

F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

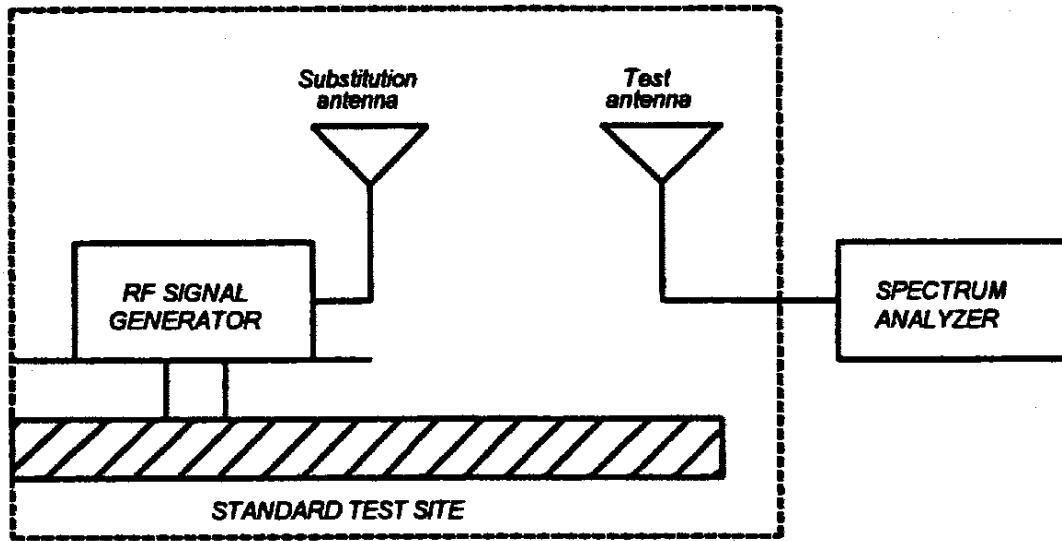

G) Reconnect the equipment as illustrated.

H) Keep the spectrum analyzer adjusted as in step B).

I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO.

27 of 53.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

K) Repeat step J) with both antennas vertically polarized for each spurious frequency.

L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =
 $10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step l})$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset	Description (as applicable)	s/n	Cycle	Last Cal
Per ANSI C63.4-1992/2000 Draft, 10.1.4				
<u>TRANSDUCER</u>				
i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-02
i00065	EMCO 3301-B Active Monopole	2635	12 mo.	Sep-02
i00089	Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-02
i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-02
<u>AMPLIFIER</u>				
i00028	HP 8449A	2749A00121	12 mo.	Mar-03
<u>SPECTRUM ANALYZER</u>				
i00029	HP 8563E	3213A00104	12 mo.	Jan-03
i00033	HP 85462A	3625A00357	12 mo.	Jan-03
i00048	HP 8566B	2511AD1467	6 mo.	Jan-03
<u>MICROPHONE, ANTENNA PORT, AND CABLING</u>				
Microphone	Yes	Cable Length	1.0	Meters
Antenna Port Terminated	Yes	Antenna Gain	0 dBd	
All Ports Terminated by Load	N/A	Peripheral	N/A	

PAGE NO.

28 of 53.

NAME OF TEST: Field Strength of Spurious Radiation

g0330126: 2003-Mar-28 Fri 08:42:00

STATE: 2:High Power AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	ERP, dBm	ERP, dbc
43.500000	86.995000	-40.5	≤ -67.15
43.500000	130.506300	-33.5	≤ -67.15
43.500000	174.003800	-34.3	≤ -67.15
43.500000	217.498800	-31.1	≤ -67.15
43.500000	261.001300	-18.7	≤ -67.15
43.500000	304.497500	-22.6	≤ -67.15
43.500000	347.997500	-26.3	≤ -67.15
43.500000	391.501300	-29.5	≤ -67.15
43.500000	435.005000	-38.4	≤ -67.15

SUPERVISED BY:

David Lee



PAGE NO. 29 of 53.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

SPECIFICATION: 47 CFR 2.1049(c) (1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5/\pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED


PAGE NO.

30 of 53.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

g0330150: 2003-Mar-31 Mon 08:58:00

STATE: 1:Low Power AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

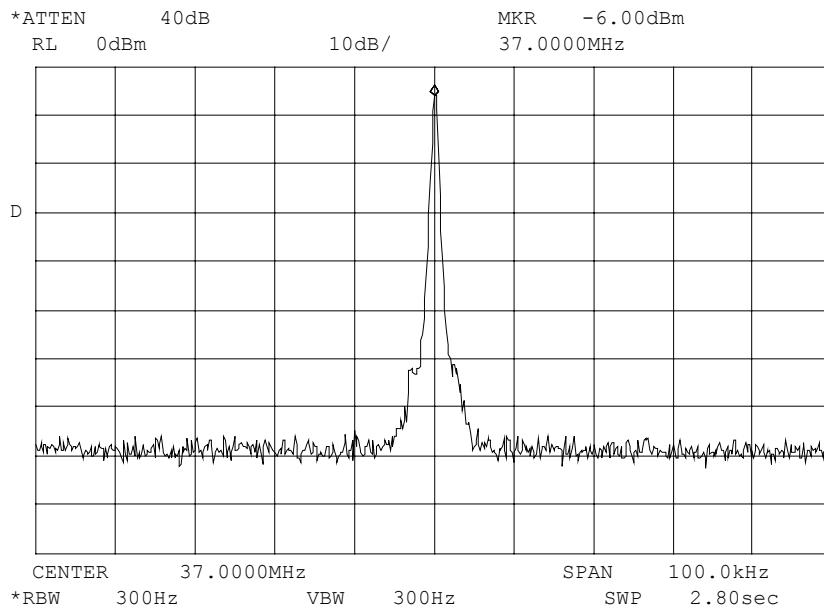

POWER:

LOW

MODULATION:

NONE

37MHz

PERFORMED BY:

David Lee



PAGE NO.


31 of 53.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

g0330160: 2003-Mar-31 Mon 10:00:00

STATE: 1:Low Power AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

*ATTEN	40dB	MKR	-11.00dBm
RL	-6.0dBm	37.0000MHz	

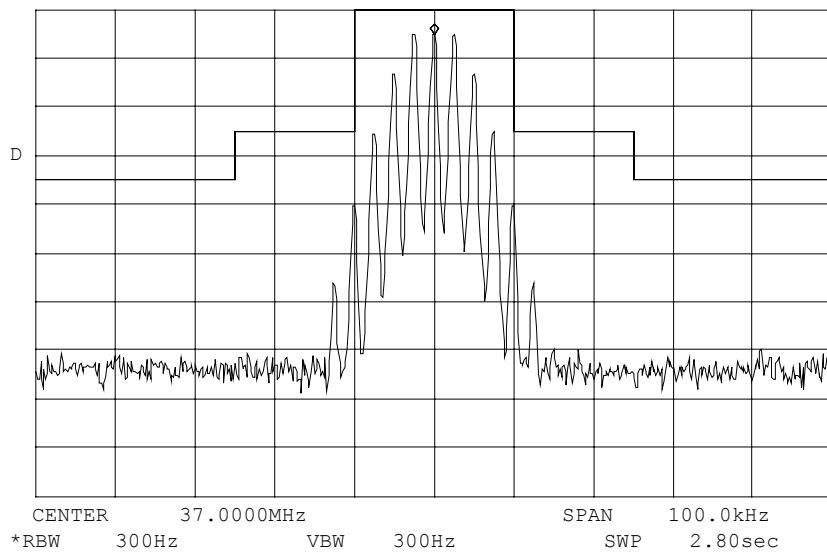

POWER:

LOW

MODULATION:

NONE

MASK: B, VHF/UHF 25kHz,
w/ LPF

PERFORMED BY:

David Lee


PAGE NO.

32 of 53.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

g0330149: 2003-Mar-31 Mon 08:56:00

STATE: 2:High Power AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

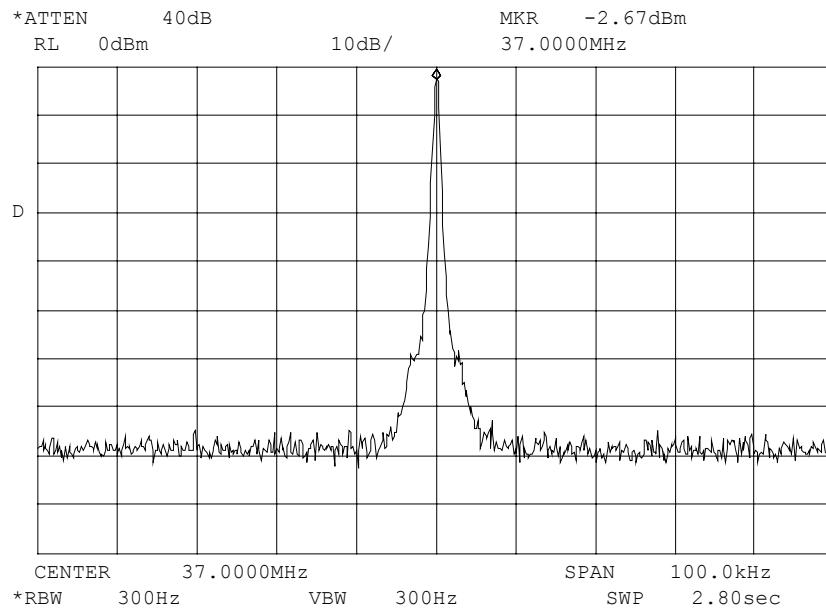

POWER: HIGH
MODULATION: NONE
37MHz

PERFORMED BY:


David Lee



PAGE NO.

33 of 53.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0330159: 2003-Mar-31 Mon 09:57:00
 STATE: 2:High Power AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

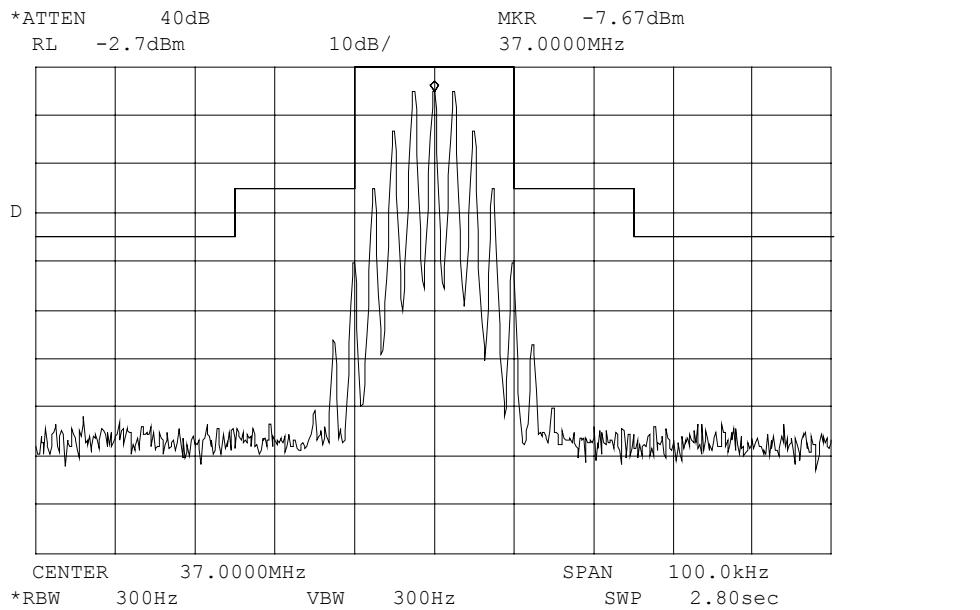

POWER: HIGH
 MODULATION: NONE
 MASK: B, VHF/UHF 25kHz,
 w/LPF

PERFORMED BY:

David Lee


PAGE NO.

34 of 53.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

g0330151: 2003-Mar-31 Mon 09:00:00

STATE: 1:Low Power AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

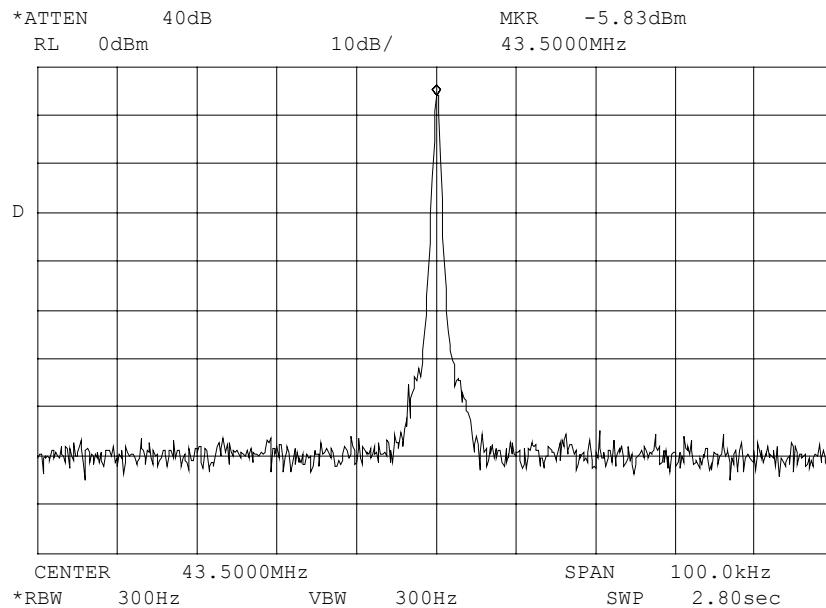

POWER:

LOW

MODULATION:

NONE

43.50MHz

PERFORMED BY:

David Lee




PAGE NO.

35 of 53.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

g0330161: 2003-Mar-31 Mon 10:02:00

STATE: 1:Low Power AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

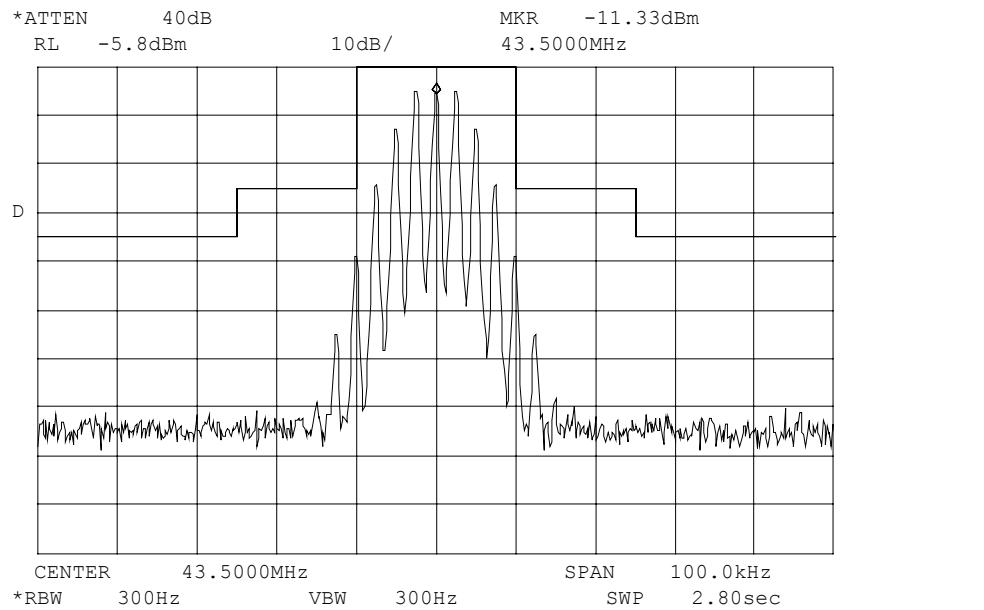

POWER:

LOW

MODULATION:

NONE

MASK: B, VHF/UHF 25kHz,
w/ LPF

PERFORMED BY:

David Lee


PAGE NO.

36 of 53.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

g0330153: 2003-Mar-31 Mon 09:10:00

STATE: 2:High Power AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

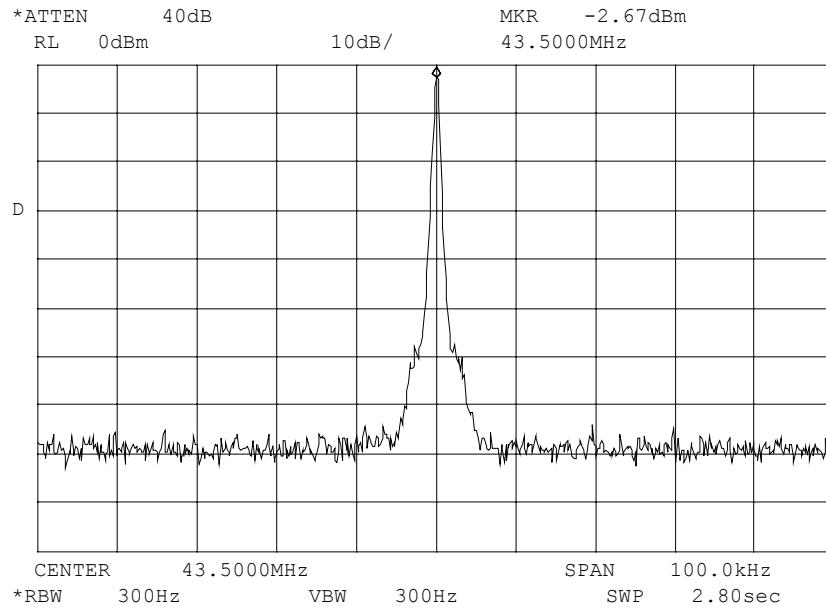

POWER: HIGH
MODULATION: NONE
43.50MHz

PERFORMED BY:


David Lee



PAGE NO.

37 of 53.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0330157: 2003-Mar-31 Mon 09:49:00
 STATE: 2:High Power AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

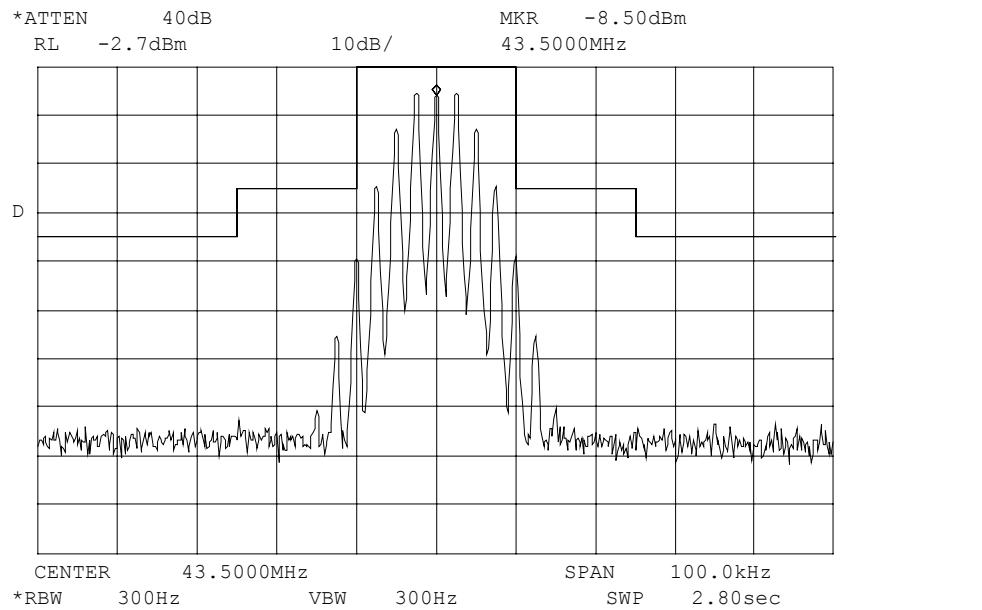

POWER: HIGH
 MODULATION: NONE
 MASK: B, VHF/UHF 25kHz,
 w/LPF

PERFORMED BY:

David Lee


PAGE NO.

38 of 53.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

g0330152: 2003-Mar-31 Mon 09:02:00

STATE: 1:Low Power AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

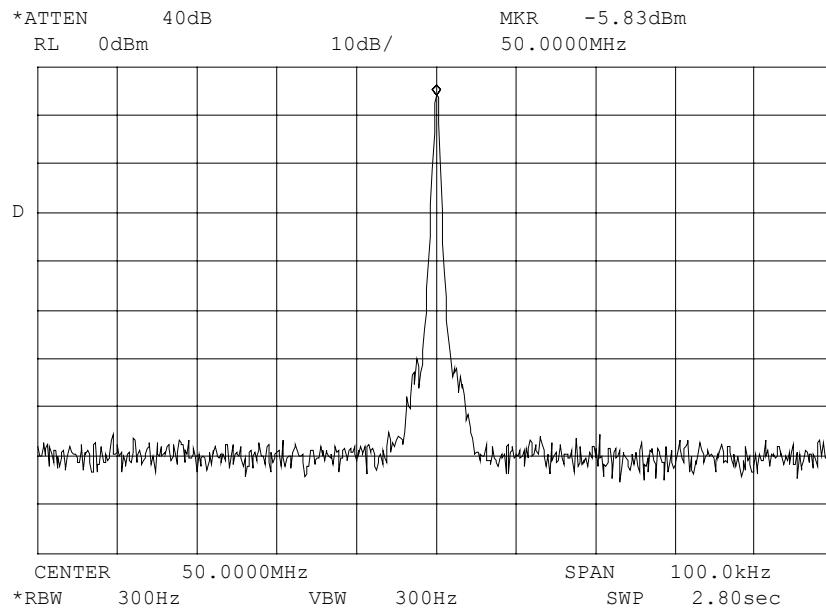

POWER: LOW
MODULATION: NONE
50MHz

PERFORMED BY:

David Lee




PAGE NO.

39 of 53.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

g0330162: 2003-Mar-31 Mon 10:03:00

STATE: 1:Low Power AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

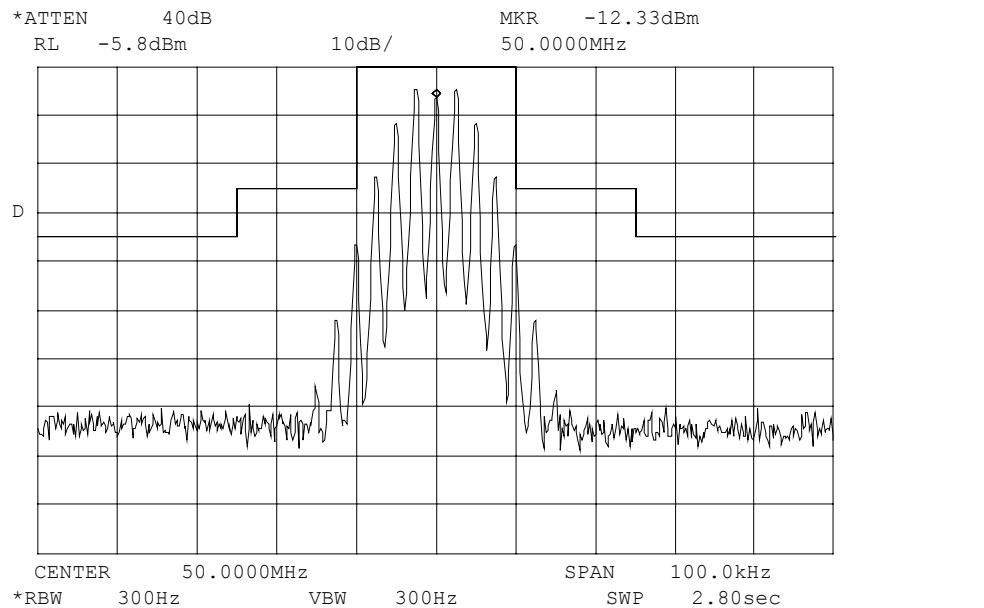

POWER:

LOW

MODULATION:

NONE

MASK: B, VHF/UHF 25kHz,
w/ LPF

PERFORMED BY:

David Lee


PAGE NO.

40 of 53.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

g0330154: 2003-Mar-31 Mon 09:12:00

STATE: 2:High Power AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

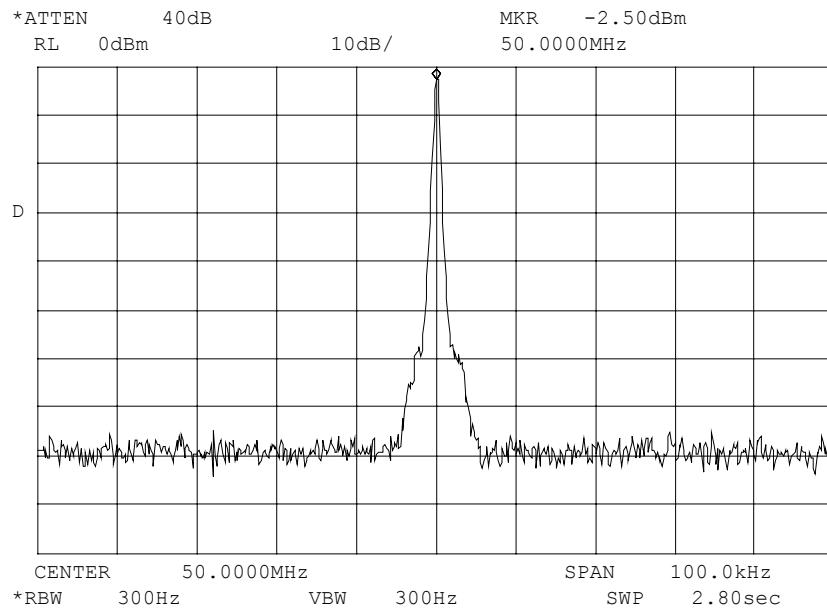

POWER: HIGH
MODULATION: NONE
50MHz

PERFORMED BY:

David Lee




PAGE NO.

41 of 53.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

g0330156: 2003-Mar-31 Mon 09:46:00

STATE: 2:High Power AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

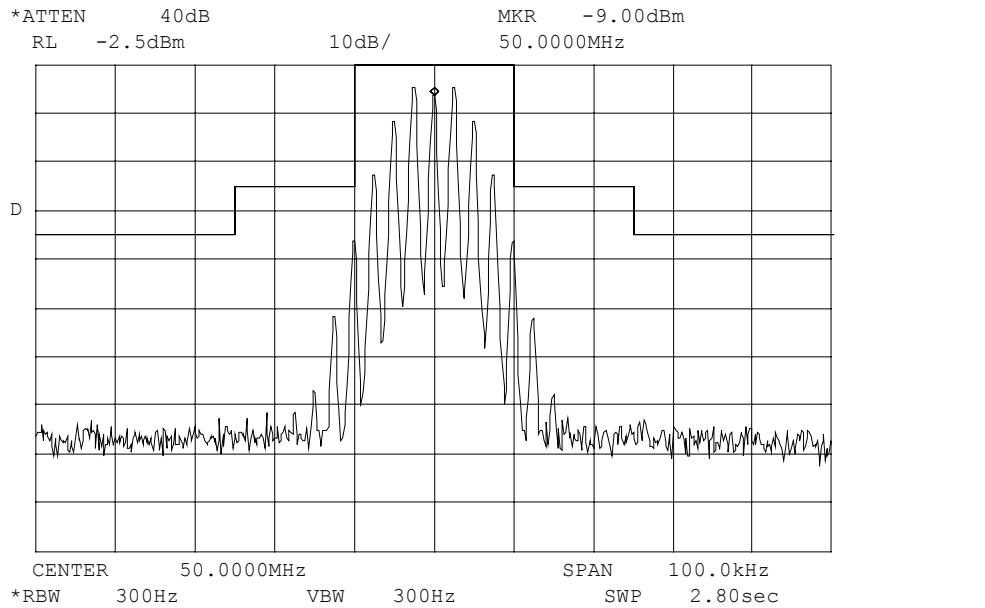POWER:
MODULATION:HIGH
NONE
MASK: B, VHF/UHF 25kHz,
w/ LPF

PERFORMED BY:

David Lee

PAGE NO. 42 of 53.

NAME OF TEST: Audio Low Pass Filter (Voice Input)

SPECIFICATION: 47 CFR 2.1047 (a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.15

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

43 of 53.

TRANSMITTER TEST SET-UP

TEST A. MODULATION CAPABILITY/DISTORTION
 TEST B. AUDIO FREQUENCY RESPONSE
 TEST C. HUM AND NOISE LEVEL
 TEST D. RESPONSE OF LOW PASS FILTER
 TEST E. MODULATION LIMITING

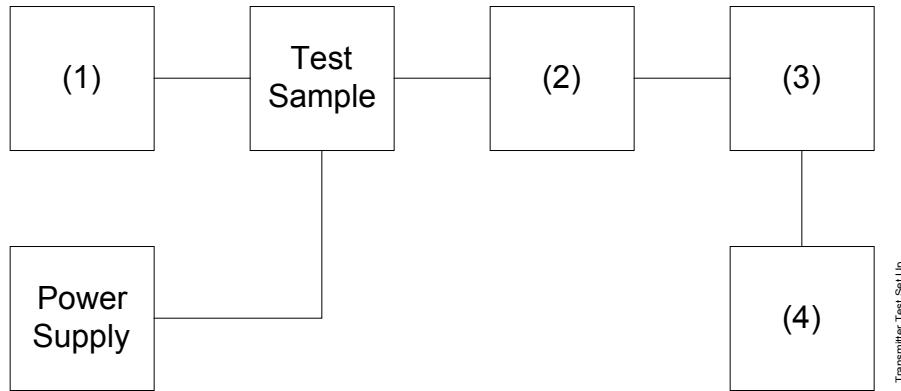

Asset (as applicable)	Description	s/n
(1) <u>Audio Oscillator</u>		
i00010	HP 204D	1105A04683
i00017	HP 8903A	2216A01753
i00118	HP 33120A	US36002064
(2) <u>COAXIAL ATTENUATOR</u>		
i00122	NARDA 766-10	7802
i00123	NARDA 766-10	7802A
i00113	SIERRA 661A-3D	1059
i00069	BIRD 8329 (30 dB)	10066
(3) <u>MODULATION ANALYZER</u>		
i00020	HP 8901A	2105A01087
(4) <u>AUDIO ANALYZER</u>		
i00017	HP 8903A	2216A01753


PAGE NO.

44 of 53.

NAME OF TEST: Audio Low Pass Filter (Voice Input)

g0340125: 2003-Apr-22 Tue 15:30:00

STATE: 0:General AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

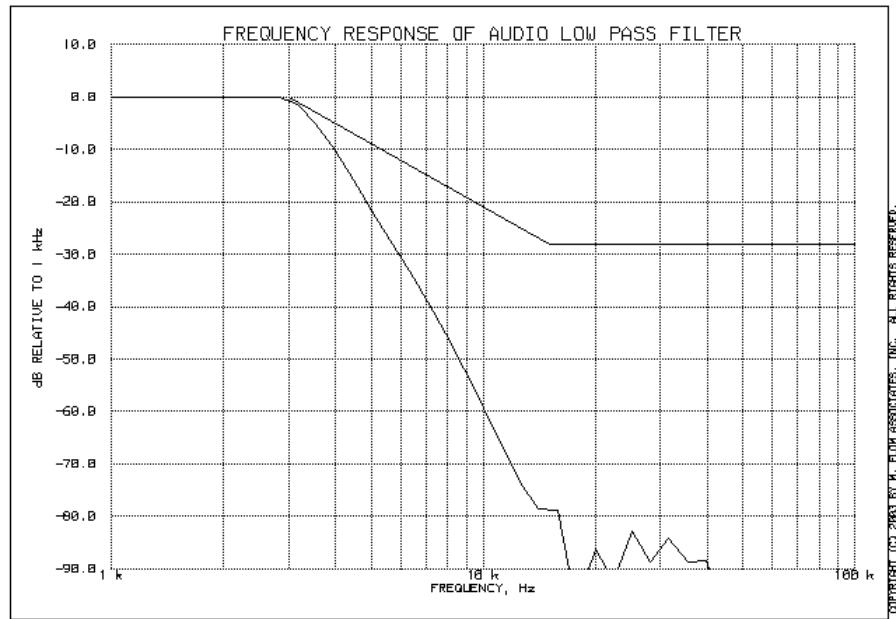

PERFORMED BY:

David Lee

PAGE NO. 45 of 53.

NAME OF TEST: Audio Frequency Response

SPECIFICATION: 47 CFR 2.1047 (a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED


PAGE NO.

46 of 53.

NAME OF TEST: Audio Frequency Response

g0340124: 2003-Apr-22 Tue 15:15:00

STATE: 0:General AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

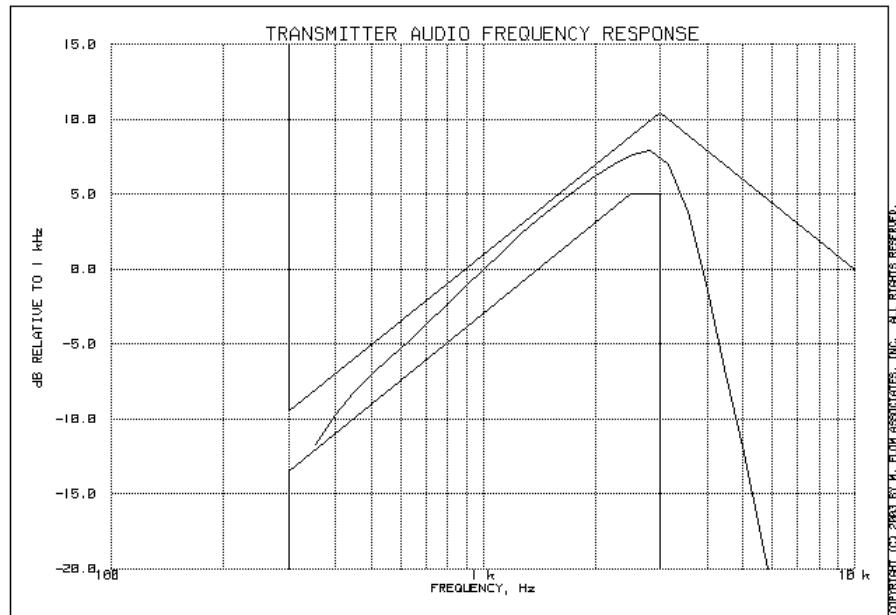

Frequency of Maximum Audio Response, Hz = 2820

Additional points:

FREQUENCY, Hz	LEVEL, dB
300	-16.84
20000	-37.24
30000	-37.17
50000	-37.03

PERFORMED BY:

David Lee

PAGE NO. 47 of 53.

NAME OF TEST: Modulation Limiting

SPECIFICATION: 47 CFR 2.1047 (b)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.


5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.


48 of 53.

NAME OF TEST: Modulation Limiting
 g0340126: 2003-Apr-22 Tue 15:46:00
 STATE: 0:General AMBIENT TEMPERATURE = 72°F, 29.95 HG, 22%RH

Positive
Peaks:

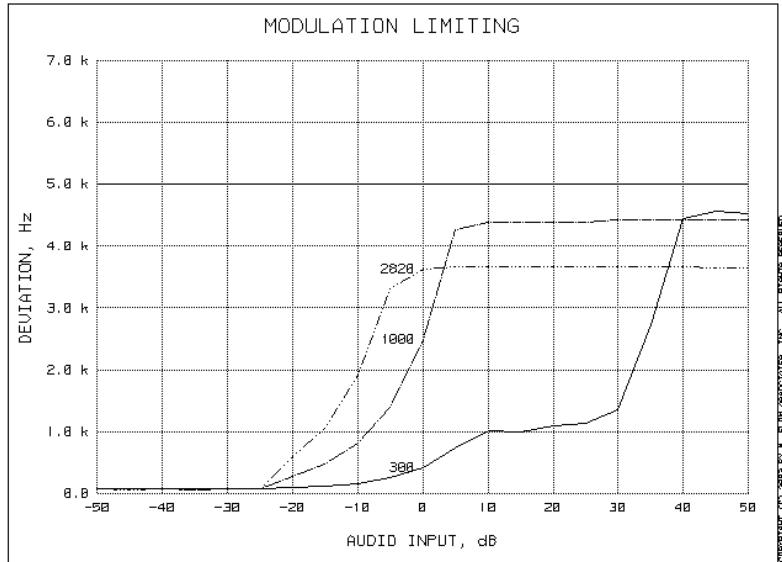

Negative
Peaks:

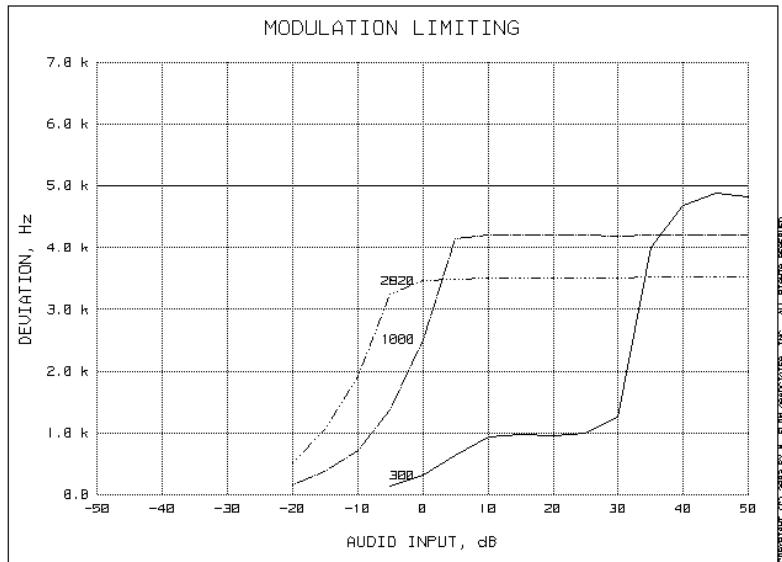

PERFORMED BY:

David Lee

PAGE NO. 49 of 53.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

50 of 53.

TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY
 TEST B. CARRIER FREQUENCY STABILITY
 TEST C. OPERATIONAL PERFORMANCE STABILITY
 TEST D. HUMIDITY
 TEST E. VIBRATION
 TEST F. ENVIRONMENTAL TEMPERATURE
 TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
 TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

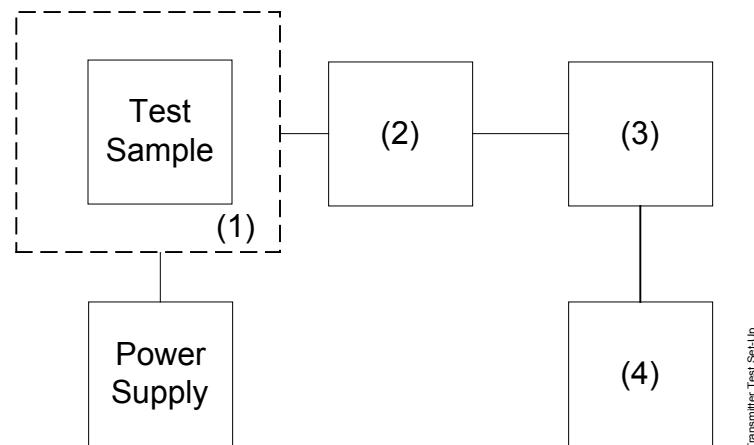

Transmitter Test Set Up

Asset Description (as applicable)		s/n
(1) TEMPERATURE, HUMIDITY, VIBRATION		
i00027 Tenney Temp. Chamber		9083-765-234
i00 Weber Humidity Chamber		
i00 L.A.B. RVH 18-100		
(2) COAXIAL ATTENUATOR		
i00122 NARDA 766-10		7802
i00123 NARDA 766-10		7802A
i00113 SIERRA 661A-3D		1059
i00069 BIRD 8329 (30 dB)		10066
(3) R.F. POWER		
i00014 HP 435A POWER METER		1733A05839
i00039 HP 436A POWER METER		2709A26776
i00020 HP 8901A POWER MODE		2105A01087
(4) FREQUENCY COUNTER		
i00042 HP 5383A		1628A00959
i00019 HP 5334B		2704A00347
i00020 HP 8901A		2105A01087


PAGE NO.

51 of 53.

NAME OF TEST:

Frequency Stability (Temperature Variation)

STATE:

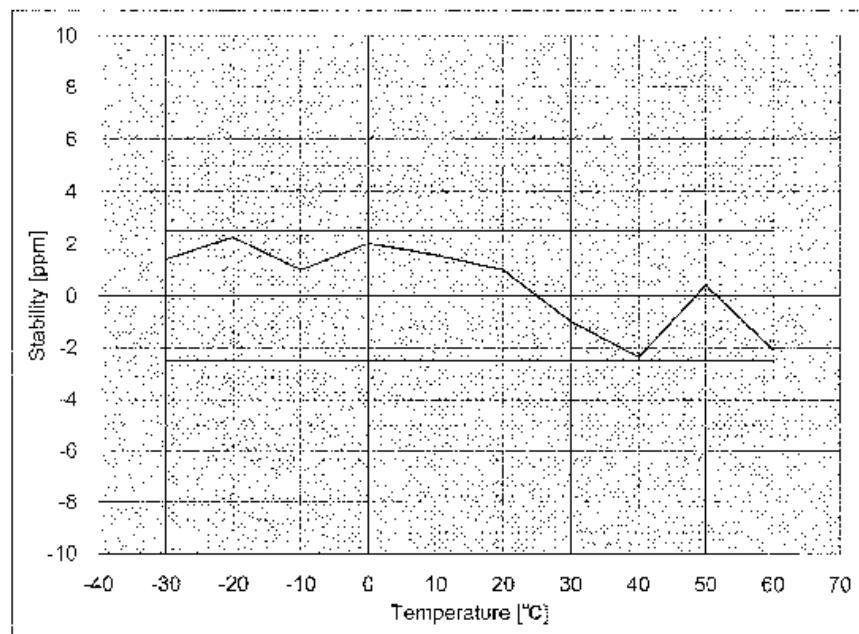

PAGE NO. 52 of 53.

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055(d) (1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at $25\pm5^{\circ}\text{C}$ and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)

g0340127: 2003-Apr-22 Tue 14:47:19

STATE: 0:General AMBIENT TEMPERATURE = 72°F , 29.95 HG, 22%RH

LIMIT, ppm	=	20
LIMIT, Hz	=	870
BATTERY END POINT (Voltage)	=	11.3

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	11.73	43.499990	-10	-0.23
100	13.8	43.500000	0	0.00
115	15.87	43.500010	10	0.23
82	11.3	43.500020	20	0.46



PERFORMED BY:

David Lee

PAGE NO. 53 of 53.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 16K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 3
MAXIMUM DEVIATION (D), kHz	= 5
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B _N), kHz	= $(2 \times M) + (2 \times D \times K)$
	= 16.0

PERFORMED BY:



David Lee

END OF TEST REPORT

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.