

A Test Lab Techno Corp.

Changan Lab : No. 140 -1, Changan Street, Bade City, Taoyuan County, Taiwan R.O.C.
 Tel : 886-3-271-0188 / Fax : 886-3-271-0190

SAR EVALUATION REPORT




Testing Laboratory
1330

| | |
|---------------------------|--|
| Test Report No. | : 0812FS15 |
| Applicant | : Giant Electronics Limited |
| FCC ID : | : K7GMJBGJ |
| Trade Mark | : Motorola |
| Model Number | : MJ270 |
| Battery Type | : Ni-MH Battery (3.6V , 650mAh) ALKALINE Battery X 3 (1.5V AA) |
| Product Name | : Two Way Radio with GMRS/FRS and Weather Band Receiver |
| Date of Test | : Dec. 12, ~ 14, 2007 ; Dec. 09, ~ Dec. 10. 2008 |
| Test Environment | : Ambient Temperature : 22 ± 3 °C Relative Humidity : 40 - 70 % |
| Test Specification | : Standard C95.1-1999 IEEE Std. 1528-2003 2.1093;FCC/OET Bulletin 65 Supplement C [July 2001] |
| Max. SAR | : 0.428 W/kg FRS FACE SAR – 15mm (50% Duty Cycle) 1.478 W/kg GMRS FACE SAR – 15mm (50% Duty Cycle) 0.300 W/kg FRS Body SAR With Headset_15mm(50% Duty Cycle) 1.060 W/kg GMRS Body SAR With Headset_15mm (50% Duty Cycle) 0.368 W/kg FRS Body SAR With Headset_Belt Clip_15mm(50% Duty Cycle) 0.853 W/kg GMRS Body SAR With Headset_Belt Clip _15mm (50% Duty Cycle) (Condition: 50% Duty Cycle and positive power drift) |
| Test Lab | : Changan Lab. |



1. The test operations have to be performed with cautious behavior, the test results are as attached.
2. The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full.


Country Huang 20081225
 Measurement Center Manager

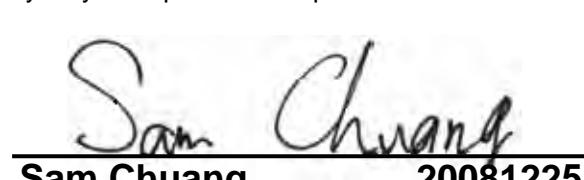
Sam Chuang 20081225
 Testing Engineer



Contents

| | |
|---|----|
| 1. Description of Equipment Under Test (EUT) | 3 |
| 2. Other Accessories..... | 5 |
| 3. Introduction | 7 |
| 4. SAR Definition | 7 |
| 5. SAR Measurement Setup | 8 |
| 6. System Components..... | 10 |
| 6.1 DASY4 E-Field Probe System | 10 |
| 6.2 Data Acquisition Electronic (DAE) System..... | 13 |
| 6.3 Robot..... | 13 |
| 6.4 Measurement Server..... | 13 |
| 6.5 Device Holder for Transmitters | 14 |
| 6.6 Phantom - SAM v4.0..... | 15 |
| 6.7 Data Storage and Evaluation | 15 |
| 7. Test Equipment List | 18 |
| 8. Tissue Simulating Liquids | 19 |
| 8.1 Liquid Confirmation | 21 |
| 9. Measurement Process | 23 |
| 9.1 Device and Test Conditions..... | 23 |
| 9.2 System Performance Check | 24 |
| 9.3 Dosimetric Assessment Setup | 29 |
| 9.4 Spatial Peak SAR Evaluation..... | 31 |
| 10. Measurement Uncertainty | 32 |
| 11. SAR Test Results Summary..... | 34 |
| 11.1 FRS Face SAR -1.5 cm Spacing..... | 34 |
| 11.2 GMRS Face SAR -1.5 cm Spacing | 36 |
| 11.3 FRS Body SAR with Headset -1.5 cm Spacing..... | 38 |
| 11.4 GMRS Body SAR with Headset -1.5 cm Spacing | 40 |
| 11.5 FRS Body SAR with Headset_Belt Clip -1.5 cm Spacing | 42 |
| 11.6 GMRS Body SAR with Headset_Belt Clip -1.5 cm Spacing | 44 |
| 11.7 Std. C95.1-1999 RF Exposure Limit | 49 |
| 12. Conclusion | 50 |
| 13. References | 51 |
| Appendix A - System Performance Check | 52 |
| Appendix B - SAR Measurement Data..... | 53 |
| Appendix C - Calibration | 54 |



1. Description of Equipment Under Test (EUT)

Applicant :

Giant Electronics Limited


7/F., Elite Industrial Bldg., 135-137 Hoi Bun Road, Kwun Tong, Kowloon, Hong Kong

| | |
|--------------------------------|---|
| Manufacturer | : Giant Electronics Ltd. |
| Manufacturer Address | : Elite Building, Nan Shan Road, Nan Shan District, Shenzhen, China. |
| FCC ID | : K7GMJBGJ |
| Product Name | : Two Way Radio with GMRS/FRS and Weather Band Receiver |
| Trade Mark | : Motorola |
| Model Number | : MJ270 |
| Battery Type | : Ni-MH Battery (3.6V , 650mAh) ALKALINE Battery X 3 (1.5V AA) |
| Test Device | : Production Unit |
| TX Frequency | : 467.5625 - 467.7125 MHz (FRS CH8 - CH 14) 462.5500 - 462.7250 MHz (GMRS CH4 - CH 22) |
| Max. RF Output Power | : 0.35 W ERP (25.49 dBm) FRS 1.92 W ERP (32.84 dBm) GMRS |
| Max. SAR Measurement | : 0.428 W/kg FRS FACE SAR -15mm (50% Duty Cycle) 1.478 W/kg GMRS FACE SAR -15mm (50% Duty Cycle) 0.300 W/kg FRS Body SAR With Headset_15mm (50% Duty Cycle) 1.060 W/kg GMRS Body SAR With Headset_15mm (50% Duty Cycle) 0.368 W/kg FRS Body SAR With Headset_Belt Clip_15mm (50% Duty Cycle) 0.853 W/kg GMRS Body SAR With Headset_Belt Clip 15mm (50% Duty Cycle) (Condition: 50% Duty Cycle and positive power drift) |
| Antenna Type | : Fixed Type |
| Antenna Gain | : 0dBi |
| Device Category | : Portable |
| RF Exposure Environment | : General Population / Uncontrolled |
| Battery Option | : Standard |
| Application Type | : Certification |

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment / general population exposure limits specified in Standard C95.1-1999 and had been tested in accordance with the measurement procedures specified in IEEE Std. 1528-2003.

The model (Motorola_MJ270) is the variant product of Motorola_EM1000; Motorola_EM1000 FCC ID is K7GEM1000. Motorola_MJ270 is changed from Motorola_EM1000; the difference from Motorola_EM1000 is the model number.

Some test items of Motorola_MJ270 copy from the original report which is Motorola_EM1000 (report number: 0712FS16).

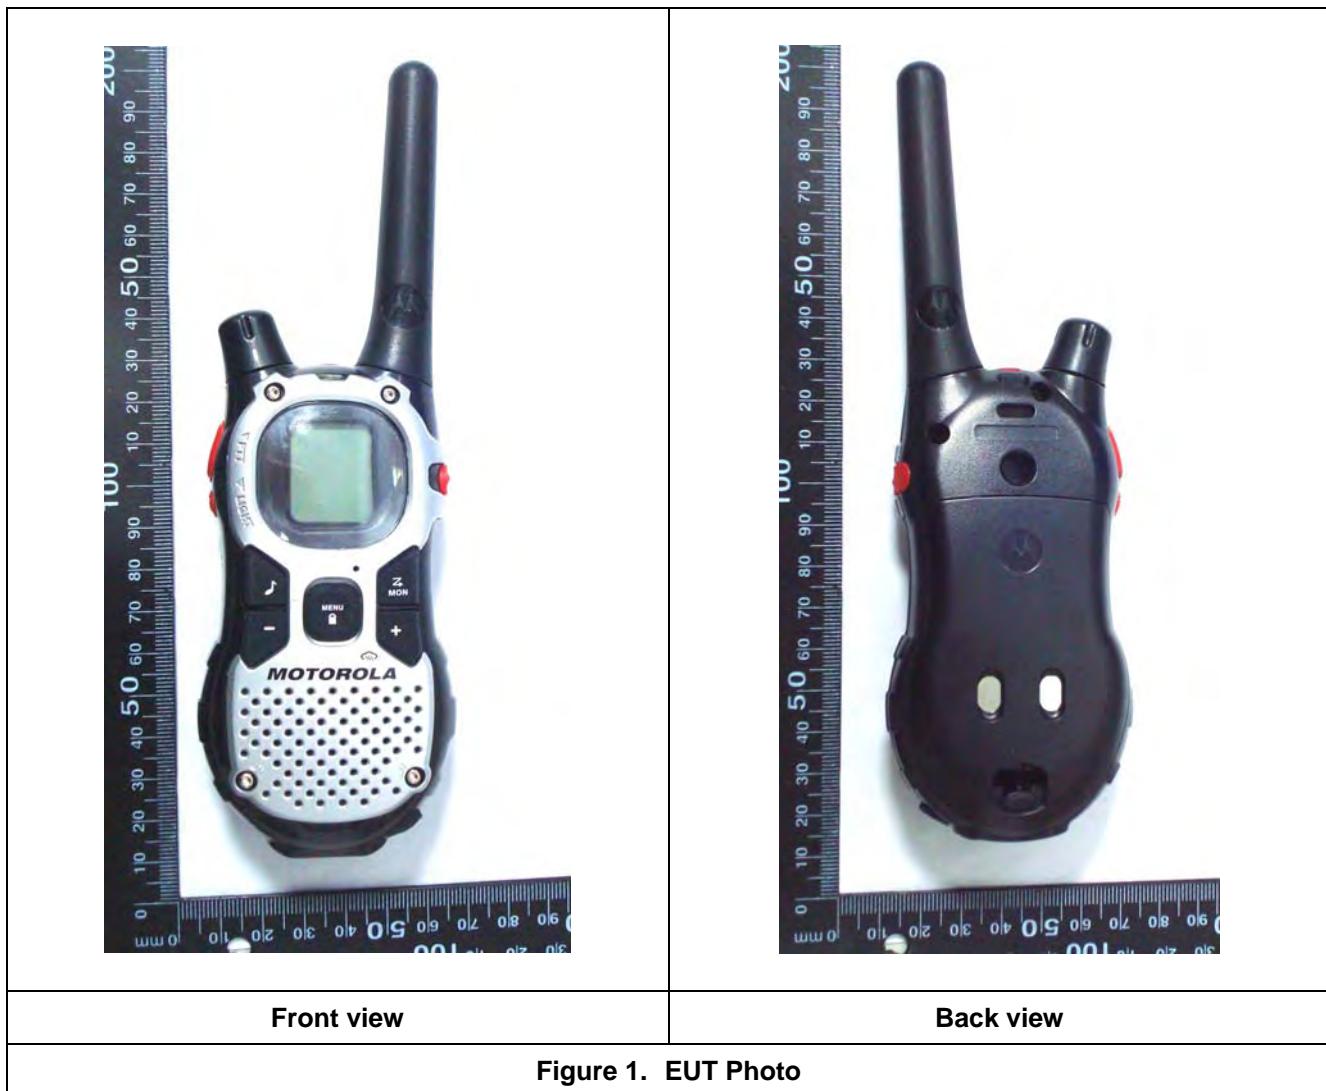

2. Other Accessories



Figure 2. Headset

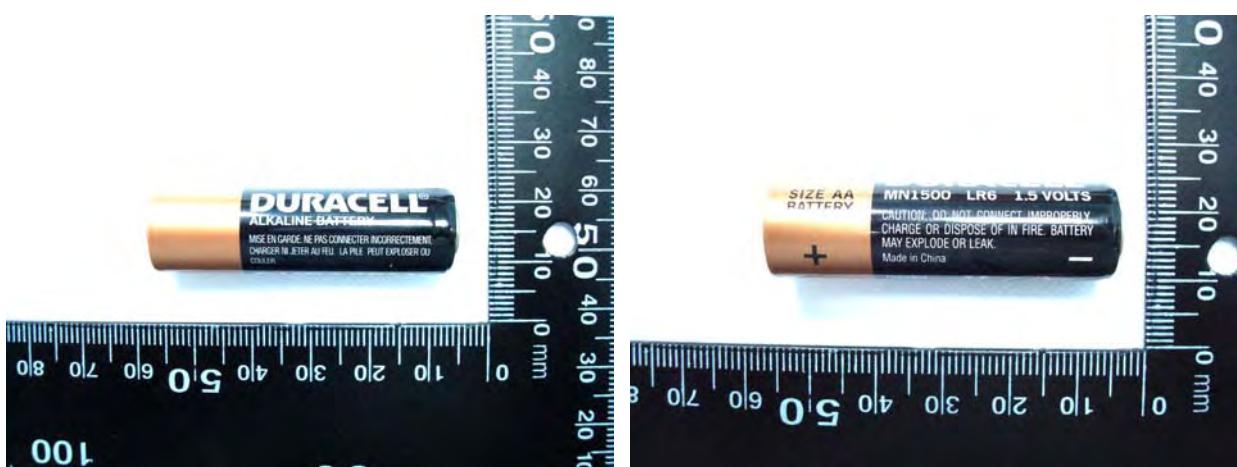


Figure 4. ALKALINE Battery (1.5V AA)



Figure 5. Ni-MH Battery (3.6V 650mAh)

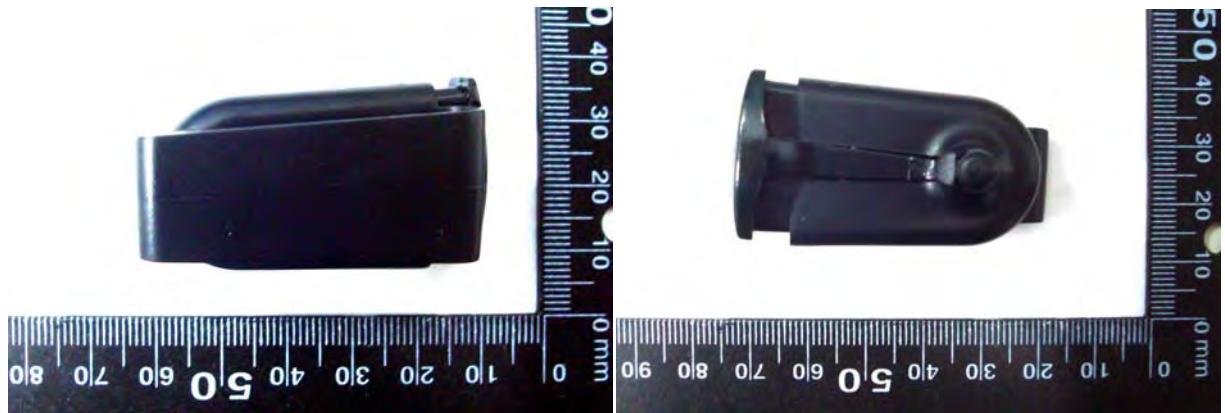


Figure 6. Belt Clip



Figure 7. USB Cable



Figure 8. AC Adapter

3. Introduction

The A Test Lab Techno Corp. RF Testing Laboratory has performed measurements of the maximum potential exposure to the user of **Giant Electronics Limited Trade Mark : Motorola Model(s) : MJ270**. The test procedures, as described in American National Standards, , Institute C95.1 - 1999 [1] , FCC/OET Bulletin 65 Supplement C [July 2001] were employed and they specify the maximum exposure limit of 1.6mW/g as averaged over any 1 gram of tissue for portable devices being used within 20cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.

4. SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Figure 9).

$$\text{SAR} = \frac{d}{dt} \left(\frac{dw}{dm} \right) = \frac{d}{dt} \left(\frac{dw}{\rho dv} \right)$$

Figure 9. SAR Mathematical Equation

SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where :

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

*Note :

The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane [2]



5. **SAR Measurement Setup**

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than $\pm 0.025\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length = 300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Measurement Server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chipdisk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4 I/O-board, which is directly connected to the PC/104 bus of the CPU board. The PC consists of the Intel Pentium 4 2.4GHz computer with Windows2000 system and SAR Measurement Software DASY4, Post Processor SEMCAD, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection...etc. is connected to the Electro-optical converter (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the Measurement Server.

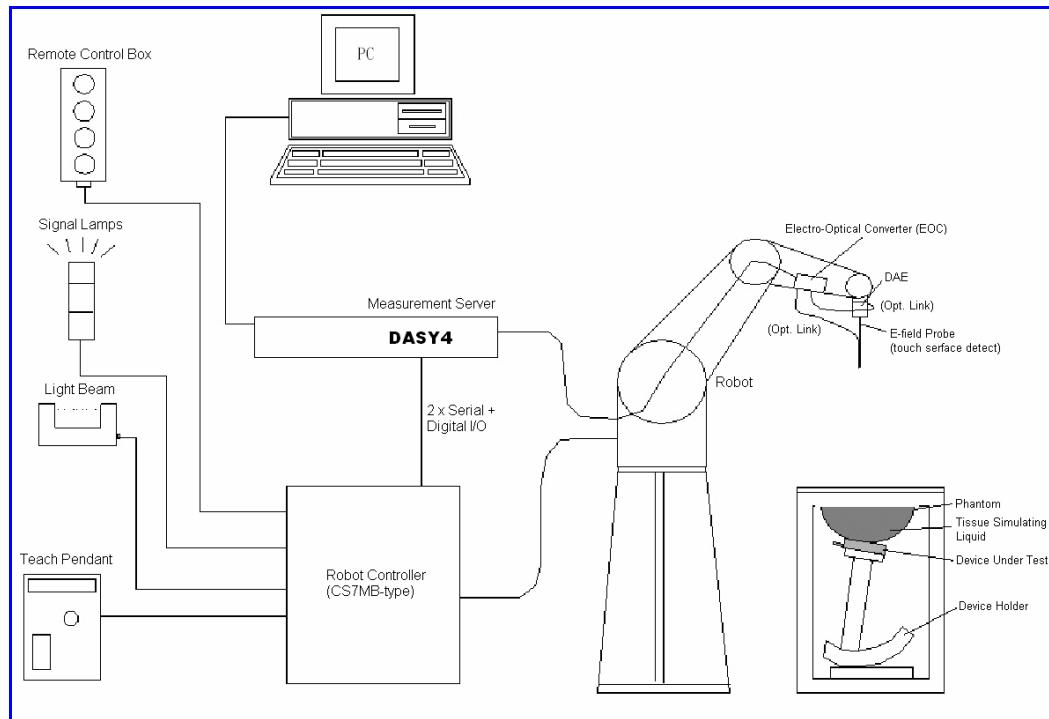


Figure 10. SAR Lab Test Measurement Setup

The DAE3 or DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [3] .



6. System Components

6.1 DASY4 E-Field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration [3] and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

6.1.1 E-Field Probe Specification

| | |
|--------------------------|--|
| Construction | Symmetrical design with triangular core Built-in optical fiber for surface detection System Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycol) |
| Calibration | In air from 10 MHz to 6 GHz In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz, 1800MHz, 2000MHz and 2450MHz (accuracy $\pm 8\%$) Calibration for other liquids and frequencies upon request |
| Frequency | 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz) |
| Directivity | ± 0.3 dB in brain tissue (rotation around probe axis) ± 0.5 dB in brain tissue (rotation normal probe axis) |
| Dynamic Range | $10 \mu \text{W/g}$ to $> 100 \text{mW/g}$; Linearity: $\pm 0.2\text{dB}$ |
| Surface Detection | ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surface |
| Dimensions | Overall length: 330mm Tip length: 20mm Body diameter: 12mm Tip diameter: 2.5mm Distance from probe tip to dipole centers: 1.0mm |
| Application | General dosimetry up to 6GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms |



Figure 11.
E-field Probe



Figure 12.
Probe setup on robot



6.1.2 E-Field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure described in [4] with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in [5] and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 1GHz, and in a wave guide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where :

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (head or body),

ΔT = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where :

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m^3).



6.2 Data Acquisition Electronic (DAE) System

Cell Controller

Processor : Intel Pentium 4
Clock Speed : 2.4GHz
Operating System : Windows 2000 Professional

Data Converter

Features : Signal Amplifier, multiplexer, A/D converter, and control logic
Software : DASY4 v4.7 (Build 71) & SEMCAD v1.8 (Build 184)
Connecting Lines : Optical downlink for data and status info
Optical uplink for commands and clock

6.3 Robot

Positioner : Stäubli Unimation Corp. Robot Model: RX90L
Repeatability : ± 0.025 mm
No. of Axis : 6

6.4 Measurement Server

Processor : PC/104 with a 166MHz low-power Pentium
I/O-board : Link to DAE3 or DEA 4
16-bit A/D converter for surface detection system
Digital I/O interface
Serial link to robot
Direct emergency stop output for robot

6.5 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the IEEE SCC34-SC2 and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).

***Note :** A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations [6]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

Larger DUT cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.

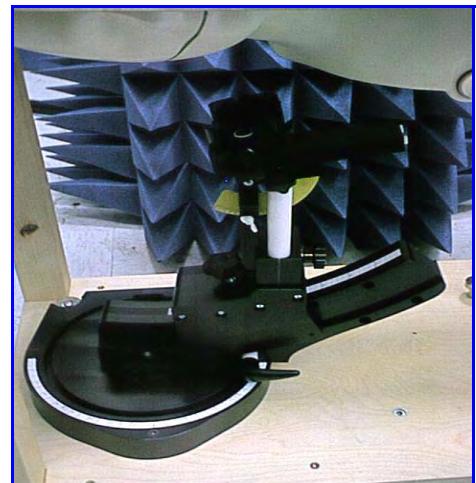


Figure 13.Device Holder

6.6 Phantom - SAM v4.0

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.



Figure 14. SAM Twin Phantom

| | |
|------------------------|-------------------------|
| Shell Thickness | 2 ±0.2 mm |
| Filling Volume | Approx. 25 liters |
| Dimensions | 810x1000x500 mm (HxLxW) |

Table 1. Specification of SAM v4.0

6.7 Data Storage and Evaluation

6.7.1 Data Storage

The DASY4 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension .DA4. The postprocessing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

6.7.2 Data Evaluation

The DASY4 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

| | | |
|----------------------------|---------------------------|-----------------------------------|
| Probe parameters : | - Sensitivity | Norm _i , ai0, ai1, ai2 |
| | - Conversion factor | ConvF _i |
| | - Diode compression point | dcp _i |
| Device parameters : | - Frequency | f |
| | - Crest factor | cf |
| Media parameters : | - Conductivity | σ |
| | - Density | ρ |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated :

E-field probes :

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes :

$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i ($i = x, y, z$)

$Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)

$\mu V/(V/m)^2$ for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

***Note:** that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = \frac{H_{tot}^2}{37.7}$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



7. Test Equipment List

| Manufacturer | Name of Equipment | Type/Model | Serial Number | Calibration | |
|---------------|---------------------------------|-----------------------|----------------|---------------|---------------|
| | | | | Last Cal. | Due Date |
| SPEAG | Dosimetric E-Field Probe | ET3DV6 | 1530 | Sep. 23, 2008 | Sep. 23, 2009 |
| SPEAG | Dosimetric E-Field Probe | ET3DV6 | 1531 | Jan. 22, 2007 | Jan. 22, 2008 |
| SPEAG | 450MHz System Validation Kit | D450V2 | 1021 | Mar. 19, 2008 | Mar. 19, 2009 |
| SPEAG | 450MHz System Validation Kit | D450V2 | 1021 | Mar. 15, 2007 | Mar. 15, 2008 |
| SPEAG | Data Acquisition Electronics | DAE4 | 541 | Feb. 21, 2008 | Feb. 21, 2009 |
| SPEAG | Data Acquisition Electronics | DAE3 | 393 | Aug. 29, 2007 | Aug. 29, 2008 |
| SPEAG | Device Holder | N/A | N/A | NCR | NCR |
| SPEAG | Phantom | SAM V4.0 | 1009 | NCR | NCR |
| SPEAG | Robot | Staubli RX90L | F00/589B1/A/01 | NCR | NCR |
| SPEAG | Software | DASY4 V4.7 Build 55 | N/A | NCR | NCR |
| SPEAG | Software | SEMCAD V1.8 Build 176 | N/A | NCR | NCR |
| SPEAG | Measurement Server | SE UMS 001 BA | 1021 | NCR | NCR |
| R & S | Wireless Communication Test Set | CMU200 | 112387 | Oct. 31, 2008 | Oct. 31, 2009 |
| Agilent | Wireless Communication Test Set | E5515C | MY47511156 | May. 27, 2008 | May. 27, 2009 |
| Agilent | ENA Series Network Analyzer | E5071B | MY42402996 | Nov. 04, 2008 | Nov. 04, 2009 |
| Agilent | Dielectric Probe Kit | 85070C | US99360094 | NCR | NCR |
| R&S | Power Sensor | NRP-Z22 | 100179 | May. 03, 2008 | May. 03, 2009 |
| Agilent | Power Meter | E4418B | GB40206143 | May. 23, 2007 | May. 23, 2008 |
| Agilent | Power Sensor | 8481H | 3318A20779 | May. 28, 2007 | May. 28, 2008 |
| Agilent | Signal Generator | E8257D | MY44320425 | Jul. 03, 2008 | Jul. 03, 2009 |
| Agilent | Signal Generator | E8257D | MY44320425 | Jul. 03, 2007 | Jul. 03, 2008 |
| Agilent | Dual Directional Coupler | 778D | 50334 | NCR | NCR |
| Mini-Circuits | Power Amplifier | ZHL-42W-SMA | D111103#5 | NCR | NCR |

Table 2. Test Equipment List

8. Tissue Simulating Liquids

The Head and body mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an 85070C Dielectric Probe Kit and an 8720ES Network Analyzer.

IEEE SCC-34/SC-2 in 1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified in 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equation and extrapolated according to the head parameter specified in 1528.

| Target Frequency (MHz) | Head | | Body | |
|---|--------------|----------------|--------------|----------------|
| | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) |
| 150 | 52.3 | 0.76 | 61.9 | 0.80 |
| 300 | 45.3 | 0.87 | 58.2 | 0.92 |
| 450 | 43.5 | 0.87 | 56.7 | 0.94 |
| 835 | 41.5 | 0.90 | 55.2 | 0.97 |
| 900 | 41.5 | 0.97 | 55.0 | 1.05 |
| 915 | 41.5 | 0.98 | 55.0 | 1.06 |
| 1450 | 40.5 | 1.20 | 54.0 | 1.30 |
| 1610 | 40.3 | 1.29 | 53.8 | 1.40 |
| 1800 - 2000 | 40.0 | 1.40 | 53.3 | 1.52 |
| 2450 | 39.2 | 1.80 | 52.7 | 1.95 |
| 3000 | 38.5 | 2.40 | 52.0 | 2.73 |
| 5800 | 35.3 | 5.27 | 48.2 | 6.00 |
| (ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m ³) | | | | |

Table 3. Tissue dielectric parameters for head and body phantoms

8.1 Ingredients

The following ingredients are used:

- Water: deionized water (pure H₂O), resistivity $\geq 16 \text{ M } \Omega$ -as basis for the liquid
- Sugar: refined white sugar (typically 99.7 % sucrose, available as crystal sugar in food shops)
-to reduce relative permittivity
- Salt: pure NaCl -to increase conductivity
- Cellulose: Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20 °C), CAS # 54290 -to increase viscosity and to keep sugar in solution.
- Preservative: Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 -to prevent the spread of bacteria and molds
- DGBE: Diethylenglycol-monobutyl ether (DGBE), Fluka Chemie GmbH, CAS # 112-34-5 -to reduce relative permittivity

8.2 Recipes

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands.

Note: The goal dielectric parameters (at 22 °C) must be achieved within a tolerance of $\pm 5\%$ for ϵ and $\pm 5\%$ for σ .

| Liquid type | HSL 450 - A | |
|-----------------------------------|-------------|------------|
| Ingredient | Weight (g) | Weight (%) |
| Water | 522.94 | 38.91 |
| Sugar | 765.09 | 56.93 |
| Cellulose | 3.39 | 0.25 |
| Salt | 50.94 | 3.79 |
| Preventol | 1.63 | 0.12 |
| Total amount | 1'344.00 | 100.00 |
| Goal dielectric parameters | | |
| Frequency [MHz] | 450 | |
| Relative Permittivity | 43.5 | |
| Conductivity [S/m] | 0.87 | |

| Liquid type | | HSL 450 - B | |
|----------------------------|--|-------------|------------|
| Ingredient | | Weight (g) | Weight (%) |
| Water | | 590.62 | 46.21 |
| Sugar | | 654.00 | 51.17 |
| Cellulose | | 2.36 | 0.18 |
| Salt | | 29.96 | 2.34 |
| Preventol | | 1.06 | 0.08 |
| Total amount | | 1'278.00 | 100.00 |
| Goal dielectric parameters | | | |
| Frequency [MHz] | | 450 | |
| Relative Permittivity | | 56.7 | |
| Conductivity [S/m] | | 0.94 | |

8.3 Liquid Confirmation

8.3.1 Parameters

| Liquid Verify | | | | | | | | |
|---|--------|-----------|--------------|--------------|----------------|---------------|-----------|---------------|
| Ambient Temperature : $22 \pm 3 \text{ }^{\circ}\text{C}$; Relative Humidity : 40-70 % | | | | | | | | |
| Liquid Type | Freq. | Temp (°C) | Parameters | Target Value | Measured Value | Deviation (%) | Limit (%) | Measured Date |
| 450MHz Head | 450MHz | 22.0 | ϵ_r | 43.5 | 45.00 | 3.45% | ± 5 | Dec. 12, 2007 |
| | | | σ | 0.87 | 0.854 | -1.84% | ± 5 | |
| 450MHz Head | 450MHz | 22.0 | ϵ_r | 43.5 | 45.00 | 3.45% | ± 5 | Dec. 14, 2007 |
| | | | σ | 0.87 | 0.854 | -1.84% | ± 5 | |
| 450MHz Head | 450MHz | 22.0 | ϵ_r | 43.5 | 44.60 | 2.53% | ± 5 | Dec. 09, 2008 |
| | | | σ | 0.87 | 0.880 | 1.15% | ± 5 | |
| 450MHz Body | 450MHz | 22.0 | ϵ_r | 56.7 | 55.00 | -3.00% | ± 5 | Dec. 13, 2007 |
| | | | σ | 0.94 | 0.917 | -2.45% | ± 5 | |
| 450MHz Body | 450MHz | 22.0 | ϵ_r | 56.7 | 55.00 | -3.00% | ± 5 | Dec. 14, 2007 |
| | | | σ | 0.94 | 0.917 | -2.45% | ± 5 | |
| 450MHz Body | 450MHz | 22.0 | ϵ_r | 56.7 | 56.30 | -0.71% | ± 5 | Dec. 10, 2008 |
| | | | σ | 0.94 | 0.940 | 0.00% | ± 5 | |

Table 4. Measured Tissue dielectric parameters for head and body phantoms

8.3.2 Liquid Depth

The liquid level was during measurement 15cm ± 0.5 cm.

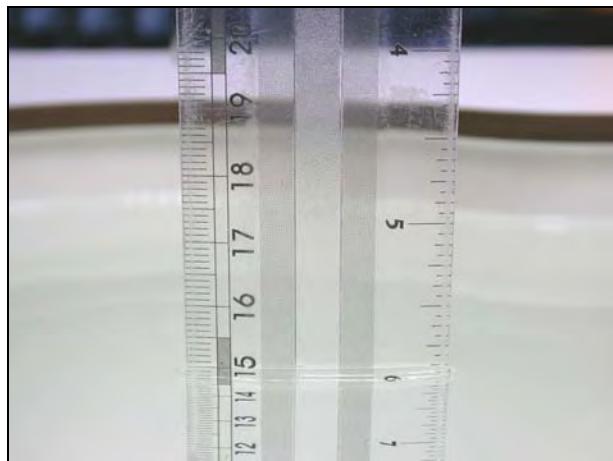


Figure 15. Head-Tissue-Simulating-Liquid

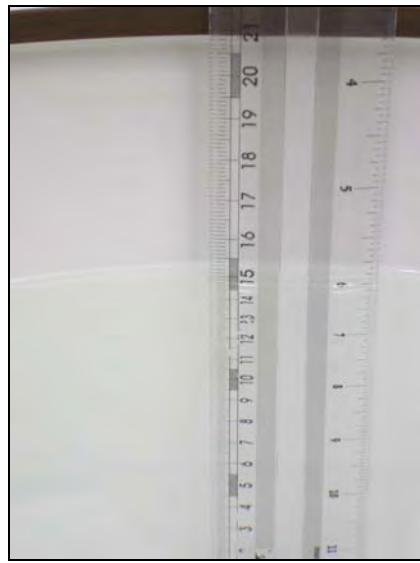


Figure 16. Body-Tissue-Simulating-Liquid

9. Measurement Process

9.1 Device and Test Conditions

The Test Device was provided by Giant Electronics Limited for this evaluation. The spatial peak SAR values were assessed for the lowest, middle and highest channels defined by FRS (Ch8 = 467.5625MHz, Ch11 = 467.6375MHz, Ch14 = 467.7125MHz) and GMRS (Ch15 = 462.5500MHz, Ch4 = 462.6375MHz, Ch22 = 462.7250MHz) systems. Battery and accessories shall be those specified by the manufacturer. The battery shall be fully charged before each measurement and there shall be no external connections.

| | | | | |
|---|----------------|---|----------------------|------------------------------|
| Usage | | Operates with a built-in test mode by client | | |
| Distance between antenna axis at the joint and the liquid surface: | | For Body, EUT front to phantom, 15mm separation. EUT back to phantom, 15mm separation. EUT back to phantom, to attach belt clip. | | |
| Simulating human Head/Body | | Head / Body | | |
| EUT Battery | | Fully-charged with Ni-MH battery or ALKALINE. | | |
| Output Power (ERP) | Channel | | Frequency MHz | Before SAR Test (dBm) |
| | FRS | Highest - 14 | 467.7125 | 25.47 |
| | | Middle - 11 | 467.6375 | 25.45 |
| | | Lowest - 08 | 467.5625 | 25.49 |
| | GMRS | Highest - 22 | 462.7250 | 32.84 |
| | | Middle - 04 | 462.6375 | 32.83 |
| | | Lowest - 15 | 462.5500 | 31.80 |
| | | | | |

9.2 System Performance Check

9.2.1 Symmetric Dipoles for System Validation

| | |
|-------------------------|---|
| Construction | Symmetrical dipole with 1/4 balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions. Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions. |
| Frequency | 450, 900, 1800, 2000, 2450, 5000MHz |
| Return Loss | > 20 dB at specified validation position |
| Power Capability | > 100 W (f < 1GHz); > 40 W (f > 1GHz) |
| Options | Dipoles for other frequencies or solutions and other calibration conditions are available upon request |
| Dimensions | <p>D450V2 : dipole length 270 mm; overall height 330 mm</p> <p>D900V2 : dipole length 149 mm; overall height 330 mm</p> <p>D1800V2 : dipole length 72 mm; overall height 300 mm</p> <p>D2000V2 : dipole length 65 mm; overall height 300 mm</p> <p>D2450V2 : dipole length 51.5 mm; overall height 300 mm</p> <p>D5GHzV2 : dipole length 20.6 mm; overall height 450 mm</p> |




Figure 17. Validation Kit

9.2.2 Validation


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation was performed at 450 MHz.

| Validation kit | | Mixture Type | SAR _{1g} [mW/g] | SAR _{10g} [mW/g] | Date of Calibration | | |
|--------------------|---------------------|-----------------------------|------------------------------|------------------------------|--------------------------|--------|---------------|
| D450V2-SN1021 | | Head | 5.15 | 3.475 | Mar. 15, 2007 | | |
| | | Body | 4.8 | 3.2 | | | |
| D450V2-SN1021 | | Head | 4.90 | 3.27 | Mar. 19, 2008 | | |
| | | Body | 4.72 | 3.17 | | | |
| Frequency (MHz) | Power | SAR _{1g} (mW/g) | SAR _{10g} (mW/g) | Drift (dB) | Difference percentage | Date | |
| | | | | | 1g | 10g | |
| 450 (Head) | 400mW | 2.16 | 1.43 | -0.027 | 4.9 % | 2.9 % | Dec. 12, 2007 |
| | Normalize to 1 Watt | 5.4 | 3.575 | | | | |
| 450 (Head) | 400mW | 2.11 | 1.4 | -0.048 | 2.4 % | 0.7 % | Dec. 14, 2007 |
| | Normalize to 1 Watt | 5.275 | 3.5 | | | | |
| 450 (Head) | 400mW | 1.87 | 1.36 | -0.016 | -4.1% | 4.6% | Dec. 09, 2008 |
| | Normalize to 1 Watt | 4.70 | 3.42 | | | | |
| 450 (Body) | 400mW | 1.84 | 1.22 | -0.071 | -4.2 % | -4.7 % | Dec. 13, 2007 |
| | Normalize to 1 Watt | 4.6 | 3.05 | | | | |
| 450 (Body) | 400mW | 1.96 | 1.29 | -0.017 | 2.1 % | 0.8 % | Dec. 14, 2007 |
| | Normalize to 1 Watt | 4.9 | 3.225 | | | | |
| 450 (Body) | 400mW | 1.82 | 1.27 | 0.000 | -3.2% | 0.8% | Dec. 10, 2008 |
| | Normalize to 1 Watt | 4.57 | 3.19 | | | | |

Z-axis Plot of System Performance Check

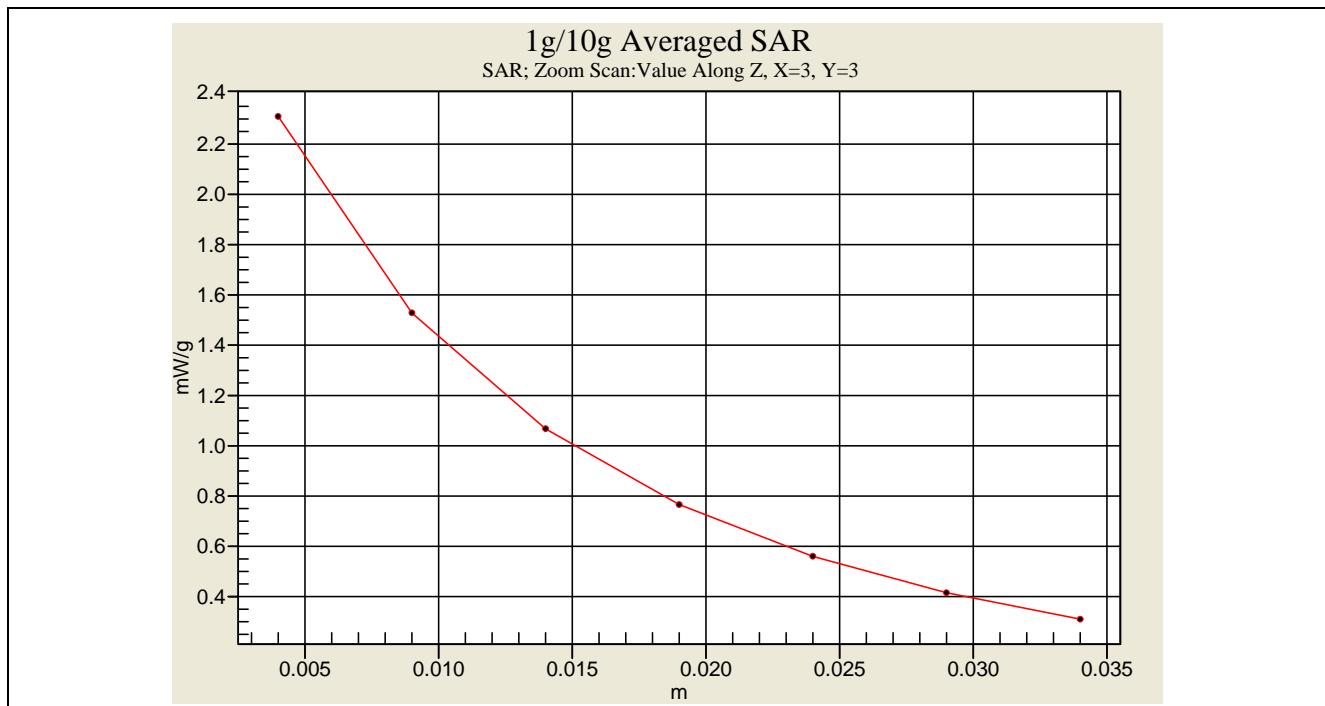


Head-Tissue-Simulating-Liquid 450MHz (2007.12.12)

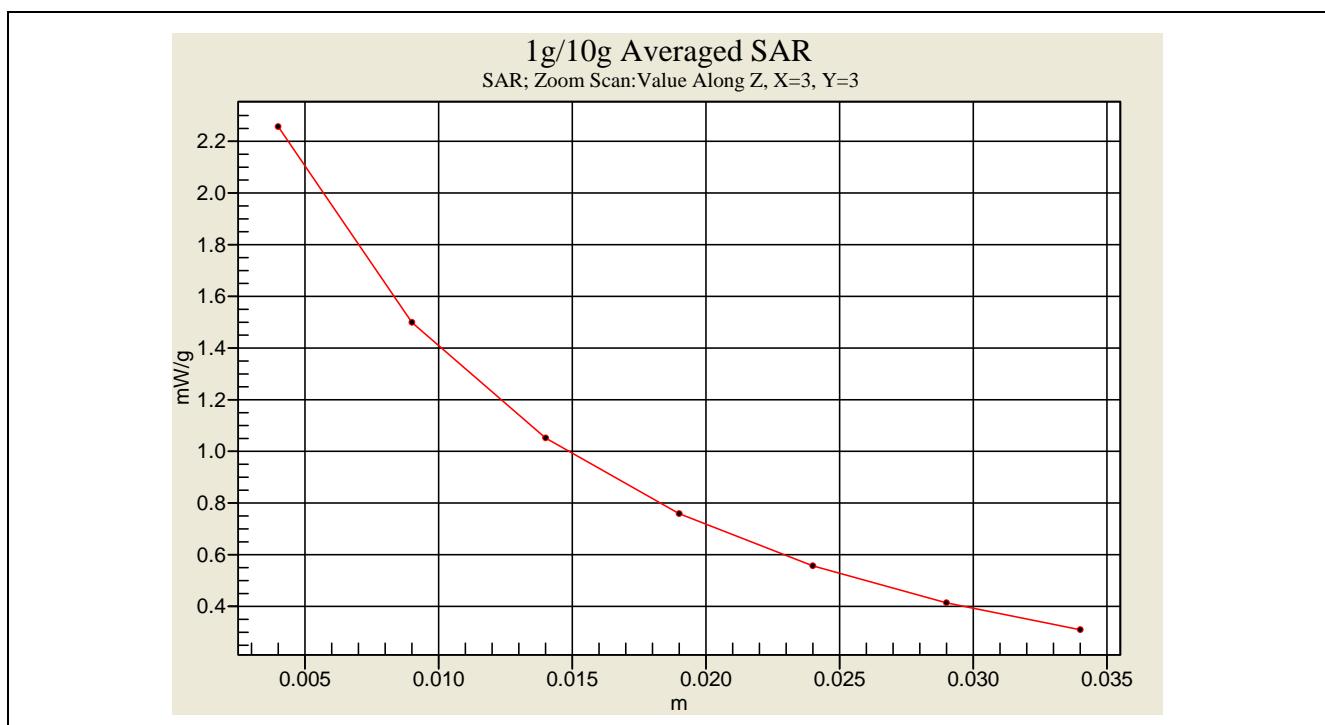


Head -Tissue-Simulating-Liquid 450MHz (2007.12.14)

Z-axis Plot of System Performance Check

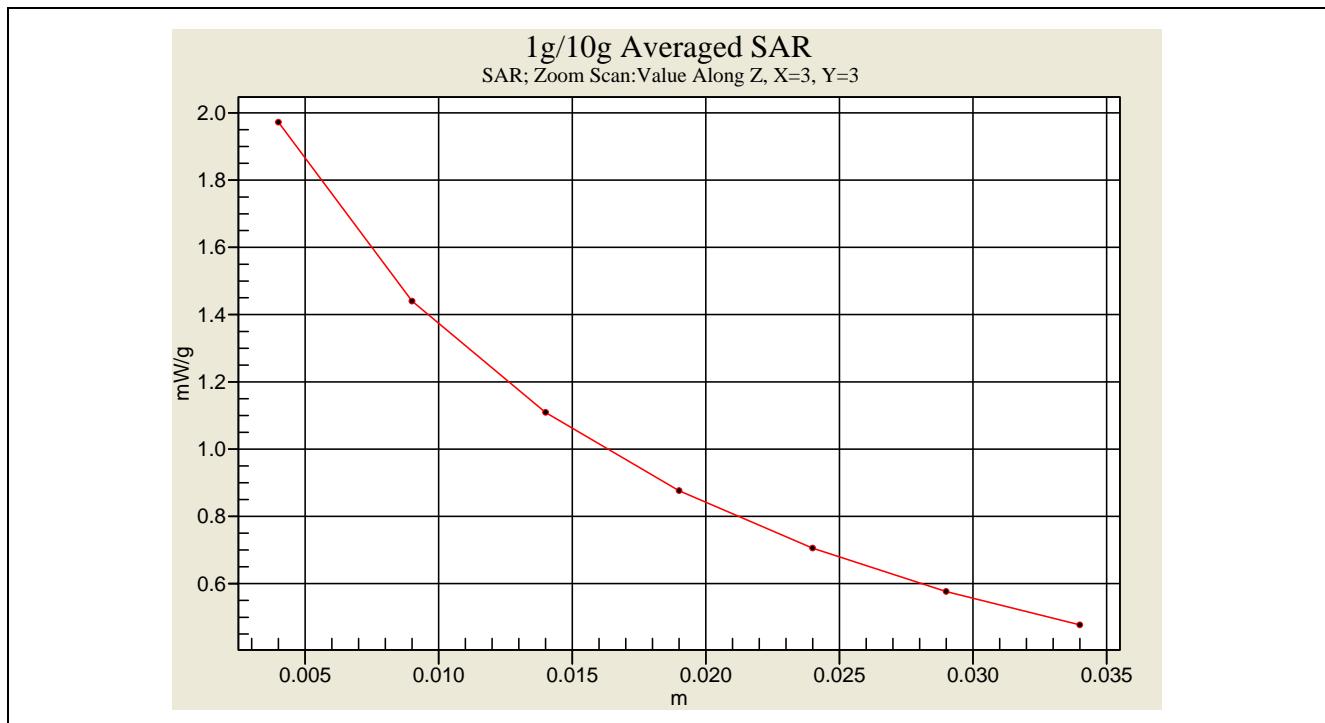


Head -Tissue-Simulating-Liquid 450MHz (2008.12.09)

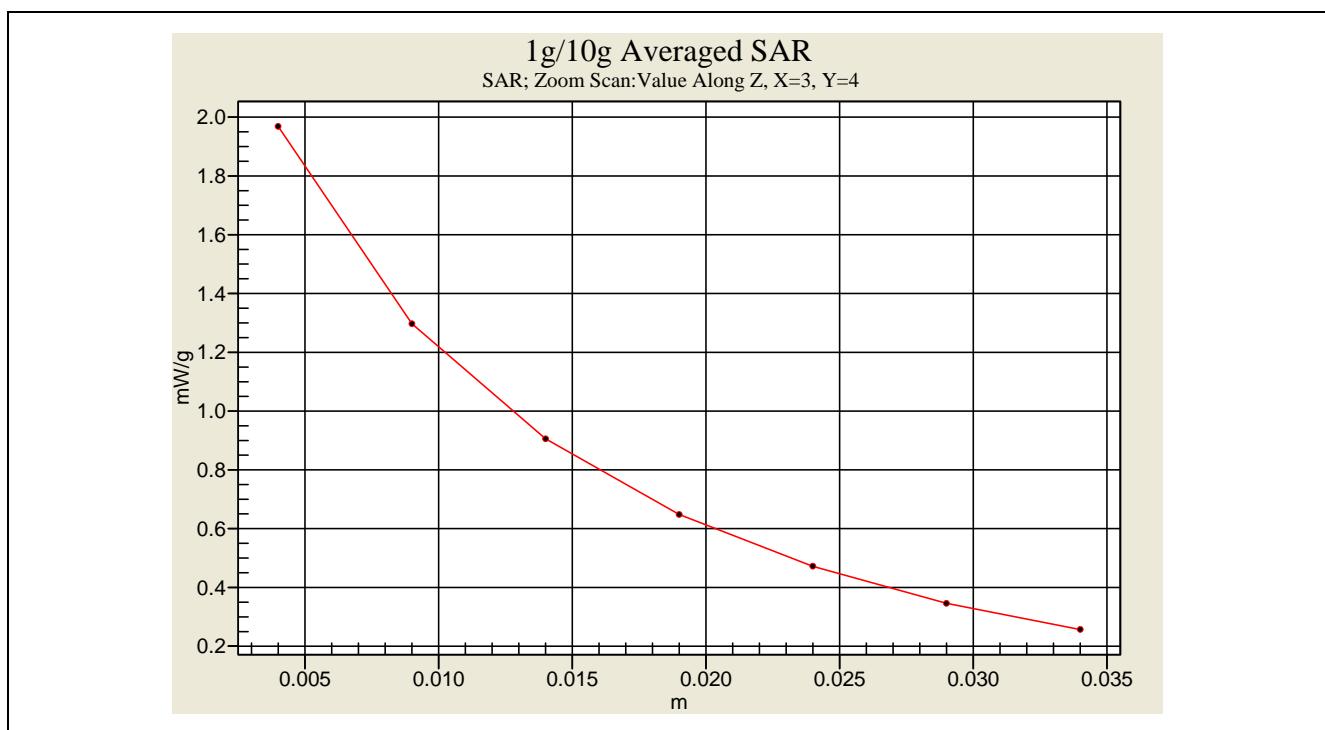


Body-Tissue-Simulating-Liquid 450MHz (2007.12.13)

Z-axis Plot of System Performance Check

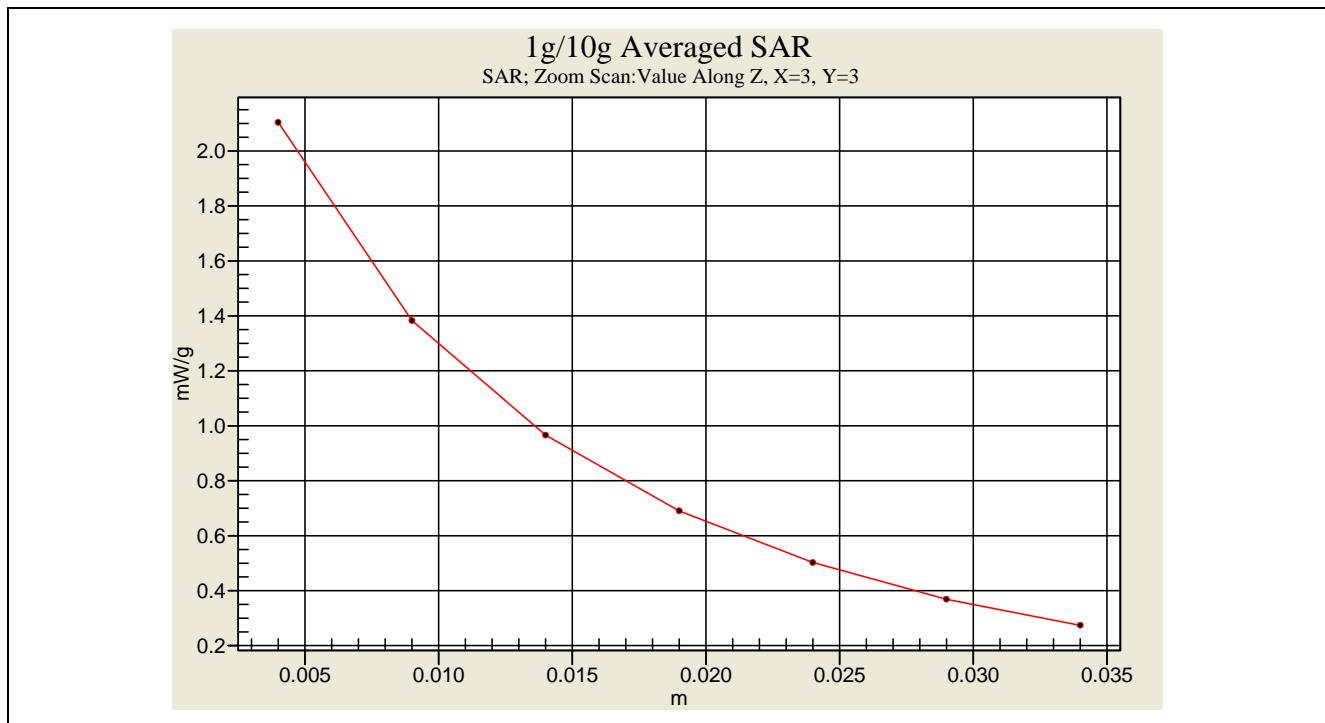

Body-Tissue-Simulating-Liquid 450MHz (2007.12.14)

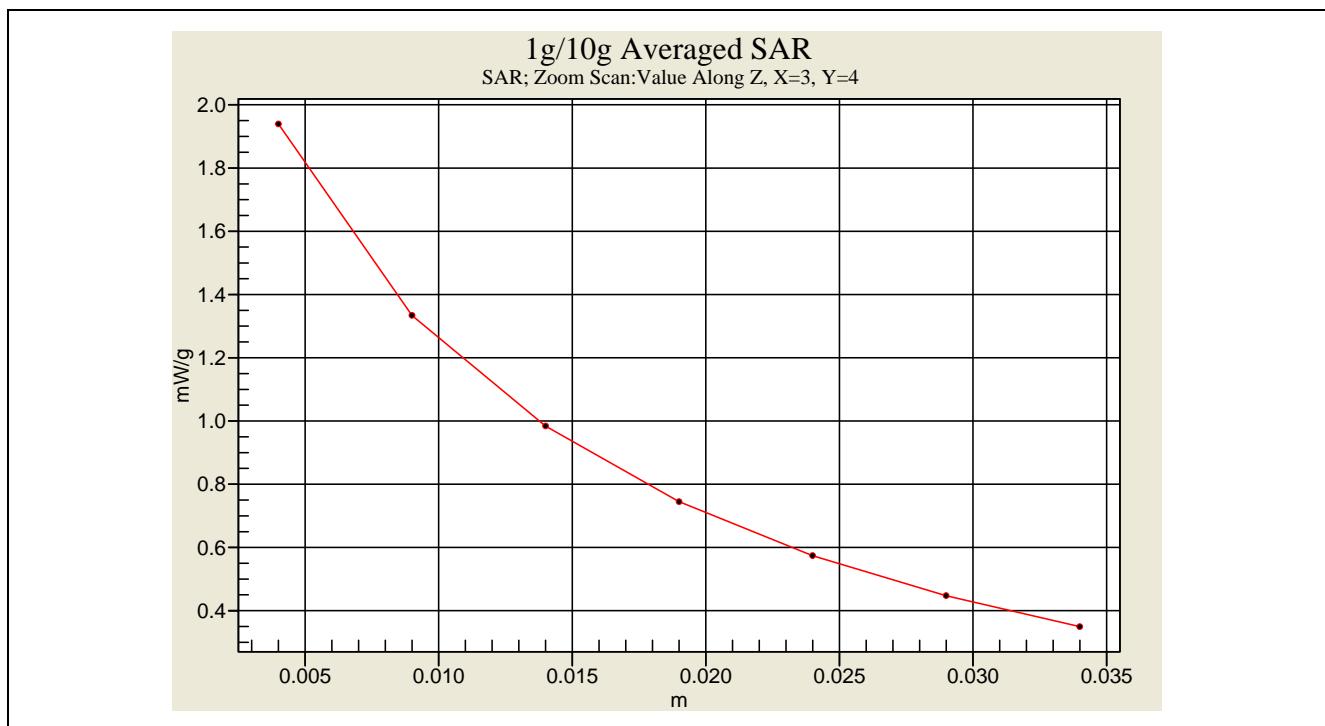

Body-Tissue-Simulating-Liquid 450MHz (2008.12.10)



9.3 Dosimetric Assessment Setup

9.3.1 Body Test Position

Body - Worn Configuration

Body - Worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device.

Body - Worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 15 mm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances.

For this test :

- The EUT is placed into the holster/belt clip and the holster is positioned against the surface of the phantom in a normal operating position.
- Since this EUT doesn't supply any body-worn accessory to the end user, a distance of 15mm was tested to confirm the necessary "minimum SAR separation distance".
(*Note : This distance includes the 2 mm phantom shell thickness.)

9.3.2 Measurement Procedures

The evaluation was performed with the following procedures :

Surface Check : A surface checks job gathers data used with optical surface detection. It determines the distance from the phantom surface where the reflection from the optical detector has its peak. Any following measurement jobs using optical surface detection will then rely on this value. The surface check performs its search a specified number of times, so that the repeatability can be verified. The probe tip distance is 1.3mm to phantom inner surface during scans.

Reference : The reference job measures the field at a specified reference position, at 4 mm from the selected section's grid reference point.

Area Scan : The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines can find the maximum locations even in relatively coarse grids. When an area scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. Any following zoom scan within the same procedure will then perform fine scans around these maxima. The area covered the entire dimension of the EUT and the horizontal grid spacing was 15 mm x 15 mm.

Zoom Scan : Zoom scans are used to assess the highest averaged SAR for cubic averaging volumes with 1 g and 10 g of simulated tissue. The zoom scan measures 5 x 5 x 7 points in a 32 x 32 x 30 mm cube whose base faces are centered around the maxima returned from a preceding area scan within the same procedure.

Drift : The drift job measures the field at the same location as the most recent reference job within the same procedure, with the same settings. The drift measurement gives the field difference in dB from the last reference measurement. Several drift measurements are possible for each reference measurement. This allows monitoring of the power drift of the device in the batch process. If the value changed by more than 5%, the evaluation was repeated.

9.4 Spatial Peak SAR Evaluation

The DASY4 software includes all numerical procedures necessary to evaluate the spatial peak SAR values. Based on the Draft: SCC-34, SC-2, WG-2 - Computational Dosimetry, IEEE P1529/D0.0 (Draft Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) Associated with the Use of Wireless Handsets - Computational Techniques), a new algorithm has been implemented. The spatial-peak SAR can be computed over any required mass.

The base for the evaluation is a "cube" measurement in a volume of (32x32x30)mm³ (5x5x7 points). The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan. If the 10g cube or both cubes are not entirely inside the measured volumes, the system issues a warning regarding the evaluated spatial peak values within the Postprocessing engine (SEMCAD). This means that if the measured volume is shifted, higher values might be possible. To get the correct values you can use a finer measurement grid for the area scan. In complicated field distributions, a large grid spacing for the area scan might miss some details and give an incorrectly interpolated peak location.

The entire evaluation of the spatial peak values is performed within the Postprocessing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into three stages:

Interpolation and Extrapolation

The probe is calibrated at the center of the dipole sensors which is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated.

In DASY4, the choice of the coordinate system defining the location of the measurement points has no influence on the uncertainty of the interpolation, Maxima Search and SAR extrapolation routines. The interpolation, Maxima Search and extrapolation routines are all based on the modified Quadratic Shepard's method [7].



10. Measurement Uncertainty

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, we estimate the measurement uncertainties in SAR to be less than $\pm 27\%$ [8].

According to Std. C95.3 [9], the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of ± 1 to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ± 2 dB can be expected.

According to CENELEC [10], typical worst-case uncertainty of field measurements is ± 5 dB. For well-defined modulation characteristics the uncertainty can be reduced to ± 3 dB.

| Source of Uncertainty | Uncertainty Value | Probability Distribution | Divisor | c_i | Standard Uncertainty $\pm 1\% (1-g)$ | V_i or V_{eff} |
|---|-------------------|--------------------------|------------|--------------|--------------------------------------|--------------------|
| Type-A | 0.9 % | Normal | 1 | 1 | 0.9 | 9 |
| Measurement System | | | | | | |
| Probe Calibration | 7 % | Normal | 2 | 1 | 3.5 | ∞ |
| Axial Isotropy | 0.2dB | Rectangular | $\sqrt{3}$ | $\sqrt{0.5}$ | 1.9 | ∞ |
| Hemispherical Isotropy | 9.6 % | Rectangular | $\sqrt{3}$ | $\sqrt{0.5}$ | 3.9 | ∞ |
| Spatial Resolution | 0 % | Rectangular | $\sqrt{3}$ | 1 | 0 | ∞ |
| Boundary Effect | 11.0 % | Rectangular | $\sqrt{3}$ | 1 | 6.4 | ∞ |
| Linearity | 0.2dB | Rectangular | $\sqrt{3}$ | 1 | 2.7 | ∞ |
| Detection Limit | 1.0 % | Rectangular | $\sqrt{3}$ | 1 | 0.6 | ∞ |
| Readout Electronics | 1.0 % | Normal | 1 | 1 | 1.0 | ∞ |
| RF Ambient Conditions | 3.0 % | Rectangular | $\sqrt{3}$ | 1 | 1.73 | ∞ |
| Probe Positioner Mech. Const. | 0.4 % | Rectangular | $\sqrt{3}$ | 1 | 0.2 | ∞ |
| Probe Positioning | 0.35 % | Rectangular | $\sqrt{3}$ | 1 | 0.2 | ∞ |
| Extrapolation and Integration | 3.9 % | Rectangular | $\sqrt{3}$ | 1 | 2.3 | ∞ |
| Test sample Related | | | | | | |
| Test sample Positioning | 4.7 % | Normal | 1 | 1 | 4.7 | 5 |
| Device Holder Uncertainty | 6.1 % | Normal | 1 | 1 | 6.1 | 5 |
| Drift of Output Power | 5.0 % | Rectangular | $\sqrt{3}$ | 1 | 2.9 | ∞ |
| Phantom and Setup | | | | | | |
| Phantom Uncertainty (Including temperature effects) | 4.0% | Rectangular | $\sqrt{3}$ | 1 | 2.3 | ∞ |
| Liquid Conductivity (target) | 5.0% | Rectangular | $\sqrt{3}$ | 0.6 | 1.7 | ∞ |
| Liquid Conductivity (meas.) | 10.0% | Rectangular | $\sqrt{3}$ | 0.6 | 3.4 | ∞ |
| Liquid Permittivity (target) | 5.0% | Rectangular | $\sqrt{3}$ | 0.6 | 1.7 | ∞ |
| Liquid Permittivity (meas.) | 5.0% | Rectangular | $\sqrt{3}$ | 0.6 | 1.7 | ∞ |
| Combined standard uncertainty | | RSS | | | 13.5 | 88.7 |
| Expanded uncertainty (Coverage factor = 2) | | Normal (k=2) | | | 27 | |

Table 5. Uncertainty Budget of DASY



11. SAR Test Results Summary

11.1 FRS Face SAR _ 15 mm Spacing

Ambient :

Temperature (°C) : 22 ± 2 Relative HUMIDITY (%) : 40-70

Liquid :

Mixture Type : HSL450 Liquid Temperature (°C) : 22
Depth of liquid (cm) : 15

Measurement :

Crest Factor : 1 Probe S/N : 1531 / 1530

| Frequency | | Modulation | Battery | Accessory | SAR _{1g} [mW/g] | | Power Drift | Amb. Temp | Remark | |
|--|-----|------------|----------|-----------|---|-------|-------------|-----------|---------------------|--|
| | | | | | Duty Cycle | | | | | |
| MHz | Ch. | | | | 100% | 50% | | | | |
| 467.5625 | 8 | FM | Ni-MH | N/A | 0.566 | 0.283 | -0.033 | 21.8 | EM1000 | |
| 467.5625 | 8 | FM | Alkaline | N/A | 0.849 | 0.425 | -0.039 | 21.7 | EM1000 | |
| 467.5625 | 8 | FM | Ni-MH | N/A | 0.425 | 0.213 | -0.028 | 21.0 | MJ270 USB Cable | |
| 467.5625 | 8 | FM | Ni-MH | N/A | 0.285 | 0.143 | -0.050 | 21.0 | MJ270 AC Adapter | |
| 467.6375 | 11 | FM | Ni-MH | N/A | 0.537 | 0.269 | -0.059 | 21.8 | EM1000 | |
| 467.7125 | 14 | FM | Ni-MH | N/A | 0.529 | 0.265 | -0.029 | 21.6 | EM1000 | |
| Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population | | | | | 1.6 W/kg (mW/g) Averaged over 1 gram | | | | | |

◆ SAR values are scaled for the power drift

| Frequency | | Battery | SAR _{1g} [mW/g] | | power drift (dB) | + power drift 10^(dB/10) | SAR _{1g} [mW/g] (include +power drift) | |
|-----------|-----|----------|--------------------------|-------|------------------|--------------------------|--|-------|
| | | | Duty Cycle | | | | Duty Cycle | |
| MHz | Ch. | | 100% | 50% | | | 100% | 50% |
| 467.5625 | 8 | Ni-MH | 0.566 | 0.283 | -0.033 | 1.008 | 0.570 | 0.285 |
| 467.5625 | 8 | Alkaline | 0.849 | 0.425 | -0.039 | 1.009 | 0.857 | 0.428 |
| 467.5625 | 8 | Ni-MH | 0.425 | 0.213 | 0.425 | 1.103 | 0.469 | 0.234 |
| 467.5625 | 8 | Ni-MH | 0.285 | 0.143 | 0.285 | 1.068 | 0.304 | 0.152 |
| 467.6375 | 11 | Ni-MH | 0.537 | 0.269 | -0.059 | 1.014 | 0.544 | 0.272 |
| 467.7125 | 14 | Ni-MH | 0.529 | 0.265 | -0.029 | 1.007 | 0.533 | 0.266 |

SAR is basically proportional to average transmit power and duty cycle


(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).

SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

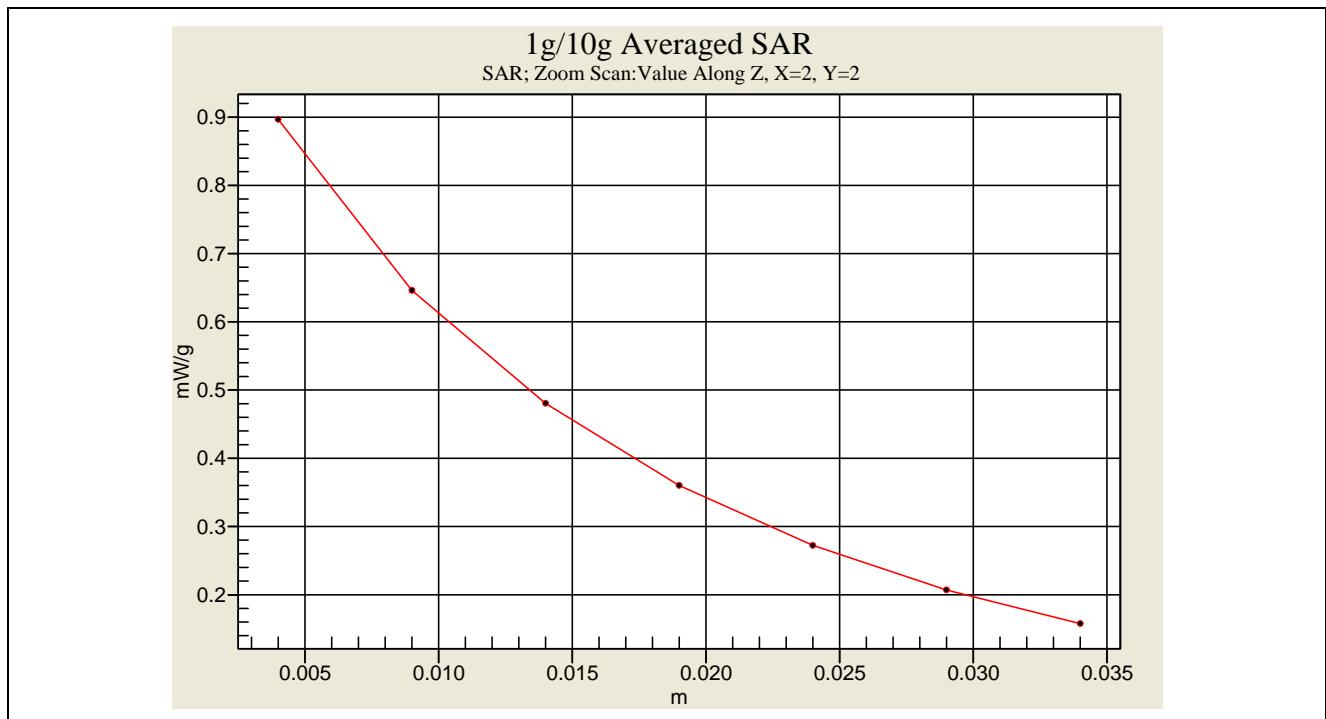Z-axis Plot of SAR Measurement

FRS Head SAR -1.5 cm Spacing _ CH8 _ ALKALINE (2007.12.12)



11.2 GMRS Face SAR -1.5 cm Spacing

Ambient :

| | | | |
|--------------------|---------------|-------------------------|--------------|
| Temperature (°C) : | <u>22 ± 2</u> | Relative HUMIDITY (%) : | <u>40-70</u> |
| Liquid : | | | |

| | | | |
|----------------|---------------|---------------------------|-----------|
| Mixture Type : | <u>HSL450</u> | Liquid Temperature (°C) : | <u>22</u> |
| | | Depth of liquid (cm) : | <u>15</u> |

Measurement :

| | | | |
|----------------|----------|-------------|--------------------|
| Crest Factor : | <u>1</u> | Probe S/N : | <u>1531 / 1530</u> |
|----------------|----------|-------------|--------------------|

| Frequency | | Modulation | Battery | Accessory | SAR _{1g} [mW/g] | | Power Drift | Amb. Temp | Remark | |
|--|-----|------------|----------|-----------|---|-------|-------------|-----------|---------------------|--|
| | | | | | Duty Cycle | | | | | |
| MHz | Ch. | | | | 100% | 50% | | | | |
| 462.5500 | 15 | FM | Ni-MH | N/A | 2.790 | 1.395 | -0.040 | 21.9 | EM1000 | |
| 462.6375 | 4 | FM | Ni-MH | N/A | 2.860 | 1.430 | -0.036 | 22.9 | EM1000 | |
| 462.7250 | 22 | FM | Ni-MH | N/A | 2.890 | 1.445 | -0.034 | 21.9 | EM1000 | |
| 462.7250 | 22 | FM | Alkaline | N/A | 2.930 | 1.465 | -0.038 | 22.8 | EM1000 | |
| 462.7250 | 22 | FM | Ni-MH | N/A | 1.910 | 0.955 | -0.026 | 21.0 | MJ270 USB Cable | |
| 462.7250 | 22 | FM | Ni-MH | N/A | 1.730 | 0.865 | -0.034 | 21.0 | MJ270 AC Adapter | |
| Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population | | | | | 1.6 W/kg (mW/g) Averaged over 1 gram | | | | | |

- SAR values are scaled for the power drift

| Frequency | | Battery | SAR _{1g} [mW/g] | | power drift (dB) | + power drift 10^(dB/10) | SAR _{1g} [mW/g] (include +power drift) | |
|-----------|-----|----------|--------------------------|-------|------------------|--------------------------|--|-------|
| | | | Duty Cycle | | | | Duty Cycle | |
| MHz | Ch. | | 100% | 50% | | | 100% | 50% |
| 462.5500 | 15 | Ni-MH | 2.790 | 1.395 | -0.040 | 1.009 | 2.816 | 1.408 |
| 462.6375 | 4 | Ni-MH | 2.860 | 1.430 | -0.036 | 1.008 | 2.884 | 1.442 |
| 462.7250 | 22 | Ni-MH | 2.890 | 1.445 | -0.034 | 1.008 | 2.913 | 1.456 |
| 462.7250 | 22 | Alkaline | 2.930 | 1.465 | -0.038 | 1.009 | 2.956 | 1.478 |
| 462.7250 | 22 | Ni-MH | 1.910 | 0.955 | -0.026 | 1.006 | 1.921 | 0.961 |
| 462.7250 | 22 | Ni-MH | 1.730 | 0.865 | -0.034 | 1.008 | 1.744 | 0.872 |

SAR is basically proportional to average transmit power and duty cycle


(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).

SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

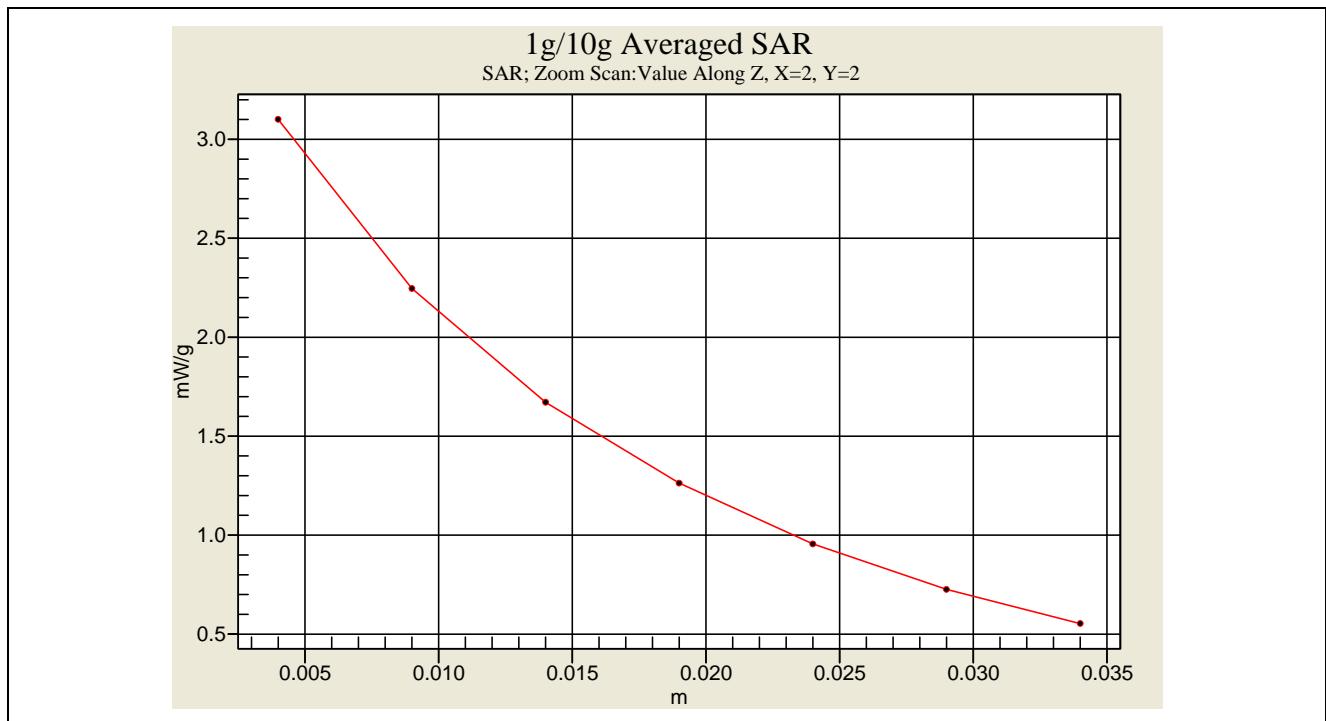Z-axis Plot of SAR Measurement



11.3 FRS Body SAR with Headset _ 1.5 cm Spacing

Ambient :

| | | | |
|--------------------|---------------|-------------------------|--------------|
| Temperature (°C) : | <u>22 ± 2</u> | Relative HUMIDITY (%) : | <u>40-70</u> |
| Liquid : | | | |

| | | | |
|----------------|---------------|---------------------------|-----------|
| Mixture Type : | <u>MSL450</u> | Liquid Temperature (°C) : | <u>22</u> |
| | | Depth of liquid (cm) : | <u>15</u> |

| | | | |
|----------------|----------|-------------|-------------|
| Measurement : | | | |
| Crest Factor : | <u>1</u> | Probe S/N : | <u>1531</u> |

| Frequency | | Modulation | Battery | Accessory | SAR _{1g} [mW/g] | | Power Drift | Amb. Temp | Remark | |
|--|-----|------------|----------|-----------|---|-------|-------------|-----------|--------|--|
| | | | | | Duty Cycle | | | | | |
| MHz | Ch. | | | | 100% | 50% | | | | |
| 467.5625 | 8 | FM | Ni-MH | Headset | 0.251 | 0.126 | -0.107 | 22.1 | EM1000 | |
| 467.6375 | 11 | FM | Ni-MH | Headset | 0.282 | 0.141 | -0.091 | 22.1 | EM1000 | |
| 467.7125 | 14 | FM | Ni-MH | Headset | 0.293 | 0.147 | -0.098 | 22.1 | EM1000 | |
| 467.7125 | 14 | FM | Alkaline | Headset | 0.591 | 0.296 | 0.070 | 22.1 | EM1000 | |
| Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population | | | | | 1.6 W/kg (mW/g) Averaged over 1 gram | | | | | |

- ◆ SAR values are scaled for the power drift

| Frequency | | Battery | SAR _{1g} [mW/g] | | power drift (dB) | + power drift 10^(dB/10) | SAR _{1g} [mW/g] (include +power drift) | |
|-----------|-----|----------|--------------------------|-------|------------------|--------------------------|---|-------|
| | | | Duty Cycle | | | | Duty Cycle | |
| MHz | Ch. | | 100% | 50% | | | 100% | 50% |
| 467.5625 | 8 | Ni-MH | 0.251 | 0.126 | -0.107 | 1.025 | 0.257 | 0.129 |
| 467.6375 | 11 | Ni-MH | 0.282 | 0.141 | -0.091 | 1.021 | 0.288 | 0.144 |
| 467.7125 | 14 | Ni-MH | 0.293 | 0.147 | -0.098 | 1.023 | 0.300 | 0.150 |
| 467.7125 | 14 | Alkaline | 0.591 | 0.296 | 0.070 | 1.016 | 0.601 | 0.300 |

SAR is basically proportional to average transmit power and duty cycle


(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).

SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

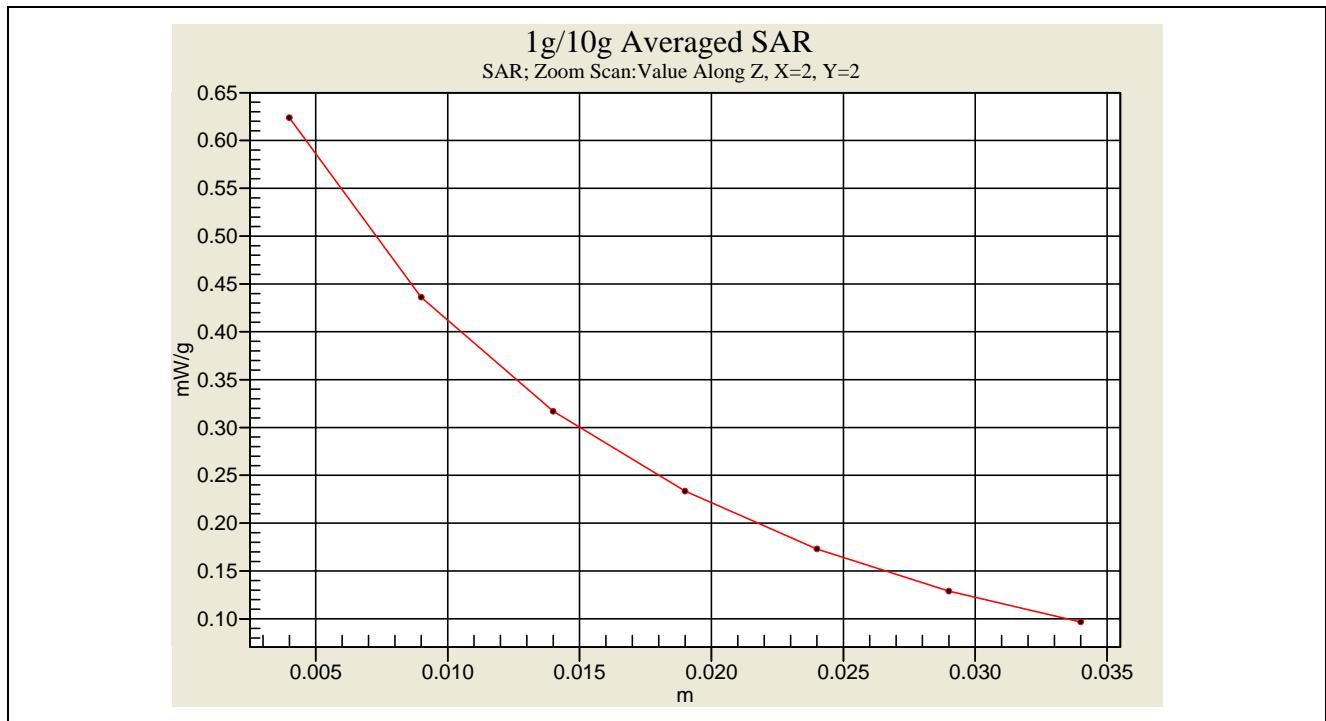Z-axis Plot of SAR Measurement



11.4 GMRS Body SAR with Headset _1.5 cm Spacing

Ambient :

| | | | |
|--------------------|---------------|-------------------------|--------------|
| Temperature (°C) : | <u>22 ± 2</u> | Relative HUMIDITY (%) : | <u>40-70</u> |
| Liquid : | | | |

| | | | |
|----------------|---------------|---------------------------|-----------|
| Mixture Type : | <u>MSL450</u> | Liquid Temperature (°C) : | <u>22</u> |
| | | Depth of liquid (cm) : | <u>15</u> |

| | | | |
|----------------|----------|-------------|--------------------|
| Measurement : | | | |
| Crest Factor : | <u>1</u> | Probe S/N : | <u>1531 / 1530</u> |

| Frequency | | Modulation | Battery | Accessory | SAR _{1g} [mW/g] | | Power Drift | Amb. Temp | Remark | |
|--|-----|------------|----------|-----------|---|-------|-------------|-----------|--------|--|
| | | | | | Duty Cycle | | | | | |
| MHz | Ch. | | | | 100% | 50% | | | | |
| 462.5500 | 15 | FM | Ni-MH | Headset | 1.420 | 0.710 | -0.077 | 22.1 | EM1000 | |
| 462.6375 | 4 | FM | Ni-MH | Headset | 1.670 | 0.835 | -0.022 | 22.1 | EM1000 | |
| 462.7250 | 22 | FM | Ni-MH | Headset | 1.790 | 0.895 | -0.066 | 22.1 | EM1000 | |
| 462.7250 | 22 | FM | Alkaline | Headset | 2.100 | 1.050 | -0.041 | 22.1 | EM1000 | |
| Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population | | | | | 1.6 W/kg (mW/g) Averaged over 1 gram | | | | | |

- ◆ SAR values are scaled for the power drift

| Frequency | | Battery | SAR _{1g} [mW/g] | | power drift (dB) | + power drift 10^(dB/10) | SAR _{1g} [mW/g] (include +power drift) | |
|-----------|-----|----------|--------------------------|-------|------------------|--------------------------|---|-------|
| | | | Duty Cycle | | | | Duty Cycle | |
| MHz | Ch. | | 100% | 50% | | | 100% | 50% |
| 462.5500 | 15 | Ni-MH | 1.420 | 0.710 | -0.077 | 1.018 | 1.445 | 0.723 |
| 462.6375 | 4 | Ni-MH | 1.670 | 0.835 | -0.022 | 1.005 | 1.678 | 0.839 |
| 462.7250 | 22 | Ni-MH | 1.790 | 0.895 | -0.066 | 1.015 | 1.817 | 0.909 |
| 462.7250 | 22 | Alkaline | 2.100 | 1.050 | -0.041 | 1.009 | 2.120 | 1.060 |

SAR is basically proportional to average transmit power and duty cycle


(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).

SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

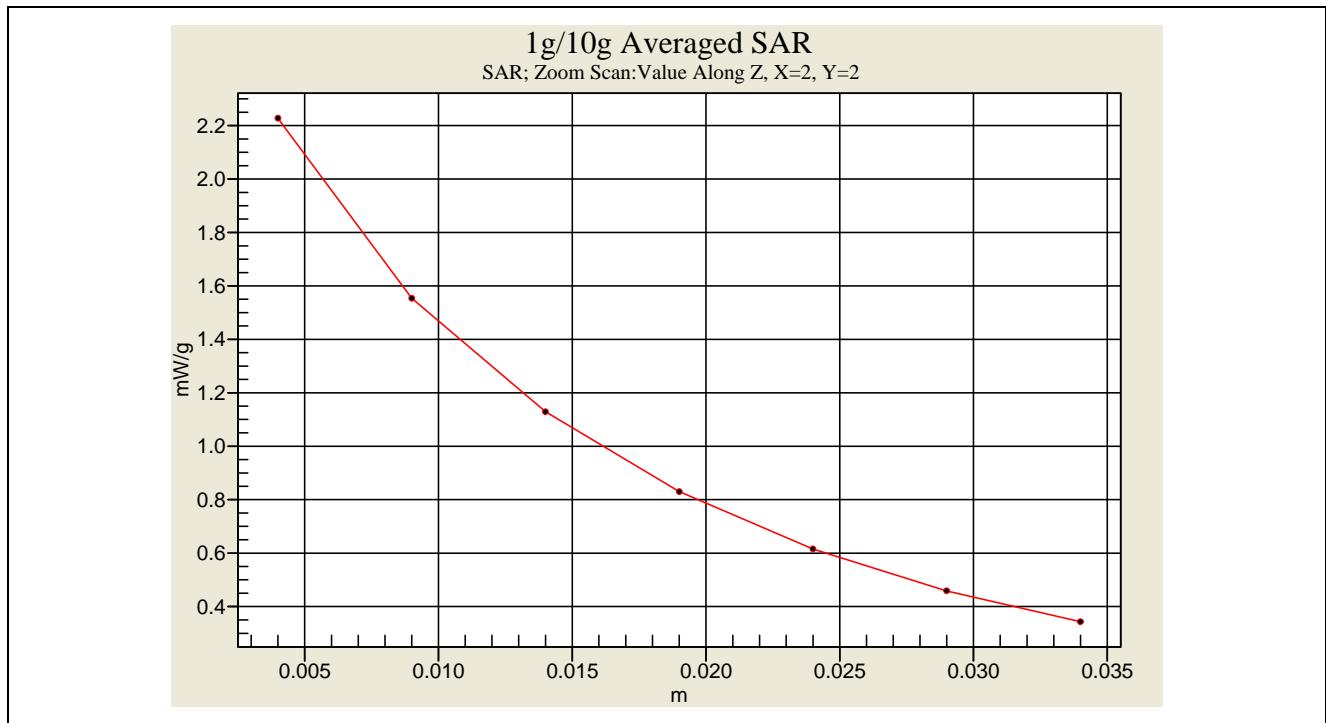Z-axis Plot of SAR Measurement



11.5 FRS Body SAR with Headset & Belt Clip _ 1.5 cm Spacing

Ambient :

| | | | |
|--------------------|---------------|-------------------------|--------------|
| Temperature (°C) : | <u>22 ± 3</u> | Relative HUMIDITY (%) : | <u>40-70</u> |
| Liquid : | | | |

Liquid :

| | | | |
|----------------|---------------|---------------------------|-----------|
| Mixture Type : | <u>MSL450</u> | Liquid Temperature (°C) : | <u>22</u> |
| | | Depth of liquid (cm) : | <u>15</u> |

Measurement :

| | | | |
|----------------|----------|-------------|--------------------|
| Crest Factor : | <u>1</u> | Probe S/N : | <u>1531 / 1530</u> |
|----------------|----------|-------------|--------------------|

| Frequency | | Modulation | Battery | Accessory | SAR _{1g} [mW/g] | | Power Drift | Amb. Temp | Remark | |
|--|-----|------------|----------|---------------------|---|-------|-------------|-----------|--------|--|
| | | | | | Duty Cycle | | | | | |
| MHz | Ch. | | | | 100% | 50% | | | | |
| 467.5625 | 8 | FM | Ni-MH | Headset & Belt Clip | 0.314 | 0.157 | -0.024 | 22.1 | EM1000 | |
| 467.6375 | 11 | FM | Ni-MH | Headset & Belt Clip | 0.333 | 0.167 | -0.017 | 22.1 | EM1000 | |
| 467.7125 | 14 | FM | Ni-MH | Headset & Belt Clip | 0.383 | 0.192 | -0.020 | 22.1 | EM1000 | |
| 467.7125 | 14 | FM | Alkaline | Headset & Belt Clip | 0.730 | 0.365 | -0.034 | 22.1 | EM1000 | |
| Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population | | | | | 1.6 W/kg (mW/g) Averaged over 1 gram | | | | | |

- SAR values are scaled for the power drift

| Frequency | | Battery | SAR _{1g} [mW/g] | | power drift (dB) | + power drift 10^(dB/10) | SAR _{1g} [mW/g] (include +power drift) | |
|-----------|-----|----------|--------------------------|-------|------------------|--------------------------|---|-------|
| | | | Duty Cycle | | | | Duty Cycle | |
| MHz | Ch. | | 100% | 50% | | | 100% | 50% |
| 467.5625 | 8 | Ni-MH | 0.314 | 0.157 | -0.024 | 1.006 | 0.316 | 0.158 |
| 467.6375 | 11 | Ni-MH | 0.333 | 0.167 | -0.017 | 1.004 | 0.334 | 0.167 |
| 467.7125 | 14 | Ni-MH | 0.383 | 0.192 | -0.020 | 1.005 | 0.385 | 0.192 |
| 467.7125 | 14 | Alkaline | 0.730 | 0.365 | -0.034 | 1.008 | 0.736 | 0.368 |

SAR is basically proportional to average transmit power and duty cycle


(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).

SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

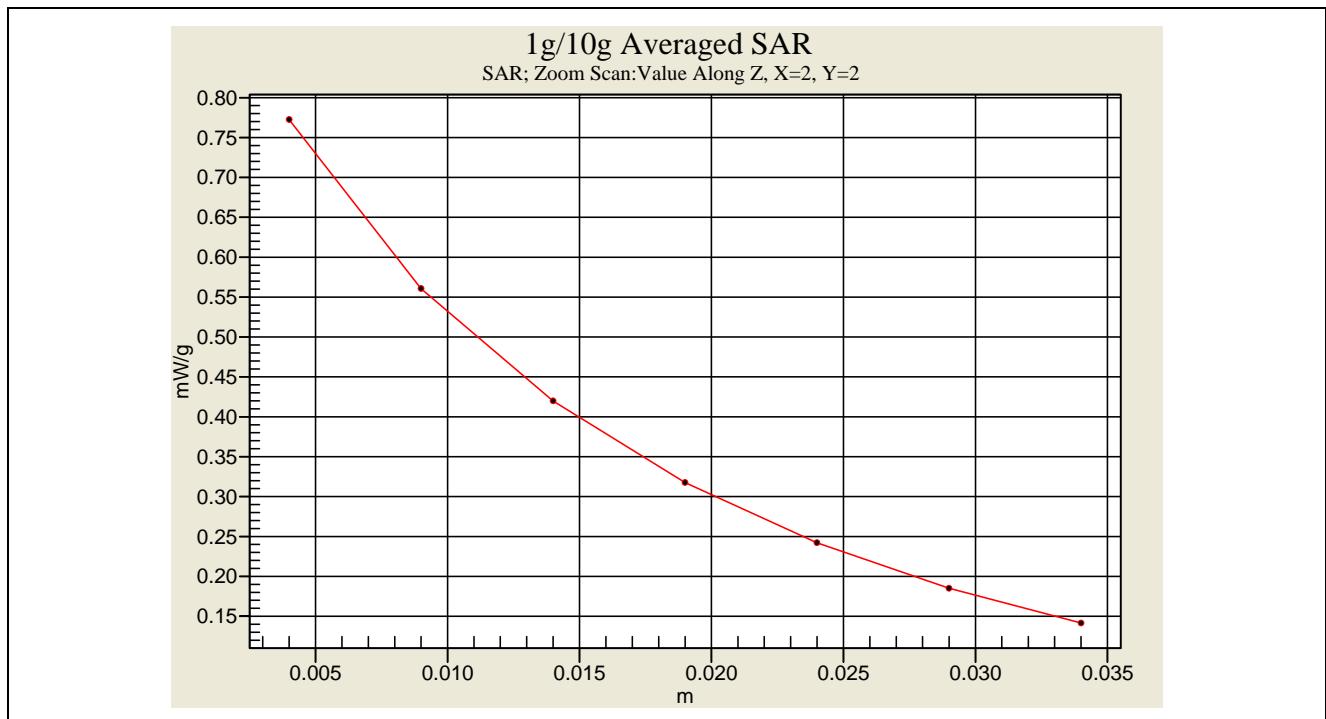Z-axis Plot of SAR Measurement

FRS Body SAR with Headset_Belt Clip -1.5 cm Spacing _ CH14 _ ALKALINE (2007.12.14)



11.6 GMRS Body SAR with Headset_Belt Clip _ 1.5 cm Spacing

Ambient :

| | | | |
|--------------------|---------------|-------------------------|--------------|
| Temperature (°C) : | <u>22 ± 3</u> | Relative HUMIDITY (%) : | <u>40-70</u> |
| Liquid : | | | |

Liquid :

| | | | |
|----------------|---------------|---------------------------|-----------|
| Mixture Type : | <u>MSL450</u> | Liquid Temperature (°C) : | <u>22</u> |
|----------------|---------------|---------------------------|-----------|

Depth of liquid (cm) :

15

Measurement :

Crest Factor : 1 Probe S/N : 1531

| Frequency | | Modulation | Battery | Accessory | SAR _{1g} [mW/g] | | Power Drift | Amb. Temp | Remark | |
|--|-----|------------|----------|---------------------|---|-------|-------------|-----------|--------|--|
| | | | | | Duty Cycle | | | | | |
| MHz | Ch. | | | | 100% | 50% | | | | |
| 462.5500 | 15 | FM | Ni-MH | Headset & Belt Clip | 1.360 | 0.680 | -0.024 | 22.1 | EM1000 | |
| 462.6375 | 4 | FM | Ni-MH | Headset & Belt Clip | 1.230 | 0.615 | 0.018 | 22.1 | EM1000 | |
| 462.7250 | 22 | FM | Ni-MH | Headset & Belt Clip | 1.380 | 0.690 | -0.080 | 22.1 | EM1000 | |
| 462.7250 | 22 | FM | Alkaline | Headset & Belt Clip | 1.690 | 0.845 | -0.040 | 22.1 | EM1000 | |
| Std. C95.1-1999 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population | | | | | 1.6 W/kg (mW/g) Averaged over 1 gram | | | | | |

- SAR values are scaled for the power drift

| Frequency | | Battery | SAR _{1g} [mW/g] | | power drift (dB) | + power drift 10^(dB/10) | SAR _{1g} [mW/g] (include +power drift) | |
|-----------|-----|----------|--------------------------|-------|------------------|--------------------------|---|-------|
| | | | Duty Cycle | | | | Duty Cycle | |
| MHz | Ch. | | 100% | 50% | | | 100% | 50% |
| 462.5500 | 15 | Ni-MH | 1.360 | 0.680 | -0.024 | 1.006 | 1.368 | 0.684 |
| 462.6375 | 4 | Ni-MH | 1.230 | 0.615 | 0.018 | 1.004 | 1.235 | 0.618 |
| 462.7250 | 22 | Ni-MH | 1.380 | 0.690 | -0.080 | 1.019 | 1.406 | 0.703 |
| 462.7250 | 22 | Alkaline | 1.690 | 0.845 | -0.040 | 1.009 | 1.706 | 0.853 |

SAR is basically proportional to average transmit power and duty cycle


(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).

SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown))

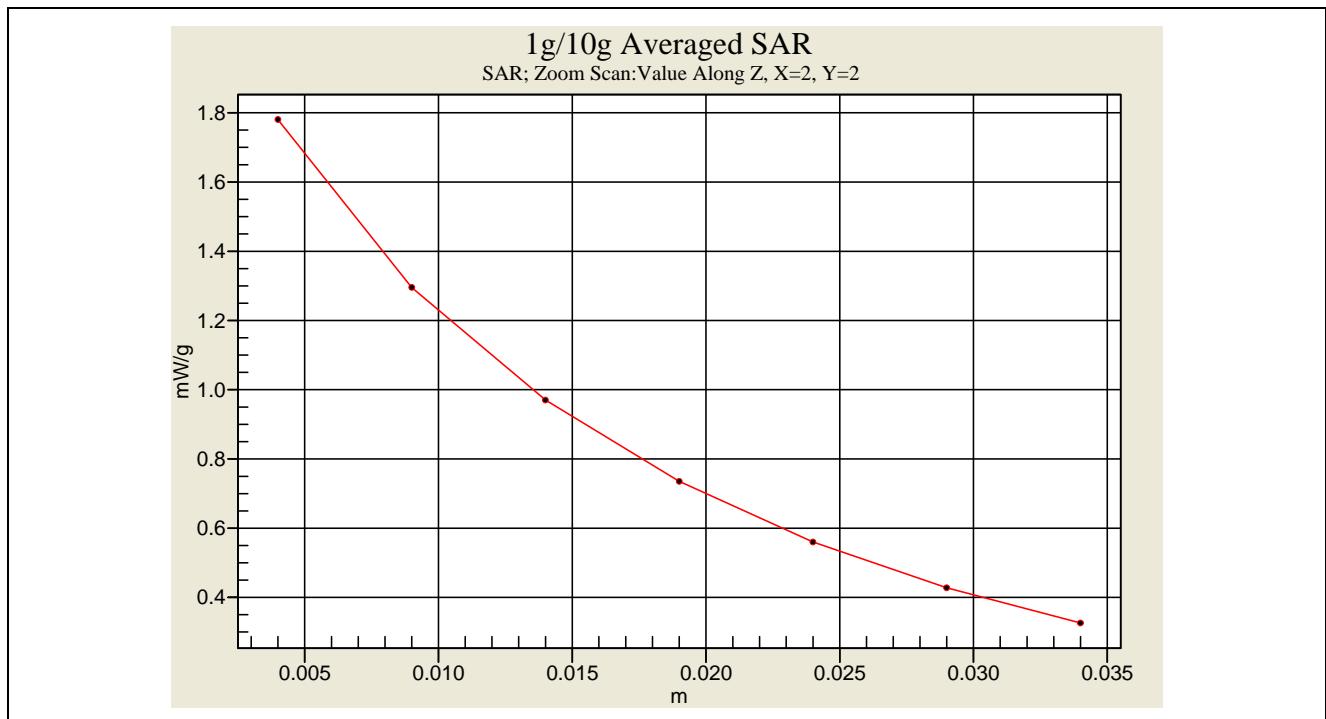Z-axis Plot of SAR Measurement

GPRS Body SAR with Headset_Belt Clip -1.5 cm Spacing _ CH22 _ ALKALINE (2007.12.14)

11.7 Setup Photo

Face Position

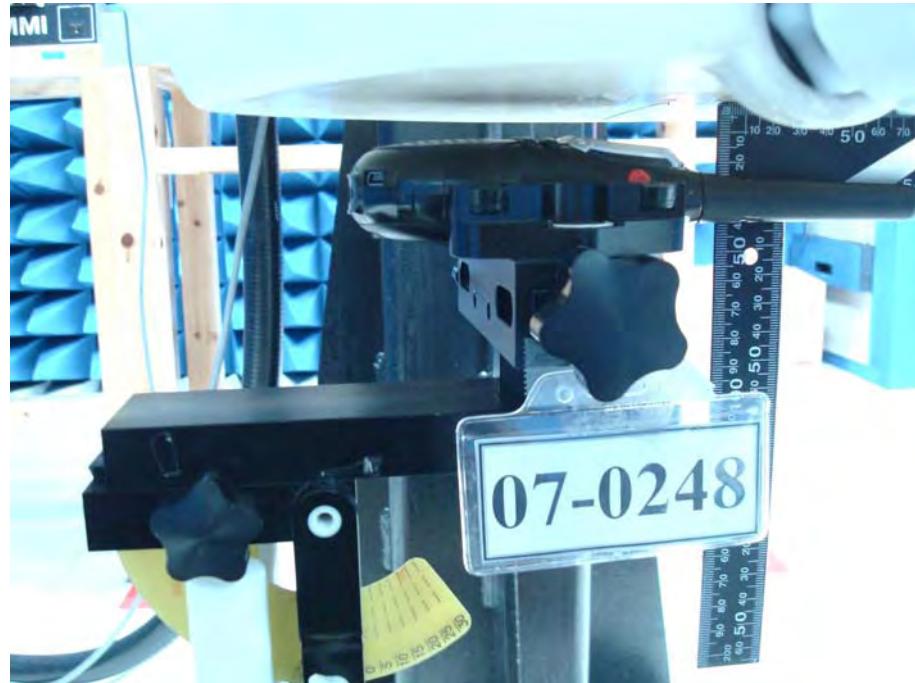


Figure 18. EUT Face to Phantom 15 mm spacing

Face Position



Figure 19. EUT Face to Phantom 15 mm spacing (Charging by USB Cable via computer)

Face Position



Figure 20.EUT Face to Phantom 15 mm spacing (Charging by AC Adapter)

Body Position



Figure 21.EUT with Headset to Phantom 15 mm spacing

Body Position

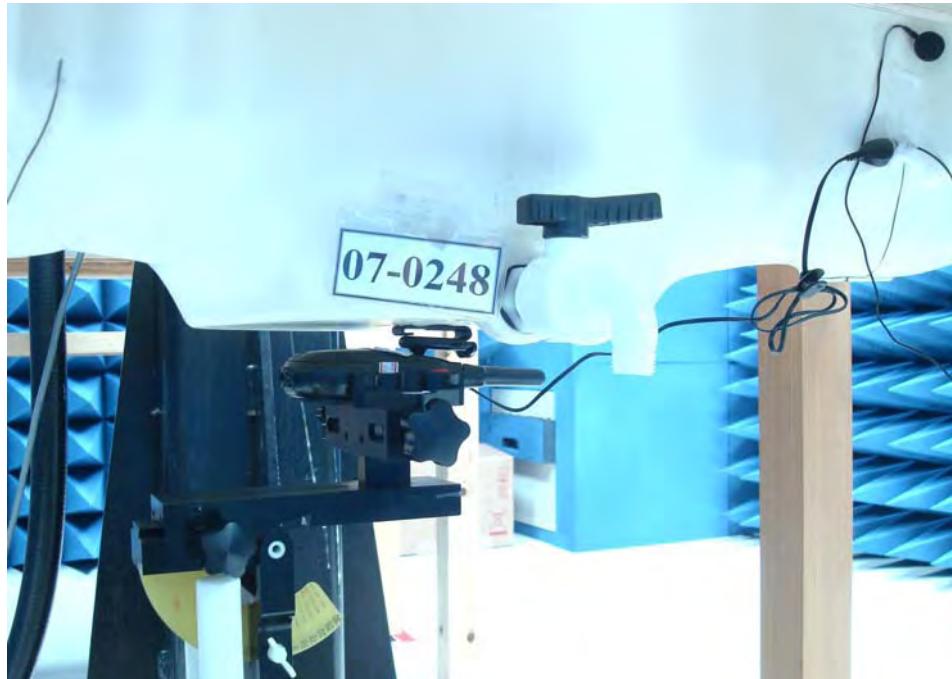


Figure 22. EUT with Headset & Belt clip

11.8 Std. C95.1-1999 RF Exposure Limit

| Human Exposure | Population Uncontrolled Exposure (W/kg) or (mW/g) | Occupational Controlled Exposure (W/kg) or (mW/g) |
|--|--|--|
| Spatial Peak SAR* (head) | 1.60 | 8.00 |
| Spatial Peak SAR** (Whole Body) | 0.08 | 0.40 |
| Spatial Peak SAR*** (Partial-Body) | 1.60 | 8.00 |
| Spatial Peak SAR**** (Hands / Feet / Ankle / Wrist) | 4.00 | 20.00 |

Table 6. Safety Limits for Partial Body Exposure

Notes :

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole - body.
- *** The Spatial Average value of the SAR averaged over the partial - body.
- **** The Spatial Peak value of the SAR averaged over any 10 grams of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Population / Uncontrolled Environments : are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational / Controlled Environments : are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).



12. Conclusion

The SAR test values found for the portable mobile phone **Giant Electronics Limited Trade Mark : Motorola Model(s) : MJ270** are below the maximum recommended level of 1.6 W/kg (mW/g).

13. References

- [1] Std. C95.1-1999, "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300KHz to 100GHz", New York.
- [2] NCRP, National Council on Radiation Protection and Measurements, "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields", NCRP report NO. 86, 1986.
- [3] T. Schmid, O. Egger, and N. Kuster, "Automatic E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105-113, Jan. 1996.
- [4] K. Poković, T. Schmid, and N. Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequency", in ICECOM'97, Dubrovnik, October 15-17, 1997, pp.120-124.
- [5] K. Poković, T. Schmid, and N. Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [6] N. Kuster, and Q. Balzano, "Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz", IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [7] Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988 , pp. 139-148.
- [8] N. Kuster, R. Kastle, T. Schmid, *Dosimetric evaluation of mobile communications equipment with known precision*, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [9] Std. C95.3-1991, "IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave", New York: IEEE, Aug. 1992.
- [10]CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), *Human Exposure to Electromagnetic Fields High-frequency: 10KHz-300GHz*, Jan. 1995.



Appendix A - System Performance Check

See following Attached Pages for System Performance Check.

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/12/2007 10:11:27 PM

System Performance Check at 450 MHz_20071212_Head

DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450$ MHz; $\sigma = 0.854$ mho/m; $\epsilon_r = 45$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.29, 7.29, 7.29); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

System Performance Check at 450 MHz/Area Scan (61x201x1):

Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (interpolated) = 2.31 mW/g

System Performance Check at 450 MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 52.8 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 3.37 W/kg

SAR(1 g) = 2.16 mW/g; SAR(10 g) = 1.43 mW/g

Maximum value of SAR (measured) = 2.31 mW/g

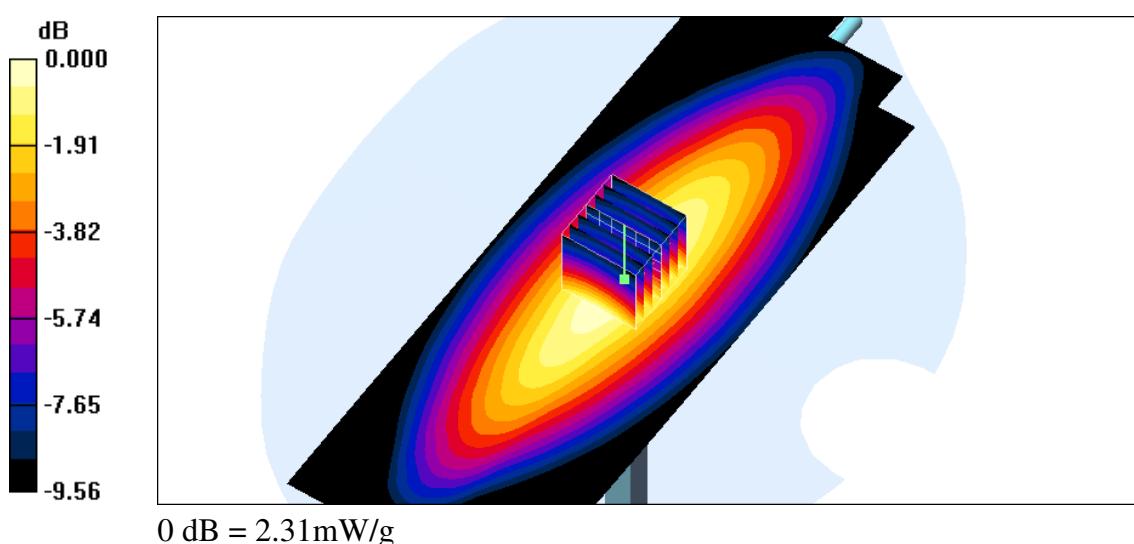

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 12:01:36 PM

System Performance Check at 450 MHz_20071214_Head

DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450$ MHz; $\sigma = 0.854$ mho/m; $\epsilon_r = 45$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.29, 7.29, 7.29); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

System Performance Check at 450 MHz/Area Scan (61x201x1):

Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (interpolated) = 2.27 mW/g

System Performance Check at 450 MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 52.7 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 3.27 W/kg

SAR(1 g) = 2.11 mW/g; SAR(10 g) = 1.4 mW/g

Maximum value of SAR (measured) = 2.26 mW/g

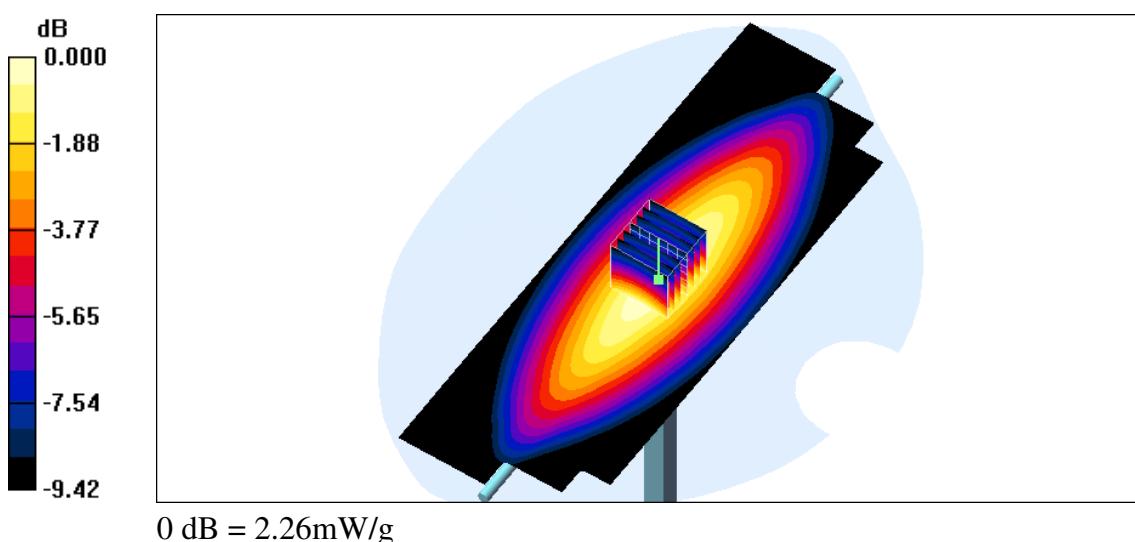

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2008/12/9 PM 09:30:01

System Performance Check at 450 MHz_20081209_Head

DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 44.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.06, 7.06, 7.06); Calibrated: 2008/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2008/2/21
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

System Performance Check at 450 MHz/Area Scan (61x201x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.95 mW/g

System Performance Check at 450 MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.1 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 2.68 W/kg

SAR(1 g) = 1.87 mW/g; SAR(10 g) = 1.36 mW/g

Maximum value of SAR (measured) = 1.97 mW/g

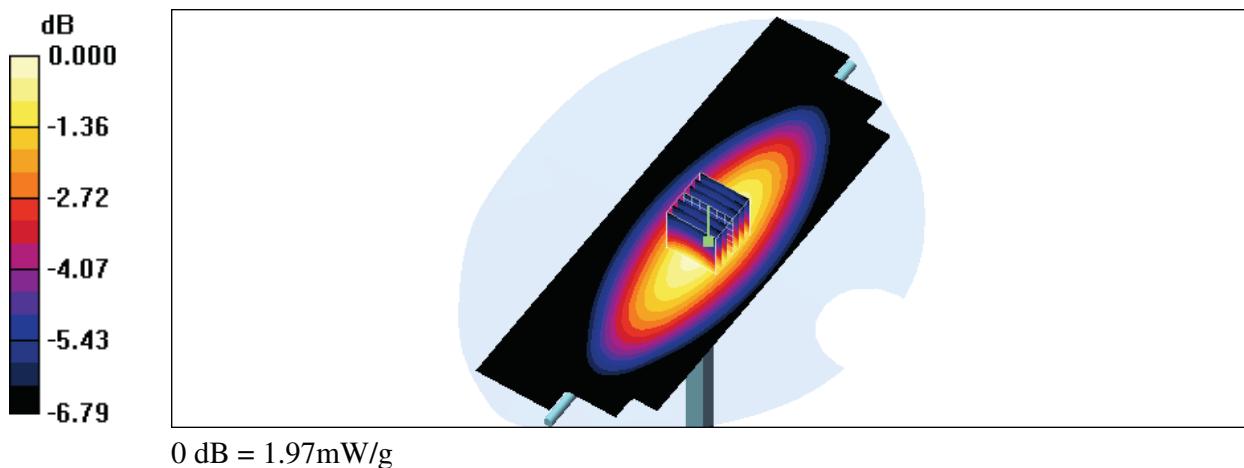

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/13/2007 3:07:10 AM

System Performance Check at 450 MHz_20071213_Body

DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

System Performance Check at 450 MHz/Area Scan (61x201x1):

Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (interpolated) = 1.97 mW/g

System Performance Check at 450 MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 47.4 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 1.84 mW/g; SAR(10 g) = 1.22 mW/g

Maximum value of SAR (measured) = 1.97 mW/g

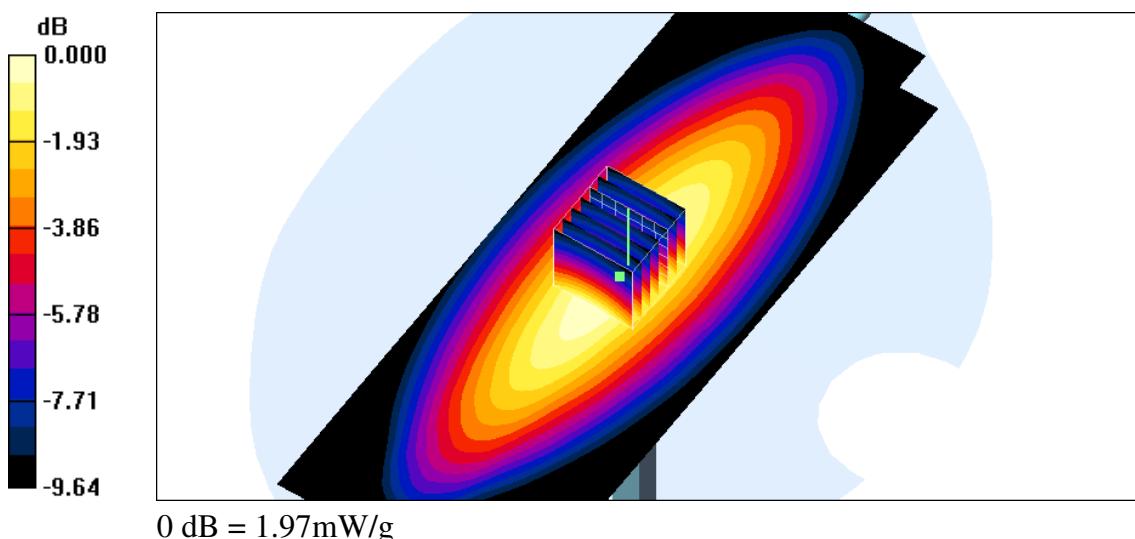

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 2:09:08 AM

System Performance Check at 450 MHz_20071214_Body

DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

System Performance Check at 450 MHz/Area Scan (61x201x1):

Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (interpolated) = 2.06 mW/g

System Performance Check at 450 MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 44.6 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 3.11 W/kg

SAR(1 g) = 1.96 mW/g; SAR(10 g) = 1.29 mW/g

Maximum value of SAR (measured) = 2.10 mW/g

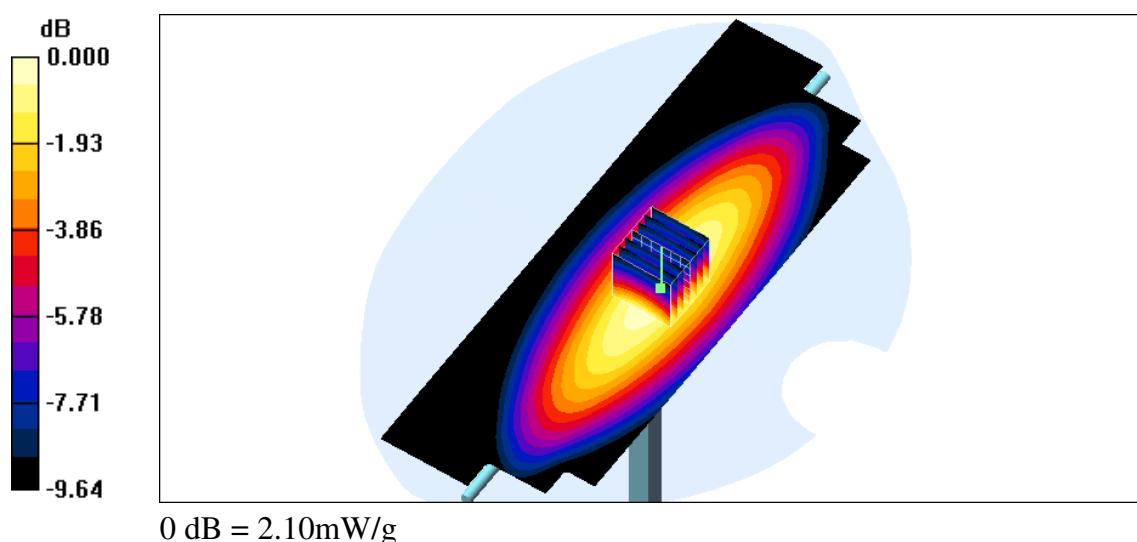

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2008/12/10 PM 14:00:12

System Performance Check at 450 MHz_20081210_Body

DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 56.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.41, 7.41, 7.41); Calibrated: 2008/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2008/2/21
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

System Performance Check at 450 MHz/Area Scan (61x201x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.93 mW/g

System Performance Check at 450 MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 45.1 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 2.80 W/kg

SAR(1 g) = 1.82 mW/g; SAR(10 g) = 1.27 mW/g

Maximum value of SAR (measured) = 1.94 mW/g

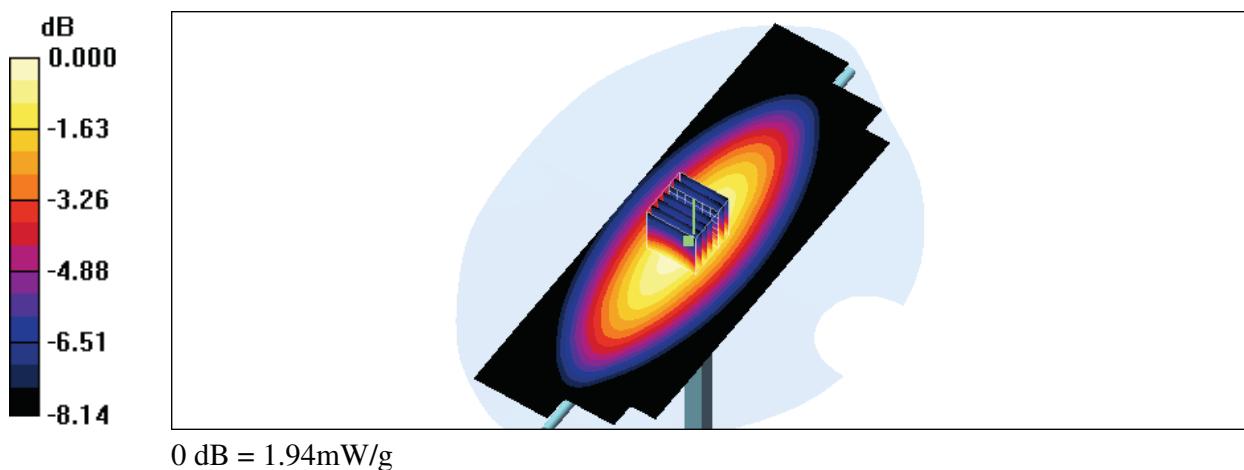



Appendix B - SAR Measurement Data

See following Attached Pages for SAR Measurement Data.

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/12/2007 10:57:28 PM

Flat_FRS CH8_Brain_Ni-MH_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: FRS; Frequency: 467.5625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.5625$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 44.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.29, 7.29, 7.29); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.617 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.0 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.566 mW/g; SAR(10 g) = 0.408 mW/g

Maximum value of SAR (measured) = 0.596 mW/g

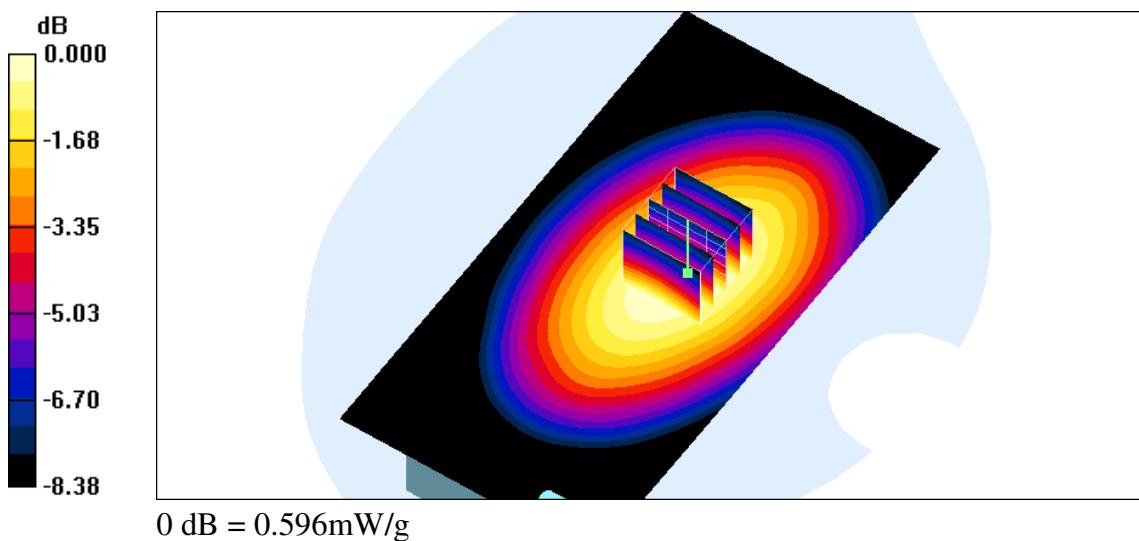

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/12/2007 11:59:39 PM

Flat_FRS CH8_Brain_Alkaline_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: FRS; Frequency: 467.5625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.5625$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 44.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.29, 7.29, 7.29); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.940 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.7 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.849 mW/g; SAR(10 g) = 0.608 mW/g

Maximum value of SAR (measured) = 0.897 mW/g

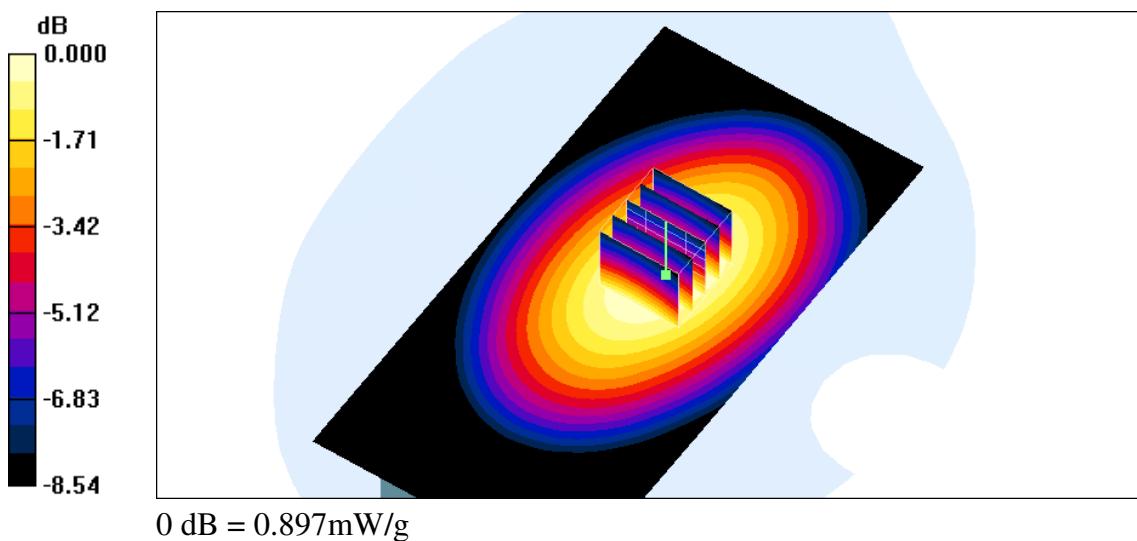

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2008/12/10 PM 05:27:53

Flat_FRS CH8_Brain_Ni-MH_USB Cable_15mm

DUT: MJ270; Type: Two Way Radio with GMRS , FRS and Weather Band Receiver

FCC ID: K7GMJBGJ

Communication System: FRS; Frequency: 467.56 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 468 \text{ MHz}$; $\sigma = 0.891 \text{ mho/m}$; $\epsilon_r = 44.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.06, 7.06, 7.06); Calibrated: 2008/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2008/2/21
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Flat/Area Scan (71x141x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.479 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.4 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.569 W/kg

SAR(1 g) = 0.425 mW/g; SAR(10 g) = 0.325 mW/g

Maximum value of SAR (measured) = 0.444 mW/g

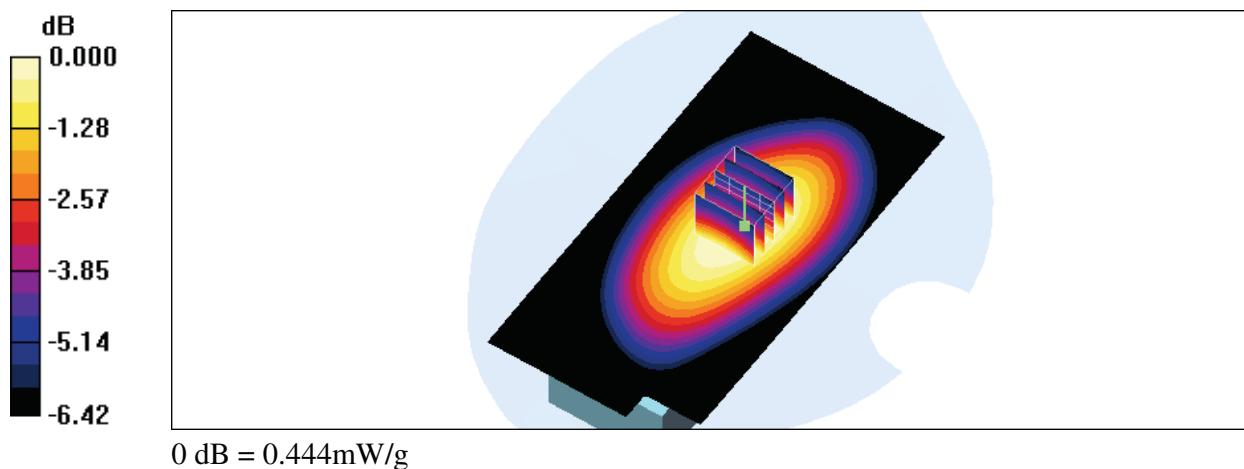

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2008/12/10 PM 05:46:17

Flat_FRS CH8_Brain_Ni-MH_USB AC adaptor_15mm

DUT: MJ270; Type: Two Way Radio with GMRS , FRS and Weather Band Receiver

FCC ID: K7GMJBGJ

Communication System: FRS; Frequency: 467.56 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 468 \text{ MHz}$; $\sigma = 0.891 \text{ mho/m}$; $\epsilon_r = 44.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.06, 7.06, 7.06); Calibrated: 2008/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2008/2/21
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Flat/Area Scan (71x141x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.328 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.7 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.285 mW/g; SAR(10 g) = 0.217 mW/g

Maximum value of SAR (measured) = 0.298 mW/g

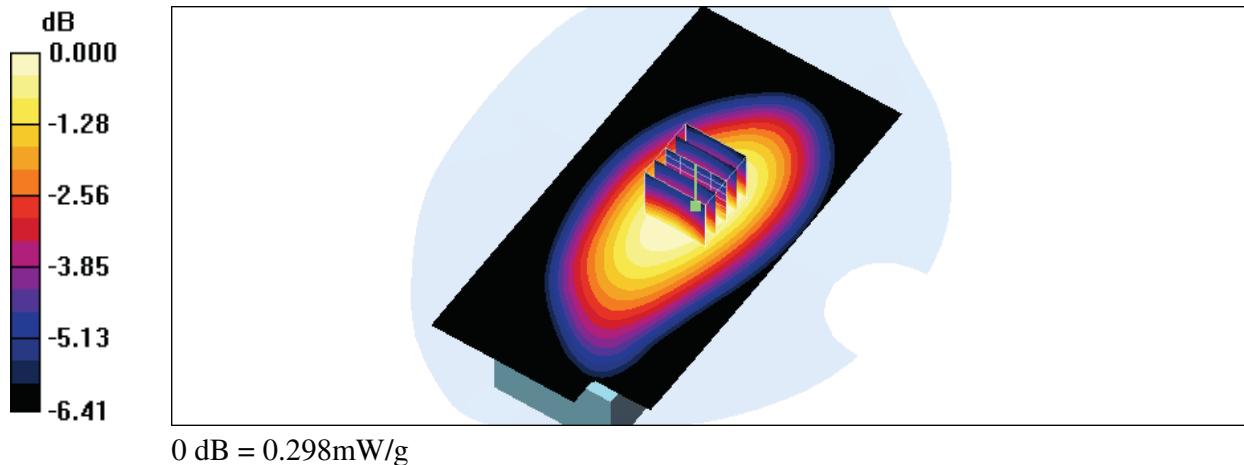

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/12/2007 11:17:49 PM

Flat_FRS CH11_Brain_Ni-MH_15mm

DDUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 44.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.29, 7.29, 7.29); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.569 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.1 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.741 W/kg

SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.389 mW/g

Maximum value of SAR (measured) = 0.565 mW/g

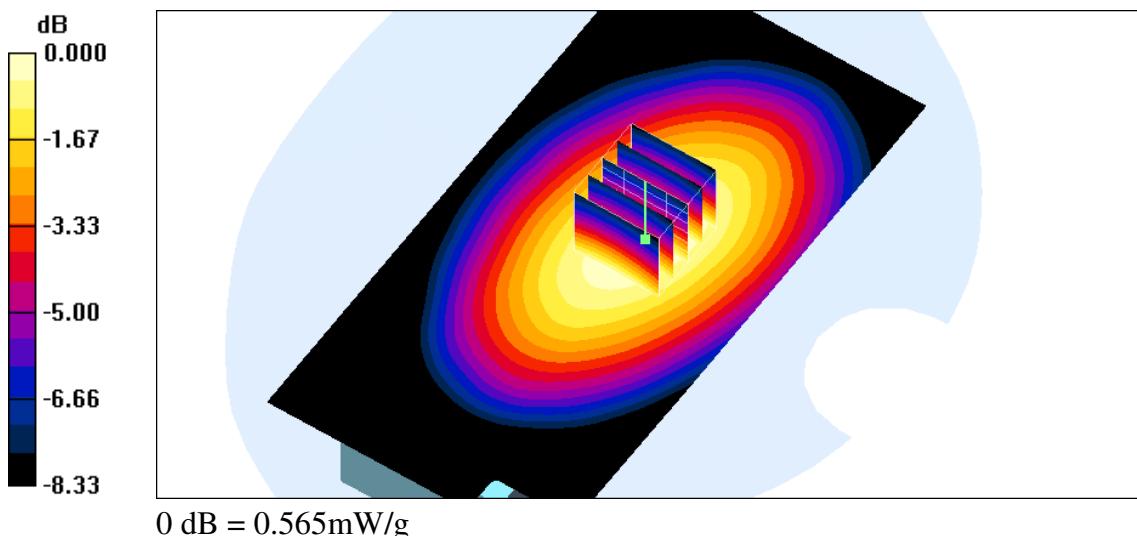

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/12/2007 11:38:36 PM

Flat_FRS CH14_Brain_Ni-MH_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: FRS; Frequency: 467.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.7125$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 44.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.29, 7.29, 7.29); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.561 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.8 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.529 mW/g; SAR(10 g) = 0.381 mW/g

Maximum value of SAR (measured) = 0.557 mW/g

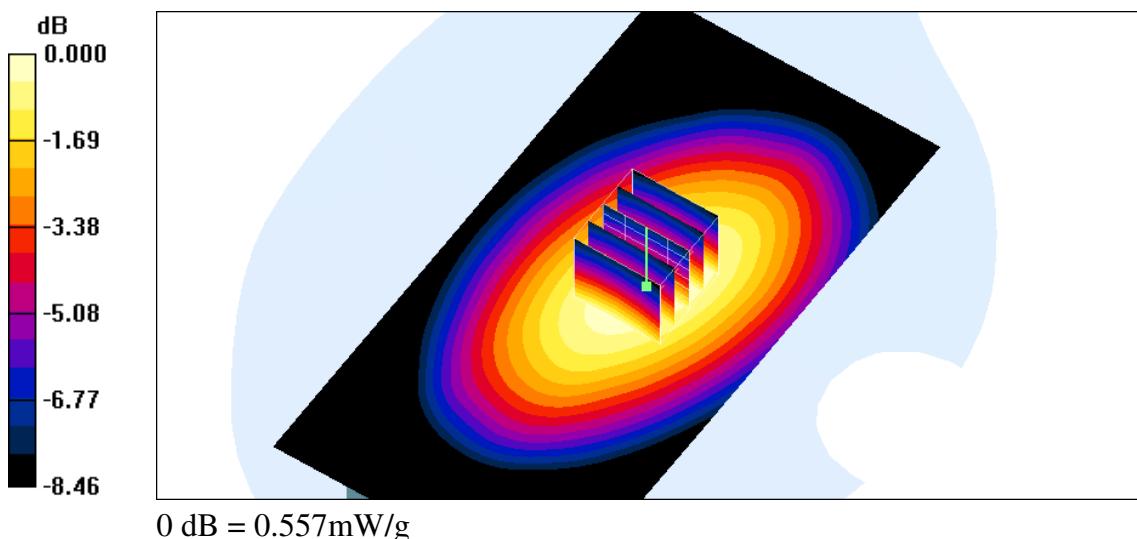

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 2:36:37 PM

Flat_GMRS CH15_Brain_Ni-MH_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: GMRS; Frequency: 462.5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.5500$ MHz; $\sigma = 0.865$ mho/m; $\xi_r = 44.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.29, 7.29, 7.29); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.16 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.7 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 3.88 W/kg

SAR(1 g) = 2.79 mW/g; SAR(10 g) = 2 mW/g

Maximum value of SAR (measured) = 2.96 mW/g

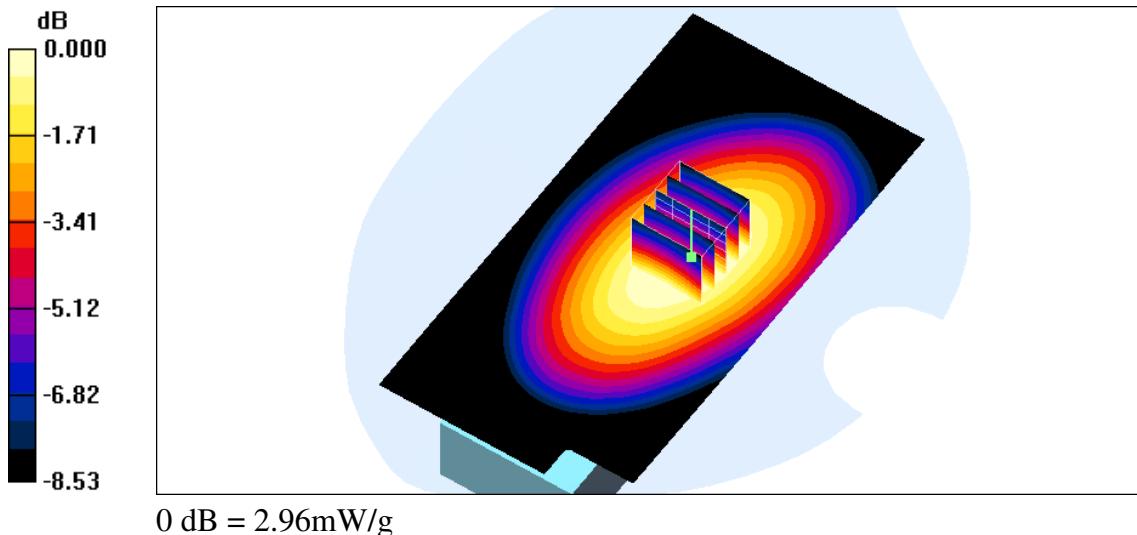

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 4:10:27 PM

Flat_GMRS CH4_Brain_Ni-MH_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.865$ mho/m; $\xi_r = 44.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.29, 7.29, 7.29); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.34 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 61.3 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 3.98 W/kg

SAR(1 g) = 2.86 mW/g; SAR(10 g) = 2.05 mW/g

Maximum value of SAR (measured) = 3.01 mW/g

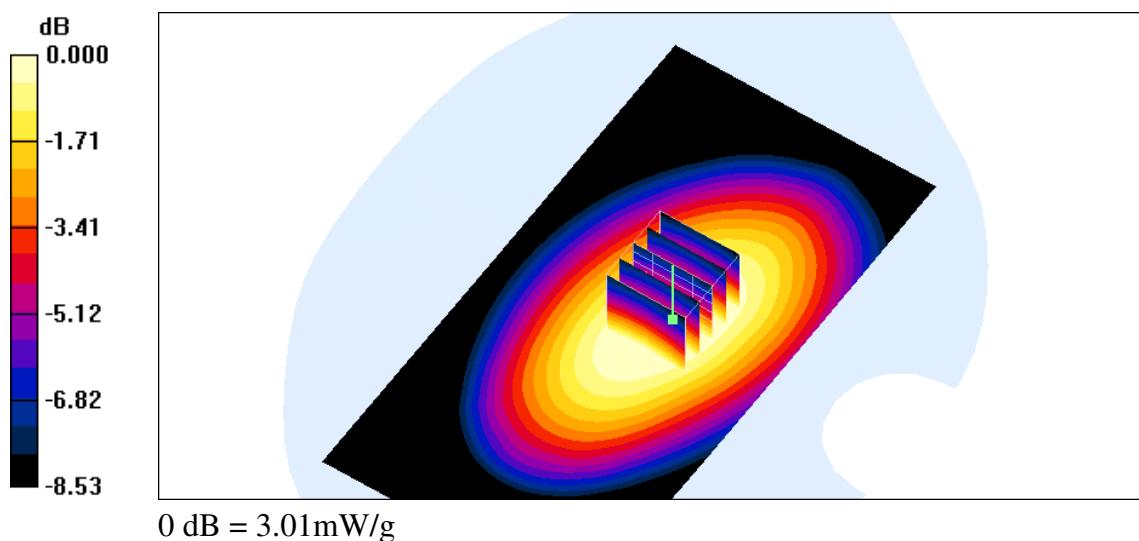

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 4:35:01 PM

Flat_GMRS CH22_Brain_Ni-MH_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: GMRS; Frequency: 462.7250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.7250 \text{ MHz}$; $\sigma = 0.865 \text{ mho/m}$; $\xi_r = 44.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.29, 7.29, 7.29); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 3.33 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 59.3 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 3.99 W/kg

SAR(1 g) = 2.89 mW/g; SAR(10 g) = 2.08 mW/g

Maximum value of SAR (measured) = 3.04 mW/g

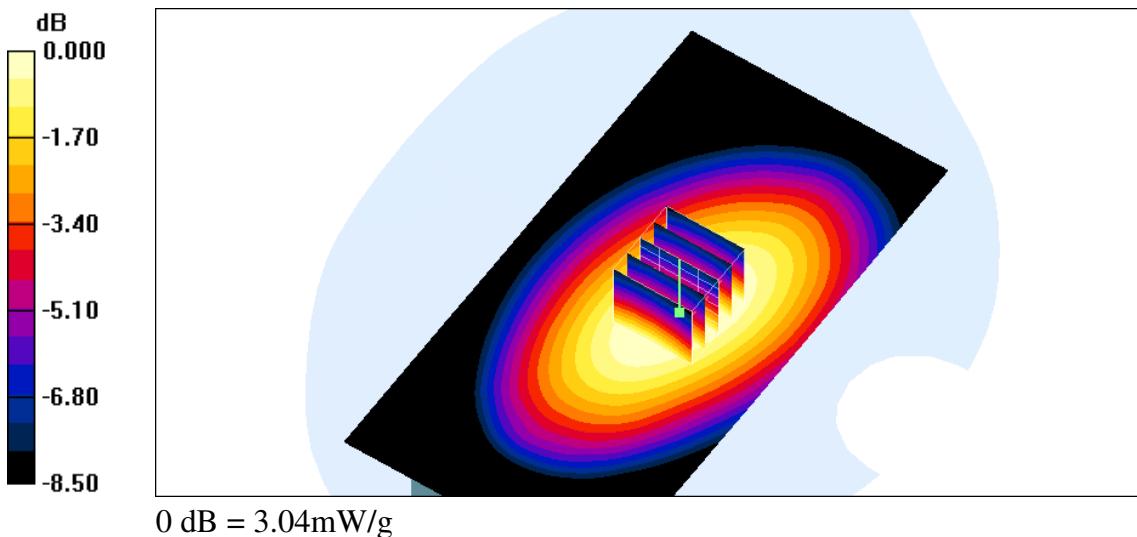

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 9:15:52 PM

Flat_GMRS CH22_Brain_Alkaline_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: GMRS; Frequency: 462.7250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.7250$ MHz; $\sigma = 0.865$ mho/m; $\xi_r = 44.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.29, 7.29, 7.29); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.48 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 63.2 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 4.06 W/kg

SAR(1 g) = 2.93 mW/g; SAR(10 g) = 2.11 mW/g

Maximum value of SAR (measured) = 3.10 mW/g

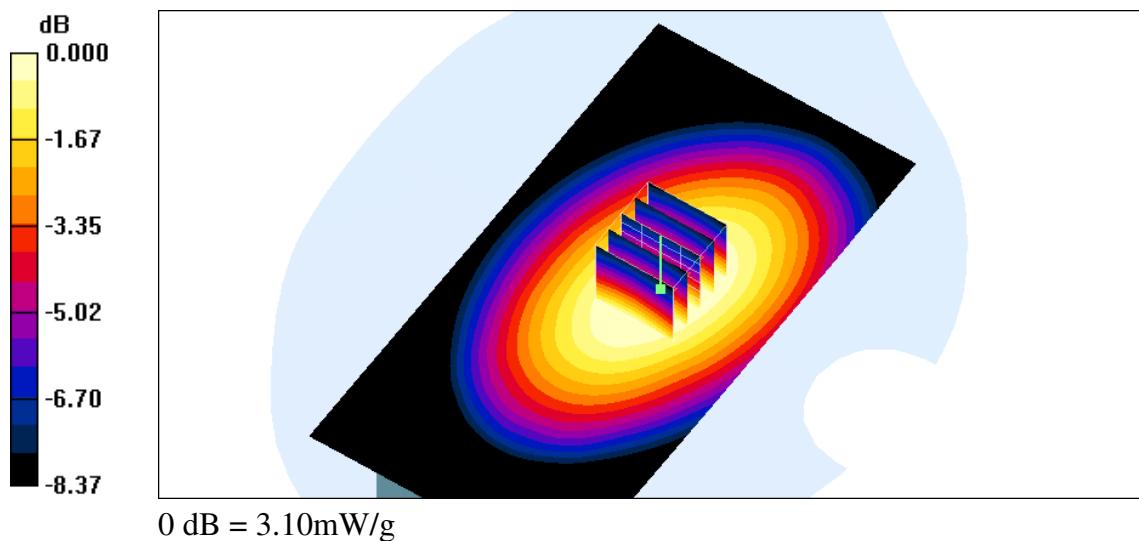

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2008/12/10 PM 07:49:16

Flat_GMRS CH22_Brain_Ni-MH_USB Cable_15mm

DUT: MJ270; Type: Two Way Radio with GMRS , FRS and Weather Band Receiver

FCC ID: K7GMJBGJ

Communication System: GMRS; Frequency: 462.725 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.888 \text{ mho/m}$; $\epsilon_r = 44.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.06, 7.06, 7.06); Calibrated: 2008/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2008/2/21
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Flat/Area Scan (71x141x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.33 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 55.0 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 2.56 W/kg

SAR(1 g) = 1.91 mW/g; SAR(10 g) = 1.45 mW/g

Maximum value of SAR (measured) = 2.01 mW/g

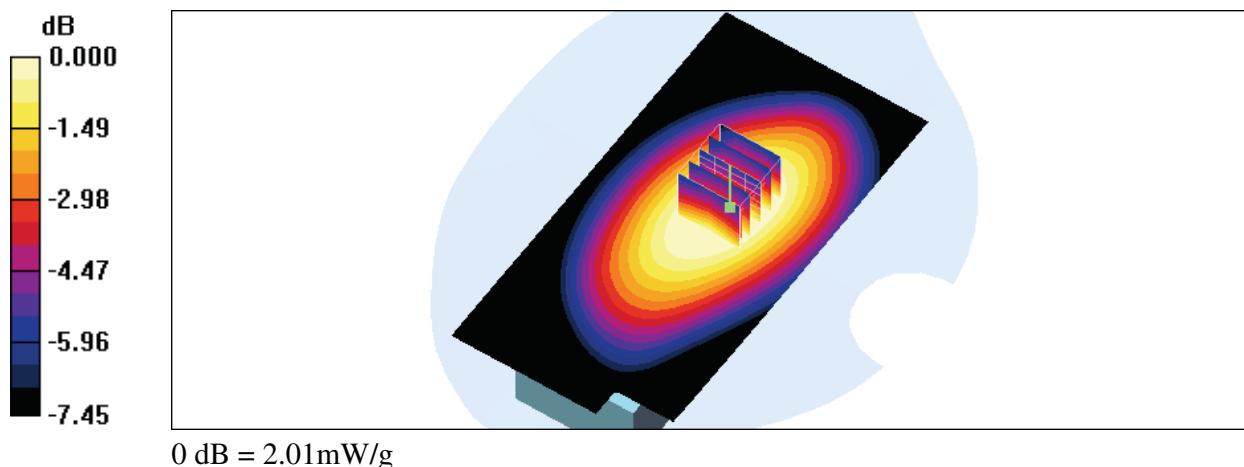

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 2008/12/10 PM 07:13:51

Flat_GMRS CH22_Brain_Ni-MH_USB AC adaptor_15mm

DUT: MJ270; Type: Two Way Radio with GMRS , FRS and Weather Band Receiver

FCC ID: K7GMJBGJ

Communication System: GMRS; Frequency: 462.725 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.888 \text{ mho/m}$; $\epsilon_r = 44.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1530; ConvF(7.06, 7.06, 7.06); Calibrated: 2008/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2008/2/21
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Flat/Area Scan (71x141x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.22 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.5 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 1.73 mW/g; SAR(10 g) = 1.32 mW/g

Maximum value of SAR (measured) = 1.80 mW/g

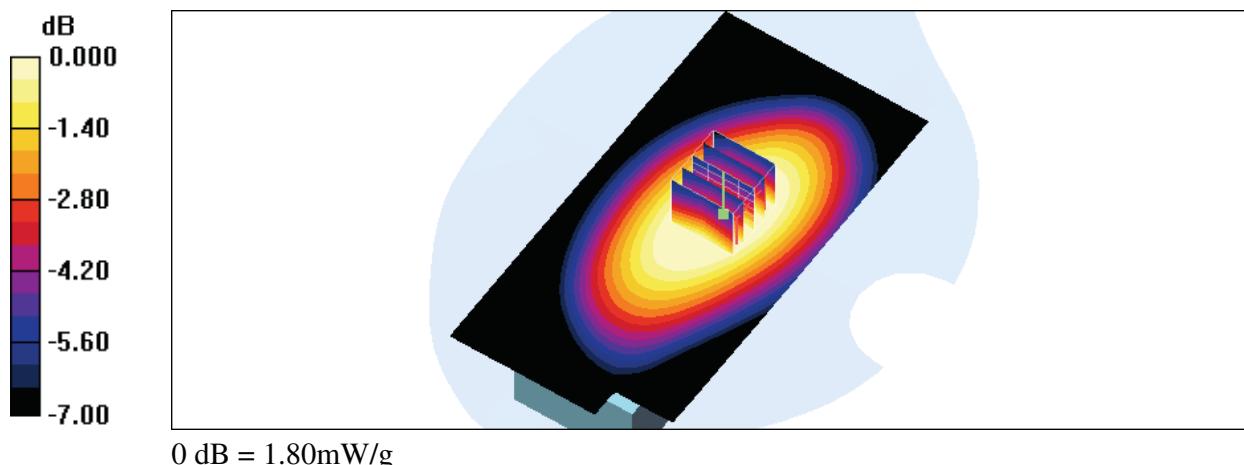

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/13/2007 8:04:28 PM

Flat_FRS CH8_Headset_muscle_Ni-MH_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: FRS; Frequency: 467.5625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.5625$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.268 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.264 mW/g

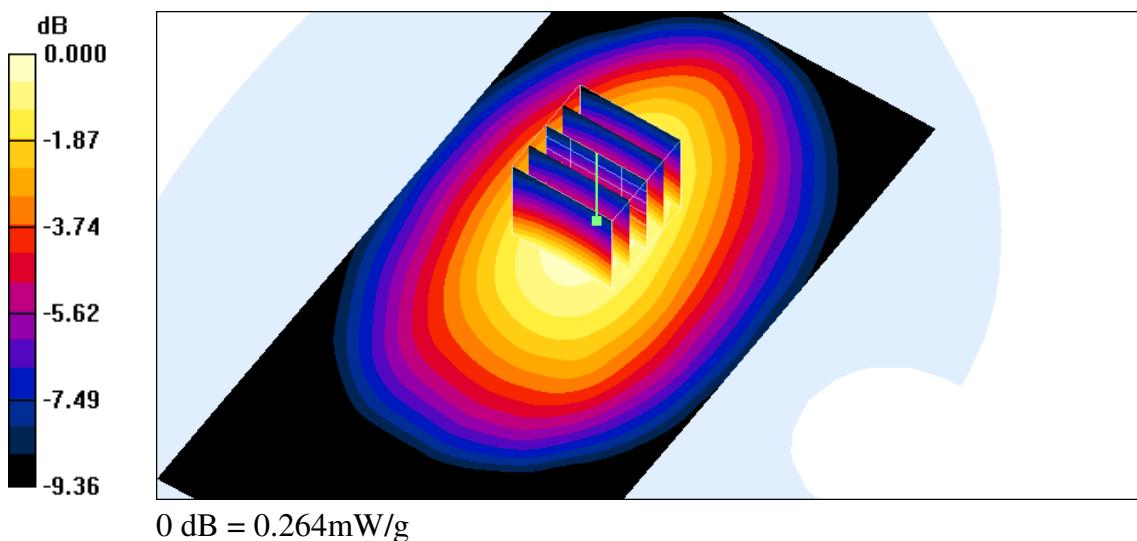

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/13/2007 7:23:40 PM

Flat_FRS CH11_Headset_muscle_Ni-MH_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.304 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.9 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 0.416 W/kg

SAR(1 g) = 0.282 mW/g; SAR(10 g) = 0.196 mW/g

Maximum value of SAR (measured) = 0.298 mW/g

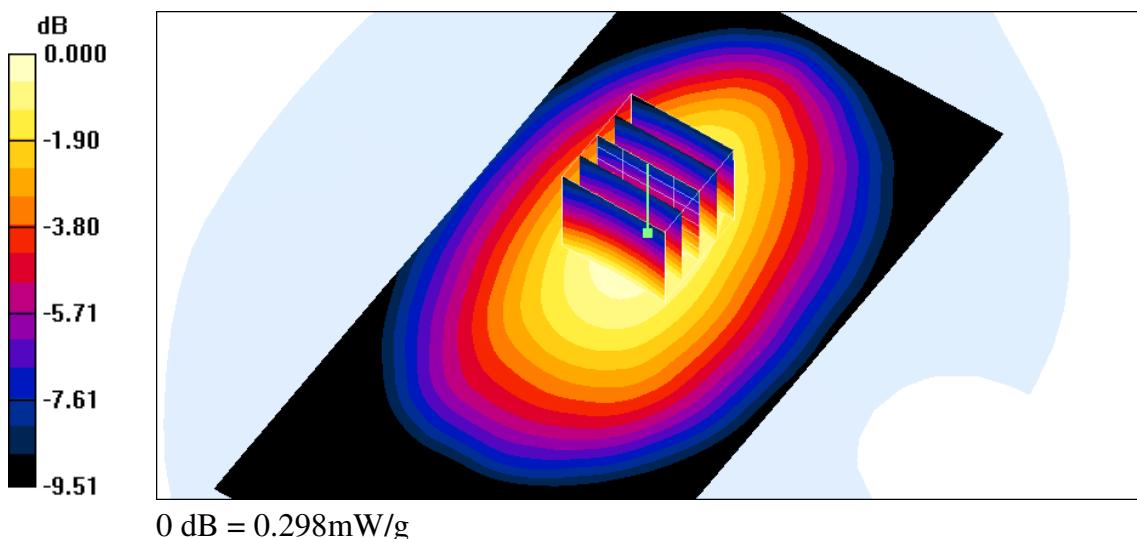

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/13/2007 7:44:06 PM

Flat_FRS CH14_Headset_muscle_Ni-MH_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: FRS; Frequency: 467.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.7125$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.314 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.3 V/m; Power Drift = -0.098 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.293 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.309 mW/g

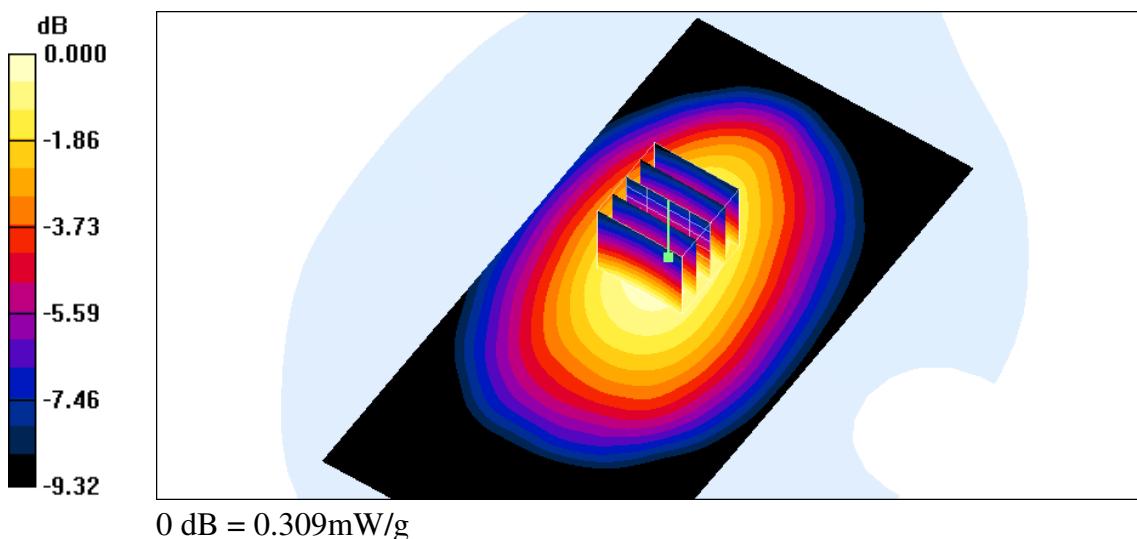

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/13/2007 8:24:44 PM

Flat_FRS CH14_Headset_muscle_Alkaline_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: FRS; Frequency: 467.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.7125$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.651 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.0 V/m; Power Drift = 0.070 dB

Peak SAR (extrapolated) = 0.857 W/kg

SAR(1 g) = 0.591 mW/g; SAR(10 g) = 0.415 mW/g

Maximum value of SAR (measured) = 0.624 mW/g

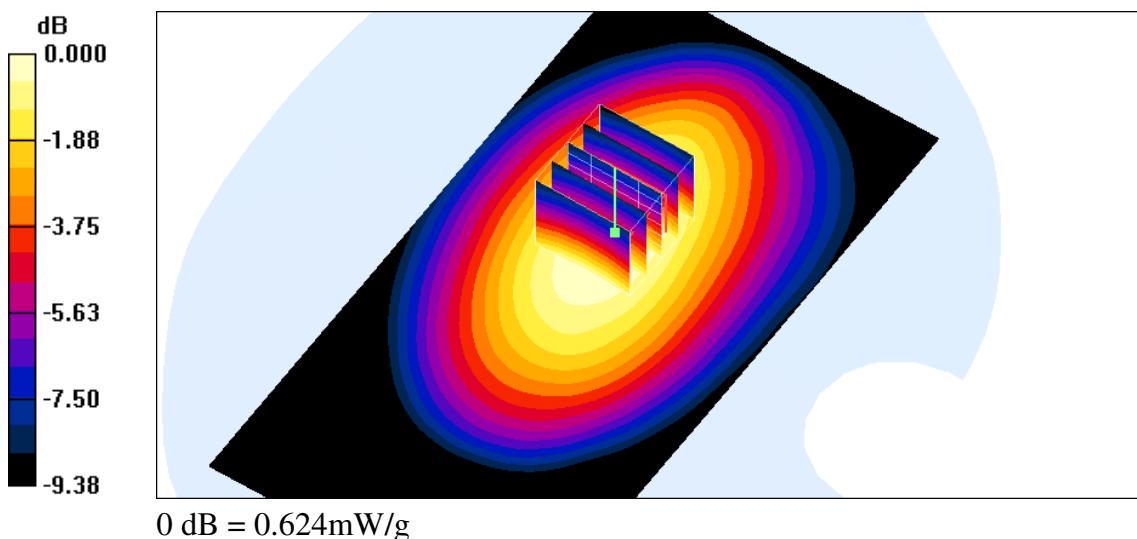

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/13/2007 9:22:26 PM

Flat_GMRS CH15_Headset_muscle_Ni-MH_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: GMRS; Frequency: 462.5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.5500$ MHz; $\sigma = 0.927$ mho/m; $\xi_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.71 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.0 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 1.42 mW/g; SAR(10 g) = 0.992 mW/g

Maximum value of SAR (measured) = 1.50 mW/g

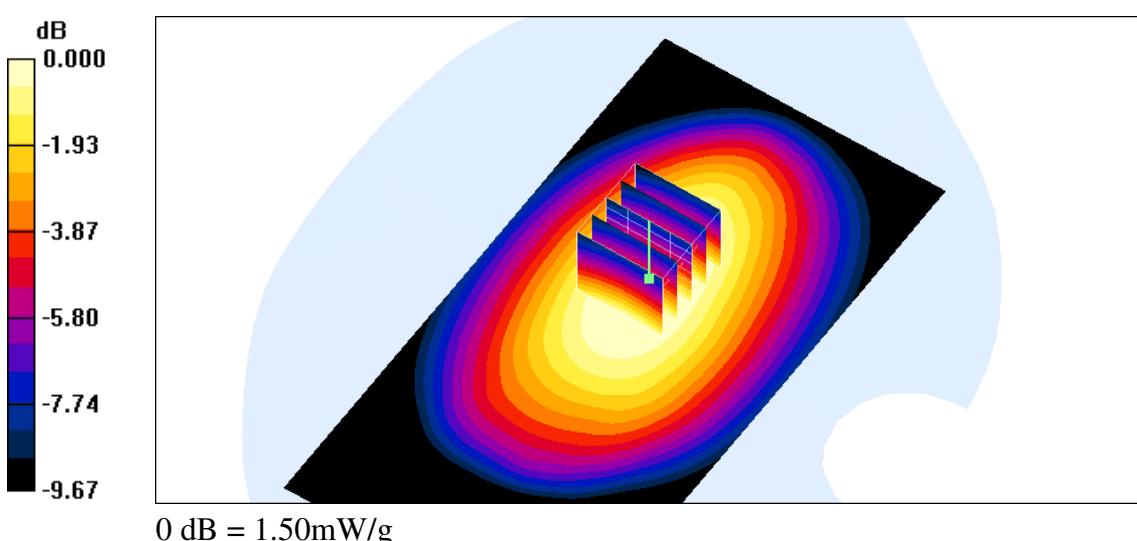

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 7:23:21 AM

Flat_GMRS CH4_Headset_muscle_Ni-MH_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.90 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 42.1 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 g) = 1.67 mW/g; SAR(10 g) = 1.17 mW/g

Maximum value of SAR (measured) = 1.77 mW/g

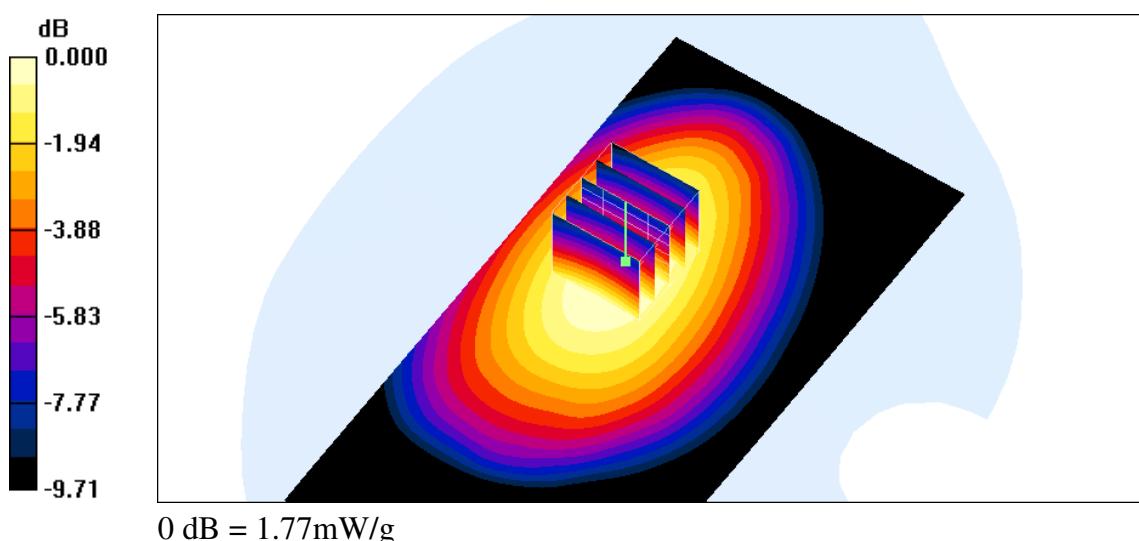

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 7:04:00 AM

Flat_GMRS CH22_Headset_muscle_Ni-MH_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: GMRS; Frequency: 462.7250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.7250$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.01 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.6 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 2.60 W/kg

SAR(1 g) = 1.79 mW/g; SAR(10 g) = 1.26 mW/g

Maximum value of SAR (measured) = 1.89 mW/g

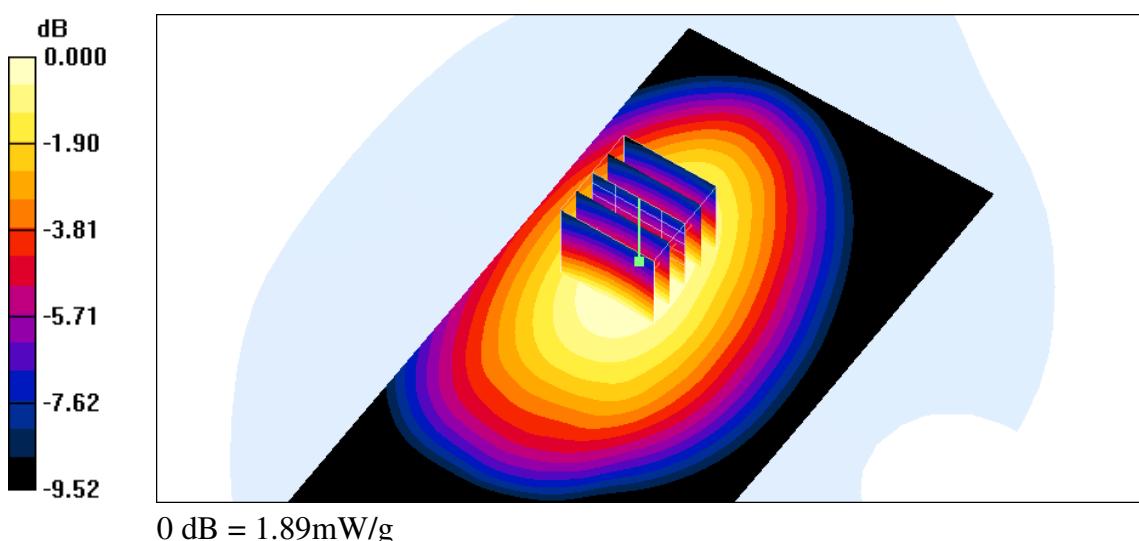

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 7:44:26 AM

Flat_GMRS CH22_Headset_muscle_Alkaline_15mm

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: GMRS; Frequency: 462.7250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.7250$ MHz; $\sigma = 0.927$ mho/m; $\xi_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.42 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.6 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 2.1 mW/g; SAR(10 g) = 1.47 mW/g

Maximum value of SAR (measured) = 2.23 mW/g

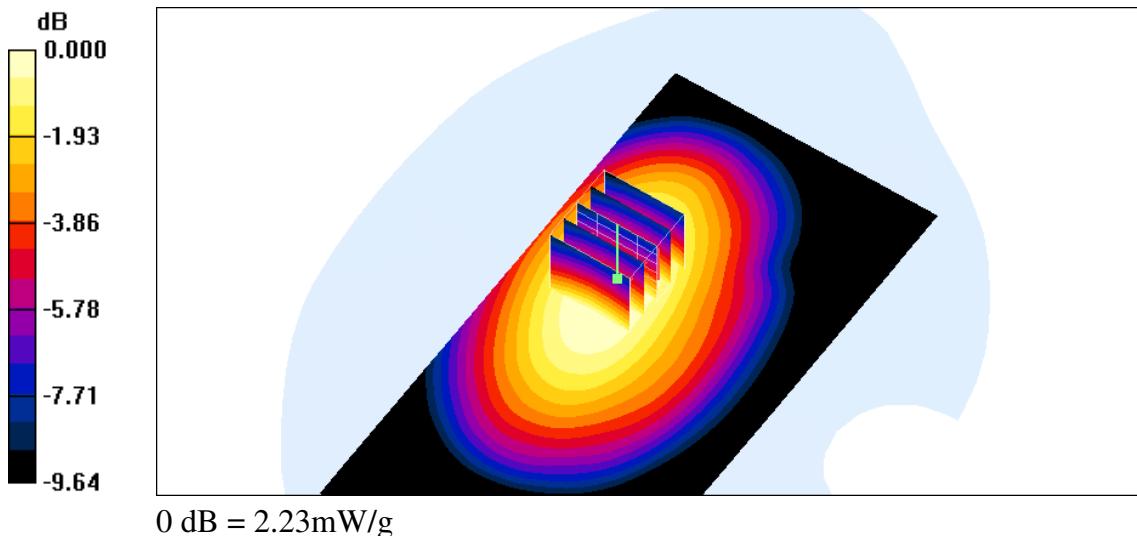

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 4:53:08 AM

Flat_FRS CH8_Headset_muscle_belt clip_Ni-MH

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: FRS; Frequency: 467.5625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.5625$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.335 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.437 W/kg

SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.228 mW/g

Maximum value of SAR (measured) = 0.330 mW/g

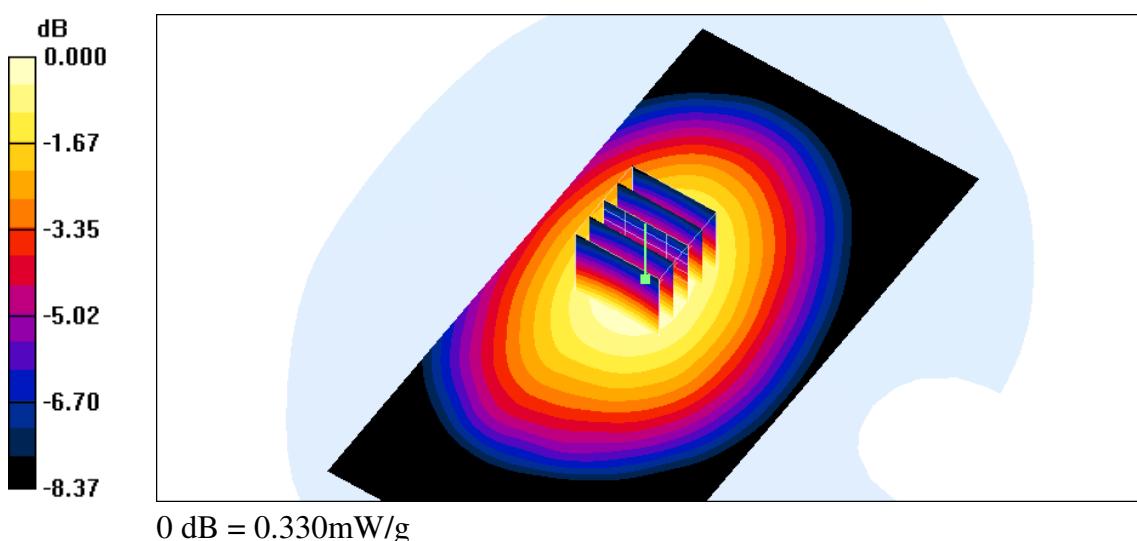

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 5:11:51 AM

Flat_FRS CH11_Headset_muscle_belt clip_Ni-MH

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.353 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.8 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.350 mW/g

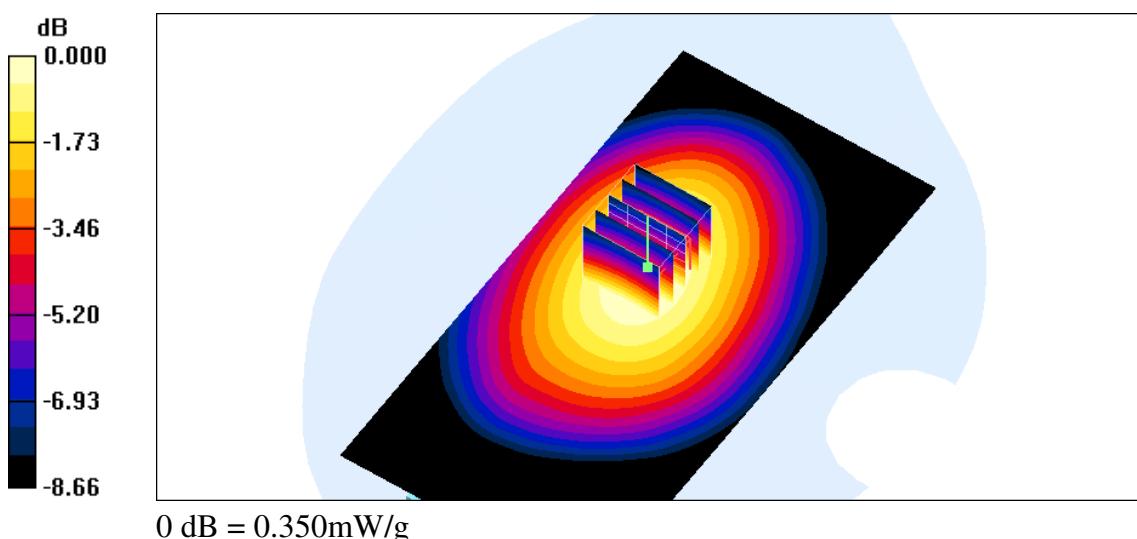

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 5:32:51 AM

Flat_FRS CH14_Headset_muscle_belt clip_Ni-MH

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: FRS; Frequency: 467.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.7125$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.417 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.8 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.276 mW/g

Maximum value of SAR (measured) = 0.403 mW/g

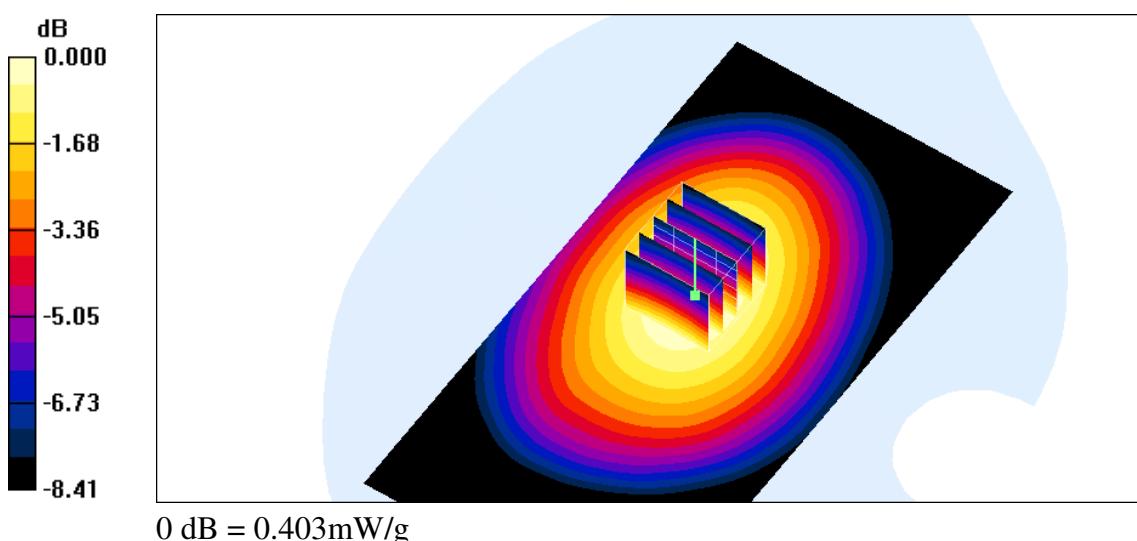

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 6:42:20 AM

Flat_FRS CH14_Headset_muscle_belt clip_Alkaline

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: FRS; Frequency: 467.7125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.7125$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.790 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.8 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.730 mW/g; SAR(10 g) = 0.528 mW/g

Maximum value of SAR (measured) = 0.769 mW/g

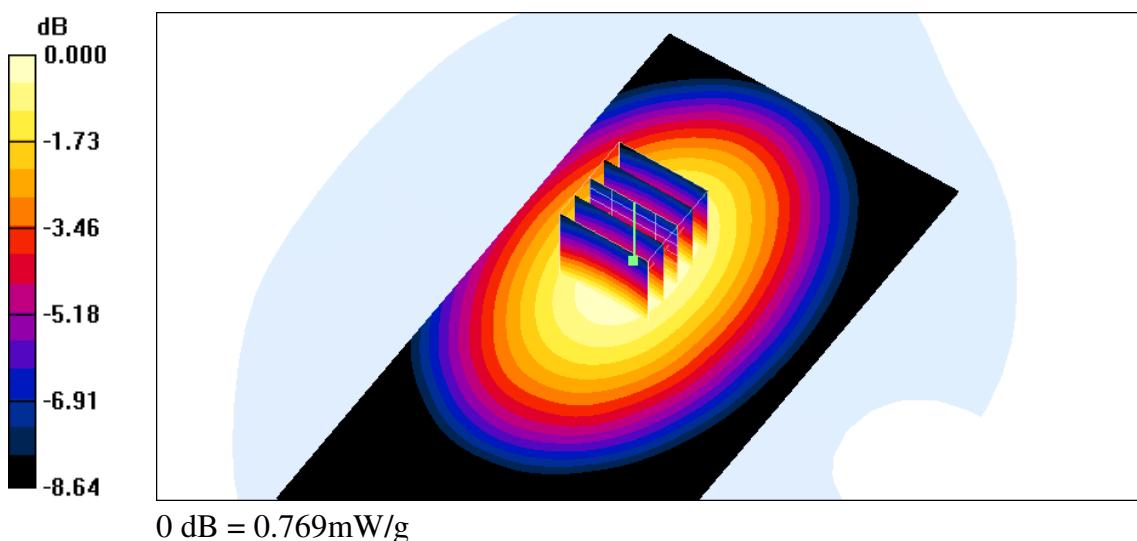

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 8:06:24 AM

Flat_GMRS CH15_Headset_muscle_belt clip_Ni-MH

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: GMRS; Frequency: 462.5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.5500 \text{ MHz}$; $\sigma = 0.927 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.51 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 39.7 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 1.36 mW/g; SAR(10 g) = 0.979 mW/g

Maximum value of SAR (measured) = 1.43 mW/g

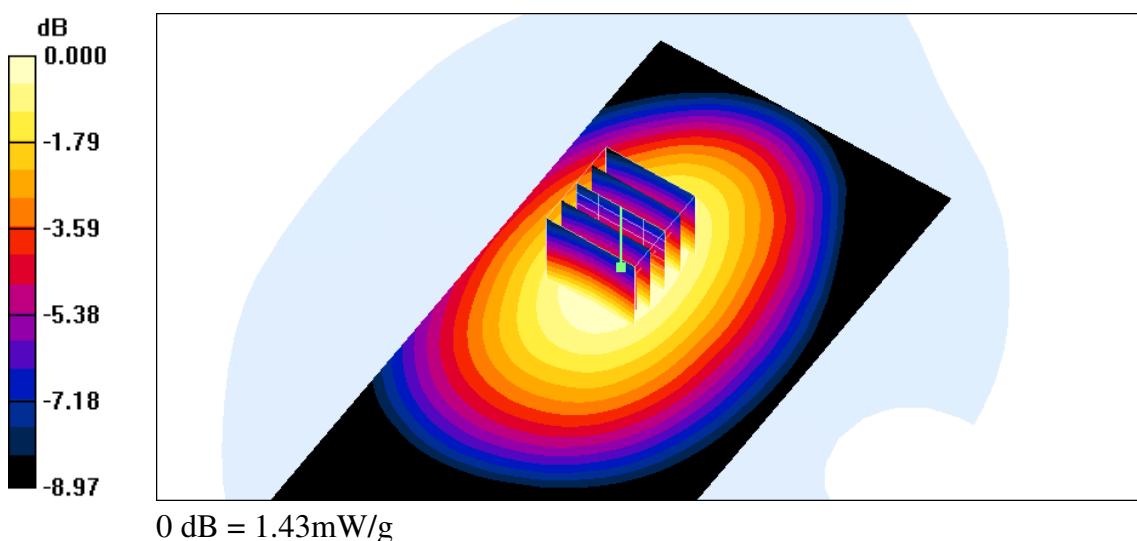

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 9:35:14 AM

Flat_GMRS CH4_Headset_muscle_belt clip_Ni-MH

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.927$ mho/m; $\xi_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.35 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.9 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.888 mW/g

Maximum value of SAR (measured) = 1.29 mW/g

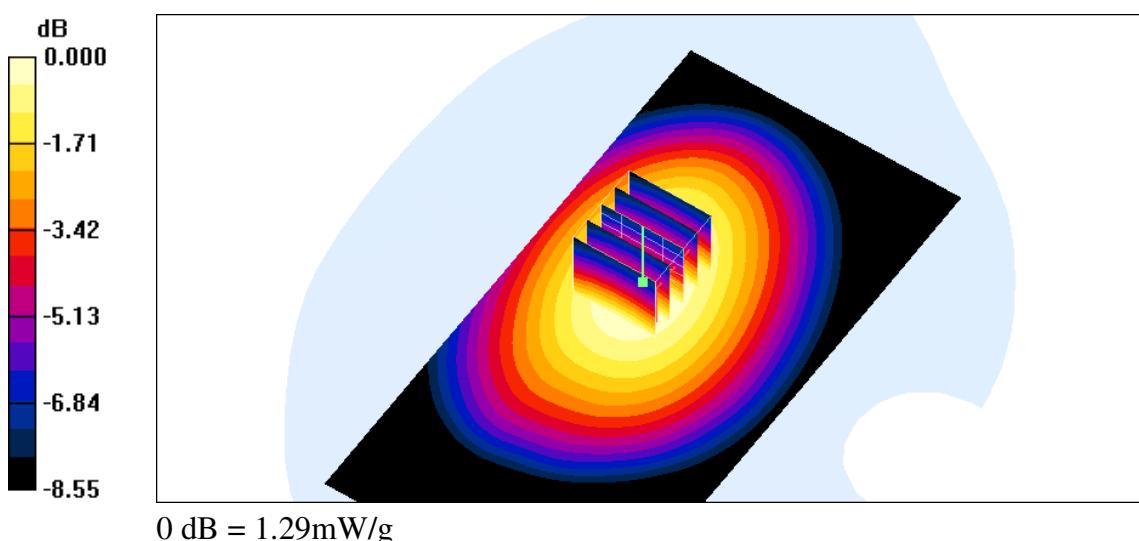

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 10:10:25 AM

Flat_GMRS CH22_Headset_muscle_belt clip_Ni-MH

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: GMRS; Frequency: 462.7250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.7250 \text{ MHz}$; $\sigma = 0.927 \text{ mho/m}$; $\xi_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.56 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 41.2 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 1.38 mW/g; SAR(10 g) = 0.999 mW/g

Maximum value of SAR (measured) = 1.45 mW/g

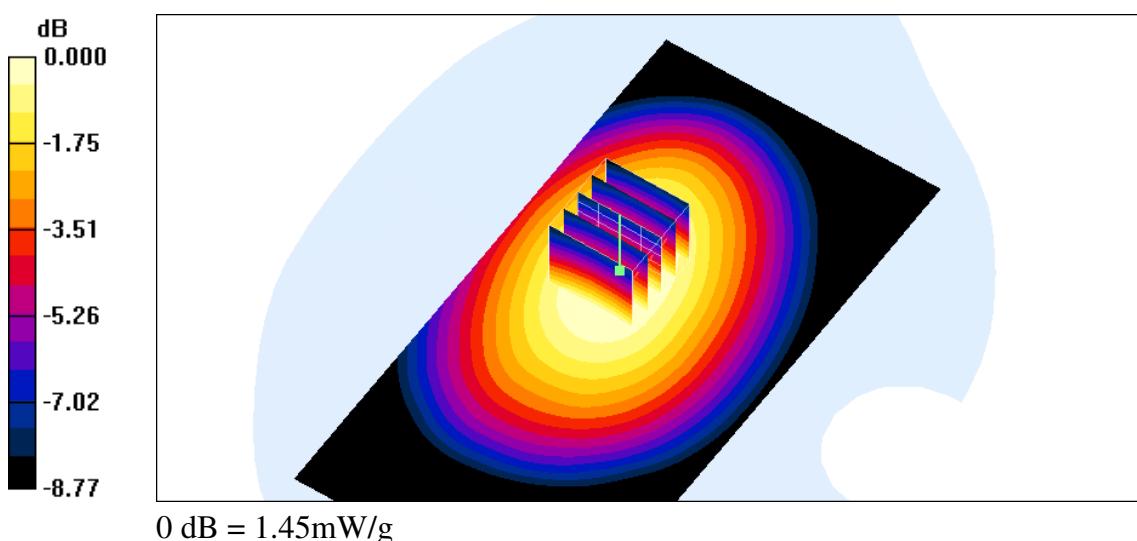

Test Laboratory: A Test Lab Techno Corp. Date/Time: 12/14/2007 3:51:07 AM

Flat_GMRS CH22_Headset_muscle_belt clip_Alkaline

DUT: EM1000; Type: Two Way Radio with GMRS/FRS and Weather Band Receiver;

FCC ID:K7GEM1000

Communication System: GMRS; Frequency: 462.7250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.7250 \text{ MHz}$; $\sigma = 0.927 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1531; ConvF(7.84, 7.84, 7.84); Calibrated: 1/22/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Flat/Area Scan (71x141x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.88 mW/g

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 47.9 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 1.69 mW/g; SAR(10 g) = 1.23 mW/g

Maximum value of SAR (measured) = 1.78 mW/g

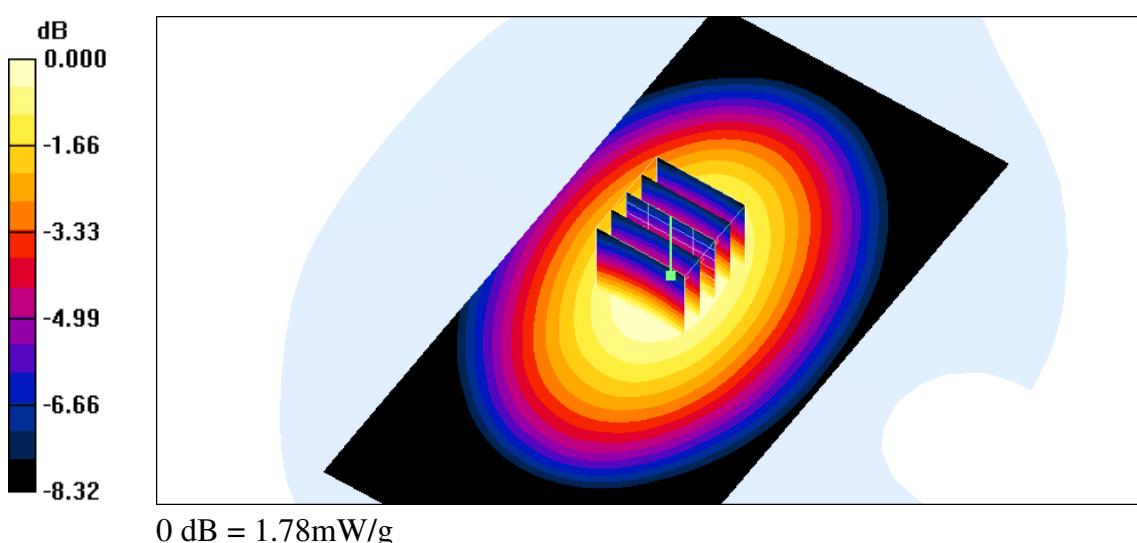



Appendix C - Calibration

All of the instruments Calibration information are listed below.

- Dipole _ D450V2 SN:1021 Calibration No.D450V2-1021_Mar07
- Dipole _ D450V2 SN:1021 Calibration No.D450V2-1021_Mar08
- Probe _ ET3DV6 SN:1531 Calibration No.ET3-1531_Jan07
- Probe _ ET3DV6 SN:1530 Calibration No.ET3-1530_Sep08
- DAE _ DAE3 SN:393 Calibration No.DAE3-393_Aug07
- DAE _ DAE4 SN:541 Calibration No.DAE4-541_Feb08