

FCC Test Report

Report No.: RF190107D07

FCC ID: K7SF7U083

Test Model: F7U083

Received Date: Jan. 7, 2019

Test Date: Jan. 8 ~ 28, 2019

Issued Date: Feb. 11, 2019

Applicant: Belkin International., Inc

Address: 12045 East Waterfront Drive, Playa Vista, CA 90094

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

**FCC Registration /
Designation Number:** 198487 / TW2021



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Report Issue History Record	3
Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Description of Test Modes	6
3.2.1 Test Mode Applicability and Tested Channel Detail	7
3.3 Description of Support Units	8
3.3.1 Configuration of System under Test	8
3.4 General Description of Applied Standards	9
4 Test Types and Results	10
4.1 Radiated Emission and Bandedge Measurement	10
4.1.1 Limits of Radiated Emission and Bandedge Measurement	10
4.1.2 Test Instruments	11
4.1.3 Test Procedures	12
4.1.4 Deviation from Test Standard	12
4.1.5 Test Set Up	13
4.1.6 EUT Operating Conditions	13
4.1.7 Test Results	14
4.2 Conducted Emission Measurement	24
4.2.1 Limits of Conducted Emission Measurement	24
4.2.2 Test Instruments	24
4.2.3 Test Procedures	25
4.2.4 Deviation from Test Standard	25
4.2.5 Test Setup	25
4.2.6 EUT Operating Conditions	25
4.2.7 Test Results	26
4.3 Channel Bandwidth	30
4.3.1 Test SetUp	30
4.3.2 Test Instruments	30
4.3.3 Test Procedure	30
4.3.4 Deviation from Test Standard	30
4.3.5 EUT Operating Conditions	30
4.3.6 Test Results	31
5 Pictures of Test Arrangements	33
Appendix – Information of the Testing Laboratories	34



Report Issue History Record

Issue No.	Description	Date Issued
RF190107D07	Original release	Feb. 11, 2019

Release Control Record

Issue No.	Description	Date Issued
RF190107D07	Original release	Feb. 11, 2019

1 Certificate of Conformity

Product: BOOST↑UP™ Wireless Charging Stand 10W

Brand: belkin

Test Model: F7U083

Sample Status: Engineering sample

Applicant: Belkin International., Inc

Test Date: Jan. 8 ~ 28, 2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.209)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :



Date:

Feb. 11, 2019

Jessica Cheng / Senior Specialist

Approved by :



Date:

Feb. 11, 2019

Rex Lai / Associate Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.209)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -6.33 dB at 0.15000 MHz
15.215	Channel Bandwidth Measurement		
15.209	Radiated Emission Test	Pass	Meet the requirement of limit. Minimum passing margin is -12.73 dB at 247.81 MHz

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.77 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	2.38 dB
	30MHz ~ 1000MHz	5.54 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	BOOST↑UP™ Wireless Charging Stand 10W
Brand	belkin
Test Model	F7U083
Sample Status	Engineering sample
Rating	Input: 5Vdc, 2A, Output: 5W Input: 9Vdc, 2A / 12Vdc, 1.5A Output: 10W
Modulation Type	FSK
Operating Frequency	111-148kHz
Antenna Type	Coil antenna
Field Strength	85.06dBuV/m
Dimensions	18.76 cm ² , 39.5mm x 47.5mm (rectangle)
Accessory Device	Adapter
Data Cable Supplied	1.2m shielded USB cable
Maximum Power Output from the Charging Coil	10W

Note:

1. The EUT is a wireless inductive charging coil.
2. The EUT has two configuration could be chosen as the following.

Model	Configuration	Difference
F7U083	Wireless charging pad + USB cable + AC power supply	Marketing purpose
	Wireless charging pad + USB cable	

3. The EUT consumes power from a switching power adapter, as the following:

Brand	Model	Specification
belkin	DSA-18QFB FUS A	Input: 100-240Vac, 50/60Hz, 0.8A (AC 2 Pin) Output: +3.6-6Vdc, 2A +6-9Vdc, 2A +9-12Vdc, 1.5A

3.2 Description of Test Modes

The following test frequencies are provided to this EUT:

Operating Frequency (kHz)	Tested Frequency (kHz)	Mode
111-148	135	Charging Mode with Full Load
111-148	146	Standby Mode

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To			Description
	RE<1G	PLC	CBW	
A	√	√	√	Charging Mode with Full Load
B	√	√	√	Standby Mode

Where **RE<1G**: Radiated Emission below 1GHz **PLC**: Power Line Conducted Emission
CBW: Channel Bandwidth

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Operating Frequency (kHz)	Tested Frequency (kHz)
A	111-148	135
B	111-148	146

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Operating Frequency (kHz)	Tested Frequency (kHz)
A	111-148	135
B	111-148	146

Channel Bandwidth Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Operating Frequency (kHz)	Tested Frequency (kHz)
A	111-148	135
B	111-148	146

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE<1G	23 deg. C, 69% RH	120Vac, 60Hz	Ian Chang
PLC	23 deg. C, 75% RH	120Vac, 60Hz	ED. Lin
CBW	25 deg. C, 76% RH	120Vac, 60Hz	Saxon Lee

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Load	N/A	N/A	N/A	N/A	Supplied by client (10W max load)


Note: All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB cable	1	1.2	Y	0	Supplied by client


Note: The core(s) is(are) originally attached to the cable(s).

3.3.1 Configuration of System under Test

For Mode A :

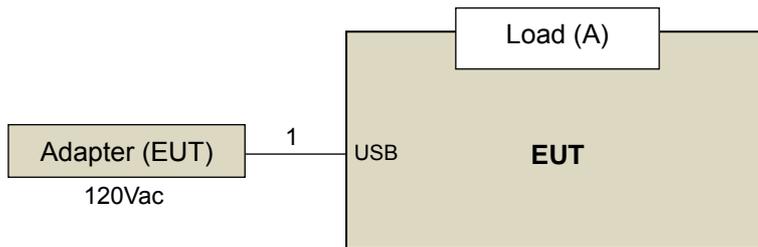

For Mode B:

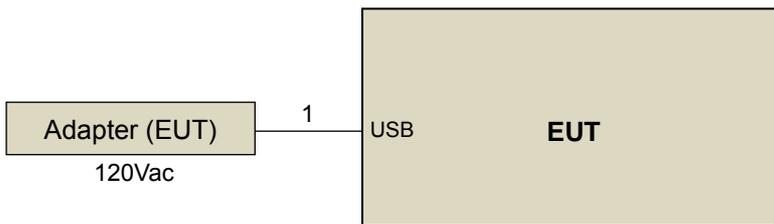

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.209)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

For Frequency Below 30MHz

Frequency (MHz)	Field Strength (dBuV/m)		Measurement Distance (meters)
	uV/m	dBuV/m	
0.009 – 0.490	2400 / F (kHz)	48.52-13.80	300
0.490 – 1.705	24000 / F (kHz)	33.80-22.97	30
1.705 – 30.0	30	29.54	30

For Frequency Between 30-1000MHz

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
30-88	90	39.1	100	40.0
88-216	150	43.5	150	43.5
216-960	210	46.4	200	46.0
Above 960	300	49.5	500	54.0

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 21, 2018	Feb. 20, 2019
HP Preamplifier	8449B	3008A01201	Feb. 22, 2018	Feb. 21, 2019
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Feb. 21, 2018	Feb. 20, 2019
Agilent TEST RECEIVER	N9038A	MY51210129	Feb. 6, 2018	Feb. 5, 2019
Schwarzbeck Antenna	VULB 9168	139	Nov. 26, 2018	Nov. 25, 2019
Schwarzbeck Antenna	VHBA 9123	480	May 19, 2017	May 18, 2019
Schwarzbeck Horn Antenna	BBHA-9170	212	Nov. 25, 2018	Nov. 24, 2019
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Nov. 25, 2018	Nov. 24, 2019
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15.9.5	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF102	Cable-CH6-01	Aug. 13, 2018	Aug. 12, 2019
SUHNER RF cable With 3/4dB PAD	SF102	Cable-CH8-3.6m	Aug. 13, 2018	Aug. 12, 2019
KEYSIGHT MIMO Powermeasurement Test set	U2021XA	U2021XA-001	Jun. 4, 2018	Jun. 3, 2019
KEYSIGHT Spectrum Analyzer	N9030A	MY54490260	Aug. 3, 2018	Aug. 2, 2019
Loop Antenna EMCI	LPA600	270	Aug. 11, 2017	Aug. 10, 2019
EMCO Horn Antenna	3115	00028257	Nov. 25, 2018	Nov. 24, 2019
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 27, 2018	Sep. 26, 2019
Anritsu Power Sensor	MA2411B	0738404	Apr. 26, 2018	Apr. 25, 2019
Anritsu Power Meter	ML2495A	0842014	Apr. 26, 2018	Apr. 25, 2019

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in Chamber No. 6.
 4. The Industry Canada Reference No. IC 7450E-6.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

For Radiated emission below 30MHz

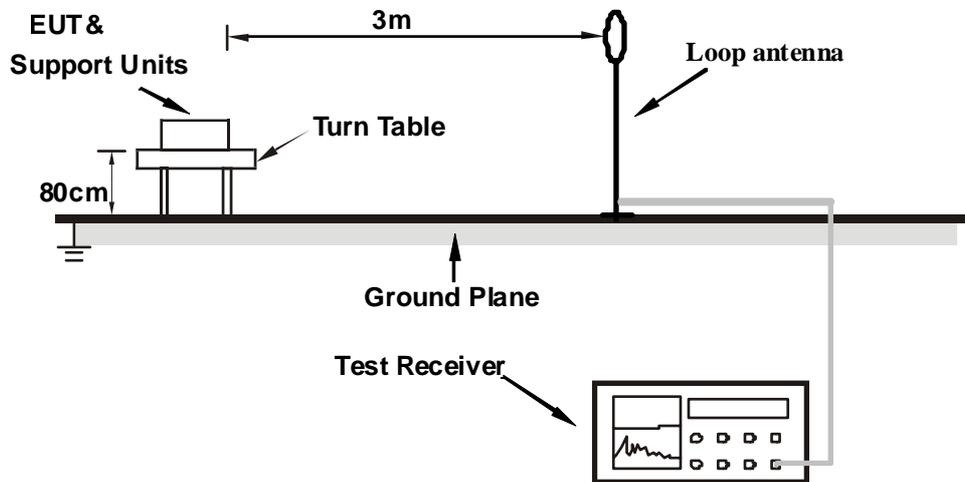

For Radiated emission 30MHz to 1GHz

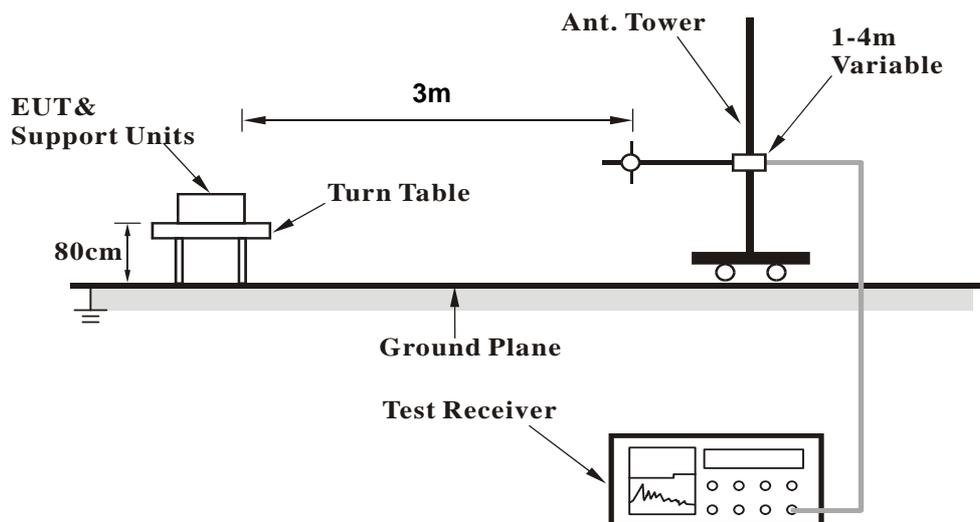

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

Test Mode A:

- The EUT powered by adapter.
- Put the Load on the EUT (wireless charging) during the test.

Test Mode B:

- The EUT powered by adapter.

4.1.7 Test Results

Below 30MHz Data:

Charging Mode


Test Frequency	135kHz	Detector Function	Quasi-Peak
Frequency Range	9 kHz ~ 30 MHz		
Test Mode	A		

Antenna Polarity & Test Distance: Loop Antenna Open At 3m

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.135	85.06 QP	105.00	-19.94	1.00	193	65.58	19.48
2	0.405	61.49 QP	95.45	-33.96	1.00	218	51.08	10.41
3	0.675	53.12 QP	71.02	-17.90	1.00	249	45.80	7.32
4	0.945	46.99 QP	68.10	-21.11	1.00	179	41.68	5.31
5	1.215	42.79 QP	65.91	-23.12	1.00	152	38.13	4.66
6	1.485	38.90 QP	64.17	-25.27	1.00	126	34.87	4.03
7	1.755	35.21 QP	69.54	-34.33	1.00	91	31.80	3.41

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

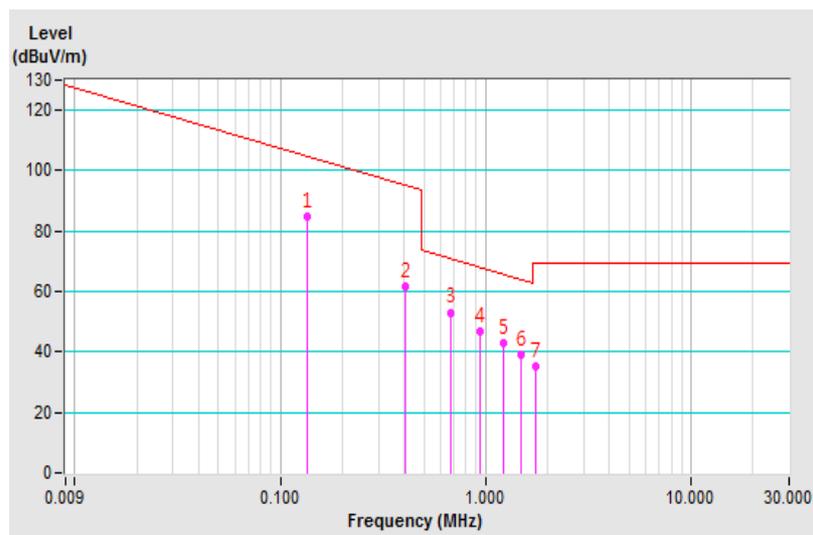


Test Frequency	135kHz	Detector Function	Quasi-Peak
Frequency Range	9 kHz ~ 30 MHz		
Test Mode	A		

Antenna Polarity & Test Distance: Loop Antenna Close At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.135	77.60 QP	105.00	-27.40	1.00	126	58.12	19.48
2	0.405	55.29 QP	95.45	-40.16	1.00	88	44.88	10.41
3	0.675	46.58 QP	71.02	-24.44	1.00	27	39.26	7.32
4	0.945	40.74 QP	68.10	-27.36	1.00	91	35.43	5.31
5	1.215	37.64 QP	65.91	-28.27	1.00	150	32.98	4.66
6	1.485	34.65 QP	64.17	-29.52	1.00	197	30.62	4.03
7	1.755	30.77 QP	69.54	-38.77	1.00	240	27.36	3.41

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

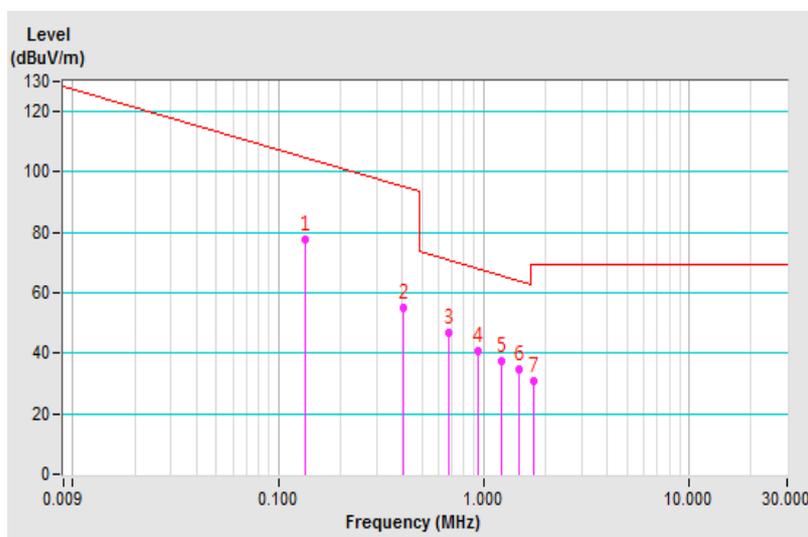


Test Frequency	135kHz	Detector Function	Quasi-Peak
Frequency Range	9 kHz ~ 30 MHz		
Test Mode	A		

Antenna Polarity & Test Distance: Loop Antenna Ground-parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.135	78.14 QP	105.00	-26.86	1.00	360	58.66	19.48
2	0.405	56.51 QP	95.45	-38.94	1.00	118	46.10	10.41
3	0.675	48.37 QP	71.02	-22.65	1.00	164	41.05	7.32
4	0.945	42.08 QP	68.10	-26.02	1.00	296	36.77	5.31
5	1.215	38.52 QP	65.91	-27.39	1.00	352	33.86	4.66
6	1.485	34.81 QP	64.17	-29.36	1.00	321	30.78	4.03
7	1.755	30.23 QP	69.54	-39.31	1.00	328	26.82	3.41

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

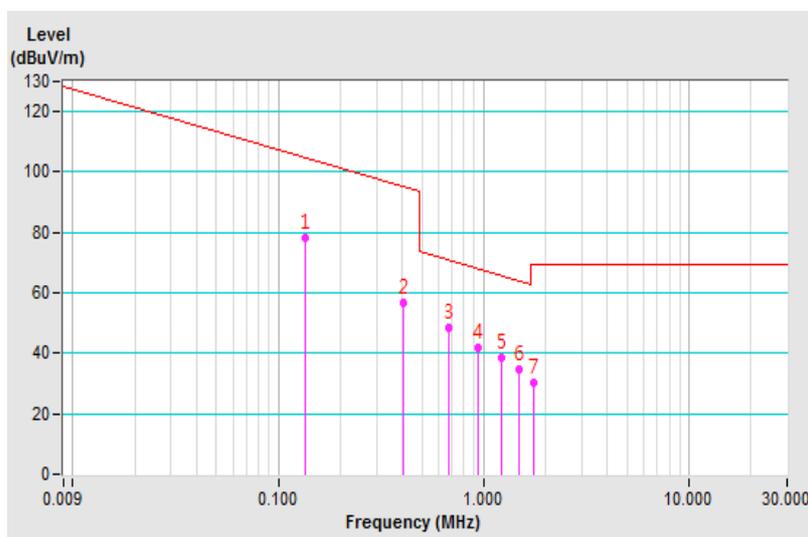

Standby Mode


Test Frequency	146kHz	Detector Function	Quasi-Peak
Frequency Range	9 kHz ~ 30 MHz		
Test Mode	B		

Antenna Polarity & Test Distance: Loop Antenna Open At 3m

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.146	84.28 QP	104.32	-20.04	1.00	198	65.44	18.84
2	0.438	57.60 QP	94.77	-37.17	1.00	232	47.62	9.98
3	0.730	51.88 QP	70.34	-18.46	1.00	98	45.01	6.87
4	1.022	46.71 QP	67.42	-20.71	1.00	36	41.62	5.09
5	1.314	43.41 QP	65.23	-21.82	1.00	0	38.98	4.43
6	1.606	40.45 QP	63.49	-23.04	1.00	62	36.69	3.76
7	1.898	37.39 QP	69.54	-32.15	1.00	104	34.30	3.09

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

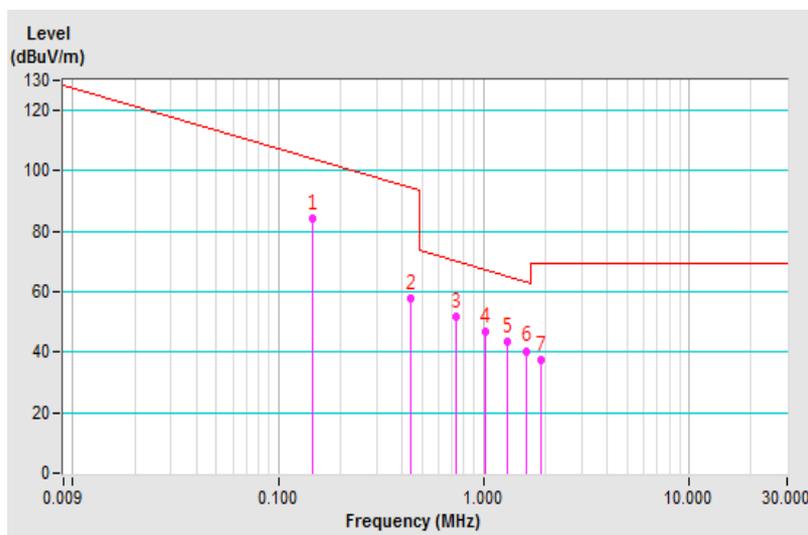


Test Frequency	146kHz	Detector Function	Quasi-Peak
Frequency Range	9 kHz ~ 30 MHz		
Test Mode	B		

Antenna Polarity & Test Distance: Loop Antenna Close At 3m

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.146	76.59 QP	104.32	-27.73	1.00	339	57.75	18.84
2	0.438	53.06 QP	94.77	-41.71	1.00	207	43.08	9.98
3	0.730	44.75 QP	70.34	-25.59	1.00	130	37.88	6.87
4	1.022	40.08 QP	67.42	-27.34	1.00	95	34.99	5.09
5	1.314	37.33 QP	65.23	-27.90	1.00	66	32.90	4.43
6	1.606	34.02 QP	63.49	-29.47	1.00	32	30.26	3.76
7	1.898	32.23 QP	69.54	-37.31	1.00	0	29.14	3.09

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

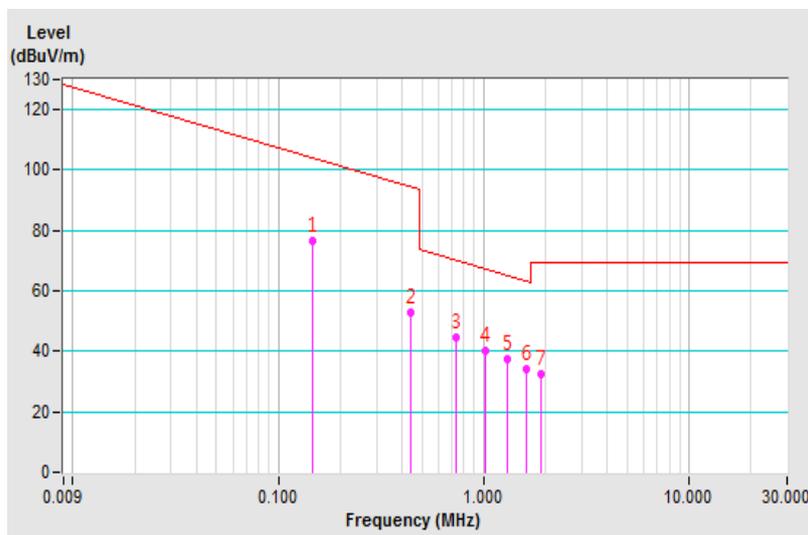


Test Frequency	146kHz	Detector Function	Quasi-Peak
Frequency Range	9 kHz ~ 30 MHz		
Test Mode	B		

Antenna Polarity & Test Distance: Loop Antenna Ground-parallel At 3m

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.146	77.01 QP	104.32	-27.31	1.00	165	58.17	18.84
2	0.438	53.31 QP	94.77	-41.46	1.00	174	43.33	9.98
3	0.730	45.42 QP	70.34	-24.92	1.00	136	38.55	6.87
4	1.022	40.28 QP	67.42	-27.14	1.00	106	35.19	5.09
5	1.314	36.71 QP	65.23	-28.52	1.00	86	32.28	4.43
6	1.606	35.04 QP	63.49	-28.45	1.00	50	31.28	3.76
7	1.898	31.32 QP	69.54	-38.22	1.00	34	28.23	3.09

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

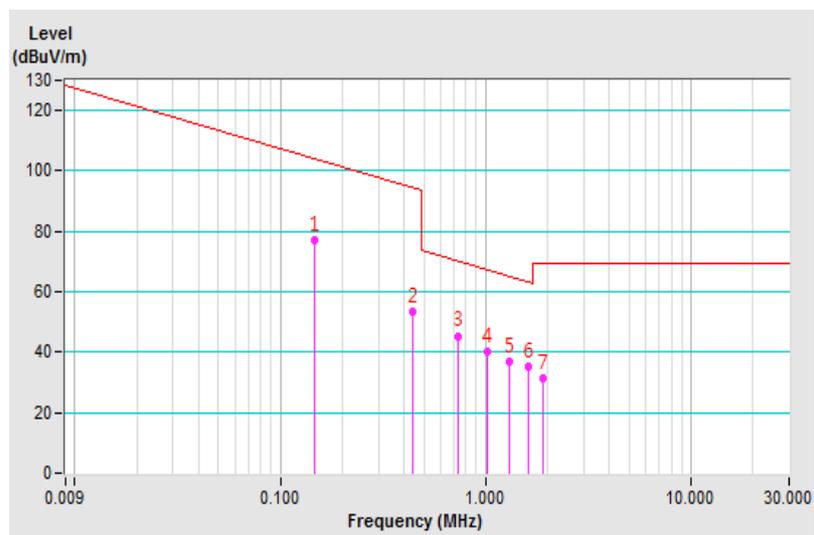

Below 1GHz Data:


Charging Mode

Test Frequency	132kHz	Detector Function	Quasi-Peak
Frequency Range	30 MHz ~ 1GHz		
Test Mode	A		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	89.32	23.42 QP	43.50	-20.08	1.64 H	168	35.95	-12.53
2	181.95	30.62 QP	43.50	-12.88	1.94 H	55	39.19	-8.57
3	247.81	33.27 QP	46.00	-12.73	2.36 H	268	40.57	-7.30
4	314.55	25.65 QP	46.00	-20.35	2.05 H	155	30.46	-4.81
5	383.90	24.19 QP	46.00	-21.81	1.17 H	155	27.95	-3.76
6	525.09	24.41 QP	46.00	-21.59	1.46 H	308	25.40	-0.99

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

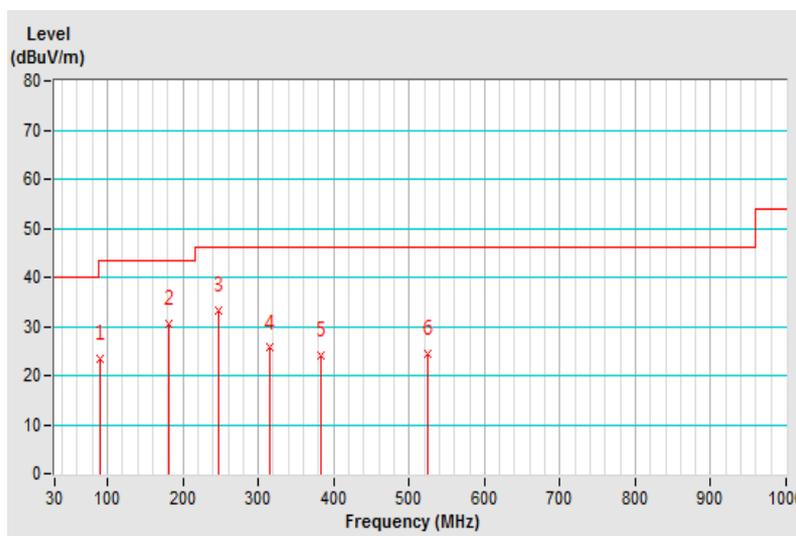


Test Frequency	135kHz	Detector Function	Quasi-Peak
Frequency Range	30 MHz ~ 1GHz		
Test Mode	A		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.67	26.67 QP	40.00	-13.33	1.64 V	21	33.96	-7.29
2	88.10	28.24 QP	43.50	-15.26	2.23 V	278	40.80	-12.56
3	140.09	23.24 QP	43.50	-20.26	1.88 V	82	30.75	-7.51
4	174.63	28.13 QP	43.50	-15.37	1.74 V	331	35.85	-7.72
5	242.53	23.93 QP	46.00	-22.07	1.66 V	146	31.41	-7.48
6	491.09	23.07 QP	46.00	-22.93	1.20 V	214	24.59	-1.52

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

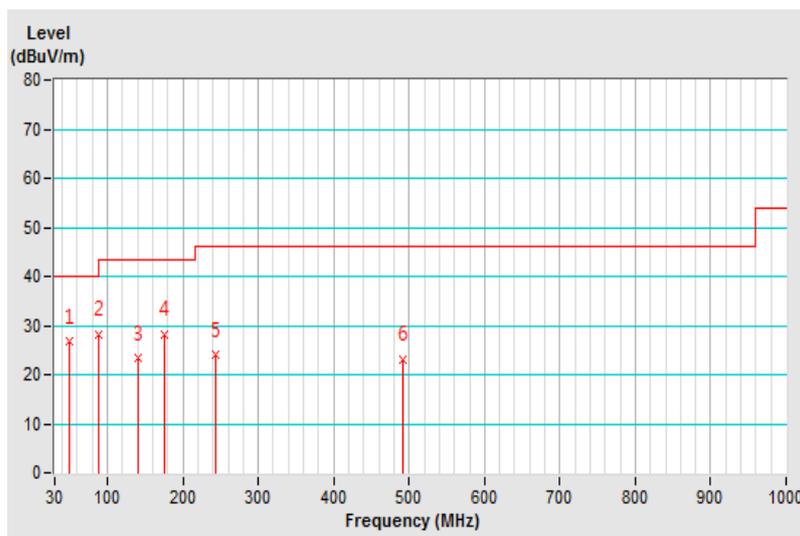


Standby Mode

Test Frequency	146kHz	Detector Function	Quasi-Peak
Frequency Range	30 MHz ~ 1GHz		
Test Mode	B		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.61	20.69 QP	40.00	-19.31	2.61 H	236	28.99	-8.30
2	162.74	30.58 QP	43.50	-12.92	1.87 H	103	37.61	-7.03
3	183.07	28.19 QP	43.50	-15.31	2.20 H	297	36.87	-8.68
4	211.00	27.78 QP	43.50	-15.72	1.58 H	279	36.79	-9.01
5	278.95	30.88 QP	46.00	-15.12	1.61 H	167	36.74	-5.86
6	458.30	23.02 QP	46.00	-22.98	1.28 H	159	25.15	-2.13

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

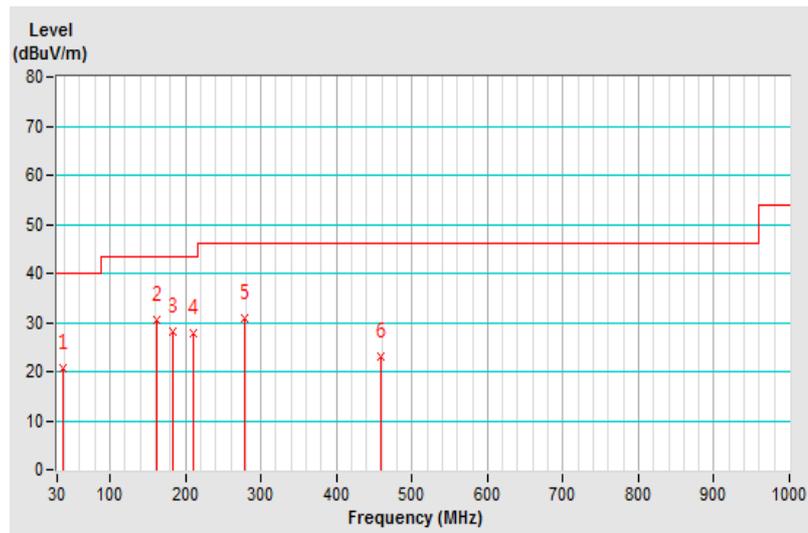


Test Frequency	146kHz	Detector Function	Quasi-Peak
Frequency Range	30 MHz ~ 1GHz		
Test Mode	B		

Antenna Polarity & Test Distance: Vertical At 3m

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.63	24.53 QP	40.00	-15.47	1.14 V	271	32.13	-7.60
2	91.79	24.09 QP	43.50	-19.41	1.64 V	279	36.47	-12.38
3	170.26	27.79 QP	43.50	-15.71	2.37 V	20	35.23	-7.44
4	213.33	23.12 QP	43.50	-20.38	2.01 V	182	32.08	-8.96
5	274.10	28.40 QP	46.00	-17.60	1.87 V	178	34.45	-6.05
6	462.28	22.92 QP	46.00	-23.08	1.66 V	64	25.00	-2.08

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

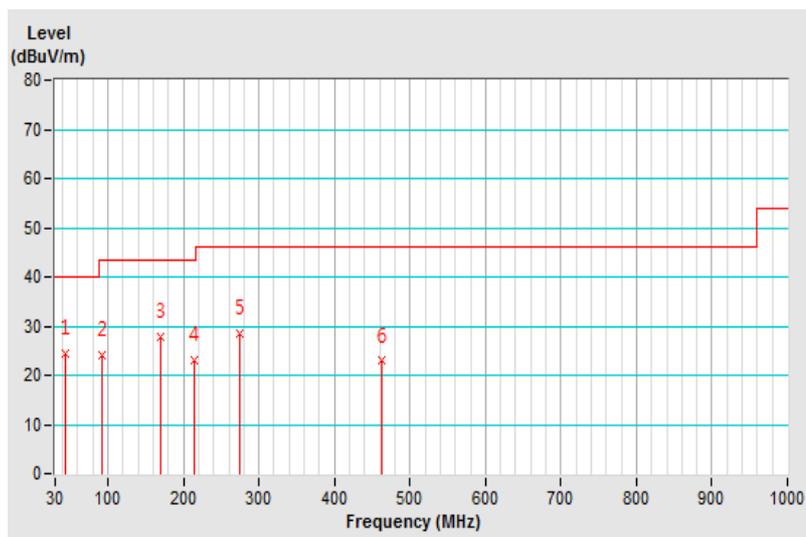

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	838251/021	Nov. 1, 2018	Oct. 31, 2019
ROHDE & SCHWARZ Artificial Mains Network (For EUT)	ENV216	101195	May2, 2018	May1, 2019
LISN With Adapter(for EUT)	AD10	C03Ada-002	May2, 2018	May1, 2019
EMCO L.I.S.N. (For peripherals)	3825/2	9504-2359	Jul.26, 2018	Jul.25, 2019
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 3, 2018	May 2, 2019
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK 8121	8121-808	Mar. 5, 2018	Mar. 4, 2019
Software	Cond_V7.3.7.4	NA	NA	NA
RF cable (JYEBAO) With10dB PAD	5D-FB	Cable-C03-01	Sep. 18, 2018	Sep. 17, 2019
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-300	Jan. 25, 2019	Jan. 24, 2020
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-301	Jan. 25, 2019	Jan. 24, 2020
ROHDE & SCHWARZ Artificial Mains Network (For TV EUT)	ESH3-Z5	100220	Nov. 21, 2018	Nov. 20, 2019
LISN With Adapter(for TV EUT)	100220	N/A	Nov. 21, 2018	Nov. 20, 2019

Notes: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in Shielded Room No. 3.

3. The VCCI Site Registration No. C-10274.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

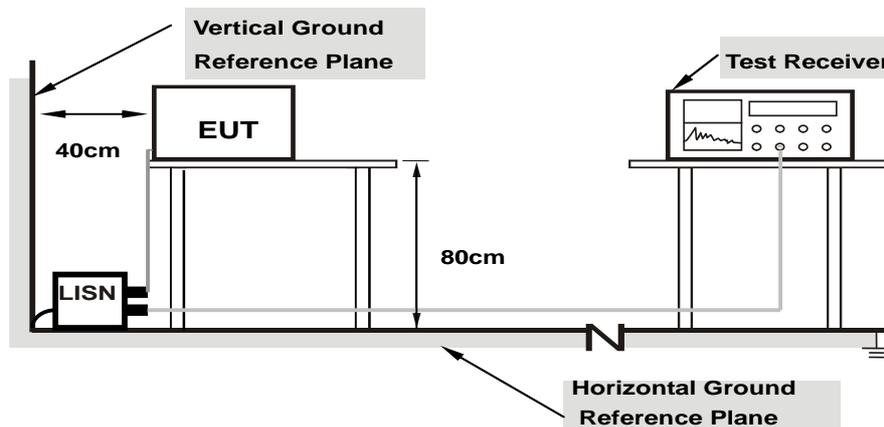

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as item 4.1.6.

4.2.7 Test Results


Charging Mode

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.71	49.96	21.97	59.67	31.68	66.00	56.00	-6.33	-24.32
2	0.16953	9.71	48.61	22.34	58.32	32.05	64.98	54.98	-6.66	-22.93
3	0.20078	9.71	46.25	24.89	55.96	34.60	63.58	53.58	-7.62	-18.98
4	0.23594	9.72	43.21	17.46	52.93	27.18	62.24	52.24	-9.31	-25.06
5	0.27891	9.73	39.96	12.22	49.69	21.95	60.85	50.85	-11.16	-28.90
6	0.34531	9.74	36.03	15.44	45.77	25.18	59.07	49.07	-13.30	-23.89
7	0.42344	9.75	33.76	9.85	43.51	19.60	57.38	47.38	-13.87	-27.78
8	0.49766	9.76	28.72	10.09	38.48	19.85	56.04	46.04	-17.56	-26.19
9	0.58750	9.78	25.74	5.70	35.52	15.48	56.00	46.00	-20.48	-30.52
10	0.68906	9.79	25.72	15.37	35.51	25.16	56.00	46.00	-20.49	-20.84

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

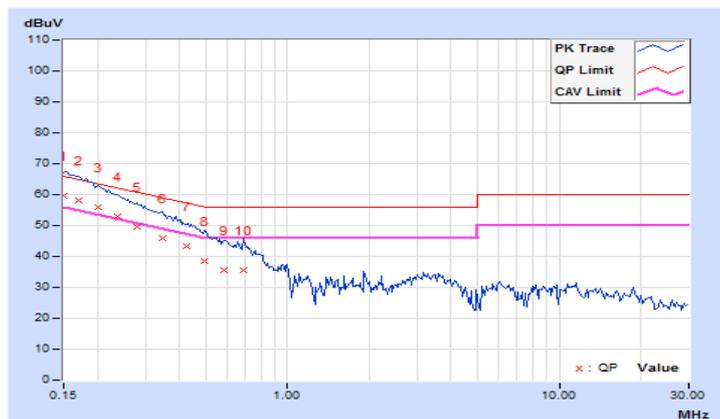


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15781	9.72	47.46	24.09	57.18	33.81	65.58
2	0.18906	9.72	45.32	24.38	55.04	34.10	64.08	54.08	-9.04	-19.98
3	0.21250	9.72	43.32	20.31	53.04	30.03	63.11	53.11	-10.07	-23.08
4	0.24375	9.73	41.64	16.15	51.37	25.88	61.97	51.97	-10.60	-26.09
5	0.28672	9.74	39.50	14.39	49.24	24.13	60.62	50.62	-11.38	-26.49
6	0.34141	9.76	36.00	10.71	45.76	20.47	59.17	49.17	-13.41	-28.70
7	0.38828	9.77	33.97	11.31	43.74	21.08	58.10	48.10	-14.36	-27.02
8	0.47031	9.78	29.85	7.88	39.63	17.66	56.51	46.51	-16.88	-28.85
9	0.56406	9.79	26.30	3.36	36.09	13.15	56.00	46.00	-19.91	-32.85
10	0.73203	9.81	22.35	10.69	32.16	20.50	56.00	46.00	-23.84	-25.50

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

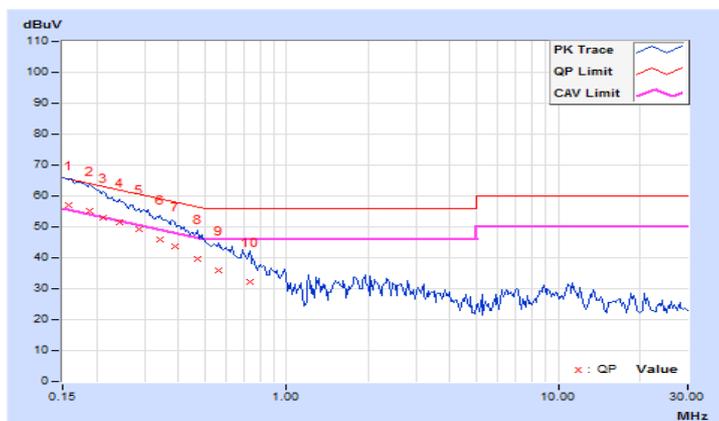


Standby Mode

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16172	9.71	25.91	9.38	35.62	19.09	65.38
2	0.21250	9.71	25.47	8.87	35.18	18.58	63.11	53.11	-27.93	-34.53
3	0.30625	9.73	15.66	6.78	25.39	16.51	60.07	50.07	-34.68	-33.56
4	0.41172	9.75	14.82	4.35	24.57	14.10	57.61	47.61	-33.04	-33.51
5	0.66953	9.79	13.71	1.60	23.50	11.39	56.00	46.00	-32.50	-34.61
6	0.87656	9.81	9.11	2.35	18.92	12.16	56.00	46.00	-37.08	-33.84

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

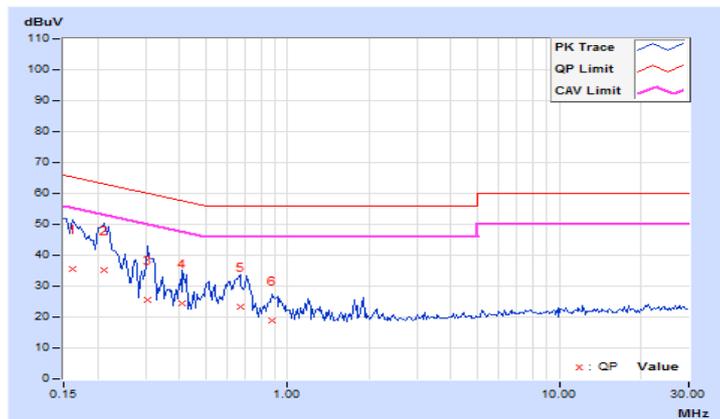


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.71	28.53	10.79	38.24	20.50	66.00
2	0.17734	9.72	24.06	12.80	33.78	22.52	64.61	54.61	-30.83	-32.09
3	0.21250	9.72	15.47	5.34	25.19	15.06	63.11	53.11	-37.92	-38.05
4	0.27109	9.74	14.96	5.10	24.70	14.84	61.08	51.08	-36.38	-36.24
5	0.60313	9.79	8.03	3.75	17.82	13.54	56.00	46.00	-38.18	-32.46
6	0.71250	9.81	11.90	2.84	21.71	12.65	56.00	46.00	-34.29	-33.35


Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

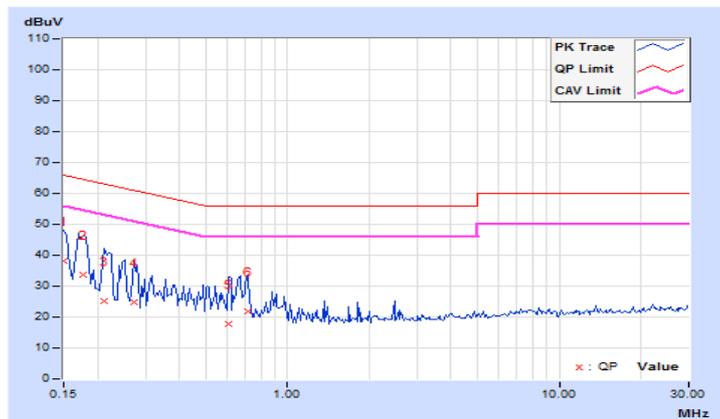

4.3 Channel Bandwidth

4.3.1 Test SetUp

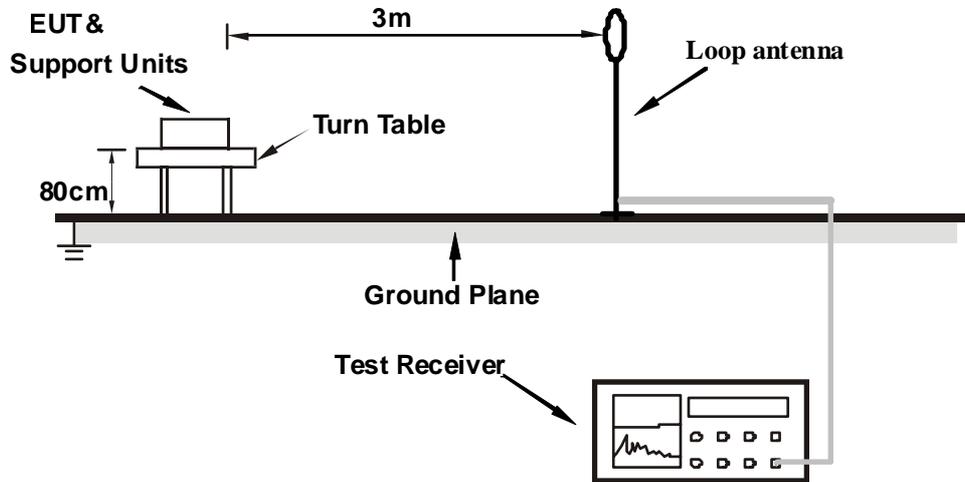

4.3.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.3 Test Procedure

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Then the Loop antenna was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband loop antenna, which is fixed of a 1m height above the ground, and set away from 3m to the EUT to find the disturbance reading on each frequency.
- The test-receiver system was set to Quasi-peak detect function and specified bandwidth.

4.3.4 Deviation from Test Standard

No deviation.


4.3.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously.

4.3.6 Test Results


Mode A:

Frequency (kHz)	20dB Bandwidth (kHz)
135	0.775

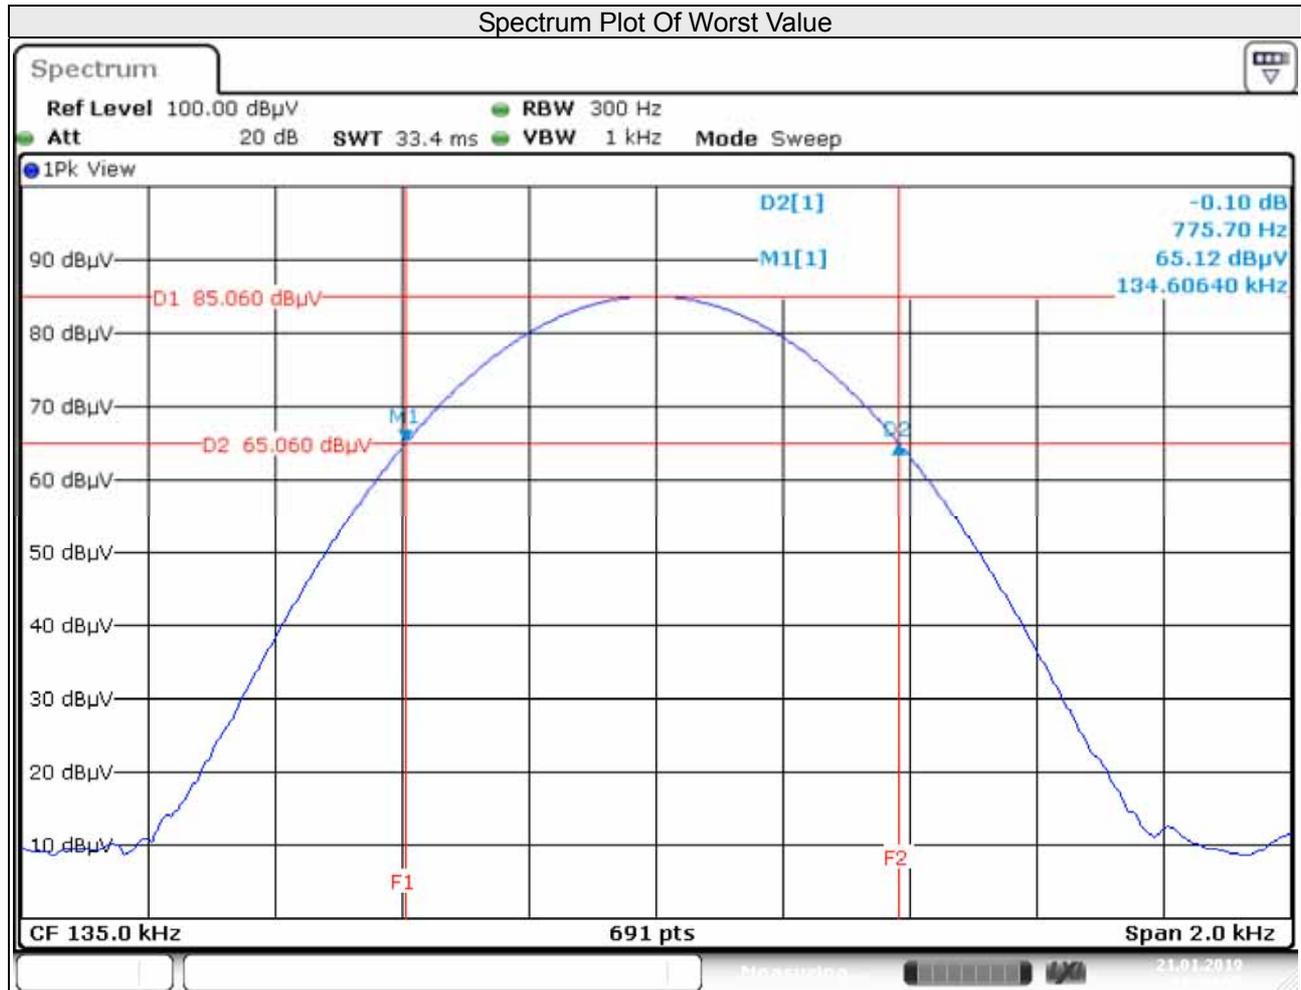

Mode B:

Frequency (kHz)	20dB Bandwidth (kHz)
146	0.775

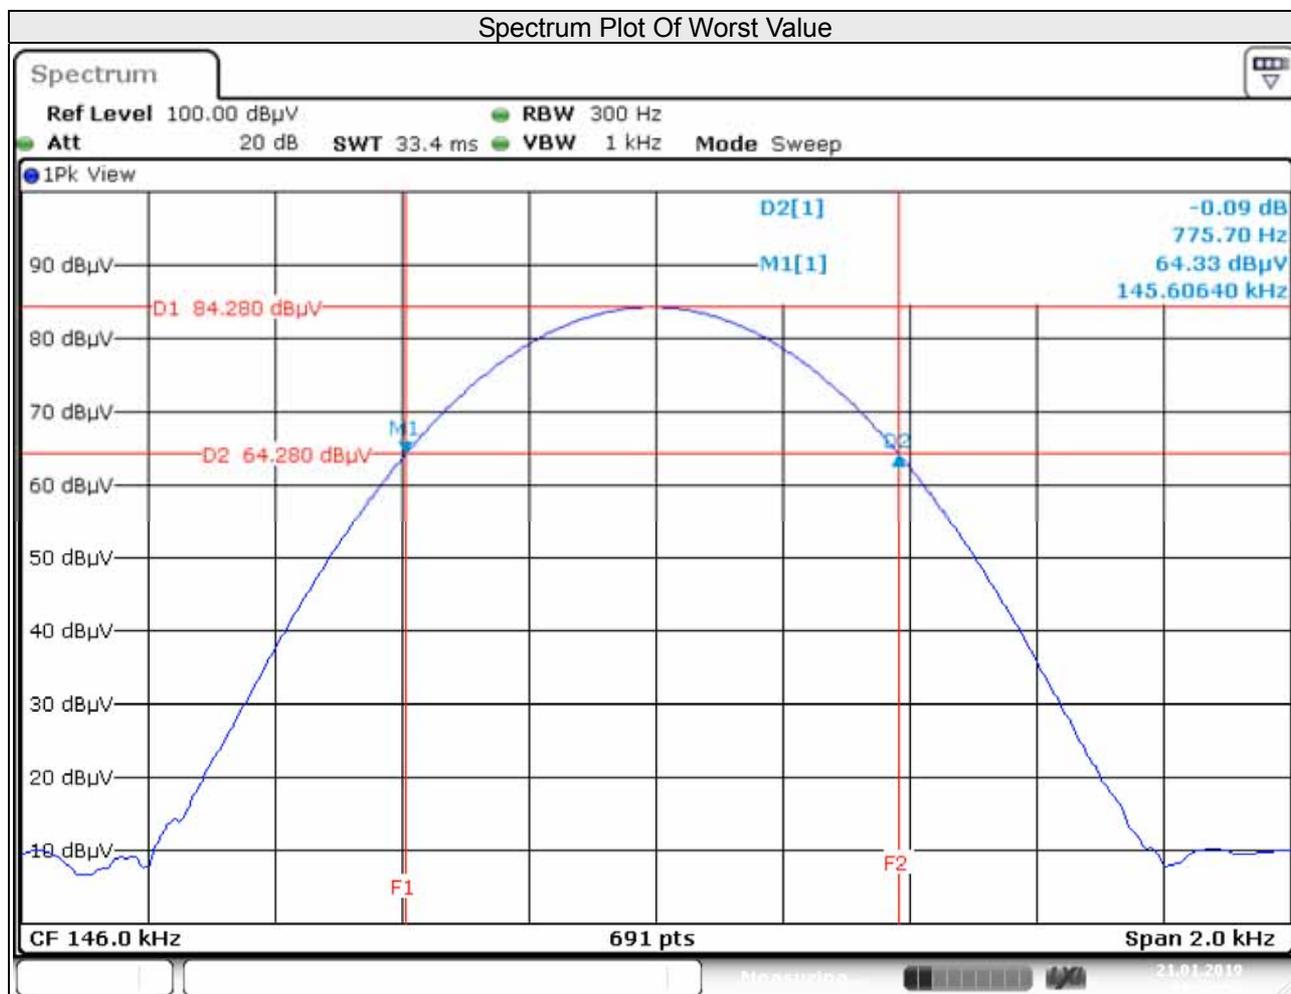

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---