


# FCC SAR Test Report

APPLICANT : D-Link Corporation  
EQUIPMENT : LTE Mobile Router  
BRAND NAME : D-Link  
MODEL NAME : DWR-930  
FCC ID : KA2WR930A1  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## **Table of Contents**

<b>1. Statement of Compliance .....</b>	<b>4</b>
<b>2. Administration Data .....</b>	<b>4</b>
<b>3. Guidance Standard .....</b>	<b>5</b>
<b>4. Equipment Under Test (EUT) .....</b>	<b>5</b>
4.1 General Information .....	5
4.2 Maximum Tune-up Limit.....	6
4.3 General LTE SAR Test and Reporting Considerations .....	8
<b>5. RF Exposure Limits.....</b>	<b>9</b>
5.1 Uncontrolled Environment.....	9
5.2 Controlled Environment.....	9
<b>6. Specific Absorption Rate (SAR).....</b>	<b>10</b>
6.1 Introduction .....	10
6.2 SAR Definition.....	10
<b>7. System Description and Setup .....</b>	<b>11</b>
<b>8. Measurement Procedures .....</b>	<b>12</b>
8.1 Spatial Peak SAR Evaluation.....	12
8.2 Power Reference Measurement.....	13
8.3 Area Scan .....	13
8.4 Zoom Scan.....	14
8.5 Volume Scan Procedures.....	14
8.6 Power Drift Monitoring.....	14
<b>9. Test Equipment List .....</b>	<b>15</b>
<b>10. System Verification .....</b>	<b>16</b>
10.1 Tissue Verification .....	16
10.2 System Performance Check Results.....	17
<b>11. RF Exposure Positions .....</b>	<b>18</b>
11.1 Wireless Router.....	18
<b>12. Conducted RF Output Power (Unit: dBm).....</b>	<b>18</b>
<b>13. Antenna Location .....</b>	<b>29</b>
<b>14. SAR Test Results .....</b>	<b>30</b>
14.1 Body SAR .....	31
14.2 Repeated SAR Measurement .....	32
<b>15. Simultaneous Transmission Analysis .....</b>	<b>33</b>
15.1 Body Exposure Conditions .....	34
<b>16. Uncertainty Assessment .....</b>	<b>35</b>
<b>17. References .....</b>	<b>37</b>
<b>Appendix A. Plots of System Performance Check</b>	
<b>Appendix B. Plots of High SAR Measurement</b>	
<b>Appendix C. DASY Calibration Certificate</b>	
<b>Appendix D. Test Setup Photos</b>	



## Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA431455	Rev. 01	Initial issue of report	Apr. 24, 2014

## 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **D-Link Corporation, LTE Mobile Router, DWR-930**, are as follows.

Equipment Class	Frequency Band	Operating Mode	Highest SAR Summary	
			Wireless Router 1g SAR (W/kg)	Simultaneous Transmission 1g SAR (W/kg)
PCE	GSM850	Data	1.21	1.31
	GSM1900	Data	<b>1.29</b>	
	WCDMA Band V	Data	0.38	
	WCDMA Band II	Data	0.79	
	LTE Band 5	Data	0.56	
	LTE Band 7	Data	0.99	
DTS	WLAN 2.4GHz Band	Data	<b>0.08</b>	1.31
Date of Testing:			04/02/2014 ~ 04/12/2013	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

## 2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	D-Link Corporation
Address	No.289, Sinhu 3rd Rd, Neihu District Taipei City 114 Taiwan

Manufacturer	
Company Name	D-Link Corporation
Address	No.289, Sinhu 3rd Rd, Neihu District Taipei City 114 Taiwan

### **3. Guidance Standard**

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02
- FCC KDB 941225 D01 SAR test for 3G devices v02
- FCC KDB 941225 D02 HSPA and 1x Advanced v02r02
- FCC KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- FCC KDB 941225 D06 Hotspot Mode SAR v01r01

### **4. Equipment Under Test (EUT)**

#### **4.1 General Information**

Product Feature & Specification	
Equipment Name	LTE Mobile Router
Brand Name	D-Link
Model Name	DWR-930
FCC ID	KA2WR930A1
IMEI Code	358430050500229
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz
Mode	<ul style="list-style-type: none"> <li>• GPRS/EGPRS</li> <li>• RMC 12.2Kbps</li> <li>• HSDPA</li> <li>• HSUPA</li> <li>• DC-HSDPA</li> <li>• LTE: QPSK, 16QAM</li> <li>• 802.11b/g/n HT20</li> </ul>
HW Version	A1
SW Version	01.00.07_0110
<b>Remark:</b> <ol style="list-style-type: none"> <li>802.11n-HT40 is not supported in 2.4GHz WLAN and supports GRPS/EGPRS mode up to multi-slot class12.</li> <li>The EUT supports remotely accessing files stored on the microSD card that plugged into the EUT through hotspot mode. It cannot be achieved under WLAN standalone operation.</li> </ol>	

## 4.2 Maximum Tune-up Limit

Mode	Burst average power(dBm)	
	GSM 850	GSM 1900
GPRS (GMSK, 1 Tx slot)	33.00	30.00
GPRS (GMSK, 2 Tx slots)	31.00	30.00
GPRS (GMSK, 3 Tx slots)	29.00	30.00
GPRS (GMSK, 4 Tx slots)	28.00	29.00
EDGE (8PSK, 1 Tx slot)	27.00	27.00
EDGE (8PSK, 2 Tx slots)	27.00	27.00
EDGE (8PSK, 3 Tx slots)	27.00	27.00
EDGE (8PSK, 4 Tx slots)	27.00	27.00

Mode	Average power(dBm)	
	WCDMA Band V	WCDMA Band II
RMC 12.2K	23.00	23.00
HSDPA Subtest-1	22.00	22.00
DC-HSDPA Subtest-1	22.00	22.00
HSUPA Subtest-5	22.00	22.00

LTE Band 5				
Modulation	BW (MHz)	RB size	Target MPR	Average Power (dBm)
QPSK	10	$\leq 12$	0	24.00
QPSK	10	$> 12$	1	23.00
16QAM	10	$\leq 12$	1	23.00
16QAM	10	$> 12$	2	22.00
QPSK	5	$\leq 8$	0	24.00
QPSK	5	$> 8$	1	23.00
16QAM	5	$\leq 8$	1	23.00
16QAM	5	$> 8$	2	22.00
QPSK	3	$\leq 4$	0	24.00
QPSK	3	$> 4$	1	23.00
16QAM	3	$\leq 4$	1	23.00
16QAM	3	$> 4$	2	22.00
QPSK	1.4	$\leq 5$	0	24.00
QPSK	1.4	$> 5$	1	23.00
16QAM	1.4	$\leq 5$	1	23.00
16QAM	1.4	$> 5$	2	22.00

LTE Band 7				
Modulation	BW (MHz)	RB size	Target MPR	Average Power (dBm)
QPSK	20	$\leq 18$	0	24.00
QPSK	20	$> 18$	1	23.00
16QAM	20	$\leq 18$	1	23.00
16QAM	20	$> 18$	2	22.00
QPSK	15	$\leq 16$	0	24.00
QPSK	15	$> 16$	1	23.00
16QAM	15	$\leq 16$	1	23.00
16QAM	15	$> 16$	2	22.00
QPSK	10	$\leq 12$	0	24.00
QPSK	10	$> 12$	1	23.00
16QAM	10	$\leq 12$	1	23.00
16QAM	10	$> 12$	2	22.00
QPSK	5	$\leq 8$	0	24.00
QPSK	5	$> 8$	1	23.00
16QAM	5	$\leq 8$	1	23.00
16QAM	5	$> 8$	2	22.00

Band / Frequency (MHz)		IEEE 802.11 Average Power (dBm)		
		11b	11g	HT20
2.4GHz Band	2412	12.00	12.00	12.00
	2437	12.00	12.00	12.00
	2462	12.00	12.00	12.00

### 4.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r03										
FCC ID			KA2WR930A1							
Equipment Name			LTE Mobile Router							
Operating Frequency Range of each LTE transmission band			LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz							
Channel Bandwidth			LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz							
uplink modulations used			QPSK, and 16QAM							
LTE transmitter and antenna implementation (standalone or sharing hardware components / antennas )			A primary antenna is used for LTE and other wireless interfaces (GSM/ WCDMA) for transmitting and receiving. LTE and other wireless interfaces (GSM/ WCDMA) share the same antenna, and cannot transmit simultaneously							
LTE Voice / Data requirements			Data only							
LTE MPR permanently built-in by design			Yes, per 3GPP TS 36.101							
			Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3							
			Modulation		Channel bandwidth / Transmission bandwidth (RB)					MPR (dB)
					1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	
			QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
			16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
			16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
LTE A-MPR			In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration			A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Power reduction applied to satisfy SAR compliance			No.							
Transmission (H, M, L) channel numbers and frequencies in each LTE band										
LTE Band 5										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20407	824.7	20415	825.5	20425	826.5	20450	829		
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5		
H	20643	848.3	20635	847.5	20625	846.5	20600	844		
LTE Band 7										
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510		
M	21100	2535	21100	2535	21100	2535	21100	2535		
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560		

## **5. RF Exposure Limits**

### **5.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### **5.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## 6. Specific Absorption Rate (SAR)

### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

**The DASY system used for performing compliance tests consists of the following items:**

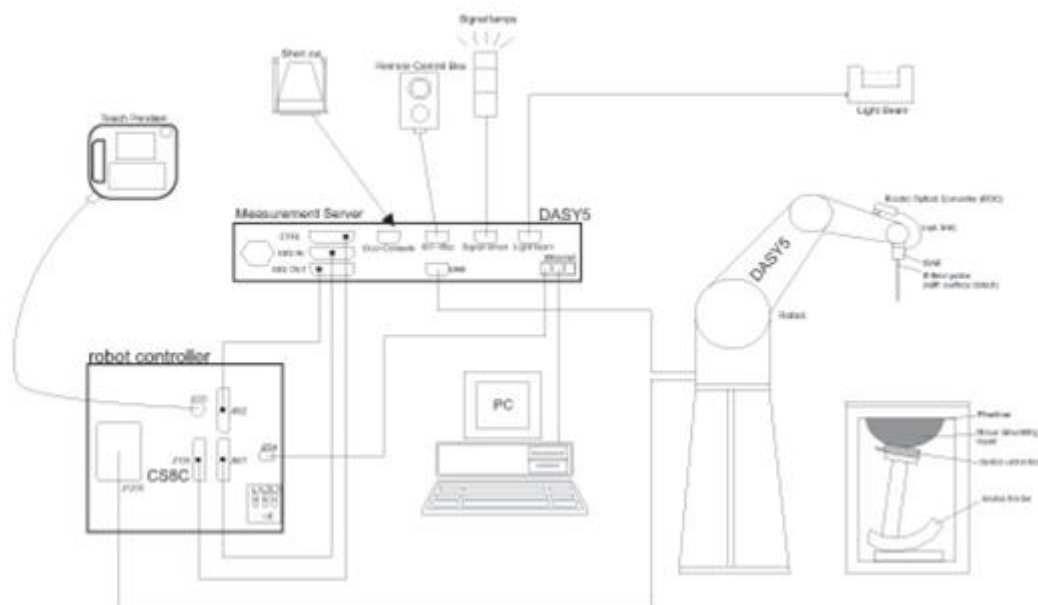

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## **8. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

## **8.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

## 8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## 8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz v01r01.

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

## 8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz v01r01.

			$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	$3 - 4$ GHz: $\leq 3$ mm $4 - 5$ GHz: $\leq 2.5$ mm $5 - 6$ GHz: $\leq 2$ mm
		$\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

## 8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## 8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

## 9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d162	Nov. 11, 2013	Nov. 10, 2014
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Nov. 12, 2013	Nov. 11, 2014
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 13, 2013	Nov. 12, 2014
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Nov. 13, 2013	Nov. 12, 2014
SPEAG	Data Acquisition Electronics	DAE4	1338	Nov. 05, 2013	Nov. 04, 2014
SPEAG	Data Acquisition Electronics	DAE4	1279	Jan. 30, 2014	Jan. 29, 2015
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 07, 2013	Nov. 06, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3935	Nov. 04, 2013	Nov. 03, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	Nov. 04, 2013	Nov. 03, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 12, 2013	Nov. 11, 2014
Wisewind	Thermometer	ETP-101	TM560	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	ETP-101	TM685	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	HTC-1	TM642	Oct. 22, 2013	Oct. 21, 2014
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Feb. 11, 2014	Feb. 10, 2015
Anritsu	Radio Communication Analyzer	MT8820C	6201341950	Dec. 25, 2013	Dec. 24, 2014
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Jan. 10, 2014	Jan. 09, 2016
SPEAG	Device Holder	N/A	N/A	NCR	NCR
Agilent	Signal Generator	E4438C	MY49070755	Oct. 08, 2013	Oct. 07, 2014
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 23, 2013	Jul. 22, 2014
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2014	Feb. 06, 2015
Anritsu	Power Meter	ML2495A	1349001	Dec. 04, 2013	Dec. 03, 2014
Anritsu	Power Sensor	MA2411B	1306099	Dec. 03, 2013	Dec. 02, 2014
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 09, 2013	Jul. 08, 2014
Agilent	Dual Directional Coupler	778D	50422	<sup>(2)</sup> CBT	
Woken	Attenuator	WK0602-XX	N/A	<sup>(2)</sup> CBT	
PE	Attenuator	PE7005-10	N/A	<sup>(2)</sup> CBT	
PE	Attenuator	PE7005- 3	N/A	<sup>(2)</sup> CBT	
AR	Power Amplifier	5S1G4M2	0328767	<sup>(2)</sup> CBT	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	<sup>(2)</sup> CBT	
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	<sup>(2)</sup> CBT	

**General Note:**

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing an amplifier, coupler and attenuator were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurement.

## 10. System Verification

### 10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

#### <Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
835	Body	22.4	0.963	54.527	0.97	55.20	-0.72	-1.22	±5	2014/4/2
835	Body	22.5	0.994	54.715	0.97	55.20	2.47	-0.88	±5	2014/4/7
1900	Body	22.6	1.545	53.277	1.52	53.30	1.64	-0.04	±5	2014/4/11
1900	Body	22.5	1.563	51.122	1.52	53.30	2.83	-4.09	±5	2014/4/12
2450	Body	22.2	2.020	53.849	1.95	52.70	3.59	2.18	±5	2014/4/3
2600	Body	22.4	2.209	51.123	2.16	52.50	2.27	-2.62	±5	2014/4/12


**Table 8.2.1 Measuring Results for Simulating Liquid**

## 10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 8.3.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2014/4/2	835	Body	250	D835V2-4d162	3954	1279	2.45	9.28	9.80	5.60
2014/4/7	835	Body	250	D835V2-4d162	3954	1279	2.49	9.28	9.96	7.33
2014/4/11	1900	Body	250	D1900V2-5d182	3955	1399	9.45	40.80	37.80	-7.35
2014/4/12	1900	Body	250	D1900V2-5d182	3935	1338	9.92	40.80	39.68	-2.75
2014/4/3	2450	Body	250	D2450V2-924	3935	1338	13.20	50.20	52.80	5.18
2014/4/12	2600	Body	250	D2600V2-1070	3935	1338	14.80	55.70	59.20	6.28

**Table 8.3.1 Target and Measurement SAR after Normalized**

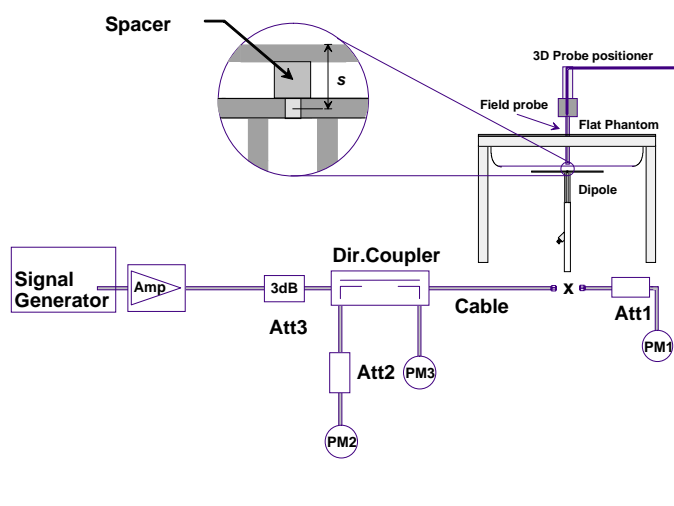

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 11. RF Exposure Positions

### 11.1 Wireless Router

Some battery-operated devices have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB 941225 D06v01r01 where SAR test considerations for devices ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the device meets the given size constraints, the aforementioned procedure was followed for SAR testing.

This device operates using simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB 447498 D01v05r02 procedures.

## 12. Conducted RF Output Power (Unit: dBm)

### <GSM Conducted Power>

#### General Note:

1. Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. For Body SAR testing was following KDB 941225 D03v01, the GPRS 4Tx slots modes was selected to be tested, according to the highest source-based time-averaged output power.

Band GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GPRS (GMSK, 1 Tx slot)	32.75	32.90	32.98	33.00	23.75	23.90	23.98	24.00
GPRS (GMSK, 2 Tx slots)	29.55	29.86	29.95	31.00	23.55	23.86	23.95	25.00
GPRS (GMSK, 3 Tx slots)	27.90	28.24	28.54	29.00	23.64	23.98	24.28	24.74
GPRS (GMSK, 4 Tx slots)	26.68	26.99	27.33	28.00	23.68	23.99	24.33	25.00
EDGE (8PSK, 1 Tx slot)	26.35	26.53	26.64	27.00	17.35	17.53	17.64	18.00
EDGE (8PSK, 2 Tx slots)	26.31	26.50	26.60	27.00	20.31	20.50	20.60	21.00
EDGE (8PSK, 3 Tx slots)	26.29	26.44	26.50	27.00	22.03	22.18	22.24	22.74
EDGE (8PSK, 4 Tx slots)	26.23	26.30	26.44	27.00	23.23	23.30	23.44	24.00

Band GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GPRS (GMSK, 1 Tx slot)	28.79	28.91	28.86	30.00	19.79	19.91	19.86	21.00
GPRS (GMSK, 2 Tx slots)	28.51	28.46	28.52	30.00	22.51	22.46	22.52	24.00
GPRS (GMSK, 3 Tx slots)	28.47	28.33	28.40	30.00	24.21	24.07	24.14	25.74
GPRS (GMSK, 4 Tx slots)	27.33	27.46	27.28	29.00	24.33	24.46	24.28	26.00
EDGE (8PSK, 1 Tx slot)	26.11	26.09	25.93	27.00	17.11	17.09	16.93	18.00
EDGE (8PSK, 2 Tx slots)	26.09	26.06	25.91	27.00	20.09	20.06	19.91	21.00
EDGE (8PSK, 3 Tx slots)	26.05	26.04	25.88	27.00	21.79	21.78	21.62	22.74
EDGE (8PSK, 4 Tx slots)	26.03	26.01	25.82	27.00	23.03	23.01	22.82	24.00

**<WCDMA Conducted Power>**

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
<p>Note 1: <math>\Delta_{ACK}</math>, <math>\Delta_{NACK}</math> and <math>\Delta_{CQI} = 30/15</math> with <math>\beta_{hs} = 30/15 * \beta_c</math>.</p> <p>Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, <math>\Delta_{ACK}</math> and <math>\Delta_{NACK} = 30/15</math> with <math>\beta_{hs} = 30/15 * \beta_c</math>, and <math>\Delta_{CQI} = 24/15</math> with <math>\beta_{hs} = 24/15 * \beta_c</math>.</p> <p>Note 3: CM = 1 for <math>\beta_c/\beta_d = 12/15</math>, <math>\beta_{hs}/\beta_c = 24/15</math>. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.</p> <p>Note 4: For subtest 2 the <math>\beta_c/\beta_d</math> ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to <math>\beta_c = 11/15</math> and <math>\beta_d = 15/15</math>.</p>							

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCI
  - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (Note 5) (Note 6)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}$ : 47/15 $\beta_{ed2}$ : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly, it is set by Absolute Grant Value.

**Setup Configuration**


**DC-HSDPA 3GPP release 8 Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**
**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

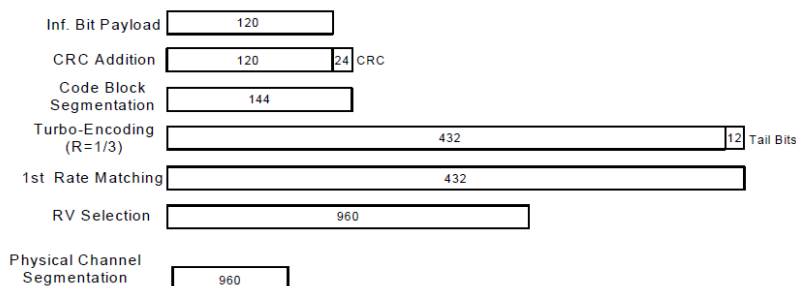
**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**
**Setup Configuration**

**<WCDMA Conducted Power>**
**General Note:**

1. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is  $\leq 1.2\text{W/kg}$ , HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded..

Band			WCDMA V			WCDMA II		
TX Channel			4132	4182	4233	9262	9400	9538
Frequency (MHz)			826.4	836.4	846.6	1852.4	1880	1907.6
MPR(dB)	3GPP Rel 99	RMC 12.2Kbps	22.81	22.44	22.90	22.71	22.88	22.77
0	3GPP Rel 6	HSDPA Subtest-1	21.43	21.07	21.51	21.48	21.64	21.55
0	3GPP Rel 6	HSDPA Subtest-2	21.47	21.04	21.52	21.43	21.51	21.46
0.5	3GPP Rel 6	HSDPA Subtest-3	20.89	20.49	20.96	20.91	20.97	21.01
0.5	3GPP Rel 6	HSDPA Subtest-4	20.90	20.47	20.98	20.92	20.94	20.94
0	3GPP Rel 8	DC-HSDPA Subtest-1	21.39	21.04	21.57	21.46	21.63	21.53
0	3GPP Rel 8	DC-HSDPA Subtest-2	21.40	21.05	21.48	21.41	21.50	21.44
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	21.43	21.01	21.49	20.89	20.95	20.99
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	20.86	20.46	20.94	20.89	20.92	20.92
0	3GPP Rel 6	HSUPA Subtest-1	20.87	20.44	20.95	20.81	21.05	20.86
2	3GPP Rel 6	HSUPA Subtest-2	19.79	19.88	20.03	20.45	20.50	20.47
1	3GPP Rel 6	HSUPA Subtest-3	19.31	19.39	19.55	20.10	20.15	20.09
2	3GPP Rel 6	HSUPA Subtest-4	19.75	19.87	20.05	20.68	20.71	20.65
0	3GPP Rel 6	HSUPA Subtest-5	21.38	21.05	21.40	21.40	21.52	21.50

**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.



**<LTE Band 5>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.56	22.98	23.18	24	0
10	QPSK	1	24	23.55	22.89	23.36		
10	QPSK	1	49	23.55	23.25	23.24		
10	QPSK	25	0	22.36	21.72	21.96	23	1
10	QPSK	25	12	22.46	21.91	21.99		
10	QPSK	25	24	22.27	21.79	21.95		
10	QPSK	50	0	22.24	21.71	21.83	23	1
10	16QAM	1	0	22.47	22.29	22.34		
10	16QAM	1	24	22.66	22.31	22.44		
10	16QAM	1	49	22.13	22.41	22.26	22	2
10	16QAM	25	0	21.12	20.66	20.77		
10	16QAM	25	12	21.15	20.78	21.18		
10	16QAM	25	24	20.91	20.70	20.90	22	2
10	16QAM	50	0	20.91	20.68	20.75		
Channel				20425	20525	20625	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.25	22.95	23.29	24	0
5	QPSK	1	12	23.49	23.14	23.20		
5	QPSK	1	24	23.54	23.06	23.13		
5	QPSK	12	0	22.36	21.99	22.16	23	1
5	QPSK	12	6	22.44	21.98	22.18		
5	QPSK	12	11	22.41	21.93	22.09		
5	QPSK	25	0	22.19	21.81	21.95	23	1
5	16QAM	1	0	22.03	21.80	21.96		
5	16QAM	1	12	22.42	21.94	21.92		
5	16QAM	1	24	22.15	21.77	21.73	22	2
5	16QAM	12	0	20.95	20.86	21.02		
5	16QAM	12	6	21.05	20.77	21.23		
5	16QAM	12	11	21.35	20.92	21.12	22	2
5	16QAM	25	0	21.25	20.81	20.95		
Channel				20415	20525	20635	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.18	22.95	23.30	24	0
3	QPSK	1	7	23.30	22.80	23.12		
3	QPSK	1	14	23.49	23.01	23.18		
3	QPSK	8	0	22.14	21.68	22.15	23	1
3	QPSK	8	4	22.22	21.91	21.94		
3	QPSK	8	7	22.22	21.81	22.00		
3	QPSK	15	0	22.16	21.78	21.94	23	1
3	16QAM	1	0	22.34	21.89	22.02		
3	16QAM	1	7	22.50	22.03	22.09		
3	16QAM	1	14	22.19	21.75	21.87	22	2
3	16QAM	8	0	21.48	21.06	21.17		
3	16QAM	8	4	21.58	21.13	21.11		
3	16QAM	8	7	20.88	20.60	21.02	22	2
3	16QAM	15	0	21.42	20.95	21.08		



# FCC SAR Test Report

Report No. : FA431455

Channel				20407	20525	20643	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.07	22.67	23.04	24	0
1.4	QPSK	1	2	23.09	22.70	23.02		
1.4	QPSK	1	5	23.22	22.82	23.03		
1.4	QPSK	3	0	23.11	22.75	23.00		
1.4	QPSK	3	1	23.12	22.74	23.10		
1.4	QPSK	3	2	23.14	22.71	23.07		
1.4	QPSK	6	0	22.07	21.76	22.08	23	1
1.4	16QAM	1	0	21.67	21.45	21.67	23	1
1.4	16QAM	1	2	21.68	21.42	21.72		
1.4	16QAM	1	5	21.85	21.53	21.75		
1.4	16QAM	3	0	22.18	21.86	22.08		
1.4	16QAM	3	1	22.11	21.86	21.97		
1.4	16QAM	3	2	22.23	21.84	21.95		
1.4	16QAM	6	0	21.13	20.80	21.03	22	2

**<LTE Band 7>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.22	22.45	22.33		
20	QPSK	1	49	22.21	22.46	22.62	24	0
20	QPSK	1	99	22.74	22.77	22.87		
20	QPSK	50	0	21.04	21.28	21.33		
20	QPSK	50	24	21.09	21.30	21.32	23	1
20	QPSK	50	49	21.10	21.31	21.46		
20	QPSK	100	0	21.05	21.30	21.39		
20	16QAM	1	0	21.25	21.55	21.41	23	1
20	16QAM	1	49	21.21	21.59	21.65		
20	16QAM	1	99	21.58	21.60	21.92		
20	16QAM	50	0	20.06	20.38	20.28	22	2
20	16QAM	50	24	20.05	20.34	20.31		
20	16QAM	50	49	20.05	20.33	20.44		
20	16QAM	100	0	20.05	20.38	20.36		
Channel				20825	21100	21375	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.41	22.55	22.64		
15	QPSK	1	37	22.29	22.51	22.58	24	0
15	QPSK	1	74	22.46	22.50	22.80		
15	QPSK	36	0	21.14	21.41	21.37		
15	QPSK	36	18	21.16	21.38	21.43	23	1
15	QPSK	36	37	21.19	21.33	21.65		
15	QPSK	75	0	21.07	21.33	21.50		
15	16QAM	1	0	21.39	21.52	21.56	23	1
15	16QAM	1	37	21.28	21.53	21.65		
15	16QAM	1	74	21.40	21.49	21.85		
15	16QAM	36	0	20.14	20.41	20.41	22	2
15	16QAM	36	18	20.22	20.40	20.36		
15	16QAM	36	37	20.22	20.39	20.63		
15	16QAM	75	0	20.09	20.38	20.48		
Channel				20800	21100	21400	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.33	22.55	22.56		
10	QPSK	1	24	22.32	22.50	22.73	24	0
10	QPSK	1	49	22.34	22.49	22.82		
10	QPSK	25	0	21.08	21.35	21.44		
10	QPSK	25	12	21.18	21.38	21.63	23	1
10	QPSK	25	24	21.23	21.39	21.70		
10	QPSK	50	0	21.09	21.32	21.43		
10	16QAM	1	0	21.37	21.57	21.54	23	1
10	16QAM	1	24	21.35	21.60	21.67		
10	16QAM	1	49	21.32	21.51	21.65		
10	16QAM	25	0	20.14	20.38	20.44	22	2
10	16QAM	25	12	20.21	20.44	20.62		
10	16QAM	25	24	20.23	20.38	20.63		
10	16QAM	50	0	20.12	20.35	20.42		



# FCC SAR Test Report

Report No. : FA431455

Channel				20775	21100	21425	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.34	22.48	22.76	24	0
5	QPSK	1	12	22.33	22.51	22.79		
5	QPSK	1	24	22.29	22.42	22.72		
5	QPSK	12	0	21.28	21.60	21.76	23	1
5	QPSK	12	6	21.28	21.52	21.72		
5	QPSK	12	11	21.20	21.51	21.68		
5	QPSK	25	0	21.15	21.48	21.57		
5	16QAM	1	0	21.36	21.45	21.80	23	1
5	16QAM	1	12	21.32	21.56	21.74		
5	16QAM	1	24	21.31	21.48	21.72		
5	16QAM	12	0	20.35	20.57	20.79	22	2
5	16QAM	12	6	20.38	20.58	20.84		
5	16QAM	12	11	20.31	20.59	20.79		
5	16QAM	25	0	20.10	20.43	20.58		

**<WLAN Conducted Power>**
**General Note:**

- For 2.4GHz WLAN SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were selected for SAR evaluation. 802.11g/n HT20 were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11b mode.


**<2.4GHz WLAN>**

WLAN 2.4GHz 802.11b Average Power (dBm)					
Power vs. Channel			Power vs. Data Rate		
Channel	Frequency (MHz)	Data Rate	2Mbps	5.5Mbps	11Mbps
		1Mbps			
CH 1	2412	11.87	11.84	11.92	11.90
CH 6	2437	11.95			
CH 11	2462	11.62			

WLAN 2.4GHz 802.11g Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 1	2412	10.83	11.20	11.22	11.22	10.80	10.86	10.90	10.90
CH 6	2437	11.31							
CH 11	2462	10.96							

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 1	2412	11.65	11.96	11.93	11.95	11.94	11.97	11.87	11.94
CH 6	2437	11.99							
CH 11	2462	10.49							

### 13. Antenna Location

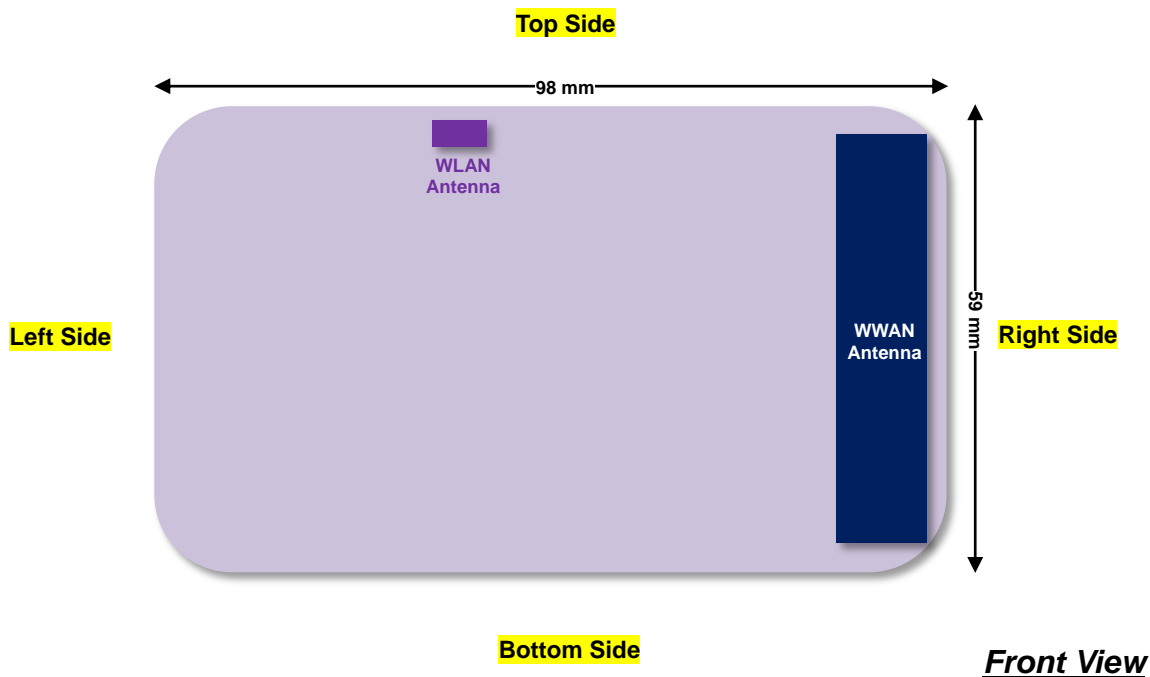

Distance of the Antenna to the EUT surface/edge						
Antennas	Front	Back	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	87 mm
WLAN	≤ 25mm	≤ 25mm	≤ 25mm	54 mm	58.mm	32 mm
Positions for SAR tests; wireless router mode						
Antennas	Front	Back	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	Yes	Yes	Yes	No
WLAN	Yes	Yes	Yes	No	No	No

**General Note:**

- Referring to KDB 941225 D06 v01r01, when the overall device length and width are  $\geq 9\text{cm} \times 5\text{cm}$ , the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

## 14. SAR Test Results

### General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For WWAN/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is  $< 0.25$ dB higher than RMC, or reported SAR with RMC 12.2kbps setting is  $\leq 1.2$ W/kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded..
4. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
5. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
6. For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
7. 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
8. Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.
9. When the WLAN transmission was verified using a spectrum analyzer.

## 14.1 Body SAR

### <GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS (4 Tx slots)	Front	1cm	251	848.8	27.33	28.00	1.167	-0.03	1.040	<b>1.213</b>
	GSM850	GPRS (4 Tx slots)	Front	1cm	128	824.2	26.68	28.00	1.355	0.01	0.641	0.869
	GSM850	GPRS (4 Tx slots)	Front	1cm	189	836.4	26.99	28.00	1.262	0.03	0.807	1.018
	GSM850	GPRS (4 Tx slots)	Back	1cm	251	848.8	27.33	28.00	1.167	-0.01	0.826	0.964
	GSM850	GPRS (4 Tx slots)	Back	1cm	128	824.2	26.68	28.00	1.355	-0.03	0.527	0.714
	GSM850	GPRS (4 Tx slots)	Back	1cm	189	836.4	26.99	28.00	1.262	-0.01	0.660	0.833
	GSM850	GPRS (4 Tx slots)	Right Side	1cm	251	848.8	27.33	28.00	1.167	-0.02	0.292	0.341
	GSM850	GPRS (4 Tx slots)	Top Side	1cm	251	848.8	27.33	28.00	1.167	0	0.376	0.439
	GSM850	GPRS (4 Tx slots)	Bottom Side	1cm	251	848.8	27.33	28.00	1.167	0.04	0.368	0.429
	GSM1900	GPRS (4 Tx slots)	Front	1cm	661	1880	27.46	29.00	1.426	0.15	0.742	1.058
02	GSM1900	GPRS (4 Tx slots)	Front	1cm	512	1850.2	27.33	29.00	1.469	-0.01	0.677	0.994
	GSM1900	GPRS (4 Tx slots)	Front	1cm	810	1909.8	27.28	29.00	1.486	-0.1	0.703	1.045
	GSM1900	GPRS (4 Tx slots)	Back	1cm	661	1880	27.46	29.00	1.426	-0.01	0.904	<b>1.289</b>
	GSM1900	GPRS (4 Tx slots)	Back	1cm	512	1850.2	27.33	29.00	1.469	0.04	0.839	1.232
	GSM1900	GPRS (4 Tx slots)	Back	1cm	810	1909.8	27.28	29.00	1.486	-0.04	0.849	1.262
	GSM1900	GPRS (4 Tx slots)	Right Side	1cm	661	1880	27.46	29.00	1.426	0.08	0.340	0.485
	GSM1900	GPRS (4 Tx slots)	Top Side	1cm	661	1880	27.46	29.00	1.426	0.03	0.209	0.298
	GSM1900	GPRS (4 Tx slots)	Bottom Side	1cm	661	1880	27.46	29.00	1.426	-0.01	0.316	0.450

### <WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA V	RMC 12.2Kbps	Front	1cm	4233	846.6	22.90	23.00	1.023	0.01	0.366	<b>0.375</b>
	WCDMA V	RMC 12.2Kbps	Back	1cm	4233	846.6	22.90	23.00	1.023	-0.14	0.309	0.316
	WCDMA V	RMC 12.2Kbps	Right Side	1cm	4233	846.6	22.90	23.00	1.023	0.04	0.140	0.143
	WCDMA V	RMC 12.2Kbps	Top Side	1cm	4233	846.6	22.90	23.00	1.023	-0.01	0.229	0.234
	WCDMA V	RMC 12.2Kbps	Bottom Side	1cm	4233	846.6	22.90	23.00	1.023	-0.01	0.219	0.224
04	WCDMA II	RMC 12.2Kbps	Front	1cm	9400	1880	22.88	23.00	1.028	0	0.663	0.682
	WCDMA II	RMC 12.2Kbps	Back	1cm	9400	1880	22.88	23.00	1.028	-0.13	0.767	<b>0.788</b>
	WCDMA II	RMC 12.2Kbps	Right Side	1cm	9400	1880	22.88	23.00	1.028	-0.02	0.257	0.264
	WCDMA II	RMC 12.2Kbps	Top Side	1cm	9400	1880	22.88	23.00	1.028	-0.02	0.176	0.181
	WCDMA II	RMC 12.2Kbps	Bottom Side	1cm	9400	1880	22.88	23.00	1.028	-0.05	0.268	0.276

**<LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
05	LTE Band 5	10M	QPSK	1	0	Front	1cm	20450	829	23.56	24.00	1.107	-0.07	0.502	<b>0.556</b>
	LTE Band 5	10M	QPSK	25	12	Front	1cm	20450	829	22.46	23.00	1.132	-0.04	0.297	0.336
	LTE Band 5	10M	QPSK	1	0	Back	1cm	20450	829	23.56	24.00	1.107	-0.11	0.389	0.430
	LTE Band 5	10M	QPSK	25	12	Back	1cm	20450	829	22.46	23.00	1.132	-0.01	0.230	0.260
	LTE Band 5	10M	QPSK	1	0	Right Side	1cm	20450	829	23.56	24.00	1.107	0.1	0.166	0.184
	LTE Band 5	10M	QPSK	25	12	Right Side	1cm	20450	829	22.46	23.00	1.132	0.02	0.110	0.125
	LTE Band 5	10M	QPSK	1	0	Top Side	1cm	20450	829	23.56	24.00	1.107	-0.01	0.291	0.322
	LTE Band 5	10M	QPSK	25	12	Top Side	1cm	20450	829	22.46	23.00	1.132	0	0.185	0.209
	LTE Band 5	10M	QPSK	1	0	Bottom Side	1cm	20450	829	23.56	24.00	1.107	0.04	0.272	0.301
	LTE Band 5	10M	QPSK	25	12	Bottom Side	1cm	20450	829	22.46	23.00	1.132	-0.07	0.163	0.185
	LTE Band 7	20M	QPSK	1	99	Front	1cm	21350	2560	22.87	24.00	1.297	-0.02	0.420	0.545
	LTE Band 7	20M	QPSK	50	49	Front	1cm	21350	2560	21.46	23.00	1.426	-0.04	0.309	0.441
	LTE Band 7	20M	QPSK	1	99	Back	1cm	21350	2560	22.87	24.00	1.297	-0.01	0.504	0.654
	LTE Band 7	20M	QPSK	50	49	Back	1cm	21350	2560	21.46	23.00	1.426	0.08	0.496	0.707
06	LTE Band 7	20M	QPSK	1	99	Right Side	1cm	21350	2560	22.87	24.00	1.297	0.05	0.763	<b>0.990</b>
	LTE Band 7	20M	QPSK	1	99	Right Side	1cm	20850	2510	22.74	24.00	1.337	-0.04	0.722	0.965
	LTE Band 7	20M	QPSK	1	99	Right Side	1cm	21100	2535	22.77	24.00	1.327	-0.05	0.692	0.919
	LTE Band 7	20M	QPSK	50	49	Right Side	1cm	21350	2560	21.46	23.00	1.426	0.07	0.518	0.738
	LTE Band 7	20M	QPSK	100	0	Right Side	1cm	21350	2560	21.39	23.00	1.449	-0.09	0.516	0.748
	LTE Band 7	20M	QPSK	1	99	Top Side	1cm	21350	2560	22.87	24.00	1.297	-0.07	0.125	0.162
	LTE Band 7	20M	QPSK	50	49	Top Side	1cm	21350	2560	21.46	23.00	1.426	-0.06	0.095	0.135
	LTE Band 7	20M	QPSK	1	99	Bottom Side	1cm	21350	2560	22.87	24.00	1.297	0	0.291	0.377
	LTE Band 7	20M	QPSK	50	49	Bottom Side	1cm	21350	2560	21.46	23.00	1.426	0.03	0.204	0.291

**<DTS WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	1cm	6	2437	11.95	12.00	1.012	-0.15	0.070	0.071
	WLAN 2.4GHz	802.11b 1Mbps	Back	1cm	6	2437	11.95	12.00	1.012	-0.07	0.024	0.024
07	WLAN 2.4GHz	802.11b 1Mbps	Top Side	1cm	6	2437	11.95	12.00	1.012	-0.11	0.083	<b>0.084</b>

**14.2 Repeated SAR Measurement**

No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850	GPRS (4 Tx slots)	Front	1cm	251	848.8	27.33	28.00	1.167	-0.03	1.040	-	1.213
2nd	GSM850	GPRS (4 Tx slots)	Front	1cm	251	848.8	27.33	28.00	1.167	-0.16	0.966	1.08	1.127
1st	GSM1900	GPRS (4 Tx slots)	Back	1cm	661	1880	27.46	29.00	1.426	-0.01	0.904	-	1.289
2nd	GSM1900	GPRS (4 Tx slots)	Back	1cm	661	1880	27.46	29.00	1.426	0.06	0.883	1.02	1.259

**General Note:**

1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8\text{W/kg}$
2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45\text{W/kg}$ , only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

## 15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body	Note
		Supported	
1.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot
2.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot
3.	LTE(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot

**General Note:**

1. The Scaled SAR summation is calculated based on the same configuration and test position.
2. Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg

### 15.1 Body Exposure Conditions

Distance of the Antenna to the EUT surface/edge						
Antennas	Front	Back	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	87 mm
WLAN	≤ 25mm	≤ 25mm	≤ 25mm	54 mm	58.mm	32 mm
Positions for SAR tests; wireless router mode						
Antennas	Front	Back	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	Yes	Yes	Yes	No
WLAN	Yes	Yes	Yes	No	No	No
Simultaneous Transmission						
WWAN + WLAN	Yes	Yes	Yes	No	No	No

#### <WWAN + WLAN>

Band		Exposure Position	WWAN SAR (W/kg)	2.4GHz WLAN SAR (W/kg)	Summed SAR (W/kg)
GSM	GSM850	Front	1.213	0.071	<b>1.28</b>
		Back	0.964	0.024	<b>0.99</b>
		Top side	0.439	0.084	<b>0.52</b>
	GSM1900	Front	1.058	0.071	<b>1.13</b>
		Back	1.289	0.024	<b>1.31</b>
		Top side	0.298	0.084	<b>0.38</b>
WCMDA	Band V	Front	0.375	0.071	<b>0.45</b>
		Back	0.316	0.024	<b>0.34</b>
		Top side	0.234	0.084	<b>0.32</b>
	Band II	Front	0.682	0.071	<b>0.75</b>
		Back	0.788	0.024	<b>0.81</b>
		Top side	0.181	0.084	<b>0.27</b>
LTE	Band 5	Front	0.556	0.071	<b>0.63</b>
		Back	0.430	0.024	<b>0.45</b>
		Top side	0.322	0.084	<b>0.41</b>
	Band 7	Front	0.545	0.071	<b>0.62</b>
		Back	0.707	0.024	<b>0.73</b>
		Top side	0.162	0.084	<b>0.25</b>

**Test Engineer :** Domo Hsiao, Ken Lee, Nick Yu, Jerry Hu, Angelo Chang, and Aaron Chen

## 16. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	1/ $\kappa$ <sup>(b)</sup>	1/ $\sqrt{3}$	1/ $\sqrt{6}$	1/ $\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

**Table 16.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
<b>Measurement System</b>							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
<b>Test Sample Related</b>							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
<b>Phantom and Setup</b>							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
<b>Combined Standard Uncertainty</b>						± 11.0 %	± 10.8 %
<b>Coverage Factor for 95 %</b>						K=2	
<b>Expanded Uncertainty</b>						± 22.0 %	± 21.5 %

**Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz**

## **17. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [8] FCC KDB 941225 D02 v02r02, "SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced", May 2013.
- [9] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [10] FCC KDB 941225 D05 v02r03, "SAR Evaluation Considerations for LTE Devices", Dec 2013.
- [11] FCC KDB 941225 D06 v01r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", May 2013.
- [12] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [13] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.