

FCC Part 15 Subpart C Certification 908.42MHz Z-Wave Transceiver

Test Report

FCC ID: KJ8HAC010290842

FCC Rule Part: 15.249

ACS Report Number: 06-0050-15-249

Manufacturer: Wayne-Dalton Corp.
Trade name: Home Access Controller
Model: WDHA-12

Test Begin Date: February 6, 2006
Test End Date: February 27, 2006

Report Issue Date: March 29, 2006



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612

Prepared by: Ken Rivers
Ken Rivers
Engineering Technician
ACS, Inc.

Reviewed by: Kirby Munroe
Kirby Munroe
Manager Wireless Certifications
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 15 pages

Table of Contents

1.0 General	3
1.1 Purpose	3
1.2 Product Description	3
1.2.1 General	3
1.2.2 Intended Use	3
1.2.3 Technical Specifications	3
2.0 Test Facilities	4
2.1 Location	4
2.2 Laboratory Accreditations/Recognitions/Certifications	4
2.3 Radiated Emissions Test Site Description	4
2.3.1 Semi-Anechoic Chamber Test Site	4
2.3.2 Open Area Tests Site (OATS)	5
2.4 Conducted Emissions Test Site Description	6
3.0 Applicable Standards and References	7
4.0 List of Test Equipment	8
5.0 Support Equipment	9
6.0 EUT Setup Block Diagram	9
7.0 Summary of Tests	10
7.1 Section 15.203 - Antenna Requirement	10
7.2 Section 15.207 - Power Line Conducted Emissions	10
7.2.1 Test Methodology	10
7.2.2 Test Results	10
7.3 Section 15.109 - Radiated Emissions (Unintentional Radiation)	12
7.3.1 Test Methodology	12
7.3.2 Test Results	12
7.4 Section 15.231(c) – Occupied Bandwidth	13
7.4.1 Test Requirement	13
7.4.2 Test Methodology	13
7.4.3 Test Results	13
7.5 Section 15.249 – Band-Edge Compliance and Spurious Emissions	13
7.5.1 Test Methodology	13
7.5.2 Duty Cycle Correction	13
7.5.3 Test Results	14
7.5.4 Sample Calculation	15
8.0 CONCLUSION	15

Additional Exhibits Included In Filing

Internal Photographs
External Photographs
Test Setup Photographs
Product Labeling
Installation/Users Guide

Theory of Operation
BOM (Parts List)
System Block Diagram
Schematics

1.0 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15, Subpart C of the FCC's Code of Federal Regulations.

1.2 Product Description

1.2.1 General

Automotive-based transmitters exist to activate garage door openers and similar devices. This technology is not compatible (hardware or software) with Z-Wave protocol. The Home Access Controller will function as a "bridge" between the Wayne-Dalton® Z-Wave Home Network System and automobile-based transmitters.

The Home Access Controller exchanges signals with the Z-Wave Home Network System over a radio frequency link. It also exchanges signals with the automotive transmitters over a 372MHz radio frequency link (different parameters than Z-Wave).

The Home Access Controller is made up of eight subsystems. These subsystems are...

- Battery
- Power Supply System
- **Z-Wave ASIC (908.42MHz)**
- Microcontroller
- 372MHz Transmitter
- 372MHz Receiver
- Housing
- User Interface

The purpose of this report is to demonstrate compliance of the Z-Wave 908.42 transceiver only. Other components of this composite device, such as the 372MHz transmitter, are covered under separate test reports.

1.2.2 Intended Use

The intended use of this device is in home automation environments.

1.2.3 Technical Specifications (Z-Wave)

Parameter	Minimum	Typical	Maximum	Units
Regulatory			FCC Part 15.249	
Transmit:				
Output Power			94	dBuV/m
Center Frequency		908.42		MHz
Frequency Accuracy	TBD			kHz
Current Draw at 3.3V			37	mA
Receive:				
Receive Sensitivity		-100		dBm
Receive Bandwidth		150		kHz
Current Draw at 3.3V		21		mA
Temperature:				
Operating	-40		85	°C
Storage	-40		85	°C

2.0 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment. In addition, ACS is compliant to ISO 17025 as certified by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program. The following certification numbers have been issued in recognition of these accreditations and certifications:

FCC Registration Number: 89450

Industry Canada Lab Code: IC 4175

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

NVLAP Lab Code: 200612

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

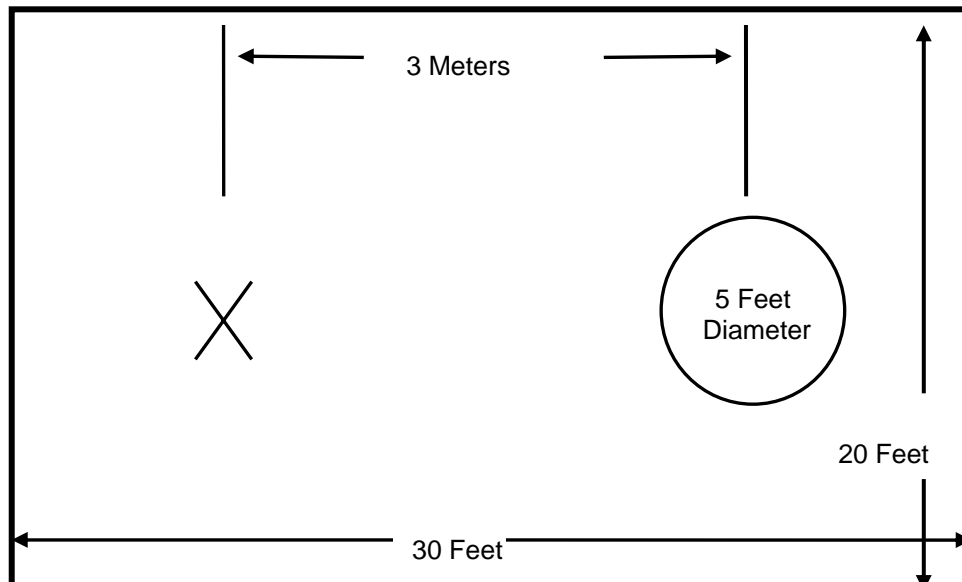


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style reinforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

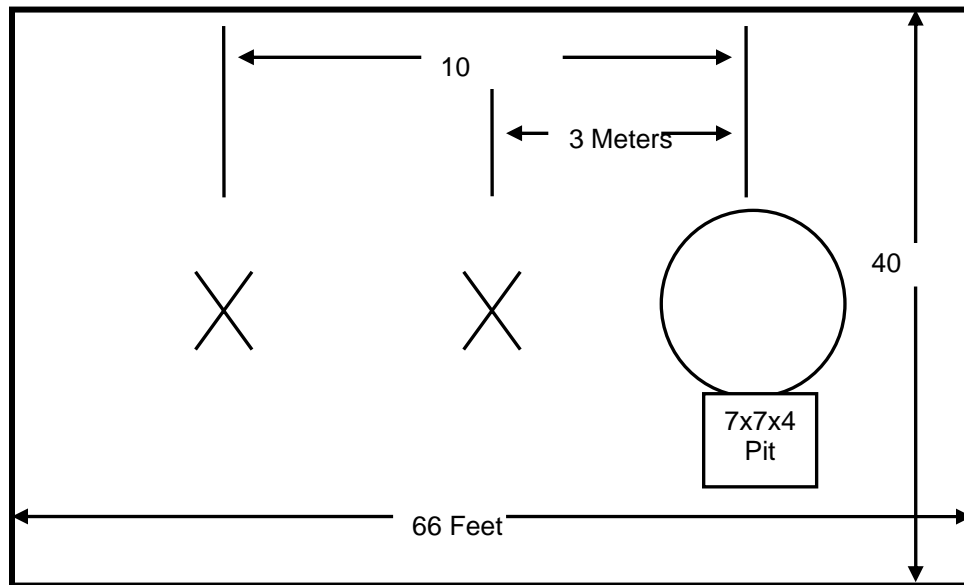


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is a shielded room with the following dimensions:

- Height: 3.0 Meters
- Width: 3.6 Meters
- Length: 4.9 Meters

The room is manufactured by Rayproof Corporation and installed by Panashield, Inc. Earth ground is provided to the room via an 8' copper ground rod. Each panel of the room is connected electrically at intervals of 4".

Power to the room is filtered to prevent ambient noise from coupling to the EUT and measurement equipment. Filters are models 1B42-60P manufactured by Rayproof Corporation.

The room is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 2.4-1:

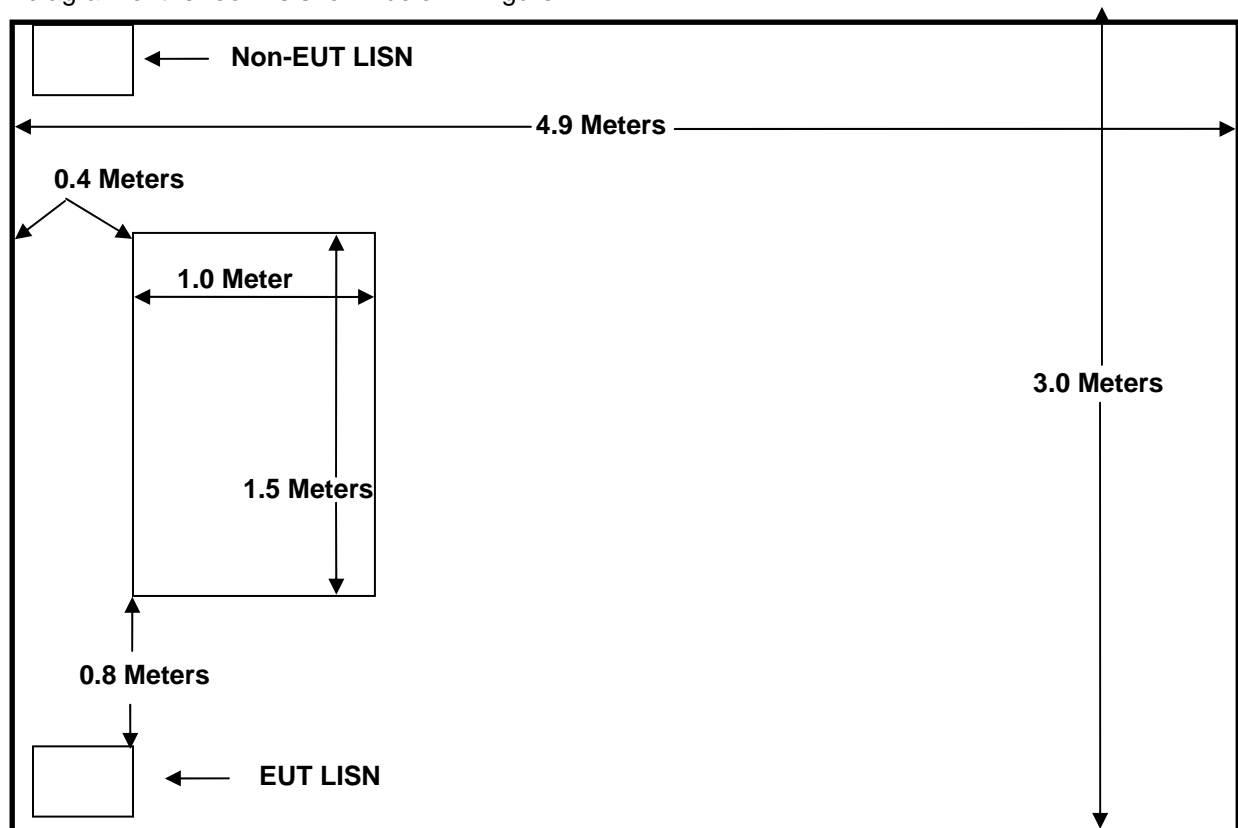


Figure 2.4-1: AC Mains Conducted EMI Site

3.0 APPLICABLE STANDARD REFERENCES

The following standards were used:

- 1 - ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the 9 KHz to 40GHz
- 2 - US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators

4.0 LIST OF TEST EQUIPMENT

All test equipment used for regulatory testing is calibrated yearly or according to manufacturer's specifications.

Table 4.0-1: Test Equipment

Equipment Calibration Information					
ACS#	Mfg.	Eq. type	Model	S/N	Cal. Due
<input checked="" type="checkbox"/> 25	Chase	Bi-Log Antenna	CBL6111	1043	5/23/06
<input checked="" type="checkbox"/> 041	ElectroMetrics	Bi-Con Antenna	BIA-25	2925	5/25/06
<input checked="" type="checkbox"/> 090	ElectroMetrics	LPA Antenna	LPA-25	1476	5/27/06
<input checked="" type="checkbox"/> 152	EMCO	LISN	3825/2	9111-1905	2/8/07
<input checked="" type="checkbox"/> 225	Andrew	OATS RF cable	Helix	225	1/07/07
<input checked="" type="checkbox"/> 165	ACS	Conducted EMI Cable Set	RG8	165	3/07/07
<input checked="" type="checkbox"/> 22	Agilent	Pre-Amplifier	8449B	3008A00526	5/06/06
<input checked="" type="checkbox"/> 73	Agilent	Pre-Amplifier	8447D	272A05624	5/18/06
<input checked="" type="checkbox"/> 30	Spectrum Technologies	Horn Antenna	DRH-0118	970102	5/09/06
<input checked="" type="checkbox"/> 105	Microwave Circuits	High Pass Filter	H1G810G1	2123-01 DC0225	9/13/06
<input checked="" type="checkbox"/> 1	Rohde & Schwarz	Receiver Display	804.8932.52	833771/007	3/01/07
<input checked="" type="checkbox"/> 2	Rohde & Schwarz	ESMI Receiver	1032.5640.53	839587/003	3/01/07
<input checked="" type="checkbox"/> 3	Rohde & Schwarz	Receiver Display	804.8932.52	839379/011	11/02/06
<input checked="" type="checkbox"/> 4	Rohde & Schwarz	ESMI Receiver	1032.5640.53	833827/003	11/02/06
<input checked="" type="checkbox"/> ---	Agilent	Spectrum Analyzer	E7405A	US39110103	6/6/06
<input checked="" type="checkbox"/> 168	Hewlett Packard	Pulse Limiter	11947A	3107A02268	3/7/07
<input checked="" type="checkbox"/> 6	Harbour Industries	HF RF Cable	LL-335	00006	3/10/07
<input checked="" type="checkbox"/> 7	Harbour Industries	HF RF Cable	LL-335	00007	3/13/07
<input checked="" type="checkbox"/> 208	Harbour Industries	HF RF Cable	LL142	00208	6/24/06
<input checked="" type="checkbox"/> 167	ACS	Chamber EMI Cable Set	RG6	167	1/7/07
<input checked="" type="checkbox"/> 204	ACS	Chamber EMI RF cable	RG8	204	3/16/06
<input checked="" type="checkbox"/> 16	ACS	Conducted Emission Cable	Cable	16	6/6/06

5.0 SUPPORT EQUIPMENT

Table 5-3: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number	FCC ID
The EUT was tested as a stand alone device and no support equipment was utilized.					

6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

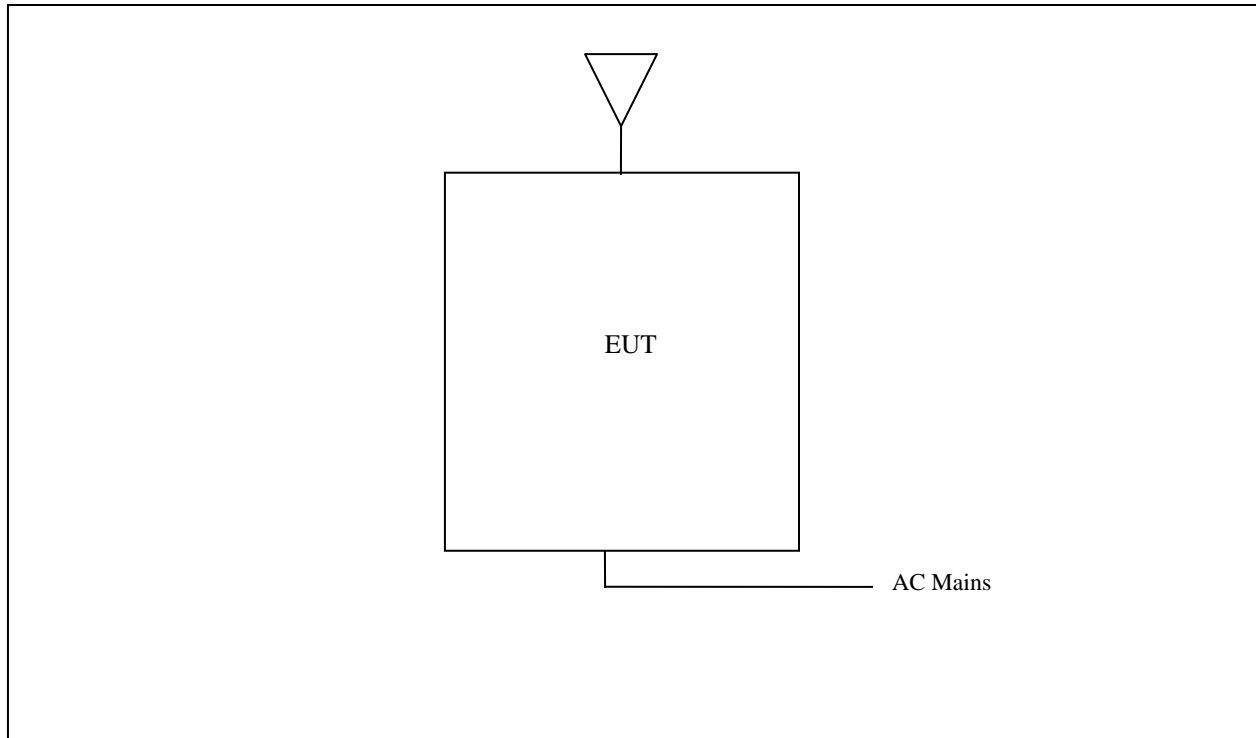


Figure 6.0-1: EUT Test Setup

7.0 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement - FCC Section 15.203

The EUT employs an integrated PCB antenna with gain of 3.0dBi typical.

7.2 Power Line Conducted Emissions - FCC Section 15.207

7.2.1 Test Methodology

Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss

Margin = Applicable Limit - Corrected Reading

Measurements were made using a peak detector for comparison to the average limits. Results of the test are shown below in and Tables 7.2.2-1 through 7.2.2-4 and Figure 7.2.2-1 through 7.2.2-2.

7.2.2 Test Results

Table 7.2.2-1: Line 1 Conducted EMI Results (Quasi Peak)

Frequency MHz	Level dBμV	Transducer dB	Limit dBμV	Margin dB	Line	PE
0.192	8.4	9.7	63.9	55.4	L1	FLO
0.360	2.9	9.7	58.7	55.8	L1	FLO
0.648	3.0	9.7	56.0	52.9	L1	FLO
1.320	3.0	9.7	56.0	52.9	L1	FLO
4.836	2.2	9.7	56.0	53.7	L1	FLO
16.776	1.8	9.3	60.0	58.1	L1	FLO
17.214	1.5	9.3	60.0	58.4	L1	FLO
17.256	1.8	9.3	60.0	58.1	L1	FLO
26.490	17.2	8.9	60.0	42.7	L1	FLO
27.216	17.0	8.9	60.0	42.9	L1	FLO

Table 7.2.2-2: Line 1 Conducted EMI Results (Average Peak)

Frequency MHz	Level dBμV	Transducer dB	Limit dBμV	Margin dB	Line	PE
0.192	11.4	9.7	53.9	42.4	L1	FLO
0.360	7.4	9.7	48.7	41.2	L1	FLO
0.642	7.9	9.7	46.0	38.0	L1	FLO
1.308	7.0	9.7	46.0	38.9	L1	FLO
4.836	7.0	9.7	46.0	38.9	L1	FLO
16.650	6.4	9.3	50.0	43.6	L1	FLO
17.274	6.3	9.3	50.0	43.6	L1	FLO
17.310	6.4	9.3	50.0	43.5	L1	FLO
26.490	18.5	8.9	50.0	31.4	L1	FLO
27.168	18.8	8.9	50.0	31.1	L1	FLO

Table 7.2.2-3: Line 2 Conducted EMI Results (Quasi Peak)

Frequency MHz	Level dB μ V	Transducer dB	Limit dB μ V	Margin dB	Line	PE
0.192	20.7	9.7	63.9	43.1	L2	FLO
0.642	13.7	9.7	56.0	42.2	L2	FLO
1.188	12.3	9.7	56.0	43.6	L2	FLO
1.458	12.0	9.7	56.0	43.9	L2	FLO
9.528	2.2	9.6	60.0	57.7	L2	FLO
10.002	6.0	9.5	60.0	53.9	L2	FLO
10.326	2.3	9.5	60.0	57.6	L2	FLO
11.316	2.2	9.5	60.0	57.7	L2	FLO
26.490	15.9	8.9	60.0	44.0	L2	FLO
27.798	15.2	8.8	60.0	44.7	L2	FLO

Table 7.2.2-4: Line 2 Conducted EMI Results (Average Peak)

Frequency MHz	Level dB μ V	Transducer dB	Limit dB μ V	Margin dB	Line	PE
0.192	23.2	9.7	53.9	30.6	L2	FLO
0.642	16.1	9.7	46.0	29.9	L2	FLO
1.188	14.6	9.7	46.0	31.3	L2	FLO
1.458	14.5	9.7	46.0	31.5	L2	FLO
9.510	6.8	9.6	50.0	43.1	L2	FLO
10.002	9.7	9.5	50.0	40.3	L2	FLO
10.230	6.8	9.5	50.0	43.1	L2	FLO
11.358	6.8	9.5	50.0	43.1	L2	FLO
26.490	16.8	8.9	50.0	33.1	L2	FLO
27.798	17.1	8.8	50.0	32.8	L2	FLO

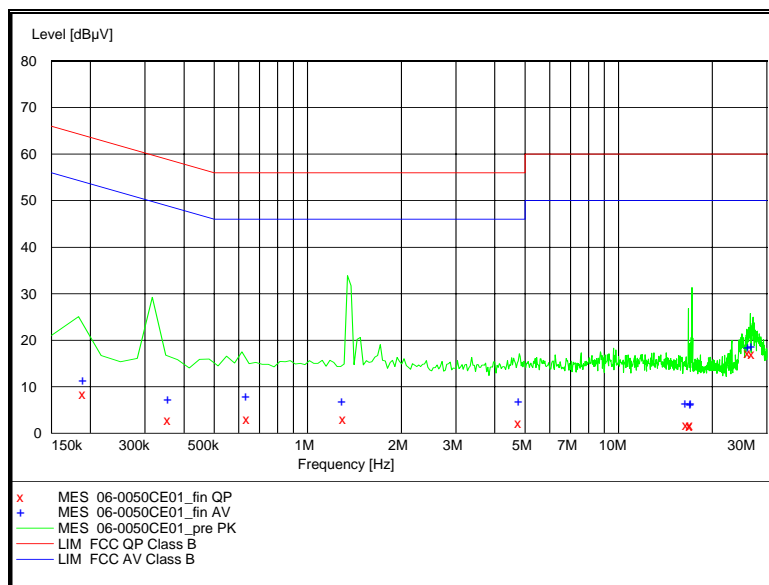


Figure 7.2.2-1: Conducted Emissions Graph – Line 1

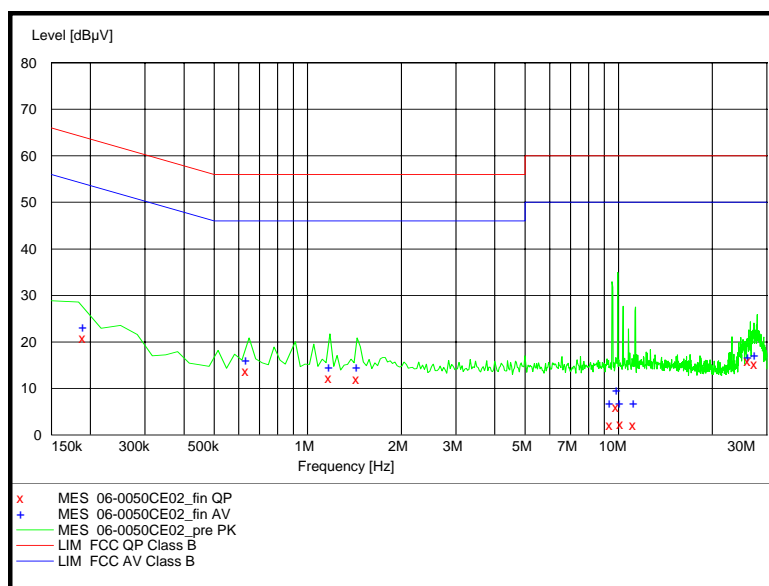


Figure 7.2.2-2: Conducted Emissions Graph – Line 2

7.3 Radiated Emissions - FCC Section 15.109(Unintentional Radiation)

7.3.1 Test Methodology

Radiated emissions tests were performed over the frequency range of 30MHz to 2 GHz. Measurements of the radiated field strength were made at a distance of 3m from the boundary of the equipment under test (EUT) and the receiving antenna. The antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. Radiated measurements were made with the Spectrum Analyzer's resolution bandwidth set to 120 KHz for measurements above 30MHz. Average measurements are taken with the RBW and VBW were set to 1MHz and 10 Hz respectively for measurements above 1000MHz.

7.3.2 Test Results

Results of the test are given below in Table 7.3.2-1:

Frequency MHz	Level dBμV/m	Transducer dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
464.720	34.5	-7.5	46.0	11.5	110	311	VERTICAL
479.440	29.5	-7.0	46.0	16.5	110	36	VERTICAL
494.240	32.7	-6.8	46.0	13.3	110	26	VERTICAL
508.960	36.7	-6.4	46.0	9.3	110	25	VERTICAL
523.760	37.9	-6.3	46.0	8.1	100	25	VERTICAL
538.480	38.4	-6.0	46.0	7.6	104	321	VERTICAL
553.200	36.8	-5.2	46.0	9.2	104	317	VERTICAL
568.000	37.6	-4.9	46.0	8.4	100	321	VERTICAL
582.720	34.3	-5.2	46.0	11.7	100	317	VERTICAL
641.760	27.4	-3.6	46.0	18.6	100	321	VERTICAL

Table 7.3.2-1: Radiated Emissions

Note: All emissions above 641.76 MHz were attenuated at least 20 dB below the permissible limit.

7.4 Occupied Bandwidth - FCC Section 15.215

7.4.1 Test Methodology

ANSI C63.4 Annex H was the guiding document for this evaluation. Radiated measurements were made with the Spectrum Analyzer's resolution bandwidth set to 100kHz.

7.4.2 Test Requirement

Intentional radiators operating under the alternative provisions to the general emission limits as contained in Sec. Sec. 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.4.3 Test Results

The 20dB bandwidth was determined to be 438.75kHz. The frequency band designated under Part 15.249 is 902-928MHz, therefore the 20dB bandwidth is contained within the frequency band designated under this rule part. Test results are shown in Figure 7.4.3-1 below.

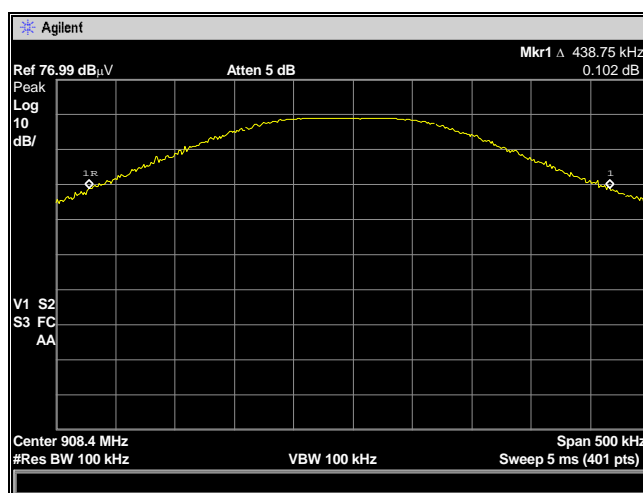


Figure 7.4.3-1

7.5 Band-Edge Compliance and Spurious Emissions - FCC Section 15.249

7.5.1 Test Methodology

Radiated emissions tests were made over the frequency range of 30MHz to 10GHz, 10 times the highest fundamental frequency. Emission measurements were also performed at the band-edge and compared to the general radiated emission limits of Part 15.209.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth (RBW) of 120 kHz and a video bandwidth (VBW) of 300 kHz. For frequencies above 1000MHz, average measurements were calculated based on the peak measurements made with RBW of 1 MHz and a VBW of 1 MHz. The average emissions were calculated by applying the duty cycle correction of the EUT to the peak measurements for comparison to the average limit.

7.5.2 Duty Cycle Correction

For average radiated measurements, the measured level was reduced by a factor 4.43dB to account for the duty cycle of the EUT. The duty cycle was determined to be 60.0% or 60.0ms with a 100ms period. The duty cycle correction factor is determined using the formula: $20\log(0.600) = -4.43\text{dB}$. Additional justification of the duty cycle can be found in the Theory of Operation supplied with this filing.

7.5.3 Test Results

Radiated spurious emissions found in the band of 30MHz to 10GHz and band-edge emissions are reported in Table 7.5.3-1 and Figure 7.5.3-1

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	avg			Qpk/pk	avg	Qpk/pk	avg	Qpk/pk	avg
Fundamental Frequency										
908.42	62.76	-----	H	27.04	89.80	-----	94	-----	4.20	-----
908.42	65.01	-----	V	27.88	92.89	-----	94	-----	1.11	-----
Spurious Emissions										
1816.84	48.69	44.26	H	-1.97	46.72	37.85	74	54	27.28	16.15
1816.84	49.68	46.70	V	-1.97	47.71	40.29	74	54	26.29	13.71
2725.26	56.50	54.63	H	2.30	58.80	52.49	74	54	15.20	1.51
2725.26	54.32	51.99	V	2.30	56.62	49.85	74	54	17.38	4.15
3633.68	47.32	43.00	H	5.77	53.09	44.34	74	54	20.91	9.66
3633.68	44.26	36.05	V	5.77	50.03	37.39	74	54	23.97	16.61

Table 7.5.3-1: Radiated Spurious Emissions

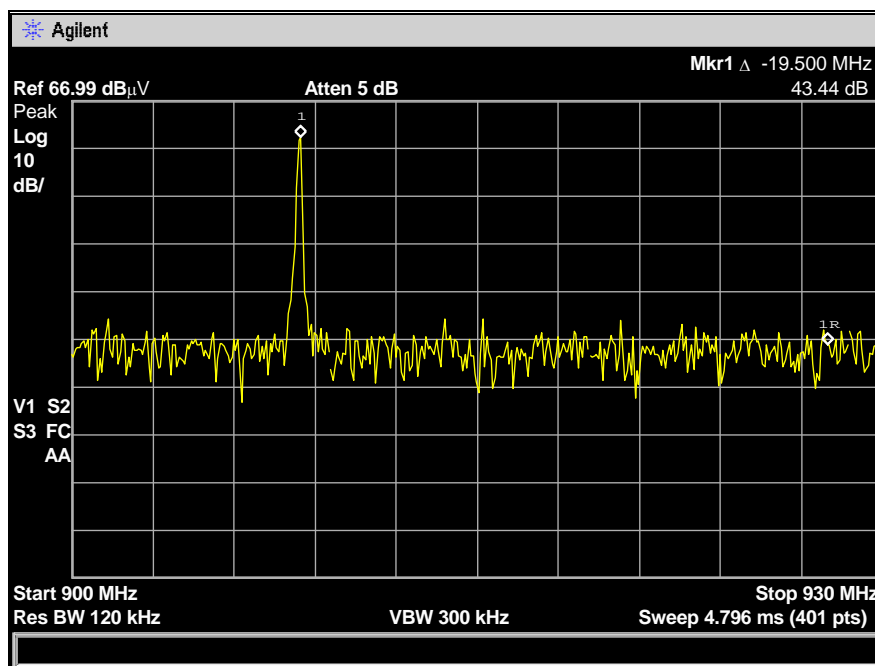


Figure 7.5.3-1 Band Edge Plot

7.5.4 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF_T	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R_U	=	Uncorrected Reading
R_C	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: $48.69 - 1.97 = 46.72$ dBuV

Margin: $74\text{dBuV} - 46.72\text{ dBuV} = 27.28$ dB

Example Calculation: Average

Corrected Level: $44.26 - 1.97 - 4.437 = 37.85$ dBuV

Margin: $54\text{dBuV} - 37.85\text{ dBuV} = 16.15$ dB

8.0 CONCLUSION

In the opinion of ACS, Inc. the Home Access Controller model WDHA-12, manufactured by Wayne-Dalton, does meet the requirements of FCC Part 15.249.