




The only visible difference in the beacon body will be looking into the transparent dome moulding:

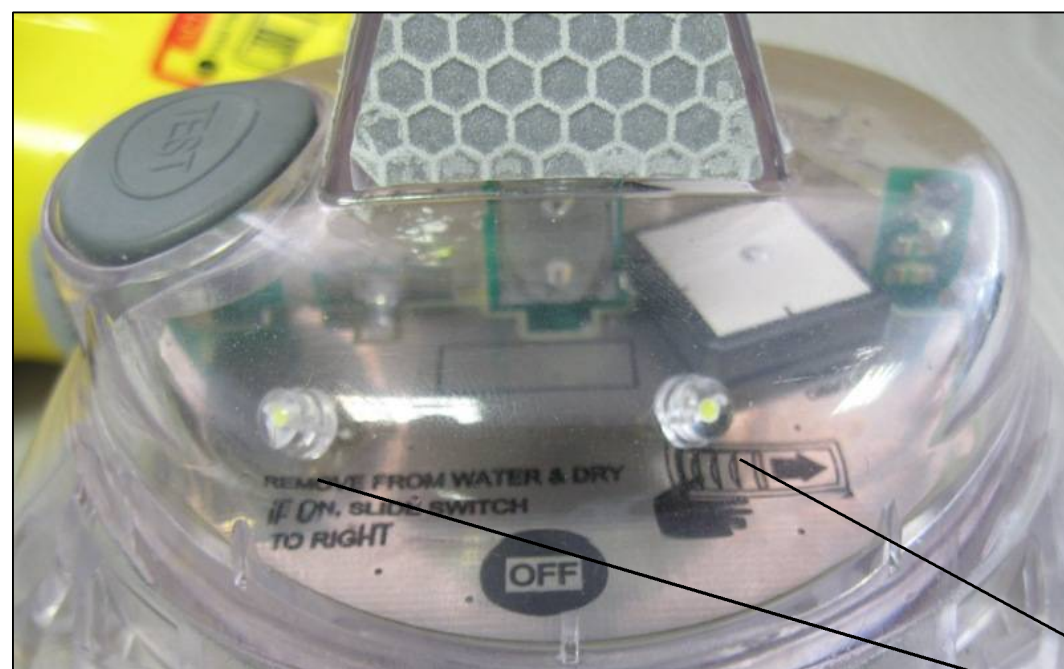

**G5-1
Build**


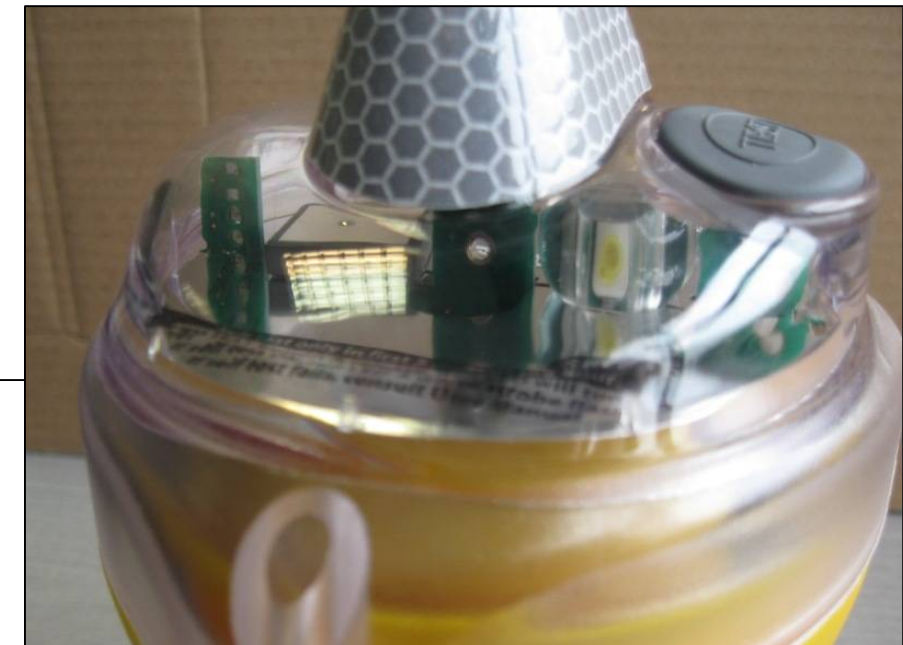


**G5-2
Build**

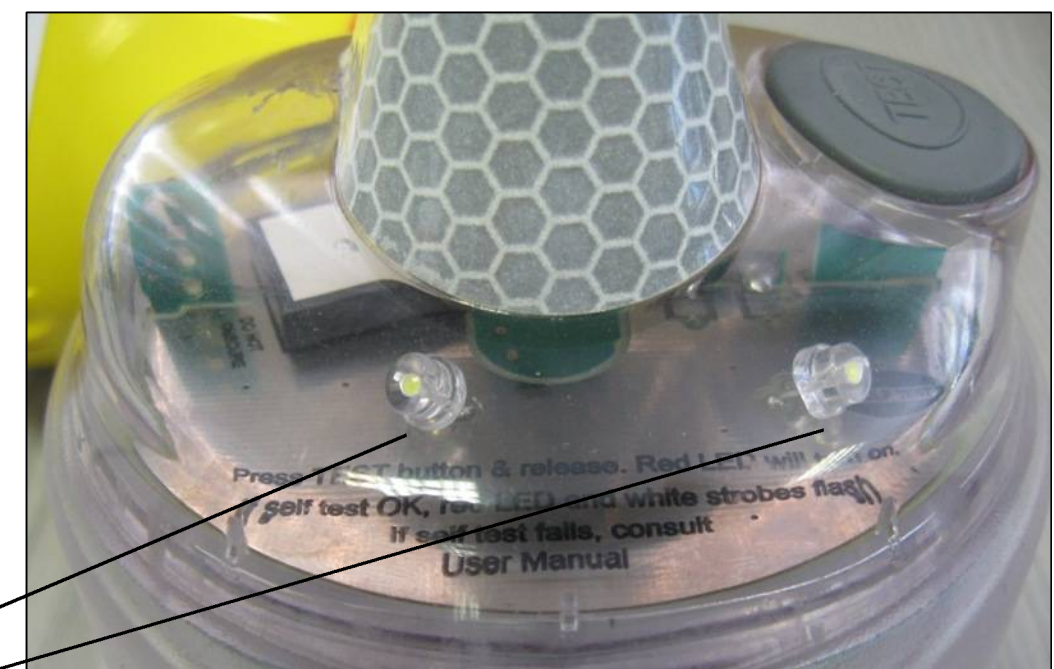

Four LEDs replace the single LED with lens for the Low-Duty-Cycle-Light function

The G5-2 Build images above are from the test prototype - the top silkscreen for the production version of the disc PCB is shown below, to better illustrate the legend which will be visible looking into the transparent dome moulding:

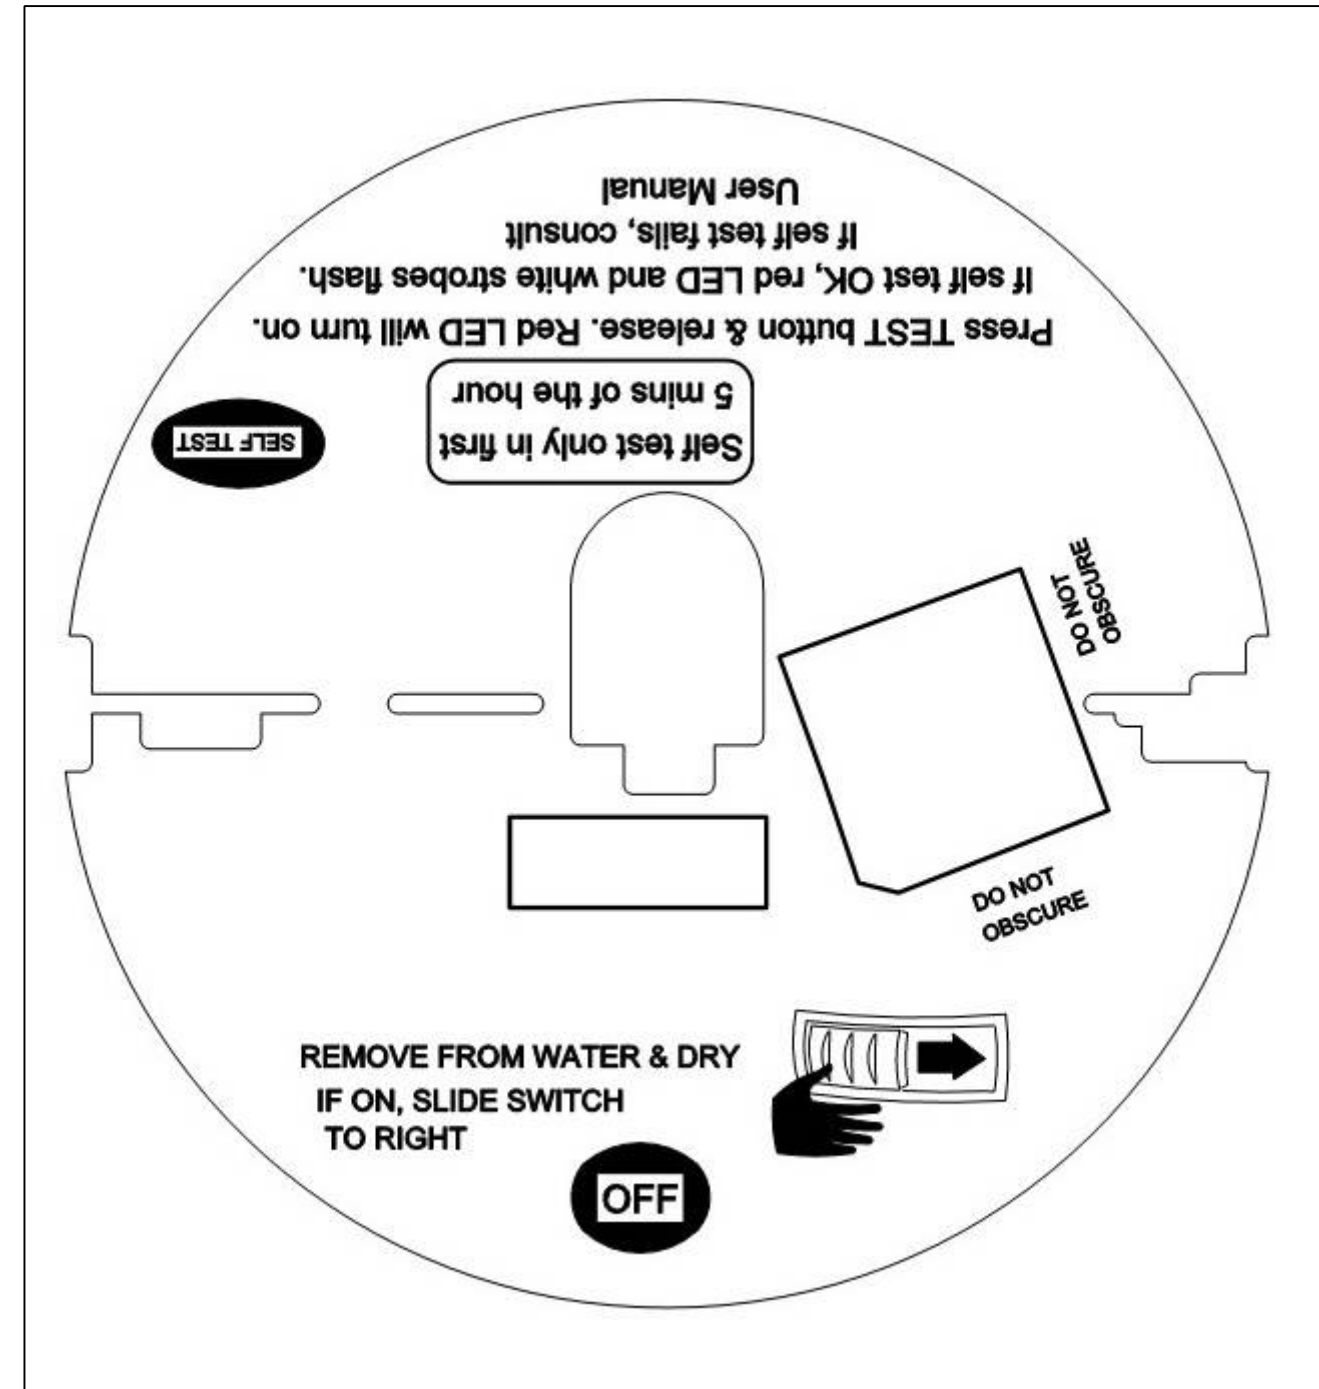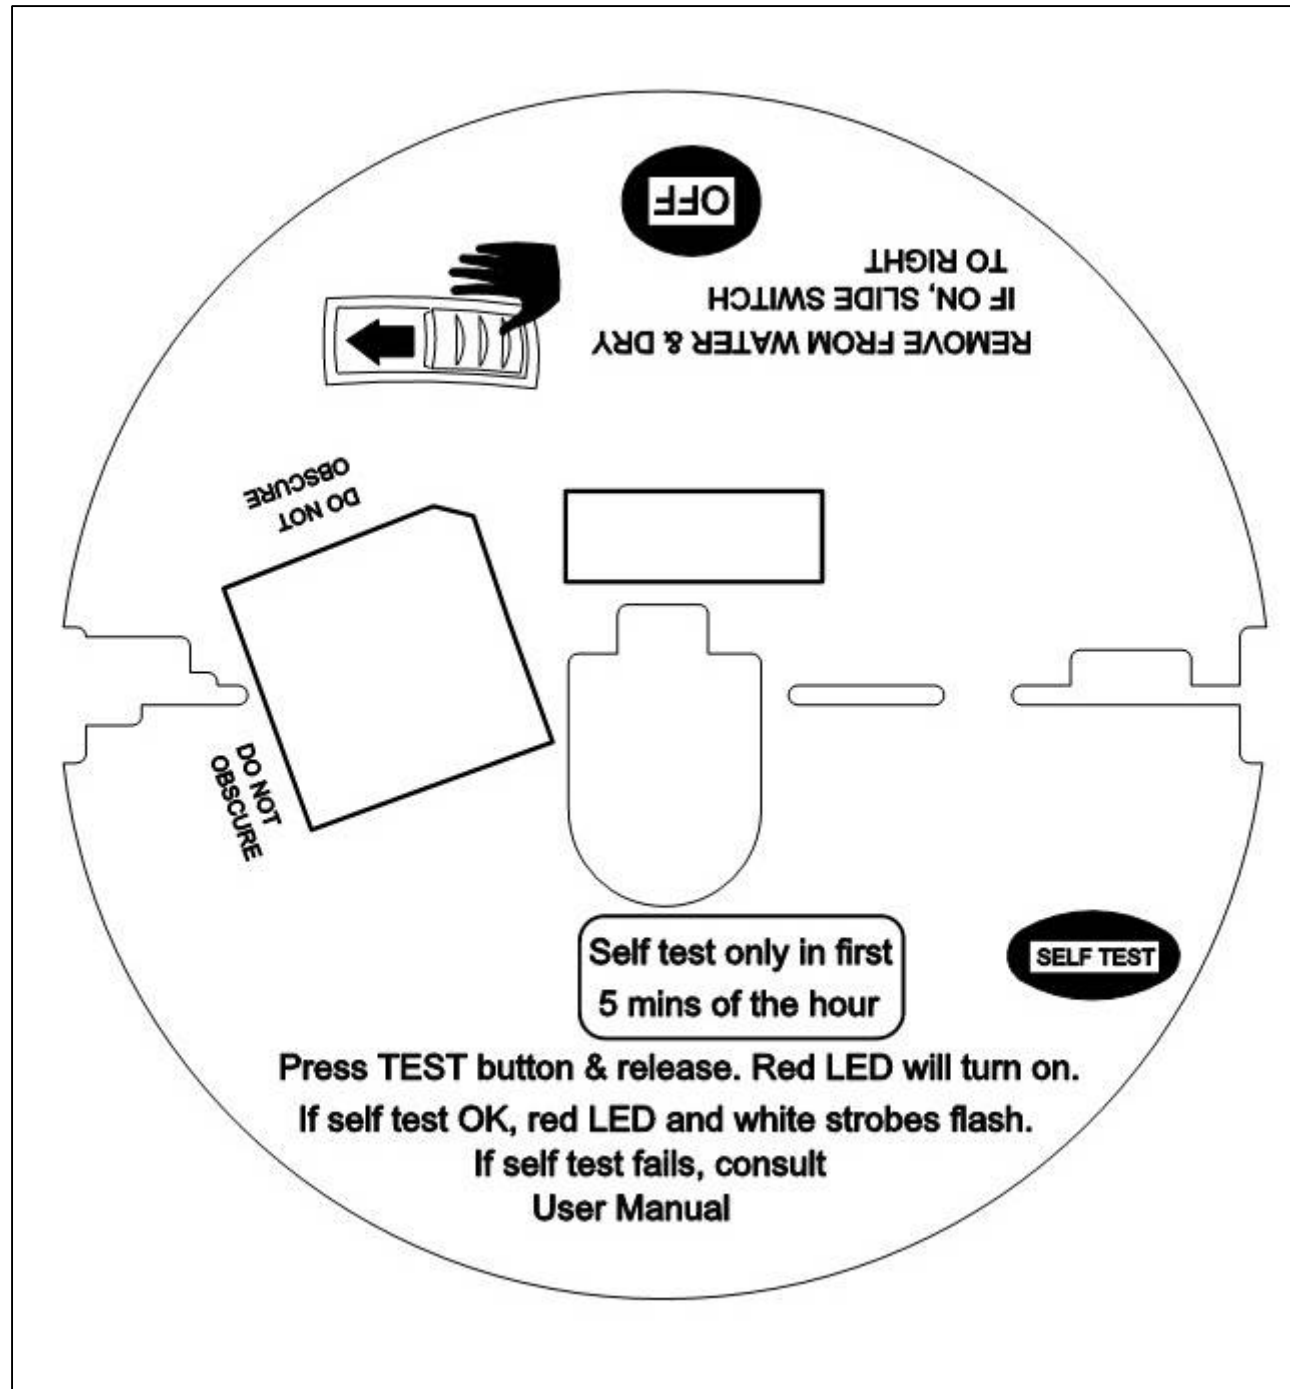

The minor change in appearance arising from the revised reflective tape solution (to IEC 61097-2 Edition 3) is shown separately by an Engineering Drawing.