

Never wash your R/C vehicle or controller with running water. Dampen a cloth with tap water and wipe the outside cabinet.

Always power off your R/C vehicle and controller when not in use.

Never leave R/C vehicle or controller in direct sunlight for an extended period of time.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

LIMITED WARRANTY

DSI ELECTRONICS™

We warrant the Crazy Taxi™ to be free from defects in material and workmanship under normal use for a period of 90 days after delivery to the ultimate user, and will repair free of charge or replace at no charge should it become defective under this warranty. This warranty does not cover batteries, antennas or any other accessories used in association with the R/C vehicle. Be sure to pack carefully and return postage paid insured to:

DSI ELECTRONICS™, Service Dept.
10110 West Sam Houston Parkway (South) Suite 150, Houston, TX 77099

This warranty is valid in the U.S.A. only.

For Product Questions
Call 1-800-828-8882
Ask For Customer Service



©2003 DSI Toys, Inc.
Distributed by DSI Toys, Inc.
10110 West Sam Houston Parkway South
Suite 150
Houston, TX 77099

MADE IN CHINA



Specifications and colors of contents may vary from photo. Specifications are subject to change without notice.

OWNERS MANUAL

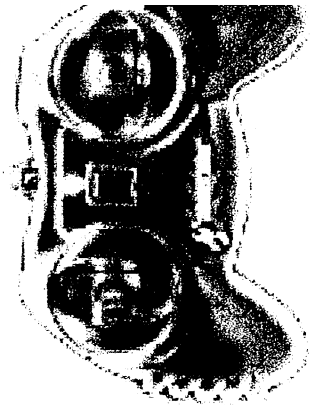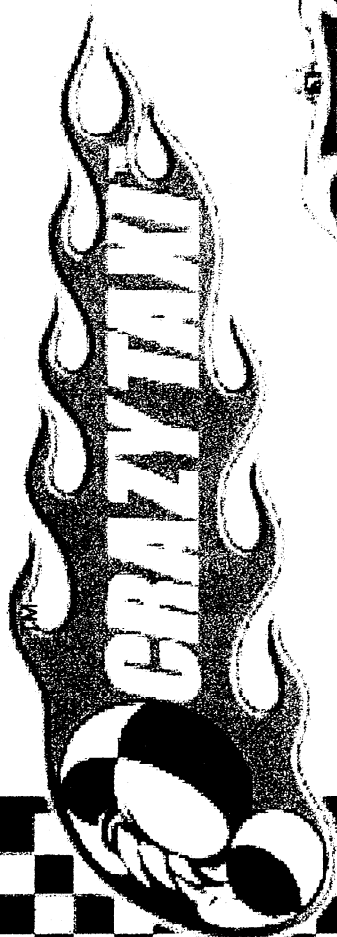

CRAZY TAXI


WICKED TURNS



IMPORTANT: Please read
Owner's Manual carefully

CONTENTS


Your Crazy Taxi™ R/C set includes 1 Vehicle, 1 Controller

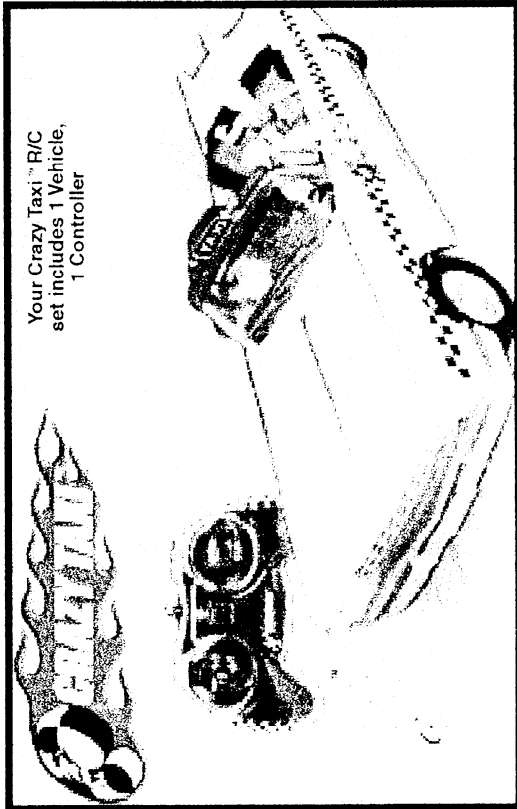

HOW TO OPERATE

- A** Forward and reverse
- B** Power on/off
- C** Wild rotating axle button (Press and hold joystick D)
- D** Turn left and right (Also directs spin of the wild rotating axle)

Figure 3

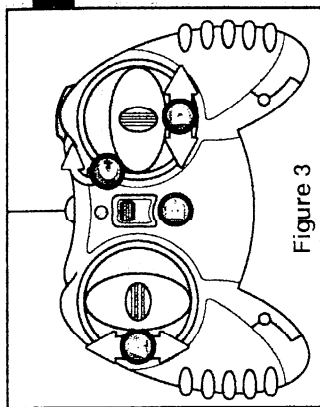


HOW TO OPERATE



1. Wild Roll Over

When driving the car straight get ready to do a turn using the "D" joystick, while pushing "C" also push "C" and this will cause the car to roll over.

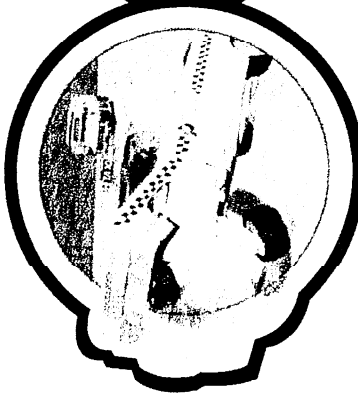


2. Wild Rotating Axle

To rotate the axle press the "C" button on the top of the controller. This will cause the axle to spin freely. This will help you add to the trick file.



3. The Passenger

Passenger will rock side to side the the car is going around corners or rolling over.

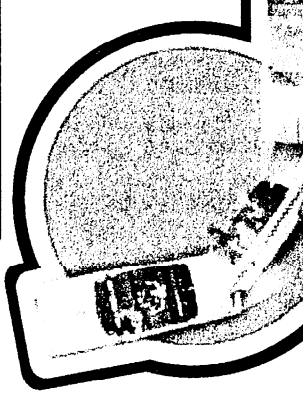


4. Making the Car Rock

To get the car to rock side to side, Simply move the "D" control back and forth this will allow the car to sway from side to side.

VEHICLE BATTERY INSTALLATION

1. Turn latch so that the area will allow the battery to slide in smoothly.
2. Place one 6.0Volt NiCD battery into battery compartment. Slide the battery towards the on and off switch. Be sure the metal conductor points on the car and battery are touching.
3. Turn latch so that the battery is LOCKED in place.

Figure 1

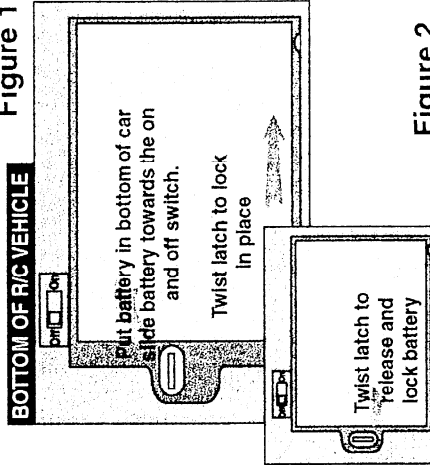


CONTROLLER BATTERY INSTALLATION

1. Slide open battery compartment door.
2. Insert 1 9-Volt battery as illustrated.
3. Replace battery compartment door.

BATTERY LIFE

Your vehicle should receive approximately a 15 minute run time at normal speed on a freshly charged 6.0 Volt NiCD battery. Please allow used batteries to cool down after each use and before recharging the batteries. Follow the battery's manufacturer instructions regarding maintenance and care of the battery.

Figure 2

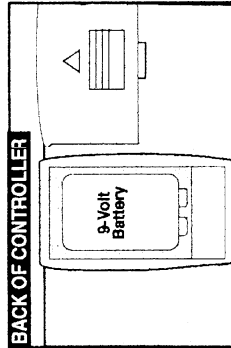

PRECAUTION: Do not mix old and new batteries. Do not mix alkaline or standard (carbon-zinc) batteries. Do not use 9-Volt rechargeable batteries in Controller.