

EMI – TEST REPORT

- FCC Part 15.247, RSS-247 -

Type / Model Name : 995364

Product Description : remote transceiver for car access

Applicant : Continental Automotive GmbH

Address : Siemensstr. 12

93055 Regensburg

GERMANY

Manufacturer : Continental Guadalajara México, S.A. de C.V.

Address : Camino a la Tijera No.3

45640 Tlajomulco de Zúñiga, Jalisco

MEXICO

Test Result according to the standards
listed in clause 1 test standards:

POSITIVE

Test Report No. : T37598-02-00JP

11. July 2016

Date of issue



Deutsche
Akkreditierungsstelle
D-PL-12030-01-01
D-PL-12030-01-02

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test results
without the written permission of the test laboratory.

Contents

1	<u>TEST STANDARDS</u>	3
2	<u>EQUIPMENT UNDER TEST</u>	4
2.1	Photo documentation of the EUT	4
2.2	Short description of the equipment under test (EUT)	5
2.3	Variants of the EUT	5
2.4	Operation frequency and channel plan	6
2.1	Antenna	6
2.2	Power supply system utilised	6
2.3	Peripheral devices and interface cables	6
2.4	Determination of worst case conditions for final measurement	6
2.5	Final assessment	7
3	<u>TEST ENVIRONMENT</u>	8
3.1	Address of the test laboratory	8
3.2	Environmental conditions	8
3.3	Statement of the measurement uncertainty	8
3.4	Measurement protocol for FCC and ISED	9
4	<u>TEST CONDITIONS AND RESULTS</u>	10
4.1	6dB and 99% Bandwidth	10
4.2	Transmitt power of fundamental	16
4.3	Maximum peak conducted output power	18
4.4	Power spectral density	22
4.6	Unwanted emissions, radiated	26
4.7	Band edge compliance	30
5	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	34

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (October, 2015)

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (October, 2013)

Part 15, Subpart C, Section 15.209

Part 15, Subpart C, Section 15.247

Radiated emission limits, general requirements

Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and
5725 - 5875 MHz

RSS-Gen Issue 4, November 2014

RSS-Gen Sub clause 4.6.1

RSS-Gen Sub clause 7.2.5

General Requirements and Information for the Certification of
Radio Apparatus

Occupied Bandwidth

Spurious Emissions Limits

RSS-247 Issue 1, May 2015

Digital Transmission Systems (DTSS), Frequency Hopping Systems
(FHSS) and Licence-Exempt Local Area Network (LE-LAN)

ANSI C63.10: 2013


American National Standard of Procedures for Compliance Testing
of Unlicensed Wireless Devices.

KDB 558074 D01 v03r05

Guidance for performing compliance measurements on DTS
operating under §15.247, April 8, 2016

2 EQUIPMENT UNDER TEST

2.1 Photo documentation of the EUT

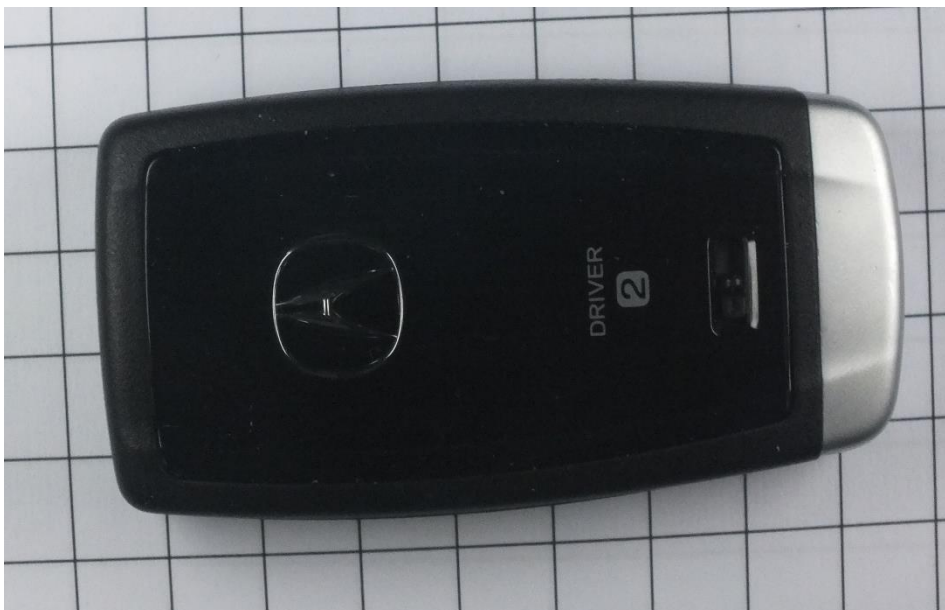



2.2 Short description of the equipment under test (EUT)

The EuT is a bidirectional RF key designed to provide remote engine start with feedback, remote keyless entry, passive entry, passive engine start, and immobilization functionality.

The EuT incorporates long range channels (LR CH01 and LR CH02), tested according to FCC Part 15.247 and RSS-247, part of this report. The short range channels (SR CH01 and SR CH02) as well as PASE function are tested according to FCC Part 15.249 and RSS-210, refer to separate report.

Number of tested samples: 1
Serial number: none

EUT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

2.3 Variants of the EUT

none

2.4 Operation frequency and channel plan

Operating frequency band is 902 MHz to 928 MHz

Channel	Frequency	modulation	Regulation applied
TX-LR-CH1	923.99955 MHz	DSSS (spreading 15x)	FCC Part 15.247 & RSS-247
		DSSS (spreading 31x)	
TX-LR-CH2	924.00045 MHz	DSSS (spreading 15x)	FCC Part 15.247 & RSS-247
		DSSS (spreading 31x)	
RX-LR-DSSS	926.0000 MHz	DSSS	FCC Part 15.247 & RSS-247
TX-SR-CH1*	924.6000 MHz	FSK	FCC Part 15.249 & RSS-210
TX-SR-CH2*	923.6250 MHz	FSK	FCC Part 15.249 & RSS-210
RX-SR-CH1*	926.2250 MHz	FSK	FCC Part 15.249 & RSS-210
RX-SR-CH2*	925.4000 MHz	FSK	FCC Part 15.249 & RSS-210
PASE*	924.6000 MHz	FSK	FCC Part 15.249 & RSS-210

* not covered by this test report. Refer to separate test report

2.1 Antenna

EuT uses integrated antenna without access of the end user.

2.2 Power supply system utilised

Power supply voltage : 3.0 V / DC (Lithium battery CR2032)

2.3 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- none Model : none

2.4 Determination of worst case conditions for final measurement

Measurements have been performed in all three orthogonal axes. The test report shows the worst case values.

1 TEST RESULT SUMMERY

FCC Rule Part	RSS Rule Part	Description	Result
15.207	RSS Gen, 8.8	AC power line conducted emissions	not applicable ¹
15.247(a)(2)	RSS-247, 5.2(1)	6 dB Bandwidth	passed
15.247(b)(3)	RSS-247, 5.4(4)	Maximum peak conducted output power	passed
15.209 15.247(d)	RSS-Gen, 8.9 RSS-247, 5.5	Unwanted emission, radiated	passed
15.247(e)	RSS-247, 5.2(2)	PSD	passed
--	RSS-Gen, 6.11	Transmitter frequency stability	not applicable ²
--	RSS-Gen, 6.6	99 % Bandwidth	passed

¹The EuT is battery supplied and has no AC port

²the EuT operates outside the specified frequency bands (see RSS-Gen 8.11)

2.5 Final assessment

The equipment under test fulfills the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 21 June 2016

Testing concluded on : 05 July 2016

Checked by:

Tested by:

Klaus Gegenfurtner
Teamleader Radio

Jürgen Pessinger

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

3.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 °C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

3.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	$\pm 3.29 \text{ dB}$
Bandwidth measurement	Center frequency of EuT	95%	$\pm 2.5 \times 10^{-7}$
99% Occupied Bandwidth	Center frequency of EuT	95%	$\pm 2.5 \times 10^{-7}$
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	$\pm 3.53 \text{ dB}$
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	$\pm 3.71 \text{ dB}$
Radiated Spurious Emissions	1000 MHz to 10000 MHz	95%	$\pm 2.34 \text{ dB}$
Peak conducted output power	902 MHz to 928 MHz	95%	$\pm 0.35 \text{ dB}$
Conducted Spurious Emissions	9 kHz to 10000 MHz	95%	$\pm 2.15 \text{ dB}$

3.4 Measurement protocol for FCC and ISCED

3.4.1 General information

3.4.1.1 Test methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The Open Area test sites are listed Open Sites under the Canadian Test-Sites File-No:

IC 3009A-1 (OATS1) and IC 3009A-3 (OATS3)

The anechoic chamber site is listed chamber under the Canadian Test-Sites File-No:

IC 3009A-2

In compliance with RSS-247 testing for RSS compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

3.4.1.2 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

3.4.1.3 Details of test procedures

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

4 TEST CONDITIONS AND RESULTS


4.1 6dB and 99% Bandwidth

For test instruments and accessories used see section 6 Part MB.

4.1.1 Description of the test location

Test location: AREA4

4.1.2 Photo documentation of the test set-up

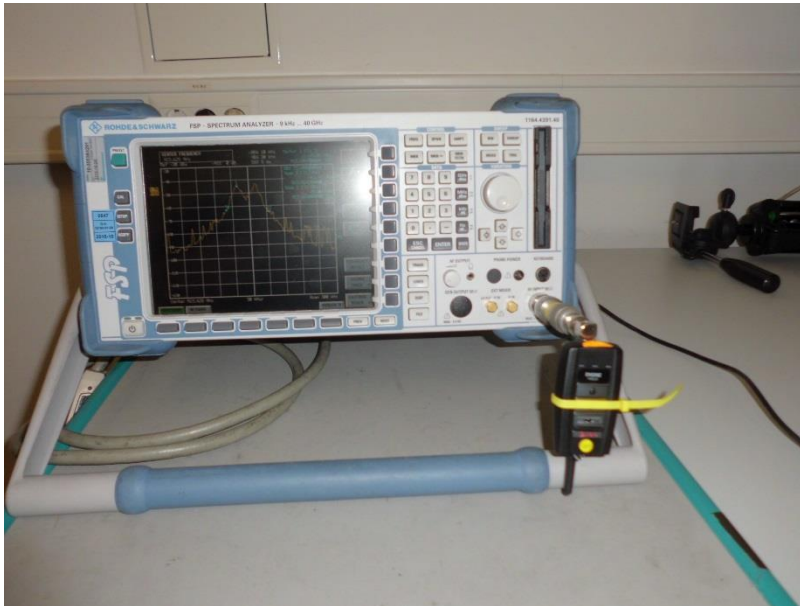

4.1.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(2), RSS-247, 5.2(1) and RSS-Gen, 6.6:

4.1.4 Description of Measurement

The measurement procedure was according to KDB 558074 D01, Item 8.1 and RSS-Gen 6.6.

4.1.5 Test result

Mode	6dB Bandwidth (kHz)	minimum Limit (kHz)
TX-LR-CH1 (spreading 15x)	685.6	500.0
TX-LR-CH1 (spreading 31x)	511.6	500.0
TX-LR-CH2 (spreading 15x)	691.6	500.0
TX-LR-CH2 (spreading 31x)	523.6	500.0

Mode	99% Bandwidth (kHz)	Limit (kHz)
TX-LR-CH1 (spreading 15x)	1932	--
TX-LR-CH1 (spreading 31x)	1968	--
TX-LR-CH2 (spreading 15x)	2082	--
TX-LR-CH2 (spreading 31x)	2484	--


The requirements are **FULFILLED**.

Remarks: For detailed test results please refer to following test protocols.

4.1.6 Test protocols


6 dB bandwidth

TX-LR-CH1 (spreading 15x)

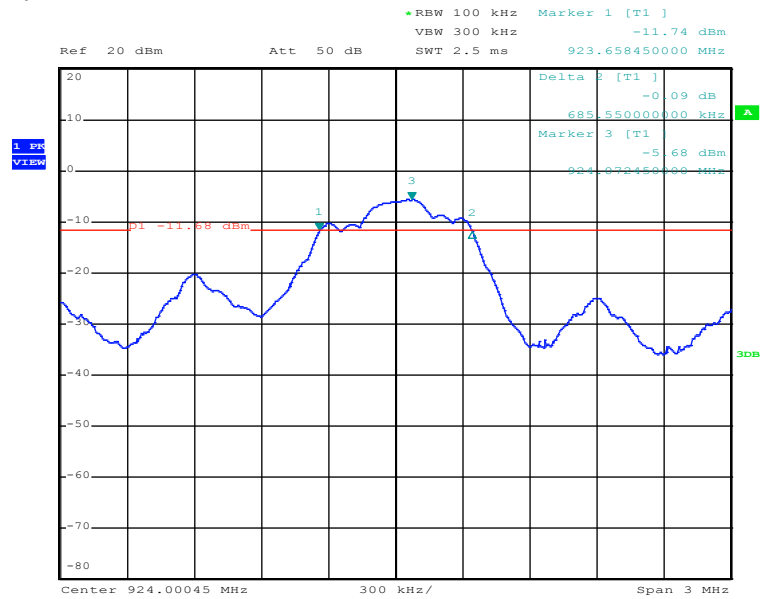


99% bandwidth

TX-LR-CH1 (spreading 15x)

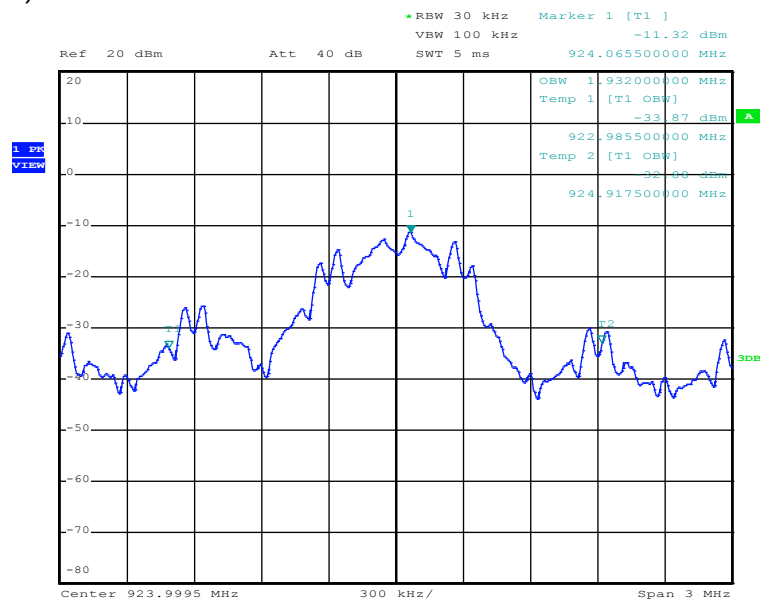


6 dB bandwidth

TX-LR-CH1 (spreading 31x)

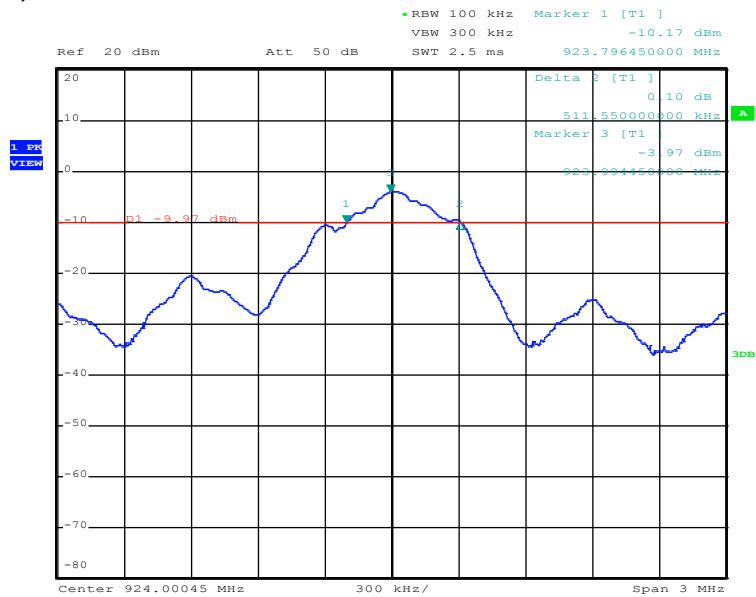


99% bandwidth

TX-LR-CH1 (spreading 31x)

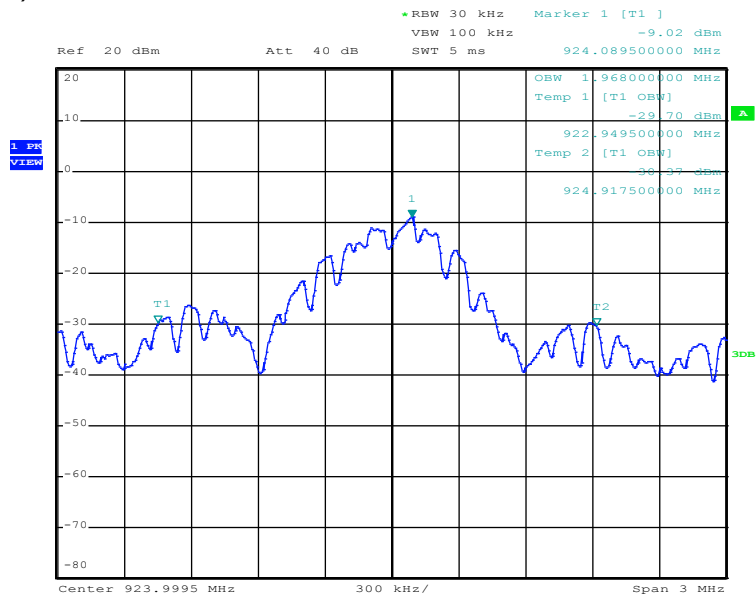


6 dB bandwidth

TX-LR-CH2 (spreading 15x)

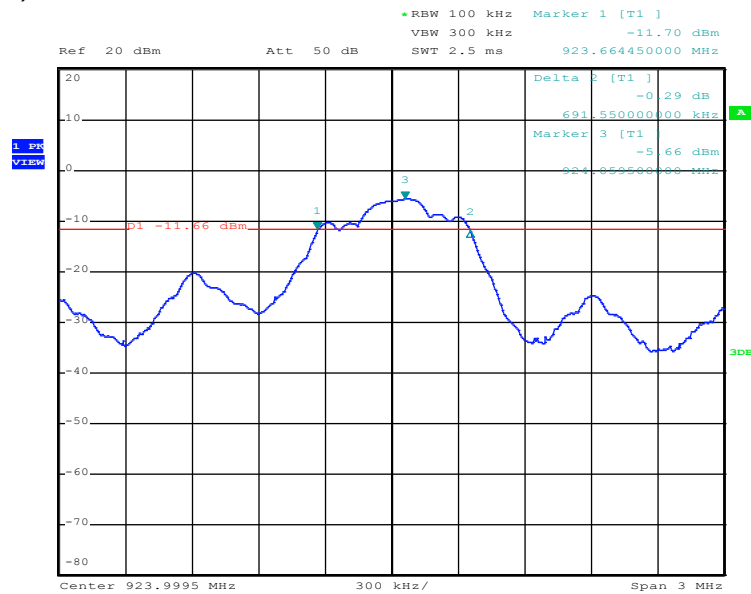


99% bandwidth

TX-LR-CH2 (spreading 15x)

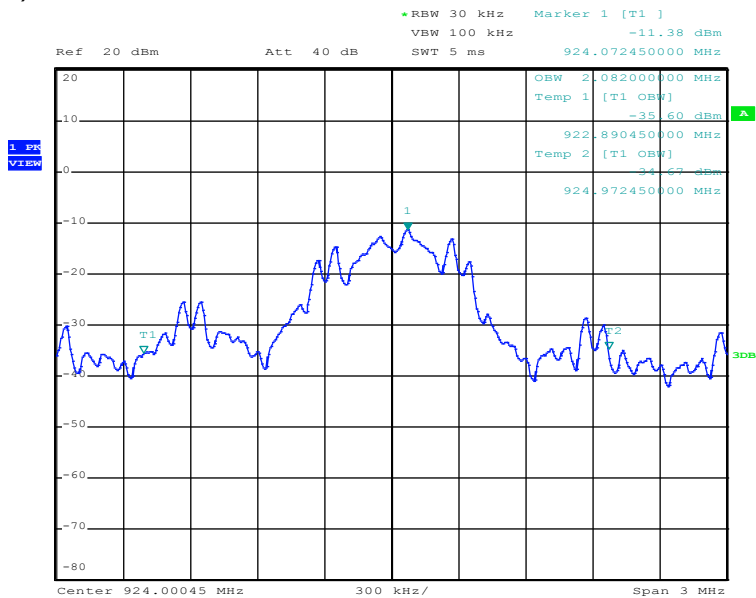


6 dB bandwidth

TX-LR-CH2 (spreading 31x)

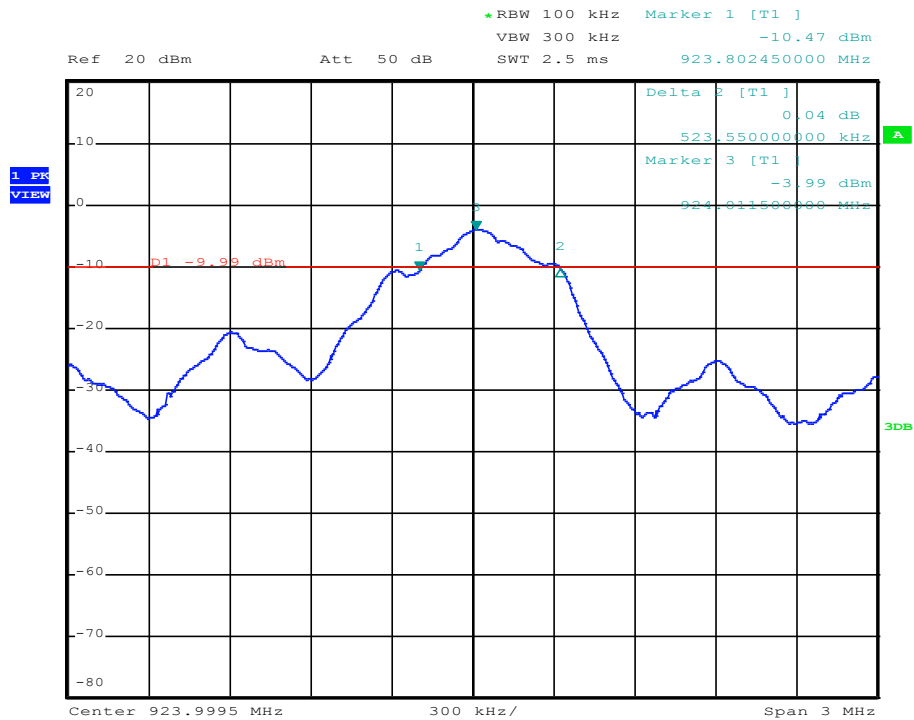

99% bandwidth

TX-LR-CH2 (spreading 31x)

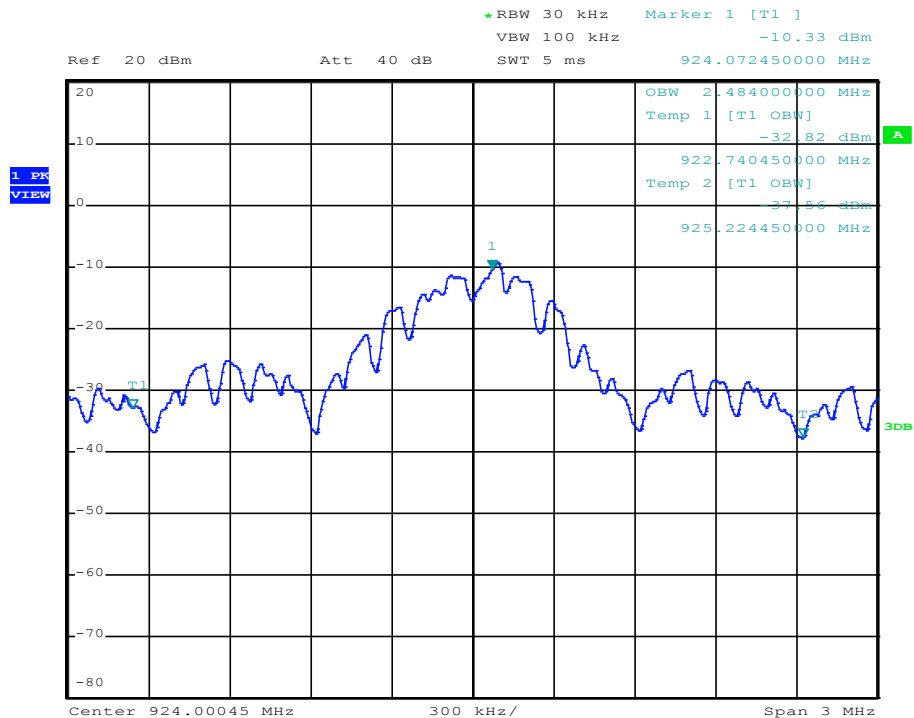

4.2 Transmit power of fundamental

For test instruments and accessories used see section 6 Part CPR 2.

4.2.1 Description of the test location

Test location: OATS3
Test distance: 10 m

4.2.2 Photo documentation of the test set-up



4.2.1 Applicable standard

According to FCC Part 15C, Section 15.247(b)(3) and RSS-247, 5.4(4)

4.2.2 Test result

The resolution bandwidth during the measurement is as follows:

30 MHz – 1000 MHz:

ResBW: 120 kHz

Mode	Frequency (MHz)	Reading level (dBμV)	Correction factor (dB)	Corrected level (dBm)	Limit (dBm)	Delta (dB)
TX-LR-CH1 (spreading 15x)	923.99955	65.6	-63.7	1.9	30	-28.1
TX-LR-CH1 (spreading 31x)		65.4	-63.7	1.7	30	-28.3
TX-LR-CH2 (spreading 15x)	924.00045	64.5	-63.7	0.8	30	-29.2
TX-LR-CH2 (spreading 31x)		64.4	-63.7	0.7	30	-29.3

Note: The correction factor includes cable loss and antenna factor.

Peak Power Limit according to FCC Part 15, Section 15.247(b)(3) and RSS-247, 5.4(4):

Frequency (MHz)	Peak Power Limit	
	(dBm)	(Watt)
902-928	30	1.0

The requirements are **FULFILLED**.

Remarks: The device use internal antenna. The measurement was performed to have reference TX power
for TX conducted measurements.


4.3 Maximum peak conducted output power

For test instruments and accessories used see section 6 Part **CPC 2**.

4.3.1 Description of the test location

Test location: AREA4

4.3.2 Photo documentation of the test set-up

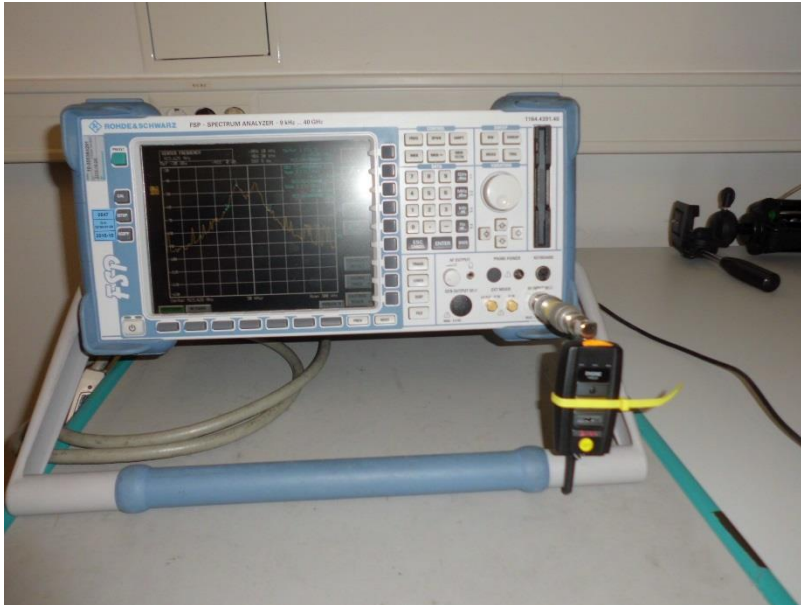

4.3.3 Applicable standard

According to FCC Part 15, Section 15.247(b)(3) and RSS-247, 5.4(4)

4.3.4 Description of Measurement

The measurement was performed according to KDB 558074 D01, Item 9.1.1

4.3.5 Test result

Mode	Frequency (MHz)	Measured power (dBm)	Limit (dBm)	Delta (dB)
TX-LR-CH1 (spreading 15x)	923.99955	1.9	30	-28.1
TX-LR-CH1 (spreading 31x)		1.7	30	-28.3
TX-LR-CH2 (spreading 15x)	924.00045	0.9	30	-29.1
TX-LR-CH2 (spreading 31x)		0.7	30	-29.3

FCC ID: KR5995364

IC: 7812D-995364


Peak Power Limit according to FCC Part 15, Section 15.247(b)(3) and RSS-247, 5.4(4):

Frequency (MHz)	Peak Power Limit	
	(dBm)	(Watt)
902-928	30	1.0


The requirements are **FULFILLED**.**Remarks:** For detailed test results please refer to following test protocols.

4.3.6 Test protocols


TX-LR-CH1 (spreading 15x)

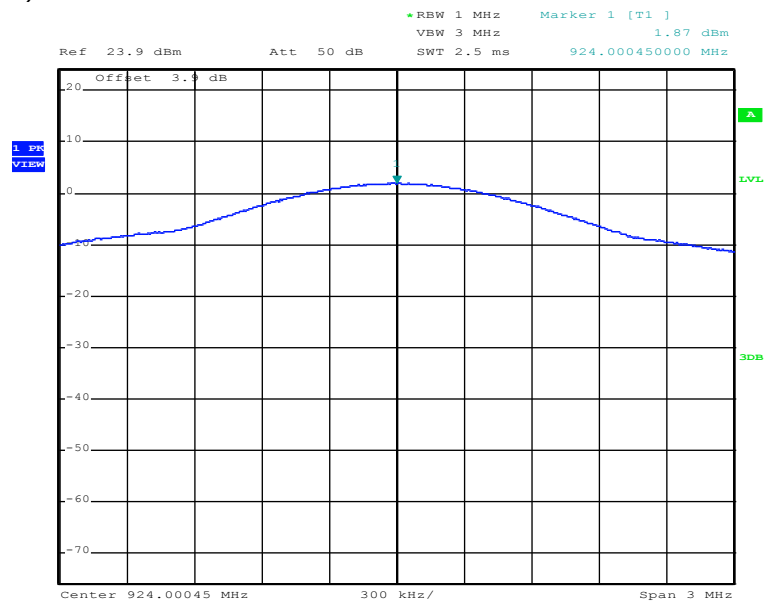


TX-LR-CH1 (spreading 31x)

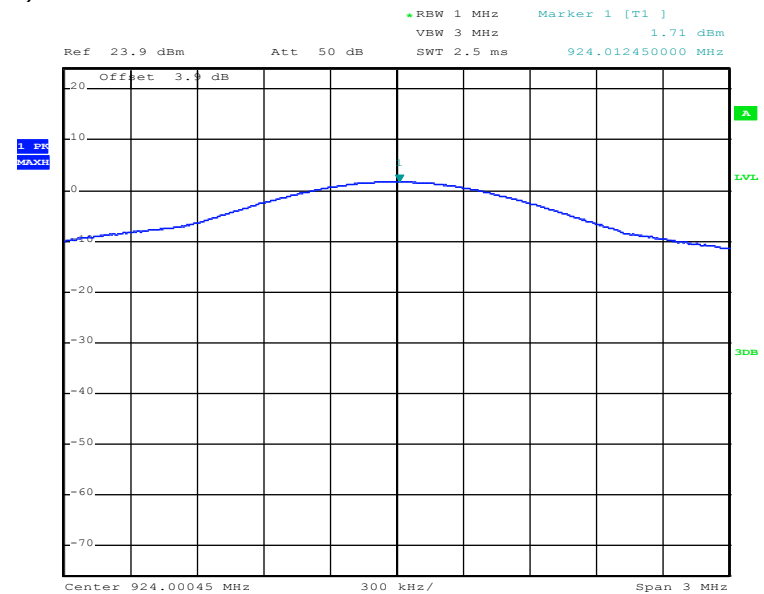

TX-LR-CH2 (spreading 15x)

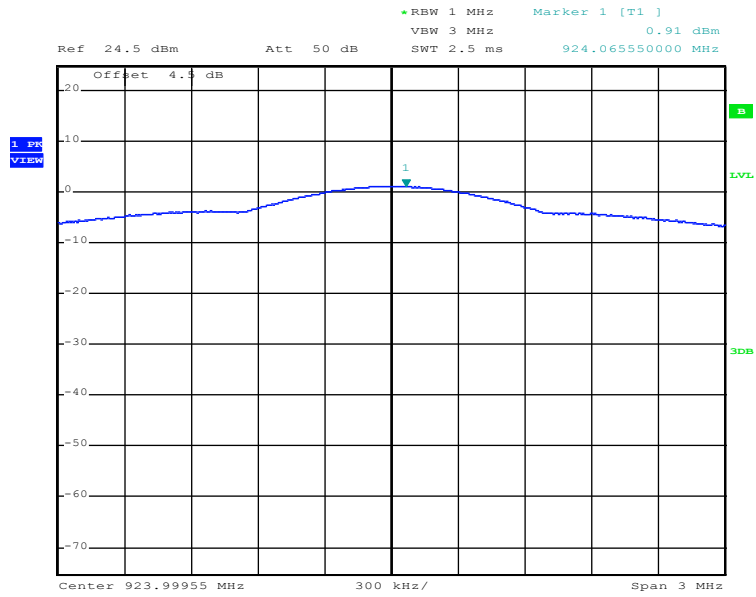

TX-LR-CH2 (spreading 31x)

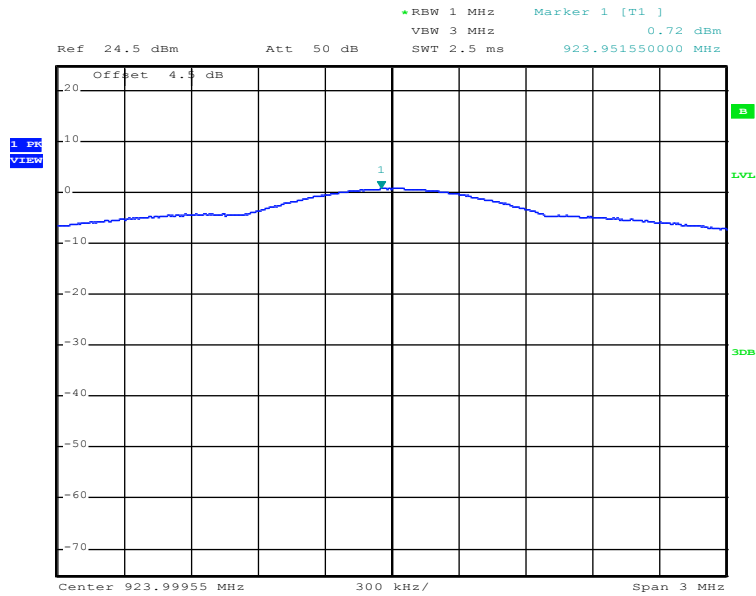


4.4 Power spectral density

For test instruments and accessories used see section 6 Part **CPC 2**.

4.4.1 Description of the test location

Test location: AREA4

4.4.2 Photo documentation of the test set-up

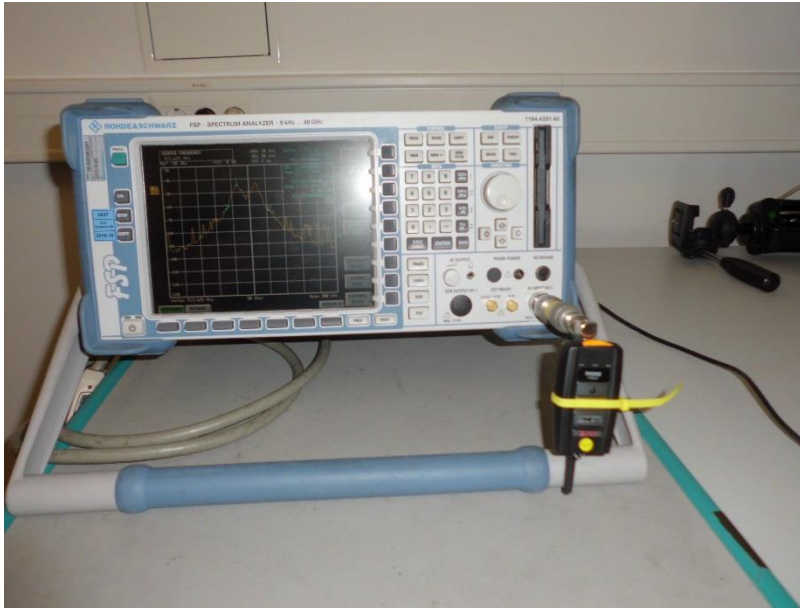

4.4.3 Applicable standard

According to FCC Part 15, Section 15.247(e) and RSS-247, 5.2(2)

4.4.4 Description of Measurement

The measurement was performed according to KDB 558074 D01, Item 9.1.1

4.4.5 Test result

Mode	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Delta (dB)
TX-LR-CH1 (spreading 15x)	923.99955	-8.7	8	-16.7
TX-LR-CH1 (spreading 31x)		-8.9	8	-16.9
TX-LR-CH2 (spreading 15x)	924.00045	-7.9	8	-15.9
TX-LR-CH2 (spreading 31x)		-8.3	8	-16.3

Power spectral density limit according to FCC Part 15, Section 15.247(e) and RSS-247, 5.2(2):


Frequency (MHz)	Power spectral density limit
	(dBm/3 kHz)
902 - 928	8

The requirements are **FULFILLED**.


Remarks: For detailed test results please refer to following test protocols.

4.4.6 Power spectral density plots


TX-LR-CH1 (spreading 15x)

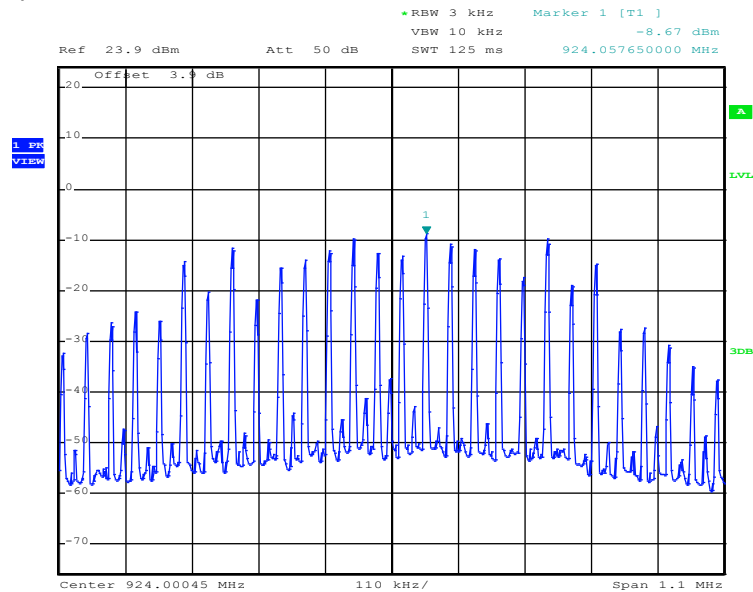


TX-LR-CH1 (spreading 31x)

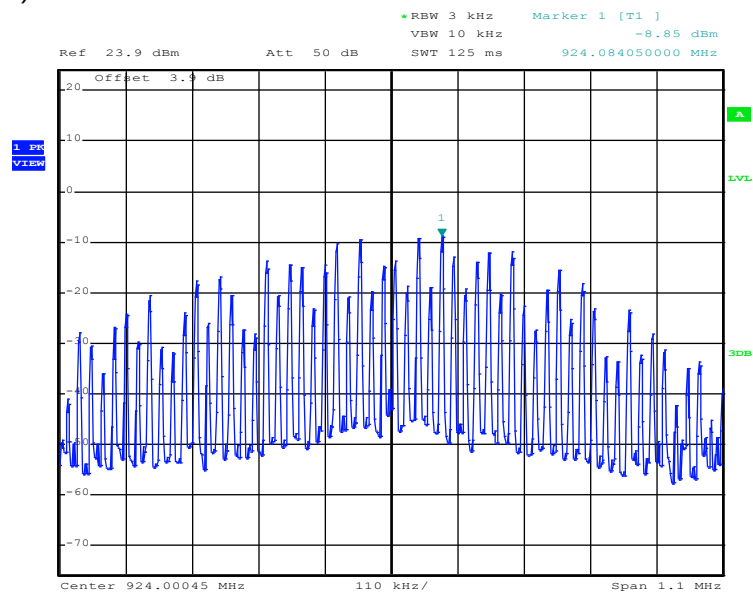

TX-LR-CH2 (spreading 15x)

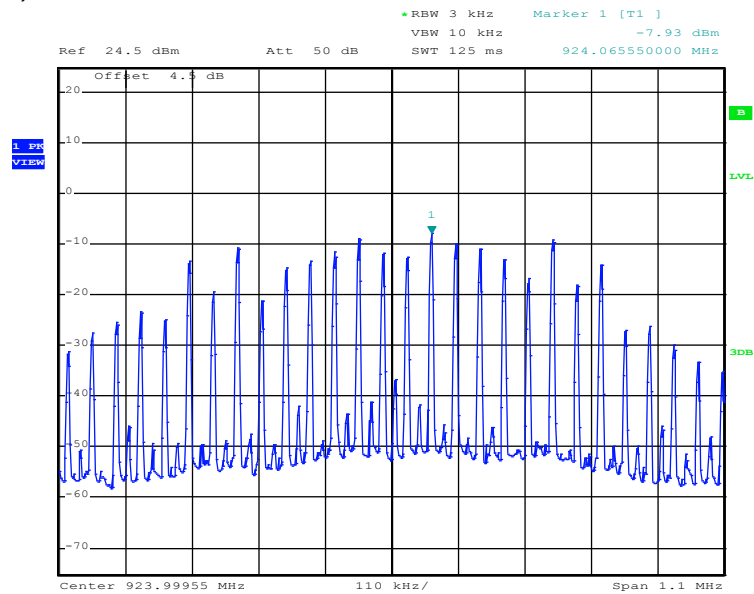

TX-LR-CH2 (spreading 31x)

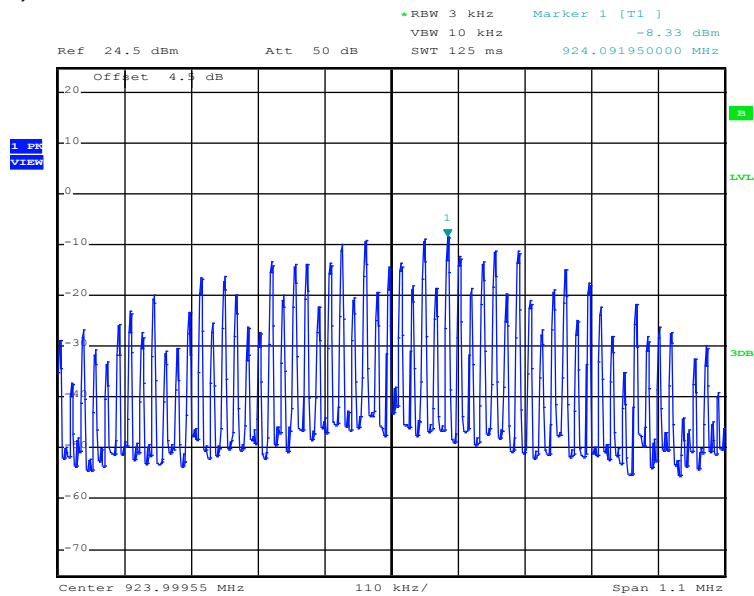

4.6 Unwanted emissions, radiated

For test instruments and accessories used see section 6 Part SER1, SER 2, SER 3.

4.6.1 Description of the test location

Test location: OATS3
Test location: OATS 1
Test location: Anechoic chamber 2

Test distance: 3 m

4.6.2 Photo documentation of the test set-up


Test setup 9 kHz – 30 MHz (OATS1):



Test setup 30 MHz – 1000 MHz (OATS3):



Test setup 1 GHz – 18 GHz (Anechoic chamber 1):

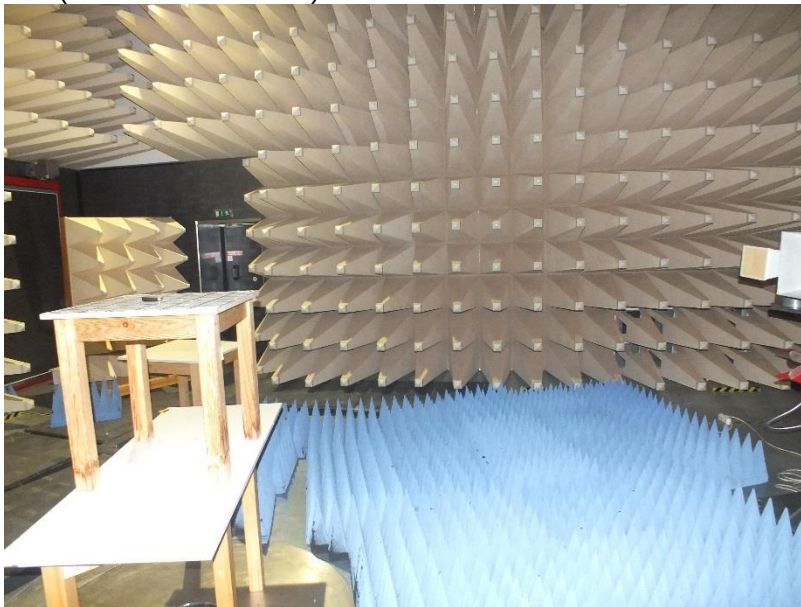

4.6.3 Applicable standard

According to FCC Part 15C, Section 15.209 & 15.247(d) and RSS-Gen, 8.9 & RSS-247, 5.5.

4.6.4 Description of Measurement

The set up of the EUT and the measurement procedure is in accordance to ANSI C63.10, item 6.4, 6.5 and 6.6.

Instrument settings:

9 kHz – 150 kHz	RBW: 200 Hz
150 kHz - 30 MHz	RBW: 9 kHz
30 MHz – 1000 MHz:	RBW: 120 kHz
1000 MHz – 25 GHz:	RBW: 1 MHz

4.6.1 Test result

4.6.2 Test result $f < 30$ MHz

Note: In the frequency range 9 kHz to 30 MHz no emission above noise level could be detected. The listed level are noise level. The measurement results from distance 3 m are extrapolated (D factor) to the specified distance.

Frequency (MHz)	Reading level PK (dB μ V) @ 3m	D-factor (dB)	Extrapolated level PK (dB μ V) @ specified distance	Correction factor (dB/m)	Corrected level PK dB(μ V/m)	Limit QP/AV dB(μ V/m)	Margin (dB)
0.047	31.6	-80	-48.4	20.4	-28.0	34.2	-62.2
1.5	30.5	-40	-9.5	20.5	11.0	24.1	-13.1
18.2	18.5	-40	-21.5	20.5	-1.0	29.5	-30.5

4.6.3 Test result 30 MHz < f < 1 GHz

Note: In the frequency range 30 MHz to 1000 MHz no emission above noise level could be detected. The listed level are noise level.

Frequency (MHz)	Reading QP Vert. (dBµV)	Reading QP Hor. (dBµV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level QP Vert. (dBµV/m)	Level QP Hor. (dBµV/m)	QP Limit (dBµV/m)	Dlimit (dB)
50,00	4,8	4,3	15,2	14,2	20,0	18,5	40,0	-20,0
150,00	6,0	5,9	13,9	14,8	19,9	20,7	43,5	-22,8
250,00	5,5	5,8	13,8	14,0	19,3	19,8	46,0	-26,2
500,00	6,5	6,7	22,5	22,3	29,0	29,0	46,0	-17,0
750,00	7,6	7,7	28,3	27,7	35,9	35,4	46,0	-10,1
1000,00	8,2	8,3	32,4	31,9	40,6	40,2	54,0	-13,4

4.6.4 Test result f > 1 GHz

Note: Tables below show PK-values vs AV-limit. All PK-values are below AV-limit therefore no duty cycle correction was applied.

TX-LR-CH1

Frequency (MHz)	Reading PK Vert. (dBµV)	Reading PK Hor. (dBµV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level PK Vert. (dBµV/m)	Level PK Hor. (dBµV/m)	Limit AV (dBµV/m)	Dlimit (dB)
1846,00	61,3	58,8	-16,9	-16,9	44,4	41,9	54,0	-9,6
2776,00	60,2	53,5	-13,3	-13,3	46,9	40,2	54,0	-7,1
7552,00	39,5	38,7	6,7	6,7	46,2	45,4	54,0	-7,8
8320,00	43,8	40,8	7,2	7,2	51,0	48,0	54,0	-3,0
9248,00	38,0	43,8	7,6	7,6	45,6	51,4	54,0	-2,6

TX-LR-CH2

Frequency (MHz)	Reading PK Vert. (dBµV)	Reading PK Hor. (dBµV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level PK Vert. (dBµV/m)	Level PK Hor. (dBµV/m)	Limit AV (dBµV/m)	Dlimit (dB)
1846,00	62,8	61,8	-16,9	-16,9	45,9	44,9	54,0	-8,1
2776,00	57,1	53,3	-13,3	-13,3	43,8	39,9	54,0	-10,2
7552,00	36,1	38,8	6,7	6,7	42,9	45,5	54,0	-8,5
8320,00	43,6	40,6	7,2	7,2	50,8	47,8	54,0	-3,2
9428,00	38,0	45,0	7,6	7,6	45,7	52,7	54,0	-1,3

RX-LR-DSSS

Frequency (MHz)	Reading PK Vert. (dBµV)	Reading PK Hor. (dBµV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level PK Vert. (dBµV/m)	Level PK Hor. (dBµV/m)	Limit AV (dBµV/m)	Dlimit (dB)
1852,00	57,2	56,2	-16,8	-16,8	40,5	39,4	54,0	-13,5
3704,00	50,9	53,5	-12,5	-12,5	38,4	41,0	54,0	-13,0

Limit according to FCC Part 15C, Section 15.209 and RSS-Gen 8.9:

Frequency (MHz)	15.209 Limits (µV/m)	Measurement distance (m)
0.009 - 0.49	2400/f(kHz)	300
0.49 – 1.705	24000/f(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Limit according to FCC Part 15C, Section 15.247(d) and RSS-247, 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a)/RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

The requirements are **FULFILLED**.

Remarks: The measurement was performed up to the 10th harmonic (10000 MHz).

In the frequency ranges were the AV limit is kept by PK values, no duty cycle correction

was applied. The general limit according to FCC Part 15.209 and RSS-Gen 8.9 is kept.


4.7 Band edge compliance

For test instruments and accessories used see section 6 Part **MB**.

4.7.1 Description of the test location

Test location: AREA4

4.7.2 Photo documentation of the test set-up

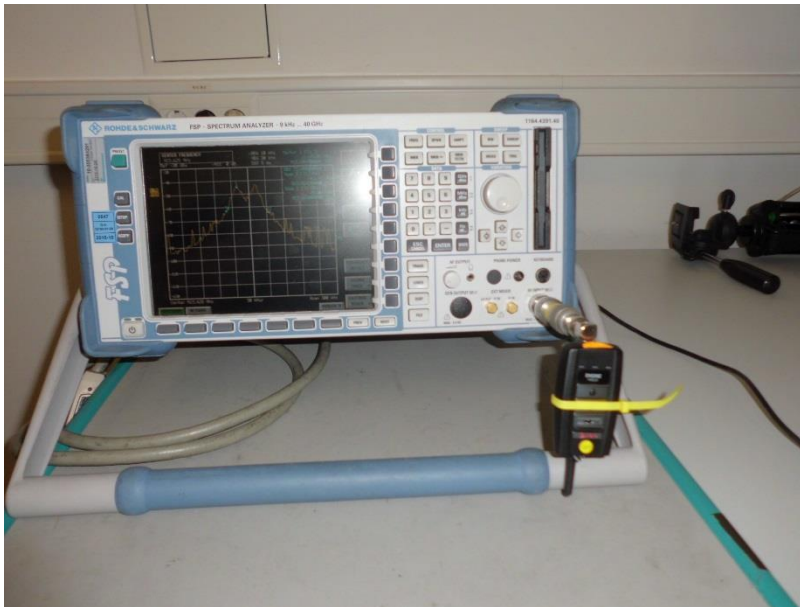

4.7.3 Applicable standard

According to FCC Part 15C, 15.247(d) and RSS-247, 5.5.

4.7.4 Description of Measurement


The measurement was performed according to KDB 558074 D01, Item 11.0

The resolution bandwidth during the measurement is as follows:


RBW: 100 kHz, VBW: 300 kHz, Detector: Max peak, Trace: Max hold, Sweep: auto

4.7.5 Test result


TX-LR-CH1 (spreading 15x)

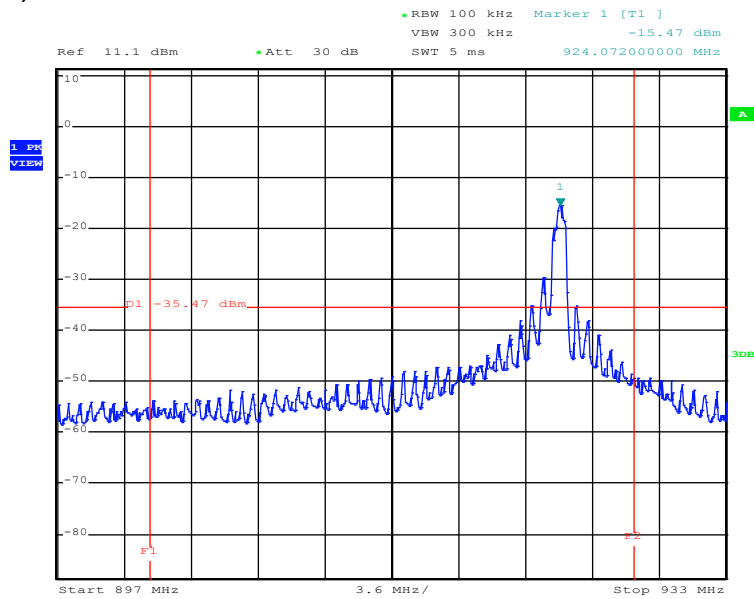


TX-LR-CH1 (spreading 31x)

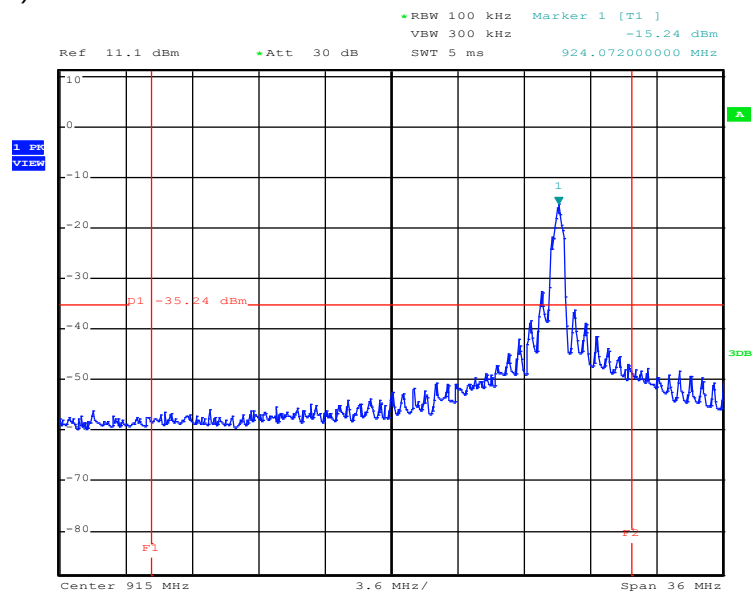

TX-LR-CH1 (spreading 15x)

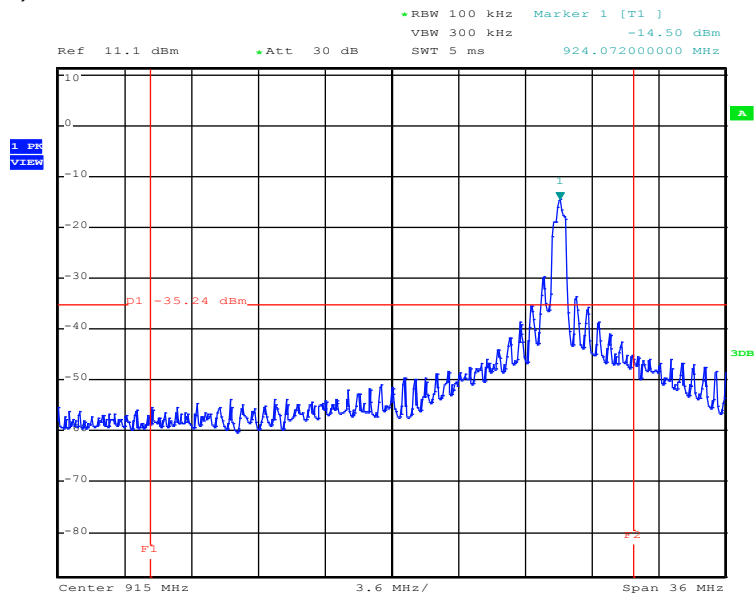

TX-LR-CH1 (spreading 31x)

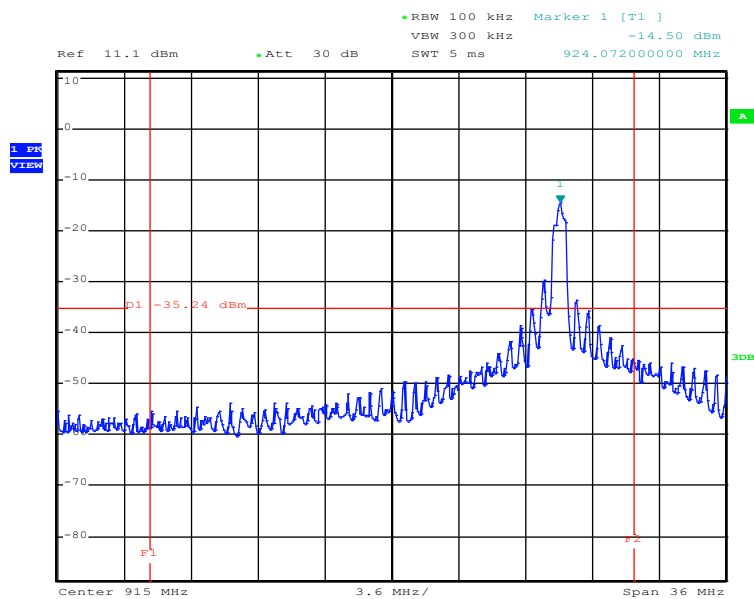

Limit according to FCC Part 15C, Section 15.247(d) and RSS-247, 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a)/RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

The requirements are **FULFILLED**.

Remarks: none

5 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
CPC 2	FSP 40 RF Antenna	02-02/11-11-001 02-02/24-05-032	28/10/2016	28/10/2015		
CPR 2	VULB 9163 N-40000-N N-30000-N	01-02/24-01-006 01-02/50-05-043 01-02/50-05-044	17/11/2017	17/11/2014	13/07/2016	13/01/2016
MB	FSP 40 RF Antenna	02-02/11-11-001 02-02/24-05-032	28/10/2016	28/10/2015		
SER 1	FMZB 1516 ESCI NW-2000-NB KK-EF393/U-16N-21N20 m KK-SD_7/8-2X21N-33,0M	01-02/24-01-018 02-02/03-05-004 02-02/50-05-113 02-02/50-12-018 02-02/50-15-028	17/09/2016	17/09/2015	21/01/2017	21/01/2016
SER 2	VULB 9163 N-40000-N N-30000-N ESVS 30	01-02/24-01-006 01-02/50-05-043 01-02/50-05-044 02-02/03-05-006	17/11/2017 04/07/2017	17/11/2014 04/07/2016	13/07/2016	13/01/2016
SER 3	FSP 30 AFS5-12001800-18-10P-6 AFS4-01000400-10-10P-4 AMF-4F-04001200-15-10P 3117 Sucoflex N-2000-SMA SF104/11N/11N/1500MM	02-02/11-05-001 02-02/17-06-002 02-02/17-13-002 02-02/17-13-003 02-02/24-05-009 02-02/50-05-075 02-02/50-13-015	01/10/2016 24/05/2017	01/10/2015 24/05/2016		