


1. LABELS LOCATION ON AHV1600 FRONT & SIDE FACE

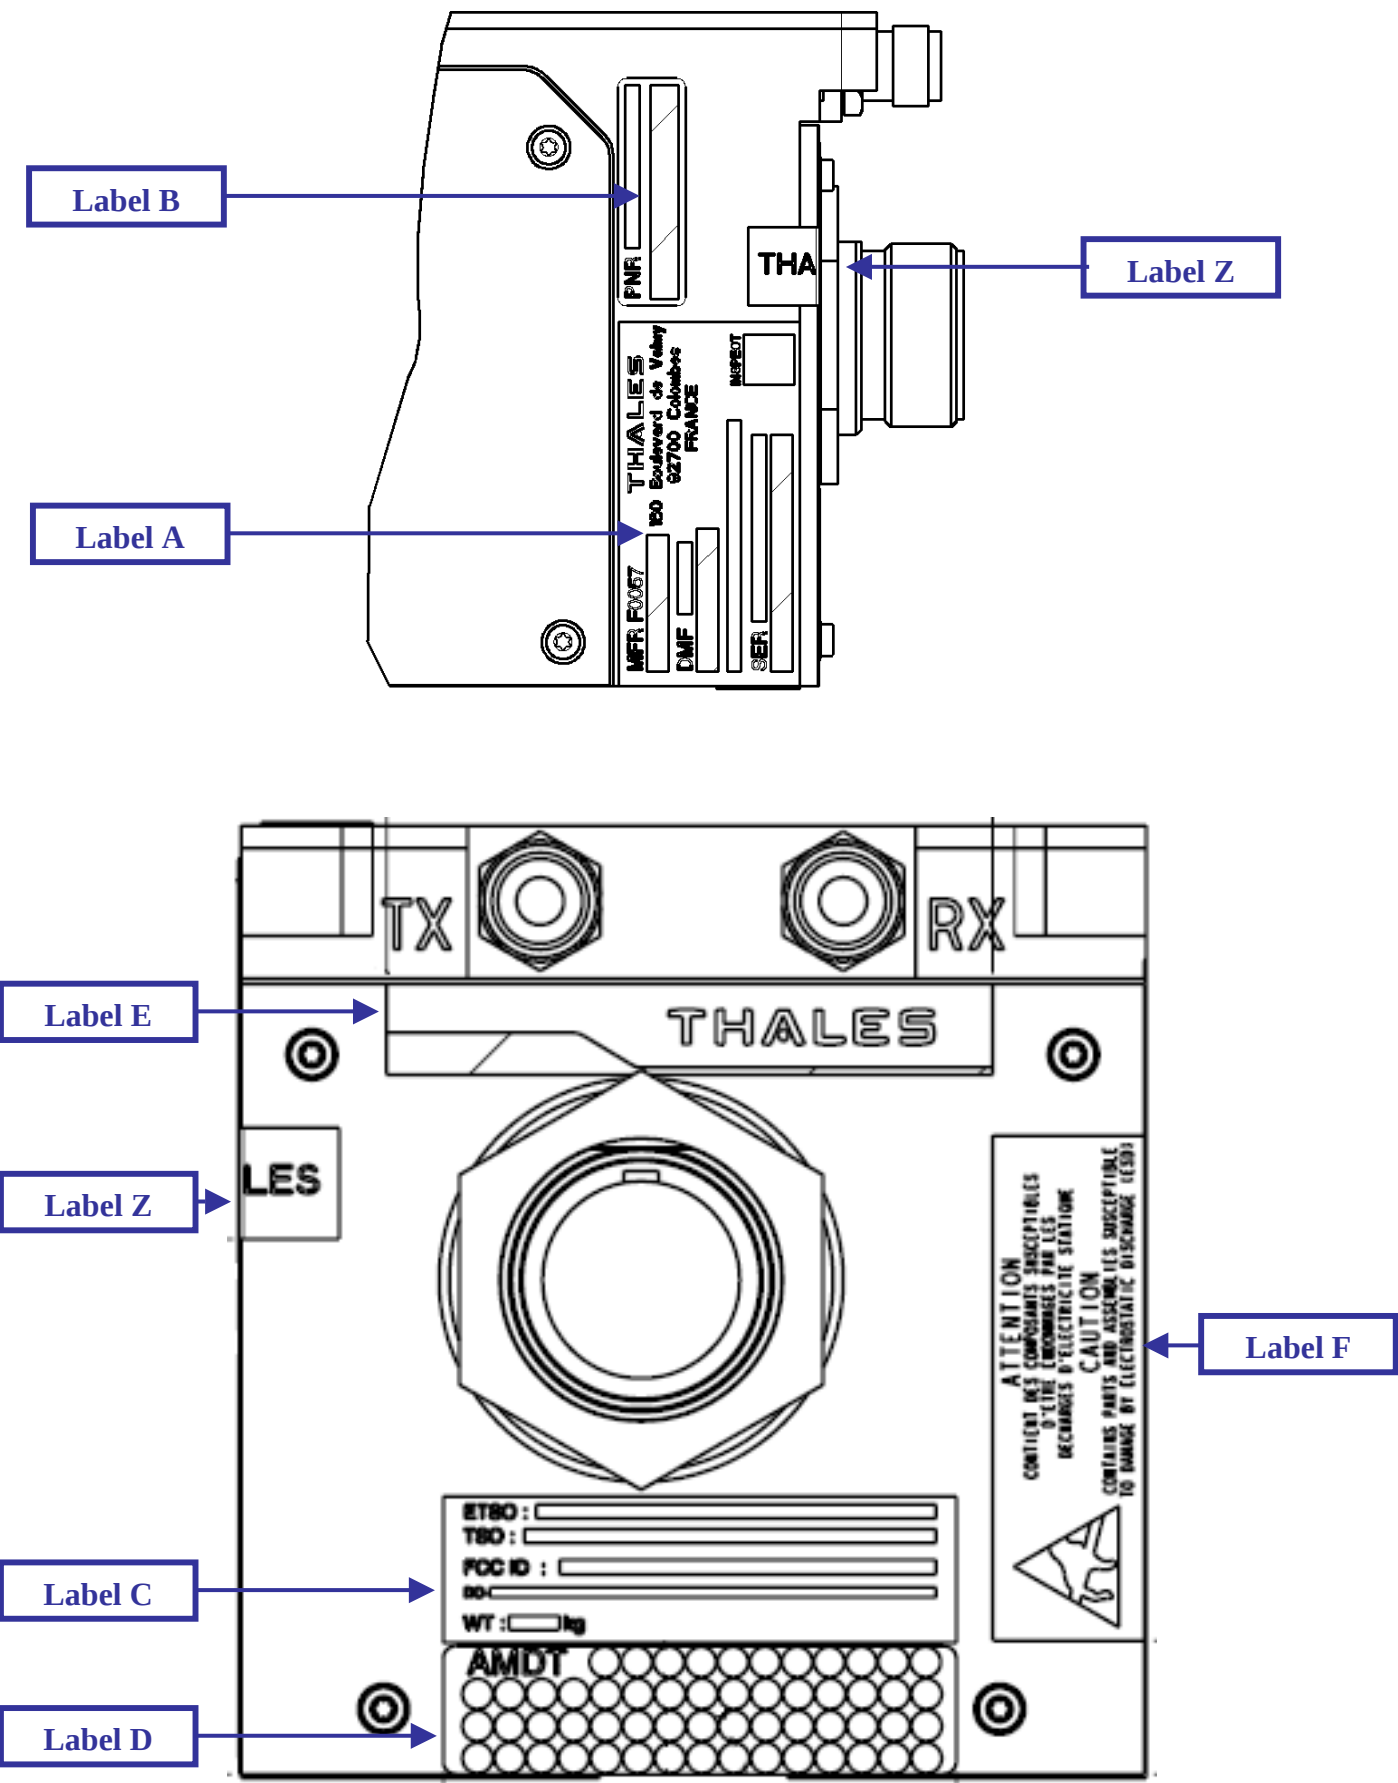


2. LABEL DESCRIPTION

2.1 LABEL A MARKING

MANUFACTURING SERIAL NUMBER LABEL : (50,80x25,40)

Black marking,
Characters height to insert = 2 mm,
Hatched areas correspond to code bar data

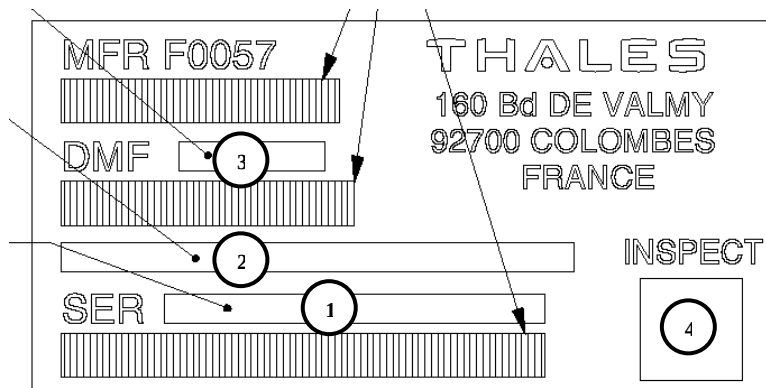


- 1- **SER**ial number : NNNNNNNNAASSSSS
NNNNNNNNAA = 8 digits + 2 letters for Part Number
SSSSS = 5 digits for Sequence into the part number
- 2- LRU description : **L R RADIO ALTIMETER**
- 3- Date of **ManuFacturing** : MMYYYY
2 digits for Month and 4 digits for Year
- 4- **INSPECT**ion stamp


2.2 LABEL B MARKING

THALES IDENTIFICATION LABEL : (31,75x9,53)

Black marking,
Characters height to insert = 2 mm,
Hatched areas correspond to code bar data.

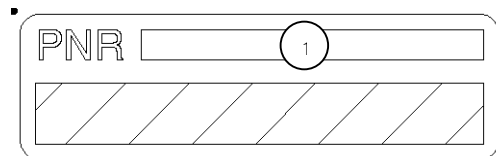

- 1- THALES commercial part number :
The P/N for AHV1600 **serial equipment** will be AHV1600-XX-XX XX X

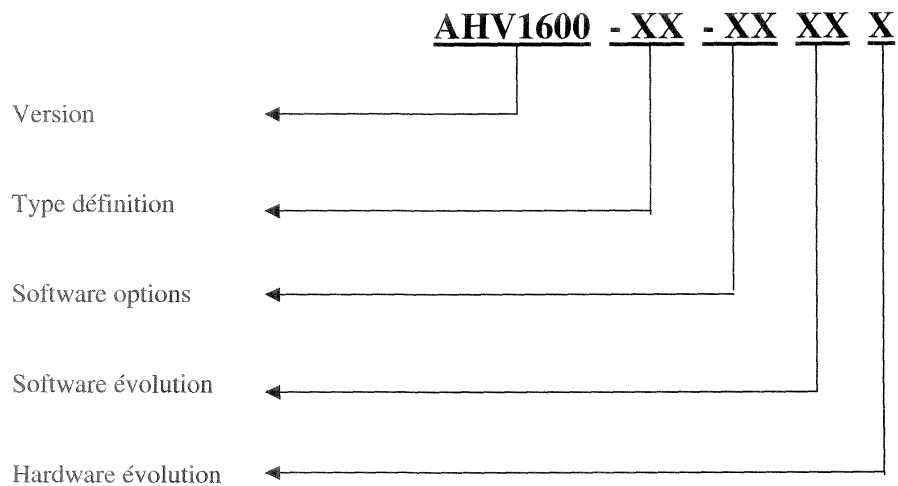

2.3 LABEL C MARKING

SPECIFIC LABEL : (50.8x25.4)

Black marking,

Characters height to insert = 2 mm, except line ④ = 1.5 mm

ETSO :		①
TSO :		②
FCC ID :		③
DO:		④
WT :	⑤ kg	

- 1- ETSO certification number : to be defined
- 2- TSO certification number : to be defined
- 3- FCC ID designation : to be defined
- 4- DO designation : to be defined
- 5- Weight: ≤ 2,00 Kg

2.4 LABEL D MARKING

AMENDMENT LABEL : (50,80x12,70)

Amendment identified by alpha (A to Z)

AMDT	A	B	C	D	E	F	G	H	J	K	L			
M	N	P	R	T	U	W	Y	Z	AA	AB	AC	AD	AE	AF
AG	AH	AJ	AK	AL	AM	AN	AP	AR	AT	AU	AW	AY	AZ	BA
BB	BC	BD	BE	BF	BG	BH	BJ	BK	BL	BM	BN	BP	BR	BT


2.5 LABEL E MARKING

THALES LOGO LABEL : (60x9)



2.6 LABEL F MARKING

ESD (Electro Static Discharge) LABEL : (50x15)
Black letter on yellow label

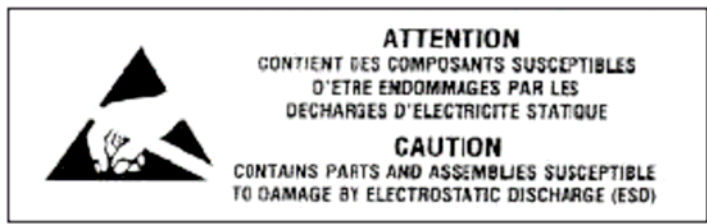

2.7 LABEL Z MARKING

IMMUNITY LABEL : (19.5x11)
Metallic color

