



香 港 標 準 及 檢 定 中 心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 1 of 27

No. : HM153458

**Applicant:**

Beauty Sound Ltd.  
Unit 13, 10/F, Goldfield Industrial Centre,  
1 Sui Wo Road, Fotan, Shatin, N.T., Hong Kong.

**Description of Samples:**

Model name: Sound Transmitter  
Model no.: 9753  
Brand name: N/A  
FCC ID: KXS-9753

**Date Samples Received:**

2005-02-26

**Date Tested:**

2005-03-23

**Investigation Requested:**

FCC Part 15 Subpart C

**Conclusions:**

The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

**Remarks:**

For additional models details, see page 5.

---

K C Lee, EMC  
for Chief Executive

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre.

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: [www.hkstc.org](http://www.hkstc.org) (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 2 of 27

No. : HM153458

**CONTENT:**

Cover	Page 1 of 27
Content	Page 2-3 of 27
<b><u>1.0 General Details</u></b>	
1.1 Test Laboratory	Page 4 of 27
1.2 Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer	Page 4 of 27
1.3 Equipment Under Test [EUT] Description of EUT operation	Page 5 of 27
1.4 Date of Order	Page 5 of 27
1.5 Submitted Samples	Page 5 of 27
1.6 Test Duration	Page 5 of 27
1.7 Country of Origin	Page 5 of 27
1.8 Additional Information of EUT	Page 6 of 27
<b><u>2.0 Technical Details</u></b>	
2.1 Investigations Requested	Page 7 of 27
2.2 Test Standards and Results Summary	Page 7 of 27
<b><u>3.0 Test Results</u></b>	
3.1 Emission	Page 8-17 of 27
3.2 Bandwidth Measurement	Page 18-24 of 27

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: [www.hkstc.org](http://www.hkstc.org) (the section "Application and Quotation").



香 港 標 準 及 檢 定 中 心  
**Hong Kong Standards and Testing Centre**

Date : 2005-03-30

**TEST REPORT**

Page 3 of 27

No. : HM153458

**Appendix A**

List of Measurement Equipment

Page 25 of 27

**Appendix B**

Photographs

Page 26-27 of 27

COPY

COPY

COPY

COPY

COPY

COPY

COPY

COPY

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: [www.hkstc.org](http://www.hkstc.org) (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 4 of 27

No. : HM153458

**1.0 General Details**

**1.1 Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd.  
EMC Laboratory  
10 Dai Wang Street, Taipo Industrial Estate  
New Territories, Hong Kong

Telephone: 852 2666 1888  
Fax: 852 2664 4353

**1.2 Applicant Details**  
**Applicant**

Beauty Sound Ltd.  
Unit 13, 10/F, Goldfield Industrial Centre,  
1 Sui Wo Road, Fotan, Shatin, N.T., Hong Kong.

**HKSTC Code Number for Applicant**

**GLT001**

**Manufacturer**

1. Sunwind Electronic Limited.  
Jiumen Zhai, No. 2 Area, Humen Town, Dongguan,  
Guangdong, China
2. Jin Cheng Electronics Manufactory  
Dongguan Shi Dong Cheng Qu Sang Yuan Shi Jing Gong Ye Qu
3. Yin Feng Plastics Electronics Co., Ltd.  
Nan An Cun Industrial Area, You Gan Pu, Feng Gang,  
Dongguan, Guangdong, China

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: [www.hkstc.org](http://www.hkstc.org) (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 5 of 27

No. : HM153458

**1.3 Equipment Under Test [EUT]  
Description of Sample**

Model Name: FM Stereo Transmitter  
Manufacturer: 1. Sunwind Electronic Limited  
2. Jin Cheng Electronics Manufactory  
3. Yin Feng Plastics Electronics Co., Ltd  
Brand Name: N/A  
Additional Brand Name: WAGAN TECH, UBUY  
Model Number: 9753  
Additional Model Number: FM301  
Input Voltage: 3Vd.c ("AAA" size battery x 2)

**1.3.1 Description of EUT Operation**

The Equipment Under Test (EUT) is a Beauty Sound Ltd., Sound Transmitter. The transmitter is a 2 button transmitter. The EUT continues to transmit while Trigger is being pressed. Modulation by Microphone and type is frequency modulation.

**1.4 Date of Order**

2005-02-26

**1.5 Submitted Sample(s):**

1 Sample per model

**1.6 Test Duration**

2005-03-23

**1.7 Country of Origin**

China

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 6 of 27

No. : HM153458

**1.8 Additional Information of EUT**

User Manual  
Part List  
Circuit Diagram  
Printed Circuit Board [PCB] Layout  
Block diagram  
FCC ID Label

Submitted

Not Available

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: [www.hkstc.org](http://www.hkstc.org) (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 7 of 27

No. : HM153458

**2.0 Technical Details**

**2.1 Investigations Requested**

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4: 2003 for FCC Certification.

**2.2 Test Standards and Results Summary Tables**

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Failed	N/A
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.239	ANSI C63.4:2003	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	Class B	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	Class B	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Note: N/A - Not Applicable

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 8 of 27

No. : HM153458

**3.0 Test Results**

**3.1 Emission**

**3.1.1 Radiated Emissions (30 – 1000MHz)**


Test Requirement:	FCC 47CFR 15.239
Test Method:	ANSI C63.4:2003
Test Date:	2005-03-23
Mode of Operation:	Tx mode

**Test Method:**

The sample was placed 0.8m above the ground plane on the OATS \*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane filled with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 90657 or 607756.

**Test Setup:**

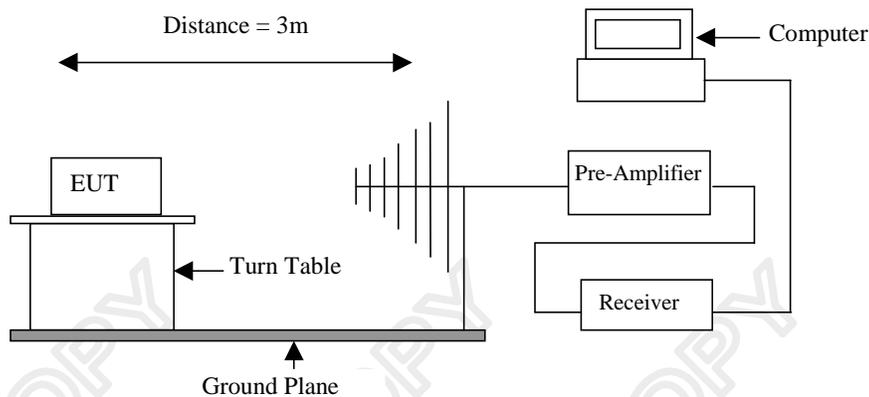

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: [www.hkstc.org](http://www.hkstc.org) (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 9 of 27

No. : HM153458

**Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.239]:**

Frequency Range of Fundamental [MHz]	Peak Limits [ $\mu\text{V/m}$ ]	Average Limits [ $\mu\text{V/m}$ ]
88-108	2,500	250

**Results of Tx Mode: PASS**

Field Strength of Fundamental Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu\text{V/m}$	Correction Factor dB $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
88.80	24.6	9.5	34.1	50.7	2,500	Horizontal

Field Strength of Fundamental Emissions Average Value						
Frequency MHz	Measured Level @3m dB $\mu\text{V/m}$	Correction Factor dB $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
88.80	< 1.0	9.5	< 10.5	< 3.3	250	Horizontal

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz  $\pm 4.1\text{dB}$

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For effective averaging, the bandwidth of the video filter must be smaller than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be. Below setting for HP8572A EMI Receiver.

Resolution Bandwidth : 3MHz

Video Bandwidth 1Hz

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 10 of 27

No. : HM153458

**Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:**

Frequency Range [MHz]	Limits [ $\mu\text{V/m}$ ]
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

**Results of Tx Mode: PASS**

Radiated Emissions Quasi-Peak						
Frequency MHz	Measured Level @3m $\text{dB}\mu\text{V/m}$	Correction Factor $\text{dB}\mu\text{V/m}$	Field Strength $\text{dB}\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
177.60	17.5	11.2	28.7	27.2	150	Horizontal
266.40	17.3	14.0	31.3	36.7	150	Horizontal
355.20	< 1.0	11.5	< 12.5	< 4.2	150	Vertical
444.00	< 1.0	15.9	< 16.9	< 7.0	200	Vertical
532.80	< 1.0	17.4	< 18.4	< 8.3	200	Vertical
621.60	< 1.0	17.2	< 18.2	< 8.1	200	Vertical
710.40	< 1.0	18.8	< 19.8	< 9.8	200	Vertical
799.20	< 1.0	19.7	< 20.7	< 10.8	200	Vertical
888.00	< 1.0	20.6	< 21.6	< 12.0	200	Vertical

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz  $\pm 4.1\text{dB}$

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: [www.hkstc.org](http://www.hkstc.org) (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 11 of 27

No. : HM153458

**Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.239]:**

Frequency Range of Fundamental [MHz]	Peak Limits [ $\mu\text{V/m}$ ]	Average Limits [ $\mu\text{V/m}$ ]
88-108	2,500	250

**Results of Tx Mode: PASS**

Field Strength of Fundamental Emissions Peak Value						
Frequency MHz	Measured Level @3m $\text{dB}\mu\text{V/m}$	Correction Factor $\text{dB}\mu\text{V/m}$	Field Strength $\text{dB}\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
92.09	27.6	9.7	37.3	73.3	2,500	Horizontal

Field Strength of Fundamental Emissions Average Value						
Frequency MHz	Measured Level @3m $\text{dB}\mu\text{V/m}$	Correction Factor $\text{dB}\mu\text{V/m}$	Field Strength $\text{dB}\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
92.09	< 1.0	9.7	< 10.7	< 3.4	250	Horizontal

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz  $\pm 4.1\text{dB}$

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For effective averaging, the bandwidth of the video filter must be smaller than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be. Below setting for HP8572A EMI Receiver.

Resolution Bandwidth : 3MHz

Video Bandwidth 1Hz

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 12 of 27

No. : HM153458

**Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:**

Frequency Range [MHz]	Limits [ $\mu\text{V/m}$ ]
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

**Results of Tx Mode: PASS**

Radiated Emissions Quasi-Peak						
Frequency MHz	Measured Level @3m dB $\mu\text{V/m}$	Correction Factor dB $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
184.18	18.4	11.6	30.0	31.6	150	Horizontal
276.27	22.6	14.3	36.9	70.0	150	Horizontal
368.36	< 1.0	11.5	< 12.5	< 4.2	150	Vertical
460.45	< 1.0	15.9	< 16.9	< 7.0	200	Vertical
552.54	< 1.0	17.4	< 18.4	< 8.3	200	Vertical
644.63	< 1.0	17.2	< 18.2	< 8.1	200	Vertical
736.72	< 1.0	18.8	< 19.8	< 9.8	200	Vertical
828.81	< 1.0	19.7	< 20.7	< 10.8	200	Vertical
920.90	< 1.0	20.6	< 21.6	< 12.0	200	Vertical

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz  $\pm 4.1\text{dB}$

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 13 of 27

No. : HM153458

**Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.239]:**

Frequency Range of Fundamental [MHz]	Peak Limits [ $\mu\text{V/m}$ ]	Average Limits [ $\mu\text{V/m}$ ]
88-108	2,500	250

**Results of Tx Mode: PASS**

Field Strength of Fundamental Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu\text{V/m}$	Correction Factor dB $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
96.90	27.7	10.2	37.9	78.5	2,500	Horizontal

Field Strength of Fundamental Emissions Average Value						
Frequency MHz	Measured Level @3m dB $\mu\text{V/m}$	Correction Factor dB $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
96.90	< 1.0	10.2	< 11.2	< 3.6	250	Horizontal

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz  $\pm 4.1\text{dB}$

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For effective averaging, the bandwidth of the video filter must be smaller than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be. Below setting for HP8572A EMI Receiver.

Resolution Bandwidth : 3MHz

Video Bandwidth 1Hz

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 14 of 27

No. : HM153458

**Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:**

Frequency Range [MHz]	Limits [ $\mu\text{V/m}$ ]
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

**Results of Tx Mode: PASS**

Radiated Emissions Quasi-Peak						
Frequency MHz	Measured Level @3m dB $\mu\text{V/m}$	Correction Factor dB $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
193.80	18.0	11.8	29.8	30.9	150	Horizontal
290.70	21.5	14.8	36.3	65.3	150	Horizontal
387.60	< 1.0	11.5	< 12.5	< 4.2	150	Vertical
484.50	< 1.0	15.9	< 16.9	< 7.0	200	Vertical
581.40	< 1.0	17.4	< 18.4	< 8.3	200	Vertical
678.30	< 1.0	17.2	< 18.2	< 8.1	200	Vertical
775.20	< 1.0	18.8	< 19.8	< 9.8	200	Vertical
872.10	< 1.0	19.7	< 20.7	< 10.8	200	Vertical
969.00	< 1.0	20.6	< 21.6	< 12.0	200	Vertical

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz  $\pm 4.1\text{dB}$

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 15 of 27

No. : HM153458

**Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.239]:**

Frequency Range of Fundamental [MHz]	Peak Limits [ $\mu\text{V/m}$ ]	Average Limits [ $\mu\text{V/m}$ ]
88-108	2,500	250

**Results of Tx Mode: PASS**

Field Strength of Fundamental Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu\text{V/m}$	Correction Factor dB $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
106.70	28.3	10.0	38.3	82.2	2,500	Horizontal

Field Strength of Fundamental Emissions Average Value						
Frequency MHz	Measured Level @3m dB $\mu\text{V/m}$	Correction Factor dB $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
106.70	< 1.0	10.0	< 11.0	< 3.5	250	Horizontal

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz  $\pm 4.1\text{dB}$

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For effective averaging, the bandwidth of the video filter must be smaller than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be. Below setting for HP8572A EMI Receiver.

Resolution Bandwidth : 3MHz

Video Bandwidth 1Hz

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 16 of 27

No. : HM153458

**Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:**

Frequency Range [MHz]	Limits [ $\mu\text{V/m}$ ]
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

**Results of Tx Mode: PASS**

Radiated Emissions Quasi-Peak						
Frequency MHz	Measured Level @3m dB $\mu\text{V/m}$	Correction Factor dB $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Field Strength $\mu\text{V/m}$	Limit @3m $\mu\text{V/m}$	E-Field Polarity
213.40	16.2	12.2	28.4	26.3	150	Horizontal
320.10	8.0	15.4	23.4	14.8	150	Horizontal
426.80	< 1.0	11.5	< 12.5	< 4.2	150	Vertical
533.50	< 1.0	15.9	< 16.9	< 7.0	200	Vertical
640.20	< 1.0	17.4	< 18.4	< 8.3	200	Vertical
746.90	< 1.0	17.2	< 18.2	< 8.1	200	Vertical
853.60	< 1.0	18.8	< 19.8	< 9.8	200	Vertical
960.30	< 1.0	19.7	< 20.7	< 10.8	200	Vertical
1067.00	< 1.0	20.6	< 21.6	< 12.0	200	Vertical

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz  $\pm 4.1\text{dB}$

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 17 of 27

No. : HM153458

**3.1.2 Conducted Emissions (0.15MHz to 30MHz)**

Test Requirement:	FCC 47CFR 15.207
Test Method:	ANSI C63.4:2003
Test Date:	N/A
Mode of Operation:	N/A

**Results:** N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: [www.hkstc.org](http://www.hkstc.org) (the section "Application and Quotation").



香 港 標 準 及 檢 定 中 心  
**Hong Kong Standards and Testing Centre**

Date : 2005-03-30

**TEST REPORT**

Page 18 of 27

No. : HM153458

**3.2 20B Bandwidth of Fundamental Emission**

Test Requirement:	FCC 47 CFR 15.227
Test Method:	ANSI C63.4:2003 (Section 13.1.7)
Test Date:	2005-03-23
Mode of Operation:	On mode

**Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

**Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: [www.hkstc.org](http://www.hkstc.org) (the section "Application and Quotation").



香港標準及檢定中心  
**Hong Kong Standards and Testing Centre**

Date : 2005-03-30

**TEST REPORT**

Page 19 of 27

No. : HM153458


**Limits for 20dB Bandwidth of Fundamental Emission:**

Frequency Range [MHz]	20dB Bandwidth [kHz]	FCC Limits [kHz]
88.7	127.5	200

**Results of Tx Mode: PASS**

The following figure is the measured bandwidth of Fundamental Emission.

**20dB Bandwidth of Fundamental Emission**

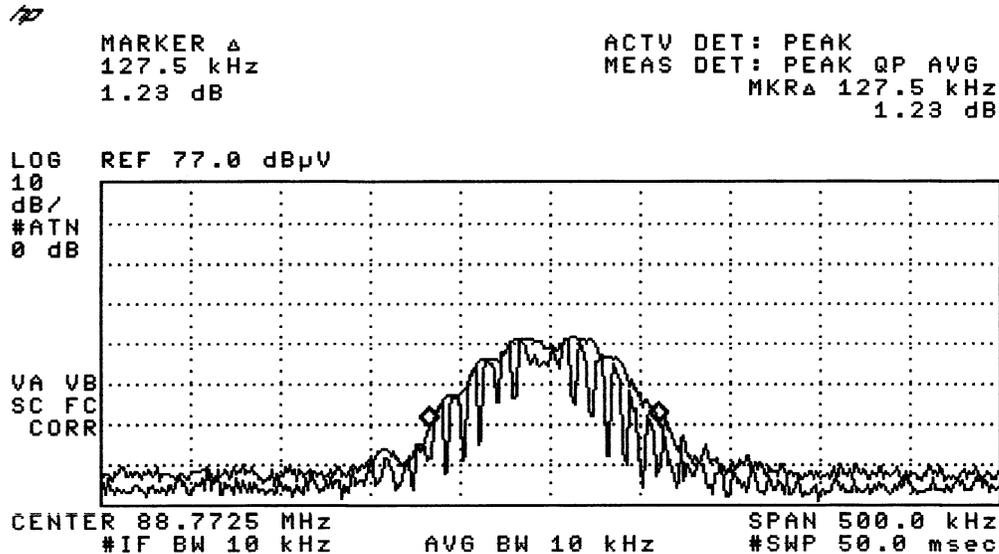

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
**Hong Kong Standards and Testing Centre**

Date : 2005-03-30

**TEST REPORT**

Page 20 of 27

No. : HM153458


**Limits for 20dB Bandwidth of Fundamental Emission:**

Frequency Range [MHz]	20dB Bandwidth [kHz]	FCC Limits [kHz]
91.9	128.8	200

**Results of Tx Mode: PASS**

The following figure is the measured bandwidth of Fundamental Emission.

**20dB Bandwidth of Fundamental Emission**

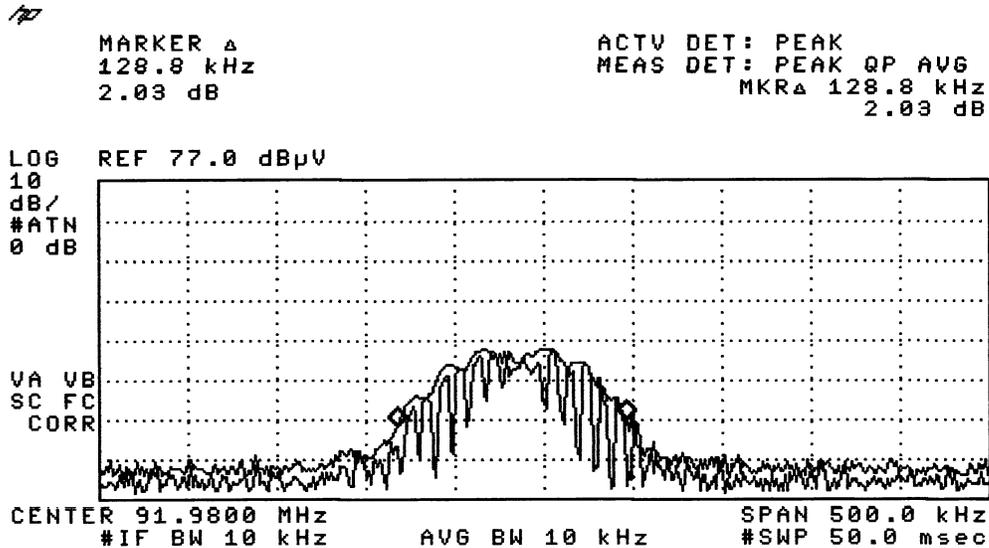

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
 For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
 STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
**Hong Kong Standards and Testing Centre**

Date : 2005-03-30

**TEST REPORT**

Page 21 of 27

No. : HM153458

**Limits for 20dB Bandwidth of Fundamental Emission:**

Frequency Range [MHz]	20dB Bandwidth [kHz]	FCC Limits [kHz]
96.5	147.5	200

**Results of Tx Mode: PASS**

The following figure is the measured bandwidth of Fundamental Emission.

**20dB Bandwidth of Fundamental Emission**

~~177~~


MARKER Δ  
 147.5 kHz  
 2.03 dB

ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKRΔ 147.5 kHz  
 2.03 dB

LOG REF 77.0 dBμV

10  
 dB/  
 #ATTN  
 0 dB

VA VB  
 SC FC  
 CORR

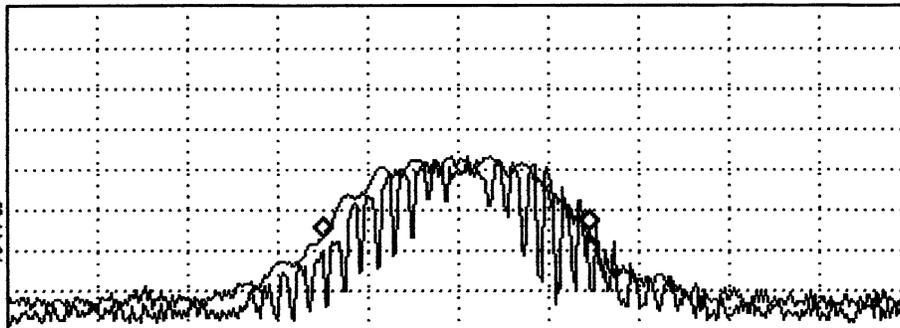

CENTER 96.5075 MHz  
 #IF BW 10 kHz

AVG BW 10 kHz

SPAN 500.0 kHz  
 #SWP 50.0 msec

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
 For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
 STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
**Hong Kong Standards and Testing Centre**

Date : 2005-03-30

**TEST REPORT**

Page 22 of 27

No. : HM153458

**Limits for 20dB Bandwidth of Fundamental Emission:**

Frequency Range [MHz]	20dB Bandwidth [kHz]	FCC Limits [kHz]
96.8	160.0	200


**Results of Tx Mode: PASS**

The following figure is the measured bandwidth of Fundamental Emission.

**20dB Bandwidth of Fundamental Emission**

MARKER  $\Delta$   
 160.0 kHz  
 2.39 dB

ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR $\Delta$  160.0 kHz  
 2.39 dB

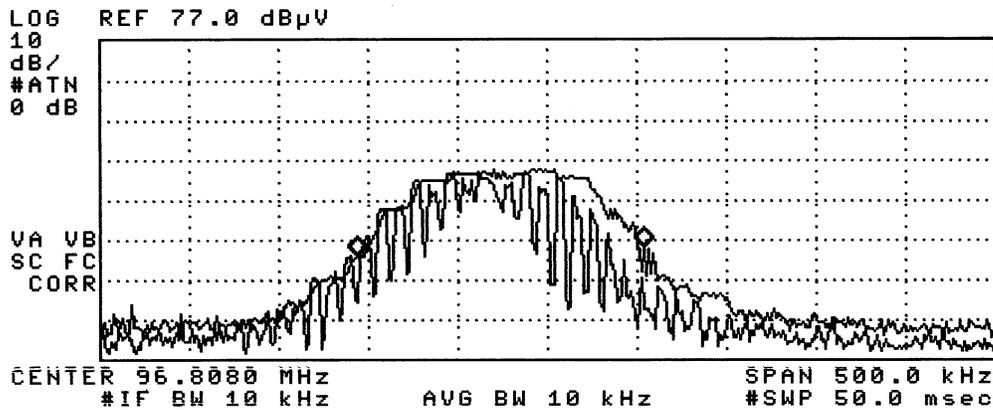

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
 For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
 STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
**Hong Kong Standards and Testing Centre**

Date : 2005-03-30  
 No. : HM153458

**TEST REPORT**

Page 23 of 27

**Limits for 20dB Bandwidth of Fundamental Emission:**

Frequency Range [MHz]	20dB Bandwidth [kHz]	FCC Limits [kHz]
100.5	163.8	200

**Results of Tx Mode: PASS**

The following figure is the measured bandwidth of Fundamental Emission.


**20dB Bandwidth of Fundamental Emission**

1/2

MARKER  $\Delta$   
 163.8 kHz  
 .94 dB

ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR $\Delta$  163.8 kHz  
 .94 dB

LOG REF 77.0 dB $\mu$ V  
 10  
 dB/  
 #ATN  
 0 dB

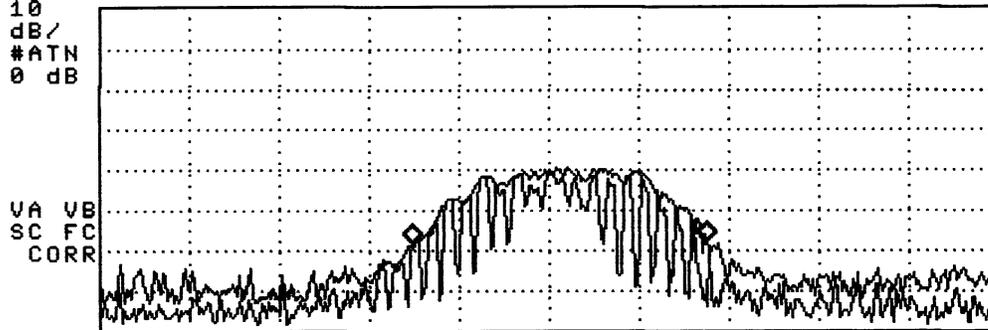

CENTER 100.5213 MHz  
 #IF BW 10 kHz  
 AVG BW 10 kHz  
 SPAN 500.0 kHz  
 #SWP 50.0 msec

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
 Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
 For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
 STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
**Hong Kong Standards and Testing Centre**

Date : 2005-03-30  
 No. : HM153458

**TEST REPORT**

Page 24 of 27

**Limits for 20dB Bandwidth of Fundamental Emission:**

Frequency Range [MHz]	20dB Bandwidth [kHz]	FCC Limits [kHz]
106.5	181.3	200

**Results of Tx Mode: PASS**

The following figure is the measured bandwidth of Fundamental Emission.


**20dB Bandwidth of Fundamental Emission**

*hp*

MARKER  $\Delta$   
 181.3 kHz  
 4.36 dB

ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR $\Delta$  181.3 kHz  
 4.36 dB

LOG REF 77.0 dB $\mu$ V  
 10  
 dB/  
 #ATN  
 0 dB

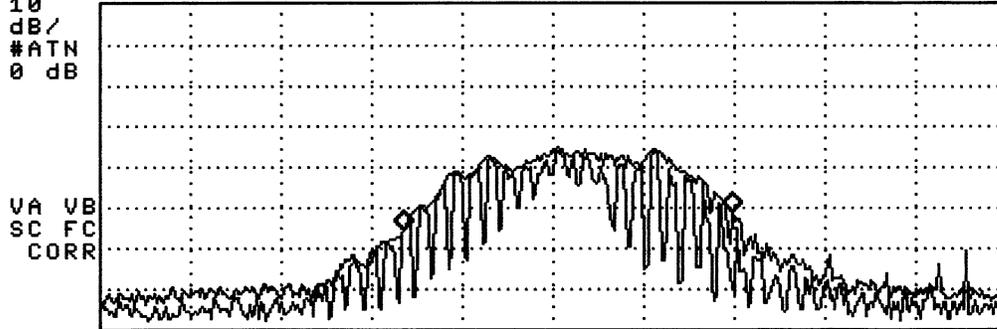

CENTER 106.5143 MHz SPAN 500.0 kHz  
 #IF BW 10 kHz AVG BW 10 kHz #SWP 50.0 msec

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
 Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org  
 For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
 STC: www.hkstc.org (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30

**TEST REPORT**

Page 25 of 27

No. : HM153458

**Appendix A**

**List of Measurement Equipment**

**Radiated Emission**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	15/06/04
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	15/06/04
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	15/06/04
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	15/06/04
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	15/06/04
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	15/06/04
EM013	CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE	HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD	HP9000 HP A1097C HP9133L	6226A60314 3151J39517 2623A02468	15/06/04
EM020	HORN ANTENNA	EMCO	3115	4032	30/07/03
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	30/07/03
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892	N/A
EM083	HKSTC OPEN AREA TEST SITE	HKSTC	N/A	N/A	08/02/03
EM131	PORTABLE SPECTRUM ANALYSER	HEWLETT PACKARD	8595EM	3710A00155	13/01/04
EM145	EMI TEST RECEIVER	R & S	ESCS 30	830245/021	04/10/04
EM219	BICONILOG ANTENNA	EMCO	3142C	00029071	28/10/03
EM195	ANTENNA POSITIONING MAST	EMCO	2075	2368	N/A
EM196	MULTI-DEVICE CONTROLLER	EMCO	2090	1662	N/A

**Line Conducted**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A	CM
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A	17/10/03
EM119	LISN	R & S	ESH3-Z5	0831.5518.52	14/10/04
EM127	ISOLATION TRANSFORMER 220 TO 300	WING SUN	N/A	N/A	CM
EM142	PULSES LIMITER	R & S	ESH3Z2	357.8810.52	04/08/04
EM181	EMI TEST RECEIVER	R & S	ESIB7	100072	06/01/04
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	17/10/03
EM197	LISN	EMCO	4825/2	1193	05/06/04

**Remarks:-**

CM Corrective Maintenance  
N/A Not Applicable or Not Available  
TBD To Be Determined

香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstdc.org E-mail: hkstdc@hkstdc.org  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: www.hkstdc.org (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre

Date : 2005-03-30  
No. : HM153458

**TEST REPORT**

Page 26 of 27

**Appendix B**

**Photographs of EUT**

**Front View of the product**



**Rear View of the product**



**Inner Circuit Top View**



**Inner Circuit Bottom View**



香港新界大埔工業村大宏街 10 號

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of  
STC: [www.hkstc.org](http://www.hkstc.org) (the section "Application and Quotation").



香港標準及檢定中心  
Hong Kong Standards and Testing Centre


Date : 2005-03-30  
No. : HM153458

**TEST REPORT**

Page 27 of 27

Photographs of EUT

Measurement of Radiated Emission Test Set Up

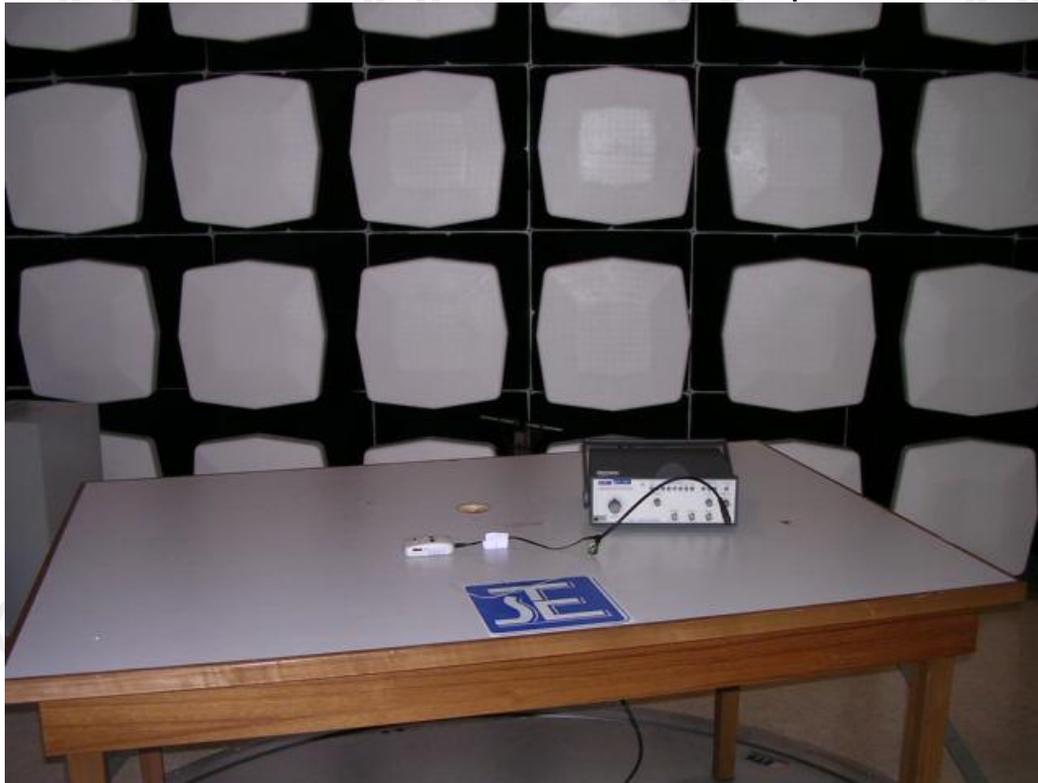

\*\*\*\* End of Test Report \*\*\*\*

COPY COPY COPY COPY